

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : W154R-D002

AGR No : A151A-094

Applicant : G.S. Trading Co., Ltd.

Address : Rm 301, Sang bo B/D, 396-223, Sindorim-Dong, Kuro-Ku, Seoul, Korea

Manufacturer : G.S. Trading Co., Ltd.

Address : Rm 301, Sang bo B/D, 396-223, Sindorim-Dong, Kuro-Ku, Seoul, Korea

Type of Equipment : RF Module

FCC ID. : R6G-GSRMI24-2

Model Name : GSRMI24-2

Serial number : N/A

Total page of Report : 23 pages (including this page)

Date of Incoming : March 10, 2015

Date of issue : April 06, 2015


SUMMARY

The equipment complies with the regulation; **FCC Part 15 Subpart C Section 15.249.**

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by:


Ki-Hong, Nam / Asst, Chief Engineer
ONETECH Corp.

Approved by:


Sung-Ik, Han / Managing Director
ONETECH Corp.

CONTENTS

	PAGE
1. VERIFICATION OF COMPLIANCE	5
2. TEST SUMMARY	6
2.1 TEST ITEMS AND RESULTS	6
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	6
2.3 RELATED SUBMITTAL(s) / GRANT(s)	6
2.4 PURPOSE OF THE TEST	6
2.5 TEST METHODOLOGY.....	6
2.6 TEST FACILITY.....	6
3. GENERAL INFORMATION	7
3.1 PRODUCT DESCRIPTION.....	7
3.2 MODEL DIFFERENCES.....	7
4. EUT MODIFICATIONS	7
5. SYSTEM TEST CONFIGURATION	8
5.1 JUSTIFICATION.....	8
5.2 PERIPHERAL EQUIPMENT	8
5.3 MODE OF OPERATION DURING THE TEST	8
5.4 CONFIGURATION OF TEST SYSTEM	8
5.5 ANTENNA REQUIREMENT	8
6. PRELIMINARY TEST	9
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	9
6.2 GENERAL RADIATED EMISSIONS TESTS	9
7. RADIATED EMISSION TEST.....	10
7.1 TEST SET-UP	10
7.2 MEASUREMENT UNCERTAINTY	10
7.3 TEST EQUIPMENT USED	10
7.4 FINAL RESULT OF MEASUREMENT	11
8. 20 DB BANDWIDTH	18
8.1 OPERATING ENVIRONMENT	18
8.2 TEST SET-UP	18
8.3 TEST EQUIPMENT USED.....	18

8.4 TEST DATA FOR BANDWIDTH.....	18
9. CONDUCTED EMISSION TEST.....	21
9.1 OPERATING ENVIRONMENT	21
9.2 TEST SET-UP	21
9.3 TEST EQUIPMENT USED	21
9.4 TEST DATA FOR TX MODE	22

Revision History

Issue Report No.	Issued Date	Revisions	Effect Section
W154R-D002	April 06, 2015	Initial Issue	All

1. VERIFICATION OF COMPLIANCE

Applicant : G.S. Trading Co., Ltd.
 Address : Rm 301, Sang bo B/D, 396-223, Sindorim-Dong, Kuro-Ku, Seoul, Korea
 Contact Person : Mr. Young-Cheol Na / CEO
 Telephone No. : +82-2-858-1255
 FCC ID : R6G-GSRMI24-2
 Model Name : GSRMI24-2
 Serial Number : N/A
 Date : April 06, 2015

EQUIPMENT CLASS	DXX – Low Power Communications Transmitter
KIND OF EQUIPMENT	Modular Transmitter
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.249
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	None
FINAL TEST WAS CONDUCTED ON	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.249 (a)	Field Strength of Emission	Met the Limit / PASS
15.249 (c)	Measurement distance	Met the Requirement / PASS
15.249 (d)	Emissions Radiated Outside of the Specified Frequency Band	Met the Limit / PASS
15.249 (e)	Radiated Emissions above 1 000 MHz	Met the Limit / PASS
15.209	Radiated Emission Limits, General Requirement	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met the Requirement / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in section 2.1.

2.5 Test Methodology

Radiated testing was performed according to the procedures in ANSI C63.10: 2013 at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 301-14, Daessangnyeong-ri, Chowol-eup, Gwangju-si, Gyeonggi-do, 464-862 Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-4617/ G-666/ T-1842 IC (Industry Canada)
– Registration No. Site# 3736-3

-. Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation No. 85

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The G.S. Trading Co., Ltd., Model GSRMI24-2 (referred to as the EUT in this report) is a RF Module. The product specification described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	RF Module
OPERATING FREQUENCY	2 402 MHz ~ 2 480 MHz
RATED RF OUTPUT POWER	0 dBm
ANTENNA TYPE	PCB Pattern Antenna
MODULATION	GFSK
Tx DATA SPEED	2.0 Mbps
USED RF CHIP	Maker: AlfaPlus Semiconductor, Inc. Model Name: ARF2498
LIST OF EACH OSC. OR CRY. FREQ.(FREQ. >= 1 MHz)	16 MHz
RATED SUPPLY VOLTAGE	DC 3.3 V

3.2 Model Differences

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	N/A	N/A	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested: None

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at Low Channel (2 402 MHz), Middle Channel (2 441 MHz), and High Channel (2 480 MHz). To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis.

5.4 Configuration of Test System

Line Conducted Test : The DC Power Supply of the EUT was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

Radiated Emission Test : Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 m open area test site.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

According to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is a pattern antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
TX Mode	X

6.2 General Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
TX Mode	X

7. RADIATED EMISSION TEST

7.1 Test set-up

The radiated emissions measurements were on the 3 m, semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from up to 25 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

Test set-up photos are included in appendix I.

7.2 Measurement uncertainty

Radiated emission electric field intensity, 0.15 MHz ~ 30 MHz : ± 2.61 dB

Radiated emission electric field intensity, 30 MHz ~ 300 MHz : ± 4.43 dB

Radiated emission electric field intensity, 300 MHz ~ 1 000 MHz : ± 3.80 dB

Radiated emission electric field intensity, 1 000 MHz ~ 3 000 MHz: ± 4.40 dB

Measurement uncertainty is calculated in accordance with CISPR 16-4-2. The measurement uncertainty is given with a confidence of 95 % with the coverage factor, $k = 2$.

7.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
□ -	ESCI	Rohde & Schwarz	EMI Test Receiver	101013	Apr. 28, 2014 (1Y)
■ -	ESU	Rohde & Schwarz	EMI Test Receiver	100261	Apr. 29, 2014 (1Y)
□ -	8564E	HP	Spectrum Analyzer	3650A00756	Apr. 28, 2014 (1Y)
□ -	FSP	Rohde & Schwarz	Spectrum Analyzer	100017	Oct. 08, 2014 (1Y)
■ -	310N	Sonoma Instrument	AMPLIFIER	312545	Apr. 28, 2014 (1Y)
■ -	83051A	Agilent	AMPLIFIER	3950M00201	Apr. 30, 2014 (1Y)
■ -	FSV30	Rohde & Schwarz	Signal Analyzer	101372	Apr. 28, 2014 (1Y)
■ -	SCU 18	Rohde & Schwarz	PRE-AMPLIFIER	102209	Jan. 12, 2014 (1Y)
■ -	MA240	HD GmbH	Antenna Master	N/A	N/A
■ -	HD100	HD GmbH	Position Controller	N/A	N/A
■ -	DS420S	HD GmbH	Turn Table	N/A	N/A
■ -	HFH2-Z2	Rohde & Schwarz	Loop Antenna	879285/26	Dec. 09, 2014(2Y)
■ -	VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-255	May 02, 2014(2Y)
■ -	BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	Sep. 05, 2013(2Y)
■ -	BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Jun. 17, 2013(2Y)

All test equipment used is calibrated on a regular basis.

7.4 Final Result of Measurement

7.4.1 Field Strength of the Fundamental Frequency

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Humidity Level : 45 % R.H. Temperature: 22 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.249(a)
 Result : PASSED

EUT : RF Module Date: March 16, 2015
 Operating Condition : TX mode
 Distance : 3 m

Channel	Radiated Emissions			Ant	Correction Factors			Total	FCC Limit	
	Carrier Freq. (MHz)	Reading (dBμV)	Detector Mode	Pol.	Antenna (dB/m)	Cable (dB)	Pre-Amp (dB)	Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Low	2 402.00	90.11	Peak	H	27.15	5.02	43.10	79.18	114.00	34.82
		84.23	Average	V				73.30	94.00	20.70
Middle	2 441.00	90.16	Peak	H	27.22	5.04	43.10	79.32	114.00	34.68
		83.97	Average	V				73.13	94.00	20.87
High	2 480.00	90.13	Peak	H	27.28	5.06	43.10	79.37	114.00	34.63
		80.10	Average	V				69.34	94.00	24.66

*Remark: To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes, but the worst plane data were recorded in the report.

Margin (dB) = Limit (dBμV/m) – Total (dBμV/m)

Total = Reading + Antenna Factor + Cable Loss – Pre-amplifier gain.


 Tested by: Hyung-Kwon, Oh / Engineer

7.4.2 Emissions Radiated Outside of the Specified Frequency Bands

7.4.2.1 Test Data for Harmonic

Humidity Level : 45 % R.H. Temperature: 22 °C
Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.249(a)
Result : PASSED

EUT : RF Module Date: March 16, 2015
Operating Condition : TX mode
Distance : 3 m

Channel	Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Pre-Amp (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Low	4 804.00*	48.36	Peak	H	31.14	6.90	42.80	43.60	74.00	30.40
		35.42	Average	H				30.66	54.00	23.34
		49.15	Peak	V				44.39	74.00	29.61
		36.29	Average	V				31.53	54.00	22.47
		Other frequencies were not found up to 25 GHz.								
	Middle	4 882.00*	47.55	Peak	H	31.22	6.93	42.80	42.90	74.00
36.38			Average	H	31.73				54.00	22.27
46.37			Peak	V	41.72				74.00	32.28
35.92			Average	V	31.27				54.00	22.73
Other frequencies were not found up to 25 GHz.										
High		4 960.00*	50.17	Peak	H	31.30	6.97	42.80	45.64	74.00
	40.42		Average	H	35.89				54.00	18.11
	49.84		Peak	V	45.31				74.00	28.69
	38.26		Average	V	33.73				54.00	20.27
	Other frequencies were not found up to 25 GHz.									

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band

Margin (dB) = Limit (dBuV/m) – Total (dBuV/m)

Total = Reading + Antenna Factor + Cable Loss – Pre-amplifier gain.

Tested by: Hyung-Kwon, Oh / Engineer

7.4.2.2 Test Data for Frequency range: 30 MHz ~ 1 000 MHz

Humidity Level : 45 % R.H.

Temperature: 22 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.249 (d)


Result : PASSED

EUT : RF Module

Date: March 16, 2015


Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

Operating condition : Low Channel

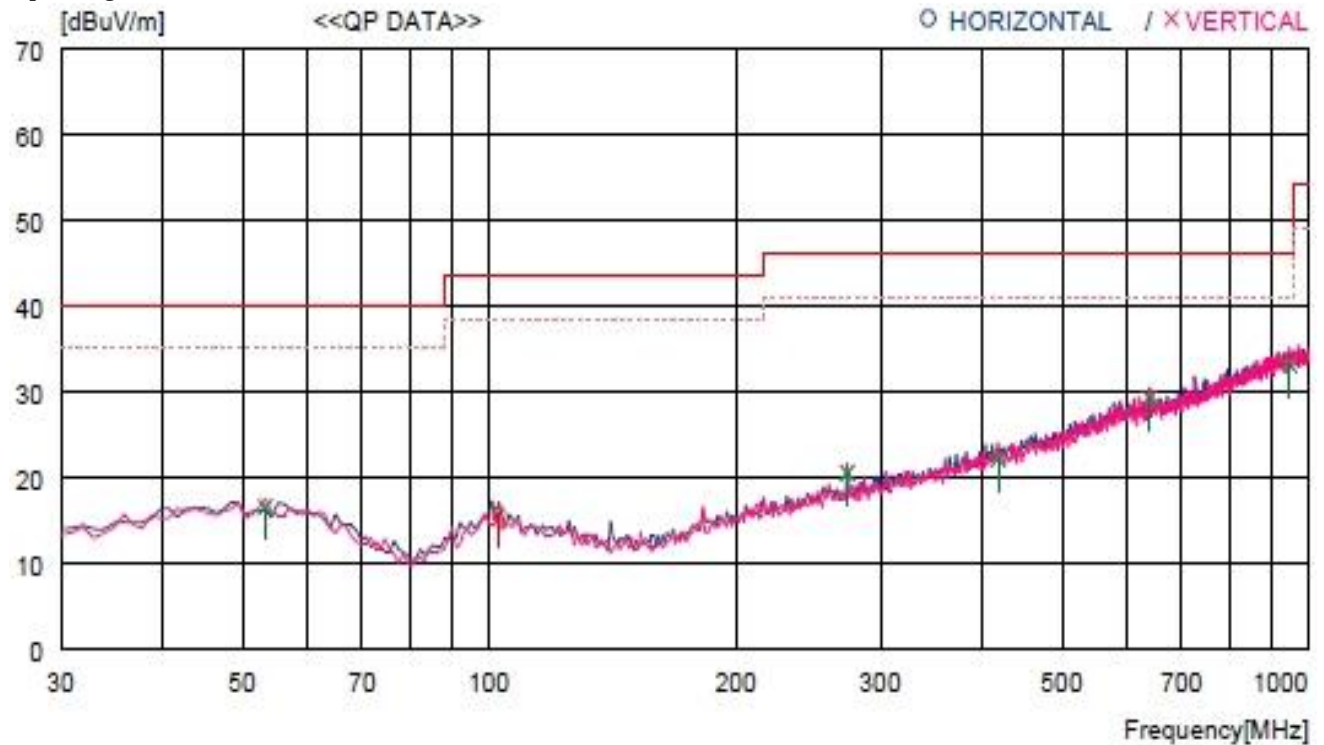


No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	[dBuV]	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
---- Horizontal ----										
1	102.750	27.4	13.4	8.0	33.1	15.7	43.5	27.8	200	145
---- Vertical ----										
2	53.280	27.5	14.8	7.4	33.2	16.5	40.0	23.5	400	285
3	273.470	30.1	14.1	9.3	33.0	20.5	46.0	25.5	300	103
4	418.001	27.8	17.2	10.2	33.0	22.2	46.0	23.8	300	124
5	639.157	30.7	20.5	11.3	33.3	29.2	46.0	16.8	300	215
6	947.607	28.9	23.7	12.6	32.1	33.1	46.0	12.9	400	0

Operating condition : Middle Channel

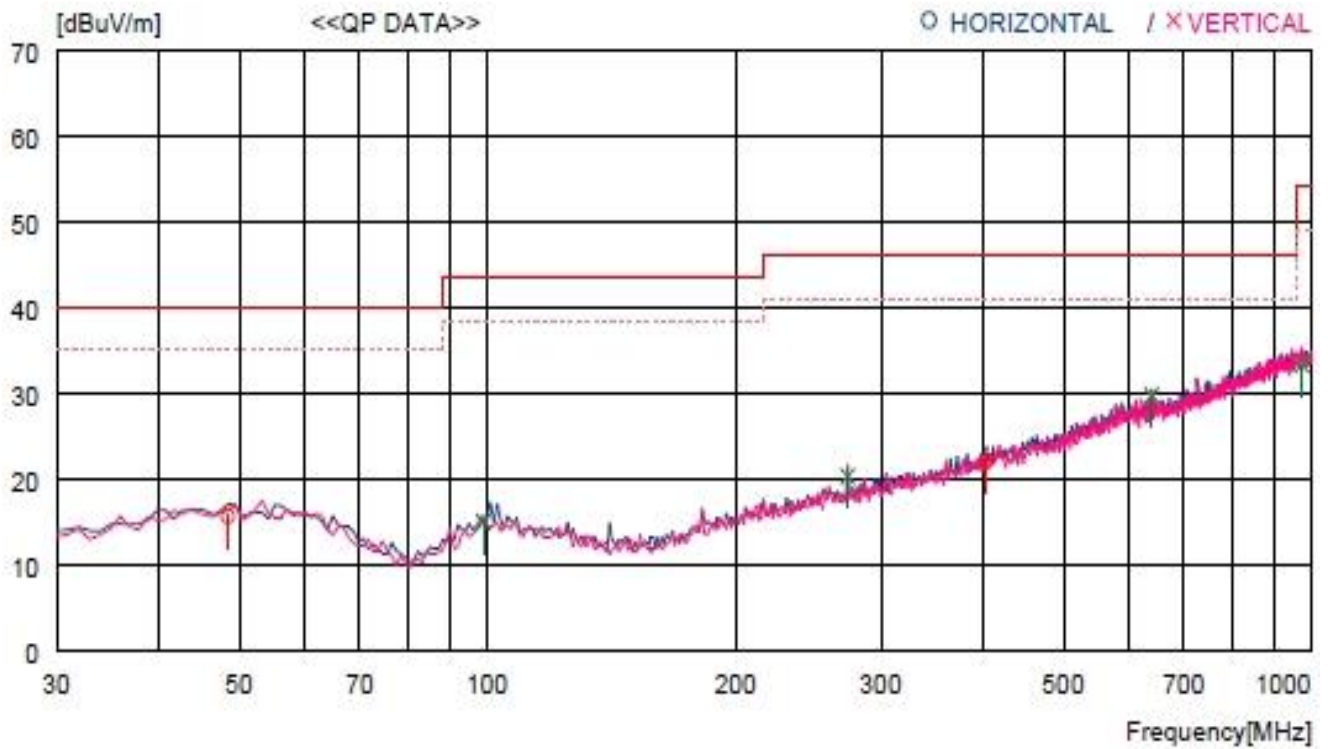

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	[dBuV]	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
---- Horizontal ----										
1	48.430	28.3	15.2	7.4	33.2	15.7	40.0	24.3	200	359
2	403.450	28.1	16.9	10.1	33.0	22.1	46.0	23.9	300	193
---- Vertical ----										
3	98.870	26.7	13.4	8.0	33.1	15.0	43.5	28.5	400	0
4	273.470	29.9	14.1	9.3	33.0	20.3	46.0	25.7	300	103
5	639.157	31.2	20.5	11.3	33.3	29.7	46.0	16.3	300	215
6	973.797	28.5	23.9	12.7	31.8	33.3	54.0	20.7	400	25

Operating condition : High Channel

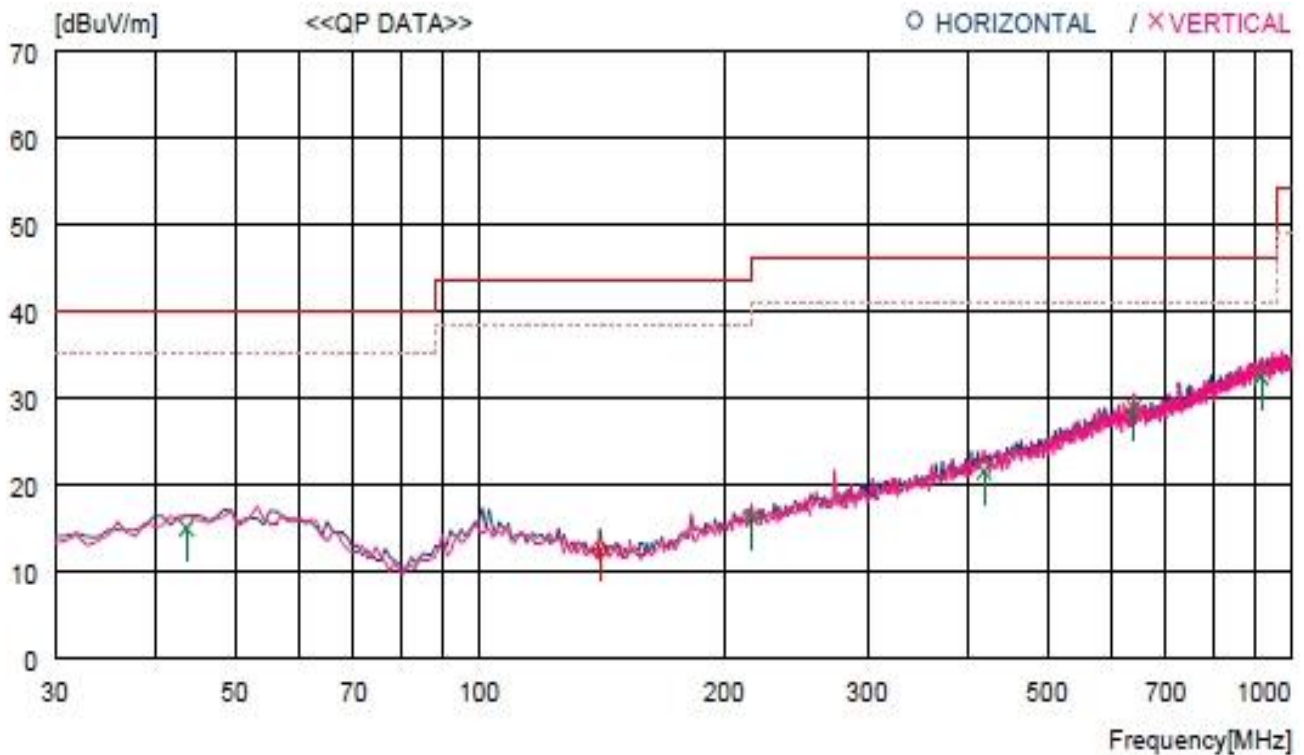

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	QP	FACTOR							
		[dBuV]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Horizontal -----										
1	140.580	28.2	9.2	8.3	33.1	12.6	43.5	30.9	400	359
----- Vertical -----										
2	43.580	25.8	15.1	7.3	33.2	15.0	40.0	25.0	400	0
3	216.240	27.5	12.7	9.0	33.0	16.2	46.0	29.8	300	2
4	418.001	27.1	17.2	10.2	33.0	21.5	46.0	24.5	300	124
5	639.157	30.3	20.5	11.3	33.3	28.8	46.0	17.2	300	215
6	916.568	28.8	23.5	12.5	32.4	32.4	46.0	13.6	400	0

Tested by: Hyung-Kwon, Oh / Engineer

7.4.2.3 Test Data for Below 30 MHz

Humidity Level : 45 % R.H. Temperature: 22 °C
Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
Frequency range : 9 kHz ~ 30 MHz
Measurement distance : 3 m
Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.249 (d)
Result : PASSED

EUT : RF Module Date: March 16, 2015
Detector : CISPR Quasi-Peak (Resolution Bandwidth: 9 kHz)

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.									

7.4.2.4 Test Data above 1 GHz except for harmonic

- Test Date : March 16, 2015
- Humidity Level : 45 % R.H.
- Temperature : 22 °C
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Frequency range : 1 GHz ~ 25 GHz
- Measurement distance : 3 m
- Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.249 (d)
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
It was not observed any emissions from the EUT.									


Tested by: Hyung-Kwon, Oh / Engineer

7.4.2.5 Band Edge

- . Test Date : March 16, 2015
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- . Measurement distance : 3 m
- . Operating Condition : Low / High Channel
- . Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.249 (a)
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Pre-Amp (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2398.92	48.92	Peak	H	27.08	3.15	43.10	36.05	74.00	37.95
	34.48	Average	H				21.61	54.00	32.39
2400.00	54.27	Peak	V				41.40	74.00	32.60
	34.92	Average	V				22.05	54.00	31.95
Test Data for High Channel									
2 483.60	51.28	Peak	H	27.30	3.17	43.10	38.65	74.00	35.35
	34.32	Average	H				21.69	54.00	32.31
2 483.63	57.18	Peak	V				44.55	74.00	29.45
	34.68	Average	V				22.05	54.00	31.95

Remark. Margin (dB) = Limit (dBuV/m) – Total (dBuV/m)

Total = Reading + Antenna Factor + Cable Loss – Pre-amplifier gain.



Tested by: Hyung-Kwon, Oh / Engineer


8. 20 dB BANDWIDTH

8.1 Operating environment

Temperature : 22 °C
Relative humidity : 45 % R.H.

8.2 Test set-up

The output signal of EUT was received by the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 20 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 20 dB.

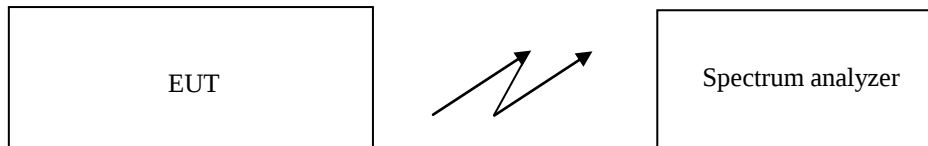

8.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ -	FSV30	Rohde & Schwarz	Signal Analyzer	101372	Apr. 28, 2014 (1Y)

8.4 Test data for Bandwidth


-. Test Date : March 17, 2015
-. Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.215(c)

Channel	Operating Freq. (MHz)	20 dB Bandwidth (MHz)	Result
Low	2 402	3.23	Met the requirement / PASS
Middle	2 441	2.72	
High	2 480	2.53	


Remark: See next page for 20 dB Bandwidth test data.

The 20 dB bandwidth is within the assigned frequency band from 2 400 MHz to 2 483.5 MHz.



 Tested by: Hyung-Kwon, Oh / Engineer

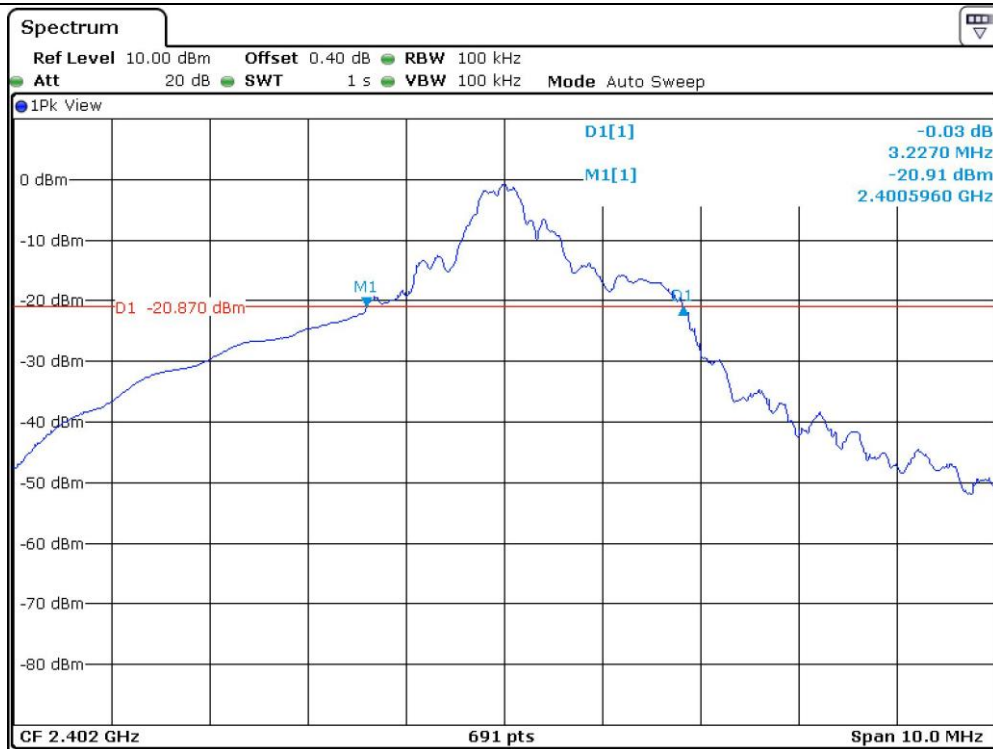

Low Channel

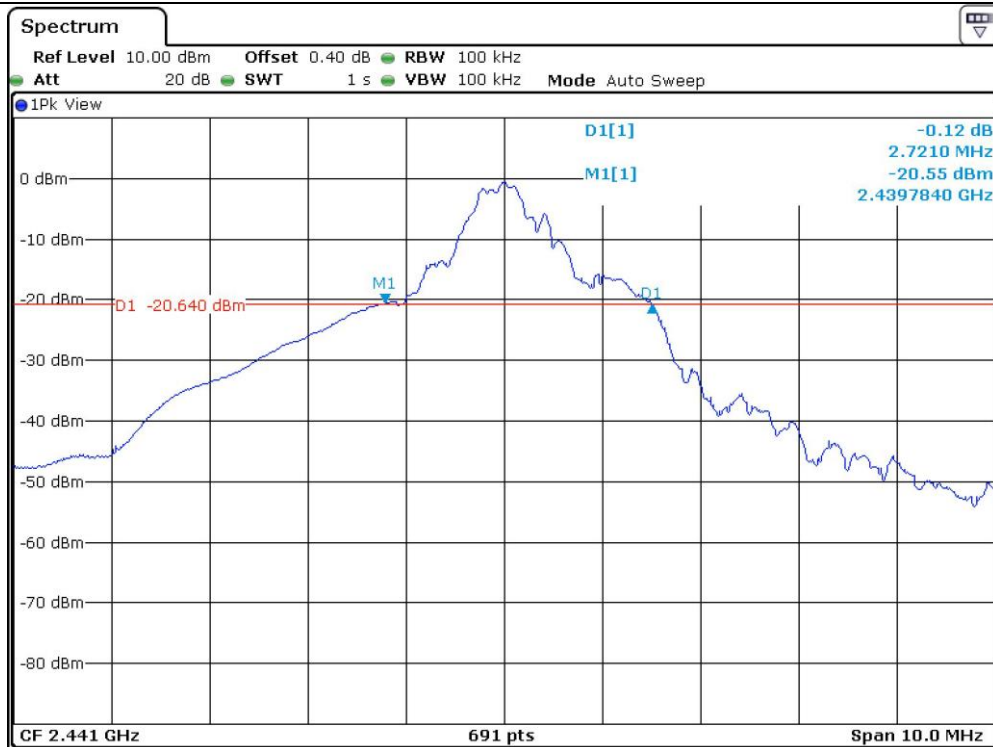

Middle Channel

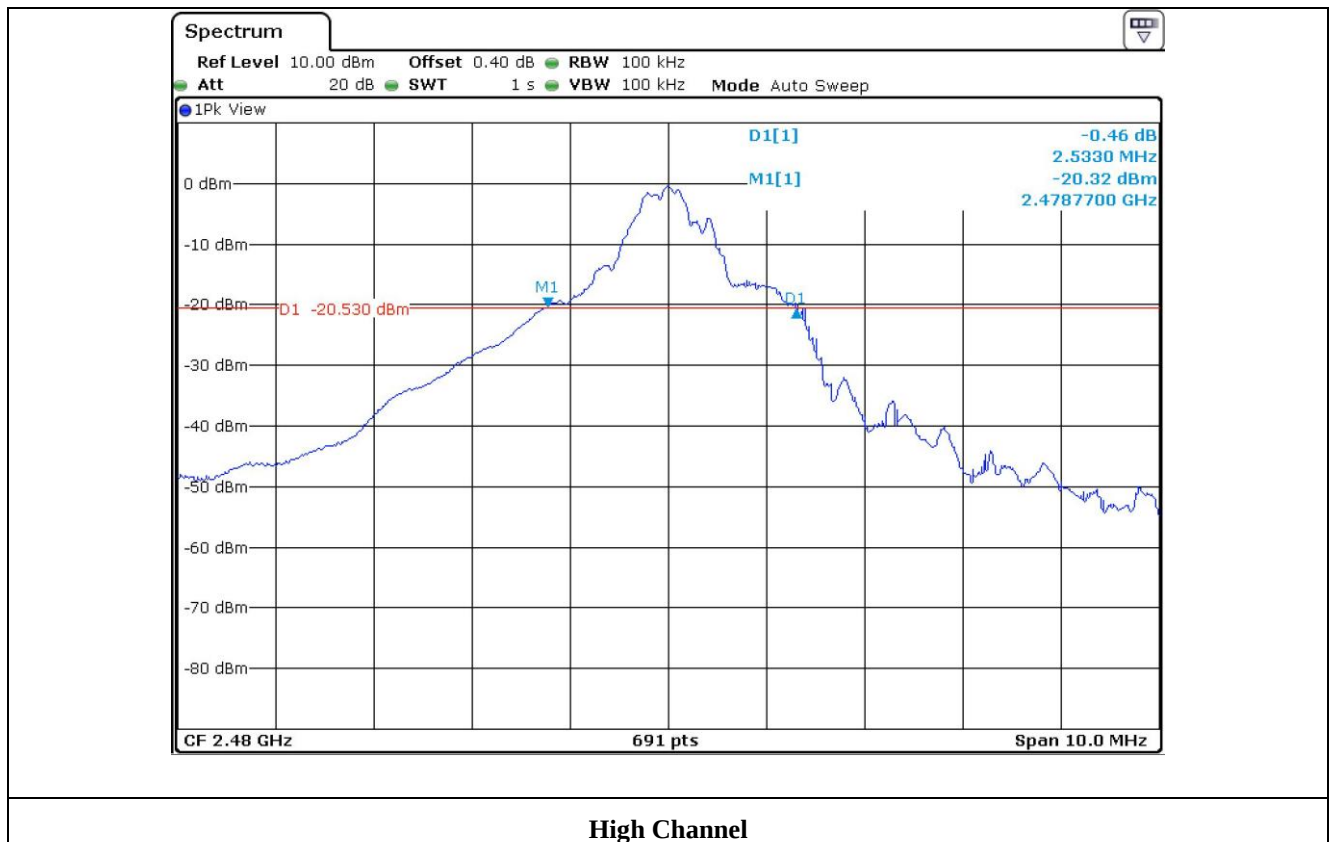

9. CONDUCTED EMISSION TEST

9.1 Operating environment

Temperature : 22 °C
Relative humidity : 45 % R.H.

9.2 Test set-up

The EUT was placed on a wooden table, 0.8 m height above the floor. Power was fed to the EUT through a 50 Ω / 50 μ H + 5 Ω Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.


9.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ -	ESPI	Rohde & Schwarz	EMI Test Receiver	101278	Nov. 03, 2014 (1Y)
□ -	ESHS10	Rohde & Schwarz	EMI Test Receiver	834467/007	Jul. 15, 2014 (1Y)
□	NSLK8128	Schwarzbeck	AMN	8128-216	Apr. 11, 2014 (1Y)
■ -	NSLK8126	Schwarzbeck	AMN	8126-404	Jul. 11, 2014 (1Y)
□ -	3825/2	EMCO	AMN	9109-1869	Apr. 29, 2014 (1Y)
■ --	3825/2	EMCO	AMN	9109-1867	Apr. 29, 2014 (1Y)

All test equipment used is calibrated on a regular basis.


9.4 Test data for TX mode

-. Test Date : March 17, 2015
 -. Resolution bandwidth : 9 kHz
 -. Frequency range : 0.15 MHz ~ 30 MHz
 -. Tested Line : HOT LINE

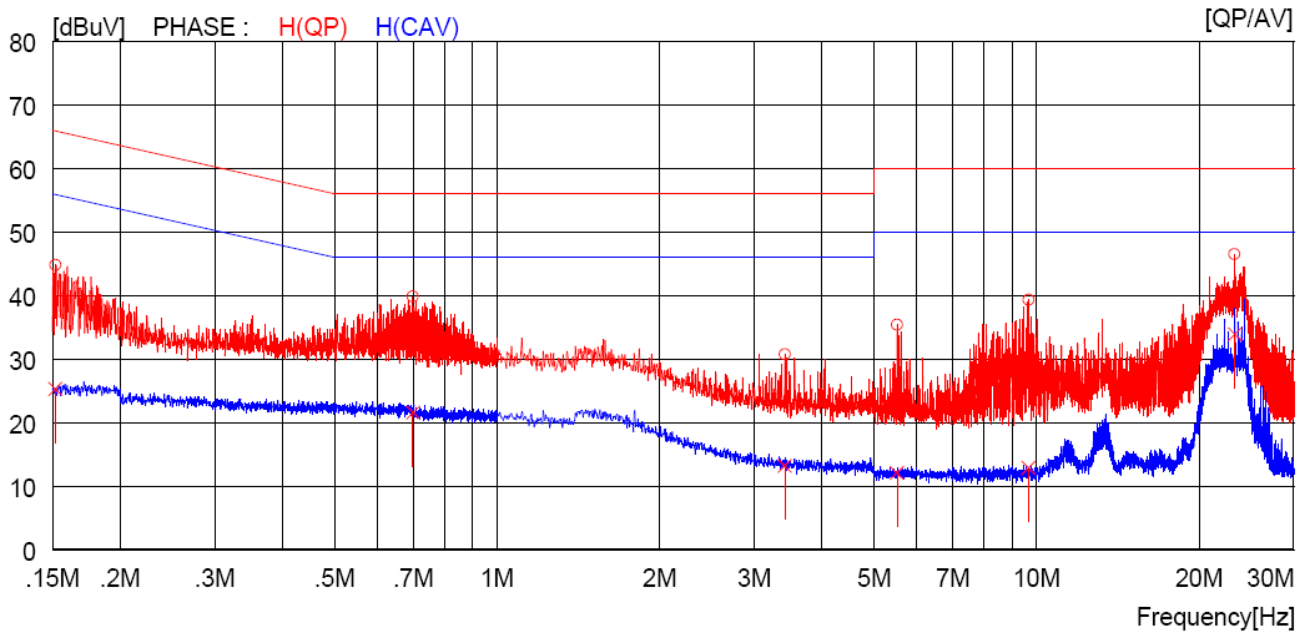

NO	FREQ		READING		C.FACTOR		RESULT		LIMIT		MARGIN		PHASE
	QP	AV	QP	AV	QP	AV	QP	AV	QP	AV	QP	AV	
	[MHz]	[dBuV]	[dBuV]	[dB]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]			
1	0.15200	34.8	----		10.0		44.8	----	65.9	----	21.1	----	H(QP)
2	0.69900	29.7	----		10.1		39.8	----	56.0	----	16.2	----	H(QP)
3	3.41600	20.6	----		10.1		30.7	----	56.0	----	25.3	----	H(QP)
4	5.51500	25.2	----		10.2		35.4	----	60.0	----	24.6	----	H(QP)
5	9.67500	29.1	----		10.2		39.3	----	60.0	----	20.7	----	H(QP)
6	23.30000	35.7	----		10.8		46.5	----	60.0	----	13.5	----	H(QP)
7	0.15200	----		15.3	10.0		----	25.3	----	55.9	----	30.6	H(CAV)
8	0.69900	----		11.5	10.1		----	21.6	----	46.0	----	24.4	H(CAV)
9	3.41600	----		3.1	10.1		----	13.2	----	46.0	----	32.8	H(CAV)
10	5.51500	----		1.9	10.2		----	12.1	----	50.0	----	37.9	H(CAV)
11	9.67500	----		2.7	10.2		----	12.9	----	50.0	----	37.1	H(CAV)
12	23.30000	----		23.1	10.8		----	33.9	----	50.0	----	16.1	H(CAV)

-. Tested Line : NEUTRAL LINE

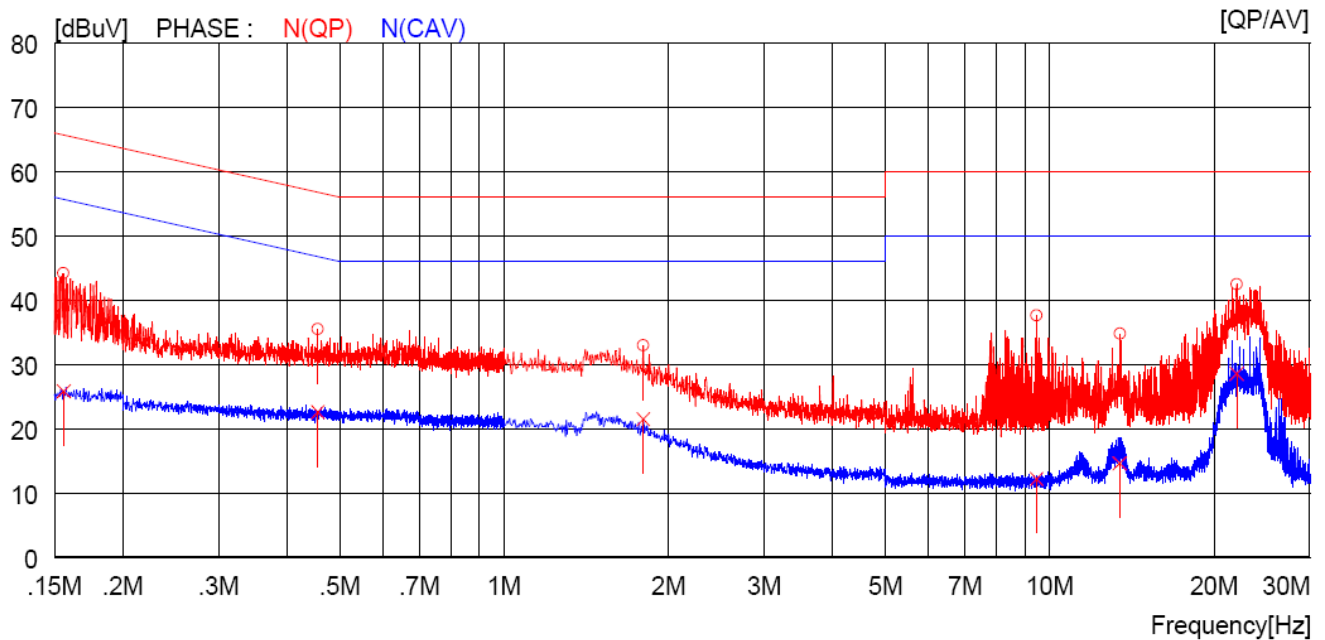

NO	FREQ		READING		C.FACTOR		RESULT		LIMIT		MARGIN		PHASE
	QP	AV	QP	AV	QP	AV	QP	AV	QP	AV	QP	AV	
	[MHz]	[dBuV]	[dBuV]	[dB]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	
1	0.15600	34.1	----	10.0	44.1	----	65.7	----	21.6	----	N(QP)		
2	0.45600	25.5	----	10.0	35.5	----	56.8	----	21.3	----	N(QP)		
3	1.80000	22.8	----	10.1	32.9	----	56.0	----	23.1	----	N(QP)		
4	9.47000	27.4	----	10.2	37.6	----	60.0	----	22.4	----	N(QP)		
5	13.46000	24.4	----	10.4	34.8	----	60.0	----	25.2	----	N(QP)		
6	22.01000	31.6	----	10.8	42.4	----	60.0	----	17.6	----	N(QP)		
7	0.15600	----	15.8	10.0	----	25.8	----	55.7	----	29.9	N(CAV)		
8	0.45600	----	12.6	10.0	----	22.6	----	46.8	----	24.2	N(CAV)		
9	1.80000	----	11.4	10.1	----	21.5	----	46.0	----	24.5	N(CAV)		
10	9.47000	----	2.0	10.2	----	12.2	----	50.0	----	37.8	N(CAV)		
11	13.46000	----	4.2	10.4	----	14.6	----	50.0	----	35.4	N(CAV)		
12	22.01000	----	17.7	10.8	----	28.5	----	50.0	----	21.5	N(CAV)		

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.


Tested by: Hyung-Kwon, Oh / Engineer