

Certification Test Report

FCC ID: R7PER1R1S6

FCC Rule Part: 15.247

ACS Report Number: 14-0210.W03.1A

Manufacturer: Landis+Gyr Technology, Inc.
Model: 5252 Comm Module

Test Begin Date: May 22, 2014
Test End Date: May 29, 2014

Report Issue Date: July 21, 2014



FOR THE SCOPE OF ACCREDITATION UNDER LAB Code 200612-0

This report is not be used to claim certification, approval, or endorsement by NVLAP, NIST or any government agency.

A handwritten signature in black ink, appearing to read "Kirby Munroe".

Reviewed by:
Kirby Munroe
Director, Wireless Certifications
ACS, Inc.

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 26 pages

TABLE OF CONTENTS

1	GENERAL	3
1.1	PURPOSE.....	3
1.2	PRODUCT DESCRIPTION	3
1.3	TEST METHODOLOGY AND CONSIDERATIONS	3
2	TEST FACILITIES.....	4
2.1	LOCATION	4
2.2	LABORATORY ACCREDITATIONS/RECOGNITIONS/CERTIFICATIONS	4
2.3	RADIATED EMISSIONS TEST SITE DESCRIPTION	5
2.3.1	<i>Semi-Anechoic Chamber Test Site.....</i>	5
2.3.2	<i>Open Area Tests Site (OATS)</i>	6
2.4	CONDUCTED EMISSIONS TEST SITE DESCRIPTION	7
3	APPLICABLE STANDARD REFERENCES.....	7
4	LIST OF TEST EQUIPMENT	8
5	SUPPORT EQUIPMENT.....	9
6	EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM	9
7	SUMMARY OF TESTS.....	10
7.1	ANTENNA REQUIREMENT – FCC: SECTION 15.203	10
7.2	POWER LINE CONDUCTED EMISSIONS – FCC 15.207, IC: RSS-GEN 7.2.4	10
7.2.1	<i>Measurement Procedure.....</i>	10
7.2.2	<i>Measurement Results</i>	10
7.3	PEAK OUTPUT POWER - FCC 15.247(B)(2) IC: RSS-210 A8.4(1)	11
7.3.1	<i>Measurement Procedure (Conducted Method).....</i>	11
7.3.2	<i>Measurement Results</i>	11
7.4	CHANNEL USAGE REQUIREMENTS	12
7.4.1	<i>Carrier Frequency Separation – FCC 15.247(a)(1) IC: RSS-210 A8.1(b).....</i>	12
7.4.1.1	Measurement Procedure.....	12
7.4.1.2	Measurement Results	12
7.4.2	<i>Number of Hopping Channels – FCC 15.247(a)(1)(i) IC: RSS-210 A8.1(c)</i>	13
7.4.2.1	Measurement Procedure.....	13
7.4.2.2	Measurement Results	13
7.4.3	<i>Channel Dwell Time – FCC 15.247(a)(1)(i) IC: RSS-210 A8.1(c)</i>	15
7.4.3.1	Measurement Procedure.....	15
7.4.4	<i>20dB / 99% Bandwidth - FCC 15.247(a)(1)(i) IC: RSS-210 A8.1(c)</i>	15
7.4.4.1	Measurement Procedure.....	15
7.4.4.2	Measurement Results	15
7.5	BAND-EDGE COMPLIANCE AND SPURIOUS EMISSIONS	20
7.5.1	<i>Band-Edge Compliance of RF Conducted Emissions - FCC 15.247(d); IC RSS-210 A8.5..</i>	20
7.5.1.1	Measurement Procedure.....	20
7.5.1.2	Measurement Results	20
7.5.2	<i>RF Conducted Spurious Emissions - FCC 15.247(d); IC RSS-210 A8.5.....</i>	22
7.5.2.1	Measurement Procedure.....	22
7.5.2.2	Measurement Results	22
7.5.3	<i>Radiated Spurious Emissions - FCC 15.205, 15.209; IC RSS-210 2.2, RSS-Gen 7.2.2</i>	24
7.5.3.1	Measurement Procedure.....	24
7.5.3.2	Measurement Results	24
7.5.3.3	Sample Calculation:	25
8	CONCLUSION	25

1 GENERAL

1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Industry Canada's Radio Standards Specification RSS-210 for modular approval Certification.

1.2 Product description

The 5252 Comm Module is an electric endpoint with 900MHz Gridstream communications on a single PCB. The 5252 Comm Module will be integrated into the AMPY 5252B pre-pay meter and used for commercial and industrial metering applications.

Technical Information:

The model 5252 Comm Module provides 2 distinct frequency hopping modes of operation as outlined below.

Mode of Operation	Frequency Range (MHz)	Number of Channels	Channel Separation (kHz)	Data Rates Supported (kbps)
1	902.3 - 927.8	86	300	9.6, 19.2, 38.4, 115.2
2	904.0 - 927.9	240	100	9.6, 19.2, 38.4

Modulation Format: 2-FSK

Antenna Type / Gain: Internal Monopole Antenna; -1.25dBi gain

Operating Voltage: 4.5 VDC

Manufacturer Information:

Landis+Gyr Technology, Inc.

30000 Mill Creek Ave., Suite 100

Alpharetta, GA 30022

EUT Serial Numbers: EZ49M16140000917 (Radiated)
E249M161400001865 (Conducted)

Test Sample Condition: The test samples were provided in good working order with no visible defects.

1.3 Test Methodology and Considerations

All modes of operation, including all available data rates, were evaluated. The data presented in this report represents the worst case where applicable.

The EUT was evaluated in an orientation representative of final installation.

Software DAC power setting during test: 136

2 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions
5015 B.U. Bowman Drive
Buford, GA 30518
Phone: (770) 831-8048
Fax: (770) 831-8598

2.2 Laboratory Accreditations/Recognitions/Certifications

ACS is accredited to ISO/IEC 17025 by the National Institute of Standards and Technology under their National Voluntary Laboratory Accreditation Program (NVLAP), Lab Code 200612-0. Unless otherwise specified, all tests methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

The Semi-Anechoic Chamber Test Site, Open Area Test Site (OATS) and Conducted Emissions Site have been fully described, submitted to, and accepted by the FCC, Industry Canada and the Japanese Voluntary Control Council for Interference by information technology equipment.

FCC Registration Number: 511277

Industry Canada Lab Code: IC 4175A

VCCI Member Number: 1831

- VCCI OATS Registration Number R-1526
- VCCI Conducted Emissions Site Registration Number: C-1608

2.3 Radiated Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of a 20' x 30' x 18' shielded enclosure. The chamber is lined with Toyo Ferrite Grid Absorber, model number FFG-1000. The ferrite tile grid is 101 x 101 x 19mm thick and weighs approximately 550 grams. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber.

The turntable is 150cm in diameter and is located 160cm from the back wall of the chamber. The chamber is grounded via 1 – 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Behind the turntable is a 3' x 6' x 4' deep shielded pit used for support equipment if necessary. The pit is equipped with 1 – 4" PVC chases from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3-1 below:

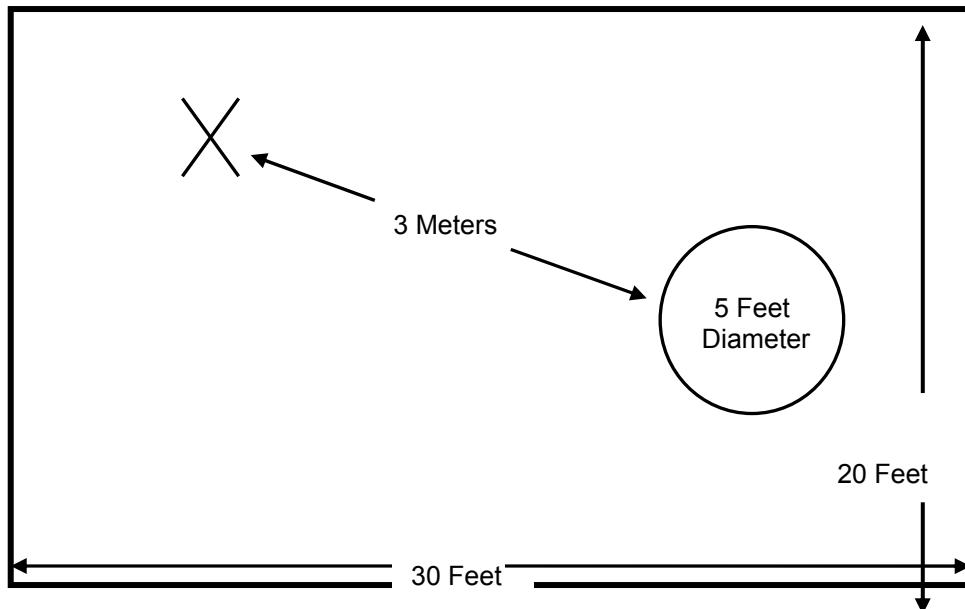


Figure 2.3-1: Semi-Anechoic Chamber Test Site

2.3.2 Open Area Tests Site (OATS)

The open area test site consists of a 40' x 66' concrete pad covered with a perforated electro-plated galvanized sheet metal. The perforations in the sheet metal are 1/8" holes that are staggered every 3/16". The individual sheets are placed to overlap each other by 1/4" and are riveted together to provide a continuous seam. Rivets are spaced every 3" in a 3 x 20 meter perimeter around the antenna mast and EUT area. Rivets in the remaining area are spaced as necessary to properly secure the ground plane and maintain the electrical continuity.

The entire ground plane extends 12' beyond the turntable edge and 16' beyond the antenna mast when set to a 10 meter measurement distance. The ground plane is grounded via 4 – 8' copper ground rods, each installed at a corner of the ground plane and bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is an all aluminum 10' flush mounted table installed in an all aluminum frame. The table is remotely operated from inside the control room located 40' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Adjacent to the turntable is a 7' x 7' square and 4' deep concrete pit used for support equipment if necessary. The pit is equipped with 5 – 4" PVC chases from the pit to the control room that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit. The pit is covered with 2 sheets of 1/4" diamond style re-enforced steel sheets. The sheets are painted to match the perforated steel ground plane; however the underside edges have been masked off to maintain the electrical continuity of the ground plane. All reflecting objects are located outside of the ellipse defined in ANSI C63.4.

A diagram of the Open Area Test Site is shown in Figure 2.3-2 below:

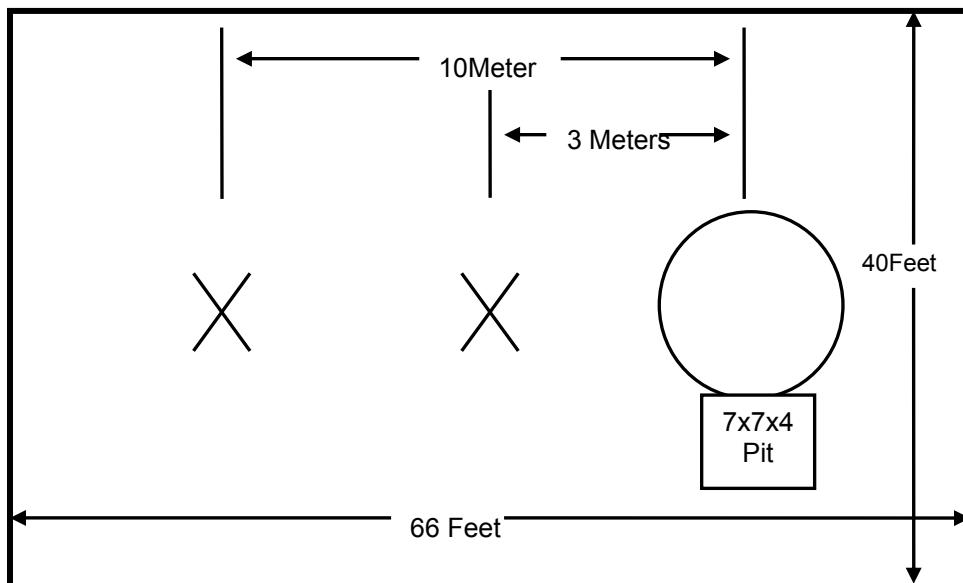


Figure 2.3-2: Open Area Test Site

2.4 Conducted Emissions Test Site Description

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 8' solid aluminum horizontal ground reference plane (GRP) bonded every 3" to an 8' X 8' vertical ground plane.

The site is of sufficient size to test table top and floor standing equipment in accordance with section 6.1.4 of ANSI C63.4.

A diagram of the room is shown below in figure 2.4-1:

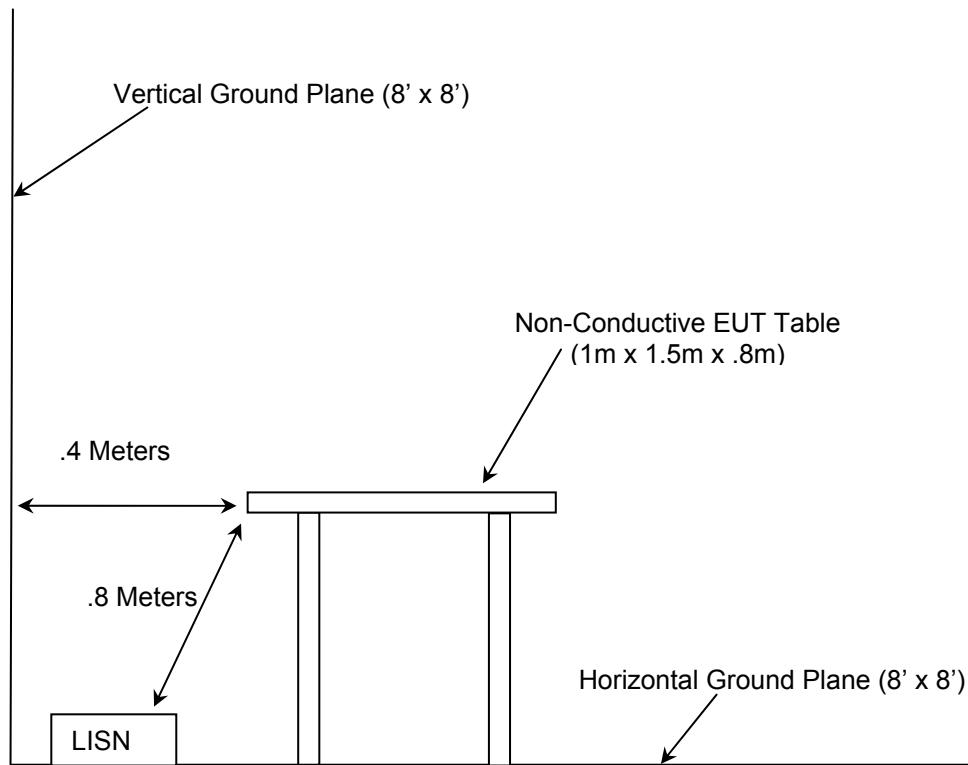


Figure 2.4-1: AC Mains Conducted EMI Site

3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.4-2009: American National Standard for Methods of Measurement of Radio-Noise Emissions from low-voltage electrical and electronic equipment in the range of 9kHz to 40 GHz
- ❖ ANSI C63.10-2009: American National Standard for Testing Unlicensed Wireless Devices
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2014
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2014
- ❖ FCC Public Notice DA 00-705 – Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems, March 30, 2000
- ❖ Industry Canada Radio Standards Specification: RSS-210 – Low-power License-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, Issue 8, December 2010
- ❖ Industry Canada Radio Standards Specification: RSS-GEN – General Requirements and Information for the Certification of Radiocommunication Equipment, Issue 3, December 2010.

4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

Table 4-1: Test Equipment

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
1	Rohde & Schwarz	ESMI - Display	Spectrum Analyzers	833771/007	8/2/2012	8/2/2014
2	Rohde & Schwarz	ESMI-Receiver	Spectrum Analyzers	839587/003	8/2/2012	8/2/2014
30	Spectrum Technologies	DRH-0118	Antennas	970102	4/23/2013	4/23/2015
40	EMCO	3104	Antennas	3211	2/14/2013	2/14/2015
73	Agilent	8447D	Amplifiers	2727A05624	7/16/2013	7/16/2014
153	EMCO	3825/2	LISN	9411-2268	7/31/2012	7/31/2014
		Chamber EMI Cable Set	Cable Set	167	11/7/2013	11/7/2014
167	ACS					
168	Hewlett Packard	11947A	Attenuators	44829	1/27/2014	1/27/2015
267	Agilent	N1911A	Meters	MY45100129	7/30/2013	7/30/2015
268	Agilent	N1921A	Sensors	MY45240184	7/30/2013	7/30/2015
		SMR-290AW-480.0-SMR	Cables	None	3/17/2014	3/17/2015
292	Florida RF Cables	Belden	Cables	8214	6/17/2013	6/17/2014
324	ACS	H1G513G1	Filters	31417	6/19/2013	6/19/2014
331	Microwave Circuits	8449B	Amplifiers	3008A01111	7/30/2013	7/30/2015
338	Hewlett Packard	AS-20	Attenuators	7136	7/30/2013	7/30/2014
340	Aeroflex/Weinschel	LPA-25	Antennas	1241	7/27/2012	7/27/2014
412	Electro Metrics					
		SMS-200AW-72.0-SMR	Cables	805	11/7/2013	11/7/2014
422	Florida RF	8591E	Analyzers	3543A04709	7/12/2013	7/12/2014
486	Hewlett Packard					
		SMRE-200W-12.0-SMRE	Cables	N/A	9/26/2013	9/26/2014
616	Florida RF Cables	FSV40	Analyzers	101338	11/19/2013	11/19/2014
622	Rohde & Schwarz					

5 SUPPORT EQUIPMENT

Table 5-1: Support Equipment

Item	Equipment Type	Manufacturer	Model Number	Serial Number
1	AC/DC Adaptor	Archer	Universal AC Adapter	N/A
2	Power Supply	Tektronix	PS280	PS280 TW57048
3	Power Supply	Hewlett Packard	E3630A	KR64308603

6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

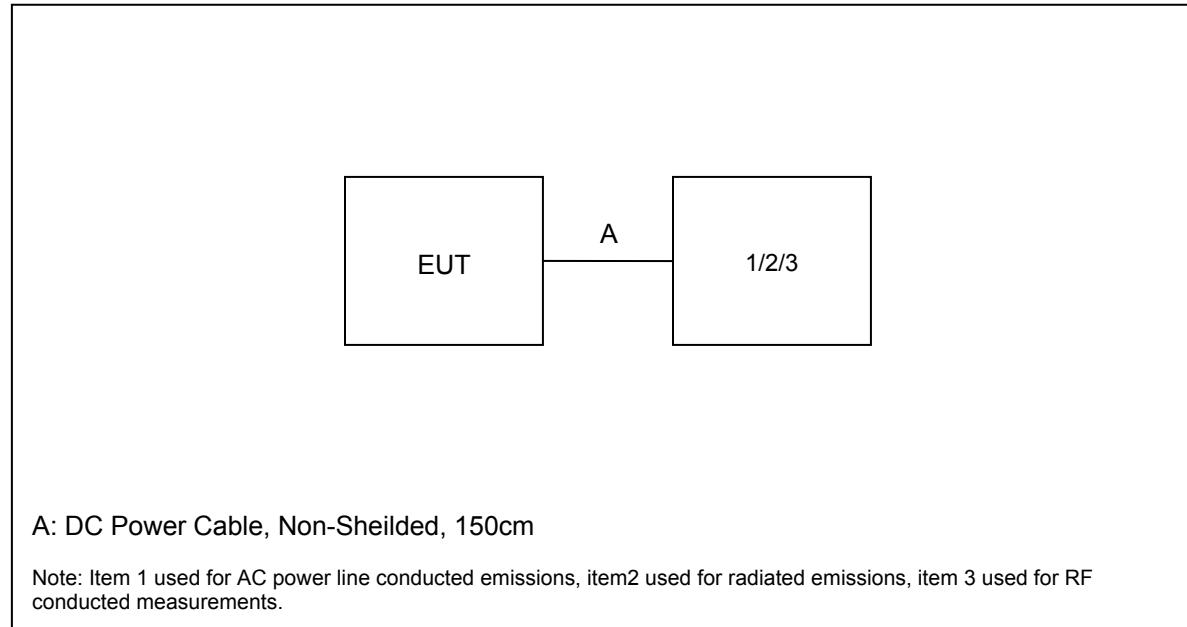


Figure 6-1: Test Setup Block Diagram

7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

7.1 Antenna Requirement – FCC: Section 15.203

The antenna is a monopole with -1.25dBi gain and cannot be removed without permanently damaging the device thus meeting the requirements of Section 15.203.

7.2 Power Line Conducted Emissions – FCC 15.207, IC: RSS-Gen 7.2.4

7.2.1 Measurement Procedure

ANSI C63.4 sections 6 and 7 were the guiding documents for this evaluation. Conducted emissions were performed from 150kHz to 30MHz with the spectrum analyzer's resolution bandwidth set to 9kHz and the video bandwidth set to 30kHz. The calculation for the conducted emissions is as follows:

Corrected Reading = Analyzer Reading + LISN Loss + Cable Loss

Margin = Applicable Limit - Corrected Reading

7.2.2 Measurement Results

Results of the test are shown below in Tables 7.2.2-1 and 7.2.2-2.

Table 7.2.2-1: Conducted EMI Results – Line 1

Frequency (MHz)	Uncorrected Reading		Total Correction Factor (dB)	Corrected Level		Limit		Margin (dB)	
	Quasi-Peak	Average		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
28.8287	3.104	-1.226	11.211	14.315	9.985	60	50	45.685	40.015
1.1962	8.334	2.675	10.189	18.523	12.865	56	46	37.477	33.135
0.89028	7.878	2.814	10.187	18.065	13.001	56	46	37.935	32.999
0.49095	8.799	4.092	10.189	18.988	14.282	56.259	46.259	37.27	31.977
0.304312	17.572	6.136	10.194	27.766	16.33	61.591	51.591	33.825	35.261
0.210694	19.458	6.993	10.207	29.664	17.199	64.266	54.266	34.602	37.067

Table 7.2.2-2: Conducted EMI Results – Line 2

Frequency (MHz)	Uncorrected Reading		Total Correction Factor (dB)	Corrected Level		Limit		Margin (dB)	
	Quasi-Peak	Average		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
29.9268	3.458	-0.861	11.267	14.725	10.407	60	50	45.275	39.593
21.2448	3.071	-1.07	10.826	13.897	9.756	60	50	46.103	40.244
6.93928	3.616	-0.688	10.292	13.908	9.604	60	50	46.092	40.396
3.4733	4.594	0.163	10.22	14.814	10.384	56	46	41.186	35.616
0.500249	8.56	3.672	10.189	18.749	13.862	56	46	37.251	32.138
0.203431	17.312	7.166	10.208	27.52	17.374	64.473	54.473	36.954	37.1

7.3 Peak Output Power - FCC 15.247(b)(2) IC: RSS-210 A8.4(1)**7.3.1 Measurement Procedure (Conducted Method)**

The RF output port of the EUT was directly connected to the input of a power meter. The device employs >50 channels therefore the power is limited to 1 Watt.

All data rates were evaluated and worst case reported. Worst case data rate was 9.6kbps.

7.3.2 Measurement Results

Results are shown below in Table 7.3.2-1 below:

Table 7.3.2-1: RF Output Power

Frequency [MHz]	Level [dBm]
902.3	27.24
915.0	27.13
927.9	26.84

7.4 Channel Usage Requirements

7.4.1 Carrier Frequency Separation – FCC 15.247(a)(1) IC: RSS-210 A8.1(b)

7.4.1.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The span of the spectrum analyzer was set wide enough to capture two adjacent peaks and the RBW and VBW were set to $\geq 1\%$ of the span.

Carrier frequency separation was measured for all modes of operation and data presented in section 7.4.1.2 below.

7.4.1.2 Measurement Results

Results are shown below in Figures 7.4.1.2-1 to 7.4.1.2-2.

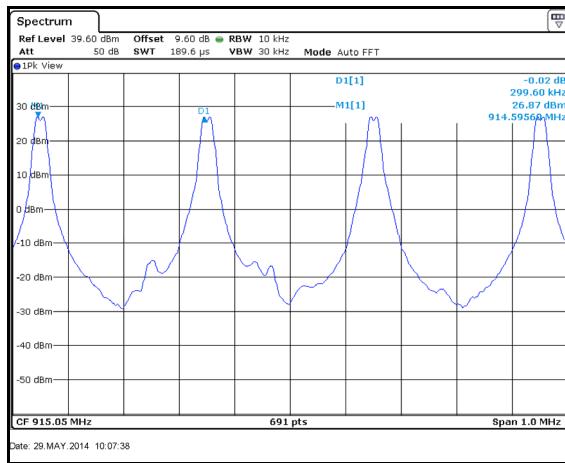


Figure 7.4.1.2-1: Mode 1

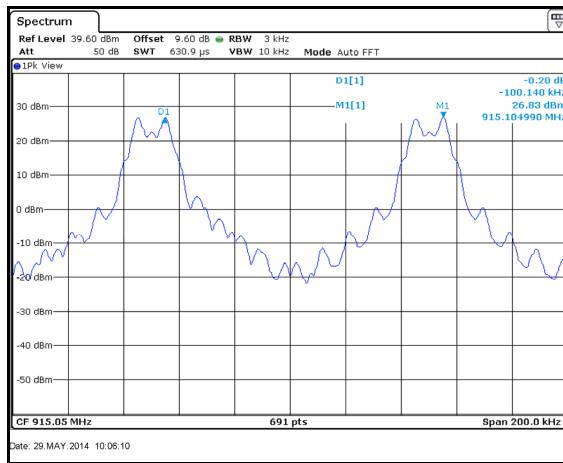


Figure 7.4.1.2-2: Mode 2

7.4.2 Number of Hopping Channels – FCC 15.247(a)(1)(i) IC: RSS-210 A8.1(c)

7.4.2.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The span of the spectrum analyzer was set wide enough to capture the frequency band of operation. The RBW was set to $\geq 1\%$ of the span and VBW set to \geq RBW.

The number of hopping channels was measured for the modes of operation identified in section 1.2 and data presented in section 7.4.2.2 below.

7.4.2.2 Measurement Results

Results are shown below in Figures 7.4.2.2-1 to 7.4.2.2-7.

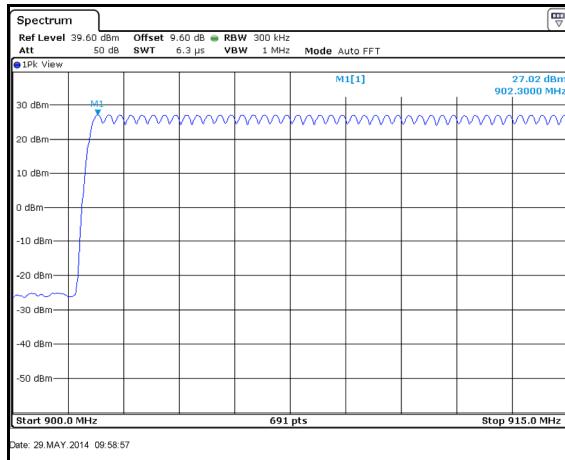


Figure 7.4.2.2-1: Mode 1 (86 Channels)

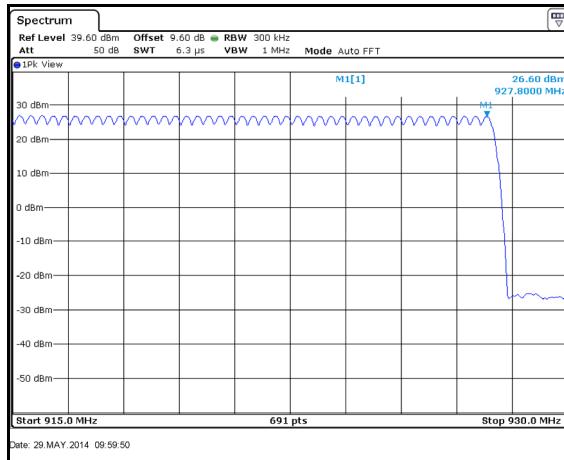


Figure 7.4.2.2-2: Mode 1 (86 Channels)

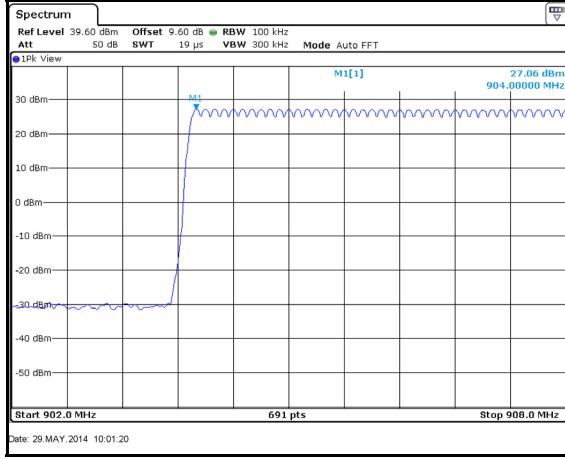


Figure 7.4.2.2-3: Mode 2 (240 Channels)



Figure 7.4.2.2-4: Mode 2 (240 Channels)

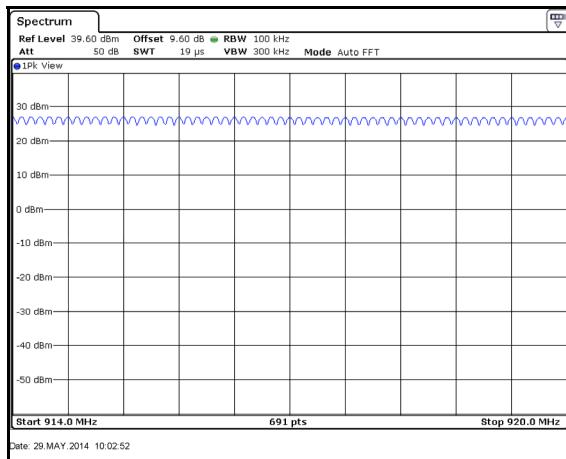


Figure 7.4.2.2-5: Mode 2 (240 Channels)

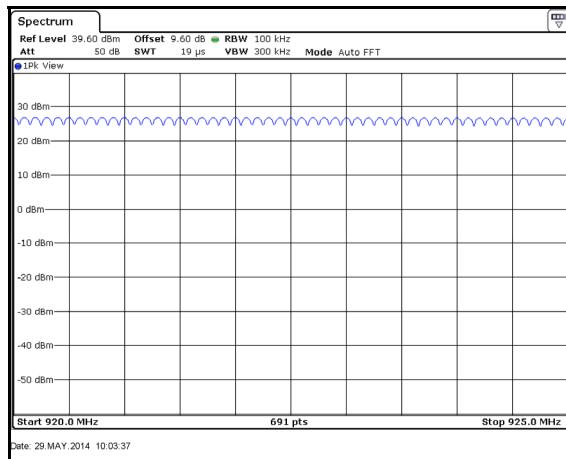


Figure 7.4.2.2-6: Mode 2 (240 Channels)

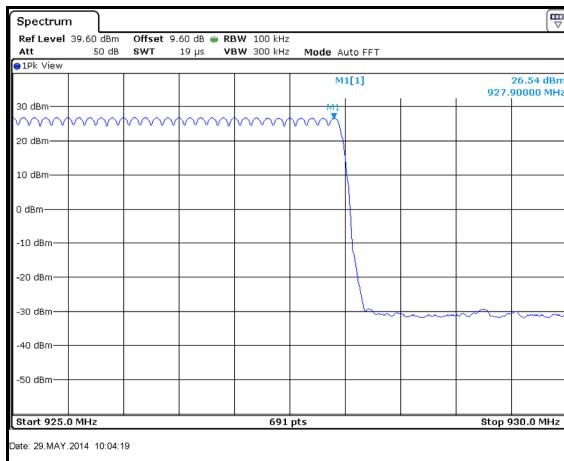


Figure 7.4.2.2-7: Mode 2 (240 Channels)

7.4.3 Channel Dwell Time – FCC 15.247(a)(1)(i) IC: RSS-210 A8.1(c)**7.4.3.1 Measurement Procedure**

The EUT test mode does not generate a worst case channel dwell time therefore a detailed engineering analysis is provided in the theory of operation.

As described in the theory of operation, the maximum channel transmitter dwell time is $\leq 400\text{ms}$ per channel hop with the minimum period of 700ms between hops. Therefore the maximum time of occupancy on any one channel within a 10s or 20s period is $<400\text{ms}$ for all modes of operation.

7.4.4 20dB / 99% Bandwidth - FCC 15.247(a)(1)(i) IC: RSS-210 A8.1(c)**7.4.4.1 Measurement Procedure**

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The span of the spectrum analyzer display was set between two times and five times the occupied bandwidth (OBW) of the emission. The RBW of the spectrum analyzer was set to approximately 1 % to 5 % of the OBW. The trace was set to max hold with a peak detector active. The Delta function of the analyzer was utilized to determine the 20 dB bandwidth of the emission.







The occupied bandwidth measurement function of the analyzer was used for the 99% bandwidth. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth was set to 3 times the resolution bandwidth. A sampling detector was used.







7.4.4.2 Measurement Results

Results are shown below in Table 7.4.4.2-1 and Figures 7.4.4.2-1 through 7.4.4.2-24.

Table 7.4.4.2-1: 20dB / 99% Bandwidth

Frequency [MHz]	20dB Bandwidth [kHz]	99% Bandwidth [kHz]	Data Rate (kbps)
902.3	22.29	21.42	9.6
902.3	44.14	44.57	19.2
902.3	91.46	88.57	38.4
902.3	271.78	250.07	115.2
915.0	22.29	21.35	9.6
915.0	45.30	44.72	19.2
915.0	91.46	89.15	38.4
915.0	273.52	253.55	115.2
927.9	22.36	21.28	9.6
927.9	44.57	44.57	19.2
927.9	91.46	89.15	38.4
927.8	274.38	253.55	115.2

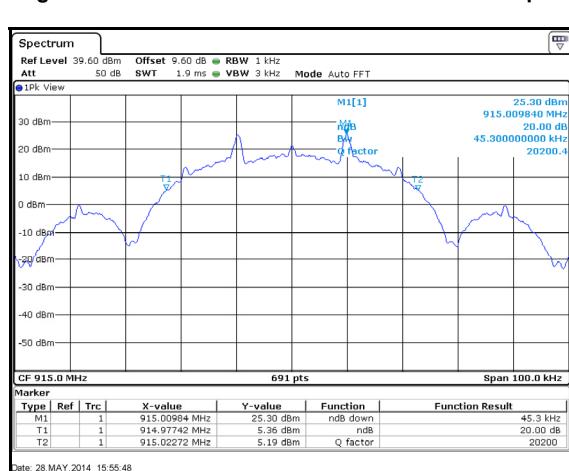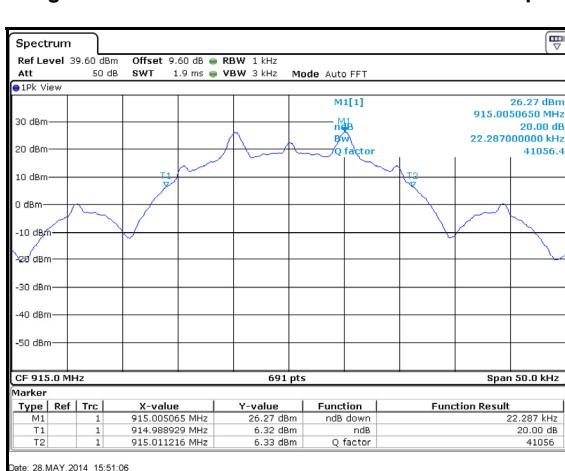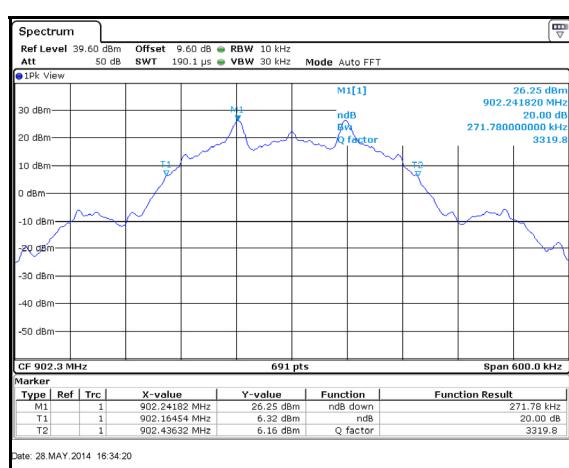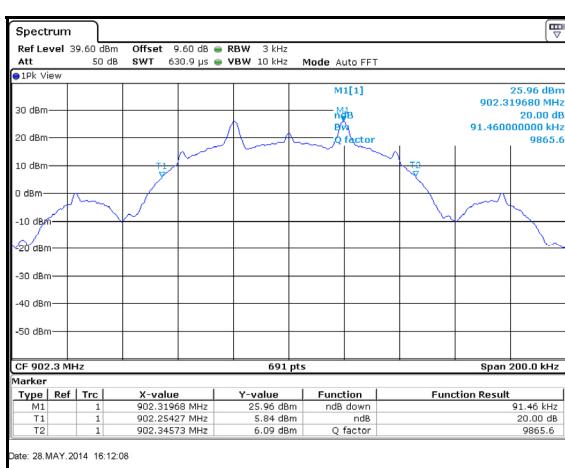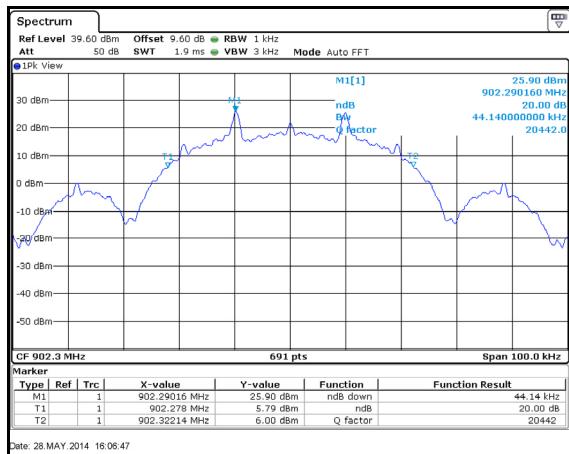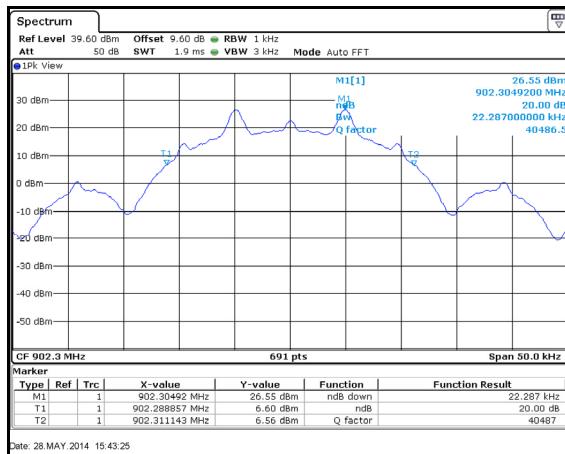

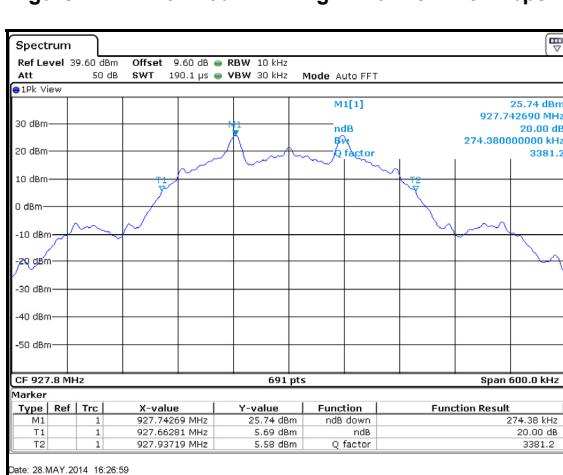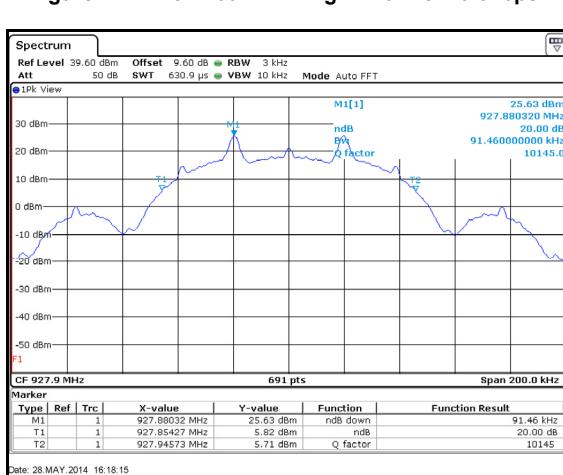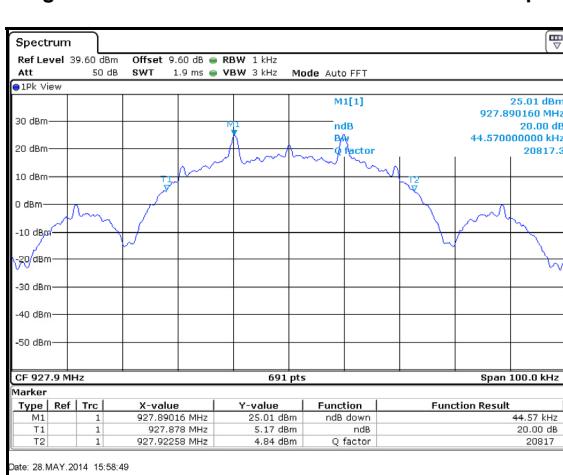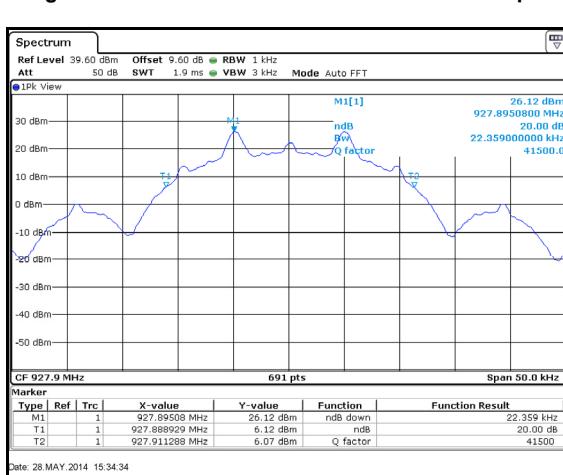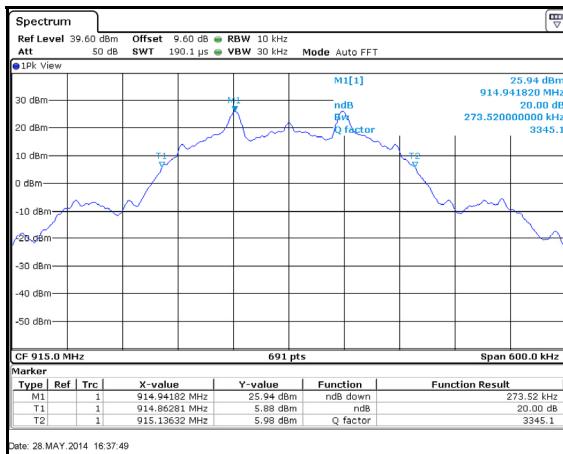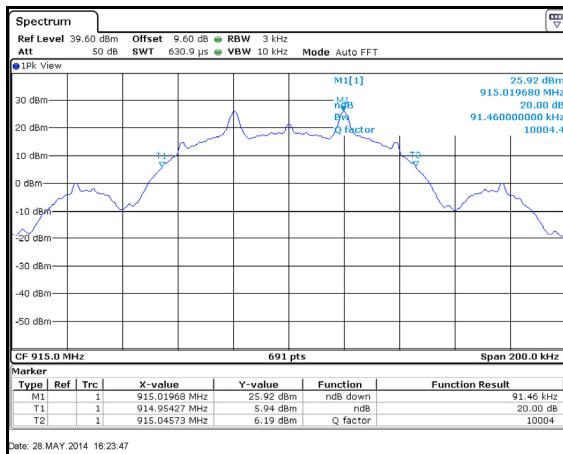

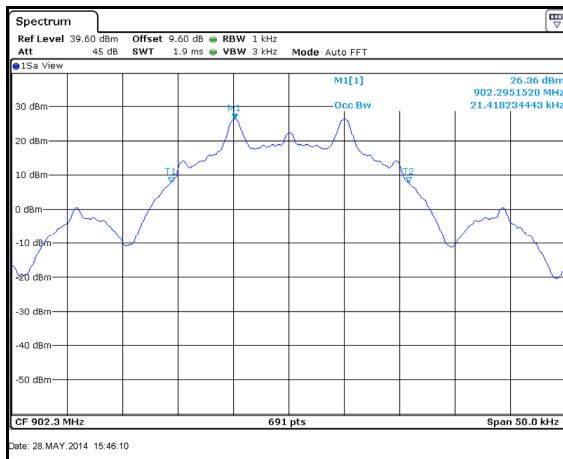


Figure 7.4.4.2-13: 99% BW Low Channel - 9.6kbps

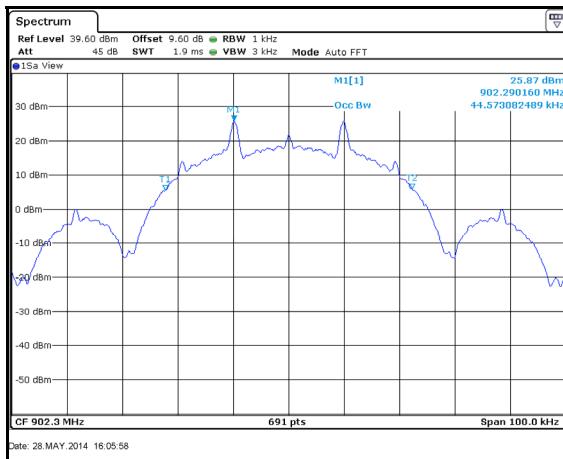


Figure 7.4.4.2-14: 99% BW Low Channel – 19.2kbps

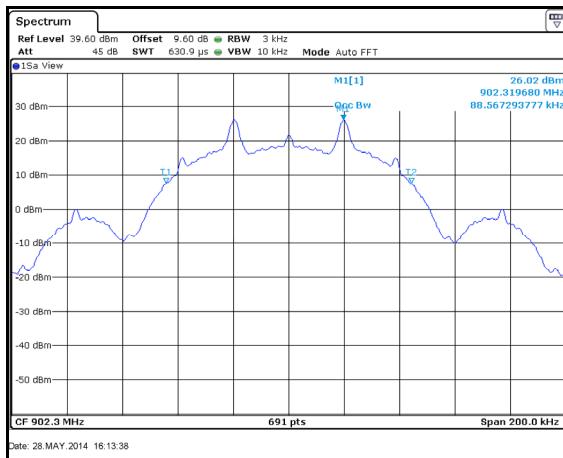


Figure 7.4.4.2-15: 99% BW Low Channel – 38.4kbps

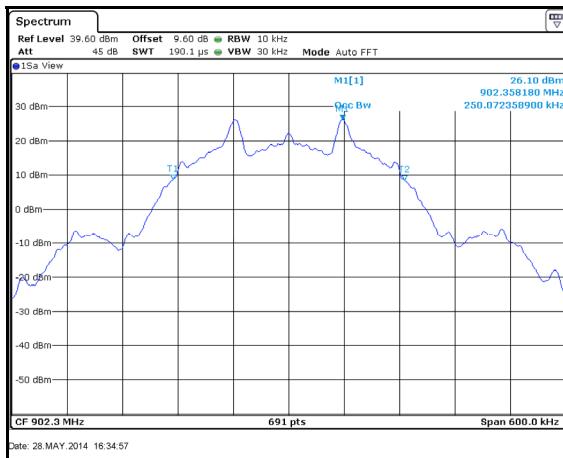


Figure 7.4.4.2-16: 99% BW Low Channel – 115.2kbps

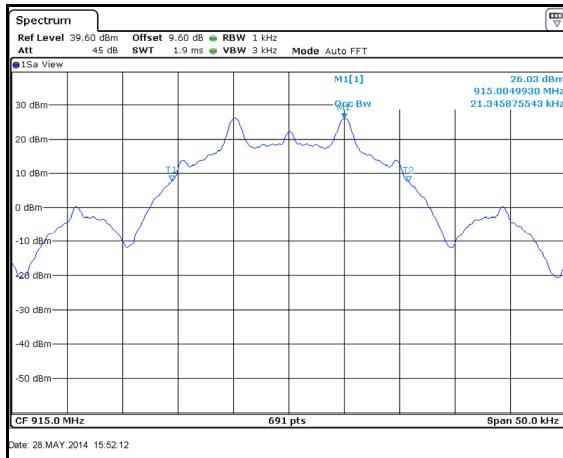


Figure 7.4.4.2-17: 99% BW Mid Channel - 9.6kbps







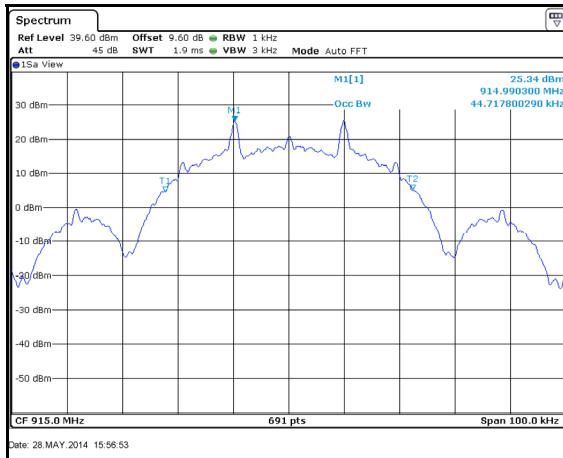


Figure 7.4.4.2-18: 99% BW Mid Channel – 19.2kbps

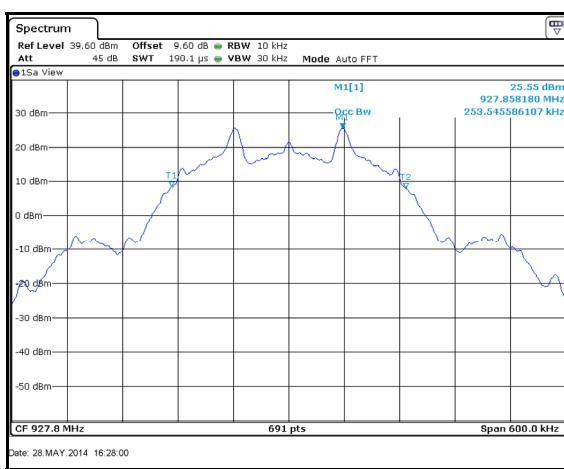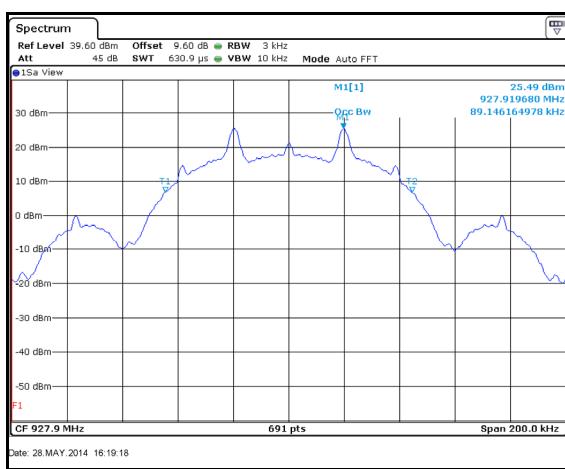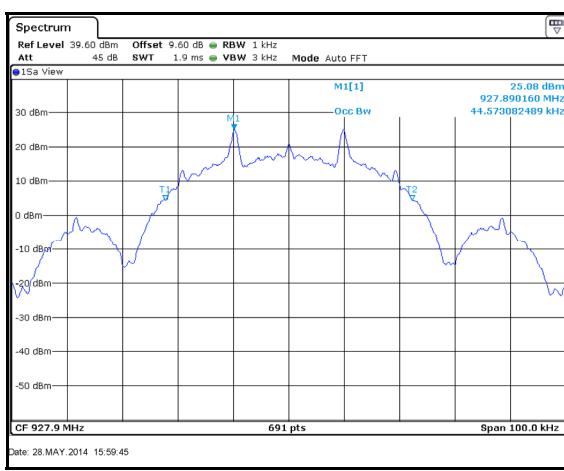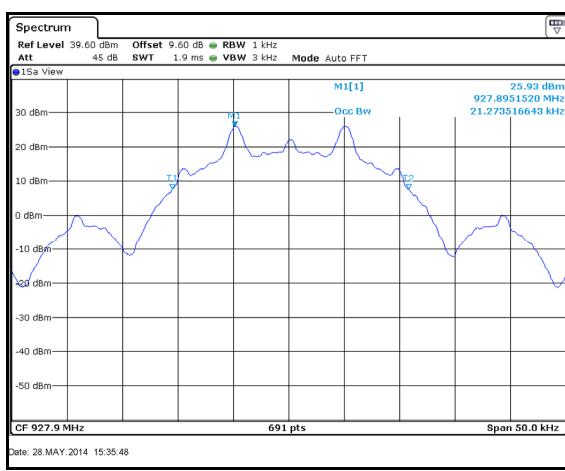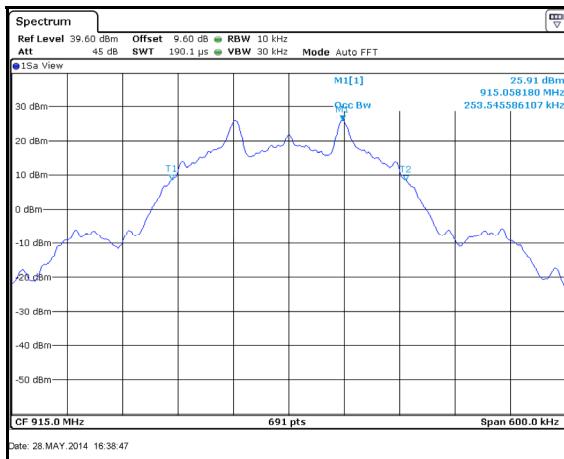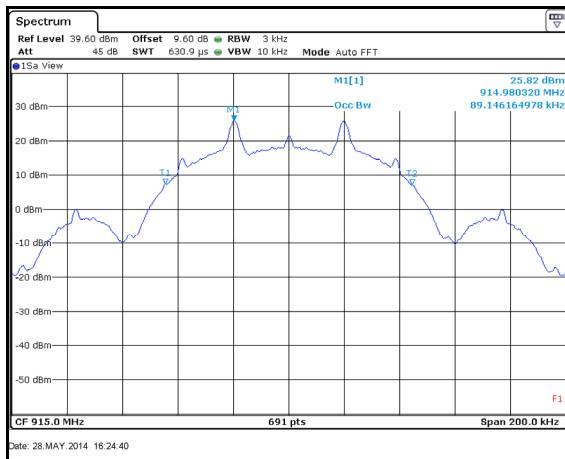

7.5 Band-Edge Compliance and Spurious Emissions

7.5.1 Band-Edge Compliance of RF Conducted Emissions - FCC 15.247(d); IC RSS-210 A8.5

7.5.1.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The EUT was investigated at the lowest and highest channel available to determine band-edge compliance. For each measurement the spectrum analyzer's RBW was set to $\geq 1\%$ of the span, and the VBW was set to $>>$ RBW.

Band-edge was evaluated for all combinations of operating modes and data rates with worst case data provided. Worst case reported utilized 115.2kbps in Mode 1 and 38.4kbps in Mode 1 and 2.

7.5.1.2 Measurement Results

Results are shown in the figures 7.5.1.2-1 to 7.5.1.2-8 below.

NON-HOPPING MODE:

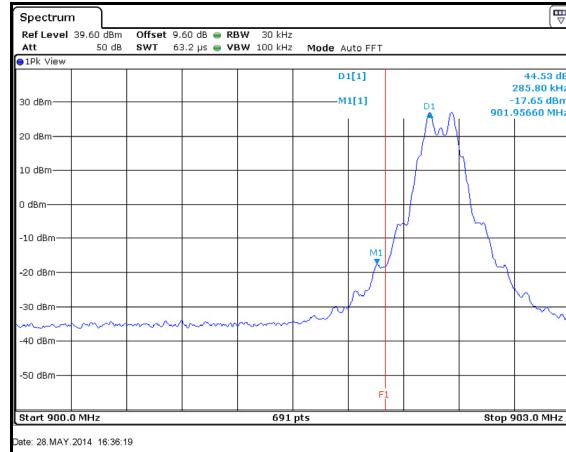


Figure 7.5.1.2-1: Lower Band-edge – Mode 1 – 115.2kbps

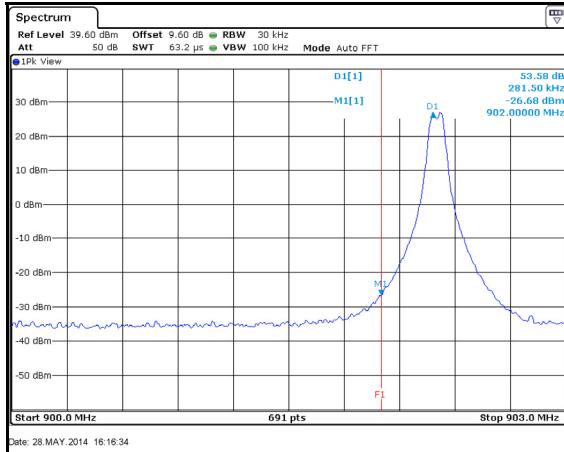


Figure 7.5.1.2-2: Lower Band-edge – Mode 1 – 38.4kbps



Figure 7.5.1.2-3: Upper Band-edge – Mode 1 – 115.2kbps

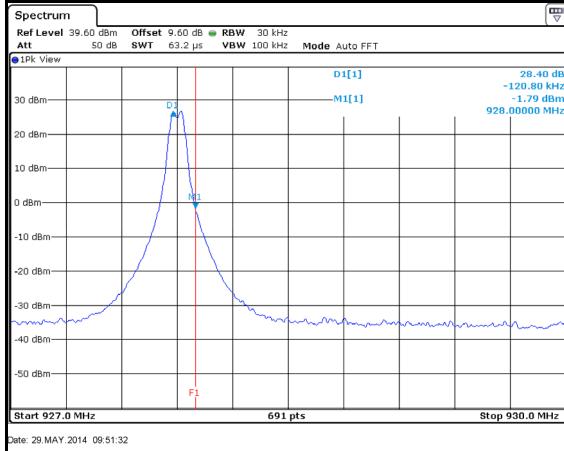
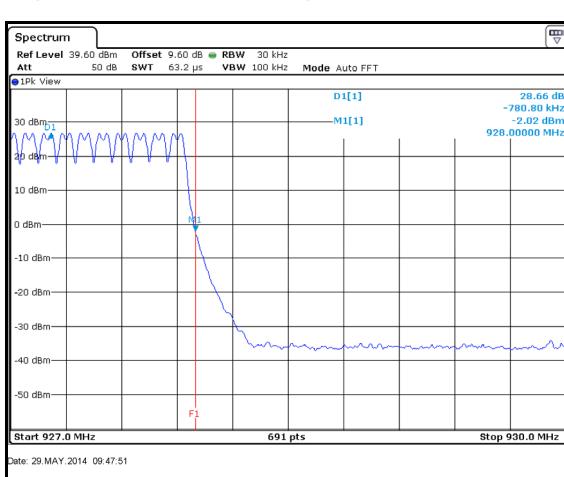
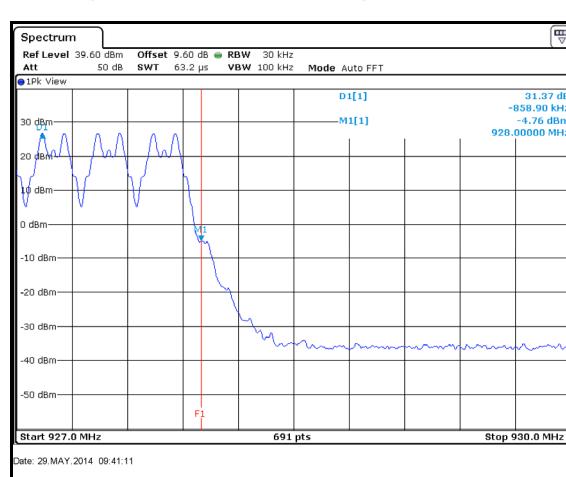
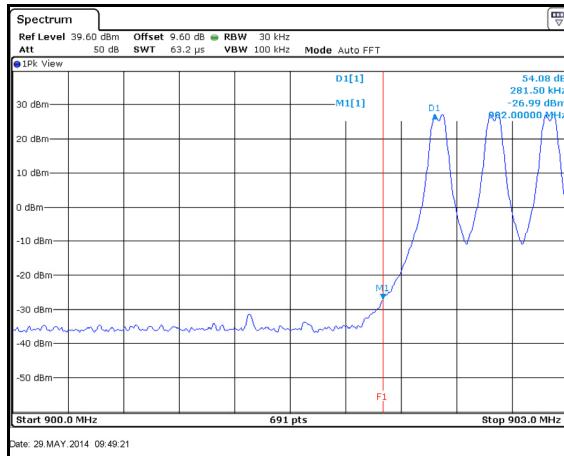
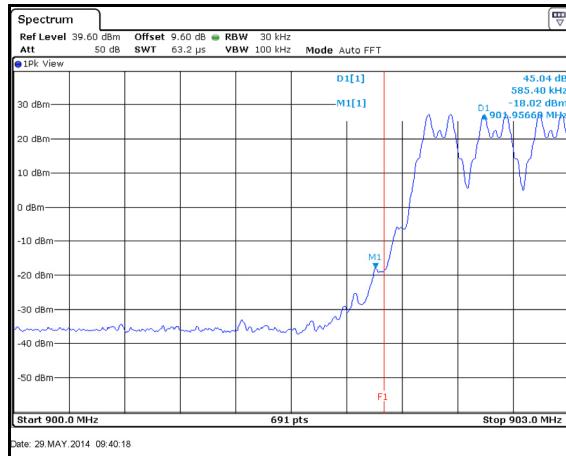


Figure 7.5.1.2-4: Upper Band-edge – Mode 2 – 38.4kbps

HOPPING MODE:

7.5.2 RF Conducted Spurious Emissions - FCC 15.247(d); IC RSS-210 A8.5

7.5.2.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The EUT was investigated for conducted spurious emissions from 30MHz to 10GHz, 10 times the highest fundamental frequency. Measurements were made at the low, center and high channels of the EUT. For each measurement, the spectrum analyzer's RBW was set to 100kHz. A peak detector function was used with the trace set to max hold.

RF conducted spurious emissions were evaluated for all combinations of operating modes and data rates with worst case data provided. Worst case report utilized 9.6kbps.

7.5.2.2 Measurement Results

Results are shown below in Figures 7.5.2.2-1 to 7.5.2.2-6:

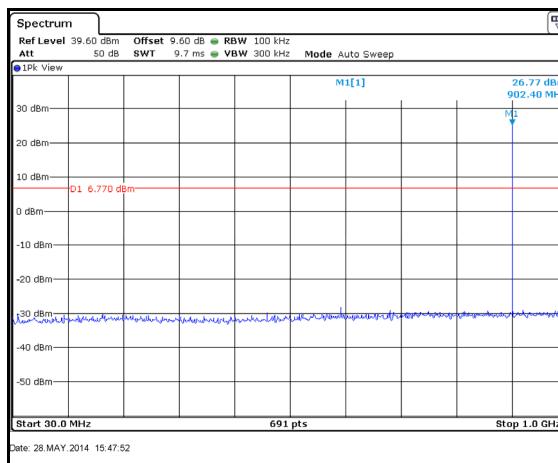


Figure 7.5.2.2-1: 30 MHz – 1 GHz – Low Channel

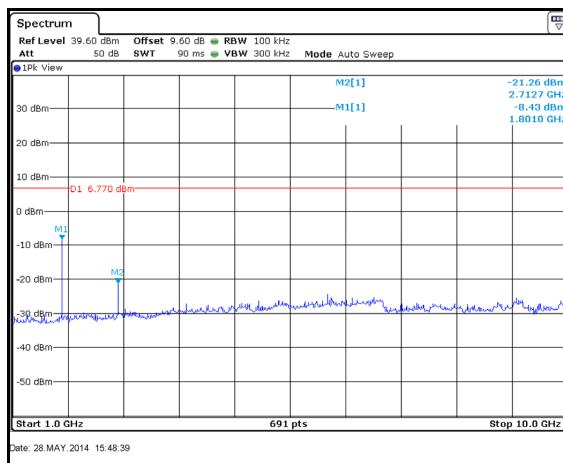


Figure 7.5.2.2-2: 1 GHz – 10 GHz – Low Channel

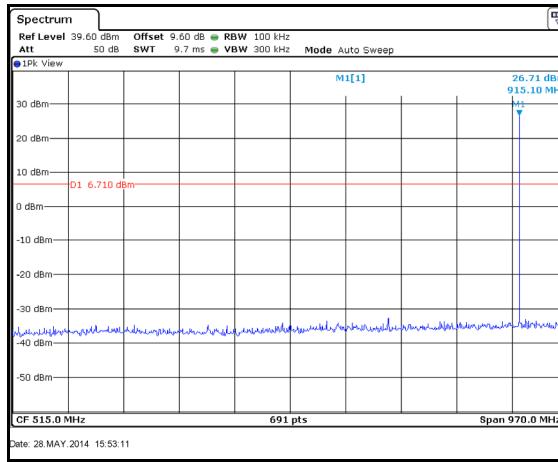


Figure 7.5.2.2-3: 30 MHz – 1 GHz – Mid Channel

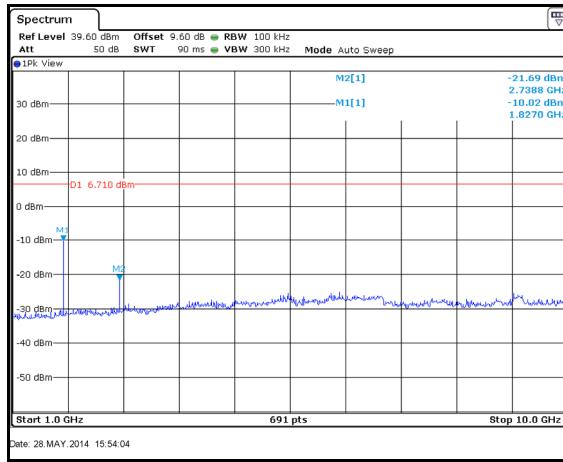


Figure 7.5.2.2-4: 1 GHz – 10 GHz – Mid Channel

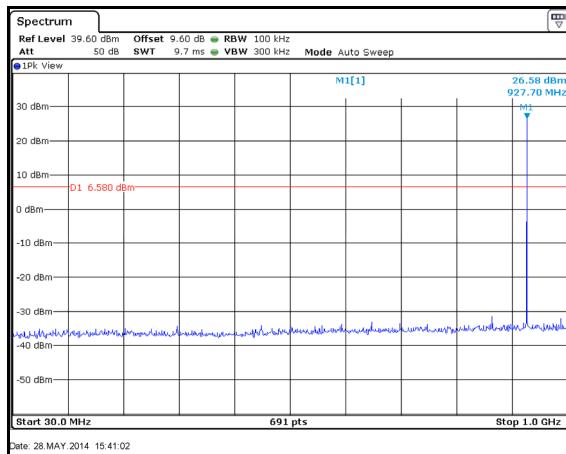


Figure 7.5.2.2-5: 30 MHz – 1 GHz – High Channel

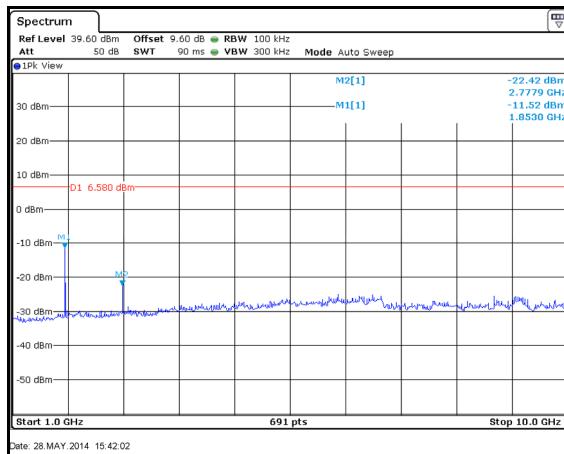


Figure 7.5.2.2-6: 1 GHz – 10 GHz – High Channel

7.5.3 Radiated Spurious Emissions - FCC 15.205, 15.209; IC RSS-210 2.2, RSS-Gen 7.2.2

7.5.3.1 Measurement Procedure

Radiated emissions tests were made over the frequency range of 30MHz to 10GHz, 10 times the highest fundamental frequency.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000MHz, peak and average measurements were made with RBW and VBW of 1 MHz and 3MHz respectively.

The EUT was caused to generate a continuous modulated carrier on the hopping channel.

Each emission found to be in a restricted band was compared to the applicable radiated emission limits.

Radiated spurious emissions were evaluated for all combinations of operating modes and data rates with worst case data provided. Worst case reported was 9.6kbps.

7.5.3.2 Measurement Results

Radiated spurious emissions found in the band of 30MHz to 10GHz are reported in the Table 7.5.3.2-1 below.

Table 7.5.3.2-1: Radiated Spurious Emissions Tabulated Data

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel										
2706.9	48.93	40.85	H	-4.93	44.00	35.92	74.0	54.0	30.0	18.1
2706.9	49.66	42.75	V	-4.93	44.73	37.82	74.0	54.0	29.3	16.2
3609.2	50.11	42.17	H	-1.63	48.48	40.54	74.0	54.0	25.5	13.5
8120.7	46.64	39.12	H	7.63	54.27	46.75	74.0	54.0	19.7	7.3
8120.7	44.15	34.12	V	7.63	51.78	41.75	74.0	54.0	22.2	12.3
9023	47.37	39.53	H	8.48	55.85	48.01	74.0	54.0	18.2	6.0
9023	45.62	35.67	V	8.48	54.10	44.15	74.0	54.0	19.9	9.9
Middle Channel										
2745	47.45	38.05	H	-4.77	42.68	33.28	74.0	54.0	31.3	20.7
2745	48.97	42.55	V	-4.77	44.20	37.78	74.0	54.0	29.8	16.2
3660	48.44	40.06	H	-1.43	47.01	38.63	74.0	54.0	27.0	15.4
7320	45.14	35.44	H	7.38	52.52	42.82	74.0	54.0	21.5	11.2
7320	46.20	37.65	V	7.38	53.58	45.03	74.0	54.0	20.4	9.0
8235	48.16	41.79	H	7.71	55.87	49.50	74.0	54.0	18.1	4.5
8235	45.12	34.68	V	7.71	52.83	42.39	74.0	54.0	21.2	11.6
9150	47.37	38.23	H	8.49	55.86	46.72	74.0	54.0	18.1	7.3
9150	46.13	35.41	V	8.49	54.62	43.90	74.0	54.0	19.4	10.1
High Channel										
2783.7	46.76	36.15	H	-4.61	42.15	31.54	74.0	54.0	31.8	22.5
2783.7	48.34	40.24	V	-4.61	43.73	35.63	74.0	54.0	30.3	18.4
3711.6	48.65	39.07	H	-1.23	47.42	37.84	74.0	54.0	26.6	16.2
7423.2	47.17	39.58	H	7.49	54.66	47.07	74.0	54.0	19.3	6.9
7423.2	46.81	37.85	V	7.49	54.30	45.34	74.0	54.0	19.7	8.7
8351.1	48.13	41.10	H	7.80	55.93	48.90	74.0	54.0	18.1	5.1
8351.1	45.06	34.95	V	7.80	52.86	42.75	74.0	54.0	21.1	11.2

7.5.3.3 Sample Calculation:

$$R_C = R_U + CF_T$$

Where:

CF_T = Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)

R_U = Uncorrected Reading

R_C = Corrected Level

AF = Antenna Factor

CA = Cable Attenuation

AG = Amplifier Gain

DC = Duty Cycle Correction Factor

Example Calculation: Peak

Corrected Level: $48.93 - 4.93 = 44.0\text{dBuV/m}$

Margin: $74\text{dBuV/m} - 44.0\text{dBuV/m} = 30.0\text{dB}$

Example Calculation: Average

Corrected Level: $40.85 - 4.93 - 0 = 35.92\text{dBuV}$

Margin: $54\text{dBuV} - 35.92\text{dBuV} = 18.1\text{dB}$

8 CONCLUSION

In the opinion of ACS, Inc. the 5252 Comm Module, manufactured by Landis+Gyr Technology, Inc. meets the requirements of FCC Part 15 subpart C and Industry Canada's Radio Standards Specification RSS-210.

END REPORT