

Electromagnetic Emission

FCC MEASUREMENT REPORT

CERTIFICATION OF COMPLIANCE

FCC Part 15 Certification Measurement

PRODUCT : MP3 Player
MODEL/TYPE NO : DP-1300
FCC ID : R8DDP-1300
APPLICANT : WAVESYSTECH CO., LTD
Daeryung Techno Tower 6-901, Gasan-dong, Geumchun-gu,
Seoul, Korea
Attn. : Choung, Lee / Engineer
FCC CLASSIFICATION : Class B personal computers and peripherals
FCC RULE PART(S) : FCC Part 15 Subpart B
FCC PROCEDURE : Certification
TRADE NAME : WAVESYSTECH
TEST REPORT No. : E04.0604.FCC.308N
DATES OF TEST : May 31 ~ June 04, 2004
DATES OF ISSUE : June 04, 2004
TEST LABORATORY : ETL Inc (FCC Registration Number : 95422)
#584 Sangwhal-ri, Kanam-myon, Yaju-kun, Kyounggi-do,
469-880, Korea
Tel : (031) 885-0072 Fax : (031) 885-0074

This MP3 Player, Model DP-1300 has been tested in accordance with the measurement procedures specified in ANSI C63.4-1992 at the ETL/EMC Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part15 Subpart B :

I attest to the accuracy of data. All measurement herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.



Yo Han, Park / Chief Engineer



ETL Inc.

**#584 Sangwhal-ri, Kanam-myon, Yaju-kun,
Kyounggi-do, 469-880, Korea**

Table of Contents

FCC Measurement Report

- 1. Introduction**
- 2. Product Information**
- 3. Description of Tests**
- 4. Test Condition**
- 5. Test Results**
 - 5.1 Summary of Test Results**
 - 5.2 Conducted Emissions Measurement**
 - 5.3 Radiated Emissions Measurement**
- 6. Sample Calculations**
- 7. List of test Equipment used for Measurement**

Appendix A. FCC ID Label and Location

Appendix B. Test Setup Photographs

Appendix C. External Photographs

Appendix D. Internal Photographs

Appendix E. Block Diagram

Appendix F. User Manual



FCC MEASUREMENT REPORT

Scope – Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)

General Information

Applicant Name : WAVESYSTECH CO., LTD.
Address : Daeryung Techno Tower 6-901, Gasan-dong, Gumchun-gu, Seoul, Korea
Attention : Choung, Lee / Engineer

- **EUT Type :** MP3 Player
- **Model Number :** DP-1300
- **FCC ID :** R8DDP-1300
- **S/N :** N/A
- **FCC Rule Part(s) :** FCC Part 15 Subpart B
- **Test Procedure :** ANSI C63.4-1992
- **FCC Classification :** Class B personal computers and peripherals
- **Dates of Tests :** June 04, 2004
- ETL Inc
EMC Testing Lab (FCC Registration Number : 95422)
- **Place of Tests :** 584, Sangwhal-ri, Kanam-Myun, Yoju-Kun, Kyounggi-Do, Korea
Tel : (031) 885-0072 Fax : (031) 885-0074
- **Test Report No. :** E04.0604.FCC.308N



FCC TEST REPORT



1. INTRODUCTION

The measurement test for radiated and conducted emission test were conducted at the open area test site of E-RAE Testing Laboratory Inc. facility located at 584, Sangwhal-ri, Ganam-myun, Youju-kun, Kyoungki-do, Korea. The site is constructed in conformance with the requirements of the ANSI C63.4-1992 and CISPR Publication 16. The ETL has site descriptions on file with the FCC for 3 and 10 meter site configurations. Detailed description of test facility was found to be in compliance with the requirements of Section 2.948 FCC Rules according to the ANSI C63.4-1992 and registered to the Federal Communications Commission(Registration Number : 95422).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C.63.4-1992) was used in determining radiated and conducted emissions from the WAVESYSTECH CO., LTD. Model : DP-1300



2. PRODUCT INFORMATION

2.1 Equipment Description

The tested model is DP-1300. Model DP-1*00 is same as model DP-1100 and DP-1200, DP-1300 for all electric and electronics components. The difference between models is only Memory Chip set equipment, model designation. The “*” in the designation model name may be 1 and 2, 3 denoting a Memory Chip set's equipment. DP-1100 equip 128MB Memory and DP-1200 equip 256MB Memory, DP-1300 equip 512MB Memory.

2.2 General Specification

Model	DP Serise
Supported Compression Formats	MP3(8.320kbps), ADPCM(32kbps), WMA
Internal Storage Capacity	128 / 256/ 512
Display	FSTN Type Graphic (128 *64) LCD (7 Color LED Back Light)
Supported Languages	36
User Interface Language	English
File Transfer Rate	Max. 2.4Mbps
Earphone Output	12mW(L) + 12mW(R)
Signal to Noise Ratio	85dB
Output Frequency Range	20Hz to 20kHz
Battery	AAA Battery 1EA
Playing Time	10hrs (MP3 Mode)
FM Frequency Range	87.5MHz to 108.0MHz
Dimensions / Weight	32(W) * 78(H) * 23(D)mm/48g (Including Battery)

3. DESCRIPTION OF TESTS

3.1 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with § 12.2 in ANSI C63.4-1992 "Measurement of Information Technology Equipment". The measurement were performed over the frequency range of 0.15MHz to 30MHz using a 50 /50uH LISN as the input transducer to a Spectrum Analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 10KHz or for "quasi-peak" within a bandwidth of 9KHz.

- Procedure of Test

The line-conducted facility is located inside a shielded room 1m X 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 1.5m away from the side wall of the shielded room. Ground of Two EMCO 3825/2 LISN are bonded to the reference horizontal gorund. The EUT is powered from the EMCO LISN and the support equipment is powered from the other EMCO LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner ϕ 1.2cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the EMCO LISN. Non-inductive bundling to a 1m length shortened all interconnecting cables more than 1m. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the ESHS30 EMI Test Receiver to determine the frequency producing the max. emission from the EUT. The frequency producing the max. level was reexamined using to set Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 to 30MHz. The bandwidth of the spectrum analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission.

3. DESCRIPTION OF TESTS

3.2 Radiated Emission Measurement

Radiated emission measurements were in accordance with § 12.2 in ANSI C63.4-1992 "Measurement of Information Technology Equipment ". The measurements were performed over the frequency range of 30MHz to 1GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Quasi-peak" within a bandwidth of 120KHz.

- Procedure of Test

Preliminary measurements were made at 3 meter using broadband antennas, and spectrum analyzer to determined the frequency producing the max. emission in shielded room. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 to 1000MHz using SchwarzBeck Log-Bicon antenna. Above 1GHz, linearly polarized double ridge horn antennas were used. Final measurements were made open site at 10-meters. The test equipment was placed on a wooden turn-table. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR Quasi-peak mode and the bandwidth of the receiver was set to 120kHz or 1MHz depending on the frequency of type of signal. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the max. emission for the frequency and were placed on top of a 0.8-meter high nonmetallic 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the max. emission. Each emission was maximized by: varying the mode of operation to the EUT and/or support equipment and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

4. TEST CONDITION

4.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following conditions and configurations were used.

4.2 EUT operation

Operating Mode	The worst operating condition
Stand-by Mode	
Sound board cast reception mode	
FM reception mode	
Test program executed (Data Comparison Test Program)	,

: These tests was carried out.

: Worst case investigated during the test.

4.3 Support Equipment Used

Following peripheral devices and interface cables were connected during the measurement:

EUT – LCD Monitor

FCC ID	: R8DDP-1300
Model Name	: DP-1300
Serial No.	: N/A
Manufacturer	: WAVESYSTECH CO., LTD.
Power Supply Type	: AAA Battery 1EA
Power Cord	: N/A
Data Cable	: 1m Shielded USB Cable, 1m Shielded Audio Cable, 1m Earphone

Support Unit 1 – Personal computer(DELL)

FCC ID	: N/A (DoC)
Model Name	: DHM
Serial No.	: H9MB71S
Manufacturer	: DELL
Power Supply Type	: Switching
Power Cord	: Non-Shielded, Detachable: 1.2m
Data Port	: RGB IN:1, Parallel:1, RS-232:1, PS/2: 2, USB: 4, RJ-45:1 : Audio in:1, Audio out:1, MIC IN:1

Support Unit 2 – LCD Monitor (ERAE)

FCC ID	: OIOELM-150
Model Name	: ELM-150B
Serial No.	: N/A
Manufacturer	: ERAE Electronics Industry Co., Ltd.
Power Supply Type	: DC 12V From Adaptor
Power Cord	: Non-shielded, Detachable: 1.2m
Data Cable	: Shielded 15Pin D-sub, 1.5m

ETL Inc.
#584 Sangwhal-ri, Kanam-myeon,
Yuju-kun, Kyunggi-do,
469-880, Korea

WAVESYSTECH CO., LTD.
MP3 Player
Model: DP-1300



FCC TEST REPORT



Support Unit 2 – Keyboard (COMPAQ)

FCC ID	: N/A (DoC)
Model Name	: KB-9963
Serial No.	: B26960GBUKO13F
Manufacturer	: COMPAQ
Power Supply Type	: N/A
Power Cord	: N/A
Data Cable	: Shielded, 1.5m

Support Unit 3 – Mouse (LOGITECH)

FCC ID	: DZL211029
Model Name	: M-S34
Serial No.	: LZC01002314
Manufacturer	: LOGITECH
Power Supply Type	: N/A
Power Cord	: N/A
Data Cable	: None-Shielded, 1.2m

Support Unit 5 – Serial Mouse (PETRA)

FCC ID	: JKGMUS5S01
Model Name	: MUS5S
Serial No.	: E183027
Manufacturer	: PETRA
Power Supply Type	: N/A
Power Cord	: N/A
Data Cable	: Shielded, 1.2m

Support Unit 6 – Printer (SINDO RICOH)

FCC ID	: N/A
Model Name	: Color cap 330
Serial No.	: 11-03098
Manufacturer	: LEXMARK INTERNATIONAL INC.
Power Supply Type	: AC 110V~220V
Power Cord	: Non-Shield, 1.5m
Data Cable	: Shielded, 1.5m



FCC TEST REPORT



5. TEST RESULTS

5.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

Test Rule Parts	Measurement Required	Result
15.107	Conducted Emissions Measurement	Passed
15.109	Radiated Emissions Measurement	Passed

The data collected shows that the **WAVESYSTE CO., LTD./ MP3 Player / DP-1300** complies with technical requirements of above rules part 15.107 and 15.109 Class B Limits and CISPR Publication 22.

The equipment is not modified anything, mechanical or circuits to improve EMI status during a measurement. No EMI suppression device(s) was added and/or modified during testing.



FCC TEST REPORT



5. TEST RESULTS

5.2 Conducted Emissions Measurement

EUT	MP3 Player / DP-1300 (SN: N/A)
Limit apply to	FCC Part 15. 107(CISPR Pub.22 Class B)
Test Date	May 31, 2004
Operating Condition	Test program executed (Data Comparison Test Program)
Environment Condition	Humidity Level : 32 %RH, Temperature : 24
Result	Passed by 5.5dB μ V

Conducted Emission Test Data

The following table shows the highest levels of conducted emissions on both polarization of Hot and neutral line.

Detector mode : CISPR Quasi-Peak mode (6dB Bandwidth : 9 KHz)

Frequency [MHz]	Reading [dB μ V]		Phase (*H/**N)	Limit [dB μ V]		Margin [dB μ V]	
	Quasi-peak	Average		Quasi-peak	Average	Quasi-peak	Average
0.195	39.8	-	H	63.8	53.8	24.0	-
0.230	39.5	-	N	62.4	52.4	22.9	-
0.263	39.7	-	N	61.3	51.3	21.6	-
0.304	33.2	-	N	60.1	50.1	26.9	-
0.350	33.4	-	N	59.0	49.0	25.6	-
2.584	40.2	-	H	56.0	46.0	15.8	-
3.238	47.3	40.5	H			8.7	5.5
3.550	43.5	35.1	H			12.5	10.9
3.870	43.9	36.5	H			12.1	9.5
4.584	40.9	-	H			15.1	-
5.115	39.1	-	H	60.0	50.0	20.9	-
5.770	37.3	-	H			22.7	-
10.930	41.5	-	N			18.5	-
19.825	36.9	-	H			23.1	-
28.500	39.0	-	N			21.0	-

NOTES :* H : HOT Line , **N : Neutral Line

- Margin value = Limit – Reading
- Measurement were performed at the HOST AC Power Inlet in the frequency band of 150kHz ~ 30MHz according to the CISPR 22 Class B
- If the Reading Quasi-Peak value is bellowed the Average Limit, Do not test Average Mode.

Test Engineer : H. J. Kim

5. TEST RESULTS

Line: HOT Line


ETL EMC Laboratory

Conducted Emission Test Result

EUT: DP-1100
Manuf: wavesystec
Op Cond:
Operator:
Test Spec: CISPR 22 CLASS B
Comment: Hot

Result File: dp1100h.dat: wavesystec / DP-1100 / Hot

Scan Settings		(3 Ranges)			Receiver Settings								
		Frequencies			Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
	Start	Stop			150kHz	1000kHz	1000Hz	10kHz	PK+AV	10msec	Auto	OFF	60dB
	150kHz	1000kHz			1000kHz	5MHz	2kHz	10kHz	PK+AV	10msec	Auto	OFF	60dB
	5MHz	30MHz			5MHz	30MHz	5kHz	10kHz	PK+AV	10msec	Auto	OFF	60dB
Transducer	No.	Start	Stop						Name				
	1	9kHz	30MHz						Factor				
Prescan Measurement:		Detectors:	X PK / + AV										
		Meas Time:	see scan settings										
		Peaks:	8										
		Acc Margin:	10 dB										

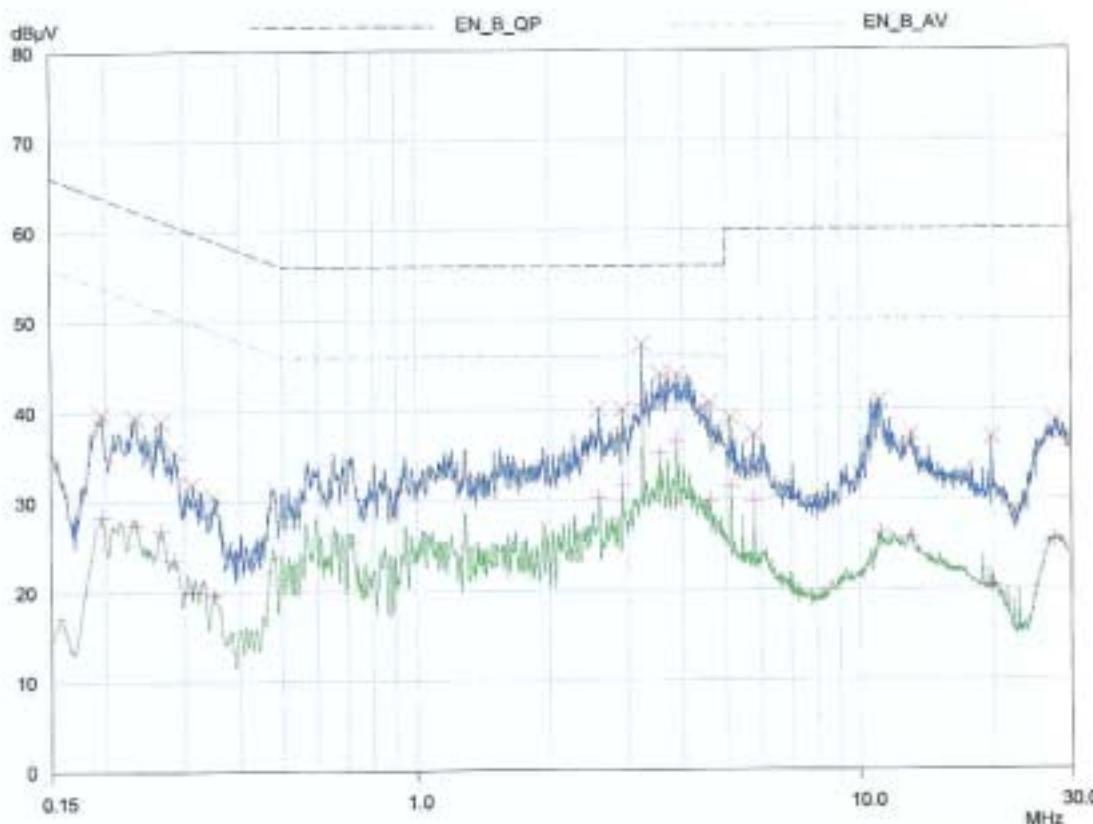

5. TEST RESULTS


Line: Neutral Line

ETL EMC Laboratory

Conducted Emission Test Result

EUT: DP-1100
 Manuf: wavesystec
 Op Cond:
 Operator:
 Test Spec: CISPR 22 CLASS B
 Comment: Neutral
 Result File: dp1100n.dat : wavesystec / DP-1100 / Neutral

Scan Settings		(3 Ranges)			Receiver Settings						
		Frequencies	Start	Stop	Step	IF BW	Detector	M-Time	Attan	Preamp	OpRge
Start			Stop		Step	IF BW	Detector	M-Time	Attan	Preamp	OpRge
150kHz		1000kHz	1000Hz	10kHz	10kHz	10kHz	PK+AV	10msec	Auto	OFF	60dB
1000kHz		5MHz	5kHz	10kHz	5kHz	10kHz	PK+AV	10msec	Auto	OFF	60dB
5MHz		30MHz	5kHz	10kHz	5kHz	10kHz	PK+AV	10msec	Auto	OFF	60dB
Transducer	No.		Start	Stop			Name				
	1		9kHz	30MHz			Factor				
Prescan Measurement:			Detectors:	X	PK / + AV						
			Meas. Time:		see scan settings						
			Peaks:		8						
			Acc. Margin:		10 dB						

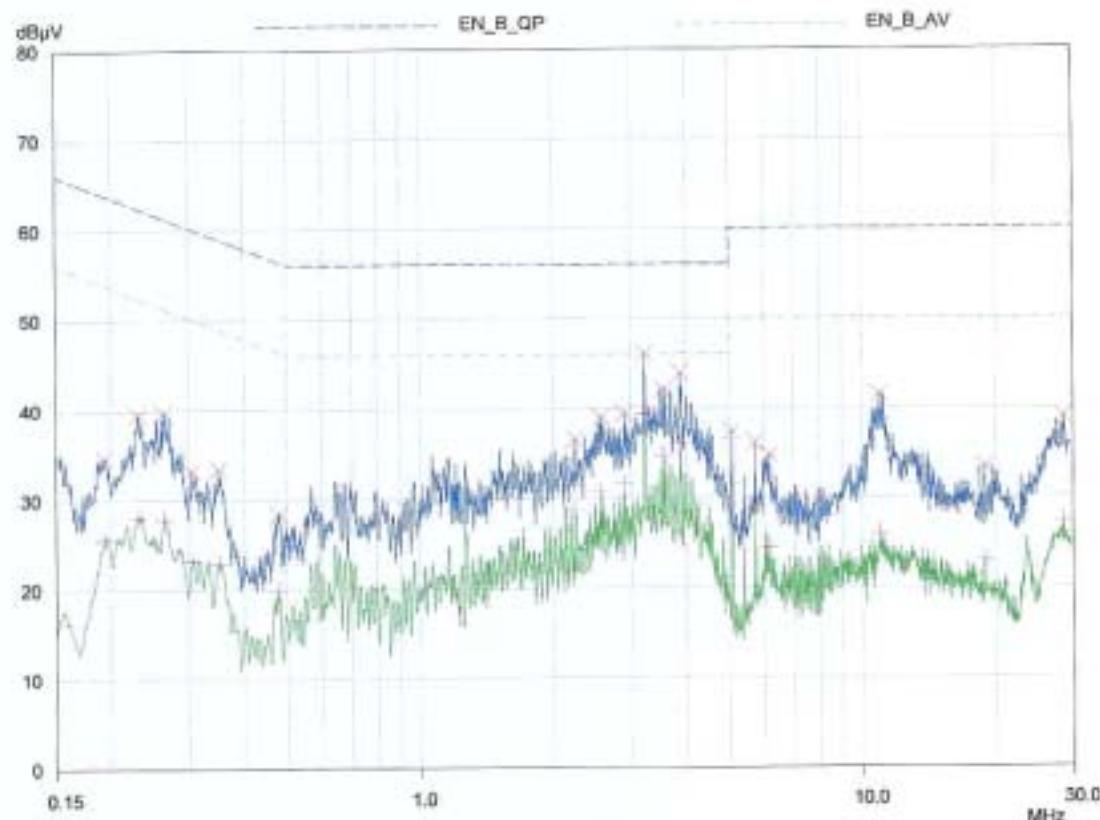

ETL Inc.

#584 Sangwhal-ri, Kanam-myon,
Yuju-kun, Kyunggi-do,
469-880, Korea

WAVESYSTECH CO., LTD.
MP3 Player
Model: DP-1300

13 of 16

Form NO: ETL(E)004A4001201-0

5. TEST RESULTS

5.3 Radiated Emissions Measurement

EUT	MP3 Player / DP-1300 (SN: N/A)
Limit apply to	FCC Part 15. 109(CISPR Pub.22 Class B)
Test Date	June 01, 2004
Operating Condition	Test program executed (Data Comparison Test Program)
Environment Condition	Humidity Level : 32 %RH, Temperature : 24
Result	Passed by 4.99 dB μ V

Radiated Emission Test Data


The following table shows the highest levels of radiated emissions on both polarization of horizontal and vertical.

Detector mode : CISPR Quasi-Peak mode (6dB Bandwidth : 120 kHz)

Frequency [MHz]	Reading [dB μ V]	Polarization (*H/**V)	Ant. Factor [dB μ V/m]	Cable Loss [dB μ V]	Emission Level [dB μ V]	Limit [dB μ V]	Margin [dB μ V]
115.21	8.80	H	11.45	3.73	23.98	30.0	6.02
124.15	9.00	H	12.17	3.84	25.01		4.99
137.79	7.10	H	13.07	3.98	24.14		5.86
178.83	7.94	H	11.22	4.39	23.55		6.45
192.00	9.49	H	9.99	4.52	24.00		6.00
202.76	10.53	H	9.49	4.61	24.63		5.37
264.10	9.12	H	12.42	5.36	26.90	37.0	10.10
288.06	9.47	H	13.39	5.84	28.70		8.30
335.35	7.64	H	14.83	6.55	29.03		7.97
344.00	5.49	H	14.98	6.64	27.11		9.89
393.67	3.61	H	16.77	7.05	27.43		9.57
468.82	4.56	H	18.09	8.03	30.67		6.33

NOTES : * H : Horizontal polarization , ** V : Vertical polarization

1. Emission Level = Reading + Antenna factor + Cable loss
2. Margin value = Limit - Emission Level
3. The measurement was performed for the frequency range 30MHz ~ 1000MHz according to the CISPR 22 Class B



Test Engineer : H. J. Kim



6. SAMPLE CALCULATION

Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

$$dB(\mu V/m) = 20 \log_{10} (\mu V /m) : \text{Equation 1}$$

$$dB\mu V = dBm + 107 : \text{Equation 2}$$

Example 1 : @ 3.238 MHz

Class B Limit	=	200 μV	=	46 dB μV
Reading	=	40.5 dB μV		
Convert to μV	=	106.0 μV		
Margin	=	46 – 40.5 = 5.5dB μV		
	=	5.50 dB μV	below Limit	

Example 2 : @ 124.15MHz

Class B Limit	=	31.63 μV	=	30 dB μV
Reading	=	9.0 dB μV		
Antenna Factor + Cable Loss	=	12.17 + 3.84 = 16.01 dB μV		
Total	=	25.01dB μV		
Margin	=	30 – 25.01 = 4.99 dB μV		
	=	4.99 dB μV	below Limit	



FCC TEST REPORT



7. TEST EQUIPMENT LIST

List of Test Equipments Used for Measurements

Test Equipment		Model	Mfg.	Serial No.	Cal. Due Date
<input type="checkbox"/>	Spectrum Analyzer	E7402A	H.P	US39110107	05-05-21
<input checked="" type="checkbox"/>	Receiver	ESVS 10	R & S	835165/001	05-03-22
<input checked="" type="checkbox"/>	EMI TEST Receiver	ESHS30	Rohde & Schwarz	0401901/002	05-03-19
<input type="checkbox"/>	Preamplifier	HP 8347A	HP	2834A00544	05-03-19
<input type="checkbox"/>	LISN	3825/2	EMCO	9006-1669	05-01-10
<input checked="" type="checkbox"/>	LISN	3825/2	EMCO	9208-1995	04-12-27
<input checked="" type="checkbox"/>	TriLog Antenna	VULB9160	Schwarz Beck	3082	04-06-19
<input checked="" type="checkbox"/>	LogBicon	VULB9165	Schwarz Beck	2023	05-05-28
<input type="checkbox"/>	Dipole Antenna	VHAP	Schwarz Beck	964	05-05-03
<input type="checkbox"/>	Dipole Antenna	VHAP	Schwarz Beck	965	05-05-03
<input type="checkbox"/>	Dipole Antenna	UHAP	Schwarz Beck	949	05-05-03
<input type="checkbox"/>	Dipole Antenna	UHAP	Schwarz Beck	950	05-05-03
<input type="checkbox"/>	Double Ridged Horn	3115	EMCO	9809-2334	04-09-20
<input type="checkbox"/>	Turn-Table	DETT-03	Daeil EMC	-	N/A
<input checked="" type="checkbox"/>	Antenna Master	DEAM-03	Daeil EMC	-	N/A
<input checked="" type="checkbox"/>	Plotter	7440A	H.P	2725A 75722	N/A
<input type="checkbox"/>	Chamber	DTEC01	DAETONG	-	N/A
<input type="checkbox"/>	Impedance Matching Pad	6001.01.A	SUNNER	3252	05-04-24
<input type="checkbox"/>	Thermo Hygrograph	3-3122	ISUZU	3312201	04-12-20
<input checked="" type="checkbox"/>	BaroMeter	-	Regulus	-	-
<input type="checkbox"/>	Spectrum Analyzer	E7402A	H.P	US39110107	05-05-21