

Report No	EE0454-1
Client	Millennial Net
Phone	617-225-0100
Fax	617-225-0770
FRN	0011054871
Model	RT-5209Z1
FCC ID	R8N-RT-5209Z1
Equipment Type Equipment Code	Low Power Communication Device Transmitter DXX
Results	As detailed within this report
Prepared by	 Mairaj Hussain – Test Engineer
Authorized by	 Michael Buchholz – EMC Manager
Issue Date	7/8/04
Conditions of issue	This Test Report is issued subject to the conditions stated in ‘terms and conditions’ section of this

Summary	3
Test Methodology	3
EUT Configuration	4
Statement of Conformity	5
Test Data and Plots	6
Band Edges	6
Section 15.249	7
Section 15.249 (d)	8
AC Line Conducted Emission Measurements	9
Section 15.31(e)	10
Test Equipment Used	11
Terms And Conditions	13
A2LA Accreditation	15

Summary

This report is an application for certification of a transmitter operating under 47 CFR 15.249 of the FCC rules provided for operation in the frequency band of 902-928MHz. The product covered by this report is RT-5209Z1, which is a wireless subbase router system.

The manufacture requires the following antenna to be used with RT-5209:

- i) RCS Right-Angle Reduced -Height RP-SMA

A detailed description of the above-mentioned antenna can be found in the antenna exhibit.

Test Methodology

All testing was performed according to the procedures specified in ANSI C63.4 (2002). The product was tested with modulation on and peak readings were compared against the average limit presented in section CFR 15.249.

Frequency range investigated:	30MHz – 10GHz
--------------------------------------	---------------

Measurement Distance:		
<i>Frequency (MHz)</i>	<i>Distance (m)</i>	<i>Comments</i>
Fundamental (916.6MHz)	3 m	Radiated
30MHz – 10GHz except 902-928MHz band	3m	Radiated Spurious Measurements

The EUT was fully maximized. The EUT antenna can not be maximized separately. The product only has one channel of operation and was evaluated at that channel. The product was also tested in Rx mode for spurious emissions.

The product is DC powered. The product was tested with an AC adaptor model Radioshack cat no. 273-1690. Line conducted emissions testing was performed with a 50 Ω /50 μ H LISN.

All readings are peak unless otherwise noted.

EUT Configuration

EUT Configuration				
Work Order: E0454				
Company: Millennial Net				
Company Address: 201 Broadway Cambridge, MA 02319				
Contact: Jason Xiao				
Person Present: None				
MN		SN		
EUT: RT 5209 Z1		1		
RadioShack ACadapter 273-1690		1		
EUT Description: Subbase Router (Tx and Rx units)				
EUT Max Frequency: 916.56 MHz				
Support Equipment:	MN	SN		
None				
EUT Cables:	Qty	Shielded?	Length	Ferrites
DC power	1	No	1.5 m	None
Unpopulated EUT Ports:	Qty	Reason		
None				
Software / Operating Mode Description:				
Product was set to operate in continuous Tx and Rx modes.				

Statement of Conformity

The RT-5209Z1 has been found to conform with the following parts of the 47 CFR as detailed below:

47 CFR Part #	47 CFR Part #	Comments
	15.15(b)	The product contains no user accessible controls that increase transmission power above allowable levels.
2.925	15.19	The label is shown in the label exhibit. The label is permanently attached.
	15.21	Information to the user is shown in the instruction manual exhibit.
	15.27	No special accessories are required for compliance.
	15.31(e)	The input power was varied from its nominal value (120V) to 102V ac and 138V ac. The respective E field was measured see table 6.
	15.203	The device utilizes reverse SMA type antenna connection.
	15.204	See attached documentation describing the antenna.
	15.205 15.209	The fundamental is not in a Restricted band and the spurious comply with the general emission limits of 15.209.
	15.207	Unit is DC powered and drives its power from an AC adapter. Conducted EMI on AC side of the adaptor was measured. See table 4 and 5.
15.249	15.249 (a)	The EUT meets the field strength limit of 50mV/m (94dB μ V/m) at the fundamental.
	15.249 (d)	Spurious emissions meet the general radiated emissions limits of section 15.209.
	15.249 (e)	Spurious emissions found above 1GHz meet the limits of 15.209.

Test Data and Plots

Band Edges

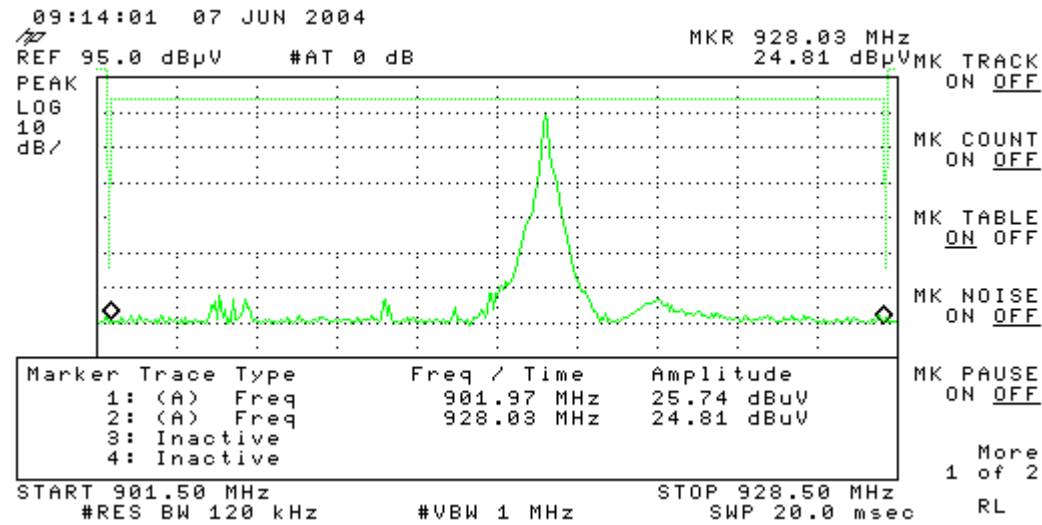


Table1:

Band Edge										Curtis-Straus LLC		
Date: 07-Jun-04				Company: Millennial Net				Work Order: E0454				
Engineer: Mairaj Hussain				EUT Desc: RT 5209 Z1 (Subbase Router)								
										Measurement Distance: 3 m		
Notes:										EUT Max Freq: 916.56 MHz		
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dBμV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBμV/m)				FCC Class B		
										Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)
H	902.0	25.7	21.3	21.6	4.9	30.9				46.0	-15.1	Pass
H	928.0	24.8	21.1	21.8	5.0	30.5				46.0	-15.5	Pass
Table Result:		Pass		by		-15.1 dB		Worst Freq:		902.0 MHz		
Test Site: "T"		Pre-Amp: Green		Cable: 65 ft RG8A/U		Analyzer: Yellow		Antenna: Grn-Blk				

Note: All readings are peak unless otherwise noted.

Conclusion:

The product meets the respective limit at lower/upper restricted band bandedge.


Sample calculation:

Adjusted Reading = reading + cable factor + antenna factor – distance factor

Table2:

Radiated Emissions Table Fundamental										Curtis - Straus LLC		
Date: 07-Jun-04				Company: Millennial Net				Work Order: E0454				
Engineer: Mairaj Hussain				EUT Desc: RT 5209 Z1 (Subbase Router)								
										Measurement Distance: 3 m		
Notes:										EUT Max Freq: 916.56 MHz		
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBµV/m)				FCC 15.249		
										Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)
Hpk	916.56	64.7	0.0	21.7	5.0	91.4				94.0	-2.6	Pass
Table Result: Pass by -2.6 dB Worst Freq: 916.56 MHz												
Test Site: "T"		Pre-Amp: none		Cable: 65 ft RG8A/U		Analyzer: Yellow		Antenna: Grn-Blk				

Sample calculation:
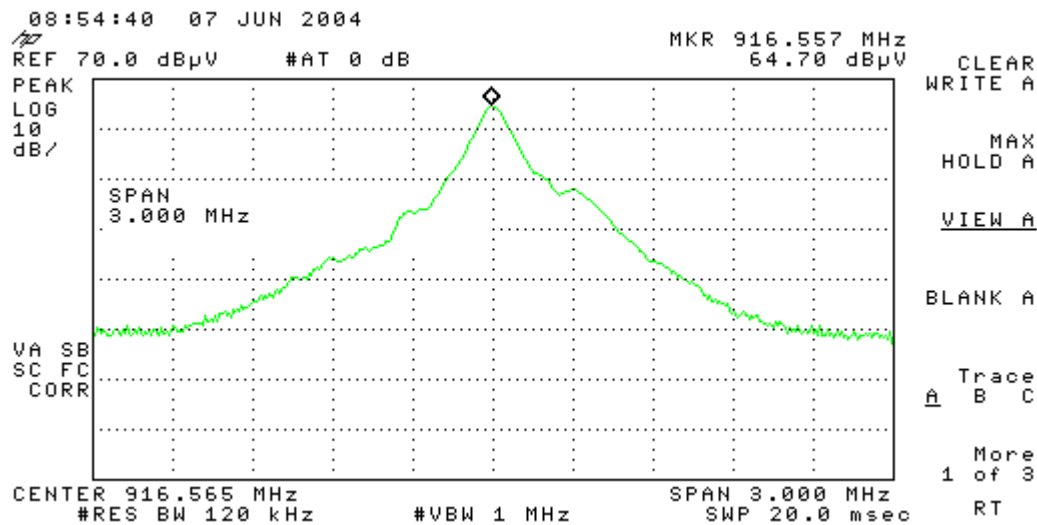
$$\text{Adjusted reading} = \text{Reading} + \text{Antenna factor} + \text{Cable factor}$$


Section 15.249 (d)

Table 3:

Radiated Emissions Table										Curtis-Straus LLC		
Date: 07-Jun-04			Company: Millennial Net						Work Order: E0454			
Engineer: Mairaj Hussain			EUT Desc: RT 5209 Z1 (Subbase Router)									
Frequency Range: 30MHz-10GHz							Measurement Distance: 3 m					
Notes: VHP-16 used							EUT Max Freq: 916.56 MHz					
No spurious emissions found for Rx unit												
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dBμV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBμV/m)				FCC Class B		
										Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)
Vpk	1834.0	41.0	24.1	28.0	1.8	46.7				54.0	-7.3	Pass
Hpk	1700.0	36.0	23.6	27.5	1.8	41.7				54.0	-12.3	Pass
Table Result:			Pass		by		-7.3 dB		Worst Freq:		1834.0 MHz	
Test Site: "T"		Pre-Amp: Or-Blk		Cable: 3 RG142LL		Analyzer: Green		Antenna: Orange Horn				
		Green				Yellow		Green-Blk				

No spurious emissions found in Rx mode in the frequency range of 30MHz – 10GHz.

Sample calculation:

Adjusted reading = Reading + Antenna factor + Cable factor – Pre amp factor

AC Line Conducted Emission Measurements

Table 4:

AC Mains Conducted Emissions											Curtis-Straus LLC	
Date: 07-Jun-04			Company: Millennial Net					Work Order: E0454				
Engineer: Mairaj Hussain			EUT Desc: RT 5209 Z1 (Subbase Router)					Test Site: EMI1				
Notes: Tx unit												
LISN(s): Yellow-Black												
Range: 0.15-30Mhz					Other Equipment: ---			Spectrum Analyzer: Yellow				
Frequency (MHz)	Q.P. Readings		Ave. Readings		Impedance Factor (dB)	---		FCC/CISPR B		FCC/CISPR B		Overall Result (Pass/Fail)
	QP1 (dBμV)	QP2 (dBμV)	AV1 (dBμV)	AV2 (dBμV)		Limit (dBμV)	Margin dB	qp Limit (dBμV)	qp Margin dB	AVE Limit (dBμV)	AVE Margin dB	
0.15	31.3	32.0			20.0	---	---	66.0	-14.0	56.0	-4.0	Pass
0.18	21.6	22.1			20.0	---	---	64.5	-22.4	54.5	-12.4	Pass
0.68	10.3	10.0			20.0	---	---	56.0	-25.7	46.0	-15.7	Pass
1.00	11.7	9.0			20.0	---	---	56.0	-24.3	46.0	-14.3	Pass
10.80	-3.0	-3.2			20.0	---	---	60.0	-43.0	50.0	-33.0	Pass
19.97	-3.3	-3.3			20.0	---	---	60.0	-43.3	50.0	-33.3	Pass
Table Result: Pass by -4.00 dB Worst Freq: 0.15 MHz												

Table 5:

AC Mains Conducted Emissions											Curtis-Straus LLC	
Date: 07-Jun-04			Company: Millennial Net					Work Order: E0454				
Engineer: Mairaj Hussain			EUT Desc: RT 5209 Z1 (Subbase Router)					Test Site: EMI1				
Notes: Rx unit												
LISN(s): Yellow-Black												
Range: 0.15-30Mhz					Other Equipment: ---			Spectrum Analyzer: Yellow				
Frequency (MHz)	Q.P. Readings		Ave. Readings		Impedance Factor	---		FCC/CISPR B		FCC/CISPR B		Overall Result (Pass/Fail)
	QP1 (dBµV)	QP2 (dBµV)	AV1 (dBµV)	AV2 (dBµV)		Limit (dBµV)	Margin dB	qp Limit (dBµV)	qp Margin dB	AVE Limit (dBµV)	AVE Margin dB	
0.15	32.9	31.6			20.0	---	---	66.0	-13.1	56.0	-3.1	Pass
0.18	20.0	21.8			20.0	---	---	64.5	-22.7	54.5	-12.7	Pass
0.20	16.1	16.1			20.0	---	---	63.6	-27.5	53.6	-17.5	Pass
0.28	9.8	7.7			20.0	---	---	60.8	-31.0	50.8	-21.0	Pass
0.68	9.7	10.0			20.0	---	---	56.0	-26.0	46.0	-16.0	Pass
1.00	11.0	8.1			20.0	---	---	56.0	-25.0	46.0	-15.0	Pass
Table Result: Pass by -3.10 dB Worst Freq: 0.15 MHz												

LIMITS

Quasi-Peak: 250μV = 47.9dBμV in the range 450kHz to 30MHz

[47 CFR 15.207(a) Revised as of October 1, 2001]

Note: On July 12, 2004, FCC adopts the conducted emissions limits of the European CISPR 22 standard as outlined below

Frequency of emission (MHz)	Quasi-peak limit (dBμV)	Average limit (dBμV)
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

[47 CFR 15.207(a) Revised as of October 1, 2002; amended by ET Docket 98-80; FCC 02-157, published in the Federal Register Vol. 67, No. 132, on Wednesday, July 10, 2002]

Section 15.31(e)

Voltage Variation:

Table 6:

<i>FCC 15.31 (e) Voltage Variation</i>	
Company: Millennial Net Work order: E0454 Engineer: Mairaj Hussain Date: 6/7/04	
Antenna: Green-Blk Spectrum Analyzer: Yellow	
EUT: Subbase Router	
Voltage (v)	Amplitude (dBuV)
120	60.2
102	60.02
138	60.6

Test Equipment Used

REV. 04-JUN-2004

SPECTRUM ANALYZERS	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
RED	9kHz-1.8GHz	8591E	HP	3441A03559	00024	26-MAY-2005
WHITE	9kHz-22GHz	8593E	HP	3547U01252	00022	04-MAR-2005
BLUE	9kHz-1.8GHz	8591E	HP	3223A00227	00070	30-SEP-2004
YELLOW	9kHz-2.9GHz	8594E	HP	3523A01958	00100	08-JUL-2004
GREEN	9kHz-26.5GHz	8593E	HP	3829A03618	00143	10-OCT-2004
BLACK	9kHz-12.8GHz	8596E	HP	3710A00944	00337	15-JUL-2004
YELLOW-BLACK	20Hz-40.0MHz	3585A	HP	2504A05219	00030	02-DEC-2004
ORANGE	9kHz-26.5GHz	E4407B	HP	US39440975	00394	03-JUN-2005

LISNs/MEASUREMENT PROBES	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
RED	10kHz-30MHz	8012-50-R-24-BNC	SOLAR	956348	00753	02-APR-2005
BLUE	10kHz-30MHz	8012-50-R-24-BNC	SOLAR	956349	00752	02-APR-2005
YELLOW-BLACK	10kHz-30MHz	8012-50-R-24-BNC	SOLAR	984735	00248	02-APR-2005
ORANGE	10kHz-30MHz	8012-50-R-24-BNC	SOLAR	903707	00754	02-APR-2005
GOLD	10kHz-30MHz	8012-50-R-24-BNC	SOLAR	984734	00247	02-APR-2005
WHITE-BLACK	10kHz-30MHz	8610-50-TS-100-N	SOLAR	972019	00678	02-APR-2005
BLACK	10kHz-30MHz	8610-50-TS-100-N	SOLAR	972017	00675	02-APR-2005
RED-BLACK	10kHz-30MHz	8610-50-TS-100-N	SOLAR	972016	00677	02-APR-2005
BLUE-BLACK	10kHz-30MHz	8610-50-TS-100-N	SOLAR	972018	00676	02-APR-2005
BLUE MONITORING PROBE	0.01-150MHz	91550-2	TEGAM	12350	00807	21-MAY-2005
YELLOW MONITORING PROBE	0.01-150MHz	91550-2	ETS	50972	00493	24-NOV-2004
GREEN CURRENT TRANSFORMER	40Hz-20MHz	150	PEARSON	10226	00793	03-APR-2005
CISPR LINE PROBE	150kHz-30MHz	N/A	C-S	01	00805	20-DEC-2004
CISPR TELCO VOLTAGE PROBE	150kHz-30MHz	CS A/C-10	C-S	CS01	00296	11-SEP-2004
CISPR 22 TELCO ISN	9kHz-30MHz	FCC-TLISN-T4	FISCHER	20115	00746	15-OCT-2004

OPEN AREA TEST SITE (OATS)	FCC CODE	IC CODE	VCCI CODE	CALIBRATION DUE
SITE F	93448	IC 2762-F	R-1688	25-MAR-2005
SITE T	93448	IC 2762-T	R-905	25-MAR-2005
SITE A	93448	IC 2762-A	R-903	25-MAR-2005
SITE M	93448	IC 2762-M	R-904	25-MAR-2005
BUBBLE (HP FACILITY)	N/A	N/A	R-1467	16-MAY-2005

LINE CONDUCTED TEST SITES	FCC CODE	IC CODE	VCCI CODE	CALIBRATION DUE
EMI 1	93448	N/A	C-1801	01-MAY-2006
EMI 2	93448	N/A	C-1802	01-MAY-2006
EMI 3	93448	N/A	C-1803	01-MAY-2006
BUBBLE (HP FACILITY)	N/A	N/A	C-1556	16-MAY-2005

ANTENNAS	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
GREEN BILOG	30MHz-2GHz	CBL6112B	CHASE	2742	00620	06-APR-2006
GREEN-BLACK BILOG	30MHz-2GHz	CBL6112B	CHASE	2412	00127	06-JAN-2006
GREEN-RED BILOG	30MHz-2GHz	CBL6112B	CHASE	2435	00990	06-APR-2006
RED BILOG	30MHz-1GHz	3143	EMCO	1270	00042	17-MAR-2005
BLUE BILOG	30MHz-1GHz	3143	EMCO	1271	00803	17-MAR-2005
GRAY BILOG	26MHz-2GHz	3141	EMCO	9703-1038	00066	19-MAY-2005(EMI) / 06-JUN-2004(RFI)
YELLOW-BLACK BILOG	20-2000MHz	CBL6140A	CHASE	1112	00126	19-MAY-2005(EMI) / 09-JUN-2004(RFI)
YELLOW HORN	1-18GHz	3115	EMCO	9608-4898	00037	22-MAY-2005
BLACK HORN	1-18GHz	3115	EMCO	9703-5148	00056	12-JUN-2005
ORANGE HORN	1-18GHz	3115	EMCO	0004-6123	00390	04-JUN-2005
HF (WHITE) HORN	18-26.5GHz	801-WLM	WAVELINE	00758	00758	15-JUL-2005
SMALL LOOP (RENTAL)	10kHz-30MHz	PLA-130/A	ARA	1009	TELOGY	11-FEB-2006
SMALL LOOP	9kHz-30MHz	PLA-130/A	ARA	1024	00755	23-FEB-2006
LARGE LOOP	20Hz-5MHz	6511	EMCO	9704-1154	00067	12-NOV-2005
ACTIVE MONOPOLE	30Hz-30MHz	3301B	EMCO	3824	00068	05-MAY-2005
INDUCTION COIL	50-60Hz	1000-4-8	C-S	N/A	00778	16-SEP-2004
ADJUSTABLE DIPOLE	30-1000MHz	3121C	EMCO	1370	00757	26-JUN-2005
ADJUSTABLE DIPOLE	30-1000MHz	3121C	EMCO	1371	00756	26-JUN-2005

RE101 LOOP SENSOR	30Hz-100kHz	RE101-13.3CM	C-S	N/A	00818	07-JAN-2005
RS101 RADIATING LOOP	30Hz-100kHz	RS101-12CM	C-S	N/A	00819	07-JAN-2005
RS101 LOOP SENSOR	30Hz-100kHz	RS101-4CM	C-S	N/A	00820	07-JAN-2005

MIXERS/DIPLEXERS	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
MIXER / HORN	26.5-40 GHz	11970A/28-442-6	HP/ATM	2332A00900/A046903-01	00369	09-JUL-2004
MIXER / HORN	40-60 GHz	M19HW/A	OML	U30110-1	00821	03-JAN-2005
MIXER / HORN	60-90 GHz	M12HW/A	OML	E30110-1	00822	03-JAN-2005
MIXER / HORN	90-140 GHz	MO8HW/A	OML	F21206-1	00811	05-DEC-2004
MIXER / HORN	140-220 GHz	MO5HW/A	OML	G21206-1	00812	05-DEC-2004
DIPLEXER		DPL.26	OML	N/A	00813	05-DEC-2004

PREAMPS / ATTENUATORS / FILTERS	RANGE	MN	MFR	SN	ASSET	CALIBRATION DUE
RED	0.10-2000MHz	ZFL-1000-LN	C-S	N/A	00798	31-MAR-2005
BLUE	0.01-2000MHz	ZFL-1000-LN	C-S	N/A	00759	31-JUL-2004
BLUE-BLACK	0.01-2000MHz	ZFL-1000-LN	C-S	N/A	00800	31-MAR-2005
GREEN	0.01-2000MHz	ZFL-1000-LN	C-S	N/A	00802	27-FEB-2005
BLACK	0.01-2000MHz	ZFL-1000-LN	C-S	N/A	00799	27-FEB-2005
ORANGE	0.01-2000MHz	ZFL-1000-LN	C-S	N/A	00765	27-FEB-2005
WHITE	1-20GHz	SMC-12A	C-S	426643	00760	29-JUL-2004
YELLOW-BLACK	1-20GHz	SMC-12A	C-S	535055	00801	19-AUG-2004
ORANGE-BLACK	1-20GHz	SMC-12A	C-S	637367	00761	29-JUL-2004
HF (YELLOW)	18-26.5GHz	AFS4-18002650-60-8P-4	C-S	467559	00758	15-JUL-2004
HIGH PASS FILTER	1-18 GHz	SPA-F-55204	K&L	36	00817	06-JAN-2006
LOW PASS FILTER	1-9 GHz	11SL10-4100/X4400-O/O	K&L	4	00816	06-JAN-2006
HF 20dB ATTENUATOR	0.03-20 GHz	PE 7019-20	PASTERNAK	01	00791	21-MAY-2005

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

Terms And Conditions

Paragraph 1. SERVICES. LABORATORY will:

- 1.1 Use the degree of care and skill ordinarily exercised by and consistent with the standards of the profession.
- 1.2 Perform all technical services in substantial accordance with the generally accepted laboratory principles and practices.
- 1.3 Retain all pertinent records relating to the services performed for a period of three (3) years following submission of the report describing such services, during which period the records will be made available to CLIENT upon reasonable request.

Paragraph 2. CLIENT'S RESPONSIBILITIES. CLIENT or his authorized representative will:

- 2.1 Provide LABORATORY with all plans, schematics, specifications, addenda, change orders, drawings and other information for the proper performance of technical services.
- 2.2 Designate a person to act as CLIENT's representative with respect to LABORATORY's services to be performed on behalf of the CLIENT; such person or firm to have complete authority to transmit instructions, receive information and data, interpret and define CLIENT's policies and decisions with respect to the LABORATORY's work on behalf of the CLIENT and to order, at CLIENT's expense, such technical services as may be required.
- 2.3 Designate a person who is authorized to receive copies of LABORATORY's reports.
- 2.4 Undertake the following:
 - (a) Secure and deliver to LABORATORY, without cost to LABORATORY, preliminary representative samples of the equipment proposed to require technical services, together with any relevant data.
 - (b) Furnish such labor and equipment needed by LABORATORY to handle samples at the LABORATORY and to facilitate the specified technical services.

Paragraph 3. GENERAL CONDITIONS:

- 3.1 LABORATORY, by the performance of services covered hereunder, does not in any way assume any of those duties or responsibilities customarily vested in the CLIENT, its employees, or any other party, agency or authority.
- 3.2 LABORATORY shall not be responsible for acts of omissions of any other party or parties involved in the design, manufacture or maintenance of the equipment or the failure of any employee, contractor or subcontractor to undertake any aspect of equipment's design, manufacture or maintenance.
- 3.3 LABORATORY is not authorized to revoke, alter, release, enlarge or release any requirement of the equipment's design, manufacture or maintenance unless specifically authorized by CLIENT or his authorized representative.
- 3.4 THE ONLY WARRANTY MADE BY LABORATORY IN CONNECTION WITH ITS SERVICE PERFORMED HEREUNDER IS THAT IT WILL USE THAT DEGREE OF CARE AND SKILL AS SET FORTH IN PARAGRAPH 1 ABOVE. NO OTHER WARRANTY, EXPRESS OR IMPLIED, IS MADE OR INTENDED FOR SERVICES PROVIDED HEREUNDER.
- 3.5 Where the LABORATORY indicates that additional testing is advisable to obtain more valid or useful data, and where such testing has not been authorized, CLIENT agrees to view such test reports as inconclusive and preliminary.
- 3.6 The LABORATORY will supply technical service and prepare a report based solely on the sample submitted to the LABORATORY by the CLIENT. The CLIENT understands that application of the data to other devices is highly speculative and should be applied with extreme caution.
- 3.7 The LABORATORY agrees to exercise ordinary care in receiving, preserving and shipping (F.O.B. Littleton, MA) any sample to be tested, but assumes no responsibility for damages, either direct or consequential, which arise from loss, damage or destruction of the samples due to the act of examination, modification or testing, or technical services or circumstances beyond LABORATORY's control.
- 3.8 The LABORATORY will hold samples for thirty (30) days after tests are completed, or until the CLIENT's outstanding debts to the LABORATORY are satisfied, whichever is later.
- 3.9 The CLIENT recognizes that generally accepted error variances apply and agrees to consider such error variances in its use of test data.
- 3.10 It is agreed between LABORATORY and CLIENT that no distribution of any tests, reports or analysis other than that described below shall be made to any third party without the prior written consent of both parties unless such distribution is mandated by operation of law. It is agreed that tests, reports, or analysis results may be disclosed to third party auditors of the laboratory at the laboratory facility in the course of accreditation maintenance audits. No reference to reports or technical services of the LABORATORY shall be made in any advertising or promotional literature without the express written permission of the LABORATORY.
- 3.11 The CLIENT acknowledges that all employees of LABORATORY operate under employment contracts with the LABORATORY and CLIENT agrees not to solicit employment of such employees or to solicit information related to other clients from said employees.
- 3.12 In recognition of the relative risks and benefits of the project to both CLIENT and LABORATORY, the risks have been allocated such that the CLIENT agrees, to the fullest extent permitted by law, to limit the liability of the LABORATORY to the CLIENT for any and all claims, losses, costs, damages of any nature whatsoever or claims expenses from any cause or causes, including attorneys' fees and costs and expert witness fees and costs, so that the total aggregate liability of the LABORATORY to the CLIENT shall not exceed \$100,000, or the LABORATORY'S total fee for services rendered on this project, whichever is greater. It is intended that this limitation apply to any and all liability or cause of action however alleged or arising, unless otherwise prohibited by law.

Paragraph 4. INSURANCE:

- 4.1 LABORATORY shall secure and maintain throughout the full period of the services provided to the CLIENT adequate insurance to protect it from claims under applicable Workmen's Compensation Acts and also shall maintain one million dollars of general liability coverage to cover claims for bodily injury, death or property damage as may arise from the performance of its services.
- 4.2 The CLIENT hereby warrants that it has sufficient insurance to protect its employees adequately under applicable Workmen's Compensation Acts and for bodily injury, death, or property damage.
- 4.3 No insurance of whatever kind or type, which may be carried by either party is to be considered as in any way limiting any other party's responsibility for damages resulting from their operations or for furnishing work and materials.

Paragraph 5. PAYMENT:

- 5.1 CLIENT shall pay to LABORATORY such fees for services as previously agreed, orally or in writing, within 30 days of presentment of a bill for such services performed. In the event CLIENT ordered, orally or in writing, services but such services were not assigned a rate for billing, such services shall be billed at the LABORATORY's reasonable and customary rate.
- 5.2 CLIENT shall be responsible for all shipping, customs and other expenses related to services provided by LABORATORY to the CLIENT, and shall fully insure any test sample or other equipment provided to LABORATORY by the CLIENT.
- 5.3 Amounts overdue from CLIENT to LABORATORY shall be charged interest at a rate of 1½% per month.

Paragraph 6. ISO/IEC GUIDE 17025 ADDITIONS:

- 6.1 CLIENT agrees that this test report will not be reproduced except in full, without written approval from the LABORATORY.
- 6.2 CLIENT agrees that this test report shall not be used to claim product endorsement by A2LA or ANSI or any agency of the U.S. Government.
- 6.3 CLIENT agrees that test results presented herein relate only to the sample tested by the LABORATORY.

A2LA Accreditation

<u>SCOPE OF ACCREDITATION TO ISO/IEC 17025-1999</u> CURTIS-STRAUS¹ 527 Great Road Littleton, MA 01460 Barry Quinlan Phone: 978-486-8880 ELECTRICAL Valid until: July 31, 2005	
---	--

ETS EN 300 386-2 1997, 1998, ETS EN 300 386 2000 v1.2.1, 2001 v1.3.1 ETS 300 132-1 1996 ETS 300 132-2 1996 ETR 283 1997 <i>EU radio standards</i> (ETS) EN 300 385 v1.2.1: 1998, 1999 EN 300 330 v1.2.1: 1998, 1999 ETS 300 328 1996 ETS EN 300 440 v1.2.1 1999 EN 301 893:2002 v1.2.1 ETS 300 836-1:1998 EN301 489-17:2002 v1.2.1 (A2LA Cert. No. 1627-01) 10/31/03	Electromagnetic compatibility and radio spectrum matters (ERM); Telecommunication network equipment; Electromagnetic compatibility (EMC) requirements; Part 2: Product family standard. Equipment Engineering (EE); Power supply interface at the input to telecommunications equipment; Part 1: Operated by alternating current (ac) derived from direct current (dc) sources Equipment Engineering (EE); Power supply interface at the input to telecommunications equipment; Part 2: Operated by direct current (dc) Equipment Engineering (EE); Transient voltages at Interface A on telecommunications direct current (DC) power distributions. Electromagnetic compatibility and Radio spectrum matters (ERM); Electromagnetic Compatibility (EMC) standard for fixed radio links and ancillary equipment (ETS) Electromagnetic compatibility and Radio spectrum matters (ERM); Short range devices (SRD); Technical characteristics and test methods for radio equipment in the range 9 kHz to 25 MHz and inductive loop systems in the frequency range 9 kHz to 30 MHz Radio Equipment and Systems (RES); Wideband transmission systems; Technical characteristics and test conditions for data transmission equipment operating in the 2,4 GHz ISM band and using spread spectrum modulation techniques Electromagnetic compatibility and Radio spectrum matters (ERM); Short range devices; Technical characteristics and test methods for radio equipment to be used in the 1 GHz to 40 GHz frequency range Broadband Radio Access Networks (BRAN); 5 GHz (draft) high performance RLAN; Harmonized EN covering Essential requirements of article 3.2 of the R&TTE Directive Broadband Radio Access Networks (BRAN); High Performance Radio Local Area Network (HIPERLAN) Type 1; Conformance testing specification; Part 1: Radio Type approval and Radio Frequency (RF) conformance test specification Electromagnetic compatibility and Radio spectrum Matters (ERM); Electromagnetic Compatibility (EMC) standard for radio equipment and services; Part 17: Specific conditions for 2,4 GHz wideband transmission systems and 5 GHz high performance RLAN equipment Page 5 of 11	EN 300 328-2:2001 v1.2.1 EN 301 489-1:2002 EN 60669-2-1:2002 <i>Canada Radio Standards</i> Canadian GL-36 1995 Canadian RSS-119 1999, 2000 Issue 6 Canadian RSS-134 1996 & 2000, Issue 1 Rev 1 Canadian RSS-210 2000 Issue 3, RFS29 1998 <i>FCC Standards</i> 47 CFR FCC low power transmitters operating on frequencies below 1 GHz, emergency alert systems, unintentional radiators and ISM devices. 47 CFR FCC low power transmitters operating on frequencies above 1 GHz, with the exception of spread spectrum devices. 47 CFR FCC Unlicensed Personal Scope A3 Communications System (PCS) devices 47 CFR FCC Unlicensed National Scope A4 Information Infrastructure devices and low power transmitters using spread spectrum techniques. 47 CFR FCC Personal mobile Scope B1 Radio Services in the following FCC Rule Parts 22, 24, 25, 27. 47 CFR FCC General Mobile Radio Scope Services in the following FCC Rule Parts 22, 74, 90, 95, 97. 47 CFR FCC Maritime and Aviation Scope Radio Services in 47 CFR Parts 80 and 87 47 CFR FCC Microwave Radio Services B4 Scope in 47 CFR Parts 21, 74 and 101. Electromagnetic compatibility and Radio spectrum Matters (ERM); Wideband Transmission systems; Data transmission equipment operating in the 2,4 GHz ISM band and using spread spectrum modulation techniques; Part 2: Harmonized EN covering essential requirements under article 3.2 of the R&TTE Directive Electromagnetic compatibility and Radio spectrum Matters (ERM); Electromagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements Switches for household and similar fixed electrical installations -- Part 2-1: Particular requirements -- Electronic switches Industry Canada -- technical requirements for low power Devices in the 2400 -- 2483.5 MHz band. Industry Canada -- Land mobile and fixed radio Transmitters and receivers, 27.41 to 960.0 MHz Industry Canada -- 900 MHz narrowband personal communications services Industry Canada -- Low power license-exempt radio 2001 Issue 5 communication devices Specification for Restricted Radiation Radio Apparatus (New Zealand) Scope A1 Scope A2 B1 B2 B3 B4 (A2LA Cert. No. 1627-01) 10/31/03 Page 6 of 11
FCC/OST MP-5 1986 GR-1089-CORE: 1997, 1999 issue 2/ 2002 Issue 3 <i>ANSI EMC Standards</i> ANSI C63.4: 1992, 1999, 2001 ANSI C63.5 1988 <i>IEEE EMC Standards</i> IEEE C62.41: 1980, 1991 <i>Swedish EMC Standards</i> BAKOM 3336.3 1995 <i>South African EMC standards other than CISPR equivalents</i> SABS 1718-1: 1996 <i>Japanese VCCI Standards</i> VCCI V-3/99.05 1999 VCCI V-4/99.05 1999 Telecommunications Telecommunications Registration; General test methods; Lightning surge; Drop testing; Balance testing; Signal power (metallic and longitudinal); Frequency measurements; Pulse templates; Leakage testing; Impedance testing; Hearing Aid Compatibility testing (excluding volume control); Protocol analysis and Jitter testing. Telecom Standards FCC 47 CFR Part 68 Telephone CS-03 Issue 8 1996 through amendment 5 TIA/EIA TSB31-B 1998 (A2LA Cert. No. 1627-01) 10/31/03	FCC (Federal Communications Commission) methods Of measurement of radio noise emissions from industrial, scientific and medical equipment. Bellcore electromagnetic compatibility and electrical safety -- Generic criteria for network telecommunications equipment. American National Standard for methods of measurement of radio-noise emissions for low-voltage electrical and electronic equipment in the range of 9 kHz to 40GHz. American National Standard for electromagnetic compatibility -- radiated emissions measurements in electromagnetic interference (EMI) control -- calibration of antennas. IEEE recommended practice on surge voltages in low-voltage AC power circuits Electromagnetic compatibility and electrical safety (EMC & S) for wired terminal equipment. Harmonization document information over the OFCOM requirements. South African Bureau of Standards: Specification for Gaming equipment. Part 1: Casino equipment. Technical Requirements Instruction for Test Conditions for Requirement under Test Connection of terminal equipment to the telephone Terminal Equipment network. Analog and Digital Equipment. TCB Scope C1. Specification for terminal equipment, terminal systems, Network protection devices, connection arrangements and hearing aids compatibility. Bulletin Part 68 Rationale and Measurement Guidelines (Feb 1998) Page 7 of 11	TIA/EIA-IS-968 TIA/EIA-IS-883 TIA-968-A T1.TRQ.6-2001 Canada VDSL Issue 1 January 2003 AS/ACIF S002-2001 AS/ACIF S016-2001 AS/ACIF S031-2001 AS/ACIF S038-2001 AS/ACIF S043-2001 ITU-T G.703 HKTA 2028 HKTA 2029 TBR 1 : 1995 TBR 2 : 1997 Telecommunications Telephone Terminal Equipment Technical Requirements for Connection of Terminal Equipment to the Telephone Network Telecommunications Telephone Terminal Equipment Supplemental Technical Requirements for Connection of Sutter Dial Tone Detection Devices and ADSL Modems to the Telephone Network Telecommunications Telephone Terminal Equipment Technical Requirements for Connection of Terminal Equipment to the Telephone Network Technical Requirements for SHDSL, HDSL2, HDSL4 Digital Subscriber Line Terminal Equipment to Prevent Harm to the Telephone Network Industry Terminal Attachment Program Requirements and Test Methods for Very-High-Bit-Rate Digital Subscriber Line (VDSL) Terminal Equipment Analogue interworking and non-interference requirements for Customer Equipment for connection to the Public Switched Telephone Network Requirements for Customer Equipment for connection to hierarchical digital interfaces Requirements for ISDN Basic Access Interface Requirements for ISDN Primary Rate Access Interface Requirements for Customer Equipment for Connection to a Metallic Local Loop Interface of a Telecommunications Network --- Part 1: General Part 2: Broadband Part 3: DC, Low Frequency AC and Voiceband Physical/electrical characteristics of hierarchical Digital interfaces Network connection specification for connection of CPE to the PTNs in Hong Kong using digital leased circuits at data rate of 1544 kbit/s Network connection specification for connection of CPE to the PTNs in Hong Kong using digital leased circuits at data rate of 2048 kbit/s Attachment requirements for terminal equipment to be connected to circuit switched data networks and leased circuits using a CCITT Recommendation X.21 interface, or at an interface physically, functionally and electrically compatible with CCITT Recommendation X.21 but operating at any data signaling rate up to, and including, 1 984 kbit/s Attachment requirements for Data Terminal Equipment (DTE) to connect to Packet Switched Public Data Networks (PSPDNs) for CCITT Recommendation X.25 interfaces at data signaling rates up to 1 920 kbit/s utilizing interfaces derived from CCITT Recommendations X.21 and X.21 bit (A2LA Cert. No. 1627-01) 10/31/03 Page 8 of 11

TBR 3 : 1995 + Amdt : 1997 TBR 4 : 1995 + Amdt : 1997 TBR 012 : 1993 + Amdt : 1996 TBR 013 : 1996 TBR 21 : 1998 TBR 24 : 1997 Australia TS 002 : 1997 TS 016 : 1997 TS 031 : 1997 TS 038 : 1997 AS/ACIF S043.2:2001 Product Safety General test methods; Input tests; Electric strength tests; Impulse tests; Permanency of marking tests; Accessibility tests; Energy Hazard measurements; Capacitor discharge tests; Humidity conditioning; Earthing tests; Limited power source measurements; Stability tests; Steel ball tests; Lithium Battery Reverse Current measurements; Leakage current tests; Transformer abnormal tests; Telecom leakage tests; Over voltage/power cross tests (excluding x-ray tests). <u>Product Safety Standards</u> <i>Specific Product Safety Standards</i> IEC 950 1991 UL 1950 1998 CSA C22.2 No.950-95 UL 60950 2000 (A2LA Cert. No. 1627-01) 10/31/03 Page 9 of 11	Integrated Services Digital Network (ISDN); Attachment requirements for terminal equipment to connect to an ISDN using ISDN basic access Integrated Services Digital Network (ISDN); Attachment requirements for terminal equipment to connect to an ISDN using ISDN primary rate access Business Telecommunications (BT); Open Network Provision (ONP) technical requirements; 2 048 kbit/s digital unstructured leased line (D2048U) Attachment requirements for terminal equipment Business Telecommunications (BTC); 2 048 kbit/s digital structured leased lines (D2048S); Attachment requirements for terminal equipment interface Terminal Equipment (TE); Attachment requirements for pan-European approval for connection to the analogue Public Switched Telephone Networks (PSTNs) of TE (excluding TE supporting the voice telephony service) in which network addressing, if provided, is by means of Dual Tone Multi Frequency (DTMF) signaling Business Telecommunications (BTC); 34 Mbit/s digital Unstructured and structured leased lines (D34U and D34S); Attachment requirements for terminal equipment interface Analogue Interworking and Non interference Requirements for Customer Equipment Connected to the Public Switched Telephone Network General Requirements for Customer Equipment Connected to Hierarchical Digital Interfaces Requirements for ISDN Basic Access Interface Requirements for ISDN Primary Rate Access Interface Requirements for Customer Equipment for connection to a metallic loop interface of a Telecommunications Network – Part 2 Broadband IEC 60950 2000 EN 60950 1997, 1998, 2000 IEC 60950-1 2001 UL 60950-1 2003 CSA C22.2 No. 60950-00 CSA C22.2 No. 60950-1 03 AS/NZS 3260 1993 AS/NZS 3260 Supp 1 1996 ACA TS 001 1997 UL 1459 1995 IEC 1010-1 1990 IEC 61010-1 1993 EN 61010-1 1993, 2001 IEC 61010-1 2001 UL 61010B-1 2003 UL 3101-1 1993 CAN/CSA 1010-1 1999 (Including AM 2) UL 3111-1 1996 UL 3121-1 1995 IEC 60601-1 1995 EN 60601-1 1995 (Including AM 2) UL 2601-1 1997 IEC 60065 1998, 2000 ANSI/UL 6500: 1998 CAN/CSA 60065-00 AS/NZS 3250 1995 AS/NZS 60065 2000 Canadian C22.2 No. 1-94 (1-98) 1994, 1998 EN 60065 1994 IEC 60825 1990 EN 60825-1 1994 IEC 60825-1 2001 IEC 60825-2 2000-5 IEC 60825-4 1997-11 IEC 60335-1 1995 (Including AM2 – 1997 & AM 12 – 1997) EN 60335-1 2001 UL 60335-1 1998 CAN/CSA E335-1 1994 Safety of information technology equipment Safety of information technology equipment, including Electrical business equipment. Approval and test specification – Safety of information technology equipment including electrical business Equipment. Approval and test specification – Safety of information technology equipment including electrical business equipment – Alphabetical reference index to IEC 950 (Supplement to AS/NZS 3260:1993) Australian Communications Authority – Safety requirements for customer equipment. Telephone Equipment Safety requirements for electrical equipment for measurement, control and laboratory use, Part 1: General requirements. Safety requirements for electrical equipment for measurement, control and laboratory use, Part 1: General requirements. Electrical equipment for laboratory use Part 1: General requirements. Electrical measuring and test equipment. Part 1: General requirements. Medical electrical equipment. Part 1: General requirements for safety. Medical electrical equipment Medical electrical equipment. Part 1: General Requirements for safety. Audio, video and similar electronic apparatus – Safety requirements Audio/video and musical instrument apparatus for Household, commercial and similar general use Australian/New Zealand Standard – Approval and test Specification – Mains operated electronic and related Equipment for household and similar general use Audio, video and similar electronic equipment. Consumer and commercial products Safety requirements for main operated electronic and related apparatus for household and similar general use. Radiation safety of laser products, equipment Classification, requirements and user's guide Safety of laser products Part 1: equipment Classification, requirements and user's guide. Safety of laser products – Part 2: Safety of optical communication systems Safety of laser products – Part 4: Laser guards Safety of household and similar electrical appliances Part 1: General requirements (A2LA Cert. No. 1627-01) 10/31/03 Page 10 of 11
UL 61010A-1 : 2002 EN 61010-1 : 2001 AS/NZS 60950 : 2000 Environmental² <u>Environmental Standards</u> GR-63-CORE ETS 300 019 (vibration up to 1000Hz) Electrical equipment for laboratory use; part 1: General requirements Safety requirements for electrical equipment for measurement, control, and laboratory use - Part 1: General requirements Safety information technology equipment NEBS Requirements: Physical Protection Environmental conditions and environmental tests For telecommunications equipment (A2LA Cert. No. 1627-01) 10/31/03 Page 11 of 11	

² Environmental testing is performed at the satellite facility located at 168 Ayer Rd, Littleton, MA 01460