



Giant Telecom Ltd.

Application
For
Certification

2.4GHz WiFi Phone

(FCC ID: RAQCP300)

06180221
KL/ Ann Choy
October 18, 2006

- The test results reported in this test report shall refer only to the sample actually tested and shall not refer or be deemed to refer to bulk from which such a sample may be said to have been obtained.
- This report shall not be reproduced except in full without prior authorization from Intertek Testing Services Hong Kong Limited.
- For Terms And Conditions of the services, it can be provided upon request.
- The evaluation data of the report will be kept for 3 years from the date of issuance.

Intertek Testing Services Hong Kong Ltd.

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.
Tel: (852) 2173 8888 Fax: (852) 2741 1693 Website: www.hk.intertek-etlsemko.com

LIST OF EXHIBITS

INTRODUCTION

<i>EXHIBIT 1:</i>	General Description
<i>EXHIBIT 2:</i>	System Test Configuration
<i>EXHIBIT 3:</i>	Emission Results
<i>EXHIBIT 4:</i>	Equipment Photographs
<i>EXHIBIT 5:</i>	Product Labelling
<i>EXHIBIT 6:</i>	Technical Specifications
<i>EXHIBIT 7:</i>	Instruction Manual
<i>EXHIBIT 8:</i>	Confidentiality Request

INTERTEK TESTING SERVICES

MEASUREMENT/TECHNICAL REPORT

Giant Telecom Ltd. - Model: CP300
FCC ID: RAQCP300

This report concerns (check one:) Original Grant X Class II Change

Equipment Type : DXT - Cordless Telephone

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes No X

If yes, defer until :
date

Company Name agrees to notify the Commission
by:

date

of the intended date of announcement of the product so that the grant can be issued
on that date.

Transition Rules Request per 15.37 ? Yes No X

If no, assumed Part 15, Subpart C for intentional radiator - the new 47 CFR [04-05-05
Edition] Provision.

Report prepared by:

Lam Chun Cheong, Kenneth
Intertek Testing Services Hong Kong Ltd.
2/F., Garment Centre,
576 Castle Peak Road,
Kowloon, Hong Kong.
Phone : 852-2173-8474
Fax: 852-2741-1693

INTERTEK TESTING SERVICES

Table of Contents

1.0 General Description	2
1.1 Product Description	2
1.2 Related Submittal(s) Grants	3
1.3 Test Methodology	3
1.4 Test Facility	3
2.0 System Test Configuration	5
2.1 Justification	5
2.2 EUT Exercising Software	5
2.3 Support Equipment List and Description	6
2.4 Measurement Uncertainty	7
2.5 Equipment Modification	7
3.0 Emission Results	9
3.1 Field Strength Calculation	10
3.2 Radiated Emission Configuration Photograph	11
3.3 Radiated Emission Data	12
3.4 Radiated Emission on the Bandedge	20
3.5 Line Conducted Configuration Photograph	21
3.6 Line Conducted Emission Data	22
4.0 Equipment Photographs	25
5.0 Product Labelling	27
6.0 Technical Specifications	29
7.0 Instruction Manual	31
8.0 Confidentiality Request	33

INTERTEK TESTING SERVICES

List of attached file

Exhibit type	File Description	filename
Cover Page	Confidentiality Request	request.pdf
Test Report	Test Report	report.pdf
Operation Description	Technical Description	descri.pdf
Test Setup Photo	Radiated Emission for Handset	config photos.doc
Test Report	Emission Plot	emission.pdf
Test Setup Photo	Conducted Emission	config photos.doc
Test Report	Conducted Emission Test Result	conduct.pdf
External Photo	External Photo	external photos.doc
Internal Photo	Internal Photo	internal photos.doc
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf

INTERTEK TESTING SERVICES

EXHIBIT 1 GENERAL DESCRIPTION

INTERTEK TESTING SERVICES

1.0 General Description

1.1 Product Description

The CP300 is a 2.4GHz WiFi Phone. It operates with wireless LAN to make voice-over-IP calls to the other IP phone. The unit is targeted for IEEE802.11b, 1 and 2 Mbps DSSS, and 5.5 and 11 Mbps CCK high rate standards. The modulation used is 11 Msymbols/s QPSK. The internal power supply's isolation is accomplished through a power transformer having an adequate dielectric rating. The unit can be powered by rechargeable battery or power adaptor.

The unit consists of a keypad with twelve standard keys (0,...9,*,#), and seven function keys (Left Soft Button, Right Soft Button, Up, Down, Left, Right, Select Soft Button). Send and End keys are provided to control pick and release calls respectively.

The antennas used in is integral, and the tested sample is a prototype.

The circuit description is saved with filename: descri.pdf

INTERTEK TESTING SERVICES

1.2 Related Submittal(s) Grants

This is an Application for Certification. The transmitter is included in this Application. This specific report details the emission characteristics of the transmitter. The digital device is subject to the verification authorization process, in accordance with 15.101(a). A verification report has been prepared for the digital device portion.

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2003). All measurements were performed in Open Area Test Sites. Preliminary scans were performed in the Open Area Test Sites only to determine worst case modes. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located at Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong. This test facility and site measurement data have been fully placed on file with the FCC.

INTERTEK TESTING SERVICES

EXHIBIT 2 SYSTEM TEST CONFIGURATION

INTERTEK TESTING SERVICES

2.0 System Test Configuration

2.1 Justification

For emissions testing, the equipment under test (EUT) was setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables were manipulated to produce worst case emissions. The unit was either powered by a fully charged battery or power adaptor.

For the measurements, the EUT is attached to a plastic stand if necessary and placed on the wooden turntable. In order to produce the maximum emission, all data rates (1, 2, 5.5, 11 Mbps) are considered.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

2.2 EUT Exercising Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

INTERTEK TESTING SERVICES

2.3 Support Equipment List and Description

The FCC ID's for all equipment, plus descriptions of all cables used in the tested system are:

HARDWARE:

An AC adaptor and a battery (provided with the unit) were used to power the device. Their description are listed below.

- (1) A Switching Mode adaptor (100-240V to 5VDC 1A, Model: KSAB0500100W1US) (Supplied by Client)
- (2) A "Li-ion" type rechargeable battery (3.7V 1200mAh) (Supplied by Client)

CABLES:

There are no special accessories necessary for compliance of this product.

OTHERS:

- (1) A headset for telephone use with 1.2m unshielded cable permanently affixed. (Supplied by Intertek)

INTERTEK TESTING SERVICES

2.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty test has been considered.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

2.5 Equipment Modification


Any modifications installed previous to testing by Giant Telecom Ltd. will be incorporated in each production model sold/leased in the United States.

No modifications were installed by ETL Division, Intertek Testing Services Hong Kong Ltd.

All the items listed under section 2.0 of this report are confirmed by:

Confirmed by:

*Lam Chun Cheong, Kenneth
Senior Lead Engineer
Intertek Testing Services
Agent for Giant Telecom Ltd.*

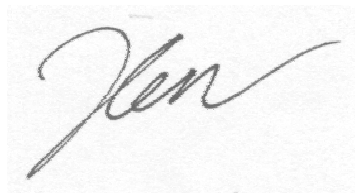

Signature

October 18, 2006

Date

INTERTEK TESTING SERVICES

EXHIBIT 3 EMISSION RESULTS

INTERTEK TESTING SERVICES

3.0 Emission Results

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

INTERTEK TESTING SERVICES

3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

where FS = Field Strength in $\text{dB}\mu\text{V}/\text{m}$
 RA = Receiver Amplitude (including preamplifier) in $\text{dB}\mu\text{V}$
 CF = Cable Attenuation Factor in dB
 AF = Antenna Factor in dB
 AG = Amplifier Gain in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:-

$$FS = RR + LF$$

where FS = Field Strength in $\text{dB}\mu\text{V}/\text{m}$
 $RR = RA - AG$ in $\text{dB}\mu\text{V}$
 $LF = CF + AF$ in dB

Assume a receiver reading of $52.0 \text{ dB}\mu\text{V}$ is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving a field strength of $32 \text{ dB}\mu\text{V}/\text{m}$. This value in $\text{dB}\mu\text{V}/\text{m}$ was converted to its corresponding level in $\mu\text{V}/\text{m}$.

$RA = 52.0 \text{ dB}\mu\text{V}$	
$AF = 7.4 \text{ dB}$	$RR = 23.0 \text{ dB}\mu\text{V}$
$CF = 1.6 \text{ dB}$	$LF = 9.0 \text{ dB}$
$AG = 29.0 \text{ dB}$	
$FS = RR + LF$	
$FS = 23 + 9 = 32 \text{ dB}\mu\text{V}/\text{m}$	

Level in $\mu\text{V}/\text{m}$ = Common Antilogarithm $[(32 \text{ dB}\mu\text{V}/\text{m})/20] = 39.8 \mu\text{V}/\text{m}$

INTERTEK TESTING SERVICES

3.2 Radiated Emission Configuration Photograph

Worst Case Radiated Emission

at 4874.000 MHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: config photos.doc

INTERTEK TESTING SERVICES

3.3 Radiated Emission Data

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

Judgement : Passed by 1.8 dB margin compare with the average limit

TEST PERSONNEL:



Tester Signature

Jess Tang, Lead Engineer
Typed/Printed Name

October 18, 2006
Date

INTERTEK TESTING SERVICES

Company: Giant Telecom Ltd.

Date of Test: August 22-September 28, 2006

Model: CP300

Mode : TX-Channel 01 (data rate: 11Mbps)

Table 1

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre- Amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2412.000	108.5	33	29.4	104.9	114.0	-9.1
H	*4824.000	69.1	33	34.9	71.0	74.0	-3.0
H	7236.000	59.6	33	37.9	64.5	74.0	-9.5
H	9648.000	49.7	33	40.4	57.1	74.0	-16.9
H	*12060.000	43.5	33	40.5	51.0	74.0	-23.0

NOTES: 1. Peak detector is used for the emission measurement.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna is used for the emission over 1000MHz.

5. Emissions radiated outside of the specified frequency bands, except harmonics, are attenuated by 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation, which meet the requirement of part 15.249(d).

* Emission within the restricted band meets the requirement of part 15.205.

Test Engineer: Jess Tang

INTERTEK TESTING SERVICES

Company: Giant Telecom Ltd.

Date of Test: August 22-September 28, 2006

Model: CP300

Mode : TX-Channel 06 (data rate: 11Mbps)

Table 2

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre- Amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2437.000	107.8	33	29.4	104.2	114.0	-9.8
H	*4874.000	69.1	33	34.9	71.0	74.0	-3.0
H	*7311.000	59.4	33	37.9	64.3	74.0	-9.7
H	9748.000	49.4	33	40.4	56.8	74.0	-17.2
H	*12185.000	43.1	33	40.5	50.6	74.0	-23.4

NOTES: 1. Peak detector is used for the emission measurement.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna is used for the emission over 1000MHz.

5. Emissions radiated outside of the specified frequency bands, except harmonics, are attenuated by 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation, which meet the requirement of part 15.249(d).

* Emission within the restricted band meets the requirement of part 15.205.

Test Engineer: Jess Tang

INTERTEK TESTING SERVICES

Company: Giant Telecom Ltd.

Date of Test: August 22-September 28, 2006

Model: CP300

Mode : TX-Channel 11 (data rate: 11Mbps)

Table 3

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre- Amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2462.000	106.8	33	29.4	103.2	114.0	-10.8
H	*4924.000	68.4	33	34.9	70.3	74.0	-3.7
H	*7386.000	59.2	33	37.9	64.1	74.0	-9.9
H	9848.000	48.6	33	40.4	56.0	74.0	-18.0
H	*12310.000	42.8	33	40.5	50.3	74.0	-23.7

NOTES: 1. Peak detector is used for the emission measurement.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna is used for the emission over 1000MHz.

5. Emissions radiated outside of the specified frequency bands, except harmonics, are attenuated by 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation, which meet the requirement of part 15.249(d).

* Emission within the restricted band meets the requirement of part 15.205.

Test Engineer: Jess Tang

INTERTEK TESTING SERVICES

Company: Giant Telecom Ltd.

Date of Test: August 22-September 28, 2006

Model: CP300

Mode : TX-Channel 01 (data rate: 1Mbps)

Table 4

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre- Amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2412.000	80.6	33	29.4	77.0	94.0	-17.0
H	*4824.000	50.1	33	34.9	52.0	54.0	-2.0
H	7236.000	43.3	33	37.9	48.2	54.0	-5.8
H	9648.000	38.8	33	40.4	46.2	54.0	-7.8
H	*12060.000	37.9	33	40.5	45.4	54.0	-8.6

- NOTES:
1. Average detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emissions radiated outside of the specified frequency bands, except harmonics, are attenuated by 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation, which meet the requirement of part 15.249(d).
- * Emission within the restricted band meets the requirement of part 15.205.

Test Engineer: Jess Tang

INTERTEK TESTING SERVICES

Company: Giant Telecom Ltd.

Date of Test: August 22-September 28, 2006

Model: CP300

Mode : TX-Channel 06 (data rate: 1Mbps)

Table 5

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre- Amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2437.000	80.4	33	29.4	76.8	94.0	-17.2
H	*4874.000	50.3	33	34.9	52.2	54.0	-1.8
H	*7311.000	43.4	33	37.9	48.3	54.0	-5.7
H	9748.000	38.8	33	40.4	46.2	54.0	-7.8
H	*12185.000	37.6	33	40.5	45.1	54.0	-8.9

- NOTES:
1. Average detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emissions radiated outside of the specified frequency bands, except harmonics, are attenuated by 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation, which meet the requirement of part 15.249(d).
- * Emission within the restricted band meets the requirement of part 15.205.

Test Engineer: Jess Tang

INTERTEK TESTING SERVICES

Company: Giant Telecom Ltd.

Date of Test: August 22-September 28, 2006

Model: CP300

Mode : TX-Channel 11 (data rate: 1Mbps)

Table 6

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre- Amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2462.000	79.9	33	29.4	76.3	94.0	-17.7
H	*4924.000	49.7	33	34.9	51.6	54.0	-2.4
H	*7386.000	43.1	33	37.9	48.0	54.0	-6.0
H	9848.000	38.8	33	40.4	46.2	54.0	-7.8
H	*12310.000	37.6	33	40.5	45.1	54.0	-8.9

- NOTES:
1. Average detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emissions radiated outside of the specified frequency bands, except harmonics, are attenuated by 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation, which meet the requirement of part 15.249(d).
- * Emission within the restricted band meets the requirement of part 15.205.

Test Engineer: Jess Tang

INTERTEK TESTING SERVICES

Company: Giant Telecom Ltd.
Model: CP300
Mode : Talking with Adaptor

Date of Test: August 22-September 28, 2006

Table 7

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre- Amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
V	69.975	38.4	16	7.0	29.4	40.0	-10.6
H	139.448	34.1	16	14.0	32.1	43.5	-11.4
H	186.610	30.7	16	16.0	30.7	43.5	-12.8
H	209.920	32.6	16	17.0	33.6	43.5	-9.9
H	349.870	24.8	16	24.0	32.8	46.0	-13.2
H	419.740	23.1	16	25.0	32.1	46.0	-13.9

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.

Test Engineer: Jess Tang

INTERTEK TESTING SERVICES

3.4 Radiated Emission on the Bandedge

From the following plots, they show that the fundamental emissions are confined in the specified band (2400MHz and 2483.5MHz). In case of the fundamental emissions are within two standard bandwidths from the bandedge, the delta measurement technique is used for determining bandedge compliance. Standard bandwidth is the bandwidth specified by ANSI C63.4 (2003) for frequency being measured.

Emissions radiated outside of the specified frequency bands, except harmonics, are attenuated by 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation, which meet the requirement of part 15.249(d).

Please refer to the following plots for radiated emission on the bandedge:

Plot H1A*: Low Channel Emissions

Plot H1B**: High Channel Emissions

For electronic filing, the above plots are saved with filename: emission.pdf

* Bandedge compliance is determined by applying marker-delta method, i.e.

$$\begin{aligned}\text{Peak resultant field strength} &= \text{Peak fundamental emission} - \text{delta from the plot} \\ &= (104.9 - 32.38) \text{ dB}\mu\text{V/m} \\ &= 72.52\text{dB}\mu\text{V/m}\end{aligned}$$

$$\begin{aligned}\text{Average resultant field strength} &= \text{Average fundamental emission} - \text{delta from the plot} \\ &= (77 - 32.38) \text{ dB}\mu\text{V/m} \\ &= 44.62\text{dB}\mu\text{V/m}\end{aligned}$$

**Bandedge compliance is determined by applying marker-delta method, i.e.

$$\begin{aligned}\text{Peak resultant field strength} &= \text{Peak fundamental emission} - \text{delta from the plot} \\ &= (103.2 - 40.15) \text{ dB}\mu\text{V/m} \\ &= 63.05\text{dB}\mu\text{V/m}\end{aligned}$$

$$\begin{aligned}\text{Average resultant field strength} &= \text{Average fundamental emission} - \text{delta from the plot} \\ &= (76.3 - 40.15) \text{ dB}\mu\text{V/m} \\ &= 36.15\text{dB}\mu\text{V/m}\end{aligned}$$

The peak and average resultant field strength meets the general radiated emission limits in section 15.209, which do not exceed 74 dBμV/m and 54dBμV/m respectively.

INTERTEK TESTING SERVICES

3.5 Line Conducted Configuration Photograph

Worst Case Line-Conducted Configuration

For electronic filing, the worst case line conducted configuration photographs are saved with filename: config photos.doc

INTERTEK TESTING SERVICES

3.6 Line Conducted Emission Data

The data on the following pages list the significant emission frequencies, the limit, and the margin of compliance.

Judgement : Passed by more than 20 dB margin

TEST PERSONNEL:



Tester Signature

Jess Tang, Lead Engineer
Typed/Printed Name

October 18, 2006
Date

INTERTEK TESTING SERVICES

Company: Giant Telecom Ltd.
Model: CP300

Date of Test: August 22-September 28, 2006

Conducted Emissions

For electronic filing, the conducted emission test result is saved with filename:
conduct.pdf

INTERTEK TESTING SERVICES

EXHIBIT 4 EQUIPMENT PHOTOGRAPHS

INTERTEK TESTING SERVICES

4.0 Equipment Photographs

For electronic filing, the photographs are saved with filename: external photos.doc & internal photos.doc

INTERTEK TESTING SERVICES

EXHIBIT 5 PRODUCT LABELLING

INTERTEK TESTING SERVICES

5.0 **Product Labelling**

For electronic filing, the FCC ID label artwork and location is saved with filename: label.pdf

INTERTEK TESTING SERVICES

EXHIBIT 6 TECHNICAL SPECIFICATIONS

INTERTEK TESTING SERVICES

6.0 Technical Specifications

For electronic filing, the block diagram and circuit diagram are saved with filename: block.pdf and circuit.pdf respectively.

**EXHIBIT 7
INSTRUCTION MANUAL**

INTERTEK TESTING SERVICES

7.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf

The required FCC Information to the User is stated on P.3 of the Instruction Manual.

This manual will be provided to the end-user with each unit sold/leased in the United States.

INTERTEK TESTING SERVICES

EXHIBIT 8 CONFIDENTIALITY REQUEST

INTERTEK TESTING SERVICES

8.0 Confidentiality Request

For electronic filing, a preliminary copy of the Confidentiality Request is saved with filename: request.pdf