


# TEST REPORT

**Applicant:** MediaTek Inc.  
**Address:** No. 1, Dusing 1st Rd., Hsinchu Science Park  
Hsinchu City 30078 Taiwan  
**Equipment Type:** 2TX 11ax (WiFi6) BW80+ BT/BLE Combo Card  
**Model Name:** MT7920  
**Brand Name:** N/A  
**FCC ID:** RAS-MT7920  
**ISED Number:** 7542A-MT7920  
**Test Standard:** KDB 388624 D02 v18  
RSS-102 Issue 6  
**Sample Arrival Date:** Nov. 27, 2024  
**Test Date:** Dec. 19, 2024  
**Date of Issue:** Jan. 16, 2025

**ISSUED BY:**

Shenzhen BALUN Technology Co., Ltd.

**Tested by:** Xiong Lining



**Checked by:** Xu Rui



**Approved by:** Tolan Tu  
(Testing Director)



<b>Revision History</b>		
Version	Issue Date	Revisions Content
Rev. 01	Jan. 16, 2025	Initial Issue

## TABLE OF CONTENTS

1	GENERAL INFORMATION.....	3
1.1	Test Laboratory .....	3
1.2	Test Location .....	3
1.3	Test Environment Condition.....	3
2	PRODUCT INFORMATION .....	4
2.1	Applicant Information .....	4
2.2	Manufacturer Information.....	4
2.3	General Description for Equipment under Test (EUT).....	4
2.4	Ancillary Equipment.....	5
2.5	Technical Information .....	5
2.6	Remarks and Comments .....	6
3	SUMMARY OF TEST RESULT .....	7
3.1	Test Standards .....	7
3.2	Test Results Summary .....	7
4	MEASUREMENT SYSTEM .....	8
4.1	Conducted Power Test Setup.....	8
4.2	G-Sensor Conducted Power Test Procedure.....	8
5	TEST EQUIPMENTS LIST .....	9
ANNEX A CONDUCTED POWER TEST RESULT .....		10
A.1	Trigger lid angle detection and power verification 2.4GHz .....	10
A.2	Trigger lid angle detection and power verification 5GHz .....	14

# 1 GENERAL INFORMATION

## 1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

## 1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	<input type="checkbox"/> Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	<input checked="" type="checkbox"/> 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory is a testing organization accredited by ISED as a accredited testing laboratory. The company number is 11524A and CAB identifier number is CN0030.

## 1.3 Test Environment Condition

Ambient Temperature	18°C to 25°C
Ambient Relative Humidity	30% to 70%

## 2 PRODUCT INFORMATION

### 2.1 Applicant Information

Applicant	MediaTek Inc.
Address	No. 1, Dusing 1st Rd. Hsinchu Science Park Hsinchu City 30078 Taiwan

### 2.2 Manufacturer Information

Manufacturer	MediaTek Inc.
Address	No. 1, Dusing 1st Rd., Hsinchu Science Park Hsinchu City 30078 Taiwan

### 2.3 General Description for Equipment under Test (EUT)

EUT Name	2TX 11ax (WiFi6) BW80+ BT/BLE Combo Card
Model Name Under Test	MT7920
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

#### 2.3.1 Host Information:

Product Name	Notebook Computer
Model Name	IdeaPad 5 2-in-1 16AKP10
Brand Name	Lenovo

#### 2.3.2 Antenna Information:

Antenna Port	Model Name	Antenna Manufacturer	Antenna Type	Antenna Gain (dBi)				
				2.4 GHz	5.15-5.25 GHz	5.25-5.35 GHz	5.47-5.725 GHz	5.725-5.895 GHz
Main Antenna	AYP6Y-100469	AWAN	PIFA	2.26	3.16	3.08	2.43	3.22
Auxiliary Antenna	AYP6Y-100470		PIFA	2.16	3.41	3.33	2.89	3.82
Main Antenna	3.N201.0263	South Star	PIFA	1.79	2.31	1.52	2.73	2.61
Auxiliary Antenna	3.N201.0264		PIFA	1.69	1.87	2.28	2.82	3.18

## 2.4 Ancillary Equipment

Note: Not applicable.

## 2.5 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE) WIFI 802.11a, 802.11b, 802.11g, 802.11n, VHT, 802.11ac and 802.11ax
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Operating Mode	2.4G WLAN; 5G WLAN; Bluetooth	
Frequency Range	802.11b/g	2412 ~ 2472 MHz
	VHT20/VHT40	2412 ~ 2472 MHz
	802.11ax(HE20/HE40)	2412 ~ 2472 MHz
	802.11a	5150 ~ 5250 MHz
		5250 ~ 5350 MHz
		5470 ~ 5725 MHz
		5725 ~ 5850 MHz
		5815 ~ 5885 MHz
	802.11n(HT20/HT40)	5150 ~ 5250 MHz
		5250 ~ 5350 MHz
		5470 ~ 5725 MHz
		5725 ~ 5850 MHz
		5815 ~ 5885 MHz
	802.11ac(VHT20/VHT40/VHT80)	5150 ~ 5250 MHz
		5250 ~ 5350 MHz
		5470 ~ 5725 MHz
		5725 ~ 5850 MHz
5815 ~ 5885 MHz		
802.11ax(HE20/HE40/HE80)	5150 ~ 5250 MHz	
	5250 ~ 5350 MHz	
	5470 ~ 5725 MHz	
	5725 ~ 5850 MHz	
	5815 ~ 5885 MHz	
Bluetooth	2402 ~ 2480 MHz	
Antenna Type	WLAN	PIFA
	Bluetooth	PIFA
Hotspot Function	N/A	
Exposure Category	General Population/Uncontrolled exposure	
Product Type	Portable Device	
EUT Type	<input checked="" type="checkbox"/> Production unit	<input type="checkbox"/> Identical prototype

## 2.6 Remarks and Comments

The test report is validation of the G sensor functionality.

### 3 SUMMARY OF TEST RESULT

#### 3.1 Test Standards

No.	Identity	Document Title
1	KDB 388624 D02 v18	Pre-Approval Guidance List v18, PRE-APPROVAL GUIDANCE LIST
2	RSS-102 Issue 6	Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)

#### 3.2 Test Results Summary


Device Mode	Lid Angle range	WLAN 2.4GHz (802.11b Channel 6)				WLAN 5GHz (802.11a Channel 120)			
		Tune-up Power (dBm)		Measured Power (dBm)		Tune-up Power (dBm)		Measured Power (dBm)	
		Main. Antenna	Aux. Antenna	Main. Antenna	Aux. Antenna	Main. Antenna	Aux. Antenna	Main. Antenna	Aux. Antenna
Laptop	0° - 180°	16.00	16.00	15.89	15.88	15.50	15.50	15.40	15.40
Tablet	181° - 360°	13.00	13.00	12.88	12.89	10.00	10.00	9.84	9.86

## 4 MEASUREMENT SYSTEM

### 4.1 Conducted Power Test Setup

The conducted power measurement test setup is described in the following and illustrated in below figure.

1. The DUT is convertible PC from Lenovo . The connectivity module is installed.
2. A control PC is used to configure the call box as an access point to manage the uplink and downlink data traffic.
3. Uplink signal power is measured with the Call Box.
4. Path loss in the power measurement setup from the wireless module antenna port to the Call Box.

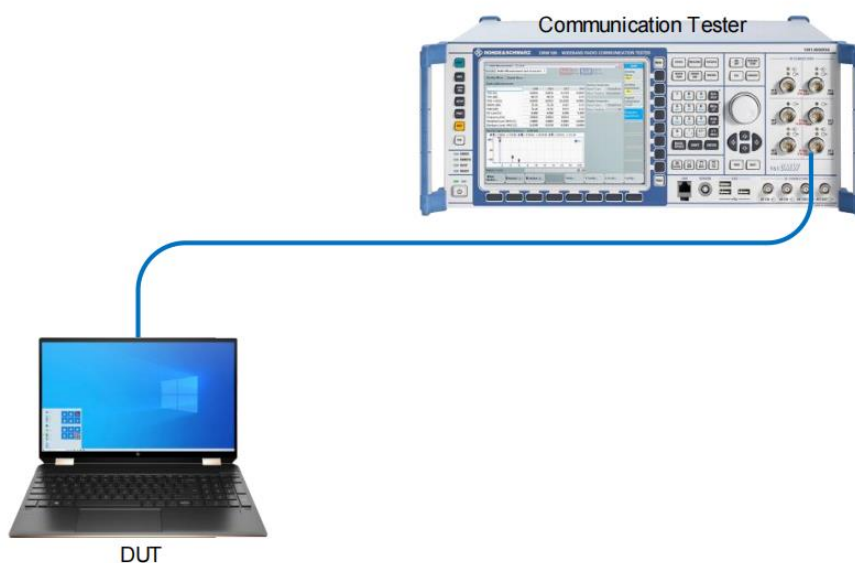

### 4.2 G-Sensor Conducted Power Test Procedure

The following additional guidance applies only to convertible laptops whose screen rotates around one axis, from 0 degrees to 360 degrees, in a clamshell style, i.e., from closed mode to open mode, to “tent” mode, and finally, to tablet mode. This process must be followed to determine the lid angle where a power reduction occurs, by taking power measurements at each step, as indicated in the step listed here below:

1. From the lid in closed mode (0 degrees), open the screen in 10-degree steps until laptop mode is obtained.
2. Lower the screen by 5 degrees increments to verify that the “closed mode” is triggered.
3. From the position of the previous step, open the screen in 1-degree increments until laptop mode is triggered again.
4. Continue opening the screen in 1-degree increments until at least 5 degrees past where “laptop mode” was obtained, then continue opening the screen in 10-degree steps until the device switches to tablet mode.
5. Reverse the previous procedure to go from tablet mode back down to closed mode.



## 5 TEST EQUIPMENTS LIST

Description	Manufacturer	Model	Serial No./Version	Cal. Date	Cal. Due
PC	Dell	N/A	N/A	N/A	N/A
Communication Tester	Rohde &Schwartz	CMW500	167190	2024/5/8	2025/5/7
RF Cable	N/A	N/A	N/A	N/A	N/A

Note: RF cable loss was verified before usage.

## ANNEX A CONDUCTED POWER TEST RESULT

### A.1 Trigger lid angle detection and power verification 2.4GHz

A.1.1 The lid is rotating from 0° to 360°

Mode	Angele (degrees)	Measured Power	
		2.4GHz 802.11b Ch6	
		(dBm)	
		Main	Aux.
Laptop	0	15.71	15.64
	10	15.73	15.57
	20	15.83	15.79
	30	15.89	15.67
	40	15.82	15.74
	50	15.59	15.85
	60	15.78	15.77
	70	15.69	15.84
	80	15.76	15.82
	90	15.86	15.64
	100	15.80	15.57
	110	15.60	15.88
	120	15.60	15.66
	130	15.66	15.66
	140	15.83	15.72
	150	15.74	15.55
	160	15.70	15.86
	170	15.60	15.81
Tablet	180	15.66	15.61
	190	12.60	12.76
Tablet	185	12.65	12.81
	180	15.82	15.67
Tablet	181	12.88	12.55
	182	12.65	12.66
	183	12.62	12.77
	184	12.64	12.67
	185	12.85	12.85
	190	12.70	12.81

	200	12.76	12.71
	210	12.72	12.88
	220	12.80	12.85
	230	12.64	12.76
	240	12.77	12.75
	250	12.64	12.63
	260	12.68	12.73
	270	12.62	12.87
	280	12.84	12.74
	290	12.72	12.57
	300	12.85	12.82
	310	12.71	12.61
	320	12.55	12.87
	330	12.85	12.82
	340	12.85	12.69
	350	12.74	12.76
	360	12.55	12.89

A.1.2 The lid is rotating from 360° to 0°

Mode	Angle (degrees)	Measured Power	
		2.4GHz 802.11b Ch6	
		(dBm)	
		Main	Aux.
Tablet	360	12.61	12.84
	350	12.82	12.77
	340	12.63	12.84
	330	12.84	12.88
	320	12.72	12.85
	310	12.67	12.74
	300	12.77	12.77
	290	12.74	12.65
	280	12.56	12.57
	270	12.76	12.64
	260	12.87	12.67
	250	12.81	12.83
	240	12.69	12.89
	230	12.88	12.81
	220	12.74	12.86
	210	12.64	12.67
	200	12.67	12.59
190	12.75	12.87	
Laptop	180	15.80	15.65
Tablet	185	12.85	12.86
	184	12.58	12.74
	183	12.83	12.76
	182	12.73	12.87
	181	12.61	12.60
Laptop	180	15.86	15.78
	179	15.67	15.56
	178	15.60	15.66
	177	15.55	15.85
	176	15.62	15.77
	175	15.80	15.79
	170	15.72	15.83
	160	15.58	15.60
	150	15.59	15.63

	140	15.80	15.76
	130	15.65	15.73
	120	15.80	15.87
	110	15.56	15.64
	100	15.72	15.74
	90	15.73	15.55
	80	15.65	15.65
	70	15.86	15.63
	60	15.57	15.60
	50	15.61	15.76
	40	15.77	15.67
	30	15.69	15.65
	20	15.55	15.59
	10	15.64	15.61
	0	15.64	15.58

## A.2 Trigger lid angle detection and power verification 5GHz

### A.2.1 The lid is rotating from 0° to 360°

Mode	Angle (degrees)	Measured Power	
		5GHz 802.11a Ch120	
		(dBm)	
		Main	Aux.
Laptop	0	15.22	15.10
	10	15.25	15.05
	20	15.09	15.10
	30	15.39	15.35
	40	15.05	15.38
	50	15.10	15.38
	60	15.18	15.39
	70	15.12	15.09
	80	15.14	15.18
	90	15.10	15.10
	100	15.40	15.16
	110	15.16	15.27
	120	15.35	15.11
	130	15.24	15.12
	140	15.17	15.15
	150	15.36	15.21
	Tablet	160	15.13
170		15.07	15.15
Tablet	180	15.25	15.18
	190	9.83	9.86
Tablet	185	9.83	9.86
	180	15.25	15.39
Tablet	181	9.60	9.76
	182	9.84	9.66
	183	9.77	9.79
	184	9.80	9.64
	185	9.74	9.66
	190	9.82	9.69
	200	9.76	9.75
	210	9.60	9.76
220	9.84	9.66	

	230	9.77	9.79
	240	9.80	9.64
	250	9.74	9.66
	260	9.82	9.69
	270	9.76	9.75
	280	9.60	9.76
	290	9.84	9.66
	300	9.60	9.76
	310	9.84	9.66
	320	9.77	9.79
	330	9.80	9.64
	340	9.74	9.66
	350	9.82	9.69
	360	9.76	9.75

A.2.2 The lid is rotating from 360° to 0°

Mode	Angele (degrees)	Measured Power	
		5GHz 802.11a Ch120	
		(dBm)	
		Main	Aux.
Tablet	360	9.60	9.76
	350	9.84	9.66
	340	9.77	9.79
	330	9.80	9.64
	320	9.74	9.66
	310	9.82	9.69
	300	9.76	9.75
	290	9.60	9.76
	280	9.84	9.66
	270	9.77	9.79
	260	9.60	9.76
	250	9.60	9.76
	240	9.84	9.66
	230	9.77	9.79
	220	9.80	9.64
	210	9.74	9.66
	200	9.82	9.69
	190	9.76	9.75
Laptop	180	15.31	15.09
Tablet	185	9.60	9.76
	184	9.84	9.66
	183	9.77	9.79
	182	9.80	9.64
	181	9.74	9.66
Laptop	180	15.31	15.09
	179	15.07	15.36
	178	15.22	15.20
	177	15.06	15.14
	176	15.14	15.27
	175	15.15	15.35
	170	15.22	15.40
	160	15.19	15.33
	150	15.14	15.26



	140	15.16	15.28
	130	15.37	15.37
	120	15.27	15.40
	110	15.22	15.08
	100	15.12	15.19
	90	15.17	15.26
	80	15.31	15.30
	70	15.36	15.34
	60	15.09	15.21
	50	15.32	15.29
	40	15.32	15.36
	30	15.28	15.10
	20	15.28	15.39
	10	15.22	15.32
	0	15.21	15.38

## Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--