

ANTENNA INFORMATION

OEM	DELL
ODM	WISTRON
Platform model name	P198G
Intel platform (ex: Yes, No or NA)	Yes
Platform type (ex: regular NB, convertible PC, AIO...etc)	Convertible PC
SAR minimum separation (mm)	FCC (1g) 1.8
	ISED (1g) 15.05
	ISED (10g) 2.1

Antenna manufacturer	Company name	Speed
	Address	25F, No.95, Xinpū 6th St., Taoyuan Dist., Taoyuan City 33044, Taiwan.
Test location	Company name	Speed
	Address	25F, No.95, Xinpū 6th St., Taoyuan Dist., Taoyuan City 33044, Taiwan.
Test Personnel	Name(Full name)	John Liu
	E-mail	John_liu@speed-hz.com
	Tel/Mobile	+886-3-3253361#243
Testing date		2024/10/16

Antenna Part number	Main	F-0G-FS-6194-001-00
	Aux	F-0G-FS-6194-002-00
Antenna type (ex: PIFA, Dipole...etc)		PIFA

NB Mode Antenna Peak gain w/ cable loss (dBi)*										
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
Main	1.95	2.65	2.10	4.10	3.17	2.64	2.93	2.32	3.13	3.51
Aux	2.67	2.33	2.37	2.68	2.55	2.30	3.52	3.66	3.96	3.85
TB Mode Antenna Peak gain w/ cable loss (dBi)*										
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
Main	2.54	2.45	2.45	4.10	2.95	2.84	3.58	2.60	2.84	3.65
Aux	2.38	2.40	2.30	2.15	2.46	2.44	3.94	3.46	3.63	3.52

Cable Assembly Part Number and Information					
	Cable PN	Cable length(mm)	Cable diameter(mm)	Impedance(ohm)	Connector type
Main	SY113L/50-143	211	1.13	50	IPEX,20565-001R-13
Aux	SY113L/50-118	236.5	1.13	50	IPEX,20565-001R-13

* 3D Antenna Peak Gain required being test in system basis.

Table of Contents

Cover page.....	1
1. Intel Reference Gain and Type.....	3
2. Document Revision History.....	3
3. Test & System Description	
3.1 Measurement Method and System.....	4
3.2 Test setup.....	4
3.3 Equipment list.....	5
4. Radiation characteristics of antenna loaded in Host Platform.....	6
Annex A. Photographs	
A.1 Setup Photo.....	16
A.2 Test sample.....	17
Annex B. Antenna Location	
B.1 Antenna Host Platform Location Information.....	19
B.2 Antenna dimensional information for SAR evaluation.....	20

1. Intel Reference Gain and Type

Antenna Peak gain w/ cable loss (dBi)											
Band/Frequency		2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
Design	EU/UK	3.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00
PIFA	For WiFi 6E and earlier	3.24	3.64	3.73	4.77	4.97	4.72	4.83	4.30	5.37	5.59
	From WiFi 7	2.95	5.11	4.55	5.15	5.13	4.45	5.02	5.02	4.96	4.96
Dipole	For WiFi 6E and earlier	2.89	2.92	3.19	4.41	4.22	4.22	4.83	4.30	4.49	5.34
	From WiFi 7	2.95	4.03	4.11	5.15	5.13	4.45	5.02	4.71	4.49	4.96
Monopole	From WiFi 7	2.83	4.57	4.44	4.95	4.95	4.43	4.87	4.91	4.91	4.79

3D Peak Antenna gain should be equal or greater than -2 dBi

If a host integrator plans to use a lower gain antenna of the same type, additional CBP(FCC)/EDT(EU) testing need to be performed while the module is installed in the host.

Revision #	Revision Details	Issued Date
Rev. 00	First Issue	


2. Document Revision History

3. Test & System Description

3.1 Measurement Method and System

The testing of antenna gain should be made at a CTIA qualified lab with an RF anechoic chamber with at least 3-meter separation from the receive antenna to the antenna under test. The antenna gain report from unqualified lab can't be referenced a passing. Besides, all test equipment including horn antennas, adapters, cables, network analyzers, and receivers shall be calibrated per manufacturer's minimum calibration requirements.

3.2 Test setup

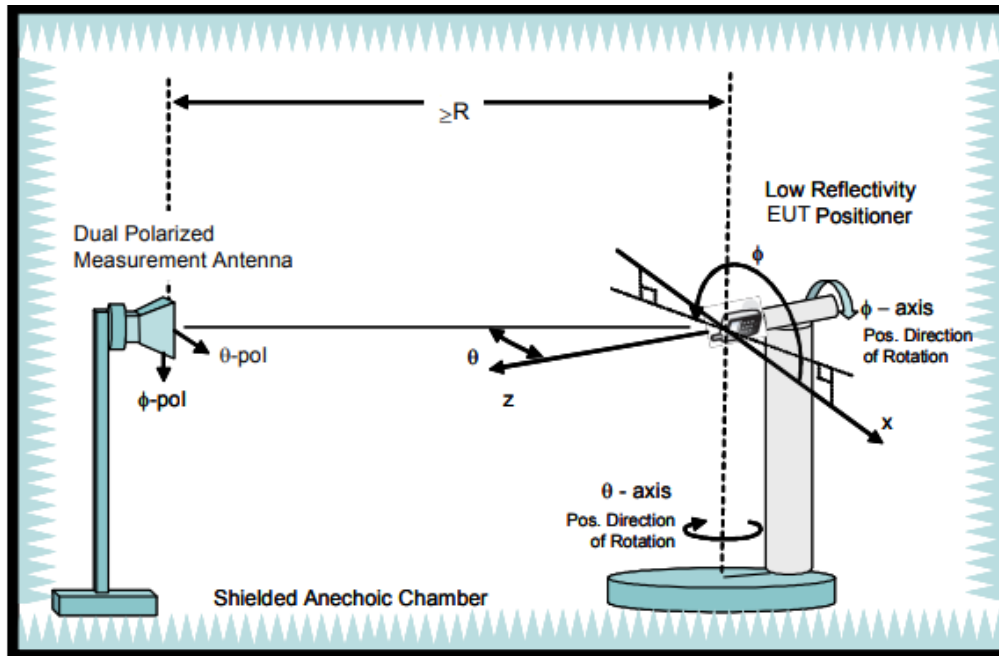


Test Conditions

NB under test placed on a non-conductive structure at sufficient height to be in the 'quiet zone' of the chamber

The NB under test must be fully populated with a power, motherboard, hard drive, disk drives, etc... The purpose is to characterize the antennas on a fully populated customer deliverable unit.

NB's Control panel should be parallel with XY-plane and face to X-axle, see diagram below.

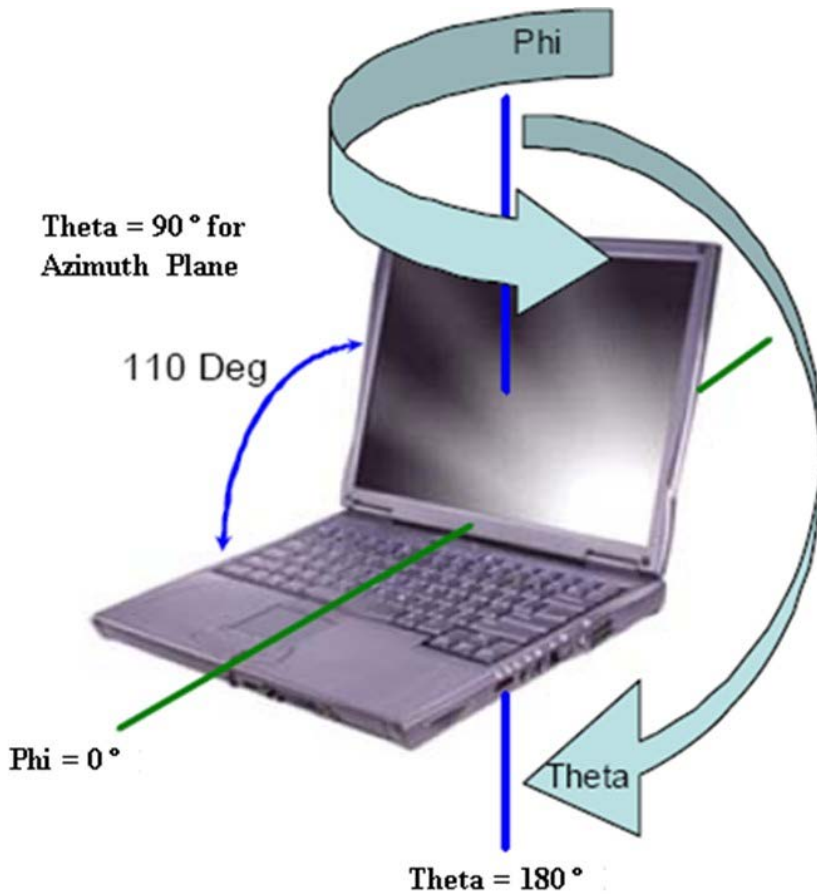

3.3 Equipment list


Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
Anechoic Chamber	AMS8500	-	ETS-Lindgren	22-Jun-22	10-Jul-24
Turn Table	2117-7200	SN00231447	ETS-Lindgren	22-Jun-22	10-Jul-24
Switch & Positioning systems	EMCenter	SN00242606	ETS-Lindgren	22-Jun-22	10-Jul-24
Measurement SW	EMQuest V1.15 build 27347	SN1802	ETS-Lindgren	22-Jun-22	10-Jul-24
Horn antenna	3164-10	SN00246202	ETS-Lindgren	22-Jun-22	10-Jul-24
Vector Network Analyzer	E5071C	PN5188-4462	Keysight	30-May-22	30-Nov-23
Cable 7.5m 400MHz to 18GHz(H-pol)	SS402	00100A1F5A1XXS	WOKEN	22-Jun-22	10-Nov-24
Cable 7.5m 400MHz to 18GHz(V-pol)	SS402	00100A1F5A1XXS	WOKEN	22-Jun-22	10-Nov-24
Cable 14m 400MHz to 18GHz	SS402	00100A1F5A1XXS	WOKEN	22-Jun-22	10-Nov-24
Temp & Humidity Logger	830	SN84972	PROVA	16-Jul-22	10-Jul-23

4. Radiation characteristics of antenna loaded in Host Platform(NB Mode)

Main Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	1.95

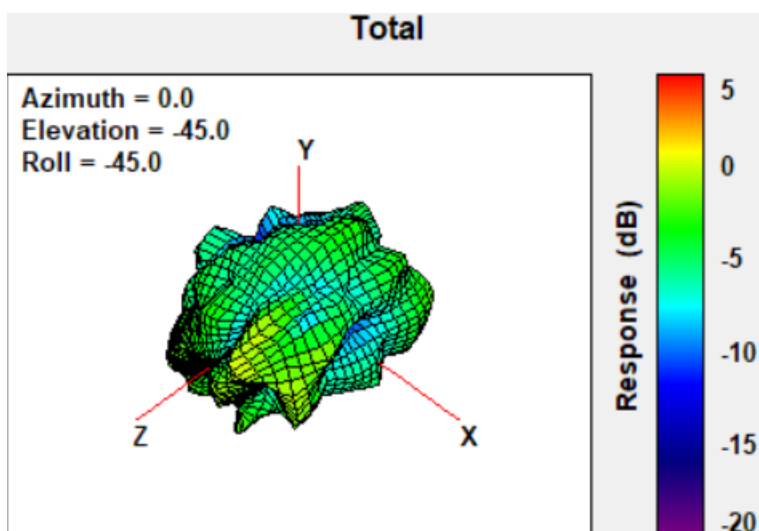


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	2.65

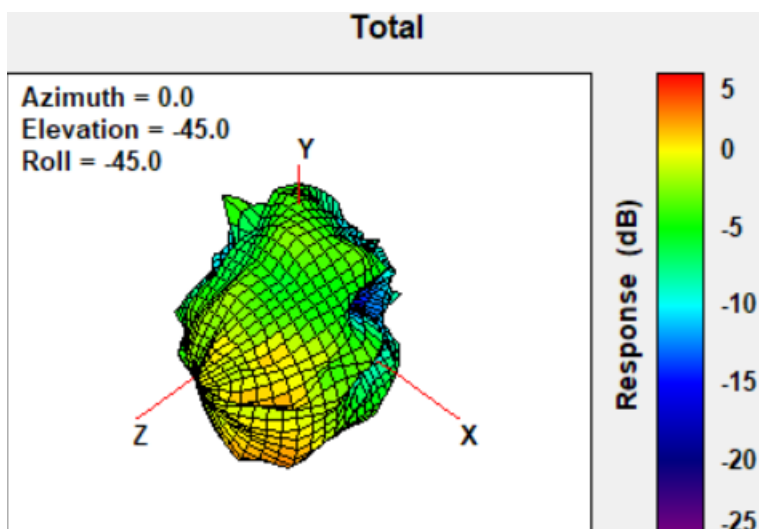


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	2.10

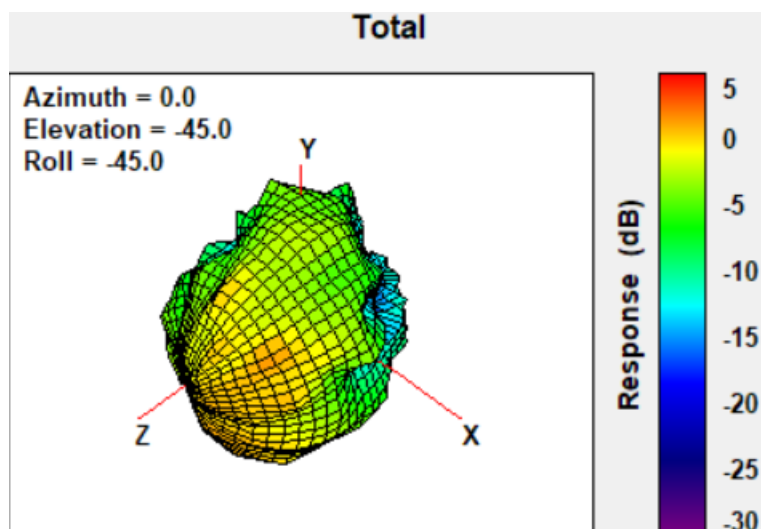


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	4.10

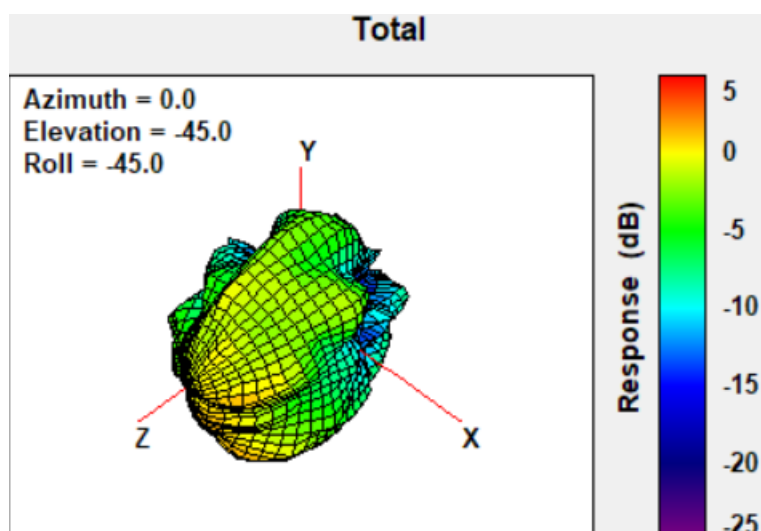


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	3.17

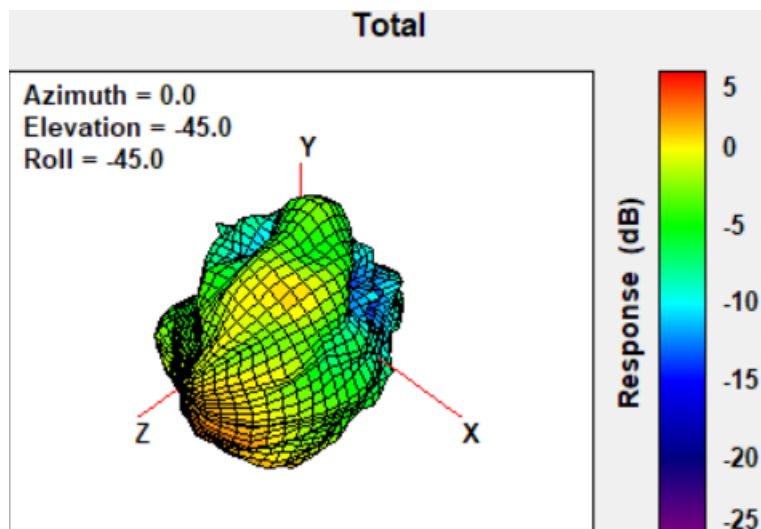


Max Antenna 3D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	2.64

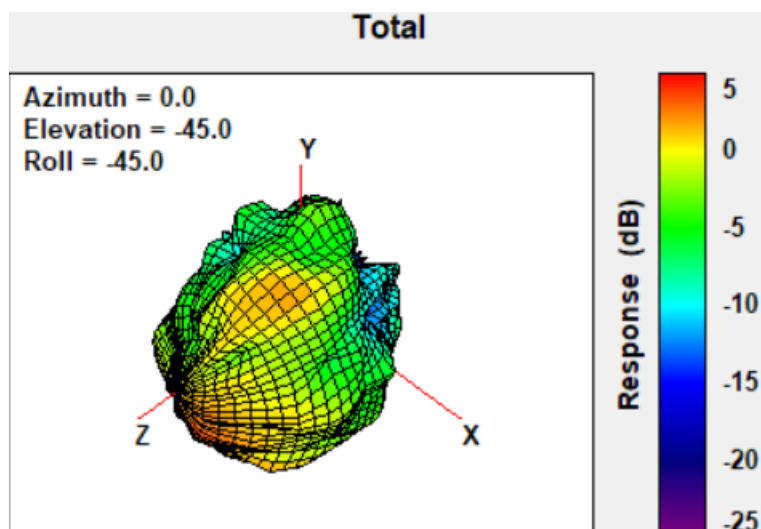


Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	2.93

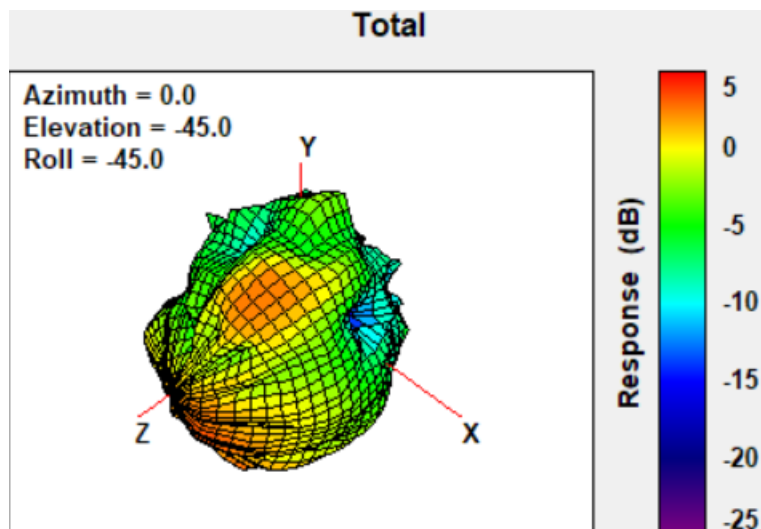


Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	2.32

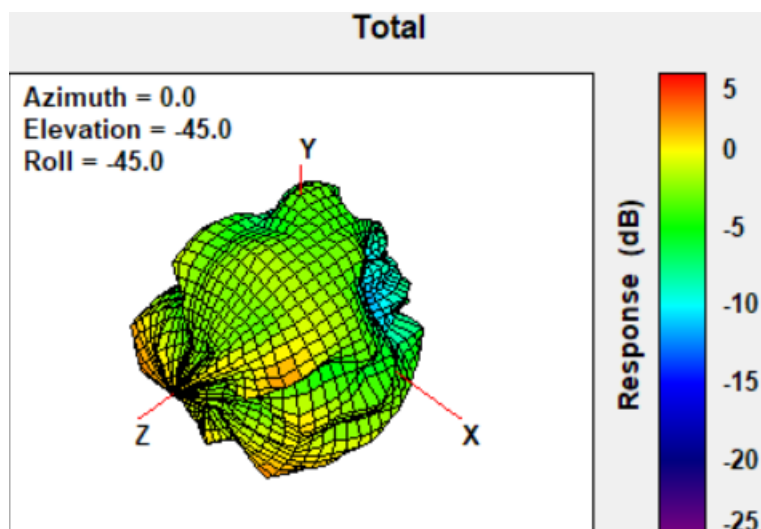


Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	3.13

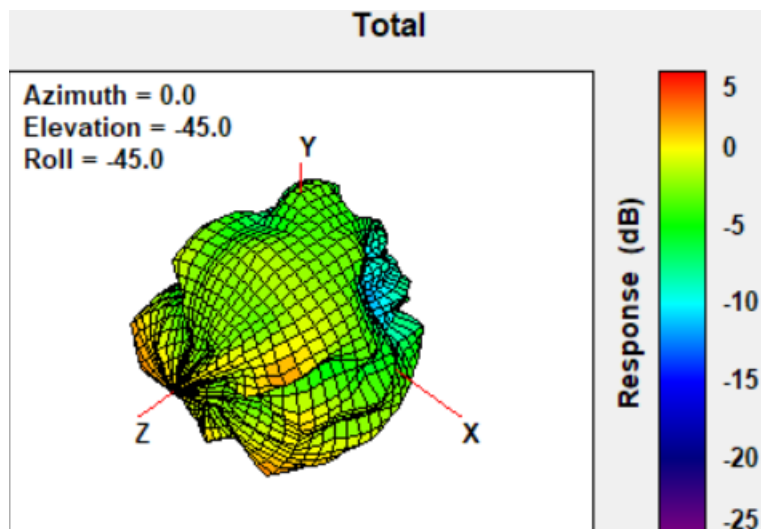

Max Antenna 3D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	3.51

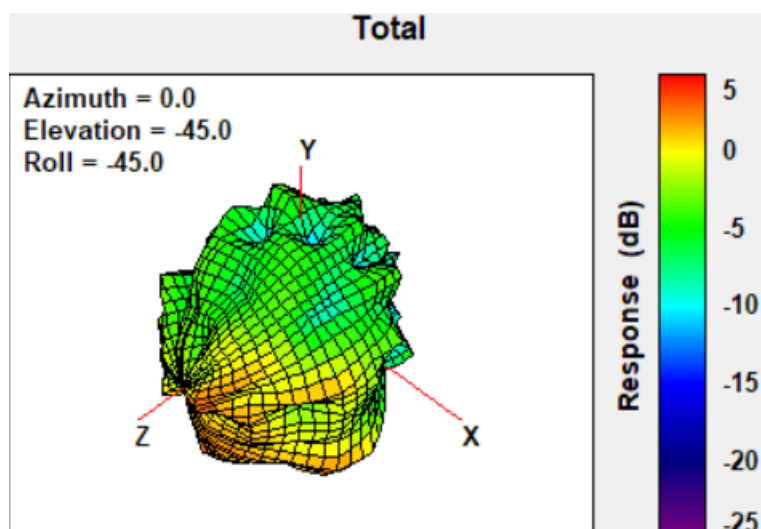

Auxiliary Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	2.67

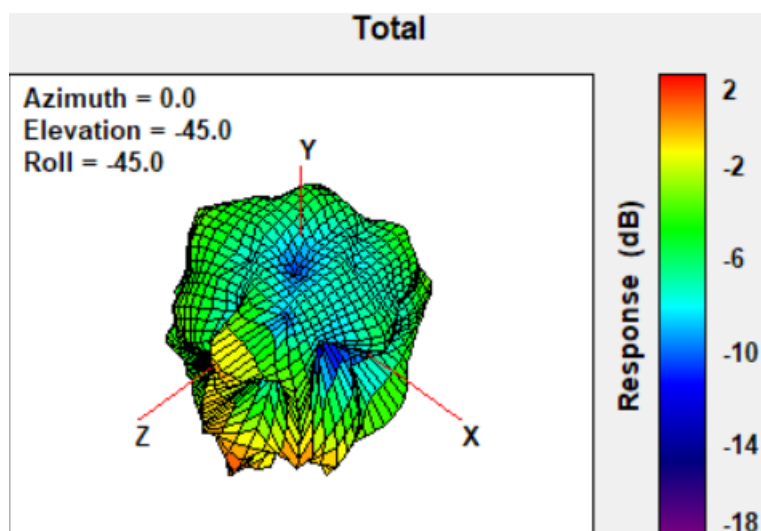


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	2.33

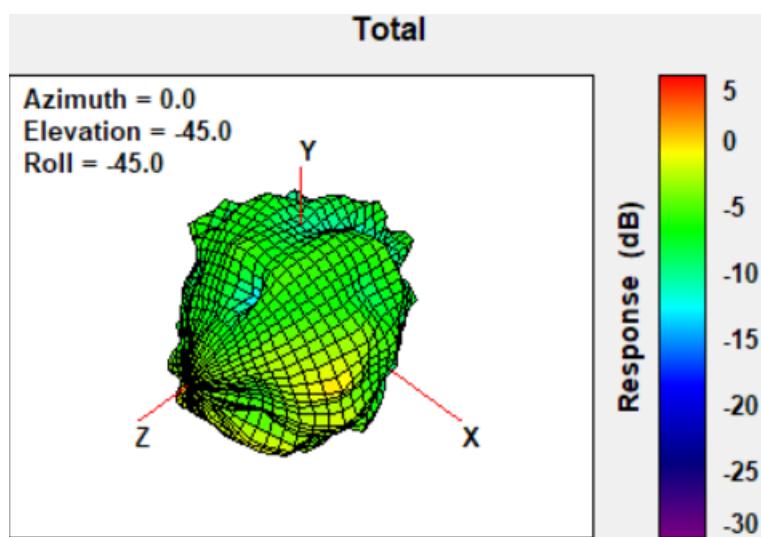


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	2.37

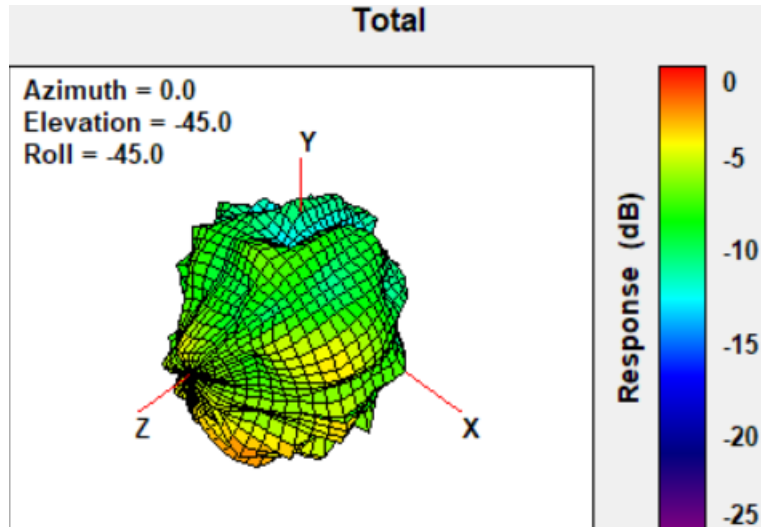


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	2.68

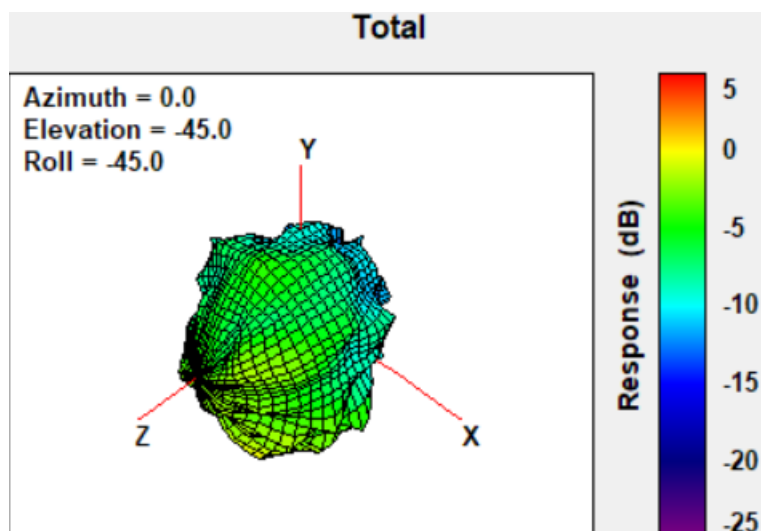


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	2.55

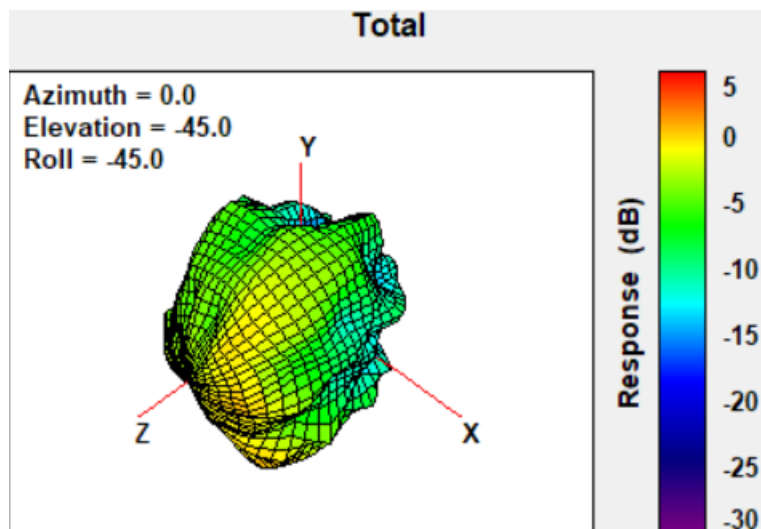


Max Antenna 3D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	2.30

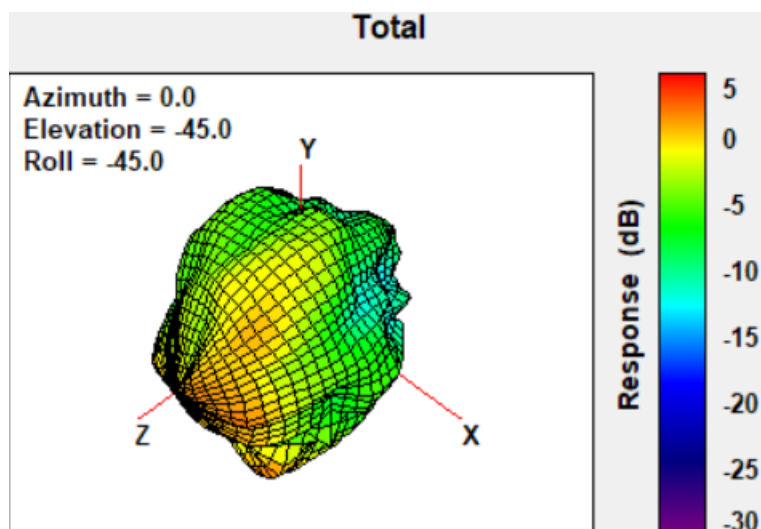


Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	3.52

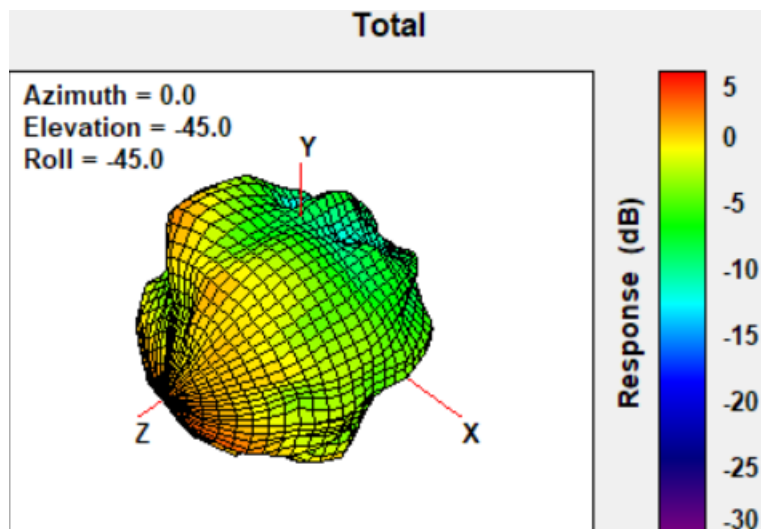


Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	3.66

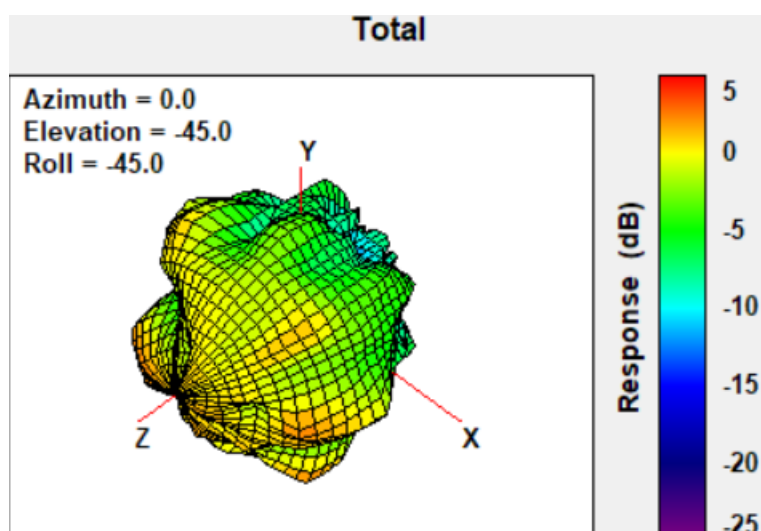


Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	3.96

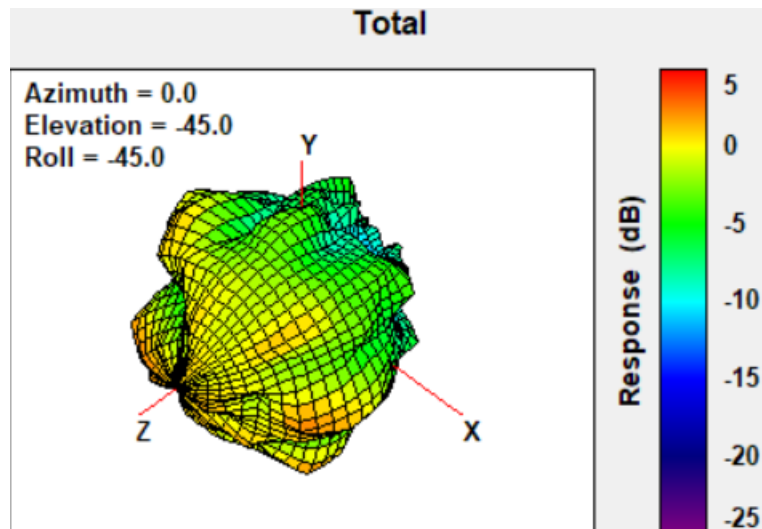

Max Antenna 3D Radiation Pattern 6875-7125 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	3.85

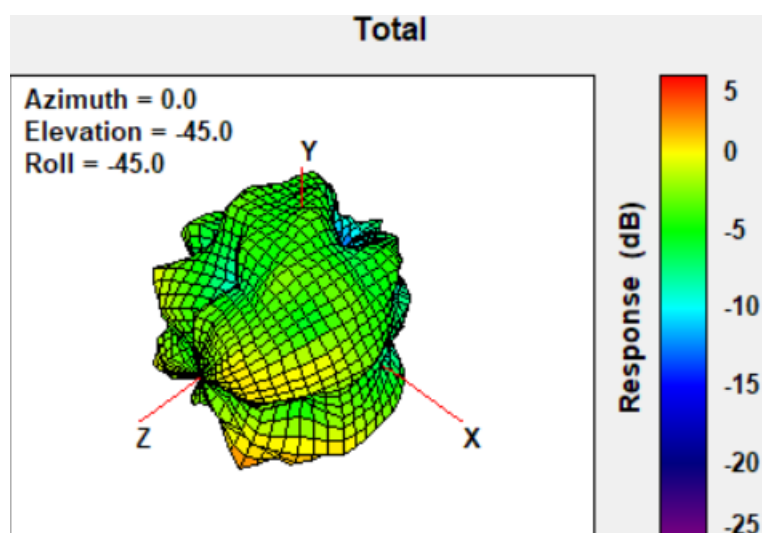


5. Radiation characteristics of antenna loaded in Host Platform(TB Mode)

Main Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	2.54

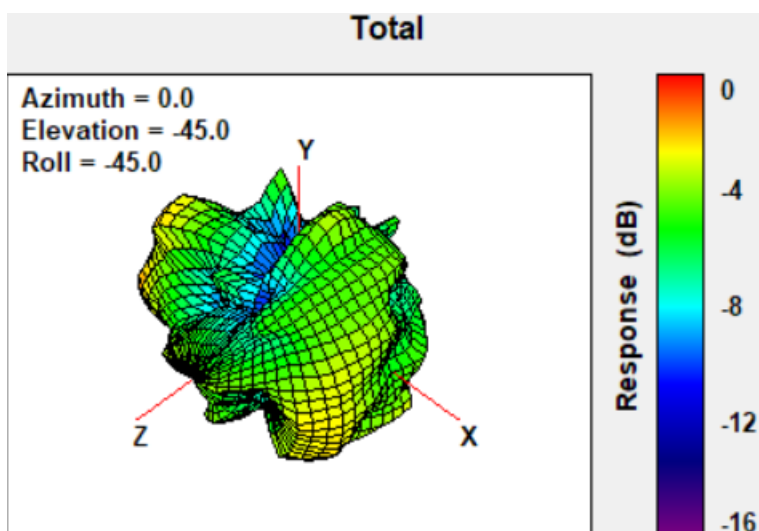


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	2.45

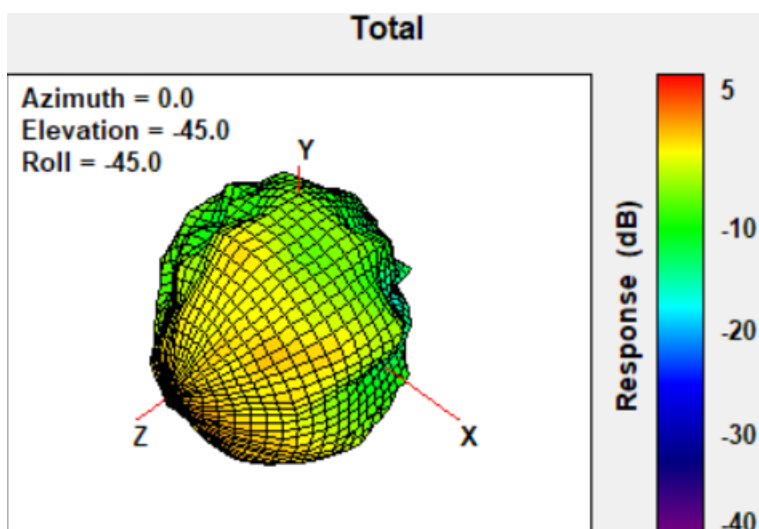


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	2.45

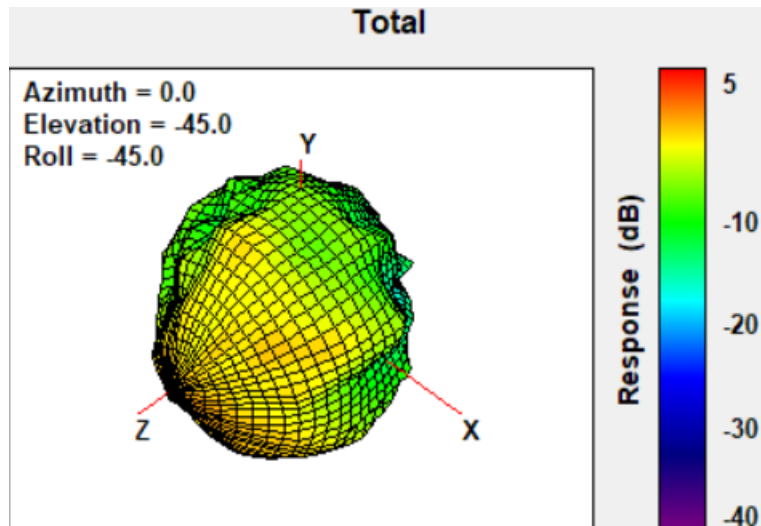


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	4.10

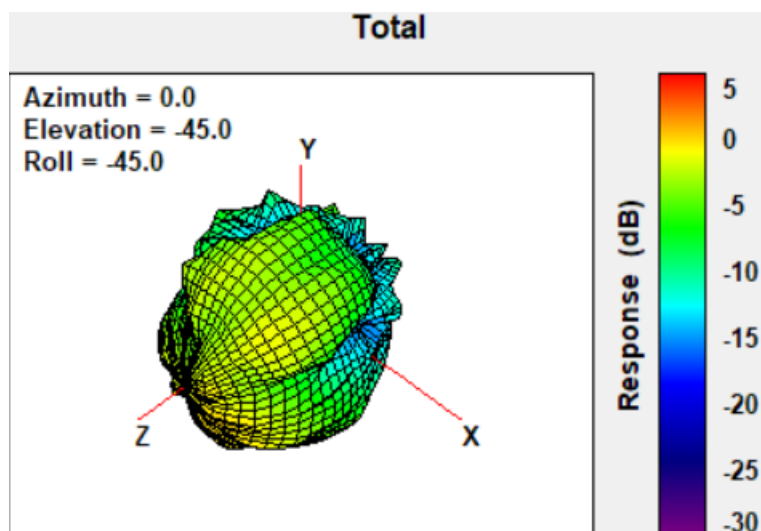


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	2.95

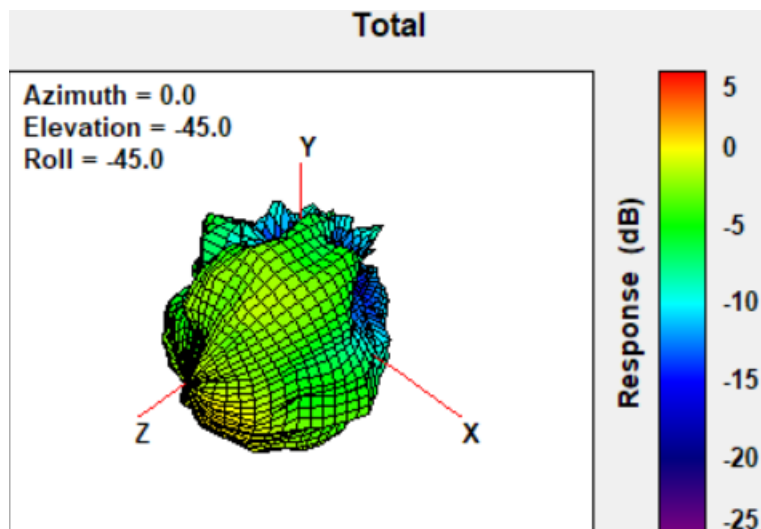


Max Antenna 3D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	2.84

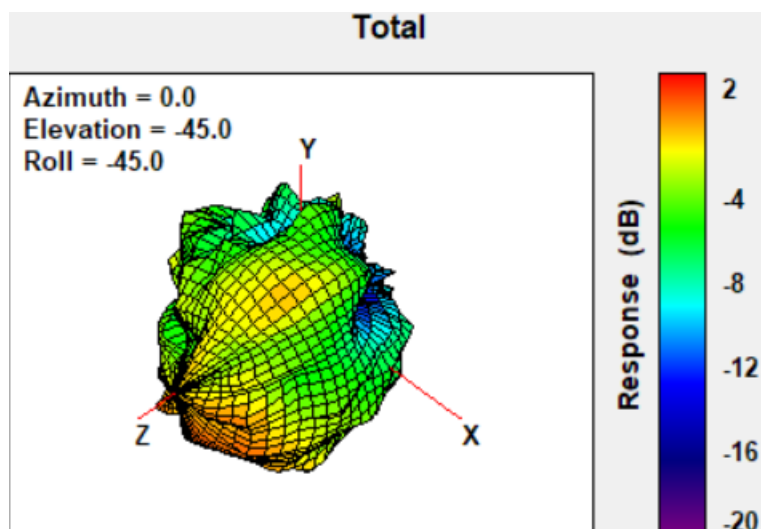


Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	3.58

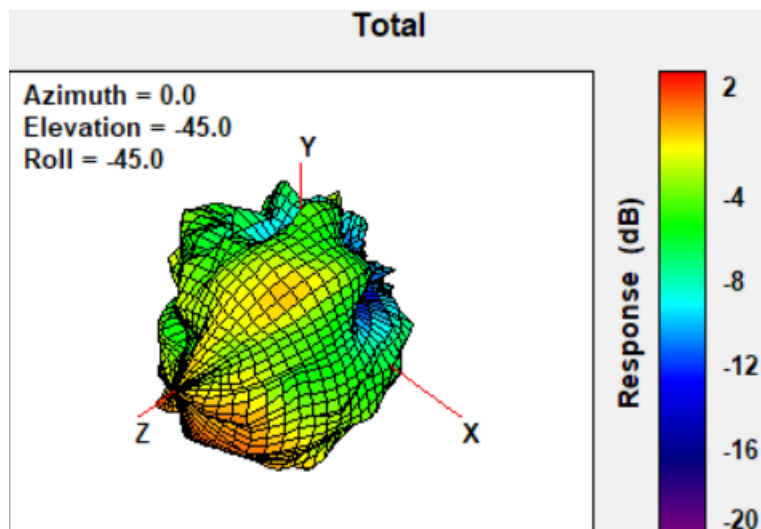


Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	2.60

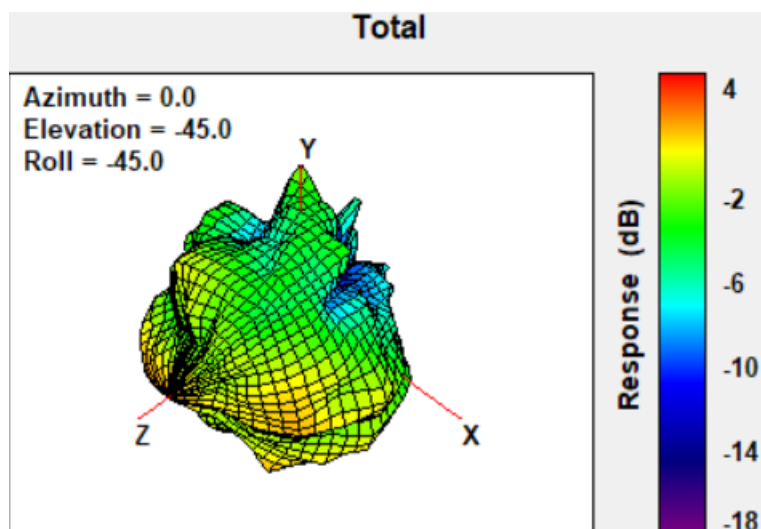


Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	2.84

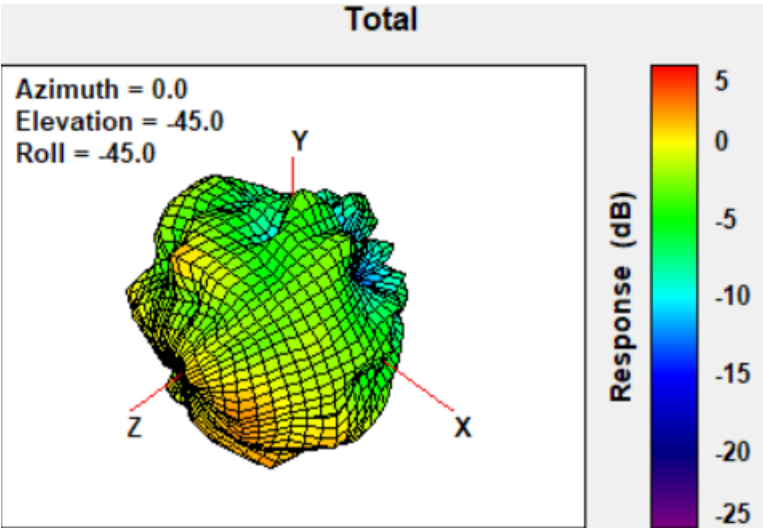

Max Antenna 3D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	3.65

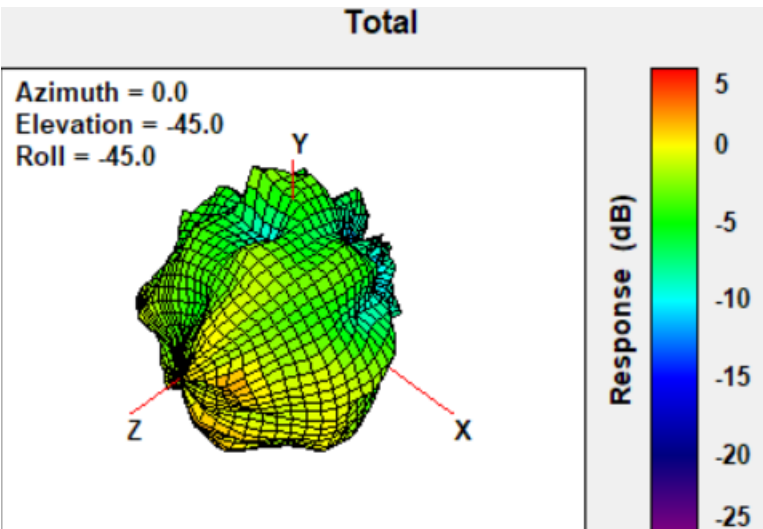

Auxiliary Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	2.38

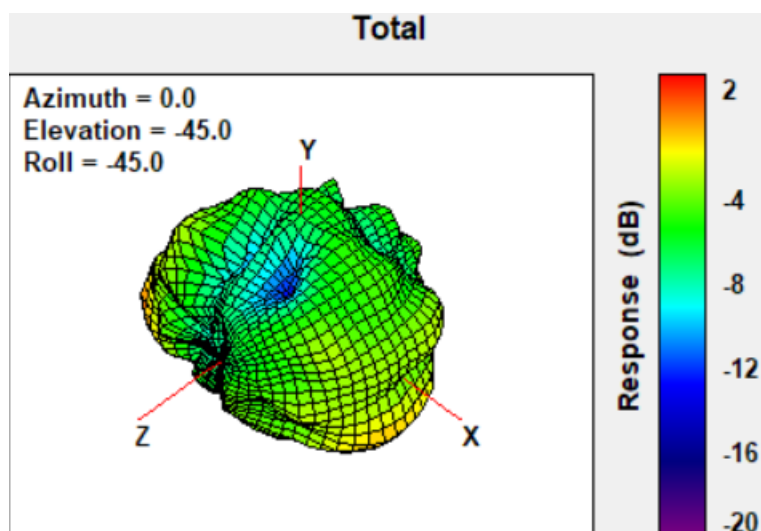


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	2.40

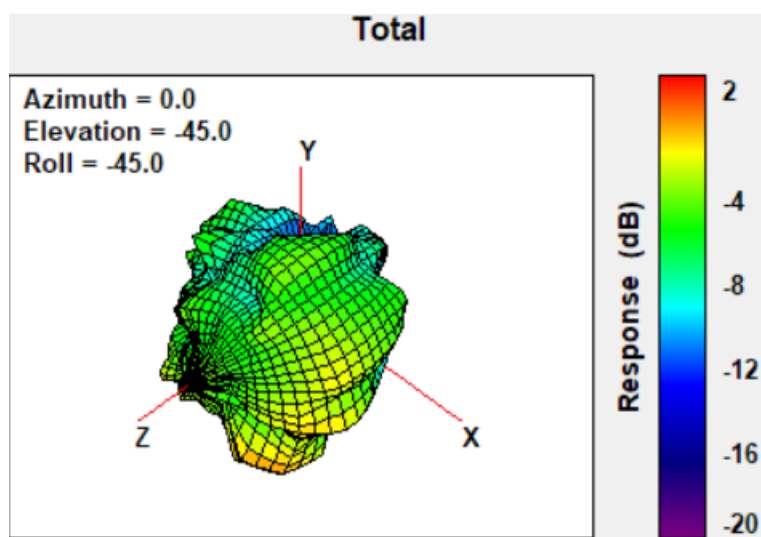


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	2.30

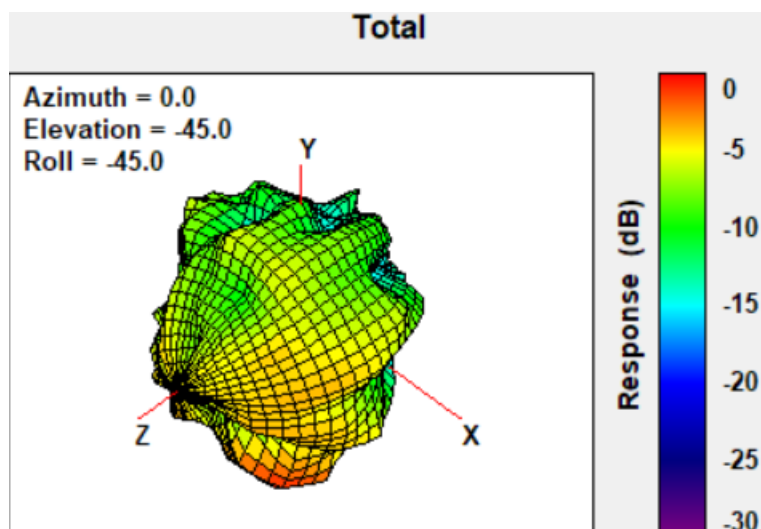


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	2.15

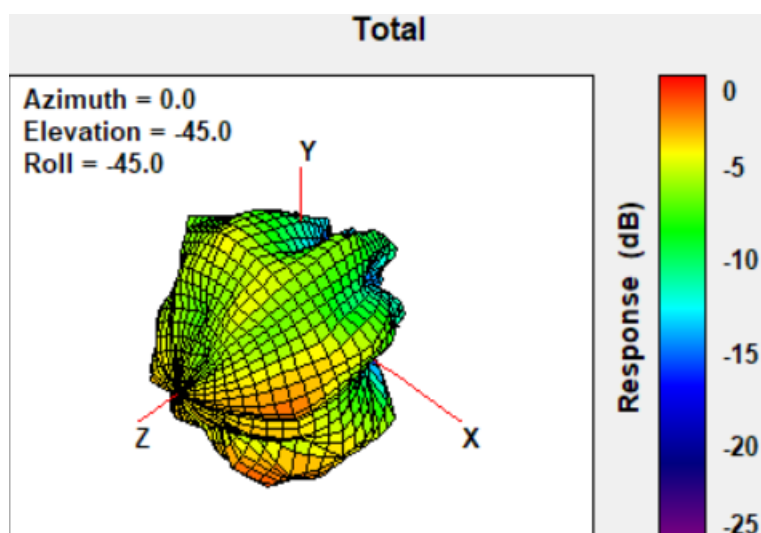


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	2.46

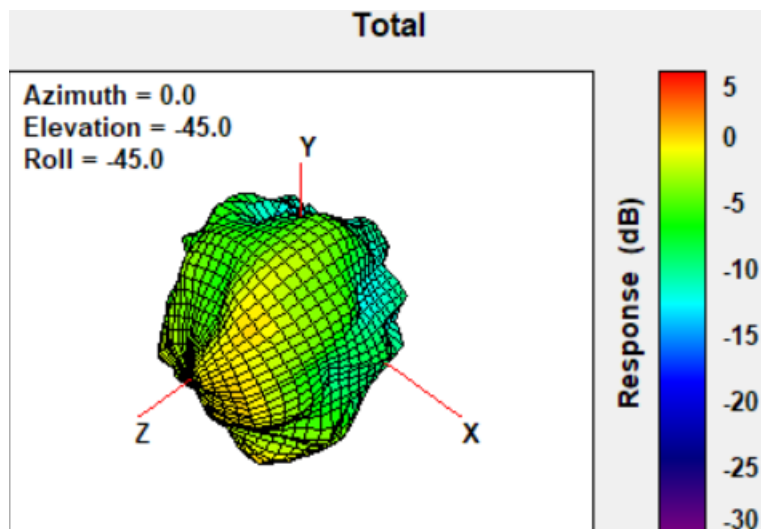


Max Antenna 3D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	2.44

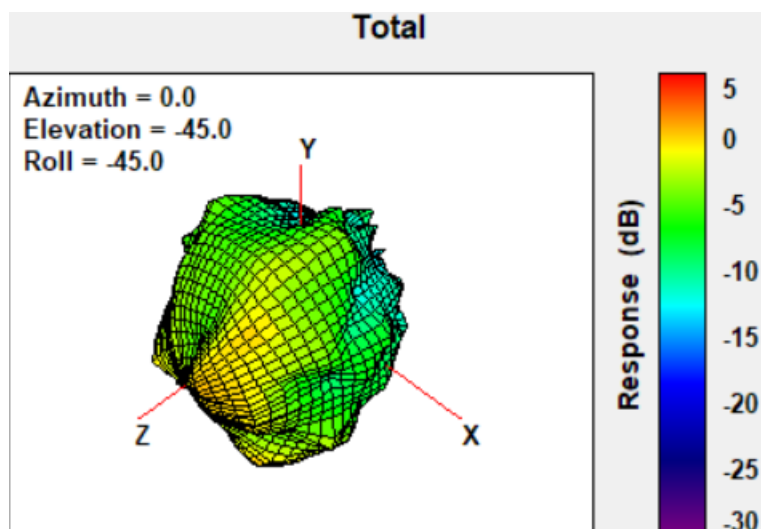


Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	3.94

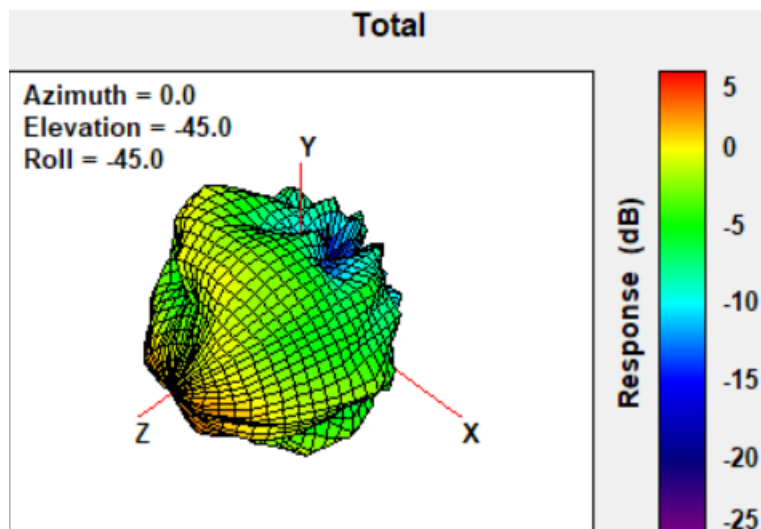


Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	3.46

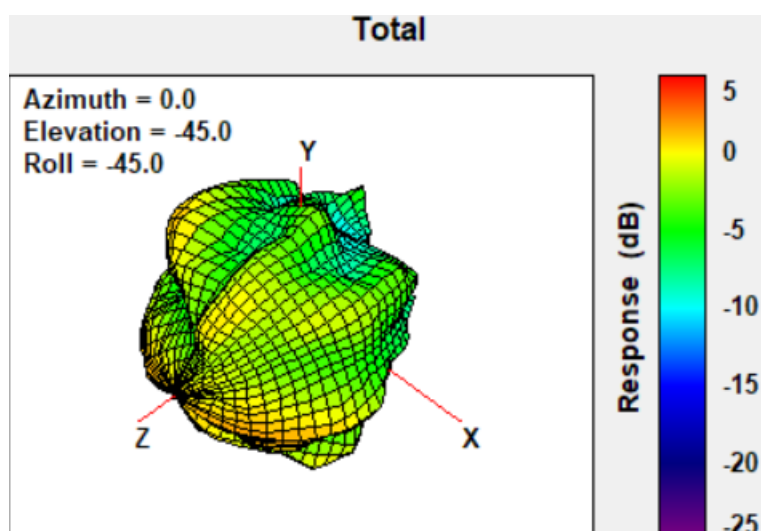


Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	3.63

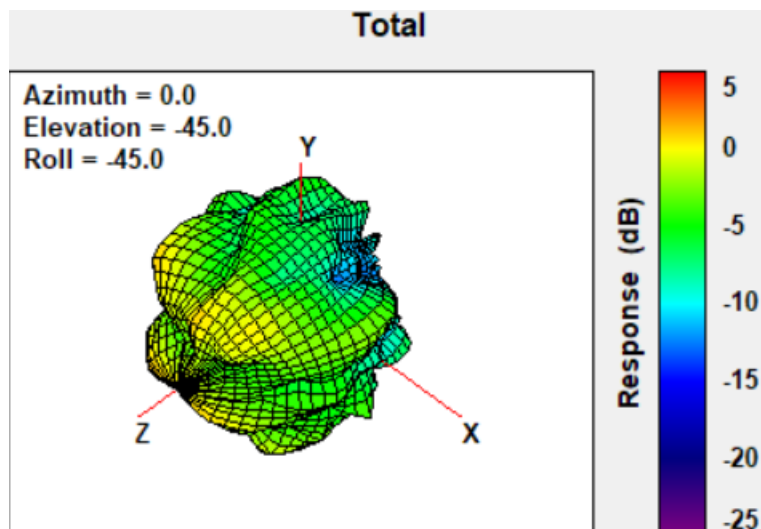

Max Antenna 3D Radiation Pattern 6875-7125 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	3.52

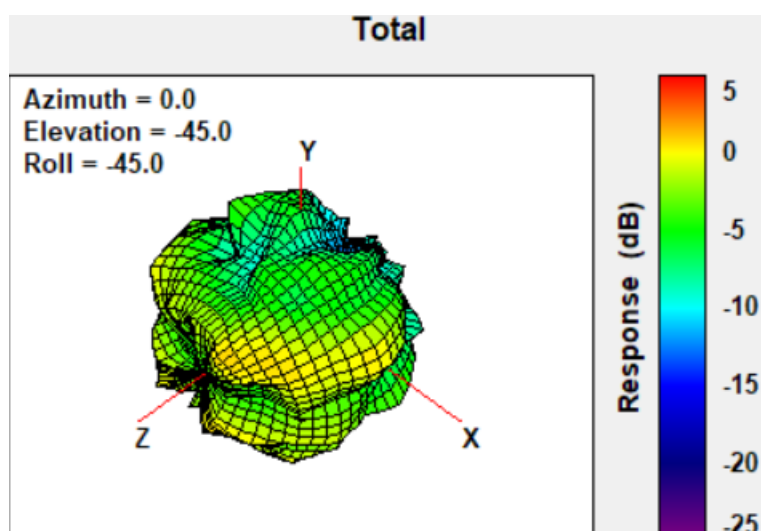


Annex B. Antenna Location

B.1 Antenna Host Platform Location Information


Include a dimensioned photo(s) or dimensioned drawing(s) of Main and Aux antenna placements (measurements are not required for receive-only antenna).

Any antenna that transmits must show dimensions to bottom of laptop. Provide a description of the materials that are used for supporting or surrounding transmit antennas; for example, non-conductive plastics vs. conductive coated plastic or metallic materials.

NB mode

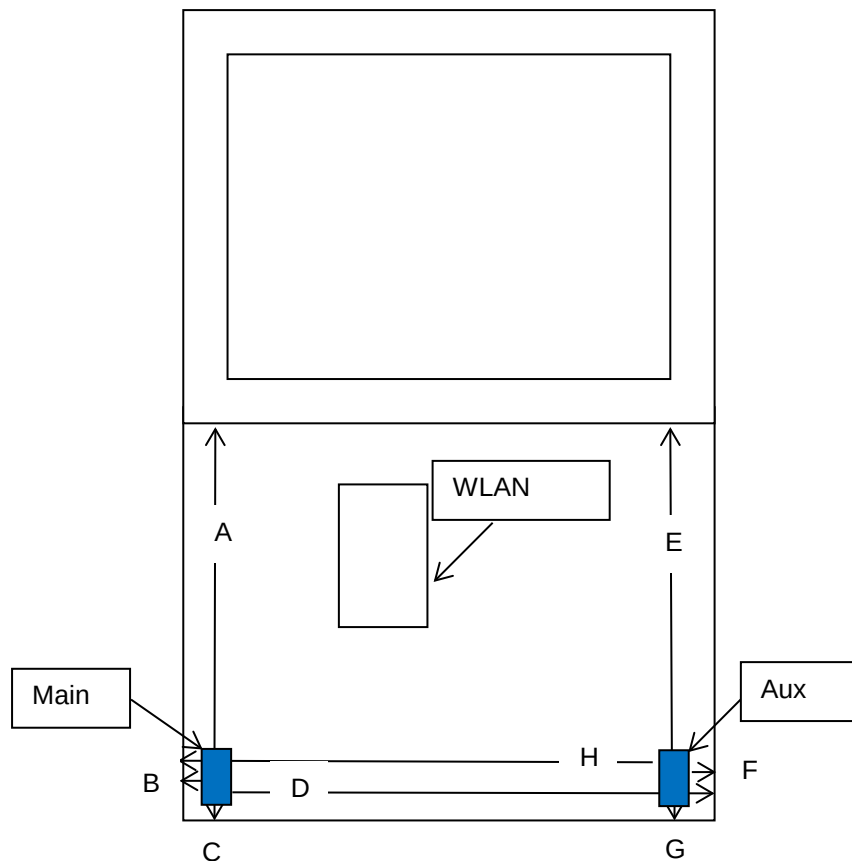

Distance (mm)	A	B	C	D	E	F	G	H
	184	7.15	15.05	295.85	184	7.15	15.05	295.85

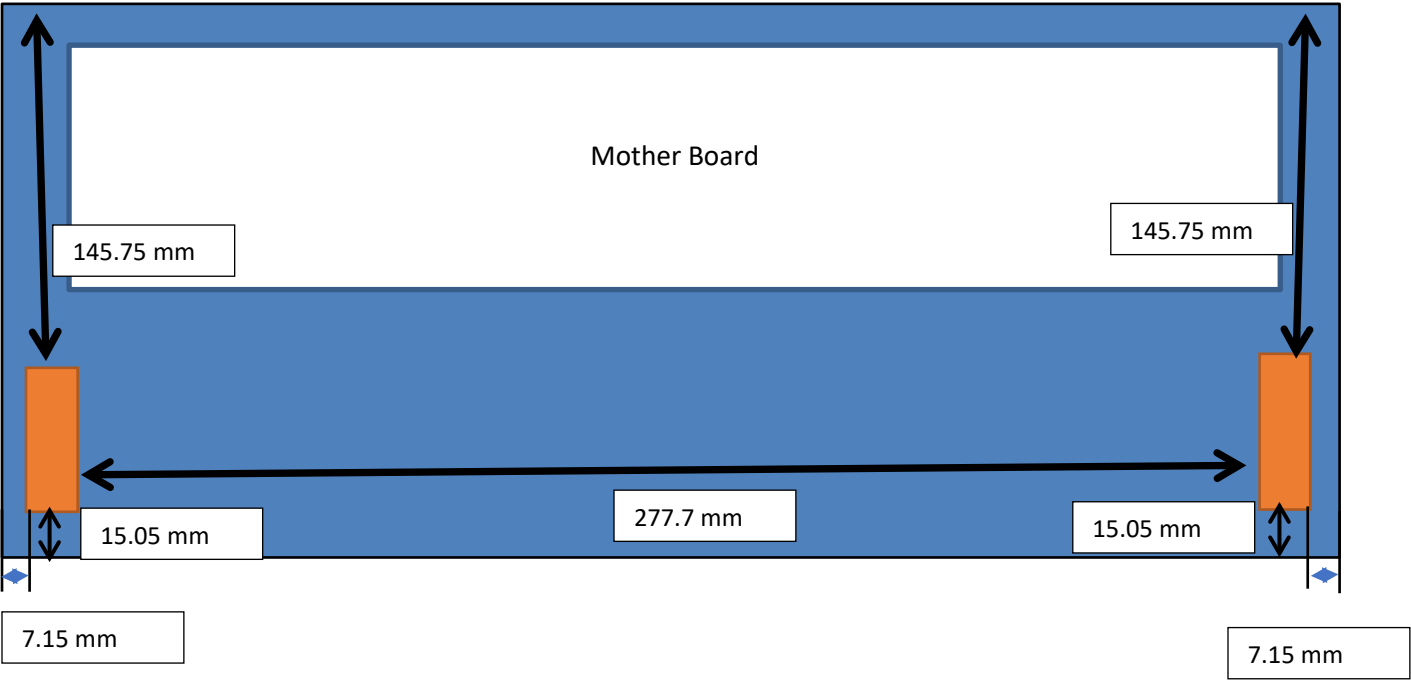


B.2 Antenna dimensional information for SAR evaluation


Include a dimensioned photo(s) or dimensioned drawing(s) showing the distance (mm) between the transmit antennas and the user. For notebook/laptop hosts show lapheld position (example below). For tablet hosts show all orientations including lapheld, primary & secondary portrait, primary & secondary landscape positions. Include a description of any proximity sensors or power throttling implementations that limit or exclude use of any host orientation.

Antennas on the panel section


NB mode

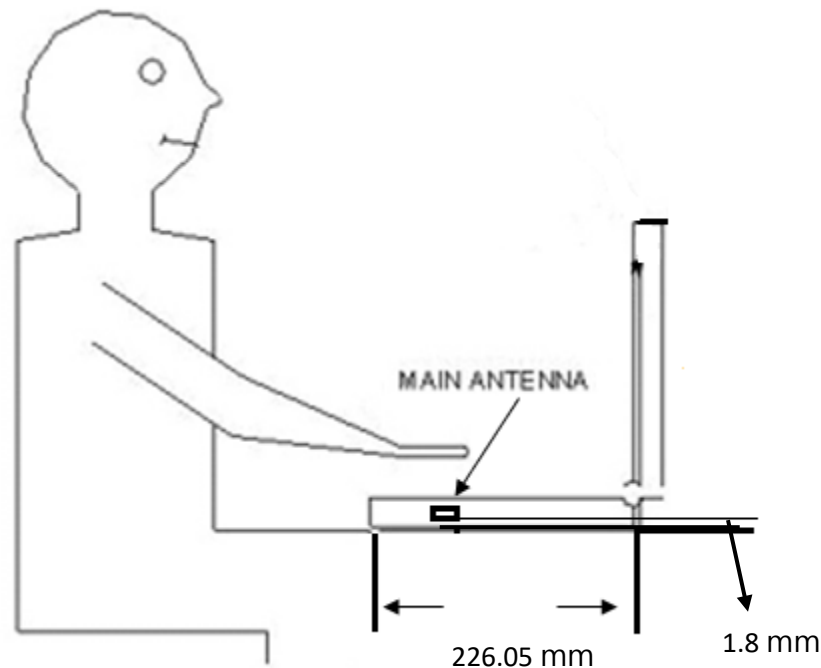

Measuring Surface	Antenna	Separation Distance(antenna-to- Surface)(mm)	1g SAR
Bottom Side	Main	1.8	FCC/ISED
	Aux	1.8	FCC/ISED

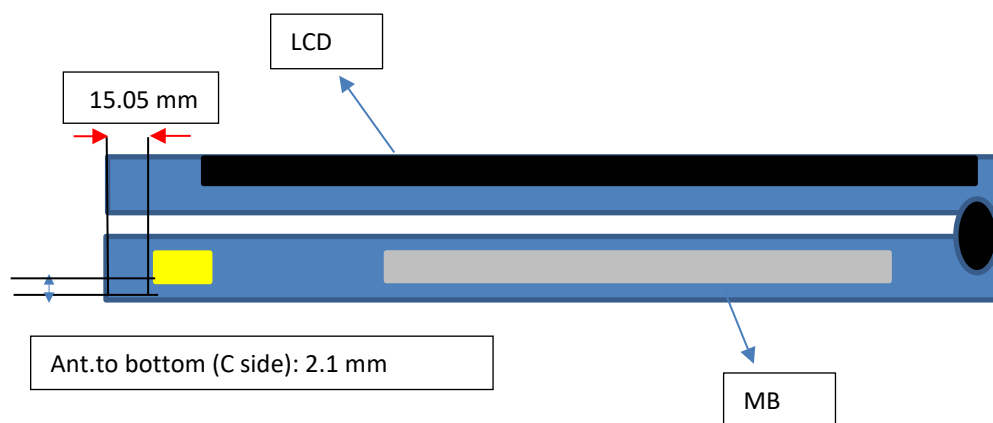

Antennas on the keyboard section

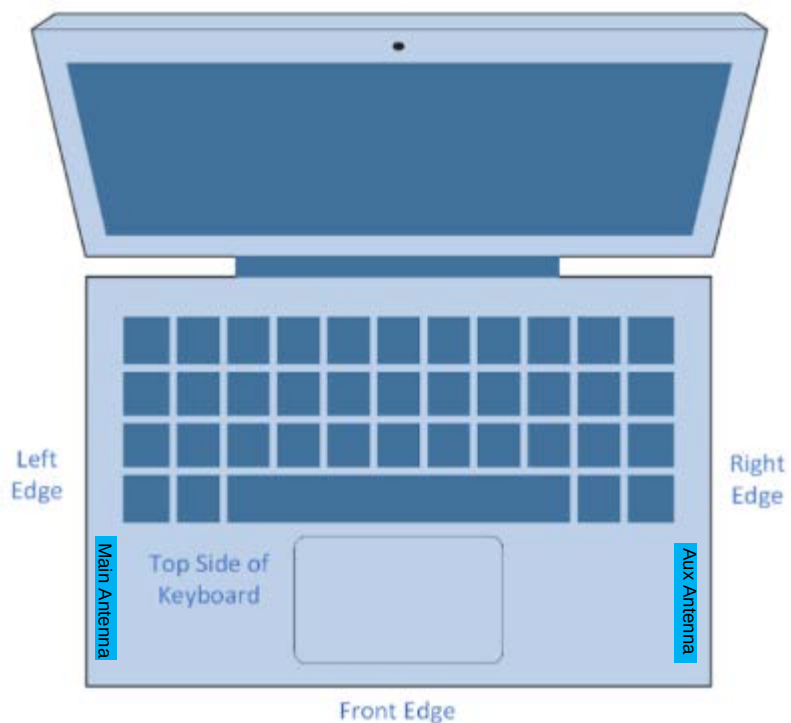

Measuring Surface	Antenna	Separation Distance(antenna-to-Surface)(mm)	1g or 10g SAR
Bottom Side	Main	1.8	1g (FCC/ISED)
	Aux	1.8	1g (FCC/ISED)
Front Edge	Main	15.05	1g (ISED)
	Aux	15.05	1g (ISED)
Left Edge	Main	7.15	10g (ISED)
	Aux	295.85	10g (ISED)
Right Edge	Main	295.85	10g (ISED)
	Aux	7.15	10g (ISED)
Top side of Keyboard	Main	2.1	10g (ISED)
	Aux	2.1	10g (ISED)