

Supplemental “Transmit Simultaneously” Test Report

Report No.: RFBCMA-WTW-P22070299-2

FCC ID: RAXWE7224443

Test Model: CE1000A

Received Date: 2022/4/25

Test Date: 2022/7/22 ~ 2022/7/26

Issued Date: 2022/11/16

Applicant: Arcadyan Technology Corporation

Address: No.8, Sec.2, Guangfu Rd., Hsinchu City 30071, Taiwan, R.O.C.

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan.

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

**FCC Registration /
Designation Number:** 723255 / TW2022 for Test Location



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate of Conformity.....	4
2 Summary of Test Results.....	5
2.1 Measurement Uncertainty	5
2.2 Modification Record	5
3 General Information.....	6
3.1 General Description of EUT	6
3.1.1 Test Mode Applicability and Tested Channel Detail.....	10
3.2 Description of Support Units	12
3.2.1 Configuration of System under Test	13
4 Test Types and Results	14
4.1 Radiated Emission and Bandedge Measurement.....	14
4.1.1 Limits of Radiated Emission and Bandedge Measurement	14
4.1.2 Test Instruments	15
4.1.3 Test Procedures.....	17
4.1.4 Deviation from Test Standard	17
4.1.5 Test Setup.....	18
4.1.6 EUT Operating Conditions.....	19
4.1.7 Test Results (Mode 1).....	20
4.1.8 Test Results (Mode 2).....	23
4.2 Conducted Emission Measurement	26
4.2.1 Limits of Conducted Emission Measurement	26
4.2.2 Test Instruments	26
4.2.3 Test Procedures.....	27
4.2.4 Deviation from Test Standard	27
4.2.5 Test Setup.....	27
4.2.6 EUT Operating Conditions.....	27
4.2.7 Test Results (Mode 1).....	28
4.2.8 Test Results (Mode 2).....	30
4.3 Conducted Out of Band Emission Measurement	32
4.3.1 Limits of Conducted Out of Band Emission Measurement	32
4.3.2 Test Setup.....	32
4.3.3 Test Instruments	32
4.3.4 Test Procedures.....	32
4.3.5 Deviation from Test Standard	32
4.3.6 EUT Operating Conditions.....	32
4.3.7 Test Results	32
5 Pictures of Test Arrangements.....	35
Appendix – Information of the Testing Laboratories	36

Release Control Record

Issue No.	Description	Date Issued
RFBCMA-WTW-P22070299-2	Original release.	2022/11/16

1 Certificate of Conformity

Product: Verizon Wi-Fi Extender

Brand: Verizon

Test Model: CE1000A

Sample Status: Engineering sample

Applicant: Arcadyan Technology Corporation

Test Date: 2022/7/22 ~ 2022/7/26

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)

47 CFR FCC Part 15, Subpart E (Section 15.407)

ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Cherry Chuo, **Date:** 2022/11/16

Cherry Chuo / Specialist

Approved by : May Chen, **Date:** 2022/11/16

May Chen / Manager

2 Summary of Test Results

FCC Part 15, Subpart C, E (SECTION 15.247, 15.407)			
FCC Clause	Test Item	Result	Remarks
15.207 15.407(b)(6)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -9.10dB at 0.55234MHz.
15.205 / 15.209 / 15.247(d) 15.407(b) (1/2/3/4(i/ii)/6)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -6.6dB at 730.18MHz.

Note:

Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.9 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.1 dB
	30MHz ~ 1GHz	5.1 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.1 dB
	18GHz ~ 40GHz	5.3 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Verizon Wi-Fi Extender
Brand	Verizon
Test Model	CE1000A
Status of EUT	Engineering sample
Power Supply Rating	12Vdc from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT in 2.4GHz 1024QAM for OFDMA in 11ax mode
Modulation Technology	DSSS, OFDM, OFDMA
Operating Frequency	2.4GHz: 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20): 11 802.11n (HT40), VHT40, 802.11ax (HE40): 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20): 9 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40): 4 802.11ac (VHT80), 802.11ax (HE80): 2
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x1
Data Cable	Refer to Note

Note:

1. The EUT must be supplied with a power adapter and following below table:

Adapter 1		
Brand	Model	Specification
DELTA	ADH-60BW B	AC Input : 120V ,1.2A, 60Hz DC Output : 12V ,5A ,60W DC Output Cable : 1.8 M , non-shielded cable Plug : US

Adapter 2 (Only for test, not for sale)		
Brand	Model	Specification
Lucent Trans	1A98-1250-02	AC Input : 100~120V ,1.2A, 50/60Hz DC Output : 12V ,5A ,60W DC Output Cable : 1.8 M , non-shielded cable Plug : US

Note:

1. From the above adapters, the worst AC Power Conducted Emissions was found in **Adapter 2**.
Therefore only the test data of the mode was recorded in this report.
2. From the above adapters, the worst Radiated Emission below 1GHz was found in **Adapter 1**.
Therefore only the test data of the mode was recorded in this report.

2. The EUT uses following accessories.

RJ45 Cable		Specification
Signal Line : 3 m , non-shielded		

3. The EUT has below radios as following table:

Radio 1	Radio 2	Radio 3	Radio 4
WLAN(2.4GHz)	WLAN 5GHz (low band) + 5GHz (full band)	WLAN 5GHz (high band)+ WLAN 6GHz	WLAN 5GHz Sensor (RX Only)

4. Simultaneously transmission condition.

Condition	Technology
1	WLAN (2.4 GHz) + WLAN (5 GHz) _Low Band + WLAN (5 GHz)_High Band
2	WLAN (2.4 GHz) + WLAN (5 GHz) _ Full Band

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

5. The antennas provided to the EUT, please refer to the following table:

Antenna NO.	Antenna Net Gain(dBi)	Frequency range	Antenna Type	Connector Type	Cable Loss (dB)	Cable Length (mm)
2.4G/5GL DB ANT 1	0.9	2.4~2.4835GHz	PIFA	ipex(MHF)	0.72	115
	0.6	5.15~5.25GHz			1	
	0.6	5.25~5.35GHz			1	
	1	5.47~5.725GHz			1.0	
	1	5.725~5.85GHz			1.0	
2.4G/5GL DB ANT 2	0.5	2.4~2.4835GHz	PIFA	ipex(MHF)	0.88	140
	0.7	5.15~5.25GHz			1.22	
	0.7	5.25~5.35GHz			1.22	
	2.2	5.47~5.725GHz			1.26	
	2.2	5.725~5.85GHz			1.26	
2.4G/5GL DB ANT 3	1.3	2.4~2.4835GHz	PIFA	ipex(MHF)	0.71	113
	0	5.15~5.25GHz			0.99	
	0	5.25~5.35GHz			0.99	
	0.4	5.47~5.725GHz			1.02	
	0.4	5.725~5.85GHz			1.02	
2.4G/5GL DB ANT 4	0.3	2.4~2.4835GHz	PIFA	ipex(MHF)	0.61	98
	3.1	5.15~5.25GHz			0.86	
	3.1	5.25~5.35GHz			0.86	
	3	5.47~5.725GHz			0.88	
	3	5.725~5.85GHz			0.88	
5GH/6E ANT 1	1.3	5.47~5.725GHz	PIFA	ipex(MHF)	1.26	140
	1.3	5.725~5.85GHz			1.26	
	0.7	5.925GHz~6.425GHz			1.4	
	0.7	6.425GHz~6.525GHz			1.4	
	0.7	6.525GHz~6.875Hz			1.45	
5GH/6E ANT 2	0.7	6.875Hz~7.125GHz			1.56	
	3.2	5.47~5.725GHz	PIFA	ipex(MHF)	1.26	140
	3.2	5.725~5.85GHz			1.26	
	1.1	5.925GHz~6.425GHz			1.4	
	1.1	6.425GHz~6.525GHz			1.4	
	1.1	6.525GHz~6.875Hz			1.45	
5GH/6E ANT 3	1.1	6.875Hz~7.125GHz			1.56	
	1.9	5.47~5.725GHz	PIFA	ipex(MHF)	0.63	70
	1.9	5.725~5.85GHz			0.63	
	2.8	5.925GHz~6.425GHz			0.7	
	2.8	6.425GHz~6.525GHz			0.7	
	2.8	6.525GHz~6.875Hz			0.73	
5GH/6E ANT 4	2.8	6.875Hz~7.125GHz			0.78	
	0.2	5.47~5.725GHz	PIFA	ipex(MHF)	0.52	58
	0.2	5.725~5.85GHz			0.52	
	0.6	5.925GHz~6.425GHz			0.58	
	0.6	6.425GHz~6.525GHz			0.58	
	0.6	6.525GHz~6.875Hz			0.6	
	0.6	6.875Hz~7.125GHz			0.65	

Antenna NO.	Antenna Net Gain(dBi)	Frequency range	Antenna Type	Connector Type	Cable Loss (dB)	Cable Length (mm)
5GHz Sensor ANT	0.15	5.15~5.25GHz			1.22	
	0.15	5.25~5.35GHz			1.22	
	0.15	5.47~5.725GHz	Dipole	ipex(MHF)	1.26	
	0.15	5.725~5.85GHz			1.26	140

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

6. The EUT incorporates a MIMO function:

2.4GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11b	4TX	4RX
802.11g	4TX	4RX
802.11n (HT20)	4TX	4RX
802.11n (HT40)	4TX	4RX
VHT20	4TX	4RX
VHT40	4TX	4RX
802.11ax (HE20)	4TX	4RX
802.11ax (HE40)	4TX	4RX
5 GHz_High Band (Radio 3)		
Modulation Mode	TX & RX Configuration	
802.11a	4TX	4RX
802.11n (HT20)	4TX	4RX
802.11n (HT40)	4TX	4RX
802.11ac (VHT20)	4TX	4RX
802.11ac (VHT40)	4TX	4RX
802.11ac (VHT80)	4TX	4RX
802.11ac (VHT160)	4TX	4RX
802.11ax (HE20)	4TX	4RX
802.11ax (HE40)	4TX	4RX
802.11ax (HE80)	4TX	4RX
802.11ax (HE160)	4TX	4RX
5 GHz_Low Band & Full Band (Radio 2)		
Modulation Mode	TX & RX Configuration	
802.11a	4TX	4RX
802.11n (HT20)	4TX	4RX
802.11n (HT40)	4TX	4RX
802.11ac (VHT20)	4TX	4RX
802.11ac (VHT40)	4TX	4RX
802.11ac (VHT80)	4TX	4RX
802.11ax (HE20)	4TX	4RX
802.11ax (HE40)	4TX	4RX
802.11ax (HE80)	4TX	4RX

Note:

1. All of modulation mode support beamforming function except 802.11a/b/g modulation mode.

7. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.1.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE≥1G	RE<1G	PLC	OB	
-	√	√	√	√	-

Where **RE≥1G:** Radiated Emission above 1GHz **RE<1G:** Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **OB:** Conducted Out-Band Emission Measurement

Radiated Emission Test (Above 1GHz):

- The tested configurations represent the worst-case mode from all possible combinations by the maximum power.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
1	2.4 GHz: 802.11ax (HE20) + 5GHz (low band): 802.11ax (HE40) + 5GHz (high band): 802.11ax (HE80)	1 to 11	6	OFDMA	BPSK
		38 to 46	46	OFDMA	BPSK
		149 to 165	155	OFDMA	BPSK
2	2.4 GHz: 802.11ax (HE20) + 5GHz: 802.11ax (HE20)	1 to 11	6	OFDMA	BPSK
		36 to 48 149 to 165	165	OFDMA	BPSK

Radiated Emission Test (Below 1GHz):

- The tested configurations represent the worst-case mode from all possible combinations by the maximum power.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
1	2.4 GHz: 802.11ax (HE20) + 5GHz (low band): 802.11ax (HE40) + 5GHz (high band): 802.11ax (HE80)	1 to 11	6	OFDMA	BPSK
		38 to 46	46	OFDMA	BPSK
		149 to 165	155	OFDMA	BPSK
2	2.4 GHz: 802.11ax (HE20) + 5GHz: 802.11ax (HE20)	1 to 11	6	OFDMA	BPSK
		36 to 48 149 to 165	165	OFDMA	BPSK

Power Line Conducted Emission Test:

- The tested configurations represent the worst-case mode from all possible combinations by the maximum power.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
1	2.4 GHz: 802.11ax (HE20) + 5GHz (low band): 802.11ax (HE40) + 5GHz (high band): 802.11ax (HE80)	1 to 11	6	OFDMA	BPSK
		38 to 46	46	OFDMA	BPSK
		149 to 165	155	OFDMA	BPSK
2	2.4 GHz: 802.11ax (HE20) + 5GHz: 802.11ax (HE20)	1 to 11	6	OFDMA	BPSK
		36 to 48 149 to 165	165	OFDMA	BPSK

Conducted Out-Band Emission Measurement:

- The tested configurations represent the worst-case mode from all possible combinations by the maximum power.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
1	2.4 GHz: 802.11ax (HE20) + 5GHz (low band): 802.11ax (HE40)	1 to 11	6	OFDMA	BPSK
		38 to 46	46	OFDMA	BPSK
2	2.4 GHz: 802.11ax (HE20) + 5GHz: 802.11ax (HE20)	1 to 11	6	OFDMA	BPSK
		36 to 48 149 to 165	165	OFDMA	BPSK

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested By
RE≥1G	23deg. C, 69%RH	120Vac, 60Hz	Sampon Chen
RE<1G	25deg. C, 73%RH	120Vac, 60Hz	Sampon Chen
PLC	25deg. C, 65%RH	120Vac, 60Hz	Sampon Chen
OB	25deg. C, 60%RH	120Vac, 60Hz	Pirar Hsieh


3.2 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Laptop	Lenovo	20U5S01X00 L14	PF-1ANPYA	N/A	Provided by Lab
B	Switch	D-Link	DGS-1005D	DR8WC92000523	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	Coaxial Cable	1	10	Yes	0	Provided by Lab
2	RJ-45 Cable	1	10	No	0	Provided by Lab
3	RJ-45 Cable	1	10	No	0	Provided by Lab
4	DC Cable	1	1.8	No	1	Supplied by applicant
5	RJ-45 Cable	1	3	No	0	Supplied by applicant

3.2.1 Configuration of System under Test

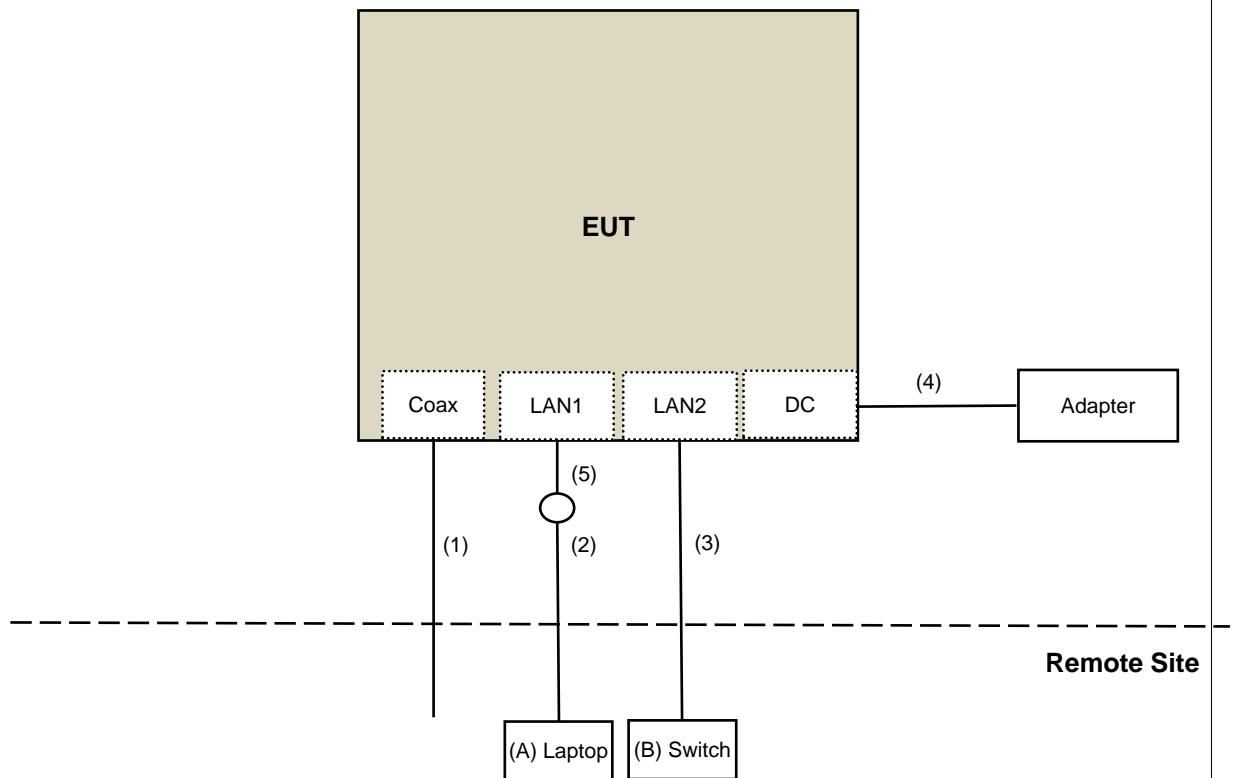

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB μ V/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To		Limit	
789033 D02 General UNII Test Procedure New Rules v02r01		Field Strength at 3m	
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)	PK:-27 (dBm/MHz)	PK:68.2(dB μ V/m)
5250~5350 MHz	15.407(b)(2)		
5470~5725 MHz	15.407(b)(3)		
5725~5850 MHz	15.407(b)(4)(i)	PK:-27 (dBm/MHz) ^{*1} PK:10 (dBm/MHz) ^{*2} PK:15.6 (dBm/MHz) ^{*3} PK:27 (dBm/MHz) ^{*4}	PK: 68.2(dB μ V/m) ^{*1} PK:105.2 (dB μ V/m) ^{*2} PK: 110.8(dB μ V/m) ^{*3} PK:122.2 (dB μ V/m) ^{*4}
		Emission limits in section 15.247(d)	

^{*1} beyond 75 MHz or more above of the band edge.
^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.
^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.
^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \quad \mu\text{V/m, where } P \text{ is the eirp (Watts).}$$

4.1.2 Test Instruments

For Radiated Emission test:

Description & Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Test Receiver R&S	ESR3	102528	2022/2/25	2023/2/24
Spectrum Analyzer Keysight	N9020B	MY60112410	2022/3/13	2023/3/12
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA
Pre_Amplifier Agilent	8447D	2944A10636	2022/3/19	2023/3/18
LOOP ANTENNA Electro-Metrics	EM-6879	264	2022/3/18	2023/3/17
RF Coaxial Cable JYEBO	5D-FB	LOOPCAB-001	2022/1/6	2023/1/5
RF Coaxial Cable JYEBO	5D-FB	LOOPCAB-002	2022/1/6	2023/1/5
Pre_Amplifier EMCI	EMC330N	980538	2022/4/25	2023/4/24
Bilog Antenna Schwarzbeck	VULB 9168	9168-0842	2021/10/26	2022/10/25
RF Coaxial Cable COMMATE/PEWC	8D	966-5-1	2022/4/25	2023/4/24
RF Coaxial Cable COMMATE/PEWC	8D	966-5-2	2022/4/25	2023/4/24
RF Coaxial Cable COMMATE/PEWC	8D	966-5-3	2022/4/25	2023/4/24
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-ATT5-02	2022/1/10	2023/1/9
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-1819	2021/11/14	2022/11/13
Pre_Amplifier EMCI	EMC12630SE	980509	2022/4/25	2023/4/24
RF Coaxial Cable EMCI	EMC104-SM-SM-1500	180503	2022/4/25	2023/4/24
RF Coaxial Cable EMCI	EMC104-SM-SM-2000	180501	2022/4/25	2023/4/24
RF Coaxial Cable EMCI	EMC104-SM-SM-6000	180506	2022/4/25	2023/4/24
Pre_Amplifier EMCI	EMC184045SE	980387	2022/1/10	2023/1/9
Horn Antenna Schwarzbeck	BBHA 9170	9170-739	2021/11/14	2022/11/13
RF Cable-Frequency range: 1-40GHz EMCI	EMC102-KM-KM-1200	160924	2022/1/10	2023/1/9
RF Coaxial Cable EMCI	EMC-KM-KM-4000	200214	2022/3/8	2023/3/7

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 5.
3. Tested Date: 2022/7/22 ~ 2022/7/25

For other test items:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	101516	2022/3/7	2023/3/6
Attenuator WOKEN	MDCS18N-10	MDCS18N-10-01	2022/4/5	2023/4/4
Software	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A

- NOTE:**
1. The test was performed in Oven room 2.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: 2022/7/26

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

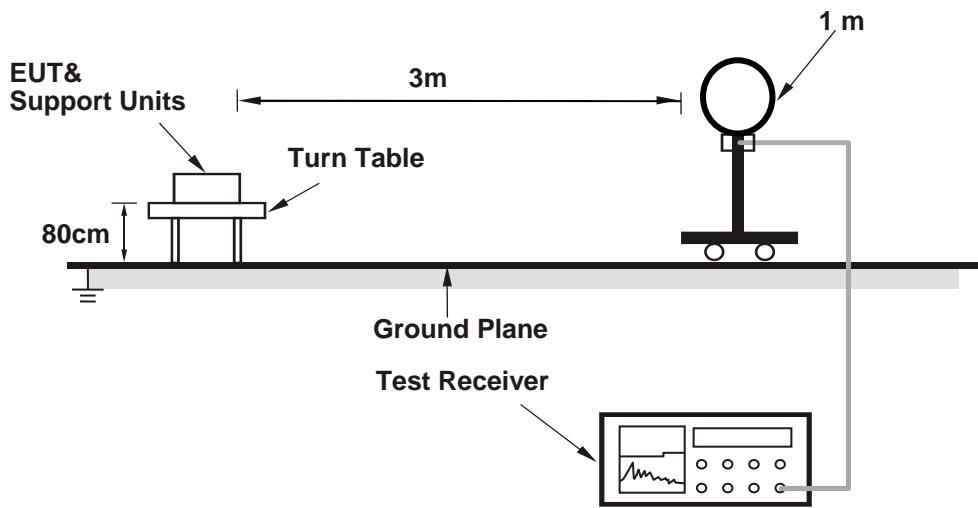

For Radiated emission 30MHz to 1GHz

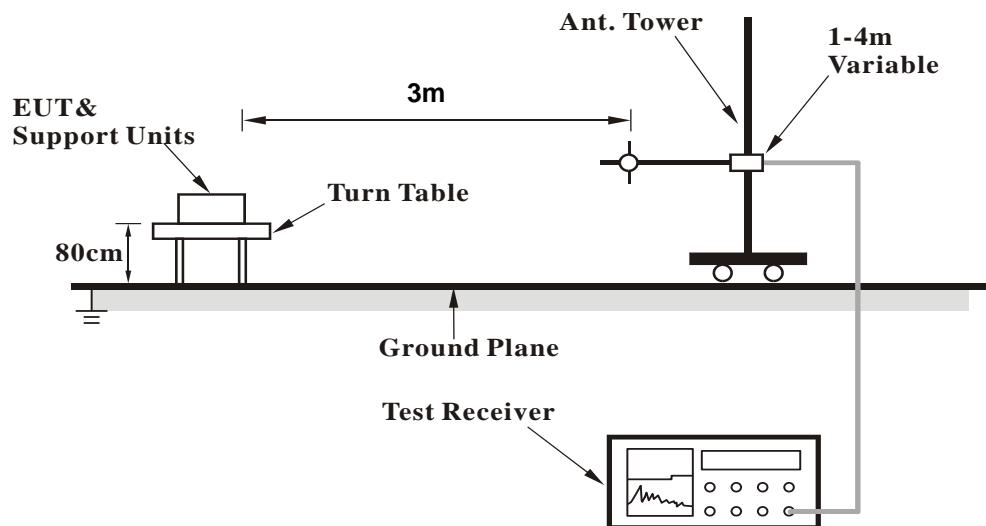

For Radiated emission above 1GHz

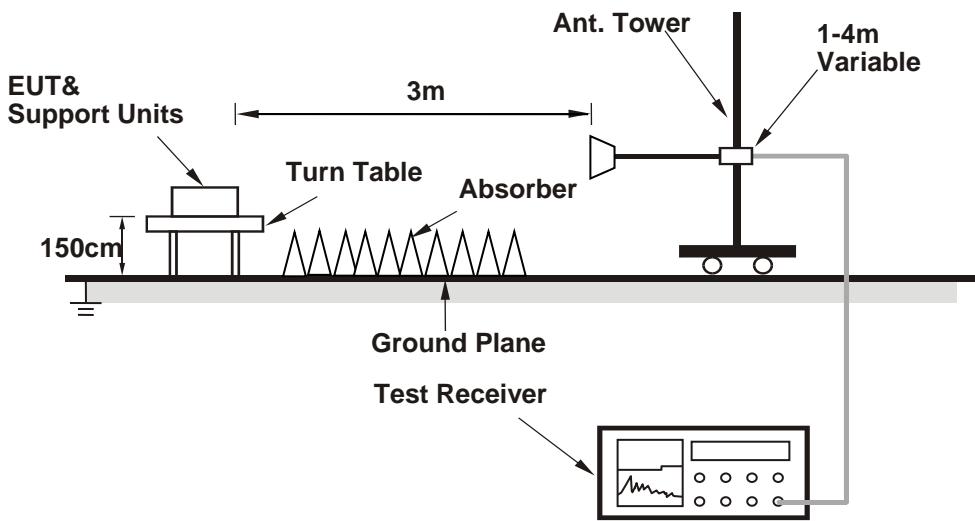

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Connected the EUT with the Laptop which is placed on remote site.
- Controlling software (QATool_v0.0.2.73) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results (Mode 1)

Above 1GHz Data:

FREQUENCY RANGE		1GHz ~ 40GHz		DETECTOR FUNCTION		Peak (PK) Average (AV)	
-----------------	--	--------------	--	-------------------	--	---------------------------	--

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	40.9 PK	74.0	-33.1	1.53 H	28	39.4	1.5
2	4874.00	31.0 AV	54.0	-23.0	1.53 H	28	29.5	1.5
3	7311.00	42.5 PK	74.0	-31.5	1.45 H	41	35.3	7.2
4	7311.00	30.5 AV	54.0	-23.5	1.45 H	41	23.3	7.2
5	#10460.00	57.0 PK	68.2	-11.2	1.57 H	180	45.0	12.0
6	11550.00	58.5 PK	74.0	-15.5	1.59 H	232	46.2	12.3
7	11550.00	44.6 AV	54.0	-9.4	1.59 H	232	32.3	12.3
8	15690.00	57.3 PK	74.0	-16.7	1.58 H	123	45.4	11.9
9	15690.00	43.8 AV	54.0	-10.2	1.58 H	123	31.9	11.9
10	#17325.00	43.5 PK	68.2	-24.7	2.32 H	228	26.3	17.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	38.4 PK	74.0	-35.6	2.86 V	236	36.9	1.5
2	4874.00	29.9 AV	54.0	-24.1	2.86 V	236	28.4	1.5
3	7311.00	42.0 PK	74.0	-32.0	1.59 V	44	34.8	7.2
4	7311.00	30.9 AV	54.0	-23.1	1.59 V	44	23.7	7.2
5	#10460.00	48.6 PK	68.2	-19.6	1.34 V	241	36.6	12.0
6	11550.00	57.2 PK	74.0	-16.8	1.55 V	0	44.9	12.3
7	11550.00	44.8 AV	54.0	-9.2	1.55 V	0	32.5	12.3
8	15690.00	52.9 PK	74.0	-21.1	1.39 V	201	41.0	11.9
9	15690.00	41.0 AV	54.0	-13.0	1.39 V	201	29.1	11.9
10	#17325.00	43.0 PK	68.2	-25.2	1.38 V	284	25.8	17.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.


Below 1GHz Data:

FREQUENCY RANGE		9kHz ~ 1GHz		DETECTOR FUNCTION		Quasi-Peak (QP)	
-----------------	--	-------------	--	-------------------	--	-----------------	--

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	40.81	20.1 QP	40.0	-19.9	1.00 H	224	33.1	-13.0
2	74.23	27.2 QP	40.0	-12.8	3.00 H	264	43.2	-16.0
3	164.39	23.9 QP	43.5	-19.6	2.00 H	71	36.9	-13.0
4	231.51	26.1 QP	46.0	-19.9	1.50 H	229	41.4	-15.3
5	599.30	25.3 QP	46.0	-20.7	1.50 H	91	30.5	-5.2
6	745.31	32.4 QP	46.0	-13.6	1.00 H	101	35.3	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

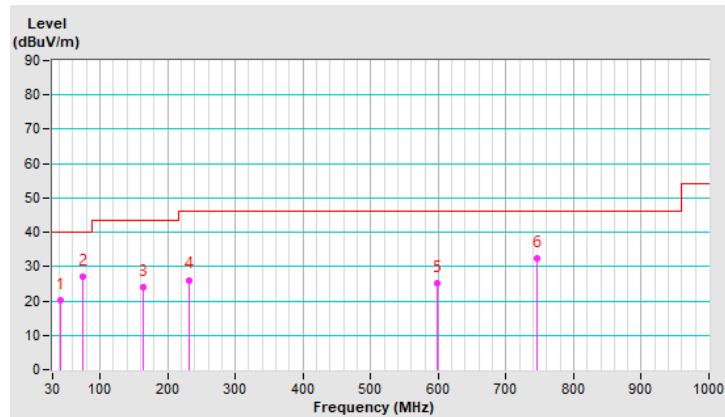


FREQUENCY RANGE	9kHz ~ 1GHz	DETECTOR FUNCTION	Quasi-Peak (QP)
------------------------	-------------	--------------------------	-----------------

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	44.17	32.1 QP	40.0	-7.9	1.00 V	15	45.0	-12.9
2	87.23	32.1 QP	40.0	-7.9	1.00 V	251	50.7	-18.6
3	164.23	31.6 QP	43.5	-11.9	1.50 V	201	44.6	-13.0
4	259.41	31.9 QP	46.0	-14.1	1.50 V	184	45.7	-13.8
5	399.89	32.9 QP	46.0	-13.1	1.50 V	298	42.8	-9.9
6	730.18	39.4 QP	46.0	-6.6	1.00 V	238	42.7	-3.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

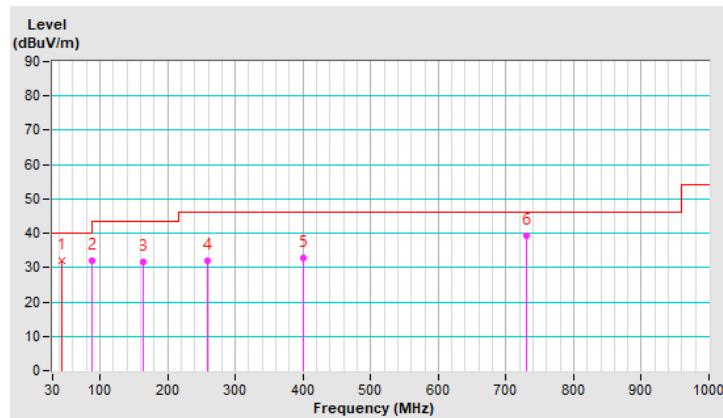

4.1.8 Test Results (Mode 2)

Above 1GHz Data:

FREQUENCY RANGE		1GHz ~ 40GHz		DETECTOR FUNCTION		Peak (PK) Average (AV)	
-----------------	--	--------------	--	-------------------	--	---------------------------	--

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	39.7 PK	74.0	-34.3	1.59 H	54	38.2	1.5
2	4874.00	30.1 AV	54.0	-23.9	1.59 H	54	28.6	1.5
3	7311.00	43.9 PK	74.0	-30.1	1.41 H	29	36.7	7.2
4	7311.00	31.5 AV	54.0	-22.5	1.41 H	29	24.3	7.2
5	11650.00	55.9 PK	74.0	-18.1	1.64 H	165	44.0	11.9
6	11650.00	44.7 AV	54.0	-9.3	1.64 H	165	32.8	11.9
7	#17475.00	60.0 PK	68.2	-8.2	2.36 H	273	41.5	18.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	38.4 PK	74.0	-35.6	3.05 V	224	36.9	1.5
2	4874.00	29.2 AV	54.0	-24.8	3.05 V	224	27.7	1.5
3	7311.00	42.0 PK	74.0	-32.0	1.65 V	42	34.8	7.2
4	7311.00	30.7 AV	54.0	-23.3	1.65 V	42	23.5	7.2
5	11650.00	58.9 PK	74.0	-15.1	1.46 V	30	47.0	11.9
6	11650.00	46.9 AV	54.0	-7.1	1.46 V	30	35.0	11.9
7	#17475.00	55.8 PK	68.2	-12.4	1.47 V	234	37.3	18.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.


Below 1GHz Data:

FREQUENCY RANGE		9kHz ~ 1GHz		DETECTOR FUNCTION		Quasi-Peak (QP)	
-----------------	--	-------------	--	-------------------	--	-----------------	--

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	40.98	20.9 QP	40.0	-19.1	1.00 H	230	33.9	-13.0
2	74.58	30.1 QP	40.0	-9.9	3.00 H	270	46.1	-16.0
3	164.30	23.9 QP	43.5	-19.6	2.00 H	70	36.9	-13.0
4	230.61	29.4 QP	46.0	-16.6	1.50 H	231	44.8	-15.4
5	598.80	29.4 QP	46.0	-16.6	1.50 H	94	34.6	-5.2
6	742.30	35.8 QP	46.0	-10.2	1.00 H	100	38.9	-3.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

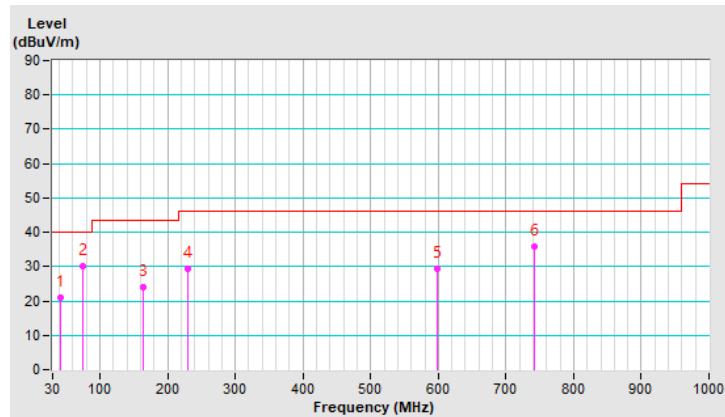


FREQUENCY RANGE	9kHz ~ 1GHz	DETECTOR FUNCTION	Quasi-Peak (QP)
------------------------	-------------	--------------------------	-----------------

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	44.16	31.9 QP	40.0	-8.1	1.00 V	19	44.8	-12.9
2	85.32	31.4 QP	40.0	-8.6	1.00 V	250	49.8	-18.4
3	163.41	31.5 QP	43.5	-12.0	1.50 V	201	44.3	-12.8
4	259.41	30.1 QP	46.0	-15.9	1.50 V	193	43.9	-13.8
5	401.32	32.3 QP	46.0	-13.7	1.50 V	299	42.1	-9.8
6	728.30	37.4 QP	46.0	-8.6	1.00 V	235	40.8	-3.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

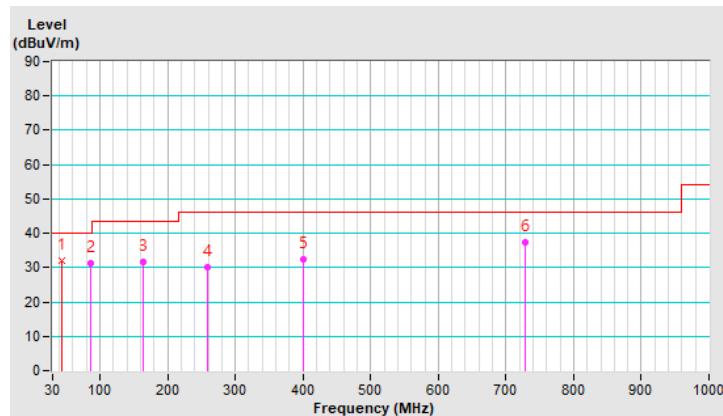

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
TEST RECEIVER R&S	ESCS 30	847124/029	2021/10/13	2022/10/12
LISN R&S	ESH3-Z5	848773/004	2021/10/29	2022/10/28
50 ohms Terminator NA	50	3	2021/10/27	2022/10/26
RF Coaxial Cable JYEBO	5D-FB	COCCAB-001	2021/9/25	2022/9/24
Fixed attenuator STI	STI02-2200-10	005	2021/8/27	2022/8/26
Software BVADT	BVADT_Cond_V7.3.7.4	NA	NA	NA

Note: 1. The test was performed in Conduction 1.

2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

3. Tested Date: 2022/7/26

4.2.3 Test Procedures


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

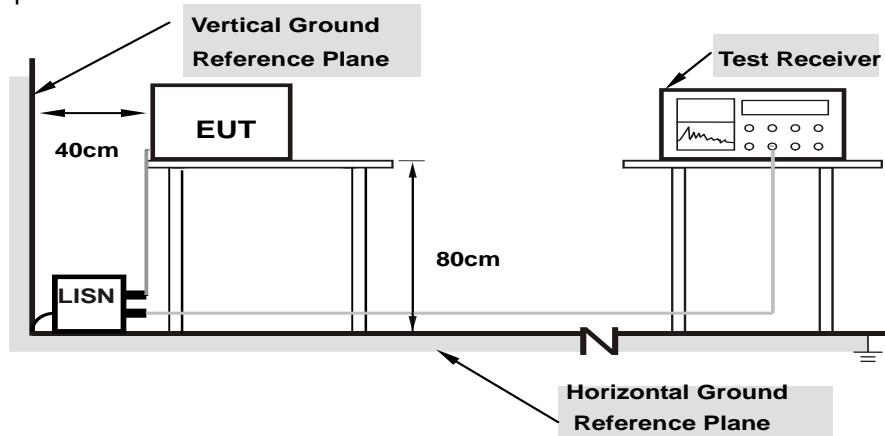

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results (Mode 1)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17734	10.05	31.37	19.13	41.42	29.18	64.61	54.61	-23.19	-25.43
2	0.55234	10.07	28.13	26.83	38.20	36.90	56.00	46.00	-17.80	-9.10
3	0.96250	10.11	17.11	12.68	27.22	22.79	56.00	46.00	-28.78	-23.21
4	3.21484	10.26	17.66	10.12	27.92	20.38	56.00	46.00	-28.08	-25.62
5	19.87109	11.31	19.64	12.60	30.95	23.91	60.00	50.00	-29.05	-26.09
6	23.63672	11.38	23.46	17.61	34.84	28.99	60.00	50.00	-25.16	-21.01

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

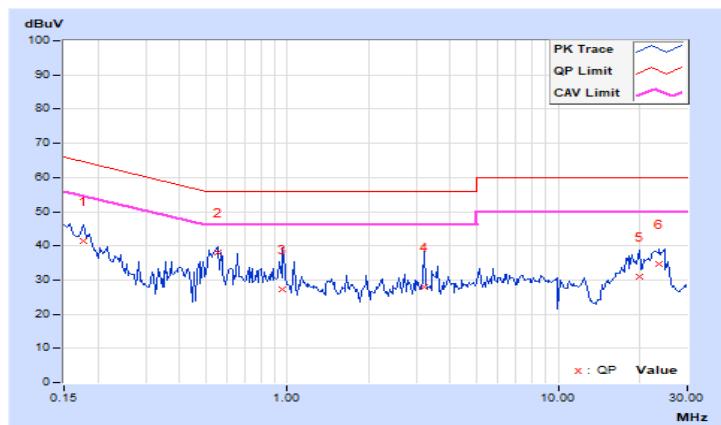


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	-----------------------------------

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.04	36.10	20.16	46.14	30.20	65.79	55.79	-19.65	-25.59
2	0.25938	10.05	19.16	7.96	29.21	18.01	61.45	51.45	-32.24	-33.44
3	0.47813	10.06	14.02	6.35	24.08	16.41	56.37	46.37	-32.29	-29.96
4	1.65625	10.15	7.57	-6.90	17.72	3.25	56.00	46.00	-38.28	-42.75
5	3.42969	10.26	18.23	8.35	28.49	18.61	56.00	46.00	-27.51	-27.39
6	17.02734	10.97	25.66	20.22	36.63	31.19	60.00	50.00	-23.37	-18.81

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

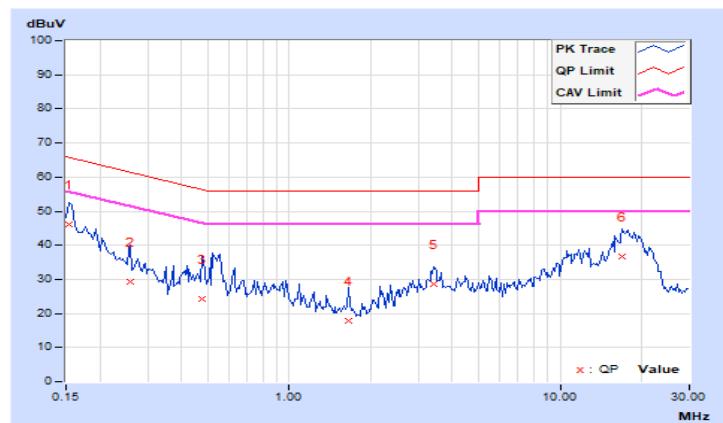


4.2.8 Test Results (Mode 2)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	10.04	32.64	19.07	42.68	29.11	65.58	55.58	-22.90	-26.47
2	0.25156	10.05	21.00	13.82	31.05	23.87	61.71	51.71	-30.66	-27.84
3	0.66563	10.08	18.07	11.72	28.15	21.80	56.00	46.00	-27.85	-24.20
4	0.93906	10.10	17.07	10.79	27.17	20.89	56.00	46.00	-28.83	-25.11
5	18.85938	11.25	20.66	13.94	31.91	25.19	60.00	50.00	-28.09	-24.81
6	23.44922	11.38	23.83	17.74	35.21	29.12	60.00	50.00	-24.79	-20.88

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

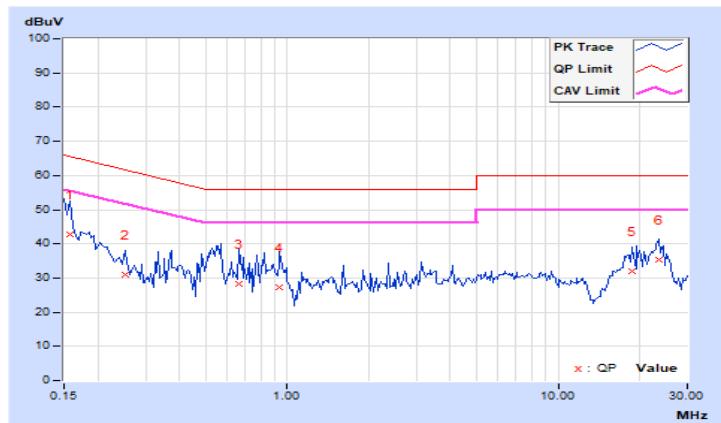


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	-----------------------------------

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	10.04	30.84	15.86	40.88	25.90	65.38	55.38	-24.50	-29.48
2	0.21250	10.05	25.16	12.85	35.21	22.90	63.11	53.11	-27.90	-30.21
3	0.54844	10.07	24.94	22.48	35.01	32.55	56.00	46.00	-20.99	-13.45
4	0.93906	10.10	11.02	2.64	21.12	12.74	56.00	46.00	-34.88	-33.26
5	3.14453	10.24	14.53	6.15	24.77	16.39	56.00	46.00	-31.23	-29.61
6	17.71484	11.00	26.32	19.96	37.32	30.96	60.00	50.00	-22.68	-19.04

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

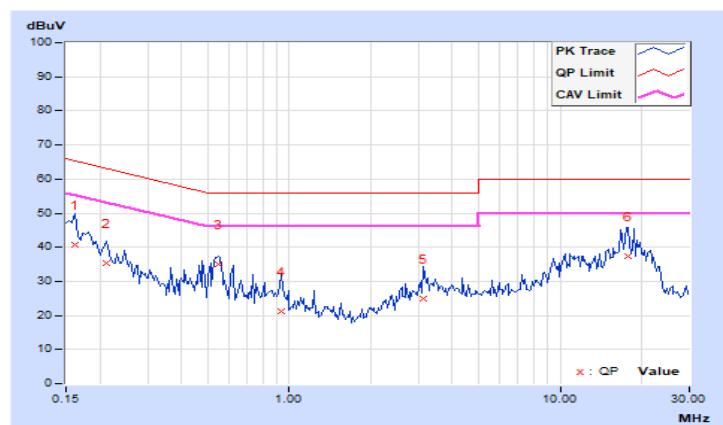


4.3 Conducted Out of Band Emission Measurement

4.3.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.3.2 Test Setup

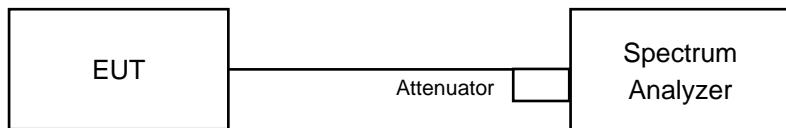

4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedures

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.3.5 Deviation from Test Standard





No deviation.


4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.3.7 Test Results

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

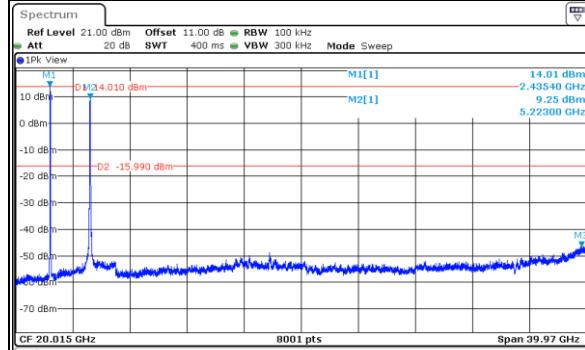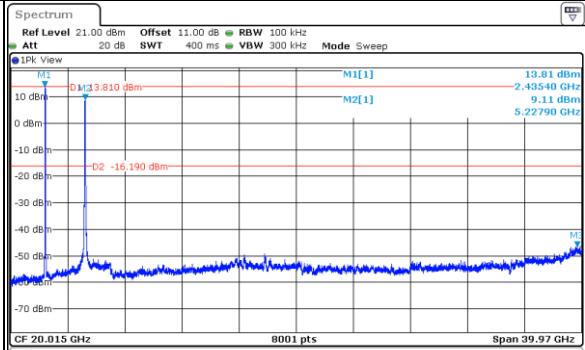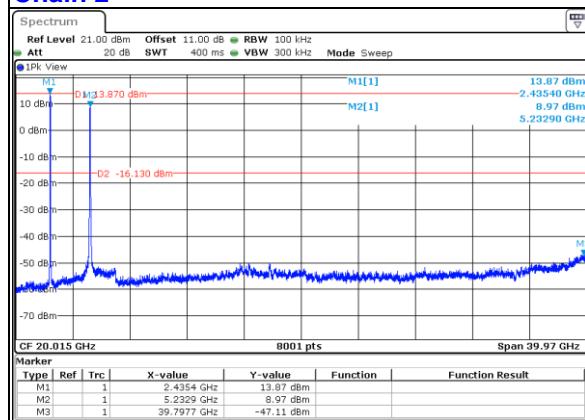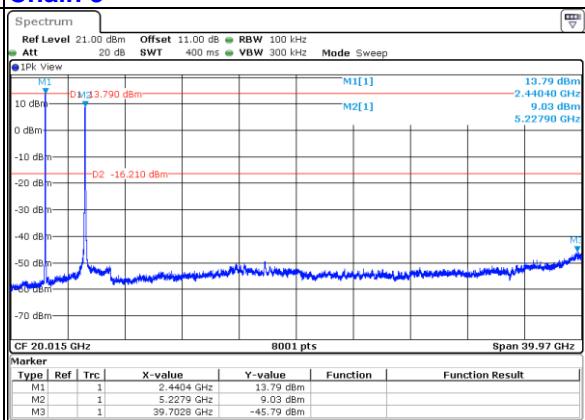Mode 1:
2.4GHz_802.11ax (HE20) CH6 + 5GHz (low band)_802.11ax (HE40) CH46
Chain 0

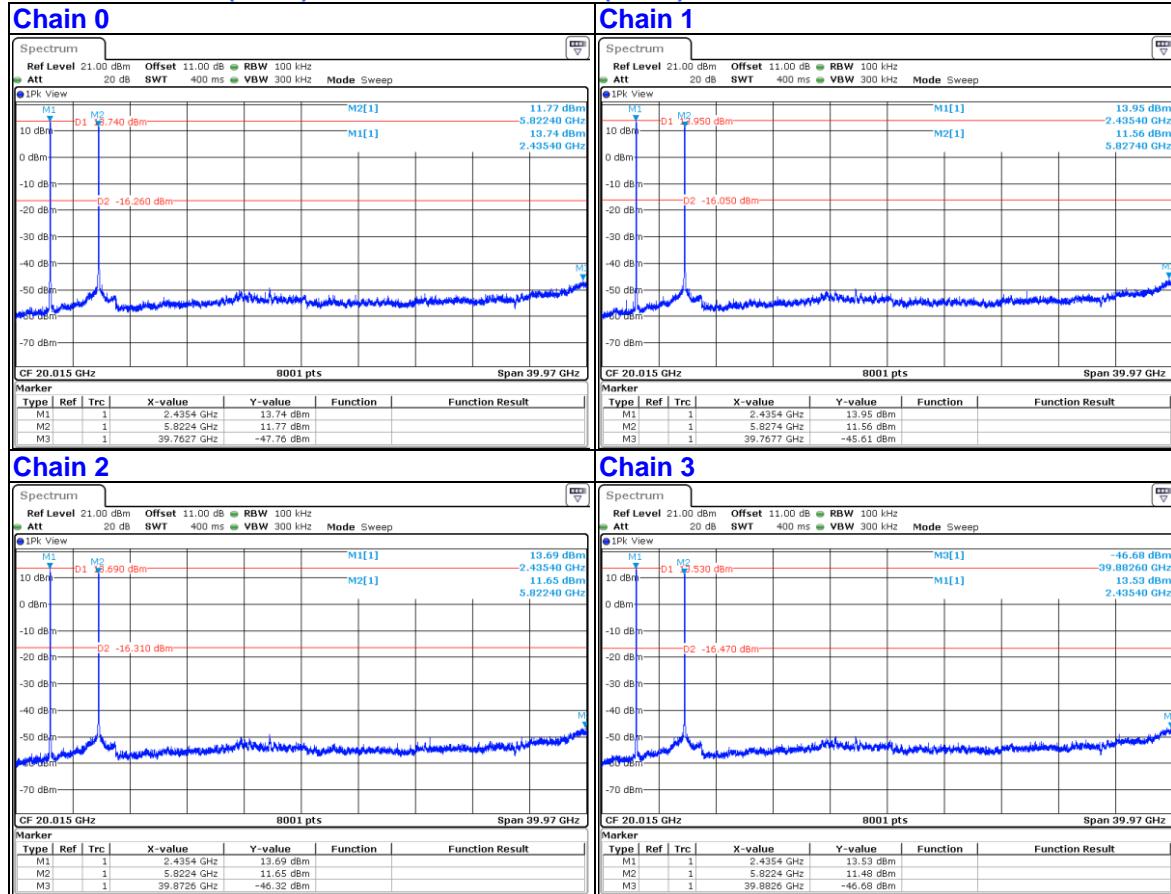Chain 1

Chain 2

Chain 3


Mode 2:
2.4GHz_802.11ax (HE20) CH6 + 5GHz_802.11ax (HE20) CH165


5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565
Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232
Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---