


Test Report


■ ELECTRICAL CHARACTERISTICS

- Place the device at the center of the chamber.
- Connect the antenna cable to RF cable of the chamber
- Run ETS-Lindgren SW test measurement
- Get 3D data in 2.8125 degree step from phi $0^{\circ}\sim 360^{\circ}$ and theta $-90^{\circ}\sim +90^{\circ}$, including efficiency, peak gain, 2D & 3D radiation pattern.


● WiFi Ant.1 Measurement Photo

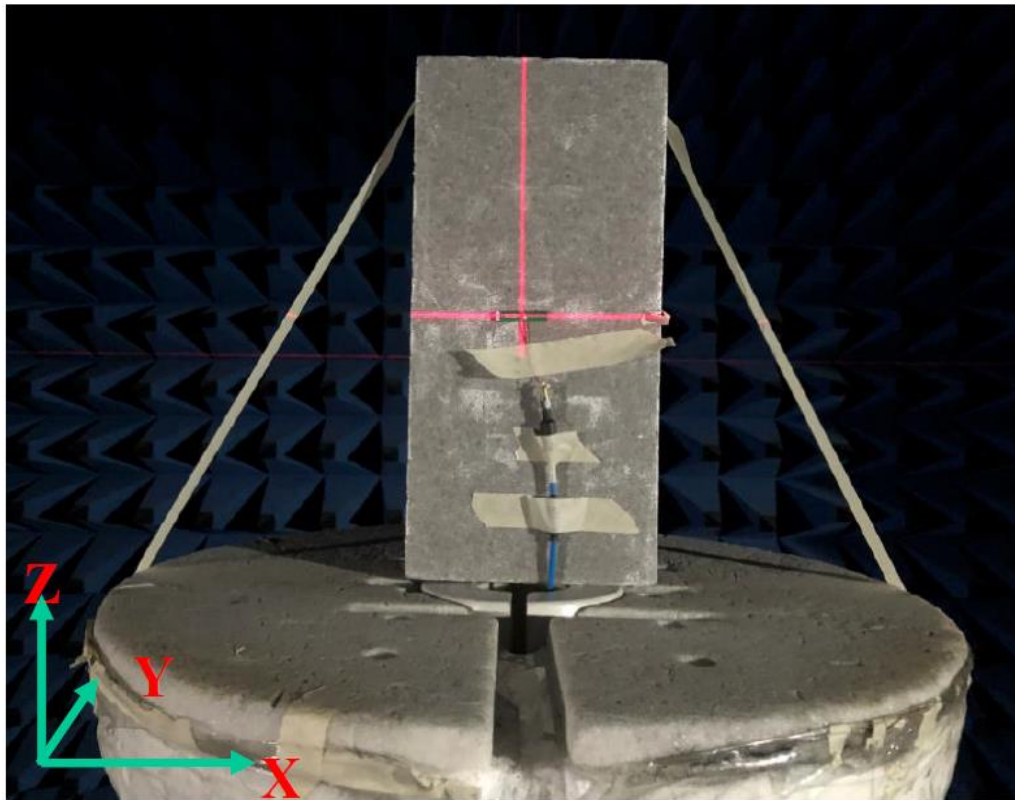

● WiFi Ant.2 Measurement Photo

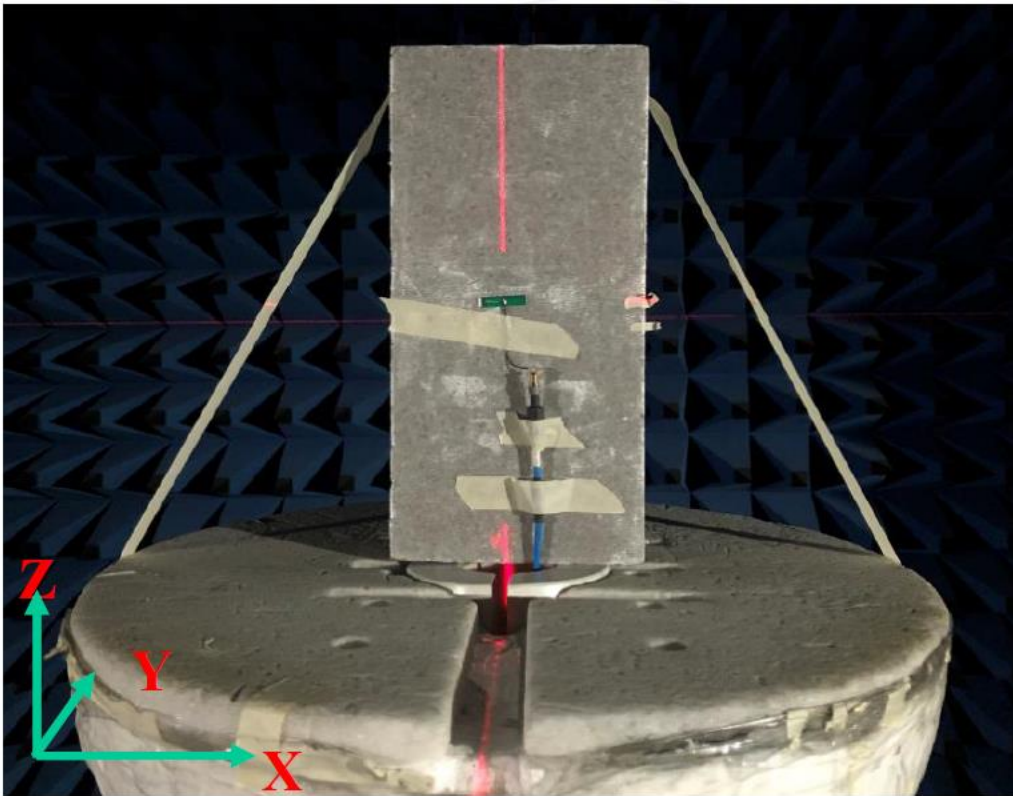

● WiFi Ant.3 Measurement Photo

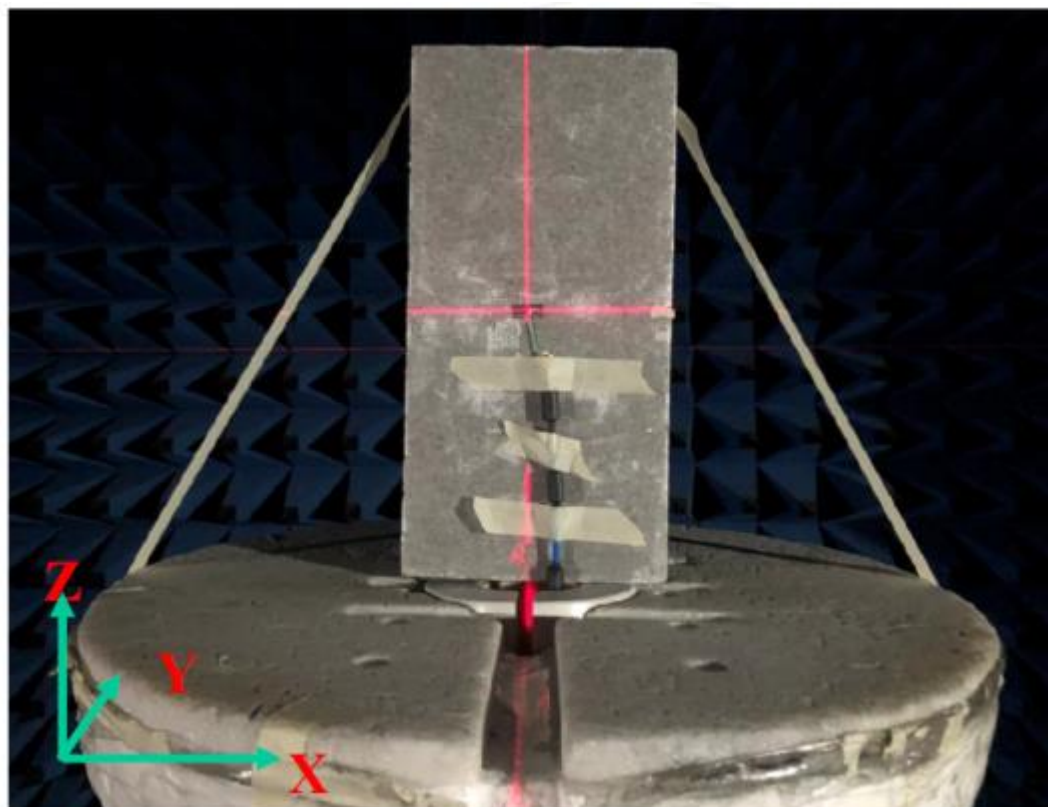

- WiFi Ant.4 Measurement Photo

