



FCC ID: RC6AWU-902W
Issued on Nov. 08, 2004

Report No.: FR492309

FCC TEST REPORT

CATEGORY : Portable
PRODUCT NAME : IEEE 802.11b/g Wireless Pocket USB
FCC ID. : RC6AWU-902W
FILING TYPE : Certification
BRAND NAME : Amigo, Guillemot, PTI, WaveBuddy, NovaTech
MODEL NAME : Hercules HWGUSB2-54, AWU-902W, NV-902W, PTI-610G
APPLICANT : **Amigo Technology Inc.**
No.6, Lane 35, Jihu Rd., Neihu, TAIPEI, TAIWAN 114, R.O.C.
MANUFACTURER : **FAIR WAY ELECTRONICS FACTORY**
HUANG CHONG NO.3 IND AREA, ZHONG TANG TOWN,
DONG GUAN CITY , GUANG DONG, P.R. CHINA
ISSUED BY : **SPORTON INTERNATIONAL INC.**
6F, No. 106, Sec. 1, Hsin Tai Wu Rd., His Chih, Taipei Hsien,
Taiwan, R.O.C.

Statements:

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

Certificate or Test Report could not be used by the applicant to claim the product endorsement by CNLA, NVLAP or any agency of U.S. government.

The test equipment used to perform the test are calibrated and traceable to NML/ROC or NIST/USA.


Dr. Alan Lane
Vice General Manager
SPORTON International Inc.

NVLAP[®]

Lab Code: 200079-0

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255



Table of Contents

History of this test report.....	ii
CERTIFICATE OF COMPLIANCE.....	iii
1. General Description of Equipment under Test.....	1
1.1. Applicant	1
1.2. Manufacturer	1
1.3. Basic Description of Equipment under Test.....	1
1.4. Features of Equipment under Test	1
1.5. Antenna Description.....	2
1.6. Table for Carrier Frequencies	2
2. Test Configuration of the Equipment under Test.....	3
2.1. Connection Diagram of Test System	3
2.2. The Test Mode Description.....	3
2.3. Description of Test Supporting Units	3
3. General Information of Test.....	4
3.1. Test Facility	4
3.2. Test Conditions	4
3.3. Standards for Methods of Measurement.....	4
3.4. DoC Statement	4
3.5. Frequency Range Investigated	4
3.6. Test Distance	4
3.7. Test Software.....	4
4. List of Measurements.....	5
4.1. Summary of the Test Results.....	5
5. Test Result	6
5.1. Test of 6dB Spectrum Bandwidth	6
5.2. Test of Maximum Conducted Output Power	11
5.3. Test of Peak Power Spectral Density	13
5.4. Test of Band Edges Emission	18
5.5. Test of AC Power Line Conducted Emission	21
5.6. Test of Spurious Radiated Emission.....	24
5.7. Antenna Requirements	33
6. List of Measuring Equipments Used	34
Appendix A. Photographs of EUT	A1 ~ A13



History of this test report

Original Report Issue Date: Nov. 08, 2004

Report No.: FR492309

☒ No additional attachment.

☐ Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

CERTIFICATE OF COMPLIANCE

with

47 CFR FCC Part 15 Subpart C (Section 15.247)

PRODUCT NAME : IEEE 802.11b/g Wireless Pocket USB

BRAND NAME : Amigo, Guillemot, PTI, WaveBuddy, NovaTech

MODEL NAME : Hercules HWGUSB2-54, AWU-902W, NV-902W, PTI-610G

APPLICANT : **Amigo Technology Inc.**

No.6, Lane 35, Jihu Rd., Neihu, TAIPEI, TAIWAN 114, R.O.C.

MANUFACTURER : **FAIR WAY ELECTRONICS FACTORY**

HUANG CHONG NO.3 IND AREA, ZHONG TANG TOWN,
DONG GUAN CITY , GUANG DONG, P.R. CHINA

I **HEREBY** CERTIFY THAT:

The measurements shown in this test report were made in accordance with the procedures given in ANSI C63.4 - 2003 and all test are performed according to 47 CFR FCC Part 15. Testing was carried out on Nov. 08, 2004 at SPORTON International Inc. LAB.



Dr. Alan Lane

Vice General Manager
SPORTON International Inc.

1. General Description of Equipment under Test

1.1. Applicant

Amigo Technology Inc.

No.6, Lane 35, Jihu Rd., Neihu, TAIPEI, TAIWAN 114, R.O.C.

1.2. Manufacturer

FAIR WAY ELECTRONICS FACTORY

HUANG CHONG NO.3 IND AREA, ZHONG TANG TOWN, DONG GUAN CITY , GUANG DONG, P.R. CHINA

1.3. Basic Description of Equipment under Test

This product is a wireless 802.11b/g USB device. The technical data has been listed on section " Features of Equipment under Test ". Instead of directly plugging on the computer, an USB cable with 0.15 meter length is provided for the connection with the computer.

1.4. Features of Equipment under Test

Items	Description
Type of Modulation	: DSSS (CCK / DQPSK / DBPSK) OFDM (16QAM / 64QAM / DQPSK / DBPSK)
Number of Channels	: 11
Frequency Band	: 2400MHz ~ 2483.5MHz
Carrier Frequency	: See section 1.6 for details
Data Rates	: CCK : 1, 2, 5.5, 11Mbps OFDM : 54, 48,36, 24,18,12, 6Mbps
Channel Bandwidth	: 11MHz (802.11b), 18MHz (802.11g)
Max. Conducted Output Power	: CCK : 17.99dBm ; OFDM : 14.80dBm
Antenna Type	: See section 1.5 for details
Function Type	: Transceiver
Testing Duty Cycle	: 100.00%
Power Rating (DC/AC, Voltage)	: 5 VDC
Test Power Source	: 110.00V AC (host)
Temperature Range (Operating)	: -10 ~ 55 °C



1.5. Antenna Description

1 type of antenna is filed in this project.


No.	Antenna Type	Gain (dBi)
1	chip Antenna	2.50dBi

1.6. Table for Carrier Frequencies

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	05	2432 MHz	09	2452 MHz	-	-
02	2417 MHz	06	2437 MHz	10	2457 MHz	-	-
03	2422 MHz	07	2442 MHz	11	2462 MHz	-	-
04	2427 MHz	08	2447 MHz	-	-	-	-

2. Test Configuration of the Equipment under Test

2.1. Connection Diagram of Test System

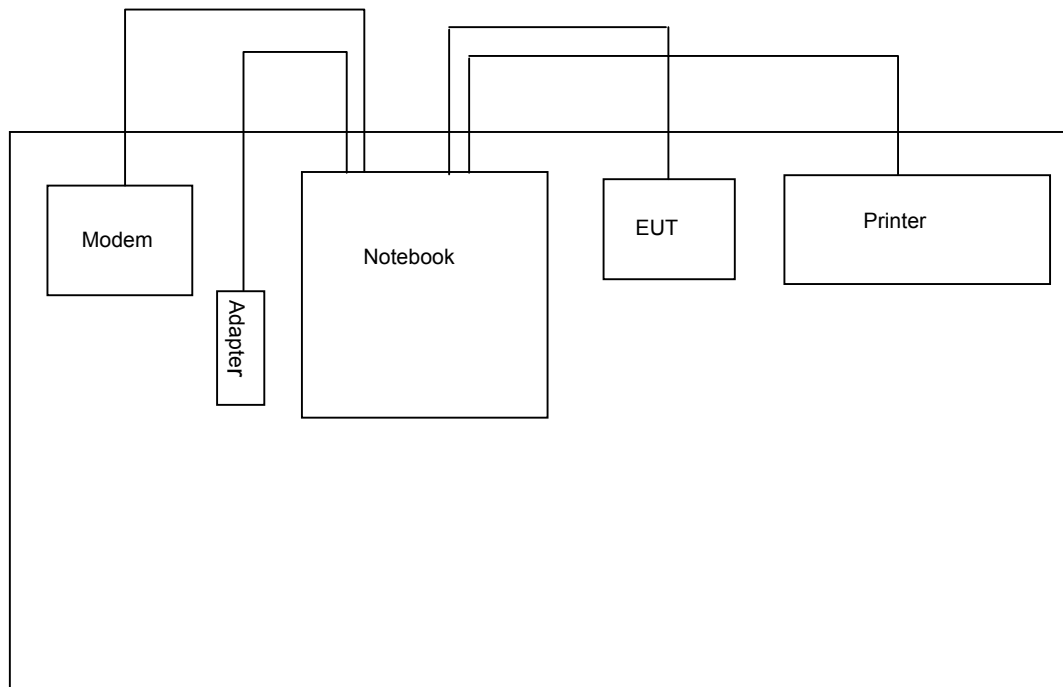

2.2. The Test Mode Description

For DSSS modulation, CCK is the worst case on all test items.

For OFDM modulation, 64QAM is the worst case on all test items.

Spurious emission below 1GHz and AC conduction test is independent of channel selection, so only channel 11 with 64QAM modulation was tested.

Test configuration with 0.15 meter USB cable performed worst emission, so only this configuration was shown in this report.

2.3. Description of Test Supporting Units

Support unit	Brand	Model No.	Serial No.	FCC ID	Data cable (m)
Notebook	DELL	PP01L	SP0004	DoC	-
Printer	EPSON	STYLUS COLOR 680	SP0016	DoC	1.35
Modem	ACEEX	DM141	SP0019	IFAXDM141	1.15

3. General Information of Test

3.1. Test Facility

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiag, Tao Yuan Hsien, Taiwan, R.O.C.
: TEL 886-3-327-3456
: FAX 886-3-318-0055
Test Site No : 03CH03-HY / TH01-HY

3.2. Test Conditions

Normal Voltage : 110.00V (host equipment)
Extreme Voltages : 126.50V and 93.5V (host equipment)
Normal Temperature : 20°C
Extreme Temperature : -10 °C and 55 °C

3.3. Standards for Methods of Measurement

Here is the list of the standards followed in this test report.

ANSI C63.4-2003

47 CFR Part 15 Subpart C (Section 15.247)

3.4. DoC Statement

This EUT is also classified as a device of computer peripheral Class B which DoC has to be followed. It has been verified according to the rule of 47 CFR part 15 Subpart B, and found that all the requirements has been fulfilled.

3.5. Frequency Range Investigated

Radiated emission test: from 30 MHz to 10th carrier harmonic

3.6. Test Distance

The test distance of radiated emission (30MHz~1GHz) test from antenna to EUT is 3 M.
The test distance of radiated emission (1GHz~10th carrier harmonic) test from antenna to EUT is 1 M.

3.7. Test Software

During testing, Channel & Power Controlling Software: This was provided by the manufacturer and is able to let the test engineer select the operating channel as well as the RF output power. The parameters for channel selection is trying to offer the test engineer the ability to fix the operating channel for testing, both normal data and continuously transmitting modes are allowed, and that for RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.



4. List of Measurements

4.1. Summary of the Test Results

Applied Standard: 47 CFR Part 15 and Part 2

Paragraph	FCC Rule	Description of Test	Result
5.1	15.247	6dB Spectrum Bandwidth	Pass
5.2	15.247	Maximum Conducted Output Power	Pass
5.3	15.247	Peak Power Spectral Density	Pass
5.4	15.247	Band Edges Emission	Pass
5.5	15.207	AC Power Line Conducted Emission	Pass
5.6	15.209/15.247	Spurious Radiated Emission	Pass
5.7	15.203/15.247	Antenna Requirement	Pass

5. Test Result

5.1. Test of 6dB Spectrum Bandwidth


5.1.1. Measuring Instruments

Item 18 of the table is on section 6.

5.1.2. Test Procedures

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. The spectrum width with level higher than 6dB below the peak level.
4. Repeat above 1~3 points for the middle and highest channel of the EUT.

5.1.3. Test Setup Layout

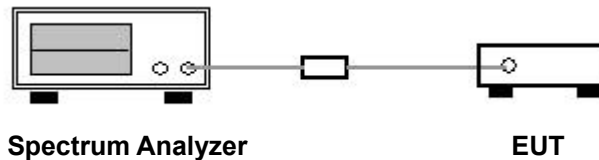


5.1.4. Test Result: See spectrum analyzer plots below

- Temperature: 27°C
- Relative Humidity: 44%
- Duty Cycle of the Equipment During the Test: 100.00%
- Test Engineer: Sam Lee


Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Min. Limit (MHz)
CCK	01	2412 MHz	11.64	0.5
CCK	06	2437 MHz	11.60	0.5
CCK	11	2462 MHz	11.56	0.5
OFDM	01	2412 MHz	16.60	0.5
OFDM	06	2437 MHz	16.56	0.5
OFDM	11	2462 MHz	16.56	0.5

Modulation Type: CCK (Channel 01) :

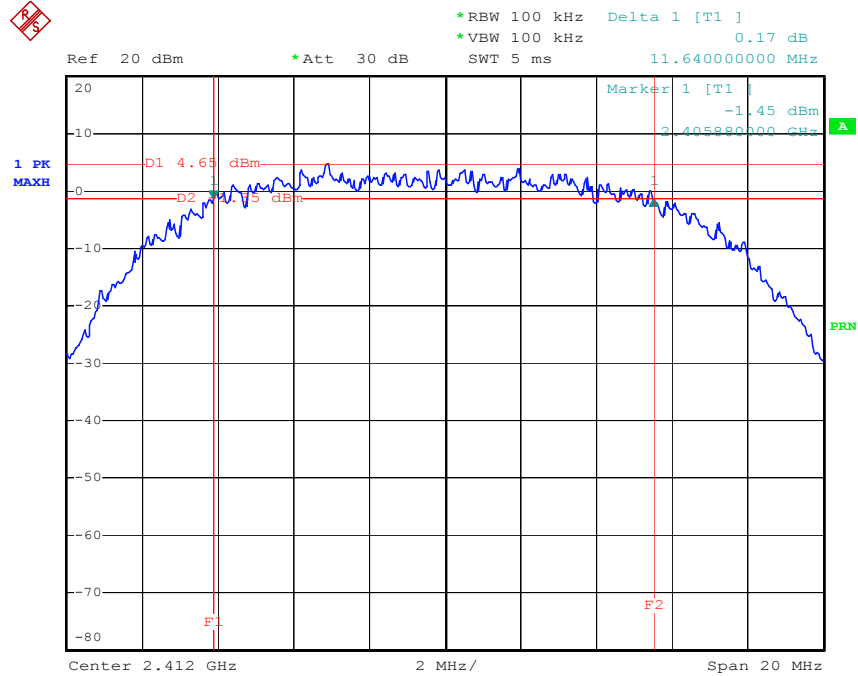


Date: 1.OCT.2004 22:36:46

Modulation Type: CCK (Channel 06) :

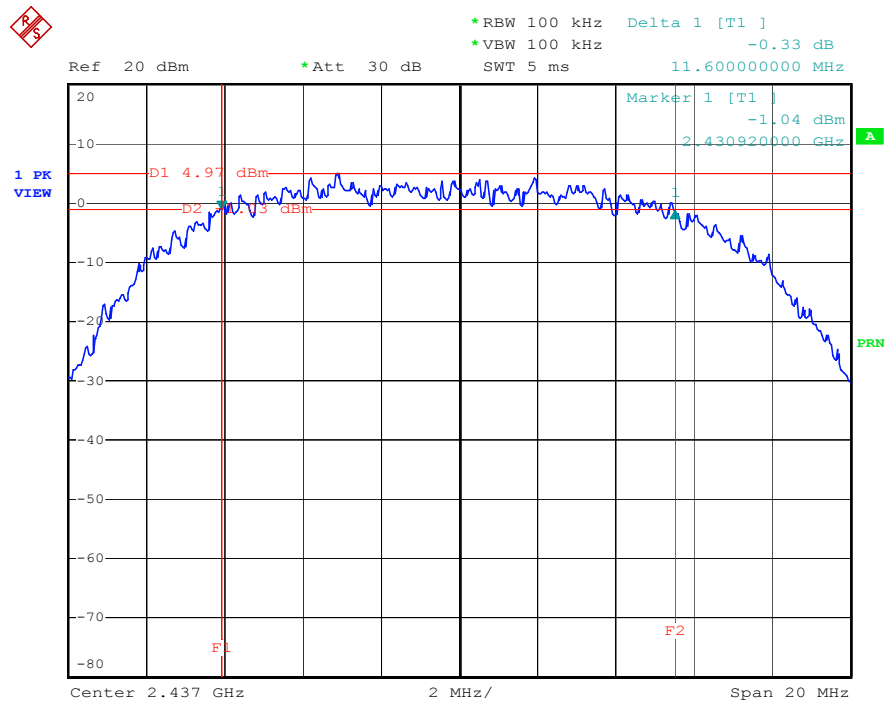


Date: 1.OCT.2004 22:39:24

Modulation Type: CCK (Channel 11) :

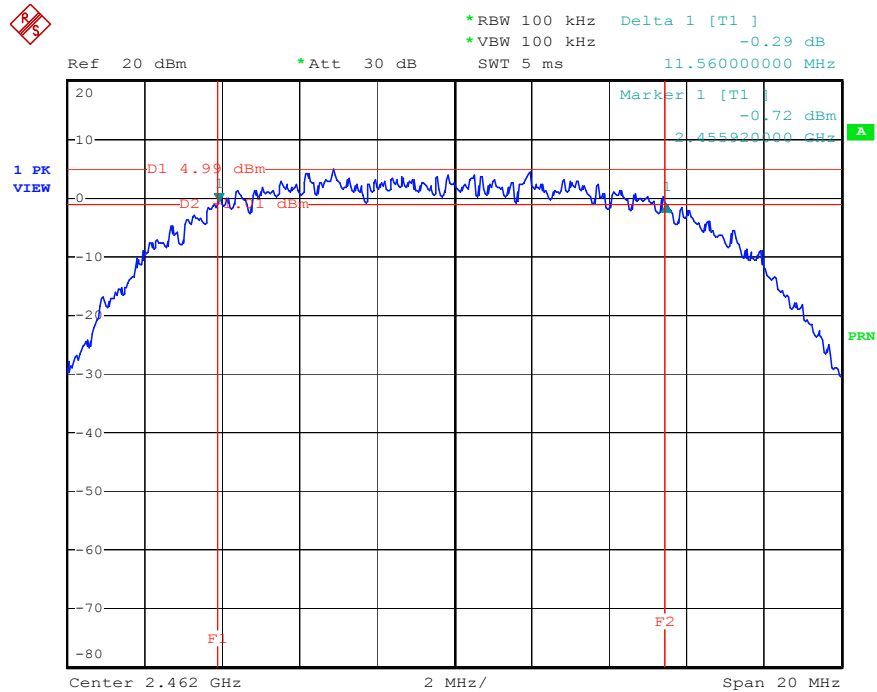


Date: 1.OCT.2004 22:40:57

Modulation Type: OFDM (Channel 01) :

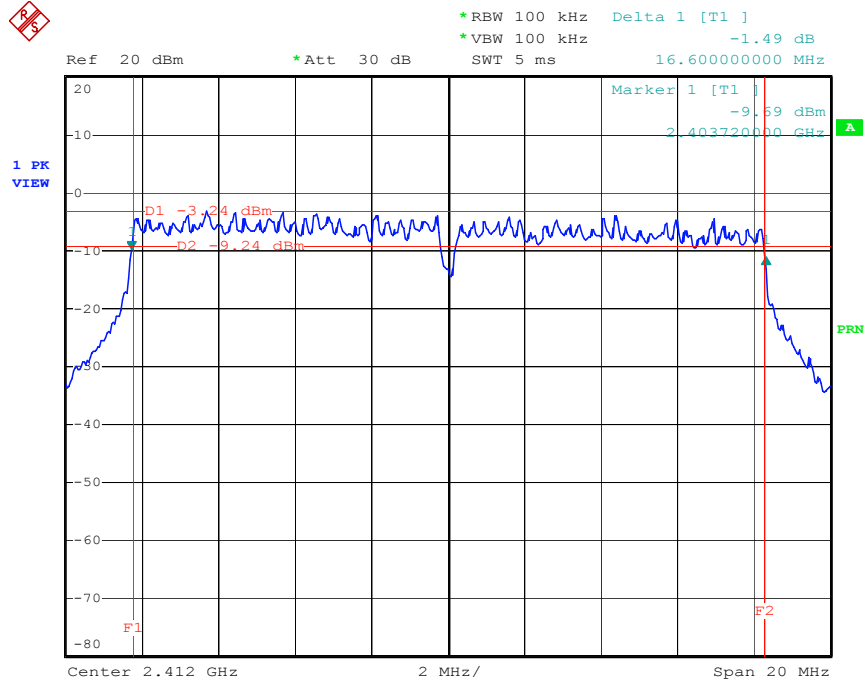


Date: 1.OCT.2004 23:09:58

Modulation Type: OFDM (Channel 06) :

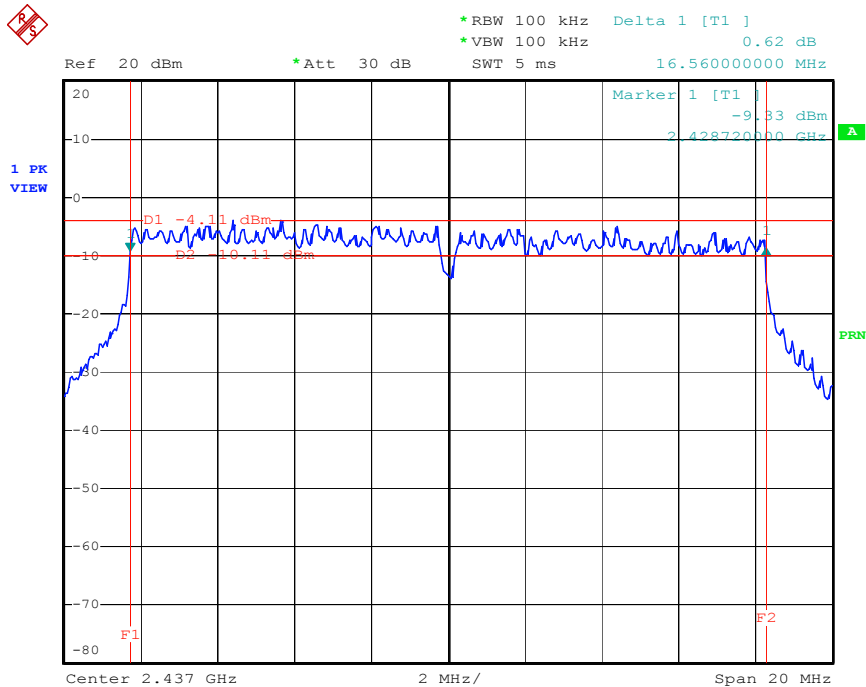

Date: 1.OCT.2004 23:11:37

Modulation Type: OFDM (Channel 11) :

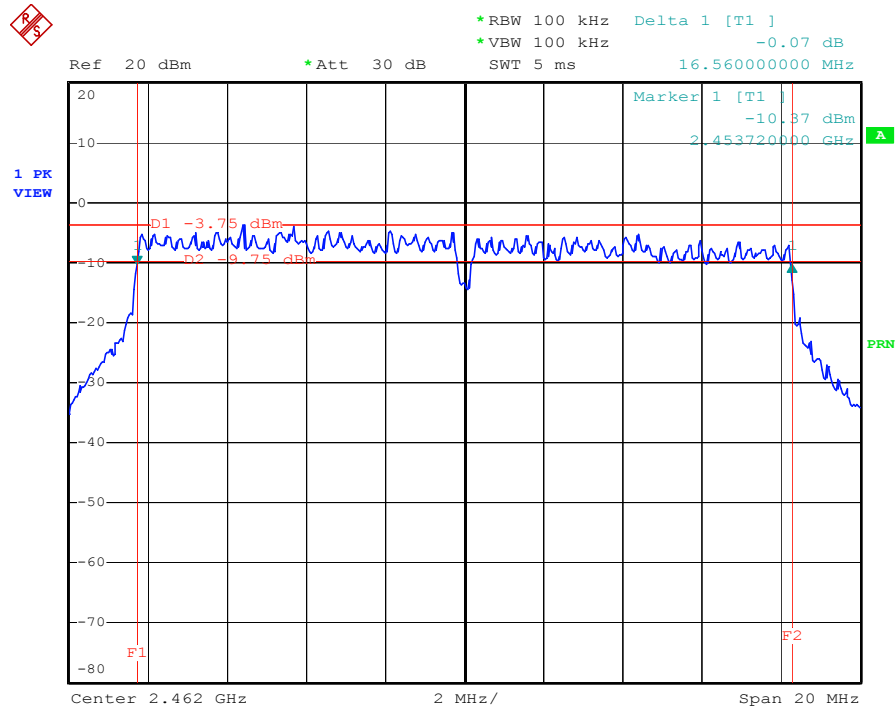

Date: 1.OCT.2004 23:12:54

5.2. Test of Maximum Conducted Output Power


5.2.1. Measuring Instruments

Item 18 of the table is on section 6.

5.2.2. Test Procedures

This testing was done by the channel power function of spectrum analyzer.

5.2.3. Test Setup Layout

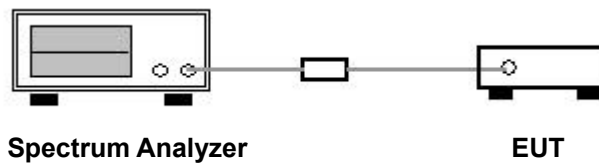

5.2.4. Test Result of Conducted Power

- Temperature: 27°C
- Relative Humidity: 44%
- Duty Cycle of the Equipment During the Test: 100.00%
- Test Engineer: Sam Lee

Modulation Type	Channel	Frequency (MHz)	Output Power (dBm)	Limits (dBm)
CCK	01	2412 MHz	17.98	30
CCK	06	2437 MHz	17.99	30
CCK	11	2462 MHz	17.97	30
OFDM	01	2412 MHz	14.70	30
OFDM	06	2437 MHz	14.30	30
OFDM	11	2462 MHz	14.80	30

The max output power : CCK modulation is 17.99 dBm. OFDM modulation is 14.80 dBm.

5.2.5. Test Result of EIRP Power

- Temperature: 27°C
- Relative Humidity: 44%
- Duty Cycle of the Equipment During the Test: 100.00%
- Test Engineer: Sam Lee

Antenna No.	Gain (dBi)	Modulation Type	Channel	Frequency (MHz)	Output Power (dBm)	Limits (dBm)
1	2.50	CCK	01	2412 MHz	20.48	36
1	2.50	CCK	06	2437 MHz	20.49	36
1	2.50	CCK	11	2462 MHz	20.47	36
1	2.50	OFDM	01	2412 MHz	17.20	36
1	2.50	OFDM	06	2437 MHz	16.80	36
1	2.50	OFDM	11	2462 MHz	17.30	36

5.3. Test of Peak Power Spectral Density


5.3.1. Measuring Instruments

Item 18 of the table is on section 6.

5.3.2. Test Procedures

1. The transmitter output is connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.
5. Repeated the 1~4 for the middle and highest channel of the EUT.

5.3.3. Test Setup Layout

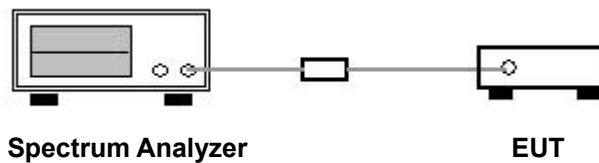


5.3.4. Test Result: See spectrum analyzer plots below

- Temperature: 27°C
- Relative Humidity: 44%
- Duty Cycle of the Equipment During the Test: 100.00%
- Test Engineer: Sam Lee


Modulation Type	Channel	Frequency (MHz)	Power Density (dBm)	Limits (dBm)
CCK	01	2412 MHz	-8.44	8
CCK	06	2437 MHz	-8.53	8
CCK	11	2462 MHz	-8.48	8
OFDM	01	2412 MHz	-16.91	8
OFDM	06	2437 MHz	-17.81	8
OFDM	11	2462 MHz	-17.29	8

Modulation Type: CCK (Channel 01) :

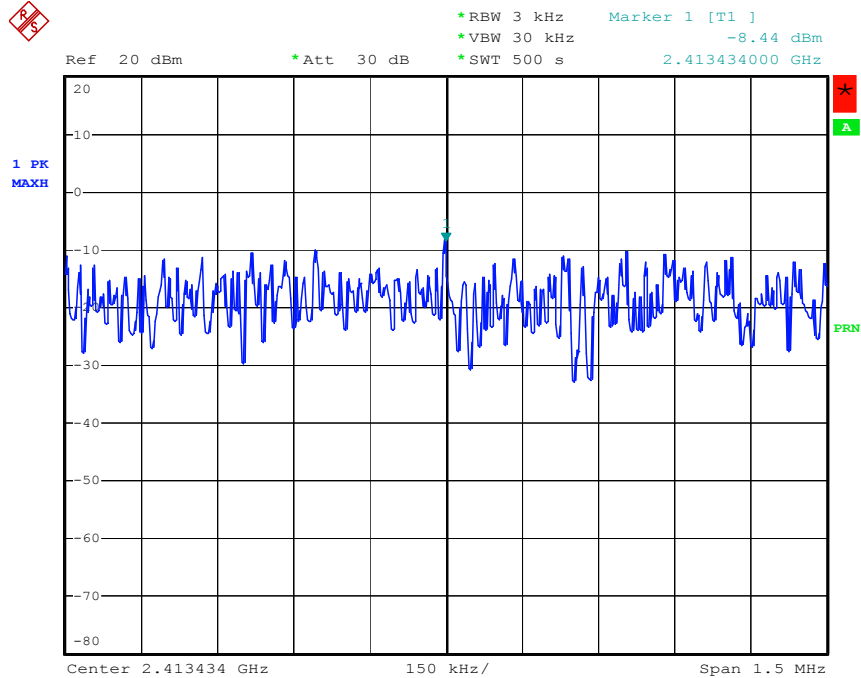


Date: 1.OCT.2004 22:58:37

Modulation Type: CCK (Channel 06) :

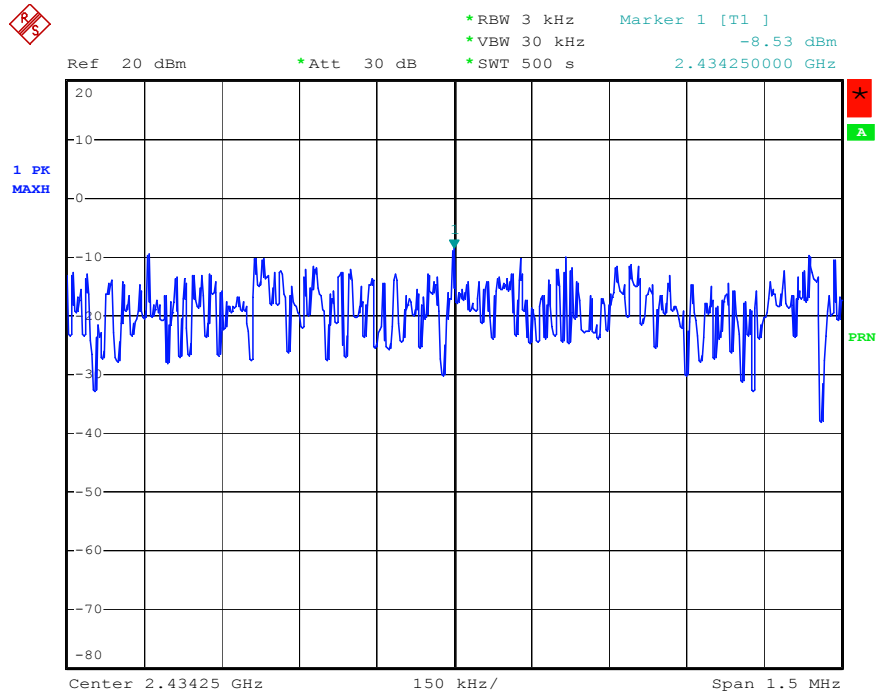

Date: 1.OCT.2004 22:53:35


Modulation Type: CCK (Channel 11) :

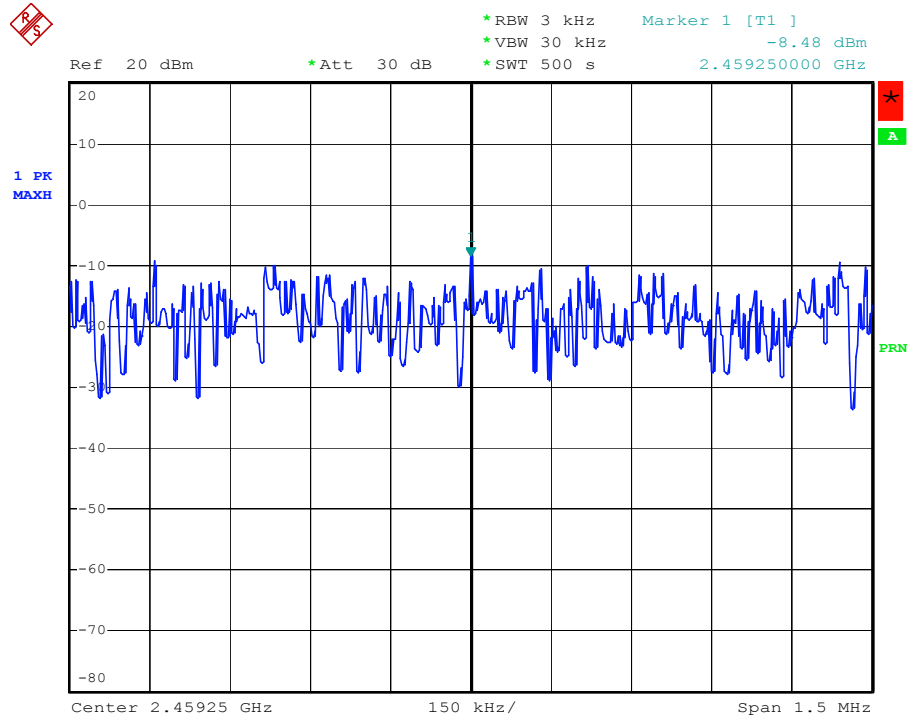

Date: 1.OCT.2004 22:55:23




Modulation Type: OFDM (Channel 01) :

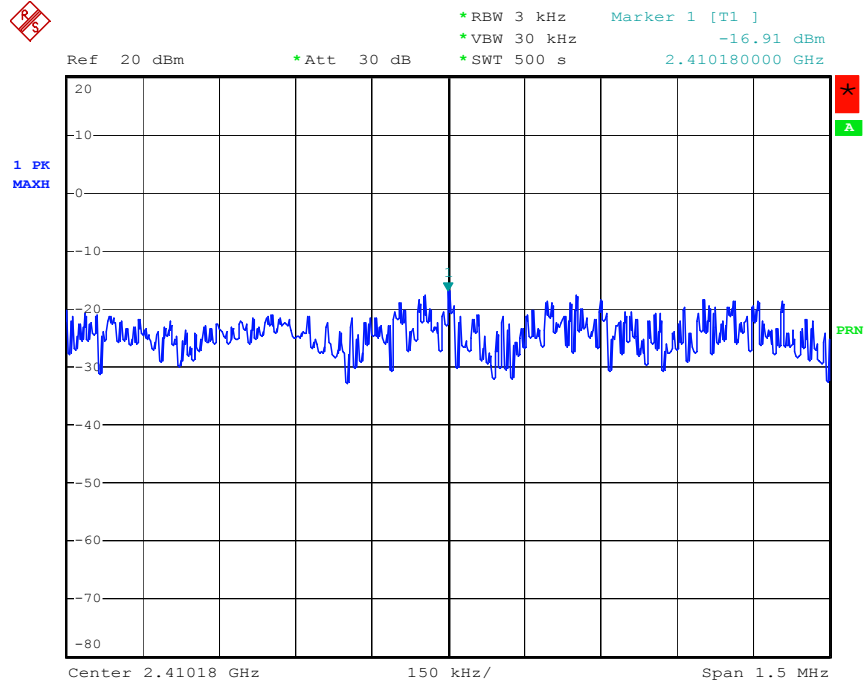

Date: 1.OCT.2004 23:14:33


Modulation Type: OFDM (Channel 06) :

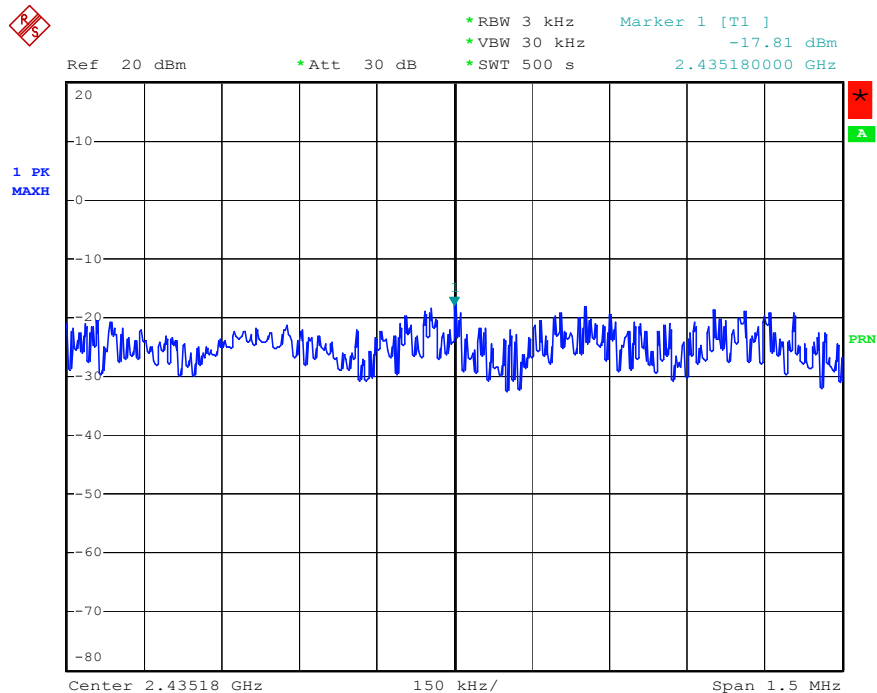

Date: 1.OCT.2004 23:15:57



Modulation Type: OFDM (Channel 11) :

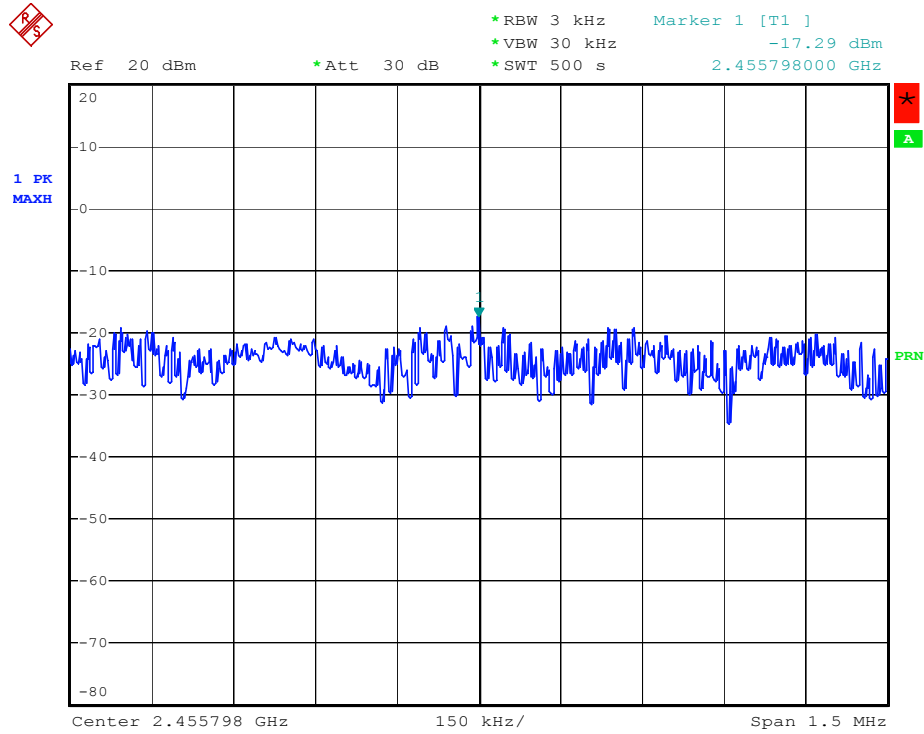

Date: 1.OCT.2004 23:18:58

5.4. Test of Band Edges Emission

5.4.1. Measuring Instruments

Item 18 of the table is on section 6.

5.4.2. Test Procedures

1. The transmitter is set to the lowest channel.
2. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
3. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100MHz bandwidth from lower band edge.
4. The lowest band edges emission was measured and recorded.
5. The transmitter set to the highest channel and repeated 2~4.

5.4.3. Test Result:

Temperature: 27°C

Relative Humidity: 44%


Duty Cycle of the Equipment During the Test: 100.00%

Test Engineer: Sam Lee

Modulation	Test	Freq.	Level*	Margin	Limit	Trace
Type	Channel	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(PK/AV)
CCK	01	2385.050	61.68	-12.32	74	PK
CCK	01	2385.050	49.83	-4.17	54	AV
CCK	11	2486.700	56.44	-17.56	74	PK
CCK	11	2486.700	47.00	-7.00	54	AV
OFDM	01	2378.000	54.45	-19.55	74	PK
OFDM	01	2378.000	38.84	-15.16	54	AV
OFDM	11	2483.660	53.26	-20.74	74	PK
OFDM	11	2483.660	36.84	-17.16	54	AV


Level* : The max field strength in the restricted bands.

Modulation Type: CCK (Channel 01) :

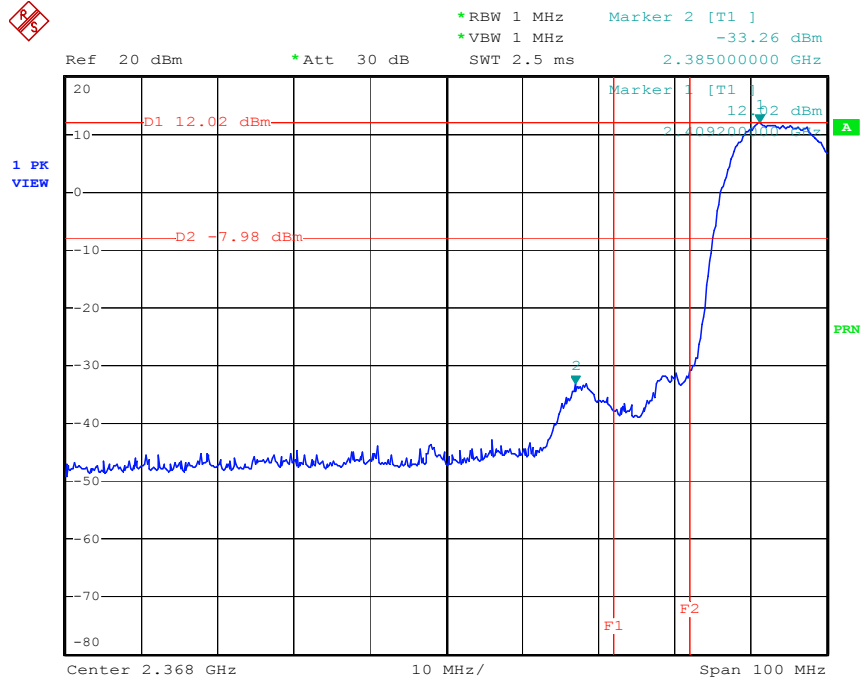


Date: 1.OCT.2004 22:50:21

Modulation Type: CCK (Channel 11) :

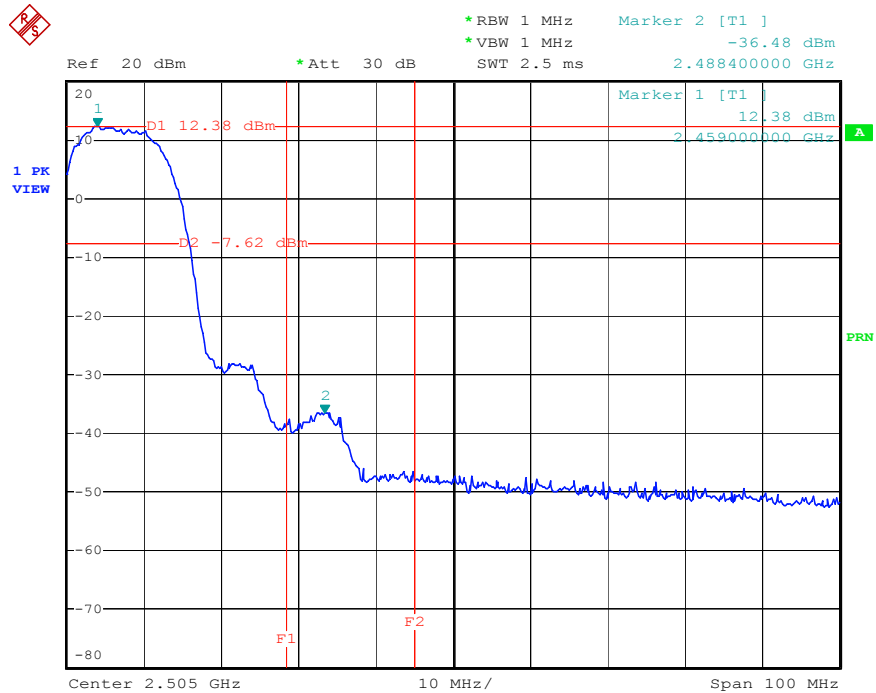


Date: 1.OCT.2004 22:43:40

Modulation Type: OFDM (Channel 01) :

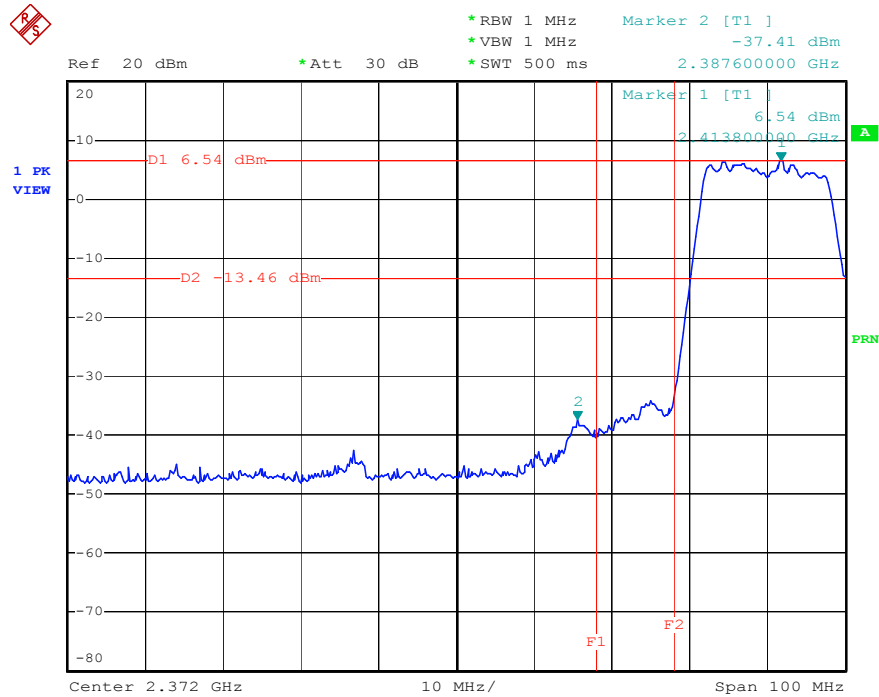

Date: 1.OCT.2004 23:26:37

Modulation Type: OFDM (Channel 11) :

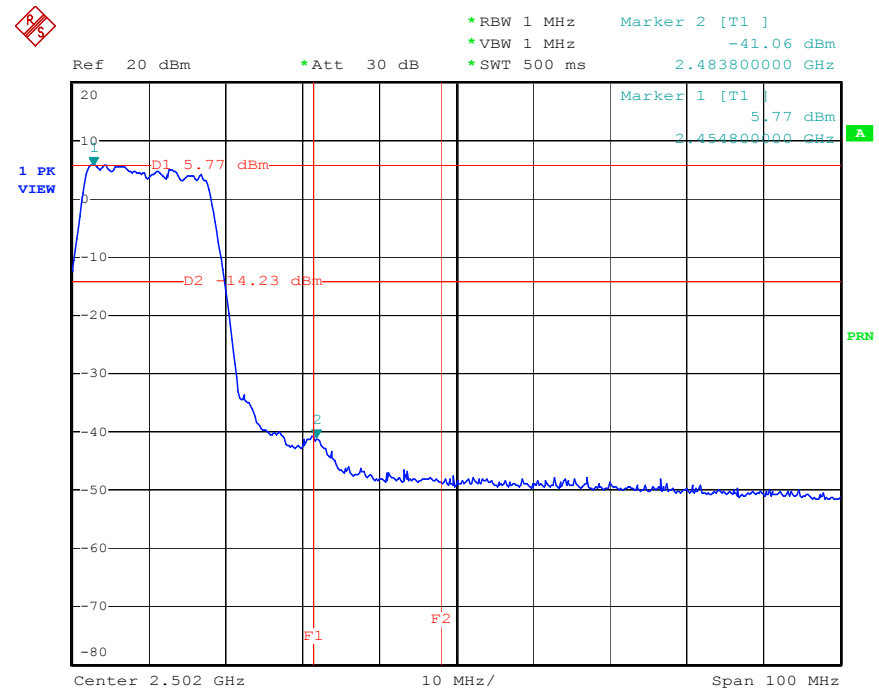

Date: 1.OCT.2004 23:21:38

5.5. Test of AC Power Line Conducted Emission


5.5.1. Measuring Instruments

Please reference item 1~5 in chapter 6 for the instruments used for testing.

5.5.2. Test Procedures

1. Configure the EUT according to ANSI C63.4.
2. The EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN)
4. All the support units are connected to the other LISNs. The LISN should provides 50uH/50ohms coupling impedance.
5. The frequency range from 150 KHz to 30 MHz was searched.
6. Use the Channel & Power Controlling software to make the EUT working on selected channel and expected output power, then use the "H" Patter Generator software to make the supporting equipments stay on working condition.
7. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
8. The measurement has to be done between each power line and ground at the power terminal for each RF channel. Only one RF channel has to be investigated since this test is independent with the RF channel selection.

5.5.3. Test Setup Layout

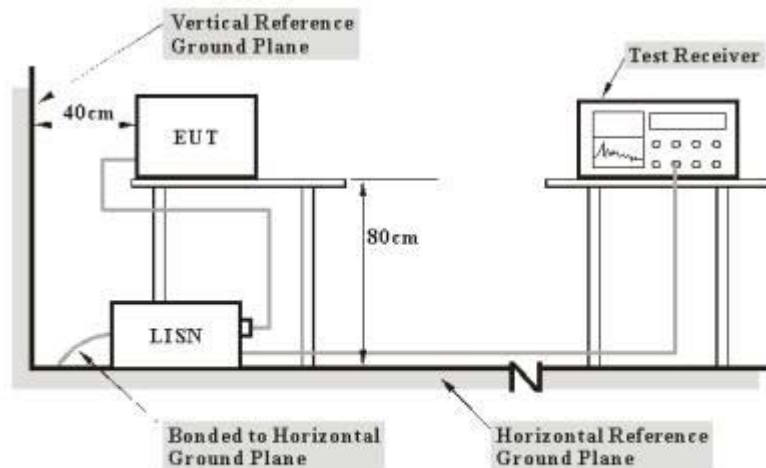

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

5.5.4. Test Result of Conducted Emission

- Temperature: 27°C
- Relative Humidity: 44%
- Test Engineer: Hikaru Chan

Line to Ground

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1721540	41.44	-23.42	64.86	41.16	0.10	0.18	QP
2	0.1721540	27.45	-27.41	54.86	27.17	0.10	0.18	Average
3	0.3464610	33.97	-25.08	59.05	33.77	0.10	0.10	QP
4	0.3464610	25.25	-23.80	49.05	25.05	0.10	0.10	Average
5	1.960	26.22	-29.78	56.00	26.09	0.10	0.03	QP
6	1.960	17.20	-28.80	46.00	17.07	0.10	0.03	Average
7	4.200	21.94	-34.06	56.00	21.65	0.20	0.09	QP
8	4.200	15.28	-30.72	46.00	14.99	0.20	0.09	Average
9	10.560	31.85	-28.15	60.00	31.18	0.20	0.47	QP
10	10.560	26.47	-23.53	50.00	25.80	0.20	0.47	Average
11	17.470	23.30	-36.70	60.00	22.85	0.25	0.20	QP
12	17.470	17.65	-32.35	50.00	17.20	0.25	0.20	Average

Neutral to Ground

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1903870	42.28	-21.74	64.02	42.12	0.10	0.06	QP
2	0.1903870	25.69	-28.33	54.02	25.53	0.10	0.06	Average
3	0.2525290	34.18	-27.49	61.67	34.01	0.10	0.07	QP
4	0.2525290	22.45	-29.22	51.67	22.28	0.10	0.07	Average
5	1.910	28.05	-27.95	56.00	27.90	0.10	0.05	QP
6	1.910	19.97	-26.03	46.00	19.82	0.10	0.05	Average
7	3.960	16.84	-29.16	46.00	16.64	0.10	0.10	Average
8	3.960	24.46	-31.54	56.00	24.26	0.10	0.10	QP
9	10.510	27.45	-22.55	50.00	26.79	0.20	0.46	Average
10	10.510	33.10	-26.90	60.00	32.44	0.20	0.46	QP
11	16.490	22.51	-37.49	60.00	21.94	0.23	0.34	QP
12	16.490	17.12	-32.88	50.00	16.55	0.23	0.34	Average

5.5.5. Photographs of Conducted Emission Test Configuration

FRONT VIEW



REAR VIEW



5.6. Test of Spurious Radiated Emission


5.6.1. Measuring Instruments

Please reference item 6~17 in chapter 6 for the instruments used for testing.

5.6.2. Test Procedures

1. Configure the EUT according to ANSI C63.4.
2. The EUT was placed on the top of the turn table 0.8 meter above ground.
3. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turn table.
4. Power on the EUT and all the supporting units.
5. The turn table was rotated by 360 degrees to determine the position of the highest radiation.
6. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
7. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.
8. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
9. For emission above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
10. If the emission level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz and average method for above the 1GHz. the reported.
11. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB higher than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.6.3. Test Setup Layout

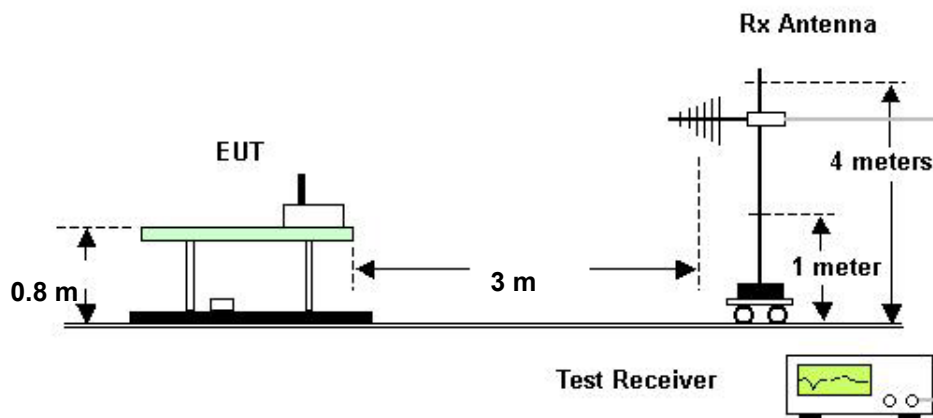

5.6.4. Test Results for CH 11 / 2462 MHz (for emission below 1GHz)

- Modulation Type: OFDM
- Temperature: 27°C
- Relative Humidity: 44%
- Duty Cycle of the Equipment During the Test: 100.00%
- Test Engineer: Hikaru Chan

(A) Polarization: Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	110.070	31.55	-11.95	43.50	47.11	10.45	1.87	27.88	Peak	---	---
2	166.340	35.87	-7.63	43.50	48.02	13.29	2.33	27.77	Peak	---	---
3	173.310	27.19	-16.31	43.50	38.54	14.02	2.38	27.75	Peak	---	---
1 !	359.200	41.57	-4.43	46.00	50.23	15.60	3.34	27.60	QP	---	---
2 !	599.200	42.20	-3.80	46.00	46.27	20.36	4.37	28.80	QP	215	189
3	665.600	35.15	-10.85	46.00	38.63	20.60	4.65	28.73	QP	---	---

(B) Polarization: Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	36.460	29.61	-10.39	40.00	44.50	12.11	1.03	28.03	Peak	---	---
2	59.070	26.40	-13.60	40.00	42.51	10.58	1.29	27.98	Peak	---	---
3	167.020	32.97	-10.53	43.50	45.04	13.36	2.34	27.77	Peak	---	---
1	359.200	38.60	-7.40	46.00	47.26	15.60	3.34	27.60	QP	---	---
2 !	599.200	41.56	-4.44	46.00	45.63	20.36	4.37	28.80	QP	---	---
3	663.200	35.36	-10.64	46.00	38.85	20.59	4.66	28.74	QP	---	---

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

5.6.5. Test Results for CH 01 / 2412 MHz (for emission above 1GHz)

- Modulation Type: CCK
- Temperature: 27°C
- Relative Humidity: 44%
- Duty Cycle of the Equipment During the Test: 100.00%
- Test Engineer: Hikaru Chan

(A) Polarization: Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2788.000	50.61	-23.39	74.00	58.80	29.35	1.94	39.48	Peak	200	0
2	3164.000	42.91	-31.09	74.00	49.51	30.44	2.20	39.24	Peak	200	0
3	4824.000	40.70	-33.30	74.00	45.48	32.96	2.40	40.14	Peak	200	200

(B) Polarization: Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2788.000	51.83	-22.17	74.00	60.02	29.35	1.94	39.48	Peak	200	200
2	3164.000	45.59	-28.41	74.00	52.19	30.44	2.20	39.24	Peak	200	200
3	4824.000	43.49	-30.51	74.00	48.27	32.96	2.40	40.14	Peak	200	200

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

5.6.6. Test Results for CH 06 / 2437 MHz (for emission above 1GHz)

- Modulation Type: CCK
- Temperature: 27°C
- Relative Humidity: 44%
- Duty Cycle of the Equipment During the Test: 100.00%
- Test Engineer: Hikaru Chan

(B)Polarization: Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2812.000	50.34	-23.66	74.00	58.33	29.51	1.96	39.46	Peak	100	100
2	3180.000	45.36	-28.64	74.00	51.90	30.48	2.19	39.21	Peak	100	100
3	4874.000	41.49	-32.51	74.00	46.03	33.05	2.55	40.14	Peak	100	100

(C)Polarization: Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2812.000	51.23	-22.77	74.00	59.22	29.51	1.96	39.46	Peak	200	200
2	3180.000	48.09	-25.91	74.00	54.63	30.48	2.19	39.21	Peak	200	200
3	4876.000	41.15	-32.85	74.00	45.67	33.11	2.51	40.14	Peak	200	200

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

5.6.7. Test Results for CH 11 / 2462 MHz (for emission above 1GHz)

- Modulation Type: CCK
- Temperature: 27°C
- Relative Humidity: 44%
- Duty Cycle of the Equipment During the Test: 100.00%
- Test Engineer: Hikaru Chan

(A) Polarization: Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2836.000	48.47	-25.53	74.00	56.46	29.51	1.96	39.46	Peak	100	360
2	3208.000	43.83	-30.17	74.00	50.30	30.56	2.16	39.19	Peak	100	360
3	4924.000	48.23	-25.77	74.00	52.70	33.21	2.47	40.15	Peak	100	360

(B) Polarization: Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2836.000	50.85	-23.15	74.00	58.84	29.51	1.96	39.46	Peak	100	100
2	3208.000	45.21	-28.79	74.00	51.68	30.56	2.16	39.19	Peak	100	100
3	4924.000	46.38	-27.62	74.00	50.85	33.21	2.47	40.15	Peak	100	100

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

5.6.8. Test Results for CH 01 / 2412MHz(for emission above 1GHz)

- Modulation Type: OFDM
- Temperature: 27°C
- Relative Humidity: 44%
- Duty Cycle of the Equipment During the Test: 100.00%
- Test Engineer: Hikaru Chan

(A) Polarization: Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2788.000	50.78	-23.22	74.00	58.97	29.35	1.94	39.48	Peak	100	100
2	3164.000	41.37	-32.63	74.00	47.97	30.44	2.20	39.24	Peak	100	100
3	4824.000	40.87	-33.13	74.00	45.65	32.96	2.40	40.14	Peak	100	100

(B) Polarization: Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2788.000	51.04	-22.96	74.00	59.23	29.35	1.94	39.48	Peak	100	360
2	3164.000	42.91	-31.09	74.00	49.51	30.44	2.20	39.24	Peak	100	360
3	4824.000	40.64	-33.36	74.00	45.42	32.96	2.40	40.14	Peak	100	360

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

5.6.9. Test Results for CH 06 / 2437MHz (for emission above 1GHz)

- Modulation Type: OFDM
- Temperature: 27°C
- Relative Humidity: 44%
- Duty Cycle of the Equipment During the Test: 100.00%
- Test Engineer: Hikaru Chan

(A) Polarization: Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2812.000	49.63	-24.37	74.00	57.62	29.51	1.96	39.46	Peak	0	0
2	3180.000	41.83	-32.17	74.00	48.37	30.48	2.19	39.21	Peak	0	0
3	4874.000	41.48	-32.52	74.00	46.02	33.05	2.55	40.14	Peak	0	0

(B) Polarization: Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2812.000	51.01	-22.99	74.00	59.00	29.51	1.96	39.46	Peak	100	100
2	3180.000	42.54	-31.46	74.00	49.08	30.48	2.19	39.21	Peak	100	100
3	4874.000	41.11	-32.89	74.00	45.65	33.05	2.55	40.14	Peak	100	100

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

5.6.10. Test Results for CH 11 / 2462MHz (for emission above 1GHz)

- Modulation Type: OFDM
- Temperature: 27°C
- Relative Humidity: 44%
- Duty Cycle of the Equipment During the Test: 100.00%
- Test Engineer: Hikaru Chan

(A) Polarization: Horizontal

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2836.000	48.48	-25.52	74.00	56.47	29.51	1.96	39.46	Peak	100	100
2	3208.000	41.90	-32.10	74.00	48.37	30.56	2.16	39.19	Peak	100	100
3	4924.000	41.09	-32.91	74.00	45.56	33.21	2.47	40.15	Peak	100	100

(B) Polarization: Vertical

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2836.000	51.55	-22.45	74.00	59.54	29.51	1.96	39.46	Peak	100	100
2	3000.000	42.48	-31.52	74.00	49.55	30.05	2.28	39.40	Peak	100	100
3	4924.000	40.18	-33.82	74.00	44.65	33.21	2.47	40.15	Peak	100	100


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)


Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

5.6.11. Photographs of Radiated Emission Test Configuration

FRONT VIEW

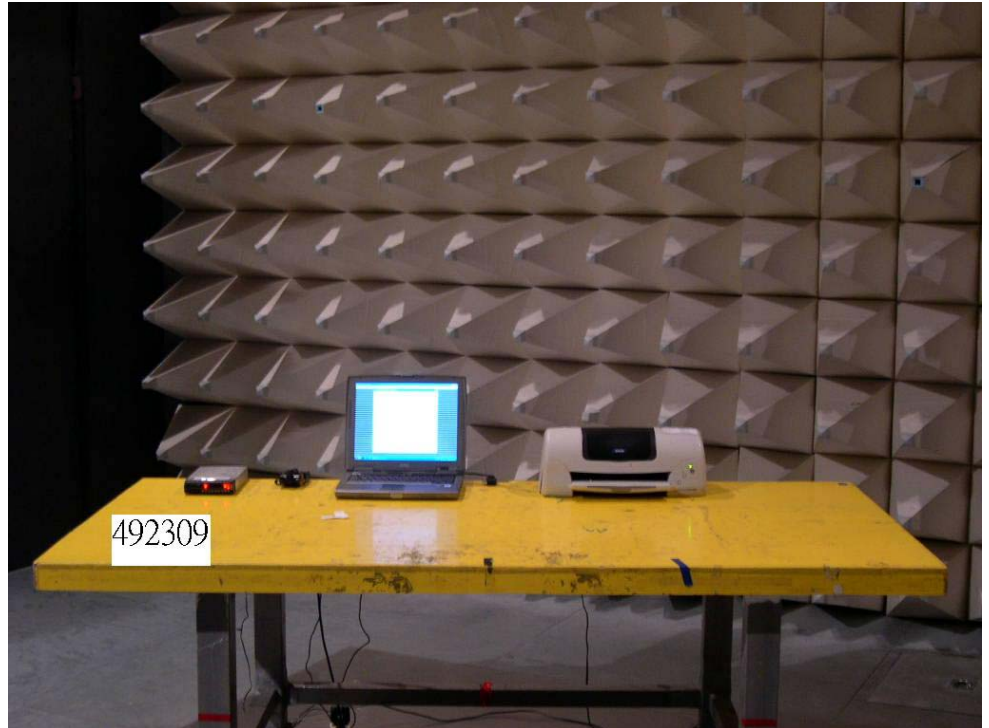

REAR VIEW

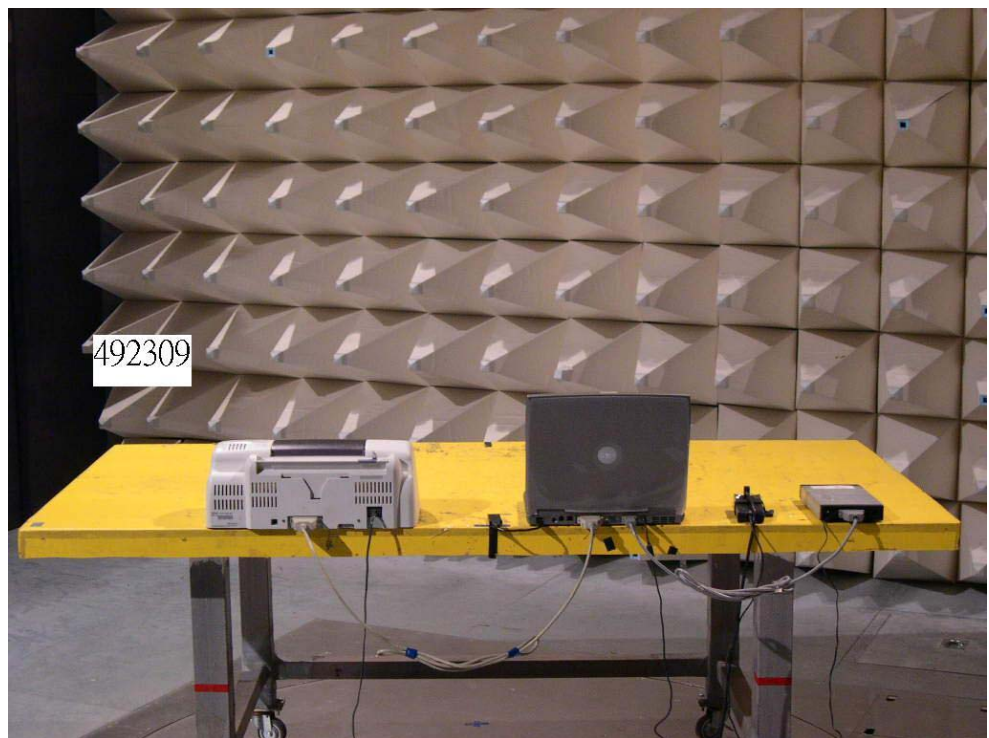



5.7. Antenna Requirements

5.7.1. Standard Applicable

47 CFR Part15 Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

47 CFR Part15 Section 15.247 (b):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

5.7.2. Antenna Connected Construction

The antenna connector of this EUT is chip Antenna.

6. List of Measuring Equipments Used

Items	Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
1	EMC Receiver	R&S	ESCS 30	100174	9 KHz – 2.75 GHz	Feb. 16, 2004	Conduction (CO04-HY)
2	LISN	MessTec	NNB-2/16Z	2001/004	9 KHz – 30 MHz	Jun. 09, 2004	Conduction (CO04-HY)
3	LISN (Support Unit)	MessTec	NNB-2/16Z	99041	9 KHz – 30 MHz	Apr. 27, 2004	Conduction (CO04-HY)
4	EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
5	RF Cable-CON	UTIFLEX	3102-26886-4	CB044	9KHz~30MHz	Apr. 21, 2004	Conduction (CO04-HY)
6	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz~1GHz 3m	Jun. 21, 2004	Radiation (03CH03-HY)
7	Spectrum analyzer	R&S	FSP40	100004	9KHz~40GHz	Aug. 31, 2004	Radiation (03CH03-HY)
8	Amplifier	HP	8447D	2944A09072	100KHz – 1.3GHz	Nov. 05, 2003	Radiation (03CH03-HY)
9	Biconical Antenna	SCHWARZBECK	VHBB 9124	301	30MHz –200MHz	Jul. 28, 2004	Radiation (03CH03-HY)
10	Log Antenna	SCHWARZBECK	VUSLP 9111	221	200MHz -1GHz	Jul. 28, 2004	Radiation (03CH03-HY)
11	RF Cable-R03m	Jye Bao	RG142	CB021	30MHz~1GHz	Dec. 03, 2003	Radiation (03CH03-HY)
12	Amplifier	MITEQ	AFS44	849984	100MHz~26.5GHz	Mar. 26, 2004	Radiation (03CH03-HY)
13	Horn Antenna	EMCO	3115	6821	1GHz – 18GHz	Sep. 11, 2004	Radiation (03CH03-HY)
14	Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
15	Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
16	Horn Antenna	Schwarzbeck	BBHA9170	154	18GHz~40GHz	Jun. 09, 2004	Radiation (03CH03-HY)
17	RF Cable-HIGH	Jye Bao	RG142	CB030-HIGH	1GHz~29.5GHz	Dec. 05, 2003	Radiation (03CH03-HY)

※ Calibration Interval of instruments listed above is one year.



Items	Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
18	Spectrum analyzer	R&S	FSP7	838858/014	9KHZ~7GHZ	Sep. 02, 2004	Conducted (TH01-HY)
19	Power meter	R&S	NRVS	100444	DC~40GHz	Jun. 15, 2004	Conducted (TH01-HY)
20	Power sensor	R&S	NRV-Z55	100049	DC~40GHz	Jun. 15, 2004	Conducted (TH01-HY)
21	Power Sensor	R&S	NRV-Z32	100057	30MHz-6GHz	Jun. 15, 2004	Conducted (TH01-HY)
22	AC power source	HPC	HPA-500W	HPA-9100024	AC 0~300V	Jun. 16, 2004	Conducted (TH01-HY)
23	AC power source	G.W.	GPC-6030D	C671845	DC 1V~60V	Nov. 06, 2003	Conducted (TH01-HY)
24	Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Sep. 30, 2004	Conducted (TH01-HY)
25	RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz~7GHz	Jan. 01, 2004	Conducted (TH01-HY)
26	RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz~1GHz	Jan. 01, 2004	Conducted (TH01-HY)

※ Calibration Interval of instruments listed above is one year.



