

# FCC RADIO TEST REPORT

**FCC ID: RDUABF01F**

**Product Name :** wireless FM transmitter

**Trade Mark :** Aluratek

**Main Model :** ABF01F

**Additional Model :** N/A

**Report No. :** UNIA21061101ER-02

## Prepared for

Aluratek Inc.

15241 Barranca Pkwy, Irvine, CA 92618, United States

## Prepared by

Shenzhen United Testing Technology Co., Ltd.

2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd, Tiegang  
Community, Xixiang Str, Bao'an District, Shenzhen, China

## TEST RESULT CERTIFICATION

**Applicant**.....: Aluratek Inc.

**Address** .....: 15241 Barranca Pkwy, Irvine, CA 92618, United States

**Manufacturer**.....: HAIKE PLASTIC AND ELECTRONIC CO LTD

**Address** .....: Block B, Bai Fuli Industrial Zone Hua Hui Road, Da Lang Street,  
Long Hua District, Shenzhen City, China

### Product description

**Product Name**.....: wireless FM transmitter

**Trade Mark** .....: Aluratek

**Model Name** .....: ABF01F

**Test Methods**.....: FCC Rules and Regulations Part 15 Subpart C Section 15.239  
ANSI C63.10: 2013

This device described above has been tested by Shenzhen United Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of UNI, this document may be altered or revised by Shenzhen United Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

**Date of Test**.....:

**Date (s) of performance of tests**.....: Jun. 11, 2021 ~ Jul. 06, 2021

**Date of Issue** .....: Jul. 14, 2021

**Test Result**.....: Pass

Prepared by:

*Bob Liao*

Bob Liao/Editor

Reviewer:

*kahn.yang*

Kahn yang/Supervisor

Approved & Authorized Signer:

*Liuze*

Liuze/Manager

| Table of Contents                                  | Page |
|----------------------------------------------------|------|
| 1 TEST SUMMARY                                     | 4    |
| 2 GENERAL INFORMATION                              | 6    |
| 2.1 GENERAL DESCRIPTION OF EUT                     | 6    |
| 2.2 CARRIER FREQUENCY OF CHANNELS                  | 7    |
| 2.3 TEST MODE                                      | 7    |
| 2.4 TEST SETUP                                     | 8    |
| 2.5 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL | 8    |
| 2.6 MEASUREMENT INSTRUMENTS LIST                   | 9    |
| 3 CONDUCTED EMISSION                               | 10   |
| 3.1 TEST LIMIT                                     | 10   |
| 3.2 TEST SETUP                                     | 10   |
| 3.3 TEST PROCEDURE                                 | 11   |
| 3.4 TEST RESULT                                    | 11   |
| 4 RADIATED EMISSION                                | 12   |
| 4.1 TEST LIMIT                                     | 12   |
| 4.2 TEST SETUP                                     | 13   |
| 4.3 TEST PROCEDURE                                 | 14   |
| 4.4 TEST RESULT                                    | 14   |
| 5 BAND EDGE                                        | 18   |
| 5.1 TEST LIMIT                                     | 18   |
| 5.2 TEST PROCEDURE                                 | 18   |
| 5.3 TEST RESULT                                    | 18   |
| 6 OCCUPIED BANDWIDTH                               | 21   |
| 6.1 TEST SETUP                                     | 21   |
| 6.2 TEST PROCEDURE                                 | 21   |
| 6.4 TEST RESULT                                    | 21   |
| 7 ANTENNA REQUIREMENT                              | 23   |
| 8 PHOTO OF TEST                                    | 24   |
| 8.1 RADIATED EMISSION                              | 24   |
| 8.2 CONDUCTED EMISSION                             | 25   |

## 1 TEST SUMMARY

### 1.1 TEST PROCEDURES AND RESULTS

| ITEM                | STANGARD               | RESULT    |
|---------------------|------------------------|-----------|
| CONDUCTED EMISSION  | FCC Part 15.207        | N/A       |
| RADIATED EMISSION   | FCC Part 15.209/15.239 | COMPLIANT |
| BAND EDGE           | FCC Part 15.239/15.205 | COMPLIANT |
| OCCUPIED BANDWIDTH  | FCC Part 15.215        | COMPLIANT |
| ANTENNA REQUIREMENT | FCC Part 15.203        | COMPLIANT |

### 1.2 TEST FACILITY

Test Firm : Shenzhen United Testing Technology Co., Ltd.  
Address : 2F, Annex Bldg, Jiahuangyuan Tech Park, #365 Baotian 1 Rd, Tiegang Community, Xixiang Str, Bao'an District, Shenzhen, China

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.The testing quality system of our laboratory meets with ISO/IEC-17025 requirements. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

A2LA Certificate Number: 4747.01

The EMC Laboratory has been accredited by A2LA, and in compliance with ISO/IEC 17025:2017 General Requirements for testing Laboratories.

FCC Registration Number: 674885

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission.

IC Registration Number: 21947

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada.

### 1.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

#### A. Conducted Measurement:

| Test Site | Method | Measurement Frequency Range | U, (dB) | NOTE |
|-----------|--------|-----------------------------|---------|------|
| UNI       | ANSI   | 9kHz ~ 150kHz               | 2.96    |      |
|           |        | 150kHz ~ 30MHz              | 2.44    |      |

#### B. Radiated Measurement:

| Test Site | Method | Measurement Frequency Range | U, (dB) | NOTE |
|-----------|--------|-----------------------------|---------|------|
| UNI       | ANSI   | 9kHz ~ 30MHz                | 2.50    |      |
|           |        | 30MHz ~ 1000MHz             | 4.80    |      |
|           |        | Above 1000MHz               | 4.13    |      |

## 2 GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

|                      |                                     |
|----------------------|-------------------------------------|
| Product Name:        | wireless FM transmitter             |
| Trade Mark:          | Aluratek                            |
| Main Model:          | ABF01F                              |
| Additional Model:    | N/A                                 |
| Model Difference:    | N/A                                 |
| FCC ID:              | RDUABF01F                           |
| Operation Frequency: | 88.1MHz~107.9MHz                    |
| Number of Channels:  | 199CH                               |
| Modulation Type:     | FM                                  |
| Antenna Type:        | Internal Antenna                    |
| Antenna Gain:        | 0dBi                                |
| Battery:             | N/A                                 |
| Adapter:             | N/A                                 |
| Power Source:        | DC 12-24V from DC Power Port of Car |

## 2.2 CARRIER FREQUENCY OF CHANNELS

| Channel List |                 |         |                 |         |                 |
|--------------|-----------------|---------|-----------------|---------|-----------------|
| Channel      | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 00           | 88.1            | 95      | 97.3            | 189     | 106.9           |
| 01           | 88.2            | 96      | 97.4            | 190     | 107.0           |
| 02           | 88.3            | 97      | 97.5            | 191     | 107.1           |
| 03           | 88.4            | 98      | 97.6            | 192     | 107.2           |
| 04           | 88.5            | 99      | 97.9            | 193     | 107.3           |
| 05           | 88.6            | 100     | 98.0            | 194     | 107.4           |
| 06           | 88.7            | 101     | 98.1            | 195     | 107.5           |
| 07           | 88.8            | 102     | 98.2            | 196     | 107.6           |
| 08           | 88.9            | 103     | 98.3            | 197     | 107.7           |
| 09           | 89.0            | 104     | 98.4            | 198     | 107.8           |
| 10           | 89.1            | 105     | 98.5            | 199     | 107.9           |
| ...          | ...             | ...     | ...             |         |                 |


## 2.3 TEST MODE

The EUT was programmed to be in continuously transmitting mode.

| Channel List |             |                      |
|--------------|-------------|----------------------|
| Test Channel | EUT Channel | Test Frequency (MHz) |
| Low          | CH00        | 88.1                 |
| Middle       | CH101       | 98.1                 |
| High         | CH199       | 107.9                |

## 2.4 TEST SETUP

Operation of EUT during Radiation testing:



## 2.5 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment               | Mfr/Brand | Model/Type No. | Note |
|------|-------------------------|-----------|----------------|------|
| E-1  | wireless FM transmitter | Aluratek  | ABF01F         | EUT  |
| E-2  | Battery                 | N/A       | N/A            | AE   |
|      |                         |           |                |      |
|      |                         |           |                |      |
|      |                         |           |                |      |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|------|
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |

Note:

1. The support equipment was authorized by Declaration of Confirmation.
2. For detachable type I/O cable should be specified the length in cm in 『Length』 column.
3. “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

## 2.6 MEASUREMENT INSTRUMENTS LIST

| Item                             | Equipment                           | Manufacturer  | Model No.      | Serial No.    | Calibrated until |
|----------------------------------|-------------------------------------|---------------|----------------|---------------|------------------|
| Conduction Emissions Measurement |                                     |               |                |               |                  |
| 1                                | Conducted Emission Test Software    | EZ-EMC        | Ver.CCS-3A1-CE | N/A           | N/A              |
| 2                                | AMN                                 | Schwarzbeck   | NNLK8121       | 8121370       | 2021.10.12       |
| 3                                | AAN                                 | TESEQ         | T8-Cat6        | 38888         | 2021.10.12       |
| 4                                | Pulse Limiter                       | CYBRTEK       | EM5010         | E115010056    | 2022.05.18       |
| 5                                | EMI Test Receiver                   | Rohde&Schwarz | ESCI           | 101210        | 2021.10.12       |
| Radiated Emissions Measurement   |                                     |               |                |               |                  |
| 1                                | Radiated Emission Test Software     | EZ-EMC        | Ver.CCS-03A1   | N/A           | N/A              |
| 2                                | Horn Antenna                        | Sunol         | DRH-118        | A101415       | 2021.10.18       |
| 3                                | Broadband Hybrid Antenna            | Sunol         | JB1            | A090215       | 2022.03.01       |
| 4                                | PREAMP                              | HP            | 8449B          | 3008A00160    | 2021.10.18       |
| 5                                | PREAMP                              | HP            | 8447D          | 2944A07999    | 2022.05.18       |
| 6                                | EMI TEST RECEIVER                   | Rohde&Schwarz | ESR3           | 101891        | 2021.10.12       |
| 7                                | VECTOR Signal Generator             | Rohde&Schwarz | SMU200A        | 101521        | 2021.10.12       |
| 8                                | Signal Generator                    | Agilent       | E4421B         | MY4335105     | 2021.11.11       |
| 9                                | MXA Signal Analyzer                 | Agilent       | N9020A         | MY50510140    | 2021.10.12       |
| 10                               | MXA Signal Analyzer                 | Keysight      | N9020A         | MY51110104    | 2021.10.12       |
| 11                               | RF Power sensor                     | DARE          | RPR3006W       | 15I00041SNO88 | 2022.05.18       |
| 12                               | RF Power sensor                     | DARE          | RPR3006W       | 15I00041SNO89 | 2022.05.18       |
| 13                               | RF power divider                    | Anritsu       | K241B          | 992289        | 2021.10.12       |
| 14                               | Wideband radio communication tester | Rohde&Schwarz | CMW500         | 154987        | 2021.10.12       |
| 15                               | Active Loop Antenna                 | Com-Power     | AL-130R        | 10160009      | 2022.05.18       |
| 16                               | Broadband Hybrid Antennas           | Schwarzbeck   | VULB9163       | VULB9163#958  | 2022.05.18       |
| 17                               | Horn Antenna                        | Schwarzbeck   | BBHA9120D      | 9120D-1680    | 2022.05.18       |
| 18                               | Horn Antenna                        | A-INFOMW      | LB-180400-KF   | J211060660    | 2021.11.04       |
| 19                               | Microwave Broadband Preamplifier    | Schwarzbeck   | BBV 9721       | 100472        | 2022.05.18       |
| 20                               | Signal Generator                    | Agilent       | N5183A         | MY47420153    | 2022.05.18       |
| 21                               | Spectrum Analyzer                   | Rohde&Schwarz | FSP 40         | 100501        | 2022.05.18       |
| 22                               | Power Meter                         | KEYSIGHT      | N1911A         | MY50520168    | 2022.05.18       |
| 23                               | Frequency Meter                     | VICTOR        | VC2000         | 997406086     | 2022.05.18       |
| 24                               | DC Power Source                     | HYELEC        | HY5020E        | 055161818     | 2022.05.18       |

### 3 CONDUCTED EMISSION

#### 3.1 TEST LIMIT


For unintentional device, according to § 15.207(a) Line Conducted Emission Limits is as following

| Frequency (MHz) | Maximum RF Line Voltage (dB $\mu$ V) |      |         |        |
|-----------------|--------------------------------------|------|---------|--------|
|                 | CLASS A                              |      | CLASS B |        |
|                 | Q.P.                                 | Ave. | Q.P.    | Ave.   |
| 0.15~0.50       | 79                                   | 66   | 66~56*  | 56~46* |
| 0.50~5.00       | 73                                   | 60   | 56      | 46     |
| 5.00~30.0       | 73                                   | 60   | 60      | 50     |

\* Decreasing linearly with the logarithm of the frequency.

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

#### 3.2 TEST SETUP

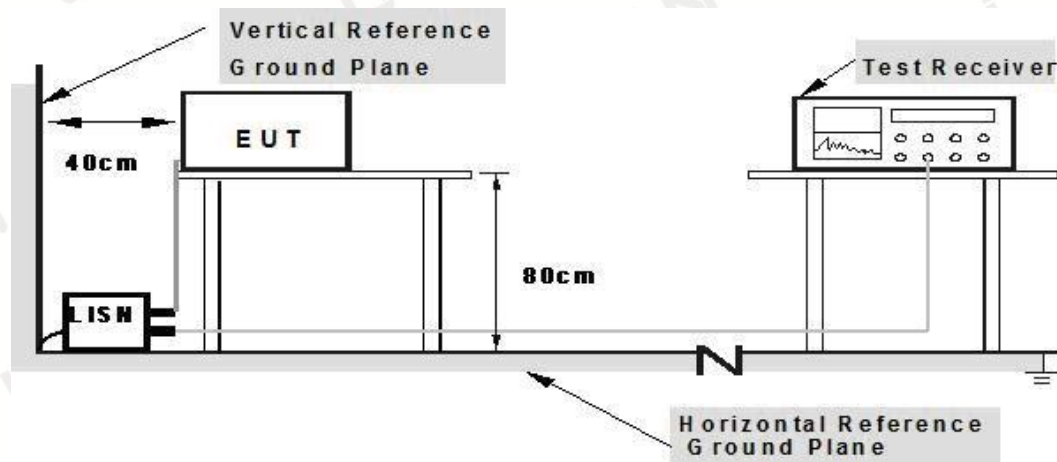

**Note: 1.Support units were connected to second LISN.**

**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

### 3.3 TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is placed on a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

### 3.4 TEST RESULT

N/A

Remark: EUT is powered by DC 12-24V from DC Power Port of Car.

## 4 RADIATED EMISSION

### 4.1 TEST LIMIT

For unintentional device, according to § 15.209(a), except for Class B digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

| Frequency         | Field strength<br>(microvolt/meter) | Limit<br>(dBuV/m ) | Remark     | Measurement<br>distance (m) |
|-------------------|-------------------------------------|--------------------|------------|-----------------------------|
| 0.009MHz-0.490MHz | 2400/F (kHz)                        | -                  | Quasi-peak | 300                         |
| 0.490MHz-1.705MHz | 24000/F (kHz)                       | -                  | Quasi-peak | 30                          |
| 1.705MHz-30MHz    | 30                                  | -                  | Quasi-peak | 30                          |
| 30MHz-88MHz       | 100                                 | 40.0               | Quasi-peak | 3                           |
| 88MHz-216MHz      | 150                                 | 43.5               | Quasi-peak | 3                           |
| 216MHz-960MHz     | 200                                 | 46.0               | Quasi-peak | 3                           |
| 960MHz-1GHz       | 500                                 | 54.0               | Quasi-peak | 3                           |
| Above 1GHz        | 500                                 | 54.0               | Average    | 3                           |
|                   |                                     | 74.0               | Peak       | 3                           |


For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

Limit: (Field strength of the fundamental signal)


| Frequency         | Limit (dBuV/m @3m) | Remark        |
|-------------------|--------------------|---------------|
| 2400MHz-2483.5MHz | 94.0               | Average Value |
|                   | 114.0              | Peak Value    |

## 4.2 TEST SETUP


### 1. Radiated Emission Test-Up Frequency Below 30MHz

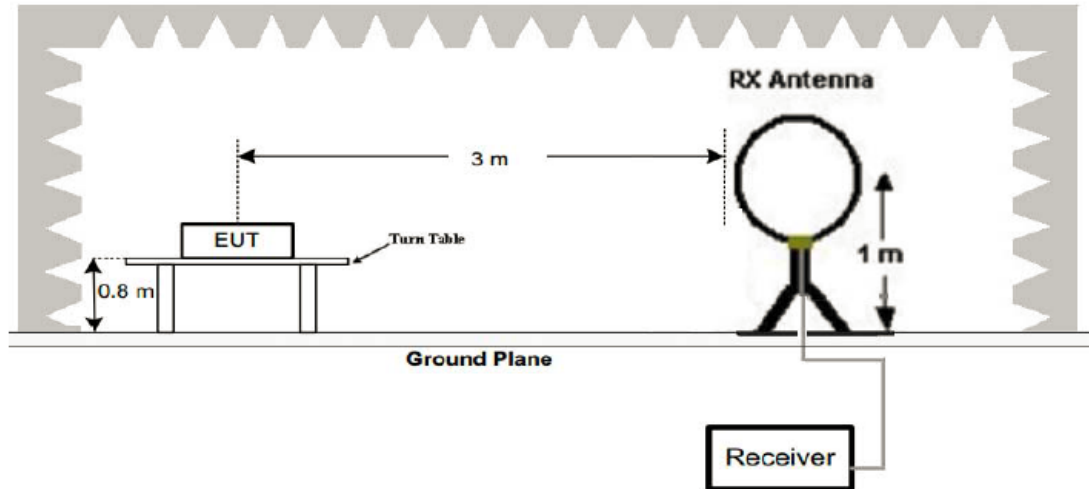

### 2. Radiated Emission Test-Up Frequency 30MHz~1GHz

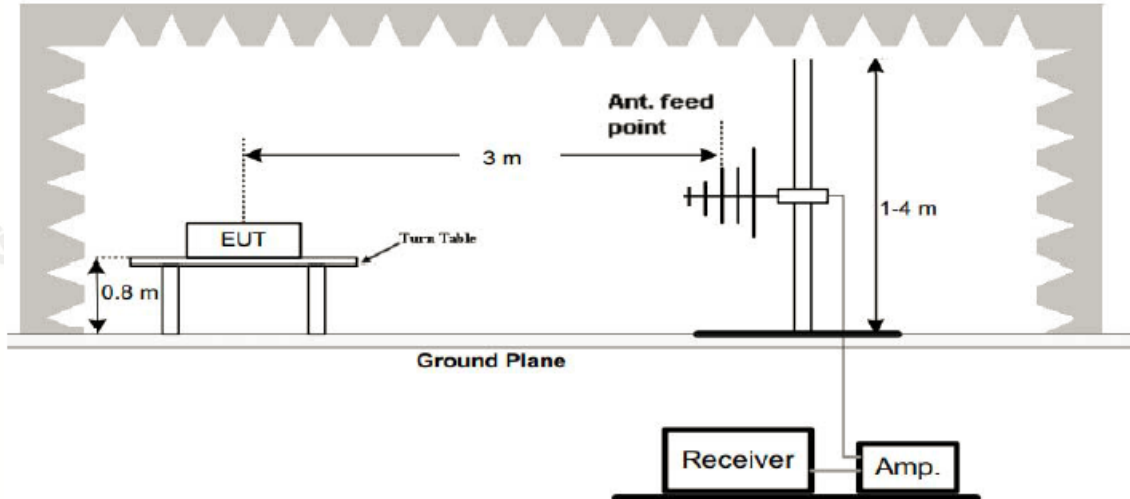

### 3. Radiated Emission Test-Up Frequency Above 1GHz

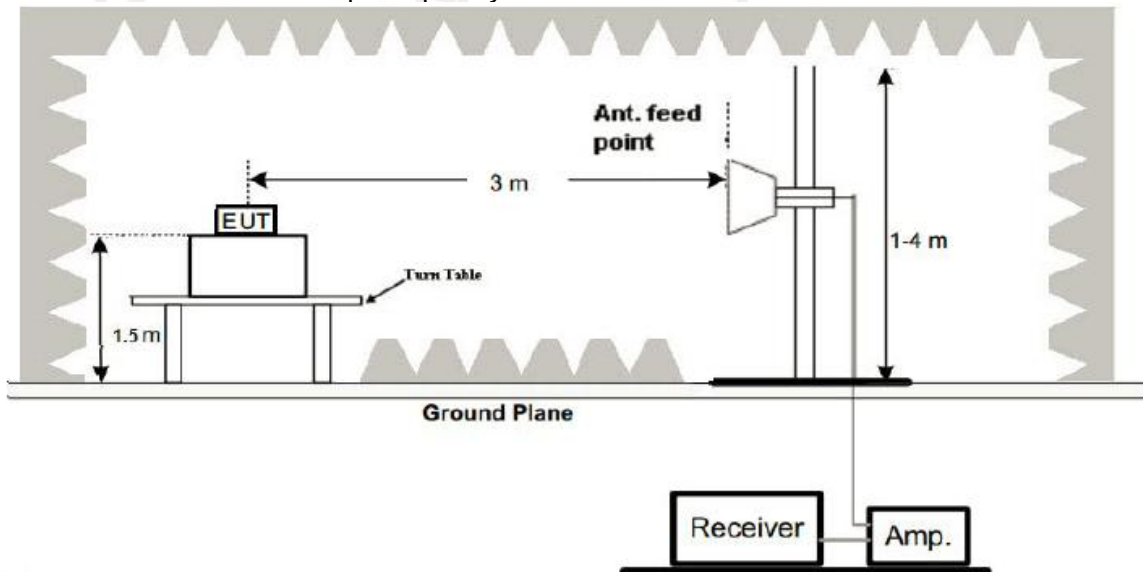

### 4.3 TEST PROCEDURE

1. Below 1GHz measurement the EUT is placed on turntable which is 0.8m above ground plane.  
And above 1GHz measurement EUT was placed on low permittivity and low tangent turn table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The test frequency range from 9kHz to 25GHz per FCC PART 15.33(a).

Note:

For battery operated equipment, the equipment tests shall be performed using a new battery.

### 4.4 TEST RESULT

PASS

Remark:

1. By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, and test data recorded in this report.
2. Radiated emission test from 9kHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9kHz to 30MHz and not recorded in this report.

### Test Results:

CH00 (88.1MHz)

Horizontal:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 88.1                                                                                          | 75.11                    | -16.28         | 58.83                      | 68                 | -9.17          | PK            |
| 88.1                                                                                          | 56.38                    | -16.28         | 40.10                      | 48                 | -7.90          | AV            |
| 74.06                                                                                         | 44.05                    | -16.32         | 27.73                      | 40                 | -12.27         | PK            |
| 280.55                                                                                        | 46.80                    | -14.22         | 32.58                      | 46                 | -13.42         | AV            |
| 407.36                                                                                        | 42.62                    | -11.49         | 31.13                      | 46                 | -14.87         | PK            |
| 648.15                                                                                        | 38.69                    | -7.53          | 31.16                      | 46                 | -14.84         | AV            |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |               |

Vertical:

| Frequency<br>(MHz)                                                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|-----------------------------------------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 88.1                                                                                          | 72.46                    | -16.28         | 56.18                      | 68                 | -11.82         | PK            |
| 88.1                                                                                          | 53.28                    | -16.28         | 37.00                      | 48                 | -11.00         | AV            |
| 72.11                                                                                         | 44.57                    | -16.09         | 28.48                      | 40                 | -11.52         | PK            |
| 269.69                                                                                        | 46.62                    | -14.35         | 32.27                      | 46                 | -13.73         | AV            |
| 569.22                                                                                        | 39.77                    | -8.59          | 31.18                      | 46                 | -14.82         | PK            |
| 636.38                                                                                        | 40.85                    | -7.65          | 33.20                      | 46                 | -12.80         | AV            |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                          |                |                            |                    |                |               |

### CH101 (98.1MHz)

#### Horizontal:

| Frequency                                                                                     | Reading Result | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------------------------------------------------------------------------------------------|----------------|--------|----------------|----------|--------|---------------|
| (MHz)                                                                                         | (dBμV)         | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 98.1                                                                                          | 73.62          | -16.17 | 57.45          | 68       | -10.55 | PK            |
| 98.1                                                                                          | 56.60          | -16.17 | 40.43          | 48       | -7.57  | AV            |
| 74.06                                                                                         | 42.69          | -16.32 | 26.37          | 40       | -13.63 | PK            |
| 280.55                                                                                        | 45.88          | -14.22 | 31.66          | 46       | -14.34 | AV            |
| 407.36                                                                                        | 44.60          | -11.49 | 33.11          | 46       | -12.89 | PK            |
| 648.15                                                                                        | 39.66          | -7.53  | 32.13          | 46       | -13.87 | AV            |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                |        |                |          |        |               |

#### Vertical:

| Frequency                                                                                     | Reading Result | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------------------------------------------------------------------------------------------|----------------|--------|----------------|----------|--------|---------------|
| (MHz)                                                                                         | (dBμV)         | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 98.1                                                                                          | 71.22          | -16.17 | 55.05          | 68       | -12.95 | PK            |
| 98.1                                                                                          | 53.63          | -16.17 | 37.46          | 48       | -10.54 | AV            |
| 72.11                                                                                         | 43.15          | -16.09 | 27.06          | 40       | -12.94 | PK            |
| 269.69                                                                                        | 46.62          | -14.35 | 32.27          | 46       | -13.73 | AV            |
| 569.22                                                                                        | 38.75          | -8.59  | 30.16          | 46       | -15.84 | PK            |
| 636.38                                                                                        | 38.44          | -7.65  | 30.79          | 46       | -15.21 | AV            |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                |        |                |          |        |               |

### CH199 (107.9MHz)

#### Horizontal:

| Frequency<br>(MHz)                                                                            | Reading<br>Result<br>(dB $\mu$ V) | Factor<br>(dB) | Emission Level<br>(dB $\mu$ V/m) | Limits<br>(dB $\mu$ V/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|-----------------------------------|----------------|----------------------------------|--------------------------|----------------|------------------|
| 107.9                                                                                         | 75.63                             | -16.03         | 59.60                            | 68                       | -8.40          | PK               |
| 107.9                                                                                         | 58.52                             | -16.03         | 42.49                            | 48                       | -5.51          | AV               |
| 74.06                                                                                         | 44.33                             | -16.32         | 28.01                            | 40                       | -11.99         | PK               |
| 280.55                                                                                        | 46.56                             | -14.22         | 32.34                            | 46                       | -13.66         | AV               |
| 407.36                                                                                        | 43.47                             | -11.49         | 31.98                            | 46                       | -14.02         | PK               |
| 648.15                                                                                        | 39.39                             | -7.53          | 31.86                            | 46                       | -14.14         | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                                   |                |                                  |                          |                |                  |

#### Vertical:

| Frequency<br>(MHz)                                                                            | Reading<br>Result<br>(dB $\mu$ V) | Factor<br>(dB) | Emission Level<br>(dB $\mu$ V/m) | Limits<br>(dB $\mu$ V/m) | Margin<br>(dB) | Detector<br>Type |
|-----------------------------------------------------------------------------------------------|-----------------------------------|----------------|----------------------------------|--------------------------|----------------|------------------|
| 107.9                                                                                         | 73.75                             | -16.03         | 57.72                            | 68                       | -10.28         | PK               |
| 107.9                                                                                         | 55.80                             | -16.03         | 39.77                            | 48                       | -8.23          | AV               |
| 72.11                                                                                         | 42.65                             | -16.09         | 26.56                            | 40                       | -13.44         | PK               |
| 269.69                                                                                        | 45.77                             | -14.35         | 31.42                            | 46                       | -14.58         | AV               |
| 569.22                                                                                        | 40.75                             | -8.59          | 32.16                            | 46                       | -13.84         | PK               |
| 636.38                                                                                        | 40.85                             | -7.65          | 33.20                            | 46                       | -12.80         | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit |                                   |                |                                  |                          |                |                  |

#### Remark :

1. Measuring frequencies from 9 KHz to the 1 GHz, Radiated emission test from 9KHz to 30MHz was verified, and no any emission was found except system noise floor.
2. \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
3. The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.

## 5 BAND EDGE

### 5.1 TEST LIMIT

FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

### 5.2 TEST PROCEDURE

The band edge compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW to 1MHz and VBM to 3MHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength. Peak detector is for both.

### 5.3 TEST RESULT

PASS

Operation Mode: TX CH00 (88.1MHz)

Horizontal:

| Frequency<br>(MHz)                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|---------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 75.2                                                          | 47.25                    | -16.09         | 31.16                      | 40                 | -8.84          | PK               |
| 75.2                                                          | /                        | -16.09         | /                          | /                  | /              | AV               |
| 88                                                            | 46.72                    | -16.28         | 30.44                      | 40                 | -9.56          | PK               |
| 88                                                            | /                        | -16.28         | /                          | /                  | /              | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. |                          |                |                            |                    |                |                  |

Vertical:

| Frequency<br>(MHz)                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|---------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 75.2                                                          | 47.17                    | -16.09         | 31.08                      | 40                 | -8.92          | PK               |
| 75.2                                                          | /                        | -16.09         | /                          | /                  | /              | AV               |
| 88                                                            | 47.27                    | -16.28         | 30.99                      | 40                 | -9.01          | PK               |
| 88                                                            | /                        | -16.28         | /                          | /                  | /              | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. |                          |                |                            |                    |                |                  |

Operation Mode: TX CH199 (107.9MHz)

Horizontal:

| Frequency<br>(MHz)                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|---------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 108                                                           | 49.39                    | -16.03         | 33.36                      | 43.5               | -10.14         | PK               |
| 108                                                           | /                        | -16.03         | /                          | 43.5               | /              | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. |                          |                |                            |                    |                |                  |

Vertical:

| Frequency<br>(MHz)                                            | Reading Result<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector<br>Type |
|---------------------------------------------------------------|--------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 108                                                           | 48.2                     | -16.03         | 32.17                      | 43.5               | -11.33         | PK               |
| 108                                                           | /                        | -16.03         | /                          | 43.5               | /              | AV               |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. |                          |                |                            |                    |                |                  |

## 6 OCCUPIED BANDWIDTH

### 6.1 TEST SETUP

Same as Radiated Emission Measurement.

### 6.2 TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as normal operation.
3. Based on ANSI C63.10 section 6.9.2: RBW=3kHz, VBW=10kHz, Span=300kHz.
4. The useful radiated emission from the EUT was detected by the spectrum analyzer with peak detector.


### 6.4 TEST RESULT

PASS


GFSK Modulation:

| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) | Result |
|---------|-----------------|----------------------|--------|
| CH00    | 88.1            | 1.043                | PASS   |
| CH101   | 98.1            | 1.043                | PASS   |
| CH199   | 107.9           | 1.043                | PASS   |


CH00: 88.1MHz

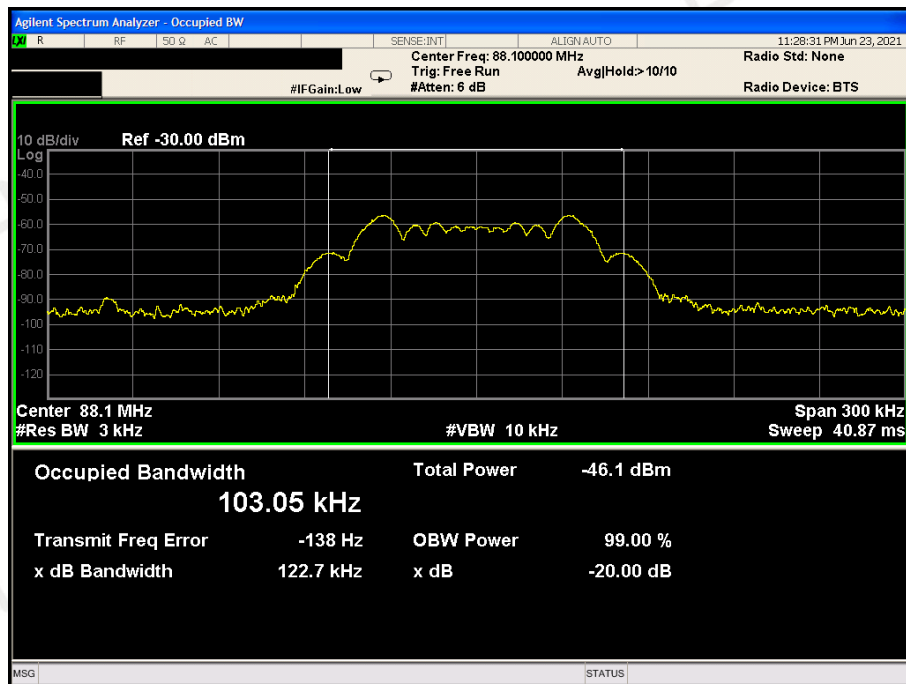

CH101: 98.1MHz

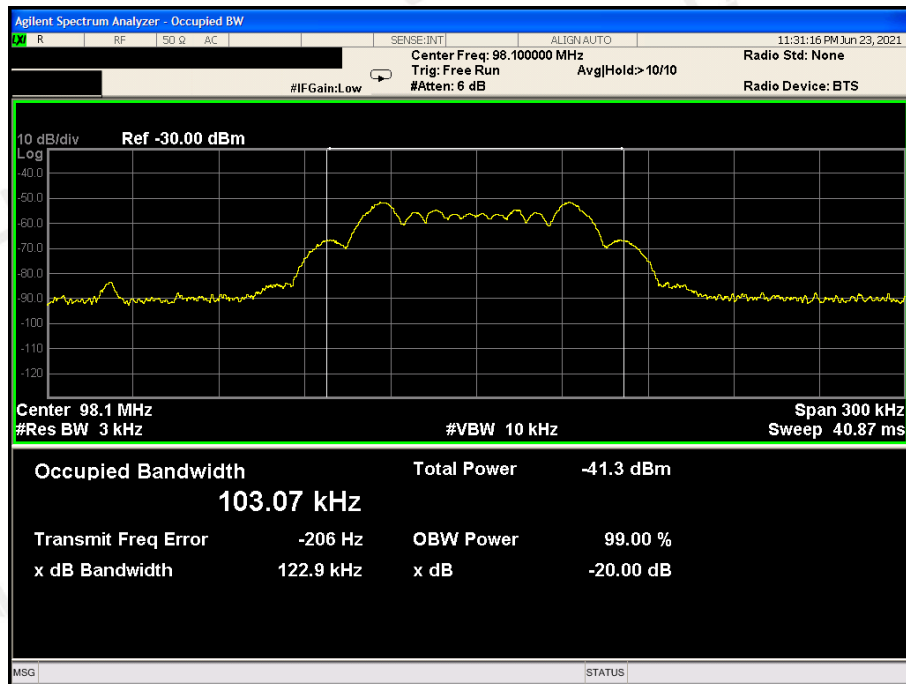

CH199: 107.9MHz

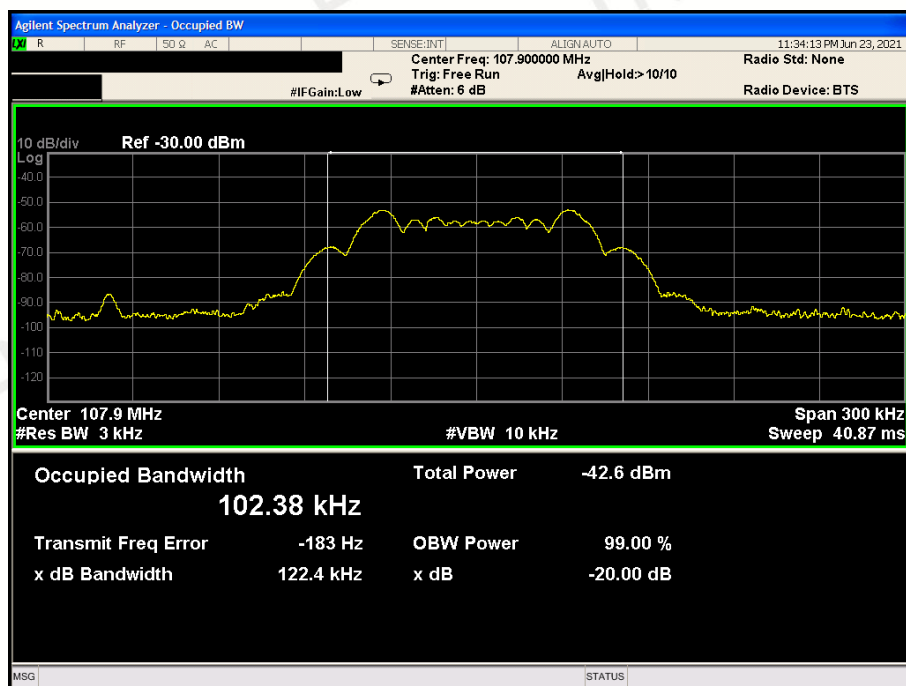

## 7 ANTENNA REQUIREMENT


### Standard Applicable:

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### Antenna Connected Construction


The antenna used in this product is an Internal Antenna, The directional gains of antenna used for transmitting is 0dBi.

### ANTENNA:

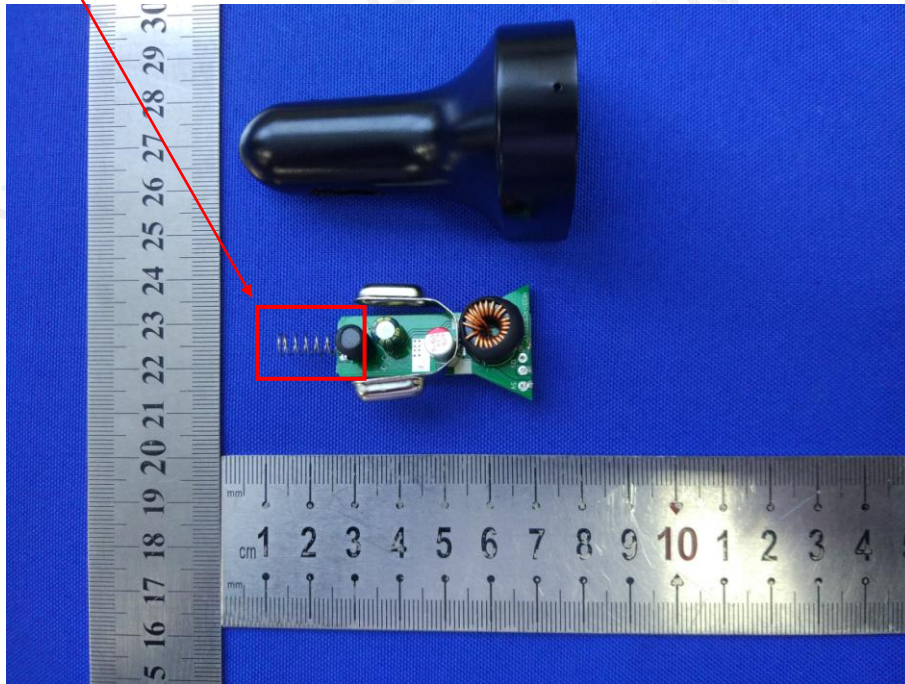

## 8 PHOTO OF TEST

### 8.1 RADIATED EMISSION

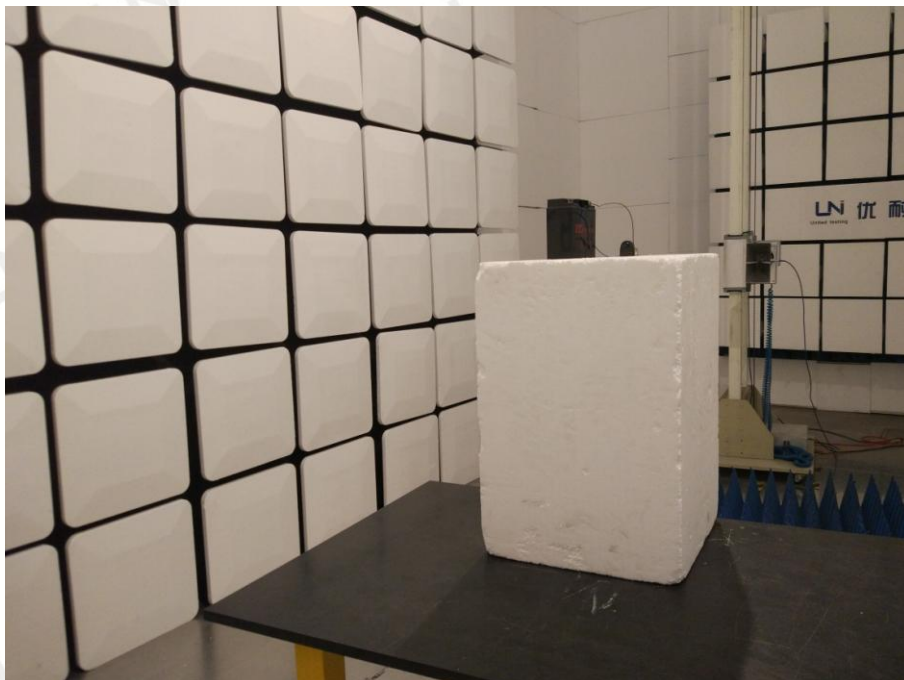

## 8.2 CONDUCTED EMISSION

N/A

\*\*\*End of Report\*\*\*