

Prüfbericht - Nr.: 16002952 001		Seite 1 von 16			
<i>Test Report No.:</i>		<i>Page 1 of 16</i>			
Auftraggeber: <i>Client:</i>	Classic Tech Development Ltd. 11-12/F., YUE XIU IND'L BLDG. 87 HUNG TO ROAD, KWUN TONG, KOWLOON HONG KONG				
Gegenstand der Prüfung: Transmitter of Wireless Speaker System <i>Test item:</i>					
Bezeichnung: <i>Identification:</i>	SP1191 SP1091	FCC ID: <i>FCC ID</i>	REDSP1191-001T		
Wareneingangs-Nr.: <i>Receipt No.:</i>	73011610	Eingangsdatum: <i>Date of receipt:</i>	14.04.2004		
Prüfart: <i>Testing location:</i>	Shenzhen Bureau of Quality Technical Supervision Shenzhen Academy of Metrology and Quality Inspection Bldg, of Shenzhen Academy of Metrology and Quality Inspection, Longzhu Road, Nanshan, Shenzhen, P.R. China		Listed test laboratory according to FCC rules section 2.948 for measuring devices under Parts 15		
Prüfgrundlage: <i>Test specification:</i>	ANSI C63.4:2001 Conduct Emissions with limits described at FCC Part 15 subpart C section 15.207 Radiated Emissions with limits described at FCC Part 15 Subpart C section 15.209 and 15.249				
Prüfergebnis: <i>Test Result:</i>	Der vorstehend beschriebene Prüfgegenstand wurde geprüft und entspricht oben genannter Prüfgrundlage. The a. m. test item passed.				
Prüflaboratorium/ Testing Laboratory: TÜV Rheinland (Guangdong) Ltd zusammengestellt/ compiled by: kontrolliert/ checked by:					
10.05.2004	Dave Xie		05.2004	Yuxin Huang	
Datum <i>Date</i>	Name <i>Name</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name <i>Name</i>	Unterschrift <i>Signature</i>
Sonstiges/ Other Aspects:					
Abkürzungen: ok / P = entspricht Prüfgrundlage fail / F = entspricht nicht Prüfgrundlage n.a. / N = nicht anwendbar					
Abbreviations: ok / P = passed fail / F = failed n.a. / N = not applicable					
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i>					

Prüfbericht - Nr.: 16002952 001

Test Report No.:

Seite 2 von 16

Page 2 of 16

TEST SUMMARY

5.1 CONDUCTED EMISSION FOR FCC PART 15 PER SECTION 15.207(A)

RESULT: ok

5.2 RADIATED EMISSION FOR FCC PART 15 PER SECTION 15.209(A)

RESULT: ok

5.3 FUNDAMENTAL AND HARMONICS RADIATED EMISSION FOR FCC PART 15 PER SECTION 15.249(A)

RESULT: ok

Prüfbericht - Nr.: 16002952 001

Test Report No.:

Seite 3 von 16

Page 3 of 16

Contents

1	GENERAL REMARKS.....	4
1.1	COMPLEMENTARY MATERIALS.....	4
2	TEST SITES.....	4
2.1	TEST FACILITIES	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	5
2.3	TRACE ABILITY.....	5
2.4	CALIBRATION	5
2.5	MEASUREMENT UNCERTAINTY	6
2.6	LOCATION OF ORIGINAL DATA.....	6
2.7	STATUS OF FACILITY USED FOR TESTING.....	6
3	GENERAL PRODUCT INFORMATION.....	6
3.1	PRODUCT FUNCTION AND INTENDED USE	7
3.2	RATINGS AND SYSTEM DETAILS	7
3.3	INDEPENDENT OPERATION MODES	7
3.4	SUBMITTED DOCUMENTS.....	8
4	TEST SET-UP AND OPERATION MODE	8
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	8
4.2	TEST OPERATION AND TEST SOFTWARE.....	8
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	8
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	8
4.5	TEST SET-UP.....	9
5	TEST RESULTS EMISSION	11
5.1	CONDUCTED EMISSION FOR FCC PART 15 PER SECTION 15.207(A).....	11
5.2	RADIATED EMISSION FOR FCC PART 15 PER SECTION 15.209(A).....	12
5.3	FUNDAMENTAL AND HARMONICS RADIATED EMISSION FOR FCC PART 15 PER SECTION 15.249(A).....	13
6	PHOTOGRAPHS OF THE TEST SET-UP	14
7	LIST OF TABLES.....	16
8	LIST OF PHOTOGRAPHS.....	16

Prüfbericht - Nr.: 16002952 001
Test Report No.:

Seite 4 von 16
Page 4 of 16

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix 1: Test result

2 Test Sites

2.1 Test Facilities

Shenzhen SMQ

Shenzhen Bureau of Quality Technical Supervision
Shenzhen Academy of Metrology and Quality Inspection
Bldg. of Shenzhen Academy of Metrology and Quality Inspection
Longzhu Road, Nanshan, Shenzhen,
P.R. China

Prüfbericht - Nr.: 16002952 001
Test Report No.:

Seite 5 von 16
Page 5 of 16

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Calibrated until
Antenna	Chase	CBL6112B	2591	29.01.2005
Horn Antenna	Rohde & Schwarz	HF906	100014	29.01.2005
3m Semi-anechoic chamber	Albatross Projects	9X6X6	----	29.01.2005
EMI Test Receiver	Rohde & Schwarz	ES126	838786/013	29.01.2005
Communications Test Set	Rohde & Schwarz	CMU200	1100.0008.02	29.01.2005
Communications Test Set	HP	HP8920A	3438A05187	29.01.2005
EMI Test Receiver	Rohde & Schwarz	ESCS30	100003	29.01.2005
AMN	Rohde & Schwarz	ESH3-Z5	100002	29.01.2005

2.3 Trace ability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

Prüfbericht - Nr.: 16002952 001
Test Report No.:

Seite 6 von 16
Page 6 of 16

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for conducted emissions measurements is ± 3 dB.
The estimated combined standard uncertainty for radiated emissions measurements is ± 3 dB.

2.6 Location of original data

The original copies of all test data taken during actual testing were attached at Appendix 1 of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Guangzhou) file for certification follow-up purposes.

2.7 Status of facility used for testing

Shenzhen Bureau of Quality Technical Supervision, Shenzhen Academy of Metrology and Quality Inspection, Bldg. of Shenzhen Academy of Metrology and Quality Inspection, Longzhu Road, Nanshan, Shenzhen, P.R.China is listed on the US Federal Communications Commission list of facilities approved to perform measurements

3 General Product Information

Brief description of the test sample:

The submitted sample SP1191 is 900MHz transmitter for a wireless headphone system with two channels available. Audio signal input to the audio-in port of the sample and modulated as a FM signal for transmission. 19kHz pilot signal is also included in the RF signal as complete FM transmission. The antenna type is integrated.

SP1091 is identical with SP1191 except the model name.

As transmitter SP1291 has the same PCB with SP1191 and SP1091, the only difference is additional components for stereo function in SP1291. Therefore FCC characters of transmitter SP1191 can be accessed by tests to transmitter SP1291 when it is working at correspond function.

Prüfbericht - Nr.: 16002952 001
Test Report No.:

Seite 7 von 16
Page 7 of 16

3.1 Product Function and Intended Use

For details, refer to technical document and the user manual.

3.2 Ratings and System Details

Frequency range	:	912.03MHz, 913.03MHz
Number of channels	:	2 channels
Type of antenna	:	Integral antenna
FCC ID	:	REDSPI191-001T
Power supply	:	AC/DC adaptor input
Ports	:	Audio input 12.5V DC input
RF Power level		<50 mV/m
Protection Class	:	III

Refer to the technical document for further information

3.3 Independent Operation Modes

The basic operation modes are:

Transmitting and standby

For further information refer to User Manual

Prüfbericht - Nr.: 16002952 001
Test Report No.:

Seite 8 von 16
Page 8 of 16

3.4 Submitted Documents

Block Diagram
Circuit Diagram
Components List
PCB layout
FCC label
User Manual
Photo document

4 Test Set-up and Operation Mode

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Refer to Test set-up in chapter 5.

4.3 Special Accessories and Auxiliary Equipment

The product has been tested together with the following AC/DC Adaptor:

Model	: PA-1215-DUA
Input	: AC 120V 60Hz
Output	: DC 12.5V / 150mA
Protection class	: II

4.4 Countermeasures to achieve EMC Compliance

The test sample, which has been tested, contained the noise suppression parts as described in the technical document. No additional measures were employed to achieve compliance.

Prüfbericht - Nr.: 16002952 001

Test Report No.:

Seite 9 von 16

Page 9 of 16

4.5 Test set-up

Diagram 1 of Measurement Equipment Configuration for Testing Conducted Emission


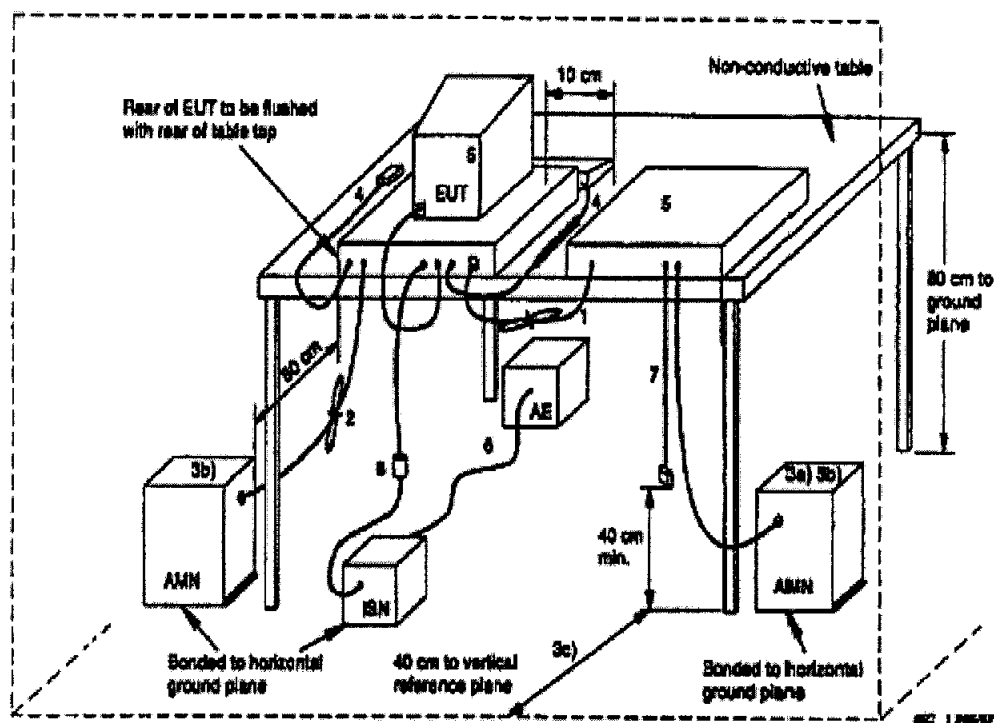


Diagram 2 of Measurement Equipment Configuration for Testing Radiated Emission

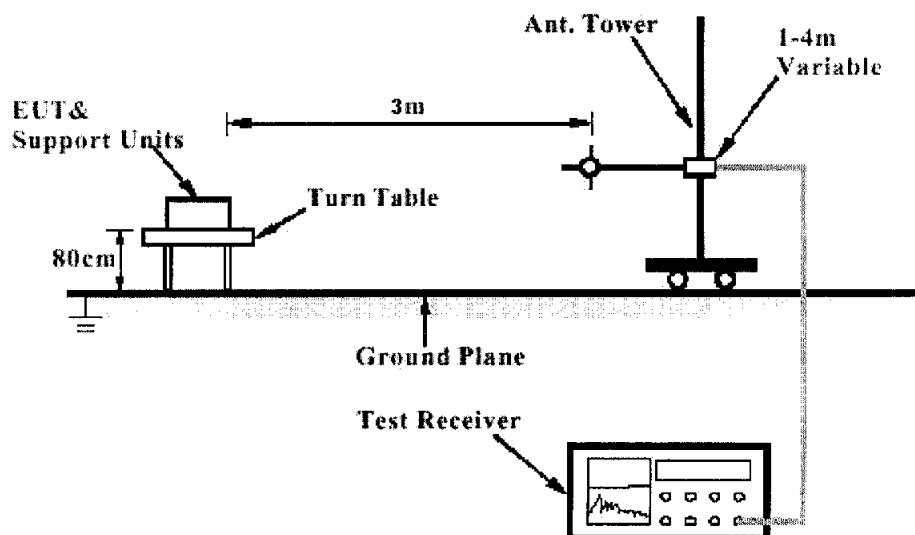

Prüfbericht - Nr.: 16002952 001
Test Report No.:

Seite 10 von 16
Page 10 of 16

Diagram 3 of Equipment Configuration for Testing Conducted Emission

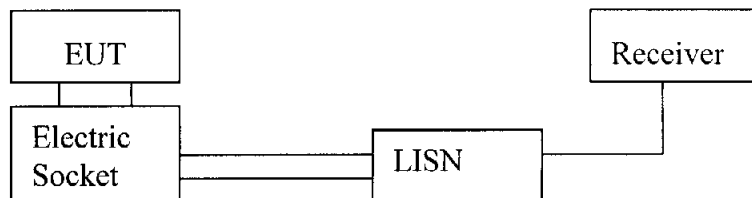


Diagram 4 of Equipment Configuration for Testing Radiated Emission



Prüfbericht - Nr.: 16002952 001
Test Report No.:

Seite 11 von 16
Page 11 of 16

5 Test Results EMISSION

5.1 Conducted Emission for FCC Part 15 Per Section 15.207(a)

RESULT:

ok

Date of testing : 14.04.2004
Test specification : FCC Part 15 Per Section 15.207(a)
Limits : FCC Part 15 Per Section 15.207(a)
Deviations from Standard Test procedures : None
Test procedure : Procedure specified in ANSI C63.4 were followed
Kind of test site : Shielded room
Operation mode : Transmitting at channel 1
Temperature : 22°C
Humidity : 65%

If the result of the measurement with the Quasi Peak detector is below the Average limit, the measurement with Average Detector has been omitted.

Disturbances other than those mentioned are small or not detectable.

The spectral diagrams in appendix 1 display the measurement of un-weighted peak values.

Table 2: Disturbance Voltage on AC Mains

Frequency [MHz]	Line	QP [dB μ V]	AV [dB μ V]	Quasi Peak Limit [dB μ V]	Average Limit [dB μ V]
---	*				

*) The disturbance measured is far below the limit and therefore, no final measurement was performed.

Prüfbericht - Nr.: 16002952 001

Test Report No.:

Seite 12 von 16

Page 12 of 16

5.2 Radiated Emission for FCC Part 15 Per Section 15.209(a)

RESULT:

ok

Date of testing : 13.04.2004
Test specification : FCC Part 15 Per Section 15.209(a)
Limits : FCC Part 15 Per Section 15.209(a)
Deviations from Standard Test procedures : None
Test procedure : Procedure specified in ANSI C63.4 were followed
Kind of test site : 3m Semi-anechoic chamber
Operation mode : Transmitting at channel 1
Temperature : 22°C
Humidity : 65%

The final measurement for frequencies below 1000MHz is performed with Quasi Peak detector; the final measurement for frequencies above 1000MHz is performed with Average detector.

Disturbances other than those mentioned are small or not detectable.

The spectral diagrams in appendix 1 display the measurement of un-weighted peak values.

Table 3: Radiated Emission

Frequency [MHz]	QP [dBμV]	AV [dBμV]	Polarity	Limit [dBμV]
---	*			

*) The disturbance measured is far below the limit and therefore, no final measurement was performed.

Prüfbericht - Nr.: 16002952 001

Test Report No.:

Seite 13 von 16

Page 13 of 16

5.3 Fundamental and harmonics Radiated Emission for FCC Part 15 Per Section 15.249(a)

RESULT:

ok

Date of testing : 13.04.2004
Test specification : FCC Part 15 Per Section 15.249(a)
Limits : FCC Part 15 Per Section 15.249(a)
Deviations from Standard Test procedures : None
Test procedure : Procedure specified in ANSI C63.4 were followed
Kind of test site : 3m Semi-anechoic chamber
Operation mode : Transmitting at channel 1
Temperature : 22°C
Humidity : 65%

Measurement was performed with unmodulated signal.

Polarization of the measurement for the larger power level: Vertical

Test conditions		Fundamental Frequency	
		Channel 1 (912.108MHz)	
T _{nom} (22°C)	Unit	(dBμV/m)	(mV/m)
	Horizontal	90.88	34.99
	Vertical	90.76	34.52
limit		93.979	50

The final measurement for frequencies below 1000MHz is performed with Quasi Peak detector; the final measurement for frequencies above 1000MHz is performed with Average detector.

Disturbances other than those mentioned are small or not detectable.


The spectral diagrams in appendix 1 display the measurement of un-weighted peak values.

Prüfbericht - Nr.: 16002952 001
Test Report No.:


Seite 14 von 16
Page 14 of 16

6 Photographs of the Test Set-Up

Photograph 1: Set-up for Conducted Emission on AC Mains

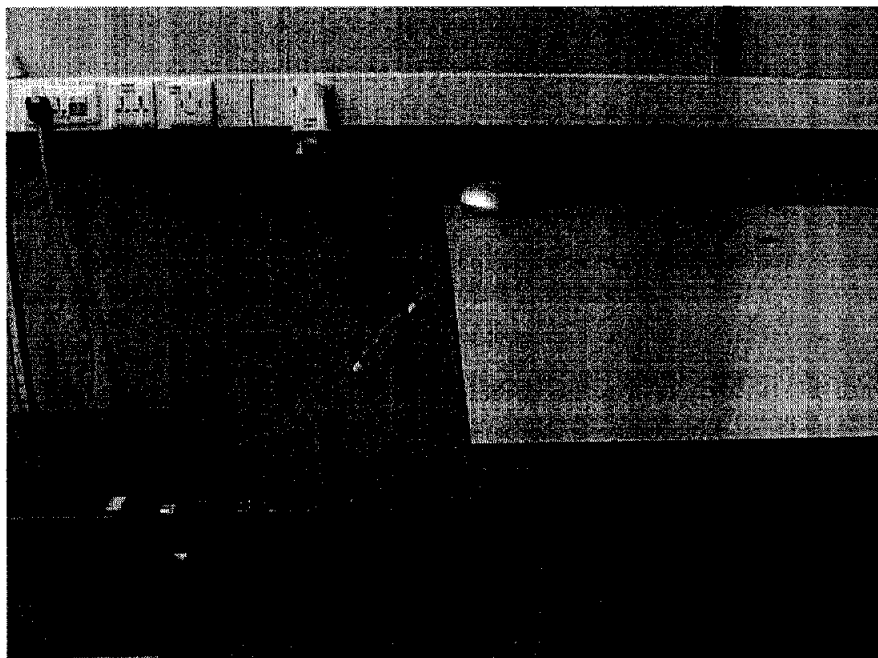


Photograph 2: Set-up for Radiation Measurement Below 1GHz

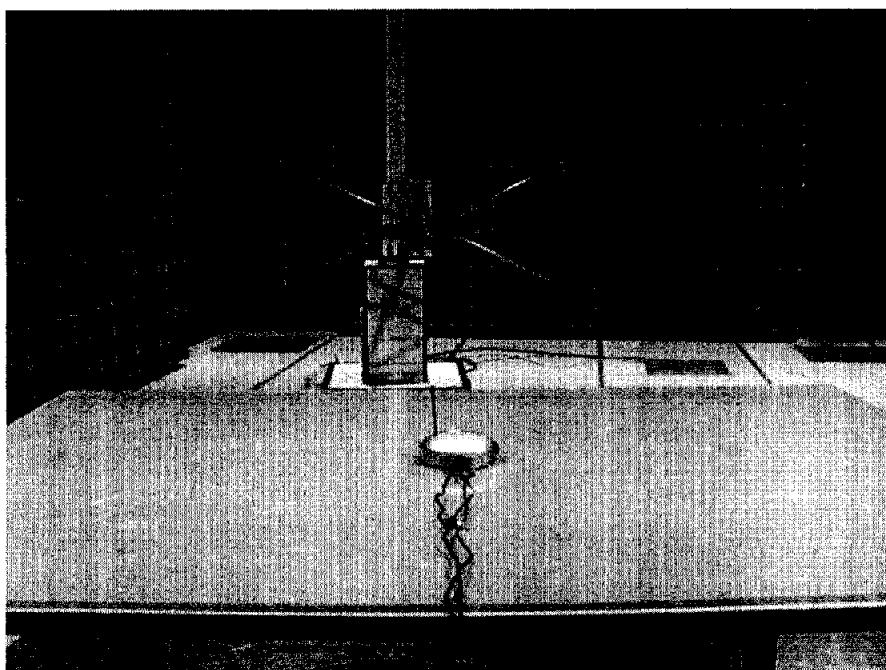

Prüfbericht - Nr.: 16002952 001
Test Report No.:

Seite 15 von 16
Page 15 of 16

Photograph 3: Set-up for Radiation Measurement Above 1GHz

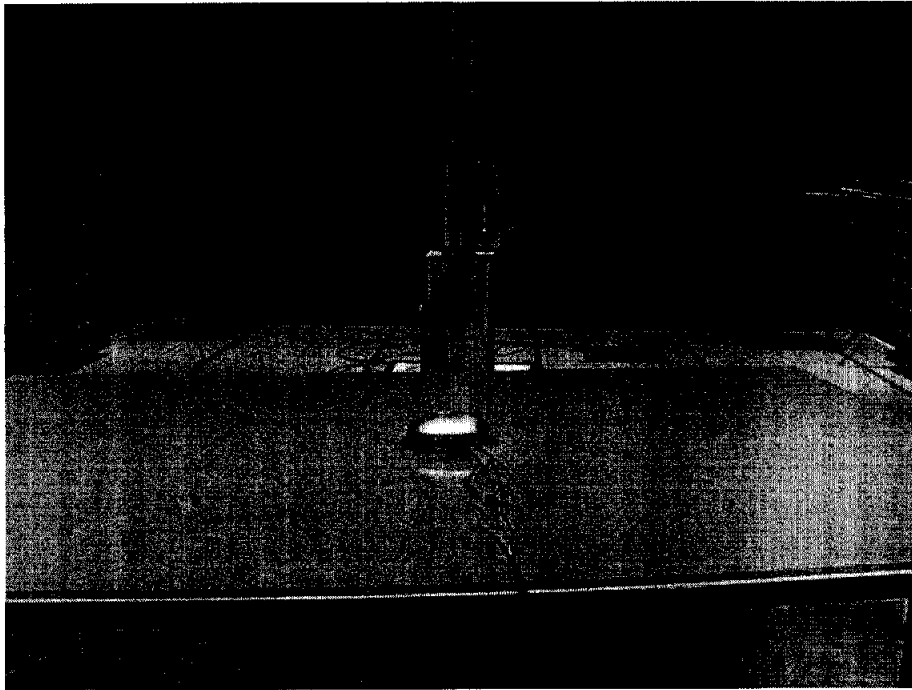

Prüfbericht - Nr.: 16002952 001
Test Report No.:

Seite 16 von 16
Page 16 of 16

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	5
Table 2: Disturbance Voltage on AC Mains.....	11
Table 3: Radiated Emission.....	12

8 List of Photographs

Photograph 1: Set-up for Conducted Emission on AC Mains	14
Photograph 2: Set-up for Radiation Measurement Below 1GHz.....	14
Photograph 3: Set-up for Radiation Measurement Above 1GHz.....	15

Prüfbericht - Nr.: 16002952 001

Test Report No.:

Seite 1 von 8

Page 1 of 8

Conducted Disturbance


eUT: M/N:SP1291
Op Cond: On *channel 1*
Test Spec: L
Comment: AC 120V/60Hz
Date: 14. Apr 04 21:19

Scan Settings (4 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	500k	4k	9k	PK	5ms	AUTO LN	OFF
500k	1M	4k	9k	PK	5ms	AUTO LN	OFF
1M	3M	5k	9k	PK	2ms	AUTO LN	OFF
3M	30M	5k	9k	PK	1ms	AUTO LN	OFF

Transducer No. Start Stop Name
20 9k 30M CE

Final Measurement: x QP
Meas Time: 1 s

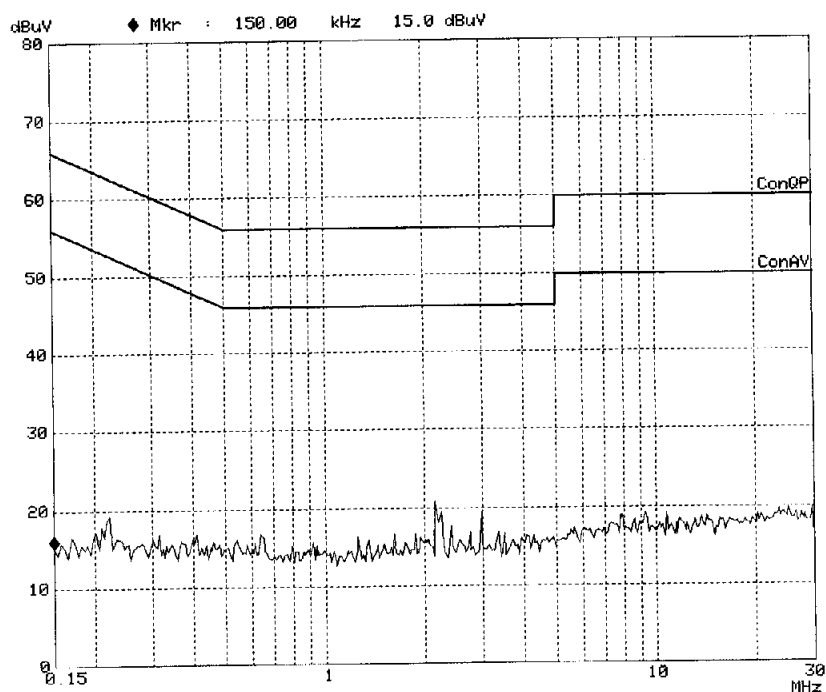

Prüfbericht - Nr.: 16002952 001

Test Report No.:

Seite 2 von 8

Page 2 of 8

Conducted Disturbance

EUT: M/N:SP1291
Op Cond: On
Test Spec: N
Comment: AC 120V/60Hz
Date: 14. Apr 04 21:29


channel 1

Scan Settings (4 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	500k	4k	9k	PK	5ms	AUTO	LN OFF
500k	1M	4k	9k	PK	5ms	AUTO	LN OFF
1M	3M	5k	9k	PK	2ms	AUTO	LN OFF
3M	30M	5k	9k	PK	1ms	AUTO	LN OFF

Transducer No. Start Stop Name
20 9k 30M CE

Final Measurement: x QP
Meas Time: 1 s

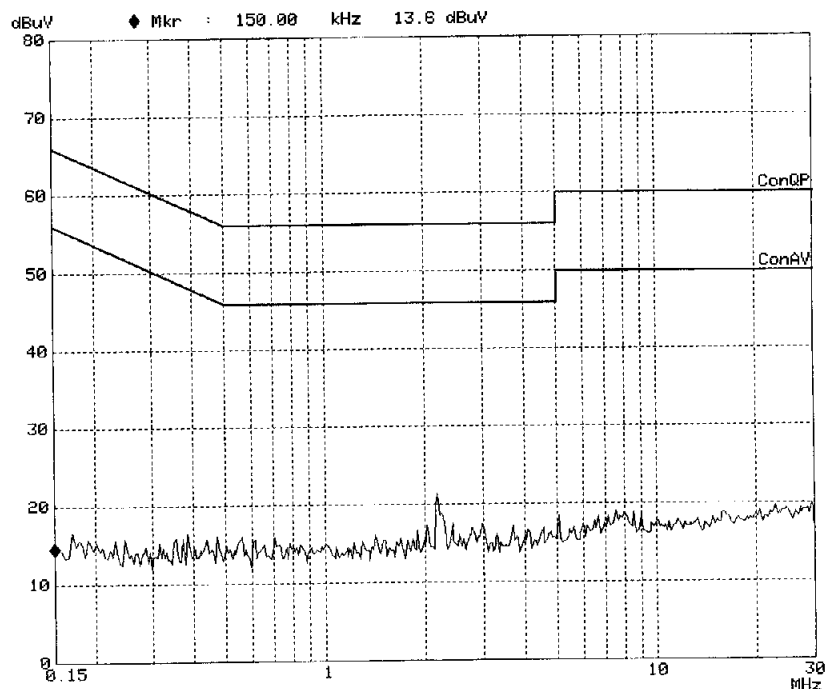

Prüfbericht - Nr.: 16002952 001

Test Report No.:

Seite 3 von 8


Page 3 of 8

Radiated Disturbance

FCC ClassB

EUT: M/N:SP1291
Manufacturer:
Operating Condition: TX (Channel1)
Test Site: SMQ EMC Lab.SAC
Test Specification:
Comment: Horizontal
AC 120V/60Hz

Marker: 912.52505 MHz 90.64 dBµV/m

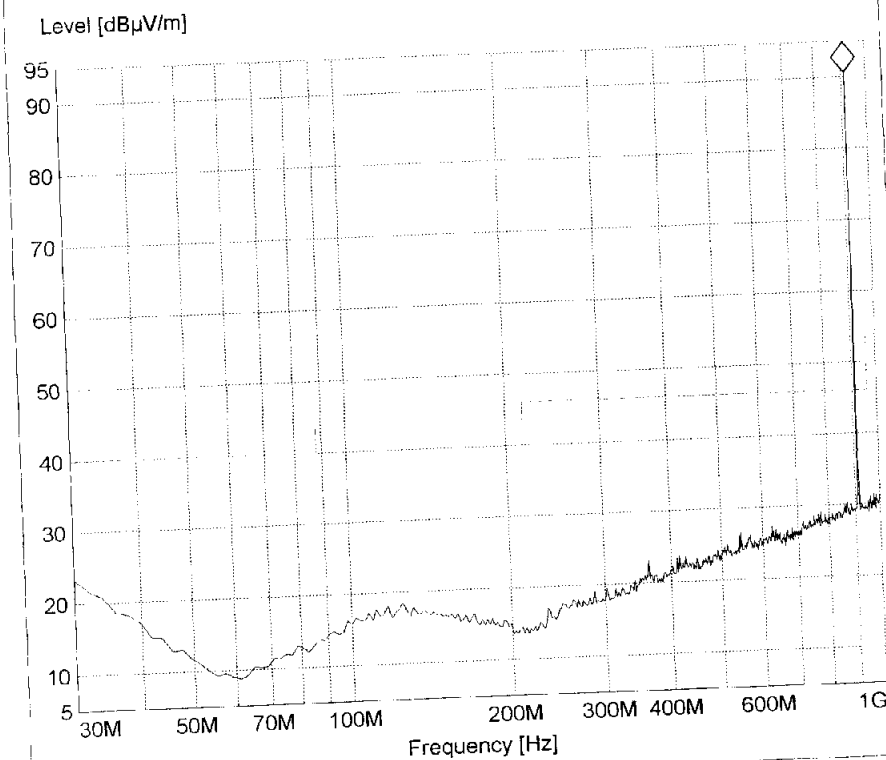

MES SP1291 L Hor
LIM FCC ClassB F QP/AV FCC ClassB, field strength 3m

Prüfbericht - Nr.: 16002952 001

Test Report No.:

Seite 4 von 8


Page 4 of 8

Radiated Disturbance

FCC ClassB

EUT: M/N:SP1291
Manufacturer:
Operating Condition: TX (Channell)
Test Site: SMQ EMC Lab.SAC
Test Specification: Vertical
Comment: AC 120V/60Hz

Marker: 912.52505 MHz 90.1 dBµV/m

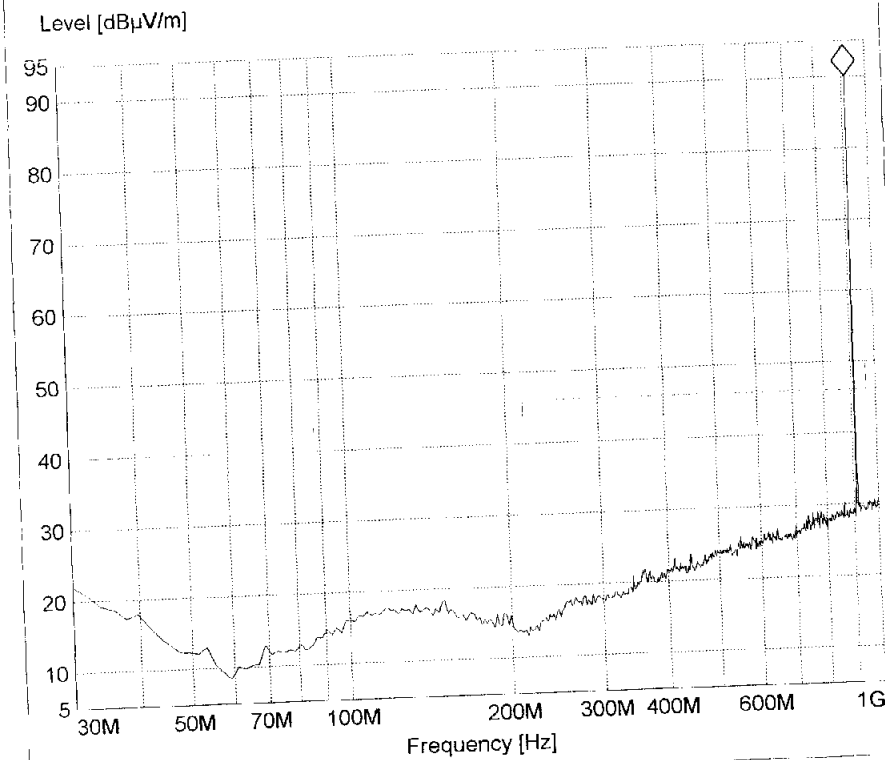

MES SP1291 L Ver
LJM FCC ClassB F QP/AV FCC ClassB, field strength 3m

Prüfbericht - Nr.: 16002952 001

Test Report No.:

Seite 5 von 8

Page 5 of 8

Radiated Spurious


FCC ClassB

EUT:

Manufacturer:
Operating Condition: TX (Channell)
Test Site: SMQ EMC Lab.SAC
Operator:
Test Specification: Horizontal
Comment: AC 120V/60Hz

M/N: H21224

Marker: 3.651302605 GHz 35.14 dBµV/m

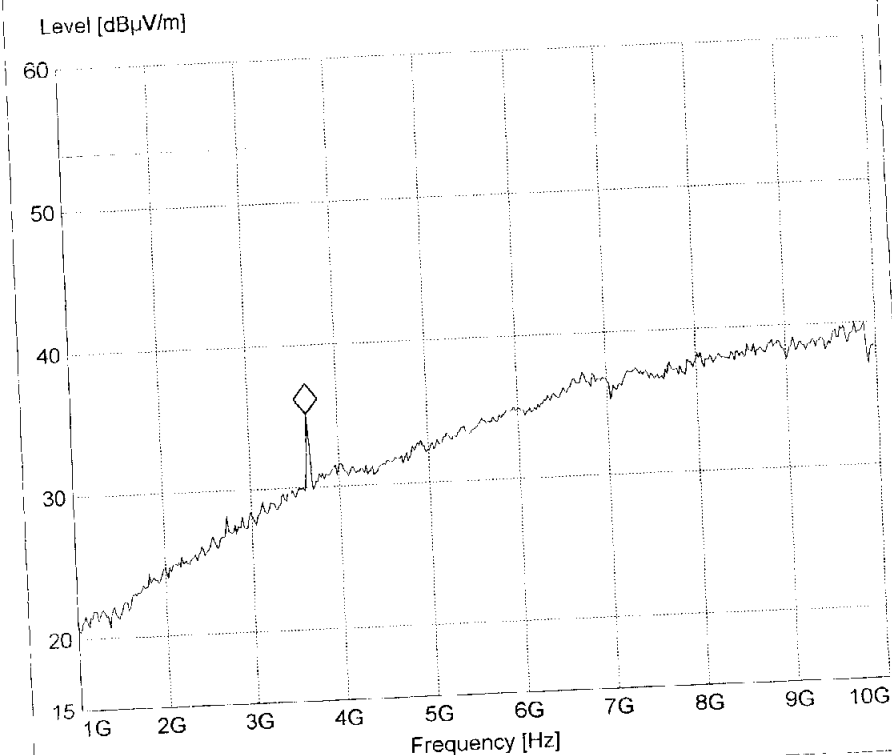

MES HP1291 H Hor
LIM FCC ClassB F QP/AV FCC ClassB, field strength 3m

Prüfbericht - Nr.: 16002952 001

Test Report No.:

Seite 6 von 8

Page 6 of 8


Radiated Spurious

FCC ClassB

EUT: ^{sp12-7/}
M/N: H1291
Manufacturer:
Operating Condition: TX (Channell)
Test Site: SMQ EMC Lab.SAC
Operator:
Test Specification: Vertical
Comment: AC 120V/60Hz

Marker: 3.651302605 GHz 33.78 dBµV/m

Level [dBµV/m]

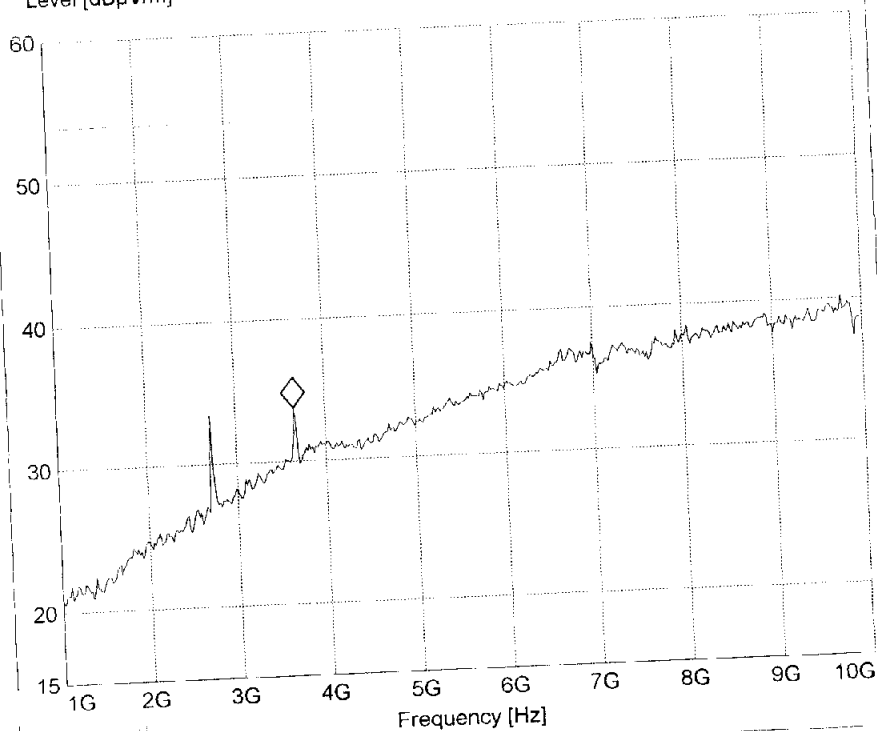


MRS AP1291 H Ver
LIM FCC ClassB F QP/AV FCC ClassB, field strength 3m

Prüfbericht - Nr.: 16002952 001

Test Report No.:

Seite 7 von 8

Page 7 of 8

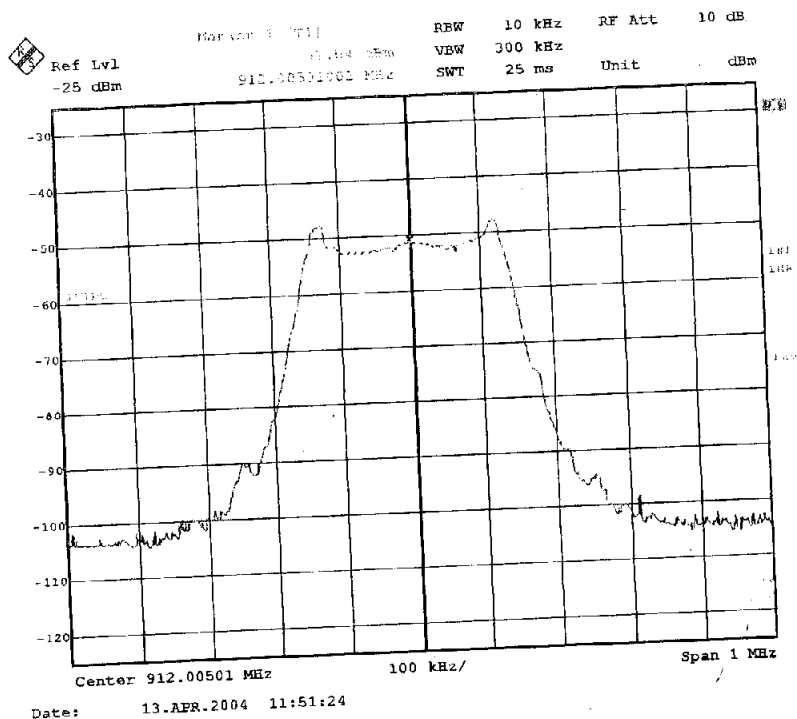

Prüfbericht - Nr.: 16002952 001

Test Report No.:

Seite 8 von 8

Page 8 of 8

