

# FCC RADIO TEST REPORT

According to

47 CFR FCC Part 15 Subpart C § 15.247

**Equipment** : HANDHELD COMPUTER  
**Brand Name** : iEi  
**Model No.** : MODAT-328  
**Filing Type** : New Application  
**Applicant** : ICP Electronics Inc.  
3F., No. 22, Zhongxing Rd., Xizhi Dist.,  
New Taipei City 221, Taiwan (R.O.C.)  
**FCC ID** : RFHMODAT-328  
**Manufacturer** : ICP Electronics Inc.  
2-5F, No. 22, Zhongxing Rd., Xizhi Dist.,  
New Taipei City 221, Taiwan (R.O.C.)  
**Received Date** : Mar. 19, 2012  
**Final Test Date** : Apr. 30, 2012

## Statement

**Test result included is only for the 802.11b/g part of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2009** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



**SPORTON International Inc.**

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

## Table of Contents

<b>1 SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>2 GENERAL INFORMATION.....</b>	<b>3</b>
2.1    Product Details.....	3
2.2    Accessories.....	3
2.3    Table for Filed Antenna.....	4
2.4    Table for Carrier Frequencies .....	4
2.5    Table for Test Modes .....	5
2.6    Table for Testing Locations.....	5
2.7    Table for Supporting Units .....	5
2.8    Table for Parameters of Test Software Setting.....	5
2.9    EUT Operation during Test .....	6
2.10    Test Configuration.....	7
<b>3 TEST RESULT .....</b>	<b>9</b>
3.1    AC Power Line Conducted Emissions Measurement .....	9
3.2    Maximum Conducted Output Power Measurement.....	15
3.3    Power Spectral Density Measurement.....	17
3.4    6dB Spectrum Bandwidth Measurement .....	23
3.5    Radiated Emissions Measurement .....	33
3.6    Band Edge and Fundamental Emissions Measurement.....	53
3.7    Antenna Requirements .....	58
<b>4 LIST OF MEASURING EQUIPMENTS.....</b>	<b>59</b>
<b>5 TEST LOCATION.....</b>	<b>61</b>
<b>6 TAF CERTIFICATE OF ACCREDITATION.....</b>	<b>62</b>
<b>APPENDIX A. MAXIMUM PERMISSIBLE EXPOSURE .....</b>	<b>A1 ~ A3</b>
<b>APPENDIX B. TEST PHOTOS .....</b>	<b>B1 ~ B9</b>
<b>APPENDIX C. PHOTOGRAPHS OF EUT .....</b>	<b>C1 ~ C35</b>

## History of This Test Report

Original Issue Date: May 23, 2012

Report No.: FR222724AC

- No additional attachment.
- Additional attachment were issued as following record:

# CERTIFICATE OF COMPLIANCE

According to

47 CFR FCC Part 15 Subpart C § 15.247

Equipment : HANDHELD COMPUTER


Brand Name : iEi

Model No. : MODAT-328

Applicant : ICP Electronics Inc.

3F., No. 22, Zhongxing Rd., Xizhi Dist.,  
New Taipei City 221, Taiwan (R.O.C.)

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Mar. 19, 2012 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

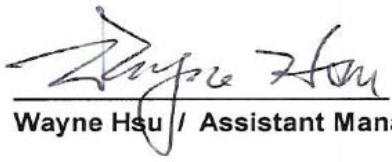

Wayne Hsu / Assistant Manager

***SPORTON International Inc.***

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

## 1 SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
3.1	15.207	AC Power Line Conducted Emissions	Complies	5.53 dB
3.2	15.247(b)(3)	Maximum Output Power	Complies	9.59 dB
3.3	15.247(e)	Power Spectral Density	Complies	17.35 dB
3.4	15.247(a)(2)	6dB Spectrum Bandwidth Measurement	Complies	-
3.5	15.247(d)	Radiated Emissions	Complies	4.21 dB
3.6	15.247(d)	Band Edge Emissions	Complies	4.71 dB
3.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth Measurement	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

## 2 GENERAL INFORMATION

### 2.1 Product Details

Only the radio detail of IEEE 802.11b/g is shown in this report. For more detailed features description, please refer to the manufacturer's specifications or user's manual.

Items	Description
Power Type	+5Vdc from AC Adapter ; 3.7Vdc from Li-ion Battery
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11g
Data Modulation	DSSS (DBPSK / DQPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11b/g: 11
Channel Band Width (99%)	11b: 13.56 MHz ; 11g: 16.52 MHz
Conducted Peak Power	11b: 16.01 dBm ; 11g: 20.41 dBm

### 2.2 Accessories

Power	Brand	Model	Rating
AC Adaptor	Tenpao	S012GM0500210	INPUT : 100-240V ~ 50/60Hz 450mA OUTPUT : 5.0V 2100mA
Li-ion Battery	iEi	MODAT-300	3.7V 1880mA 7Wh
<b>Other</b>			
USB Cable / Earphone / Plug			

## 2.3 Table for Filed Antenna

Antenna Category (Ant. Cat.)	
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input checked="" type="checkbox"/>	Temporary RF connector provided ; <input type="checkbox"/> No temporary RF connector provided

Transmitter Outputs & Receiver Inputs Information			
Modulation	Transmitter Outputs	Receiver Inputs	Transmitter Output Signals
802.11b/g	1	1	-

Antenna General Information									
Antenna Port (Total 2 Port)				1(TX/RX)					
Maximum RF Output Power Level (PL)				1					
Transmit Chains Power Distribution				<input checked="" type="checkbox"/> symmetrical distribution	<input type="checkbox"/> asymmetrical distribution				
Ant. No.	PL	Ant. Port [Ant No. X connect to Ant. Port Y]	Ant. Cat.	Ant. Type	Brand	Model	G <sub>ANT</sub> (dBi)	DG (dBi) [correlated] N <sub>TX</sub> = 1	DG (dBi) [uncorrelated] N <sub>TX</sub> = 2
1	1	1	Integral	PIFA	--	--	0.90	N/A	0.90
<input checked="" type="checkbox"/> The equipment is normally installed and point-to-point or point-to-multipoint systems: Ant. No. 1, 2									
Note 1: For all transmitter outputs with equal antenna gains, directional gain is to be computed as follows: Any transmit signals are correlated, Directional Gain (DG) = G <sub>ANT</sub> + 10 log(N) dBi All transmit signals are completely uncorrelated, Directional Gain (DG)= G <sub>ANT</sub>									
Note 2: For all transmitter outputs with unequal antenna gains, directional gain is to be computed as follows: Any transmit signals are correlated, Directional Gain (DG) = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N] \text{ dBi}$ All transmit signals are completely uncorrelated, Directional Gain (DG) = $10 \log[(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10})^2 / N] \text{ dBi}$									

## 2.4 Table for Carrier Frequencies

## Frequency Allocation for 802.11b/g

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

## 2.5 Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on the entire possible configuration for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
AC Power Line Conducted Emissions	Adapter Mode / USB Mode (Transmitting)	Auto	-
Maximum Output Power	11b/CCK	11 Mbps	1/6/11
Power Spectral Density	11g/BPSK	6 Mbps	1/6/11
6dB Spectrum Bandwidth Measurement			
Radiated Emissions Above 1GHz			
Radiated Emissions Below 1GHz	11g/BPSK	Auto	-
Fundamental Emissions	11b/CCK	11 Mbps	1/6/11
	11g/BPSK	6 Mbps	1/6/11
Band Edge Emissions	11b/CCK	11 Mbps	1/11
	11g/BPSK	6 Mbps	1/11

## 2.6 Table for Testing Locations

Test Site No.	Site Category	Location
CO04-HY	Conduction	Hwa Ya
TH01-HY	OVEN Room	Hwa Ya
03CH02-HY	SAC	Hwa Ya

Semi Anechoic Chamber (SAC).

## 2.7 Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	Latitude E5520	DoC

## 2.8 Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

### Power Parameters of IEEE 802.11b/g

Test Software Version	MFGUI		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	15	15	15
IEEE 802.11g	12	12	12

## 2.9 EUT Operation during Test

An executive program, "EMCTEST.EXE" under WIN XP, which generates a complete line of continuously repeating "H" pattern was used as the test software.

The program was executed as follows :

- a. Turn on the power of all equipment.
- b. The NB reads the test program from the hard disk drive and runs it.
- c. The NB sends "H" messages to the panel and displays "H" patterns on the screen.
- d. Repeat the steps from c to d.

At the same time, the following programs were executed:


- Executed "TI\_RID Carrier" to keep transmitting signals at fixed frequency.

Only Radiated used:


- Executed "MFGUI" to keep transmitting signals at fixed frequency.



**2.10 Test Configuration**

For conducted emissions  
Adapter Mode

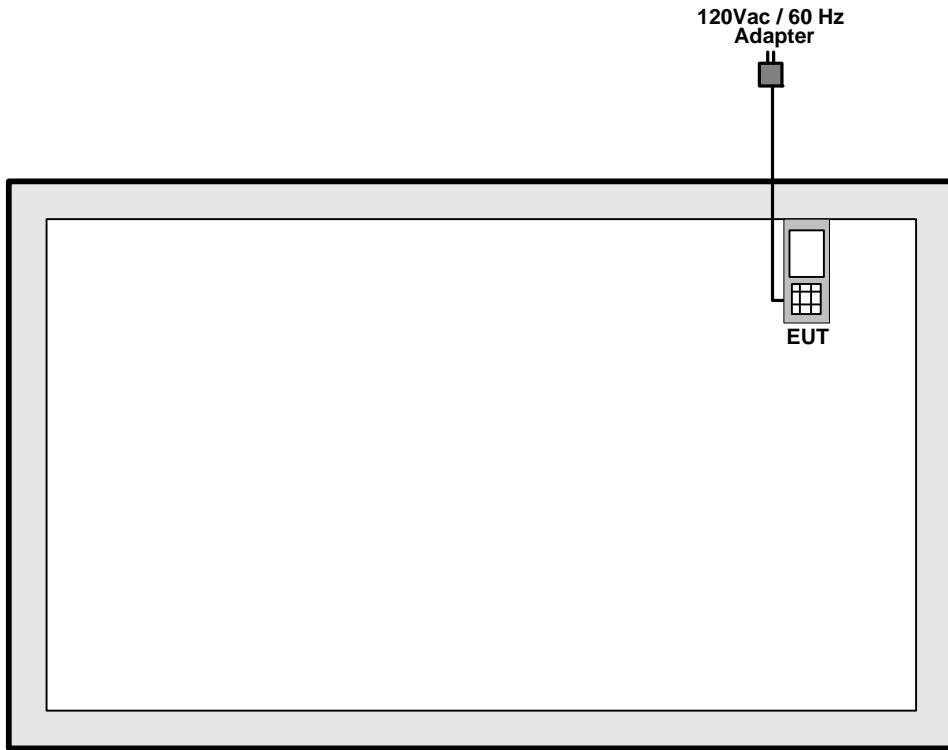

**USB Mode**

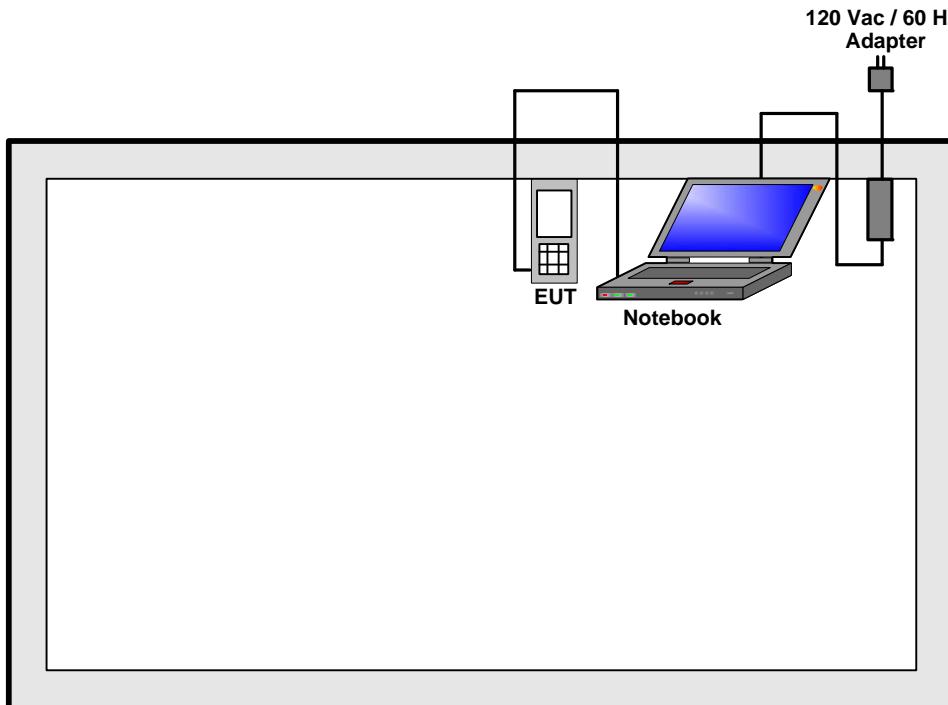

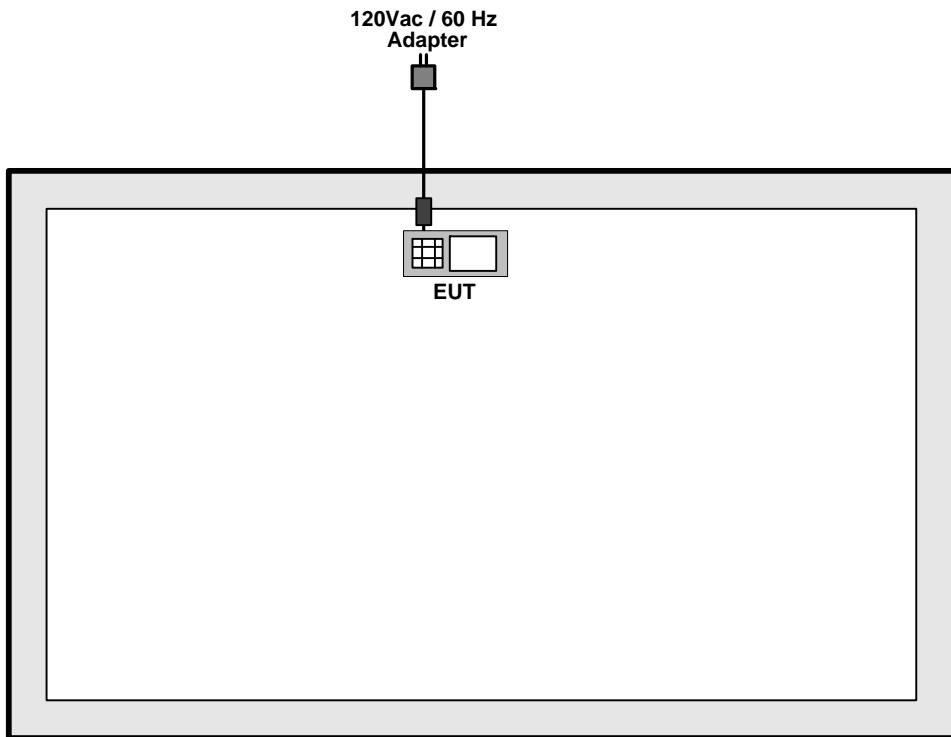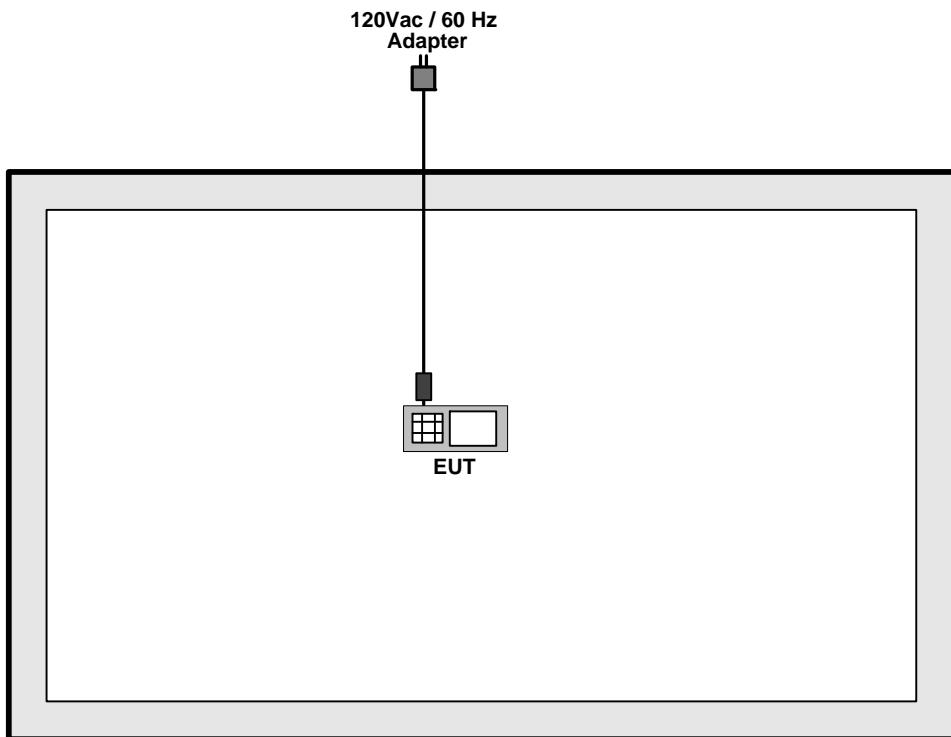**For radiated emissions 30MHz~1GHz****For radiated emissions above 1GHz**

### 3 TEST RESULT

#### 3.1 AC Power Line Conducted Emissions Measurement

##### 3.1.1 Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Class B

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

##### 3.1.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

##### 3.1.3 Test Procedures

1. The EUT was warmed up for 15 minutes before testing started.
2. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
5. The frequency range from 150 kHz to 30 MHz was searched.
6. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
7. The measurement has to be done between each power line and ground at the power terminal.

### 3.1.4 Test Setup Layout

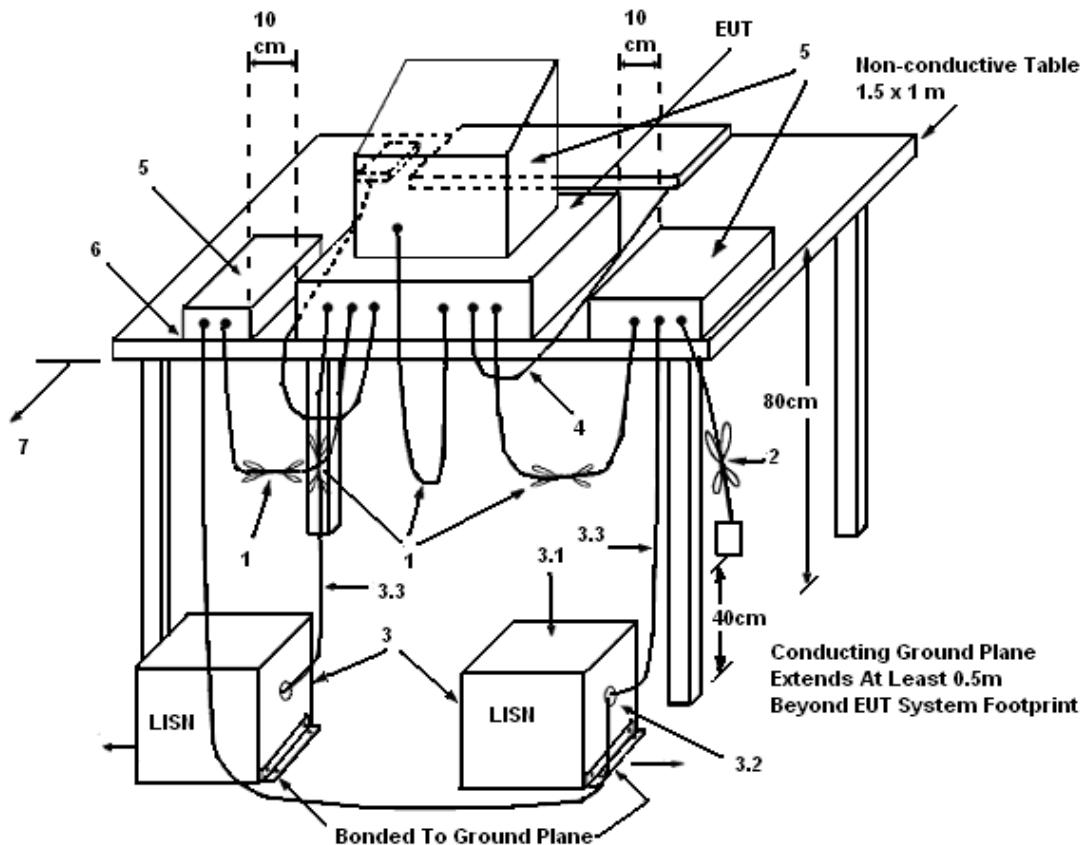

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in  $50 \Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

### 3.1.5 Test Deviation

There is no deviation with the original standard.


### 3.1.6 EUT Operation during Test

The EUT was placed on the test table and programmed in transmitting mode.


## 3.1.7 Results of AC Power Line Conducted Emissions Measurement

Final Test Date	Mar. 19, 2012	Test Site No.	CO04-HY
Temperature	24.5°C	Humidity	51%
Test Engineer	Assen	Configuration	Adapter Mode

Line

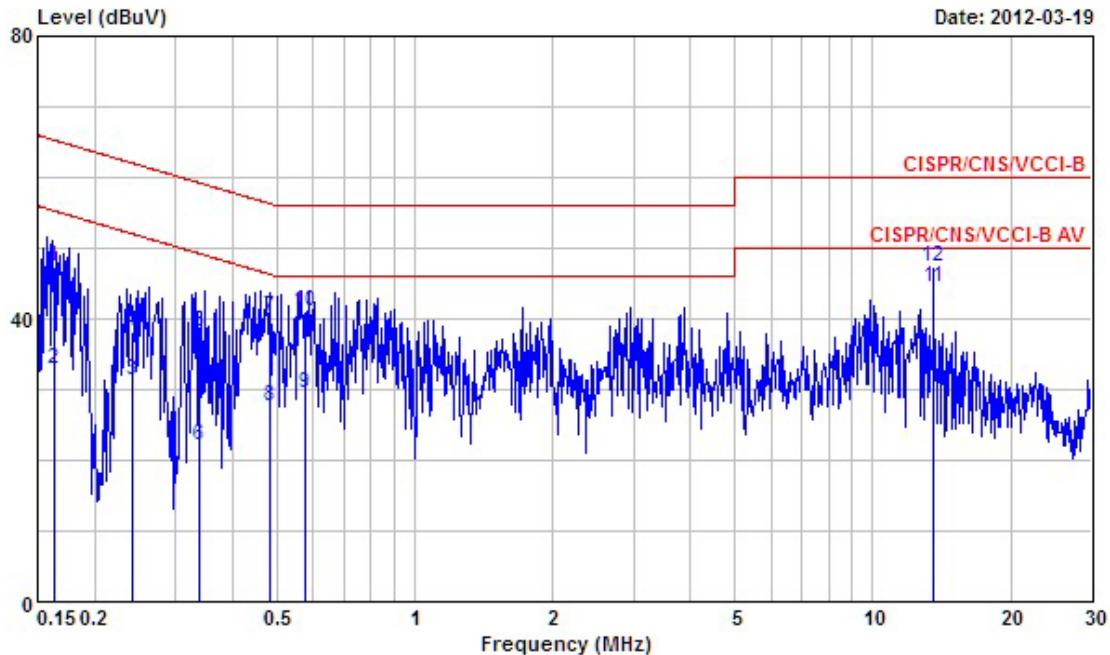

Freq	Over		Limit	Read	LISN	Cable	
	Level	Limit					Remark
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 0.1627880	47.30	-18.02	65.32	46.94	0.30	0.06	QP
2 0.1627880	32.91	-22.41	55.32	32.55	0.30	0.06	Average
3 0.2425270	31.21	-20.80	52.01	30.85	0.30	0.06	Average
4 0.2425270	38.07	-23.94	62.01	37.71	0.30	0.06	QP
5 0.3385860	38.17	-21.07	59.24	37.72	0.30	0.15	QP
6 0.3385860	22.14	-27.10	49.24	21.69	0.30	0.15	Average
7 0.4828530	40.13	-16.16	56.29	39.68	0.29	0.16	QP
8 0.4828530	27.54	-18.75	46.29	27.09	0.29	0.16	Average
9 0.5746410	29.40	-16.60	46.00	28.99	0.29	0.12	Average
10 0.5746410	40.94	-15.06	56.00	40.53	0.29	0.12	QP
11 @ 13.560	44.37	-5.63	50.00	43.44	0.51	0.42	Average
12 13.560	47.42	-12.58	60.00	46.49	0.51	0.42	QP

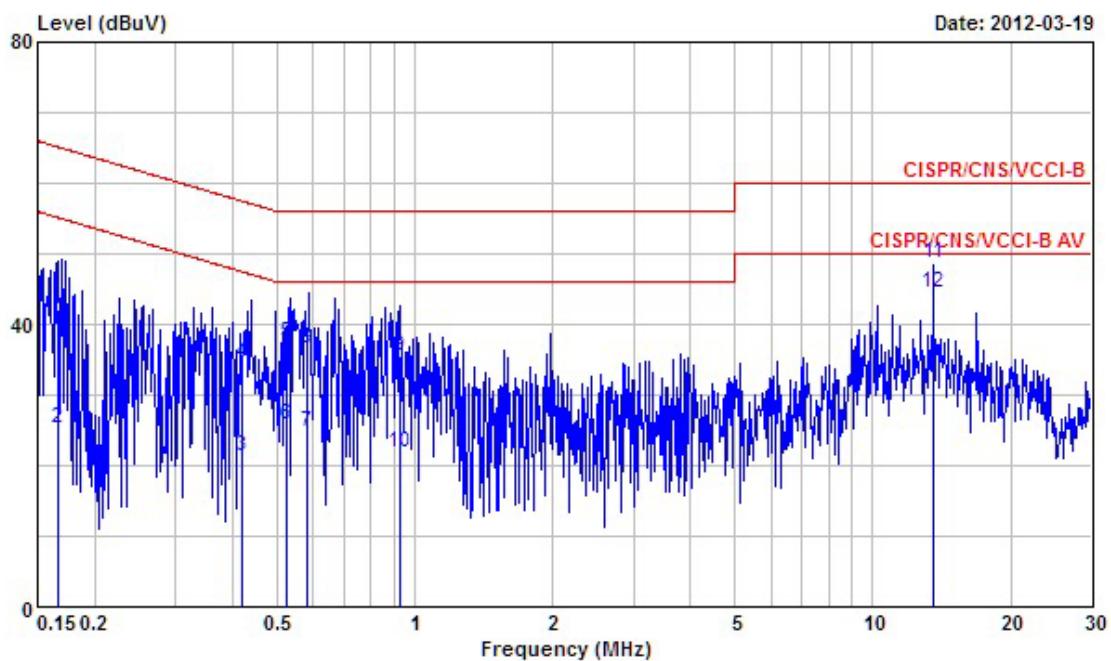**Neutral**


Freq	Level	Over	Limit	Read	LISN	Cable	Remark
		Limit	Line	Level	Factor	Loss	
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1666900	42.01	-23.11	65.12	41.70	0.26	0.05 QP
2	0.1666900	25.37	-29.75	55.12	25.06	0.26	0.05 Average
3	0.4196710	21.42	-26.03	47.45	20.99	0.24	0.19 Average
4	0.4196710	34.55	-22.90	57.45	34.12	0.24	0.19 QP
5	0.5257790	37.44	-18.56	56.00	37.06	0.24	0.14 QP
6	0.5257790	25.86	-20.14	46.00	25.48	0.24	0.14 Average
7	0.5810140	24.64	-21.36	46.00	24.28	0.24	0.12 Average
8	0.5810140	36.55	-19.45	56.00	36.19	0.24	0.12 QP
9	0.9282090	35.66	-20.34	56.00	35.39	0.25	0.02 QP
10	0.9282090	21.93	-24.07	46.00	21.66	0.25	0.02 Average
11	13.560	48.59	-11.41	60.00	47.74	0.43	0.42 QP
12	13.560	44.47	-5.53	50.00	43.62	0.43	0.42 Average

Note:


Level = Read Level + LISN Factor + Cable Loss.

Final Test Date	Mar. 19, 2012	Test Site No.	CO04-HY
Temperature	24.5°C	Humidity	51%
Test Engineer	Assen	Configuration	USB Mode

Line

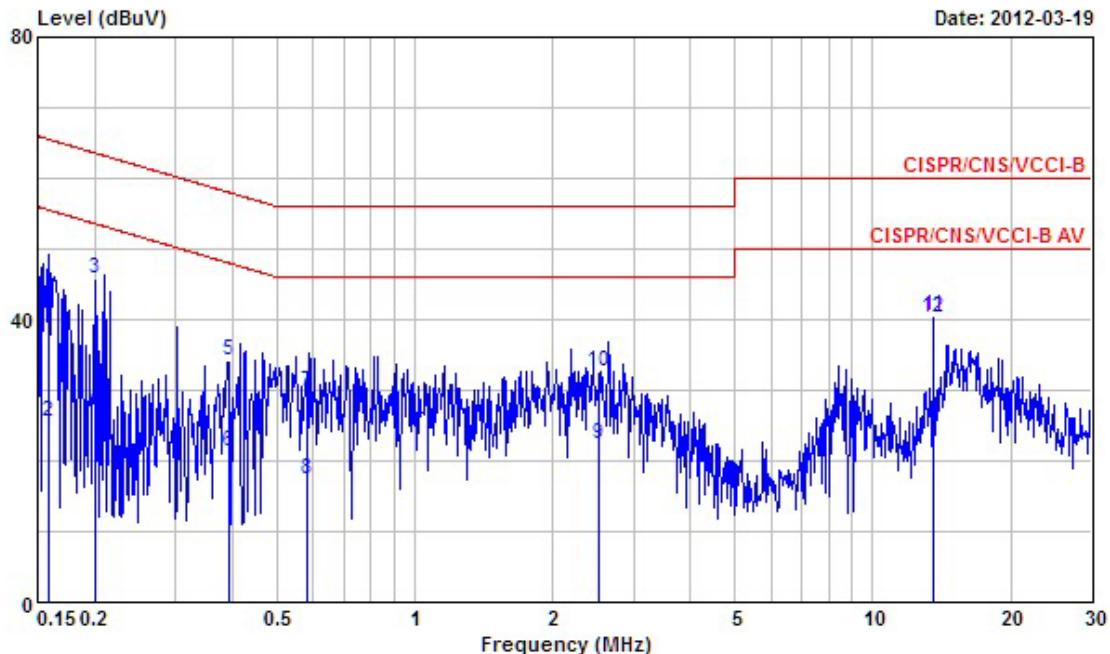

Freq	Level	Over Limit	Limit Line	Read Level	LISN		Cable Loss	Remark
					MHz	dBuV	dB	
1 0.1590020	41.58	-23.94	65.52	41.21	0.30	0.07	0.07	QP
2 0.1590020	25.56	-29.96	55.52	25.19	0.30	0.07	0.00	Average
3 0.2011760	45.77	-17.79	63.56	45.47	0.30	0.00	0.00	QP
4 0.2011760	27.32	-26.24	53.56	27.02	0.30	0.00	0.00	Average
5 0.3940980	34.29	-23.69	57.98	33.80	0.29	0.20	0.20	QP
6 0.3940980	21.20	-26.78	47.98	20.71	0.29	0.20	0.12	Average
7 0.5791390	29.64	-26.36	56.00	29.23	0.29	0.12	0.12	QP
8 0.5791390	17.28	-28.72	46.00	16.87	0.29	0.12	0.10	Average
9 2.530	22.24	-23.76	46.00	21.82	0.32	0.10	0.10	Average
10 2.530	32.51	-23.49	56.00	32.09	0.32	0.10	0.42	QP
11 13.560	40.62	-19.38	60.00	39.69	0.51	0.42	0.42	Average
12 13.560	40.39	-9.61	50.00	39.46	0.51	0.42	0.42	Average

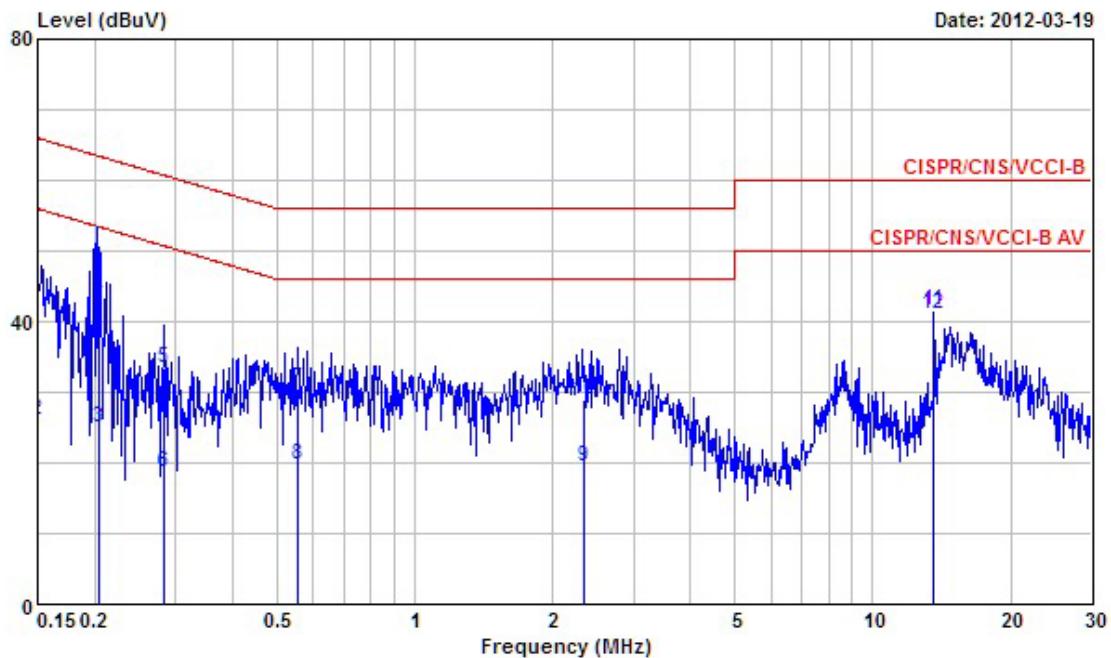**Neutral**

Freq	Over Limit		Read Line Level	LISN Factor	Cable Loss	Remark	
	MHz	dBuV	dB	dBuV	dB	dB	
1	0.1500000	44.29	-21.71	66.00	43.94	0.27	0.08 QP
2	0.1500000	25.98	-30.02	56.00	25.63	0.27	0.08 Average
3	0.2046350	25.06	-28.36	53.42	24.80	0.25	0.01 Average
4	0.2046350	43.39	-20.03	63.42	43.13	0.25	0.01 QP
5	0.2832790	33.33	-27.39	60.72	32.98	0.25	0.10 QP
6	0.2832790	18.63	-32.09	50.72	18.28	0.25	0.10 Average
7	0.5551950	30.55	-25.45	56.00	30.18	0.24	0.13 QP
8	0.5551950	19.82	-26.18	46.00	19.45	0.24	0.13 Average
9	2.350	19.42	-26.58	46.00	19.05	0.27	0.10 Average
10	2.350	28.83	-27.17	56.00	28.46	0.27	0.10 QP
11	13.560	41.67	-18.33	60.00	40.82	0.43	0.42 QP
12	13.560	41.10	-8.90	50.00	40.25	0.43	0.42 Average

Note:

Level = Read Level + LISN Factor + Cable Loss.

### 3.2 Maximum Conducted Output Power Measurement

#### 3.2.1 Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limit has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-multipoint antenna reduction operation, the limit has to be reduced by 1dB for every dB that the directional gain of the antenna exceeds 6dBi. Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

#### 3.2.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Filter No.	Auto
Measurement time	0.135 s ~ 26 s
Used Peak Sensor	MA2411B

#### 3.2.3 Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the peak power value.
3. Repeat above procedures on all channels needed to be tested.

#### 3.2.4 Test Setup Layout

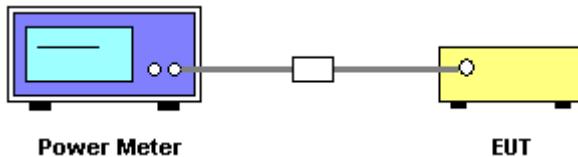

#### 3.2.5 Test Deviation

There is no deviation with the original standard.

#### 3.2.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 3.2.7 Test Result of Maximum Conducted Output Power

Final Test Date	Apr. 27, 2012	Test Site No.	TH01-HY
Temperature	24.1°C	Humidity	35%
Test Engineer	Ian	Configuration	802.11b/g

## Configuration IEEE 802.11b

Channel	Frequency	Conducted Peak Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	15.18	30.00	Complies
6	2437 MHz	15.87	30.00	Complies
11	2462 MHz	16.01	30.00	Complies

## Configuration IEEE 802.11b

Channel	Frequency	Conducted Average Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	12.27	30.00	Complies
6	2437 MHz	13.04	30.00	Complies
11	2462 MHz	13.32	30.00	Complies

## Configuration IEEE 802.11g

Channel	Frequency	Conducted Peak Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	20.09	30.00	Complies
6	2437 MHz	20.24	30.00	Complies
11	2462 MHz	20.41	30.00	Complies

## Configuration IEEE 802.11g

Channel	Frequency	Conducted Average Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	10.19	30.00	Complies
6	2437 MHz	10.34	30.00	Complies
11	2462 MHz	10.58	30.00	Complies

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 3.3.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	1.5MHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	500s

#### 3.3.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 3 kHz and VBW to 30 kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.

#### 3.3.4 Test Setup Layout

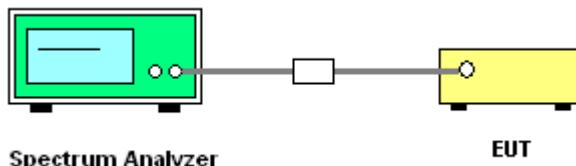

#### 3.3.5 Test Deviation

There is no deviation with the original standard.

#### 3.3.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

**3.3.7 Test Result of Power Spectral Density**

<b>Final Test Date</b>	Apr. 27, 2012	<b>Test Site No.</b>	TH01-HY
<b>Temperature</b>	24.1°C	<b>Humidity</b>	35%
<b>Test Engineer</b>	Ian	<b>Configuration</b>	802.11b/g


**Configuration IEEE 802.11b**

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-10.75	8.00	Complies
6	2437 MHz	-9.81	8.00	Complies
11	2462 MHz	-9.35	8.00	Complies

**Configuration IEEE 802.11g**


Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-15.85	8.00	Complies
6	2437 MHz	-13.37	8.00	Complies
11	2462 MHz	-15.23	8.00	Complies

## Power Density Plot on Configuration IEEE 802.11b / 2412 MHz

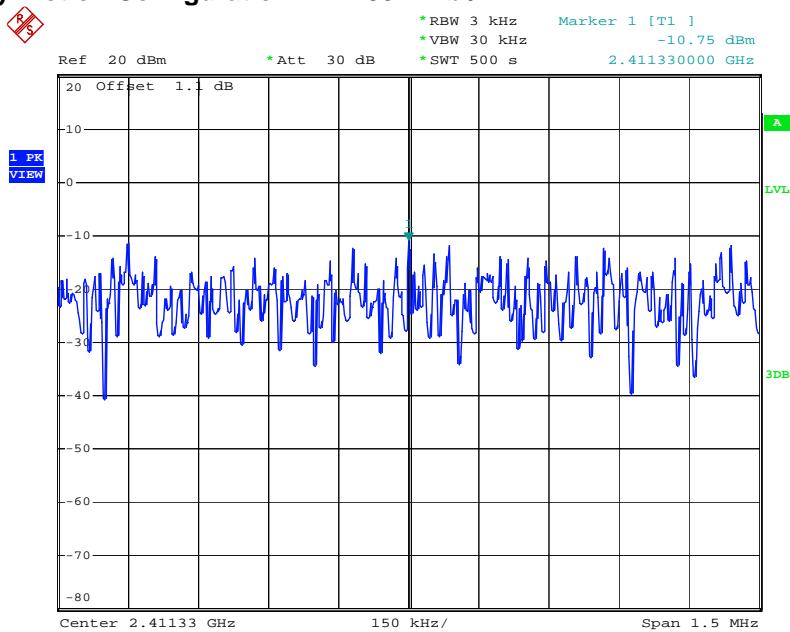


Date: 27.APR.2012 14:10:28

## Power Density Plot on Configuration IEEE 802.11b / 2437 MHz

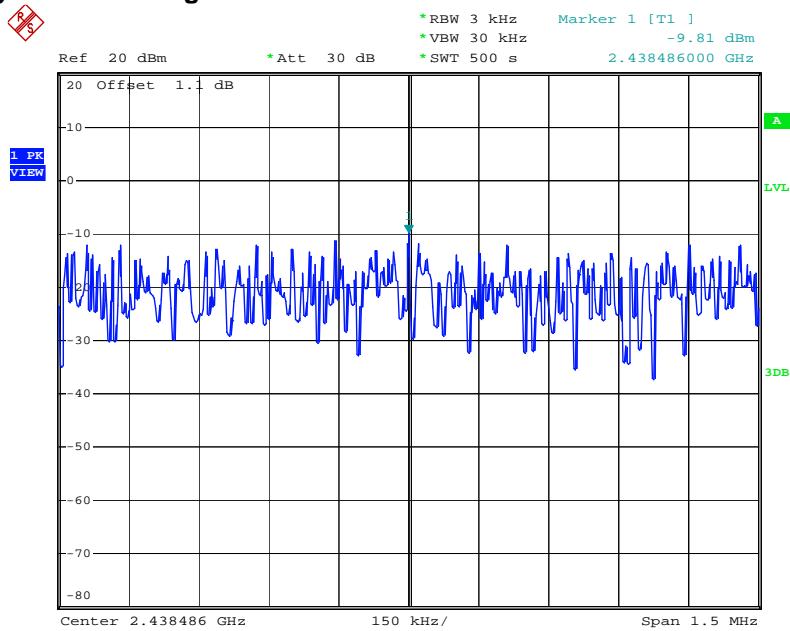


Date: 27.APR.2012 14:14:14

## Power Density Plot on Configuration IEEE 802.11b / 2462 MHz

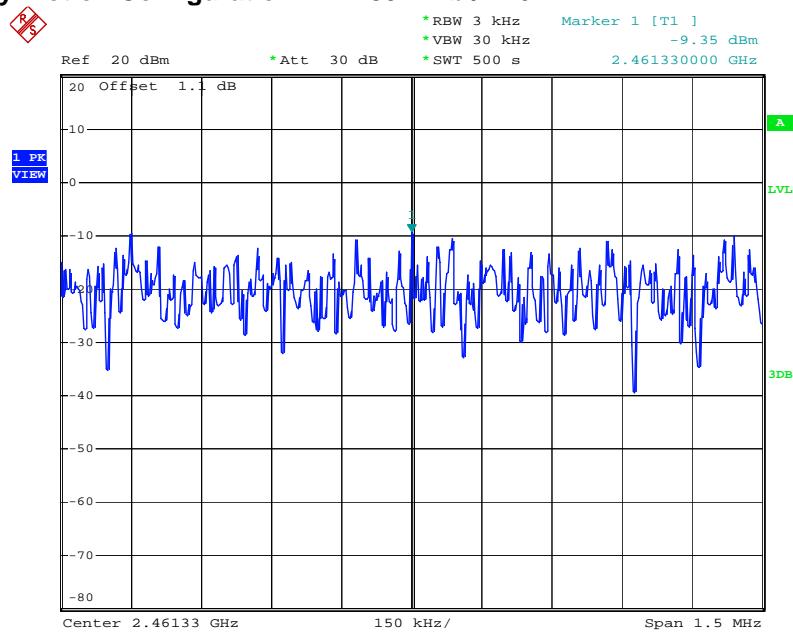


Date: 27.APR.2012 14:32:38

## Power Density Plot on Configuration IEEE 802.11g / 2412 MHz

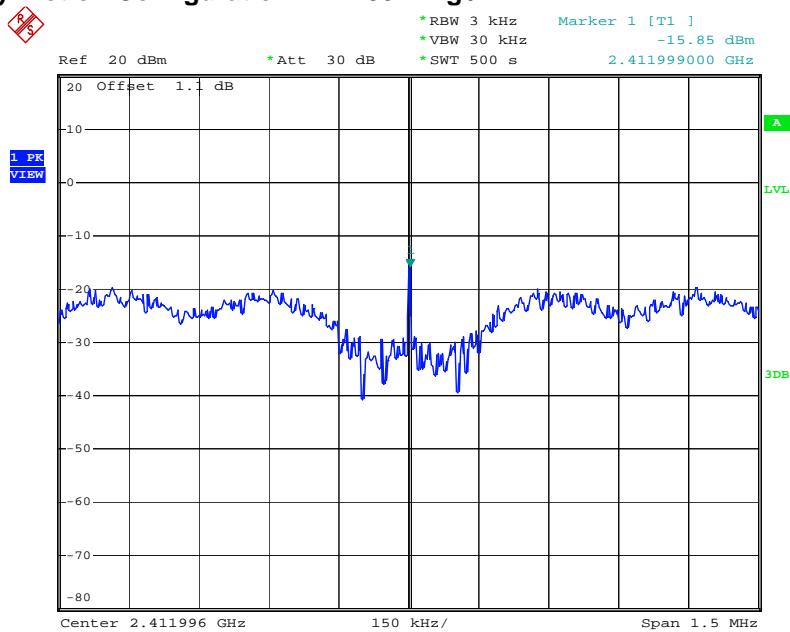


Date: 27.APR.2012 15:02:52

## Power Density Plot on Configuration IEEE 802.11g / 2437 MHz

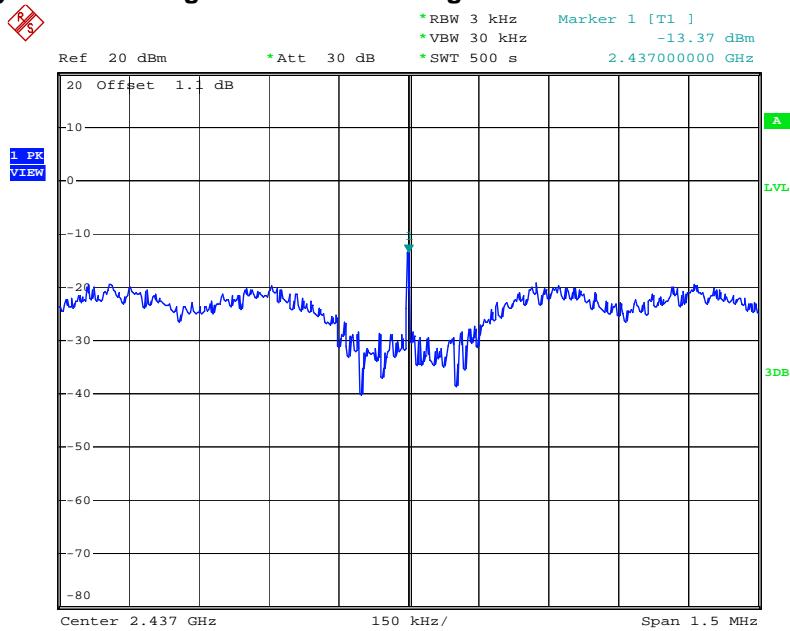

Date: 27.APR.2012 15:12:35

## Power Density Plot on Configuration IEEE 802.11g / 2462 MHz

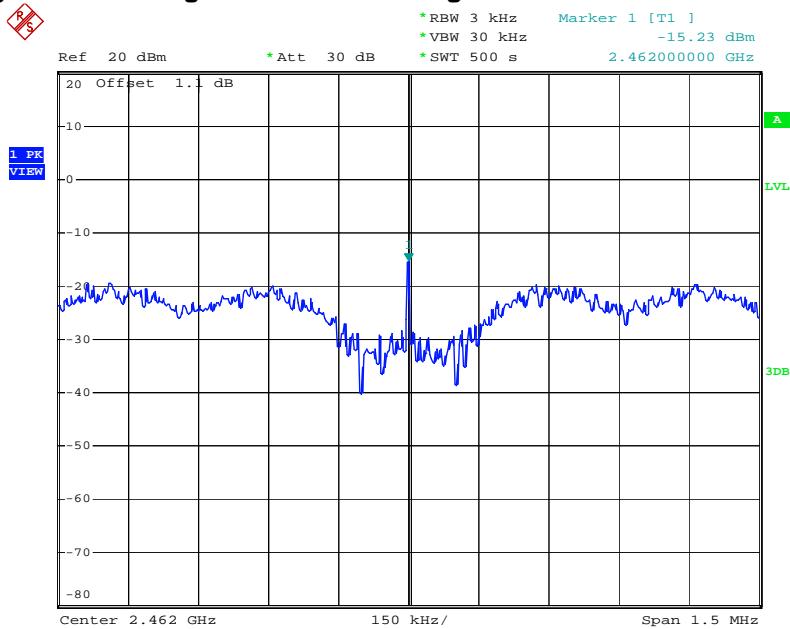

Date: 27.APR.2012 15:27:37

### 3.4 6dB Spectrum Bandwidth Measurement

#### 3.4.1 Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

#### 3.4.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 3.4.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 300 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.

#### 3.4.4 Test Setup Layout

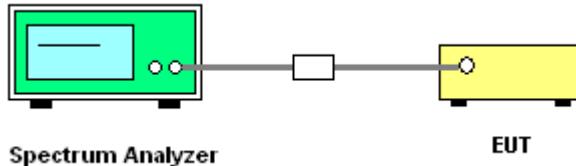

#### 3.4.5 Test Deviation

There is no deviation with the original standard.

#### 3.4.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 3.4.7 Test Result of 6dB Spectrum Bandwidth

Final Test Date	Apr. 27, 2012	Test Site No.	TH01-HY
Temperature	24.1°C	Humidity	35%
Test Engineer	Ian	Configuration	802.11b/g


## Configuration IEEE 802.11b

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	9.52	13.52	500	Complies
6	2437 MHz	9.56	13.52	500	Complies
11	2462 MHz	9.52	13.56	500	Complies

## Configuration IEEE 802.11g


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.60	16.48	500	Complies
6	2437 MHz	16.56	16.48	500	Complies
11	2462 MHz	16.60	16.52	500	Complies

## 6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz

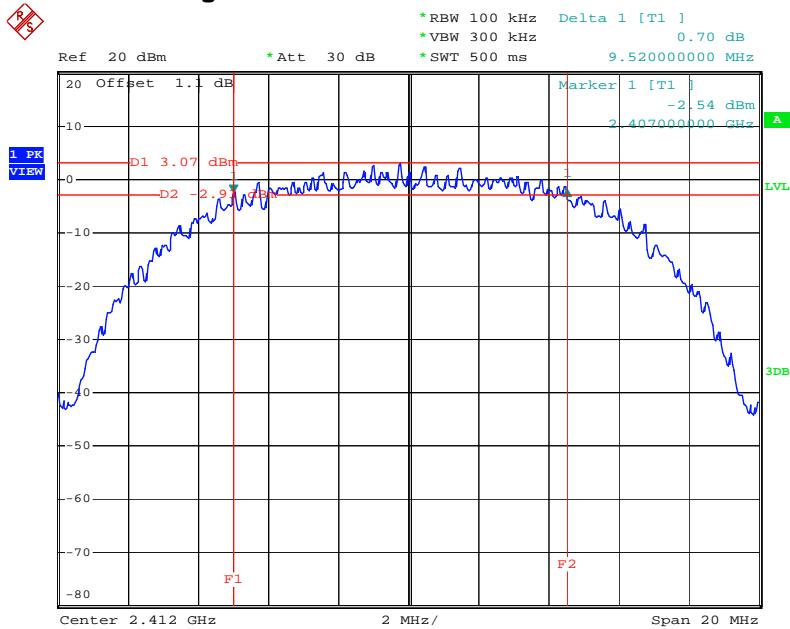


Date: 27.APR.2012 14:08:30

## 6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz

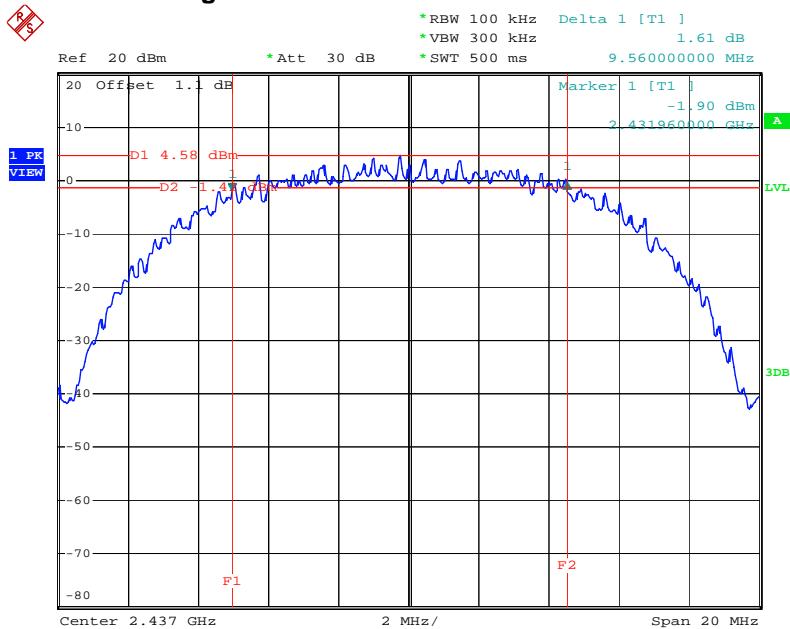


Date: 27.APR.2012 14:13:22

## 6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz

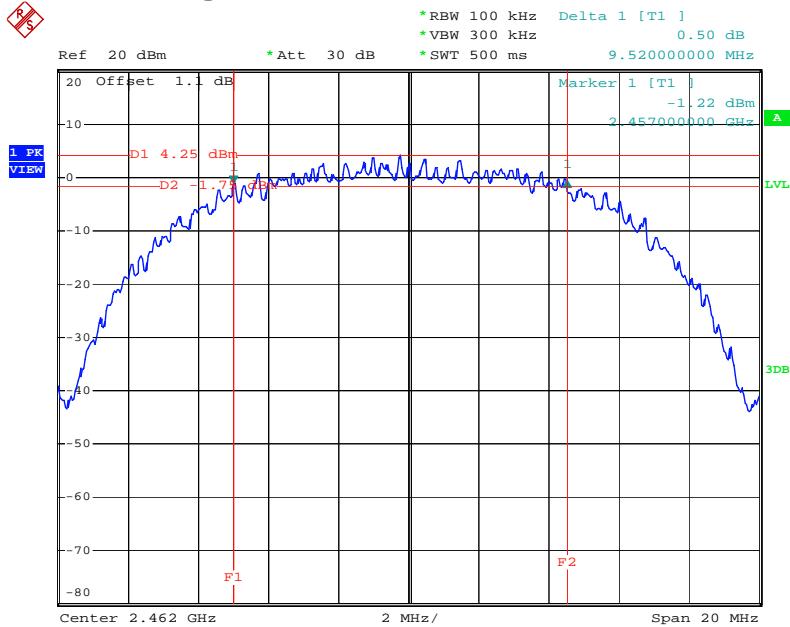


Date: 27.APR.2012 14:30:43

## 6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz

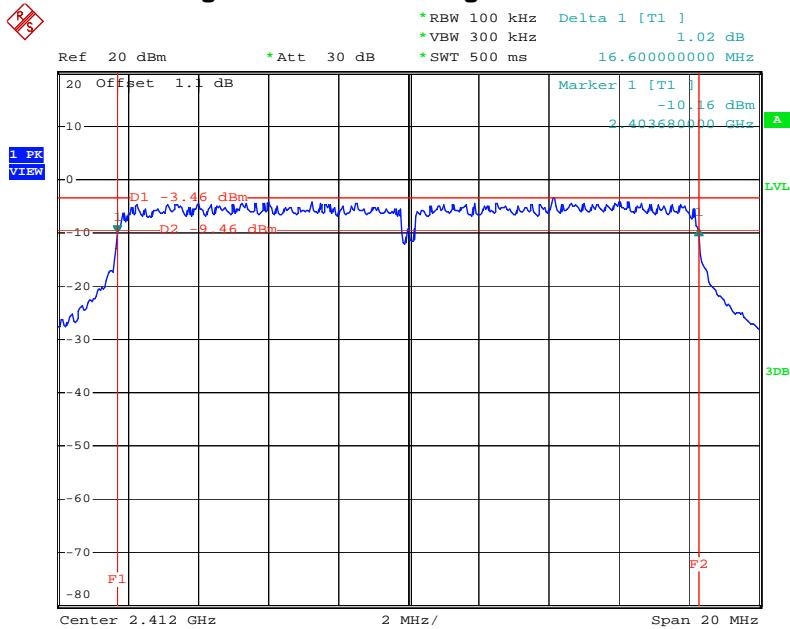


Date: 27.APR.2012 15:01:24

## 6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz

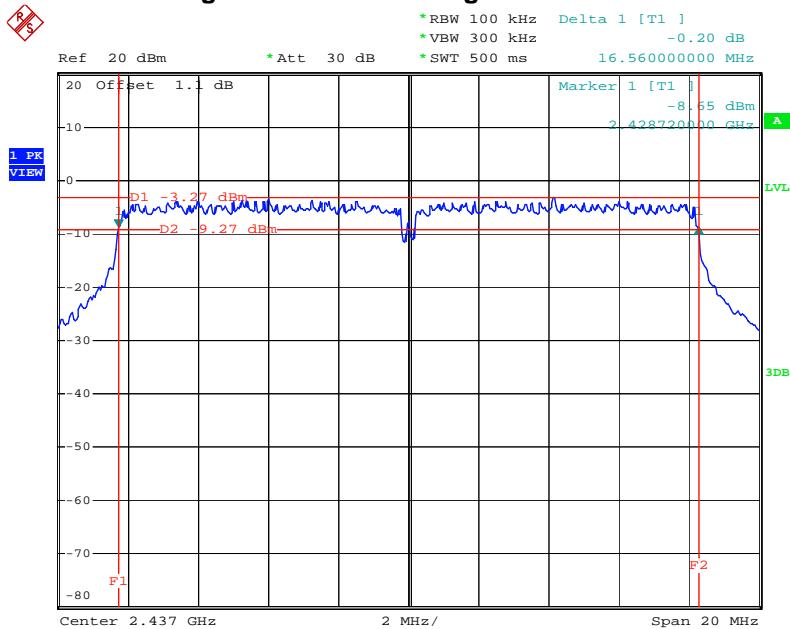


Date: 27.APR.2012 15:11:48

## 6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2462 MHz

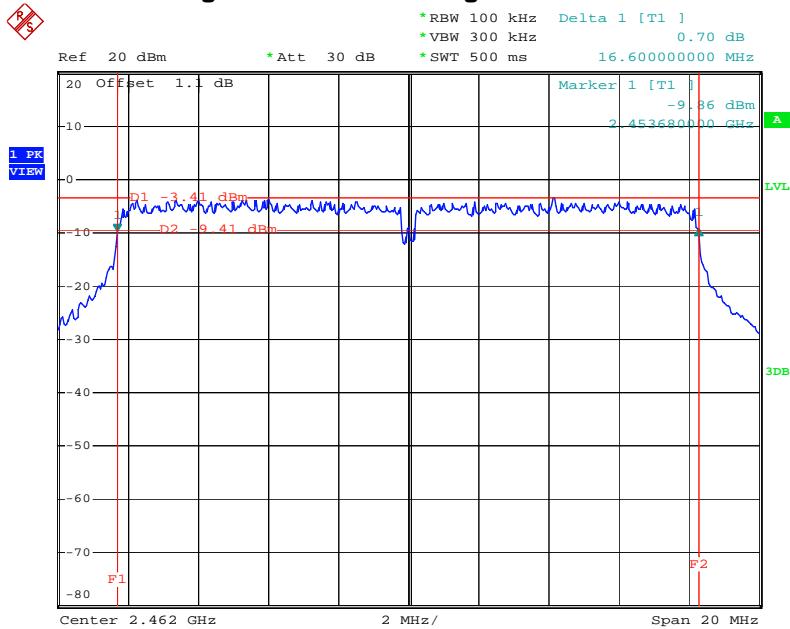


Date: 27.APR.2012 15:26:03

## 99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz

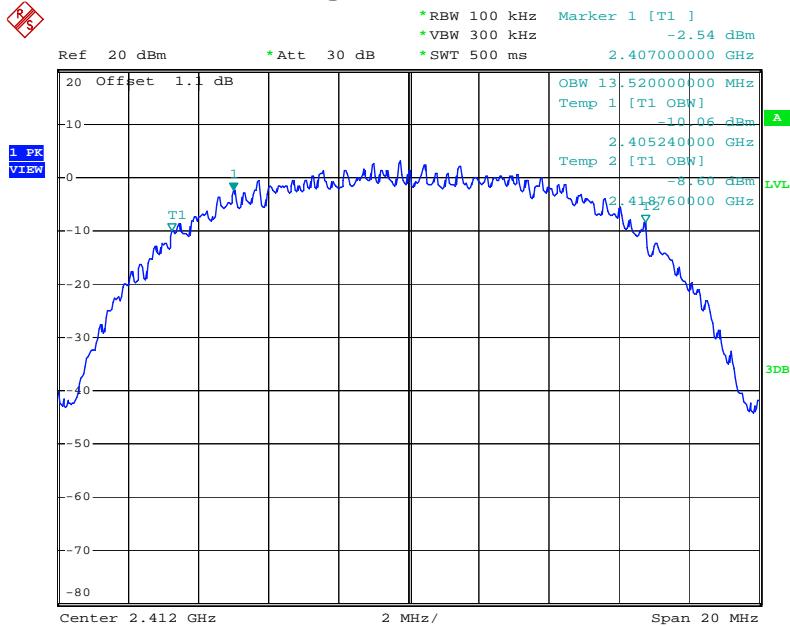


Date: 27.APR.2012 14:08:47

## 99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz

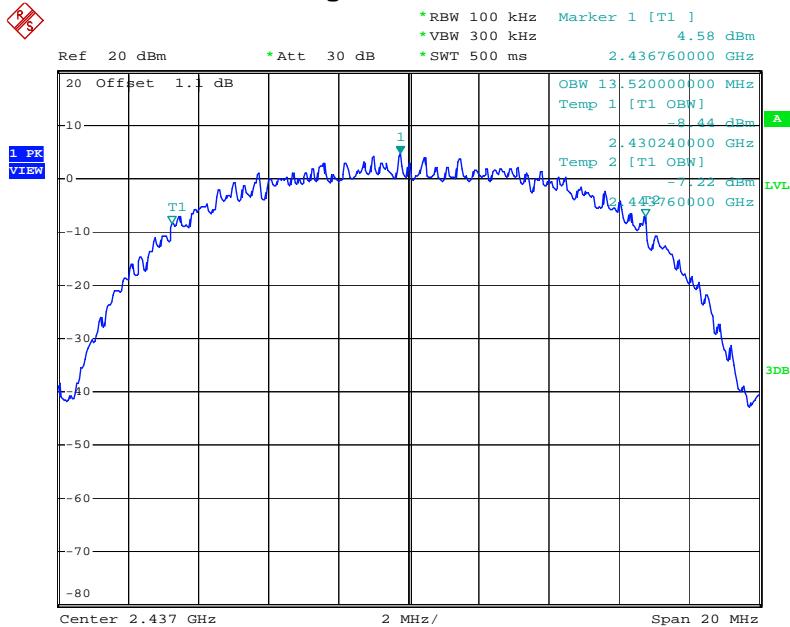


Date: 27.APR.2012 14:13:35

## 99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz

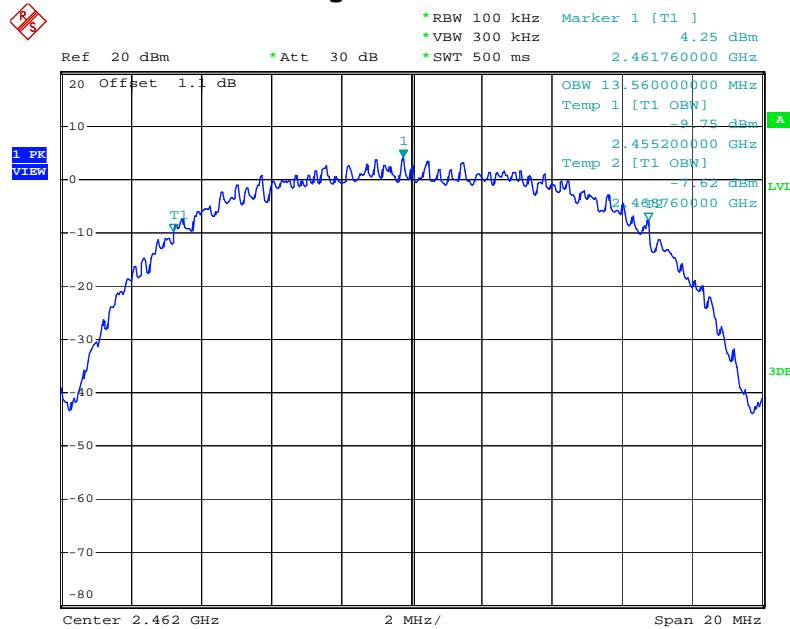


Date: 27.APR.2012 14:30:56

## 99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz

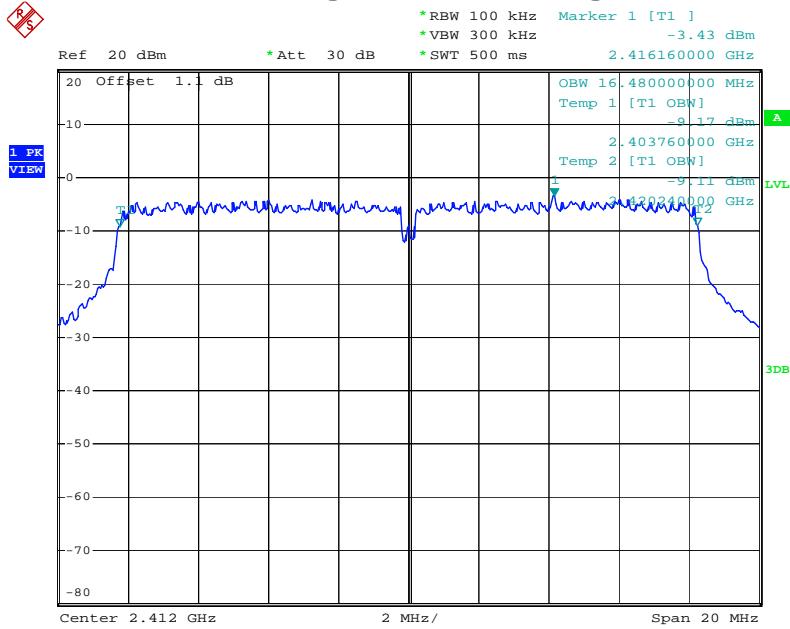


Date: 27.APR.2012 15:01:37

## 99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz

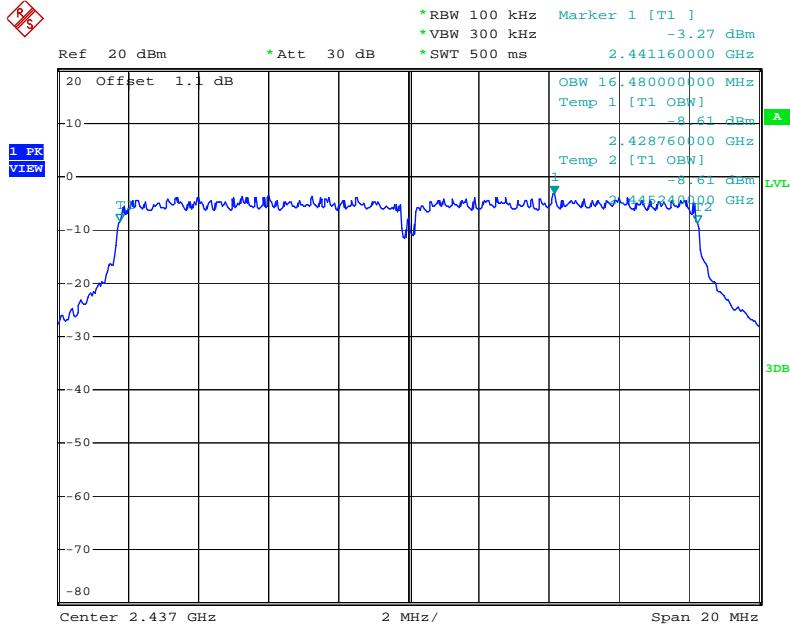

Date: 27.APR.2012 15:11:59

## 99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2462 MHz

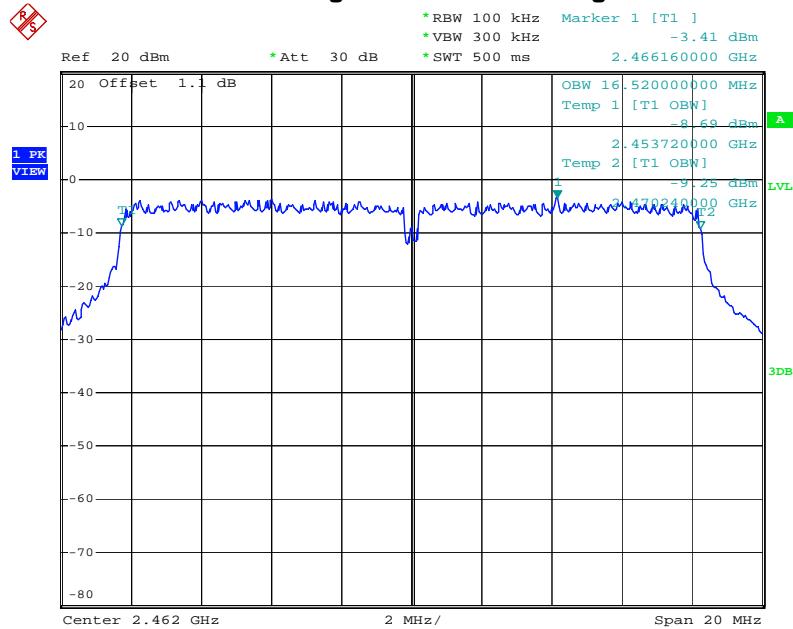

Date: 27.APR.2012 15:26:14

### 3.5 Radiated Emissions Measurement

#### 3.5.1 Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

### 3.5.3 Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

### 3.5.4 Test Setup Layout

For radiated emissions below 30MHz

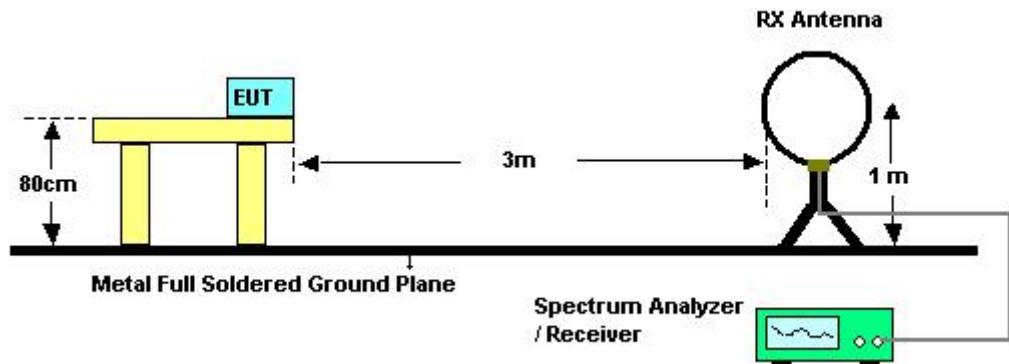

For radiated emissions above 30MHz

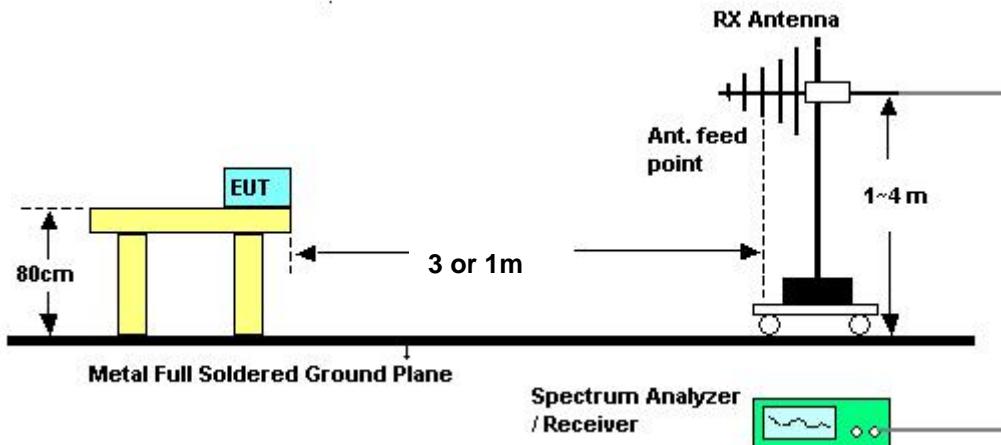

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$  (dB);  
 Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

### 3.5.5 Test Deviation

There is no deviation with the original standard.

### 3.5.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

**3.5.7 Results of Radiated Emissions (9kHz~30MHz)**

<b>Final Test Date</b>	May 11, 2012	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	25.1°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Streak		

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note


**Note:**

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = 40 log (specific distance / test distance) (dB);  
Limit line = specific limits (dBuV) + distance extrapolation factor.


## 3.5.8 Results of Radiated Emissions (30MHz~1GHz)

Final Test Date	Apr. 30, 2012	Test Site No.	03CH02-HY
Temperature	25.1°C	Humidity	56%
Test Engineer	Streak	Configuration	802.11g Ch. 6 (Adapter Mode)

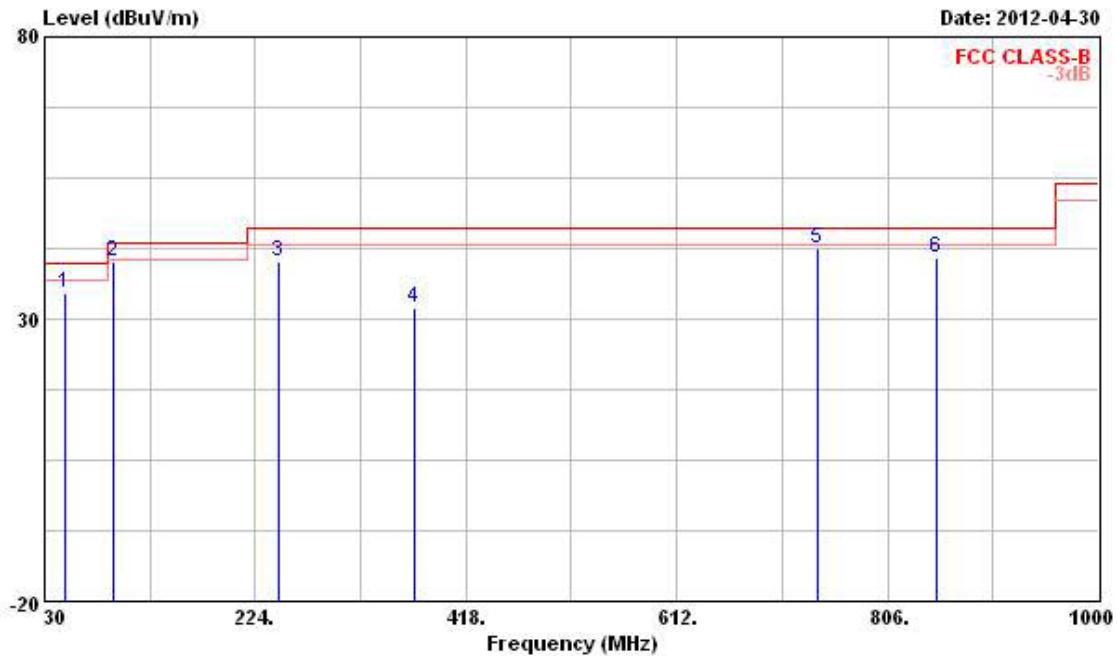*Horizontal*

Freq	Level	Over Limit	Limit	Read		Ant	Table		
				Line	Antenna			Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @ 48.430	34.52	-5.48	40.00	50.88	10.34	1.16	27.86	Peak	---
2 @ 94.020	40.29	-3.21	43.50	56.38	10.17	1.59	27.85	Peak	---
3 @ 245.340	40.20	-5.80	46.00	51.92	12.84	2.74	27.30	Peak	---
4 @ 370.470	31.81	-14.19	46.00	41.40	14.80	3.27	27.66	QP	---
5 @ 741.980	42.58	-3.42	46.00	46.60	19.44	4.68	28.14	Peak	---
6 @ 851.590	40.72	-5.28	46.00	43.29	20.15	5.05	27.77	Peak	---

## Vertical

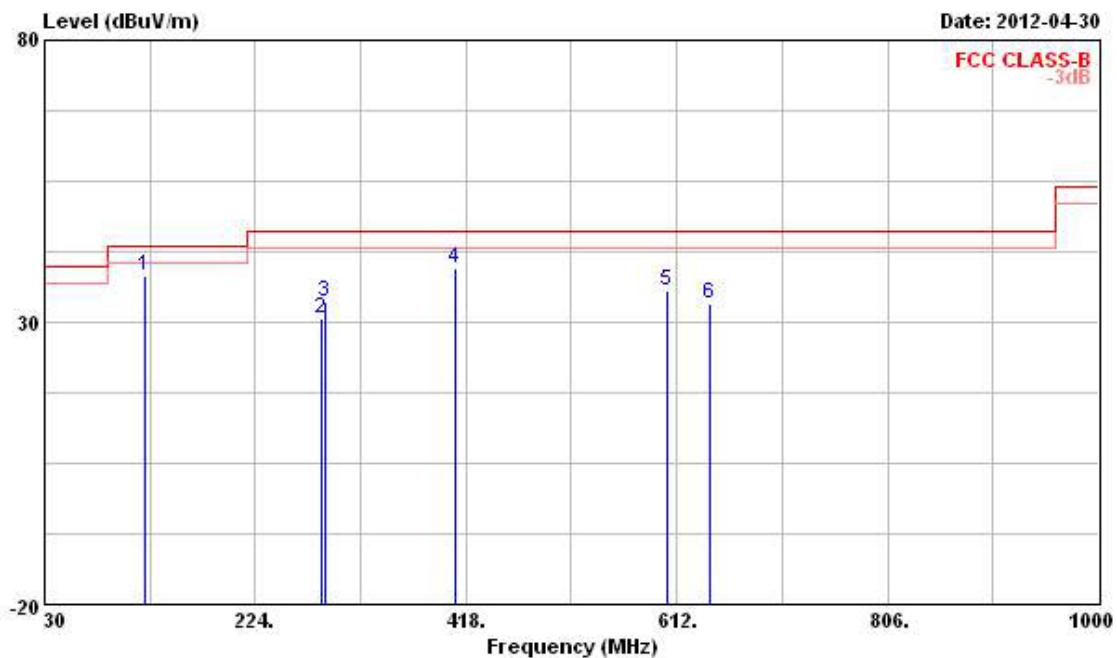

Freq	Level	Over Limit	Limit Line	Read		Ant Pos	Table Pos
				Antenna Level	Factor		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1 @ 122.150	38.26	-5.24	43.50	50.83	13.34	1.84	27.75 Peak
2 285.110	30.75	-15.25	46.00	41.55	13.49	2.91	27.20 Peak
3 288.990	33.54	-12.46	46.00	44.26	13.55	2.92	27.19 Peak
4 408.300	39.42	-6.58	46.00	48.47	15.43	3.43	27.91 Peak
5 603.270	35.59	-10.41	46.00	39.65	20.14	4.25	28.45 Peak
6 642.070	33.31	-12.69	46.00	37.70	19.62	4.37	28.38 Peak


## Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Final Test Date	May 11, 2012	Test Site No.	03CH02-HY
Temperature	25.1°C	Humidity	56%
Test Engineer	Streak	Configuration	802.11g Ch. 6 (USB Mode)

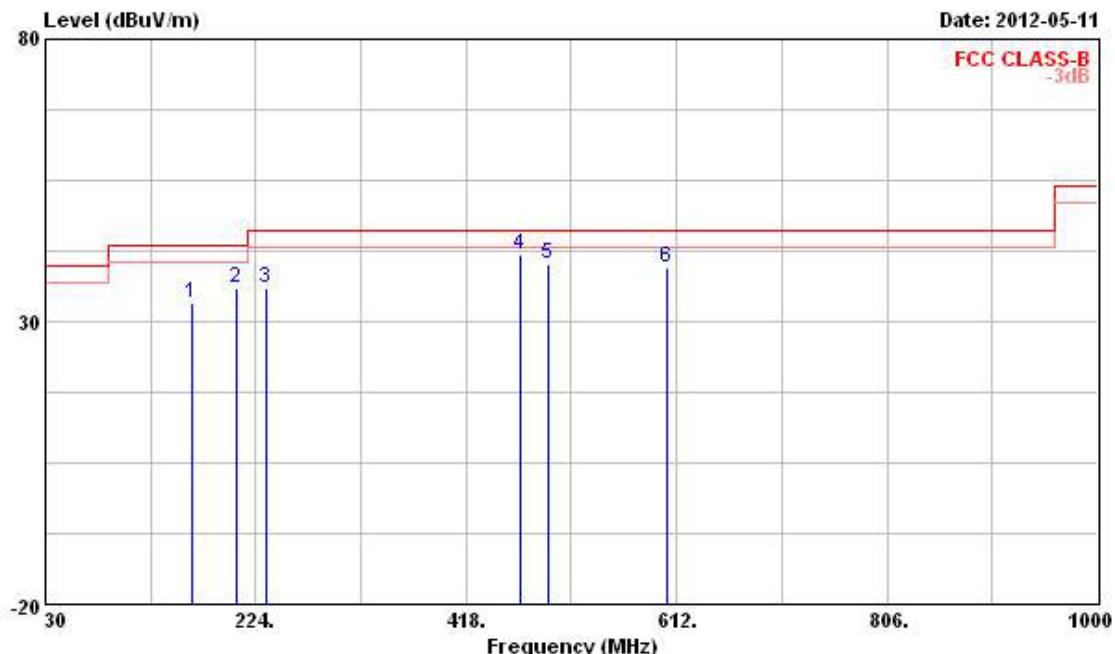**Horizontal**

Freq	Level	Over Limit	Limit	Read		Ant	Table		
				Line	Antenna			Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 164.830	33.35	-10.15	43.50	48.43	10.34	2.14	27.56	Peak	---
2 206.540	35.85	-7.65	43.50	49.20	11.57	2.47	27.39	Peak	---
3 233.700	35.77	-10.23	46.00	47.97	12.46	2.67	27.33	Peak	---
4 467.470	41.75	-4.25	46.00	49.67	16.63	3.66	28.21	Peak	---
5 493.660	40.13	-5.87	46.00	47.51	17.16	3.80	28.34	Peak	---
6 603.270	39.53	-6.47	46.00	43.59	20.14	4.25	28.45	Peak	---

## Vertical

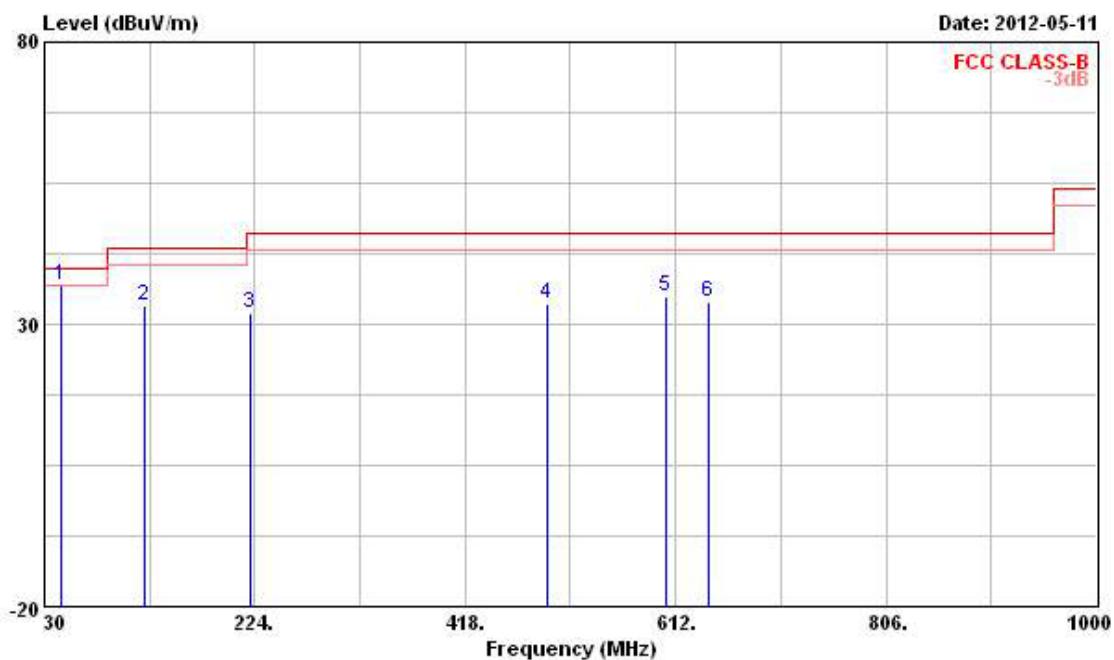

Freq	Level	Over Limit	Limit Line	Read		Ant Pos	Table Pos
				Antenna Level	Factor		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg
1 @ 44.550	36.75	-3.25	40.00	51.51	12.02	1.10	27.88 Peak
2 @ 122.150	33.41	-10.09	43.50	45.98	13.34	1.84	27.75 Peak
3 @ 219.150	31.97	-14.03	46.00	44.79	11.98	2.56	27.36 Peak
4 @ 493.660	33.73	-12.27	46.00	41.11	17.16	3.80	28.34 Peak
5 @ 603.270	35.07	-10.93	46.00	39.13	20.14	4.25	28.45 Peak
6 @ 642.070	33.86	-12.14	46.00	38.25	19.62	4.37	28.38 Peak

## Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.5.9 Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)


Final Test Date	Apr. 25, 2012	Test Site No.	03CH02-HY
Temperature	25.1°C	Humidity	56%
Test Engineer	Streak	Configuration	802.11b Ch. 1

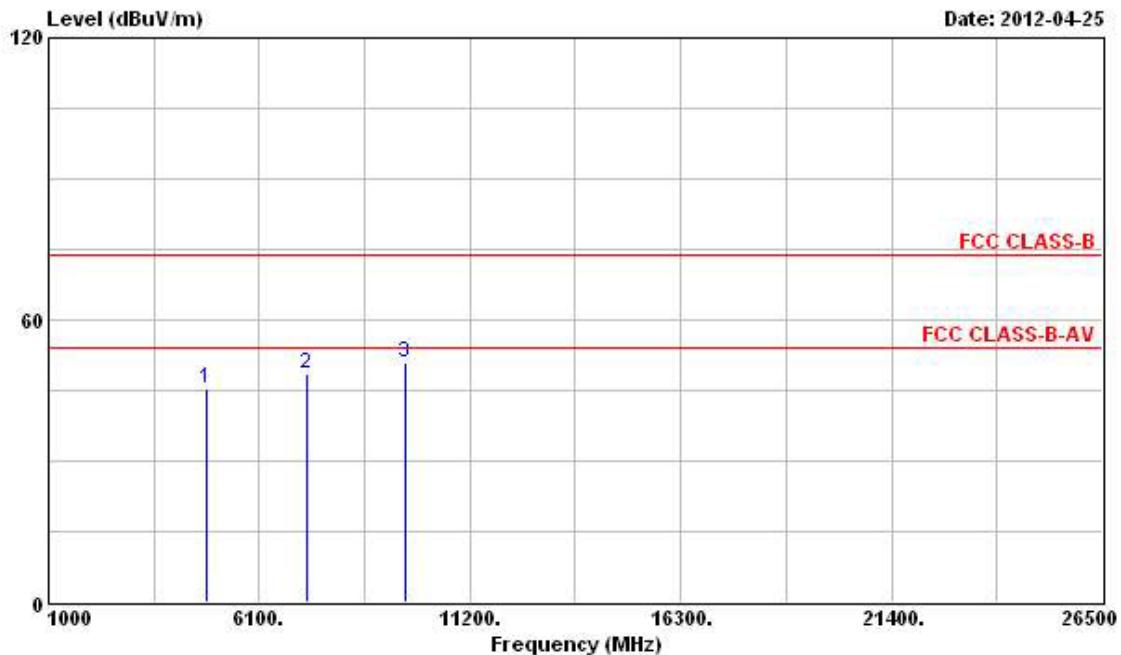*Horizontal*

Freq	Level	Over Limit	Limit Line	Read		Ant	Table		
				Antenna	Cable			Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 4824.000	45.24	-8.76	54.00	39.70	35.76	4.58	34.80	PK	---
2 7236.000	48.56			40.16	37.85	5.63	35.08	Peak	---
3 9648.000	50.89			40.63	39.39	6.34	35.47	Peak	---

Note: The items 2 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


## Vertical

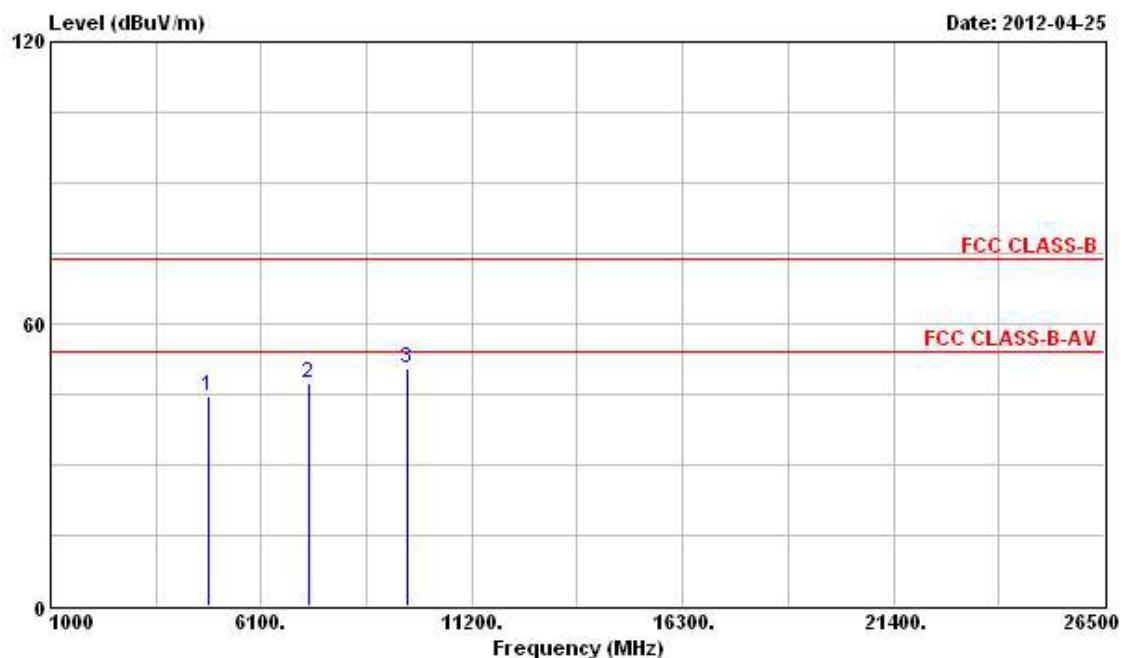

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant Pos	Table Pos
		Limit	Line	Level	Factor	Cable	Preamp		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 4824.000	44.61	-9.39	54.00	39.70	35.13	4.58	34.80 PK	---	---
2 7236.000	47.30			39.85	36.90	5.63	35.08 Peak	---	---
3 9648.000	50.39			40.93	38.59	6.34	35.47 Peak	---	---

Note: The items 2 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Final Test Date	Apr. 25, 2012	Test Site No.	03CH02-HY
Temperature	25.1°C	Humidity	56%
Test Engineer	Streak	Configuration	802.11b Ch. 6

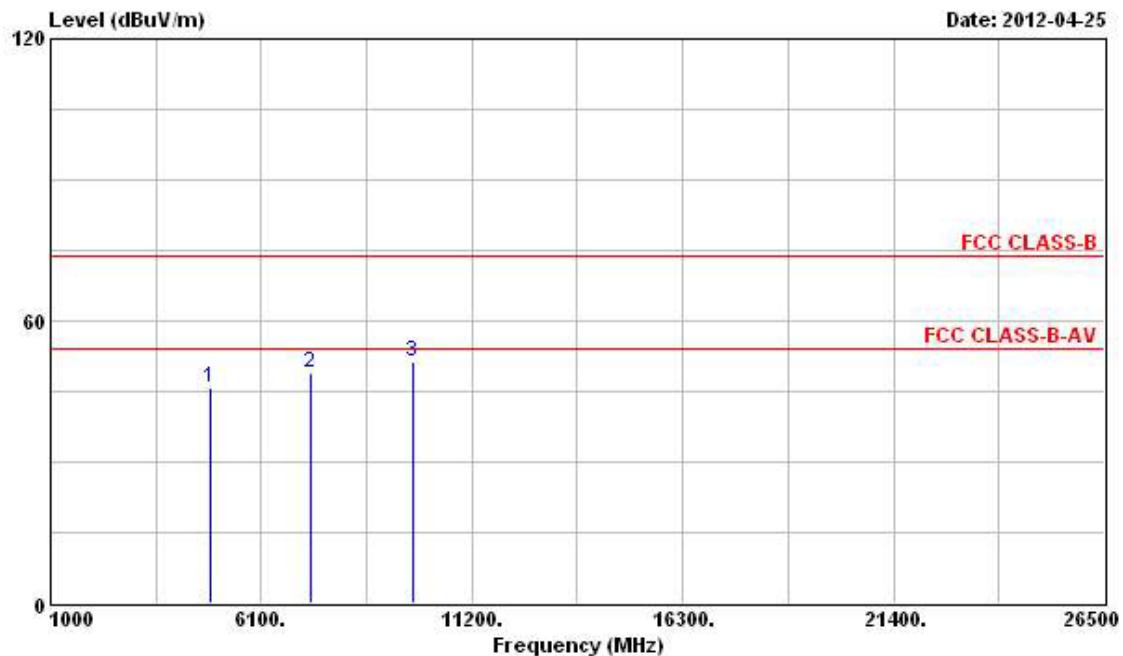**Horizontal**

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant Pos	Table Pos
		Limit	Line	Level	Factor	Loss	Factor		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 4874.000	45.84	-8.16	54.00	40.18	35.83	4.61	34.78 PK	---	---
2 7311.000	48.83	-5.17	54.00	40.43	37.86	5.64	35.10 PK	---	---
3 9748.000	51.32			40.93	39.51	6.36	35.48 Peak	---	---

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


## Vertical

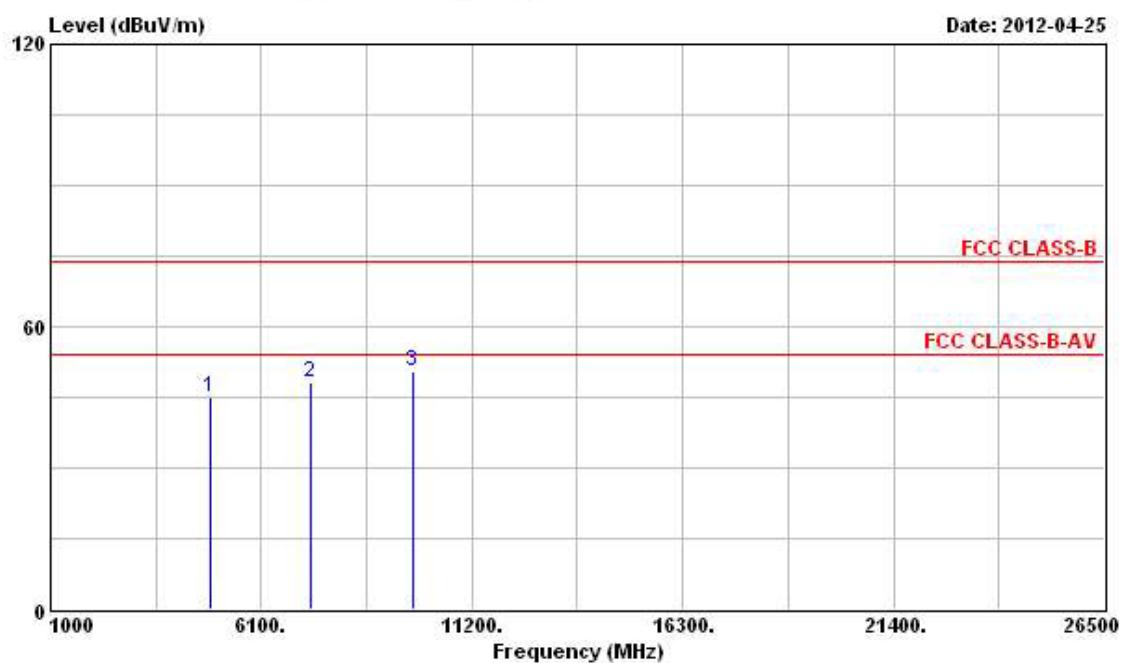

Freq	Level	Over Limit	Limit	Read		Ant	Table		
				Line	Antenna			Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 4874.000	44.84	-9.16	54.00	39.83	35.18	4.61	34.78	PK	---
2 7311.000	48.07	-5.93	54.00	40.61	36.92	5.64	35.10	PK	---
3 9748.000	50.58			40.99	38.71	6.36	35.48	Peak	---

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Final Test Date	Apr. 25, 2012	Test Site No.	03CH02-HY
Temperature	25.1°C	Humidity	56%
Test Engineer	Streak	Configuration	802.11b Ch. 11

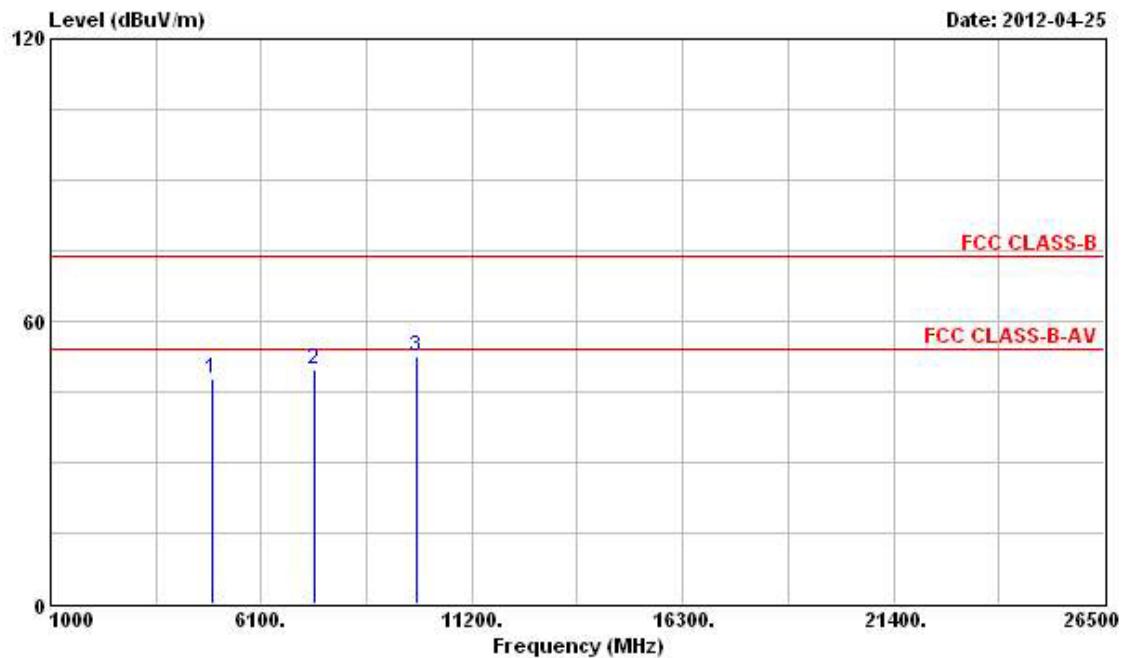**Horizontal**

Freq	Level	Over Limit	Line	Read		Ant	Table		
				Antenna Level	Factor			Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 4924.000	47.57	-6.43	54.00	41.76	35.90	4.68	34.77 PK	---	---
2 7386.000	49.72	-4.28	54.00	41.31	37.88	5.65	35.12 PK	---	---
3 9848.000	52.54			42.04	39.61	6.38	35.49 Peak	---	---

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


## Vertical

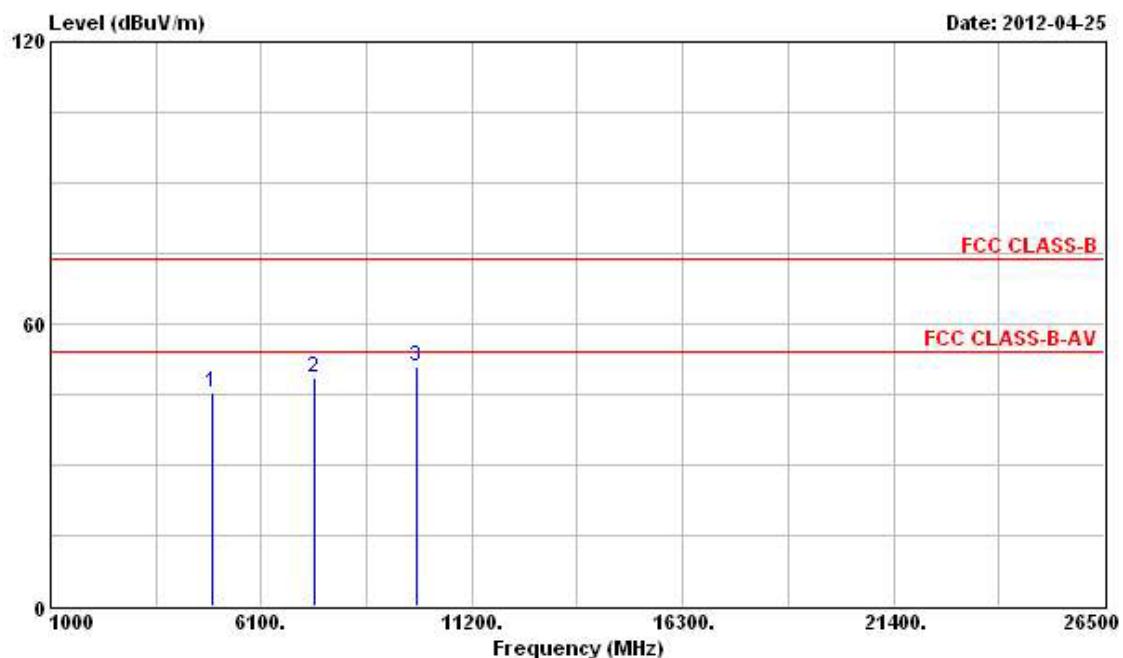

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant Pos	Table Pos	
		Limit	Line	Level	Factor	Cable	Preamp			
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4924.000	45.32	-8.68	54.00	40.18	35.23	4.68	34.77 PK	---	---
2	7386.000	48.55	-5.45	54.00	41.06	36.96	5.65	35.12 PK	---	---
3	9848.000	50.90			41.20	38.81	6.38	35.49 Peak	---	---

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Final Test Date	Apr. 25, 2012	Test Site No.	03CH02-HY
Temperature	25.1°C	Humidity	56%
Test Engineer	Streak	Configuration	802.11g Ch. 1

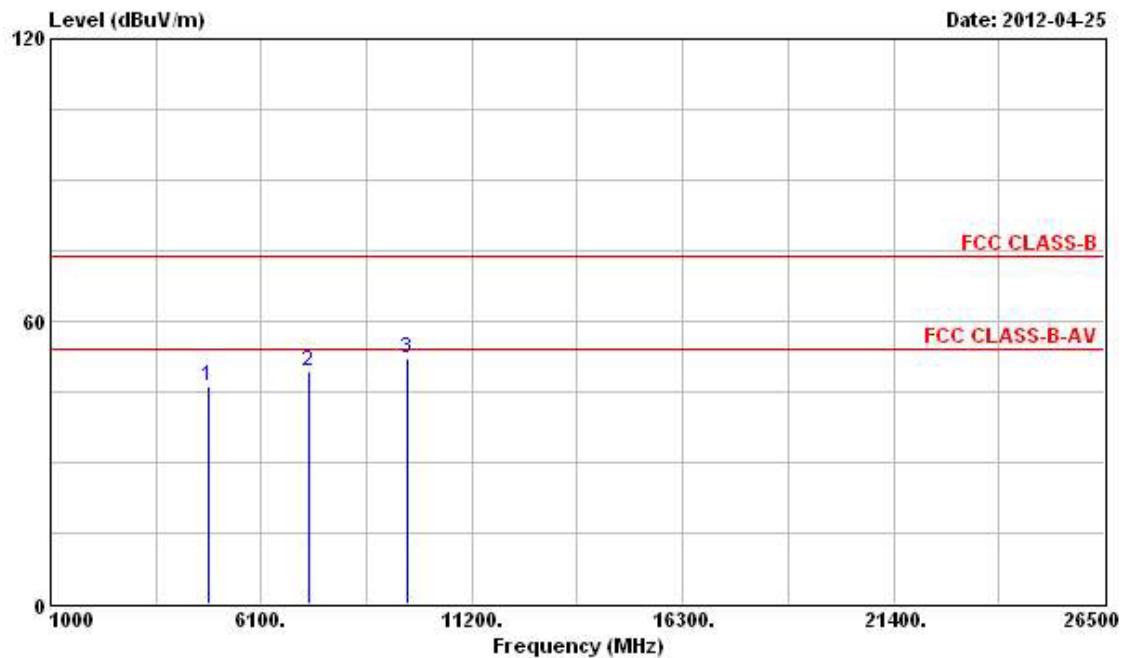**Horizontal**

Freq	Level	Over Limit	Line	Read		Ant	Table		
				Antenna Level	Factor			Pos	Pos
MHz	dB <sub>UV</sub> /m	dB	dB <sub>UV</sub> /m	dB <sub>UV</sub>	dB/m	dB	dB	cm	deg
1 4824.000	46.22	-7.78	54.00	40.68	35.76	4.58	34.80	PK	---
2 7236.000	49.31			40.91	37.85	5.63	35.08	Peak	---
3 9648.000	52.04			41.78	39.39	6.34	35.47	Peak	---

Note: The items 2 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


## Vertical

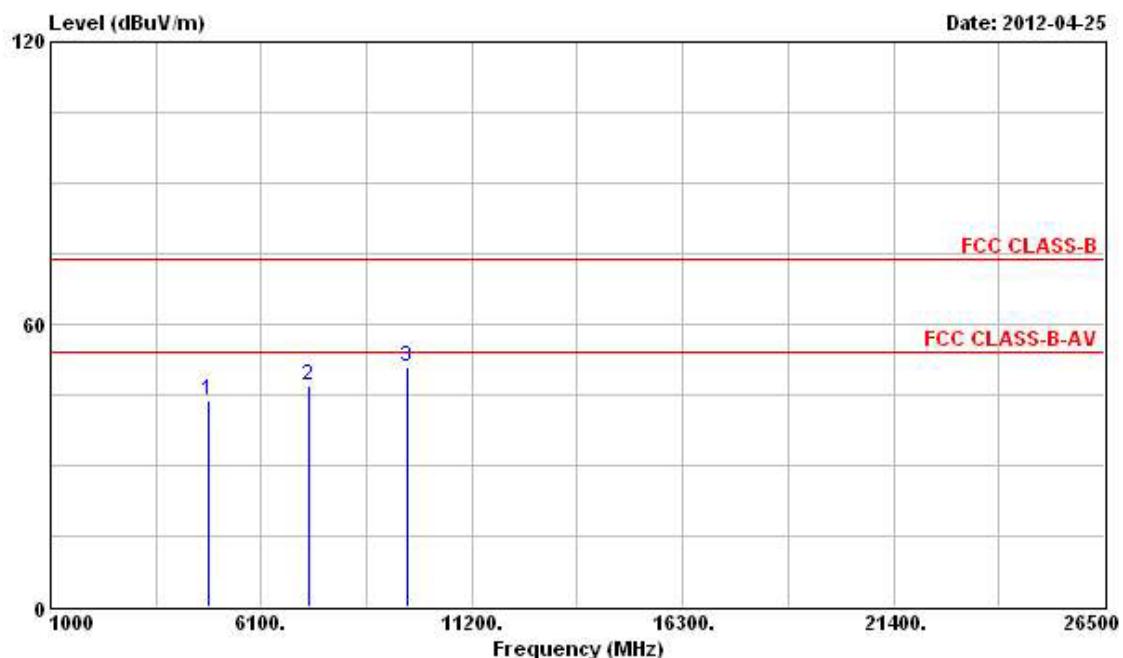

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant Pos	Table Pos	
		Limit	Line	Level	Factor	Cable	Preamp			
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4824.000	43.93	-10.07	54.00	39.02	35.13	4.58	34.80 PK	---	---
2	7236.000	47.11			39.66	36.90	5.63	35.08 Peak	---	---
3	9648.000	51.02			41.56	38.59	6.34	35.47 Peak	---	---

Note: The items 2 and 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Final Test Date	Apr. 25, 2012	Test Site No.	03CH02-HY
Temperature	25.1°C	Humidity	56%
Test Engineer	Streak	Configuration	802.11g Ch. 6

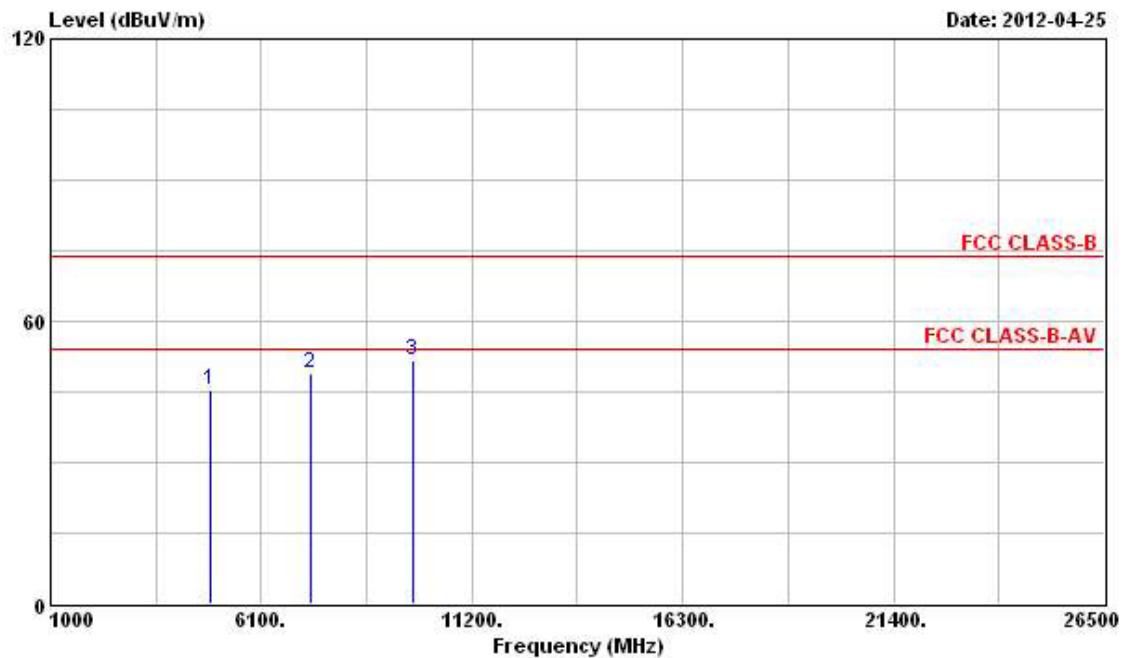**Horizontal**

Freq	Level	Over Limit	Line	Read		Ant	Table		
				Antenna Level	Factor			Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 4874.000	45.56	-8.44	54.00	39.90	35.83	4.61	34.78 PK	---	---
2 7311.000	48.84	-5.16	54.00	40.44	37.86	5.64	35.10 PK	---	---
3 9748.000	51.70			41.31	39.51	6.36	35.48 Peak	---	---

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


## Vertical

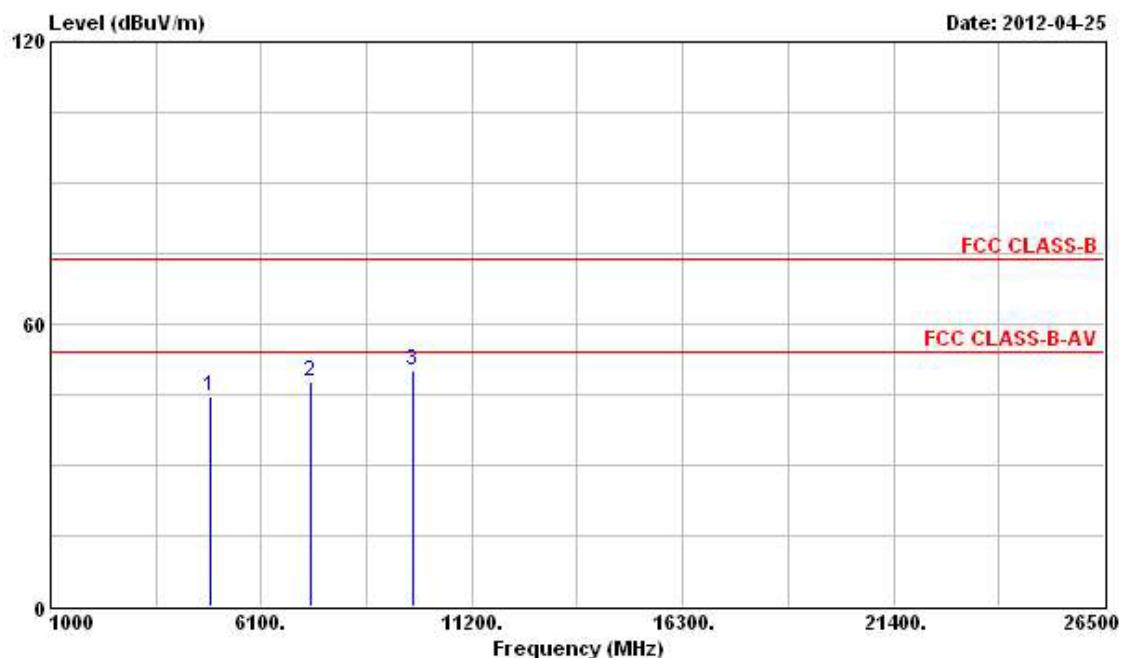

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
		Limit	Line	Level	Factor	Cable	Preamp			
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	4874.000	44.68	-9.32	54.00	39.67	35.18	4.61	34.78 PK	---	---
2	7311.000	47.93	-6.07	54.00	40.47	36.92	5.64	35.10 PK	---	---
3	9748.000	50.11			40.52	38.71	6.36	35.48 Peak	---	---

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).


Final Test Date	Apr. 25, 2012	Test Site No.	03CH02-HY
Temperature	25.1°C	Humidity	56%
Test Engineer	Streak	Configuration	802.11g Ch. 11

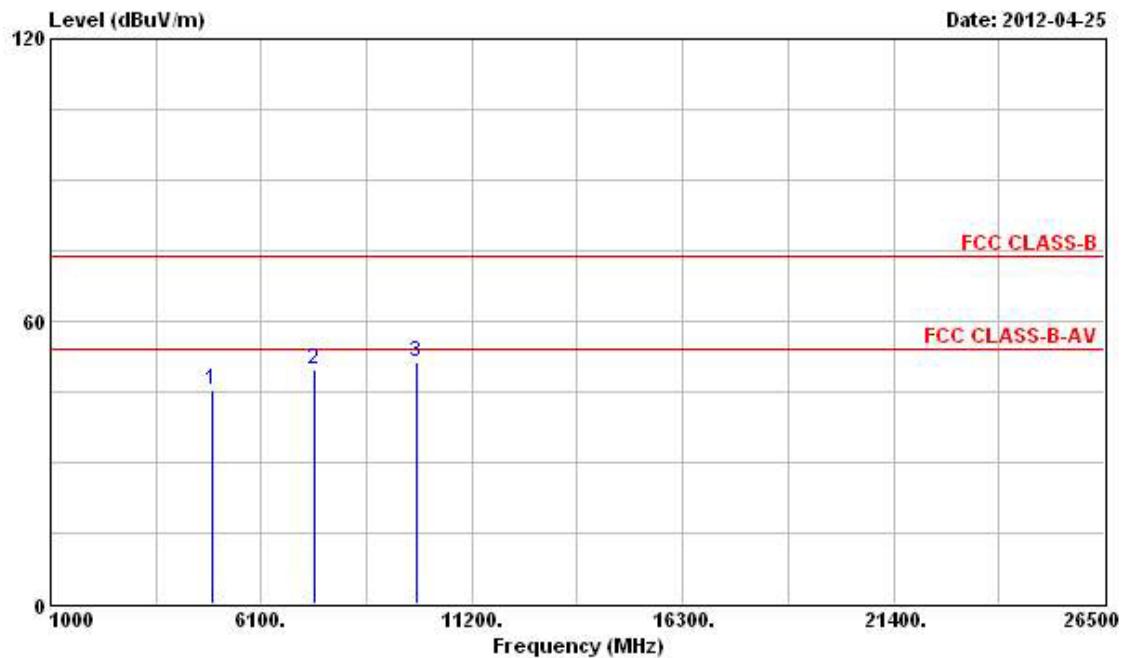**Horizontal**

Freq	Level	Over Limit	Line	Antenna		Cable Preamp		Ant Pos	Table Pos
				Level	Factor	dB	dB/m		
MHz	dBuV/m							cm	deg
1 4924.000	45.51	-8.49	54.00	39.70	35.90	4.68	34.77 PK	---	---
2 7386.000	49.79	-4.21	54.00	41.38	37.88	5.65	35.12 PK	---	---
3 9848.000	51.24			40.74	39.61	6.38	35.49 Peak	---	---

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

## Vertical

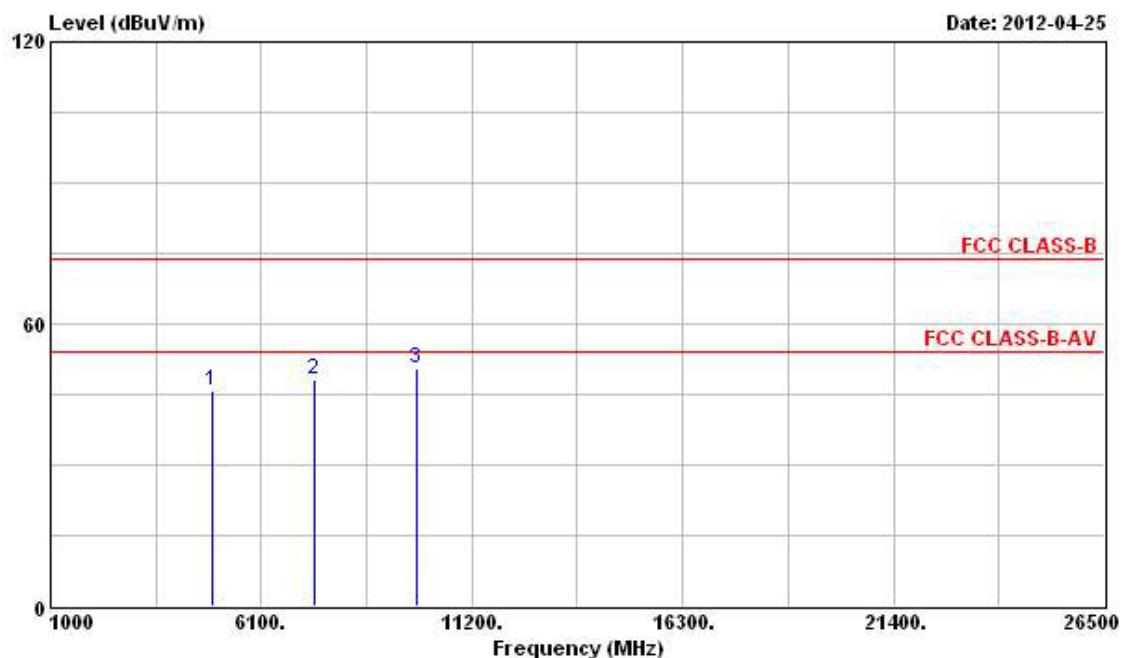

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	
		Limit	Line	Antenna	Level	Level	Factor			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 4924.000	45.60	-8.40	54.00	40.46	35.23	4.68	34.77 PK	---	---	---
2 7386.000	48.15	-5.85	54.00	40.66	36.96	5.65	35.12 PK	---	---	---
3 9848.000	50.64			40.94	38.81	6.38	35.49 Peak	---	---	---

Note: The item 3 is on un-restricted band, so the limit is -20dB for the field strength of the fundamental emissions (see section 3.6.7).

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

### 3.6 Band Edge and Fundamental Emissions Measurement

#### 3.6.1 Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### 3.6.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	11MHz / 1MHz for Peak

#### 3.6.3 Test Procedures

1. The test procedure is the same as section 3.5.3; only the frequency range investigated is limited to 100MHz around band edges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

#### 3.6.4 Test Setup Layout

This test setup layout is the same as that shown in section 3.5.4.

#### 3.6.5 Test Deviation

There is no deviation with the original standard.

#### 3.6.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 3.6.7 Test Result of Band Edge and Fundamental Emissions

Final Test Date	Apr. 25, 2012			Test Site No.	03CH02-HY		
Temperature	25.1°C			Humidity	56%		
Test Engineer	Streak			Configuration	802.11b Ch. 1, 6, 11		

## Channel 1

Freq	Level	Over Limit		Read	Antenna Level	Cable Factor	Preamp Factor	Remark	Ant Pos	Table Pos
		MHz	dBuV/m							
				dB	dBuV/m	dBuV	dB/m	dB		
1	2385.050	59.95	-14.05	74.00	24.96	31.97	3.02	0.00	Peak	---
2	2413.170	108.82			73.71	32.09	3.02	0.00	Peak	---
1	2387.330	47.84	-6.16	54.00	12.79	32.03	3.02	0.00	Average	---
2	2413.170	99.79			64.68	32.09	3.02	0.00	Average	---

The item 2 is Fundamental Emissions.

## Channel 6

Freq	Level	Over Limit		Read	Antenna Level	Cable Factor	Preamp Factor	Remark	Ant Pos	Table Pos
		MHz	dBuV/m							
				dB	dBuV/m	dBuV	dB/m	dB		
1	2438.250	111.93				76.67	32.21	3.05	0.00	Peak
1	2438.250	102.87				67.61	32.21	3.05	0.00	Average

The item 1 is Fundamental Emissions.

## Channel 11

Freq	Level	Over Limit		Read	Antenna Level	Cable Factor	Preamp Factor	Remark	Ant Pos	Table Pos
		MHz	dBuV/m							
				dB	dBuV/m	dBuV	dB/m	dB		
1	2463.330	110.06				74.70	32.28	3.08	0.00	Peak
2	2488.220	61.76	-12.24	74.00	26.28	32.40	3.08	0.00	Peak	---
1	2463.330	100.99				65.63	32.28	3.08	0.00	Average
2	2487.460	49.29	-4.71	54.00	13.87	32.34	3.08	0.00	Average	---

The item 1 is Fundamental Emissions.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Final Test Date	Apr. 25, 2012	Test Site No.	03CH02-HY
Temperature	25.1°C	Humidity	56%
Test Engineer	Streak	Configuration	802.11g Ch. 1, 6, 11

**Channel 1**

Freq	Level	Over Limit	Read	Antenna		Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
				Line	Factor					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	2387.330	59.72	-14.28	74.00	24.67	32.03	3.02	0.00 Peak	---	---
2	2416.020	100.32			65.21	32.09	3.02	0.00 Peak	---	---
1	2389.420	47.40	-6.60	54.00	12.35	32.03	3.02	0.00 Average	---	---
2	2417.540	91.19			56.08	32.09	3.02	0.00 Average	---	---

The item 2 is Fundamental Emissions.

**Channel 6**

Freq	Level	Over Limit	Read	Antenna		Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
				Line	Factor					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	2440.340	103.00			67.74	32.21	3.05	0.00 Peak	---	---

1 0 2441.860 92.77 57.51 32.21 3.05 0.00 Average

The item 1 is Fundamental Emissions.

**Channel 11**

Freq	Level	Over Limit	Read	Antenna		Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
				Line	Factor					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	2458.010	102.55			67.22	32.28	3.05	0.00 Peak	---	---
2	2483.850	60.99	-13.01	74.00	25.57	32.34	3.08	0.00 Peak	---	---
1	2455.540	92.87			57.54	32.28	3.05	0.00 Average	---	---
2	2483.500	49.04	-4.96	54.00	13.62	32.34	3.08	0.00 Average	---	---

The item 1 is Fundamental Emissions.

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## For Emission not in Restricted Band


Final Test Date	Apr. 27, 2012	Test Site No.	TH01-HY
Temperature	24.1°C	Humidity	35%
Test Engineer	Ian	Configuration	802.11b/g

## Low Band Edge Plot on Configuration IEEE 802.11b / 2412 MHz

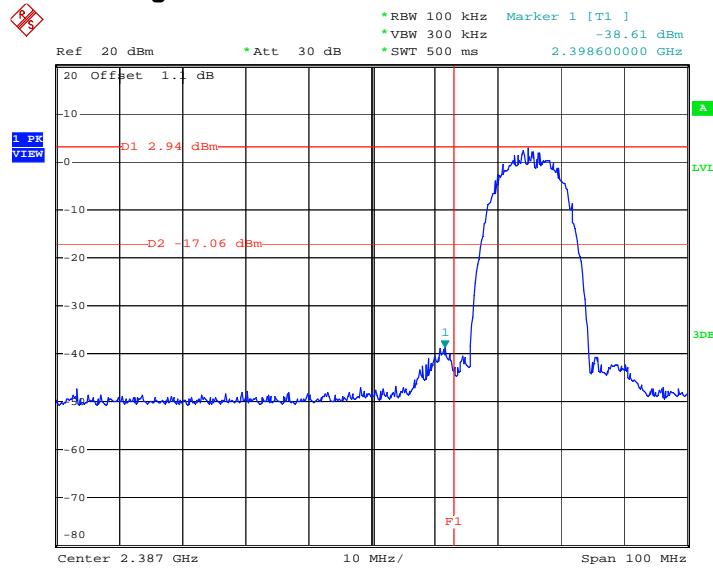


Date: 27.APR.2012 14:09:39

## High Band Edge Plot on Configuration IEEE 802.11b / 2462 MHz

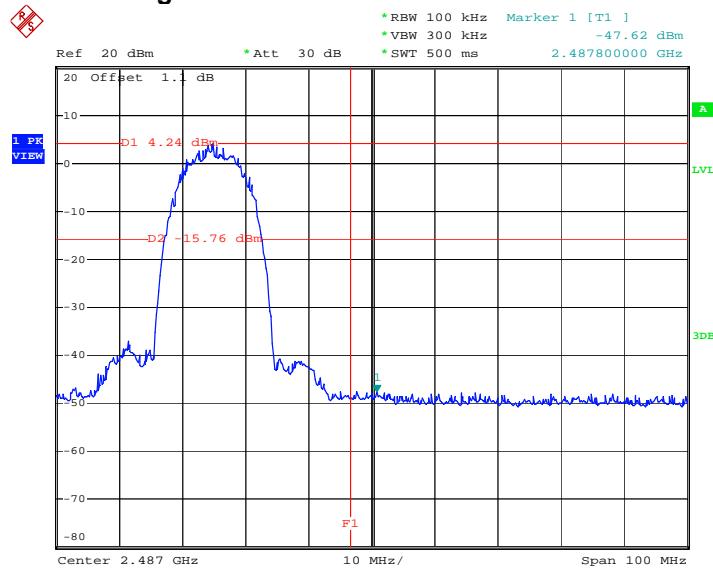


Date: 27.APR.2012 14:31:56

## Low Band Edge Plot on Configuration IEEE 802.11g / 2412 MHz

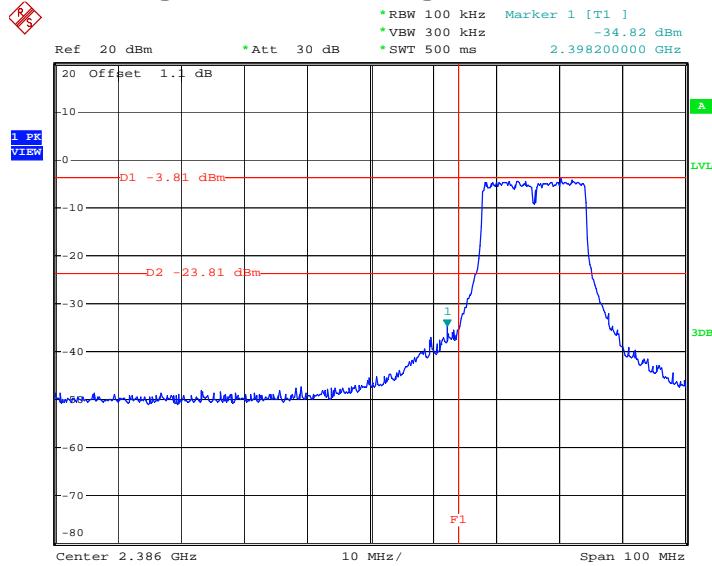

Date: 27.APR.2012 15:02:13

## High Band Edge Plot on Configuration IEEE 802.11g / 2462 MHz

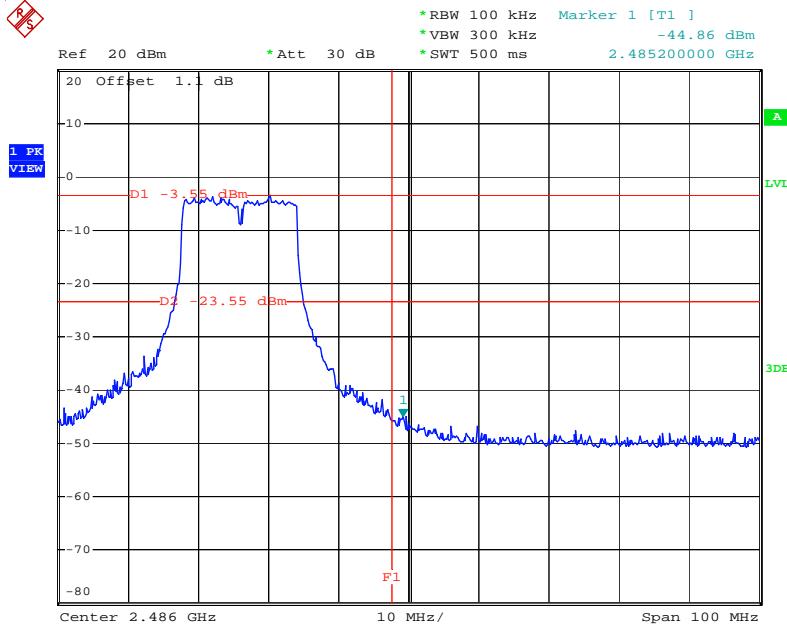

Date: 27.APR.2012 15:26:54

### **3.7 Antenna Requirements**

#### **3.7.1 Limit**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

#### **3.7.2 Antenna Connector Construction**

Please refer to section 2.3 in this test report; antenna connector complied with the requirements.

## 4 LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9 kHz ~ 2.75 GHz	Apr. 20, 2011	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz – 30MHz	Feb. 08, 2012	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9 kHz ~ 30 MHz	May 04, 2011	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	CB049	9 kHz ~ 30 MHz	Apr. 21, 2011	Conduction (CO04-HY)
ISN	SCHAFFNER	ISN T400	21653	9 kHz ~30 MHz	Jun. 04, 2011	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP 40	100305	9 KHz ~ 40 GHz	Feb. 21, 2012	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Jun. 03, 2011	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	-20~100°C	Dec. 07, 2011	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10 MHz ~ 40 GHz	Jun. 07, 2011	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	1027452	300 MHz ~ 40 GHz	Jun. 16, 2011	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	1124009	300 MHz ~ 40 GHz	Jun. 20, 2011	Conducted (TH01-HY)
RF Cable-1m	Jye Bao	RG142	CB034-1m	20 MHz ~ 7 GHz	Dec. 03, 2011	Conducted (TH01-HY)
RF Cable-2m	Jye Bao	RG142	CB035-2m	20 MHz ~ 1 GHz	Dec. 03, 2011	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jun. 09, 2011*	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.

<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Characteristics</b>	<b>Calibration Date</b>	<b>Remark</b>
Spectrum Analyzer	R&S	FSP40	100593	9 kHz ~ 40 GHz	Sep. 01, 2011	Radiation (03CH02-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30 MHz ~ 1 GHz 3m	May 11, 2011	Radiation (03CH02-HY)
Amplifier	Agilent	8447D	2944A11146	100 kHz ~ 1.3 GHz	Jul. 25, 2011	Radiation (03CH02-HY)
Amplifier	Agilent	8449B	3008A02373	1 GHz ~ 26.5 GHz	Jul. 25, 2011	Radiation (03CH02-HY)
Horn Antenna	ETS-LINDGREN	3117	00091920	1 GHz ~ 18 GHz	Nov. 15, 2011	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz ~ 1 GHz	Nov. 11, 2011	Radiation (03CH02-HY)
RF Cable-high	SUHNER	SUCOFLEX106	03CH02-HY	1 GHz ~ 40 GHz	Mar. 06, 2012	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2723	30 MHz ~ 2 GHz	Oct. 22, 2011	Radiation (03CH02-HY)
Turn Table	HD	DS 420	420/649/00	0 - 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	HD	MA 240	240/559/00	1 m - 4 m	N/A	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is one year.

<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Characteristics</b>	<b>Calibration Date</b>	<b>Remark</b>
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul. 29, 2010*	Radiation (03CH02-HY)
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5GHz ~ 40GHz	Apr. 19, 2011*	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is two year.

**5 TEST LOCATION**

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei 221, Taiwan, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-327-0973
LINKOU	ADD : No. 30-2, Dingfu Vil., Linkou Dist., New Taipei City 244,, Taiwan, R.O.C. TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei 114, Taiwan, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei 235, Taiwan, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

## 6 TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-111208

財團法人全國認證基金會  
Taiwan Accreditation Foundation

## Certificate of Accreditation

This is to certify that

**Sporton International Inc.**  
**EMC & Wireless Communications Laboratory**  
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

**is accredited in respect of laboratory**

**Accreditation Criteria** : ISO/IEC 17025:2005  
**Accreditation Number** : 1190  
**Originally Accredited** : December 15, 2003  
**Effective Period** : January 10, 2010 to January 09, 2013  
**Accredited Scope** : Testing Field, see described in the Appendix  
**Specific Accreditation Program** : Accreditation Program for Designated Testing Laboratory  
for Commodities Inspection  
Accreditation Program for Telecommunication Equipment  
Testing Laboratory  
Accreditation Program for BSMI Mutual Recognition  
Arrangement with Foreign Authorities

Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : December 08, 2011

P1, total 24 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix