

Test Report No:
2410473R-RFUSV07S-A

TEST REPORT

Product Name	Medical Panel PC
Brand Name	iEI
Model No.	POCm-W22C-RPLxxxxxxxxxxxxxxxxxxxx, POCm-W22CR-RPLxxxxxxxxxxxxxxxxxxxx, POCm-W24C-RPLxxxxxxxxxxxxxxxxxxxx, POCm-W24CR-RPLxxxxxxxxxxxxxxxxxxxx (where x can be "/", "-", any alphanumeric or blank)
FCC ID	RFHPOCMRPL001
Applicant's Name / Address	IEI Integration Corp. No.29,Zhongxing Rd., Xizhi Dist., New Taipei City 22161, Taiwan(R.O.C.)
Manufacturer's Name	IEI Integration Corp.
Test Method Requested, Standard	FCC CFR Title 47 Part 15 Subpart C Section 15.225 ANSI C63.10-2013
Verdict Summary	IN COMPLIANCE
Documented By April Chen	
Tested By Ivan Chuang	
Approved By Alan Chen	
Date of Receipt	2024/01/16
Date of Issue	2024/06/28
Report Version	V1.0

INDEX

	page
Competences and Guarantees.....	4
General Conditions	4
Revision History	5
Summary of Test Result	6
1. General Information.....	7
1.1. EUT Description	7
1.2. EUT Information	7
1.3. Testing Location Information	8
1.4. Measurement Uncertainty	8
1.5. List of Test Equipment	9
2. Test Configuration of EUT	10
2.1. Test Condition.....	10
2.2. Test Frequency Mode	10
2.3. Measurement Configuration	10
2.4. Tested System Details	11
2.5. Configuration of tested System	12
2.6. EUT Operating Procedures	12
3. AC Power Line Conducted Emission	13
3.1. Test Setup.....	13
3.2. Test Limit	13
3.3. Test Procedure	13
3.4. Test Result of AC Power Line Conducted Emission.....	13
4. Emission Bandwidth	14
4.1. Test Setup.....	14
4.2. Test Limit	14
4.3. Test Procedures.....	14
4.4. Test Result of Emission Bandwidth	14
5. Frequency Stability	15
5.1. Test Setup.....	15
5.2. Test Limit	15
5.3. Test Procedures.....	15
5.4. Test Result of Frequency Stability	15
6. Field Strength of Fundamental Emissions and Spectrum Mask	16
6.1. Test Setup.....	16
6.2. Test Limit	16
6.3. Test Procedure	17

6.4.	Test Result of Field Strength of Fundamental Emissions and Spectrum Mask	17
7.	Radiated Emission.....	18
7.1.	Test Setup.....	18
7.2.	Test Limit	19
7.3.	Test Procedure	19
7.4.	Test Result of Radiated Emission.....	19

Appendix A. Test Result of AC Power Line Conducted Emission

Appendix B. Test Result of Emission Bandwidth

Appendix C. Test Result of Frequency Stability

Appendix D. Test Result of Field Strength of Fundamental Emissions and Spectrum Mask

Appendix E. Test Result of Radiated Emission

Appendix F. Test Setup Photograph

Competences and Guarantees

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

General Conditions

1. The test results relate only to the samples tested.
2. The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.
3. This report must not be used to claim product endorsement by TAF or any agency of the government.
4. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.
5. Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Revision History

Version	Description	Issued Date
V1.0	Initial issue of report	2024/06/28

Summary of Test Result

Report Clause	Test Items	Result (PASS/FAIL)	Remark
3	AC Power Line Conducted Emission	PASS	-
4	Emission Bandwidth	PASS	-
6	Field Strength of Fundamental Emissions and Spectrum Mask	PASS	-
7	Radiated Emission	PASS	-
5	Frequency Stability	PASS	-

Comments and Explanations

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1. General Information

1.1. EUT Description

Frequency Range	13.553 ~ 13.567 MHz 125 kHz
Operation Frequency	13.56 MHz 125 kHz
Channel Number	13.56 MHz: 1 Channel 125 kHz: 1 Channel
Type of Modulation	ASK

Accessories Information					
No.	Equipment Name	Brand Name	Model No.	Rating	Remark
1	Power Adapter	FSP	FSP150M-ABA	INPUT: AC 100-240V~, 2.0-0.85A 50-60Hz OUTPUT: 19.0V---7.89A	With power cable : Non-Shielded, 1.2m, with two ferrite cores bonded.
No.	Equipment Name	Remark			
2	Power Cable	Non-shielded, 1.8m			

The difference for each model is shown as below:

Model No.	Description
POCm-W22C-RPLxxxxxxxxxxxxxxxxxxxx, POCm-W22CR-RPLxxxxxxxxxxxxxxxxxxxx, POCm-W24C-RPLxxxxxxxxxxxxxxxxxxxx, POCm-W24CR-RPLxxxxxxxxxxxxxxxxxxxx (where x can be "/", "-", any alphanumeric or blank)	It's declared by manufacture about all models are electrically identical, different model names for marketing purpose.

From the above models, model: POCm-W24CR-RPL was selected as representative model for the test and its data was recorded in this report.

Antenna Information			
Item.	Brand Name	Model No.	Type
1	Rf IDEas	Kit-00047	Loop

1.2. EUT Information

EUT Power Type	From Adapter
----------------	--------------

1.3. Testing Location Information

USA	FCC Registration Number: TW0033
Canada	CAB Identifier Number: TW3023 / Company Number: 26930

Site Description	Accredited by TAF Accredited Number: 3023
------------------	----------------------------------------------

Test Laboratory	DEKRA Testing and Certification Co., Ltd. Linkou Laboratory
Address	No.5-22, Ruishukeng Linkou District, New Taipei City, 24451, Taiwan, R.O.C.
Performed Location	No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan, R.O.C.
Phone Number	+886-3-275-7255
Fax Number	+886-3-327-8031

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual	Test Date
AC Power Line Conducted Emission	Temperature (°C)	10~40 °C	25.9 °C	2024/05/29
	Humidity (%RH)	10~90 %	61.0 %	
Radiated Emission	Temperature (°C)	10~40 °C	22.6 °C	2024/05/24~2024/05/28
	Humidity (%RH)	10~90 %	63.2 %	
RF Conducted Emission	Temperature (°C)	10~40 °C	23.0 °C	2024/05/29
	Humidity (%RH)	10~90 %	65.0 %	

1.4. Measurement Uncertainty

Uncertainties have been calculated according to the DEKRA internal document with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2).

Test item	Uncertainty
AC Power Line Conducted Emission	±3.50 dB
Field Strength of Fundamental Emissions and Spectrum Mask	± 3.88 dB
Radiated Emission	9 kHz~30 MHz: ±3.88 dB 30 MHz~1 GHz: ±4.42 dB 1 GHz~18 GHz: ±4.28 dB
Frequency Stability	±1580.61 Hz

1.5. List of Test Equipment

For Conduction Measurements / HY-SR01

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	EMI Test Receiver	R&S	ESR7	101601	2023/06/20	2024/06/19
V	Two-Line V-Network	R&S	ENV216	101306	2024/04/01	2025/03/31
V	Two-Line V-Network	R&S	ENV216	101307	2023/08/17	2024/08/16
V	Coaxial Cable	SUHNER	RG400_BNC	RF001	2024/01/10	2025/01/09

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "V" are used to measure the final test results.
3. Test Software Version: e3 230303 dekra V9.

For Conducted Measurements / HY-SR03

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	Spectrum Analyzer	R&S	FSV30	103466	2024/01/05	2025/01/04
V	Temperature Chamber	KSON	THS-D4T-100	A0606	2023/08/10	2024/08/09
V	AC Power Source	eeC	6605	1570547	2024/01/30	2025/01/29
	Dual Output Autoranging DC Power Supply	KEYSIGHT	E36234A	MY59001234	2023/11/09	2024/11/08

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "V" are used to measure the final test results.
3. Test Software Version: RF Conducted Test Tools R3 V3.0.0.14.

For Radiated Measurements /HY-CB02

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	Loop Antenna	AMETEK	HLA6121	56736	2023/05/23	2024/05/22
V	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-0675	2023/08/09	2025/08/08
	Horn Antenna	RF SPIN	DRH18-E	210503A18ES	2024/02/29	2025/02/28
	Horn Antenna	Com-Power	AH-840	101100	2023/10/02	2025/10/01
V	Pre-Amplifier	SGH	SGH0301-9	20211007-8	2024/01/10	2025/01/09
	Pre-Amplifier	SGH	SGH118-HS	20211102-1	2024/01/10	2025/01/09
	Pre-Amplifier	EMCI	EMC05820SE	980285	2024/01/10	2025/01/09
	Pre-Amplifier	EMCI	EMC184045SE	980369	2024/01/10	2025/01/09
	Coaxial Cable	EMCI	EMC102-KM-KM-600	1160314	2024/01/10	2025/01/09
	Coaxial Cable	EMCI	EMC102-KM-KM-7000	170242	2024/01/10	2025/01/09
	Filter	MICRO TRONICS	BRM50702	G249	2024/01/05	2025/01/04
	Filter	MICRO TRONICS	BRM50716	G067	2024/01/05	2025/01/04
V	Loop Antenna	AMETEK	HLA6121	56736	2023/12/11	2024/12/10
V	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-0675	2024/02/21	2025/02/20
V	Horn Antenna	RF SPIN	DRH18-E	210503A18ES	2024/01/10	2025/01/09
V	Horn Antenna	Com-Power	AH-840	101100	2024/01/10	2025/01/09
V	Pre-Amplifier	SGH	SGH0301-9	20211007-8	2024/01/10	2025/01/09
V	Pre-Amplifier	SGH	SGH118-HS	20211102-1	2024/01/10	2025/01/09

Note:

1. Bi-Log Antenna and Horn Antenna(AH-840) is calibrated every two years, the other equipments are calibrated every one year.
2. The test instruments marked with "V" are used to measure the final test results.
3. Test Software Version: e3 230303 dekra V9.

2. Test Configuration of EUT

2.1. Test Condition

EUT Operational Condition			
Testing Voltage	V_{nom} (AC 120V/60Hz)	V_{max} (AC 138V/60Hz)	V_{min} (AC 102V/60Hz)

2.2. Test Frequency Mode

Test Software Version	pcProxAPI Library VER:07.04(13.56)/VER:7.5.1
-----------------------	----------------------------------------------

Modulation	Frequency	Power Setting
NFC	13.56 MHz	N/A
RF ID	125 kHz	N/A

2.3. Measurement Configuration

Test Mode	Mode 1	Transmit
-----------	--------	----------


Note:

1. Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
2. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report

2.4. Tested System Details

No.	Equipment	Brand Name	Model No.	Serial No.	Power Cord
1	Tag card	N/A	N/A	N/A	N/A
2	Monitor	DELL	U2415	CN-01RMGX-74261-63H-09UL-A02	Non-Shielded, 1.8m
3	Load	N/A	N/A	N/A	N/A
4	External HDD	Transcend	TS1TSJ25H3B	F21786-0125	N/A
5	External HDD	Transcend	TS1TSJ25H3B	F21786-0005	N/A
6	Microphone & Earphone	KINYO	EM-2101	N/A	N/A
7	FLASH	Kingston	DT100G3/8GB	FLASH	N/A
8	FLASH	SanDisk	16GB Ultra Flair CZ73	FLASH	N/A
9	FLASH	SanDisk	16GB Ultra Flair CZ73	FLASH	N/A
10	FLASH	SanDisk	16GB Ultra Flair CZ73	FLASH	N/A
11	FLASH	Transcend	JetFlash 790C/64GB	FLASH	N/A
12	RS232 Loop Back	N/A	N/A	N/A	N/A
13	Notebook PC	DELL	Latitude 5580	2HRD7H2	N/A
14	Notebook PC	DELL	Latitude 5501	8JHGL13	N/A

2.5. Configuration of tested System

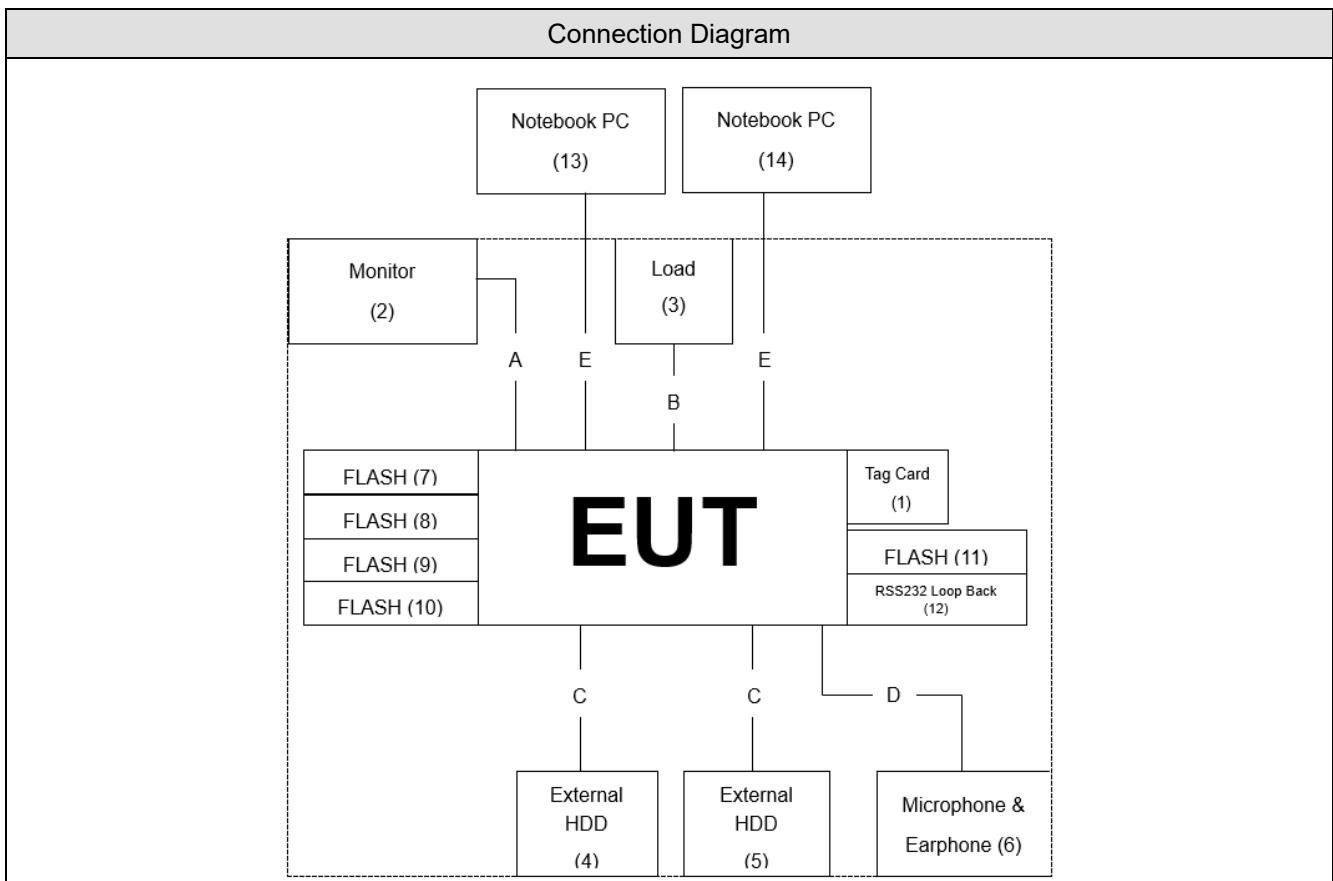


Signal Cable Type	Signal cable Description
A	HDMI CABLE
B	Power Cable
C	USB Cable
D	Microphone & Earphone Cable
E	LAN Cable

2.6. EUT Operating Procedures

1	Setup the EUT as shown in Section 2.5.
2	Execute software "pcProxAPI Libary VER:07.04(13.56)/VER:7.5.1" on the EUT.
3	Configure the test mode.
4	Verify that the EUT works properly.

3. AC Power Line Conducted Emission

3.1. Test Setup

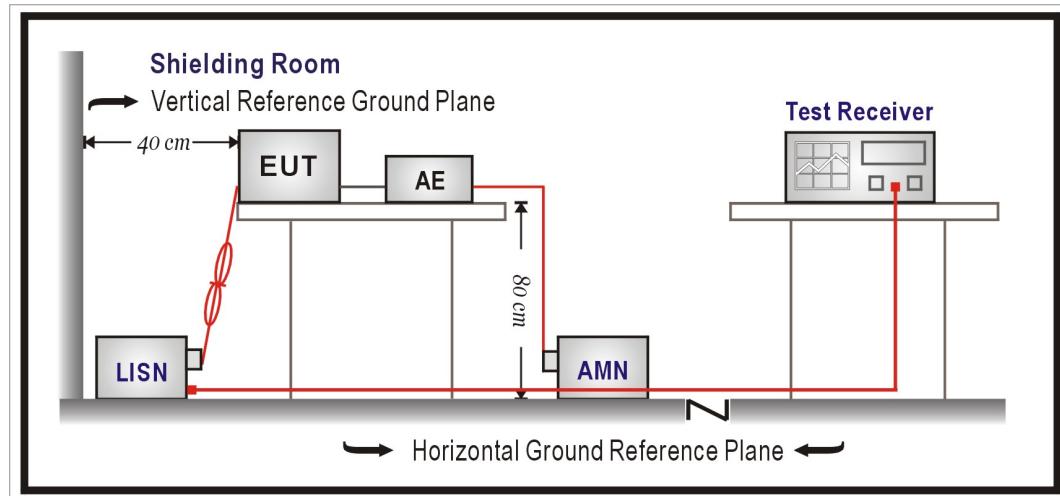

3.2. Test Limit

Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

3.3. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50 ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.


Conducted emissions were invested over the frequency range from 0.15 MHz to 30 MHz using a receiver bandwidth of 9 kHz.

3.4. Test Result of AC Power Line Conducted Emission

Refer as Appendix A

4. Emission Bandwidth

4.1. Test Setup

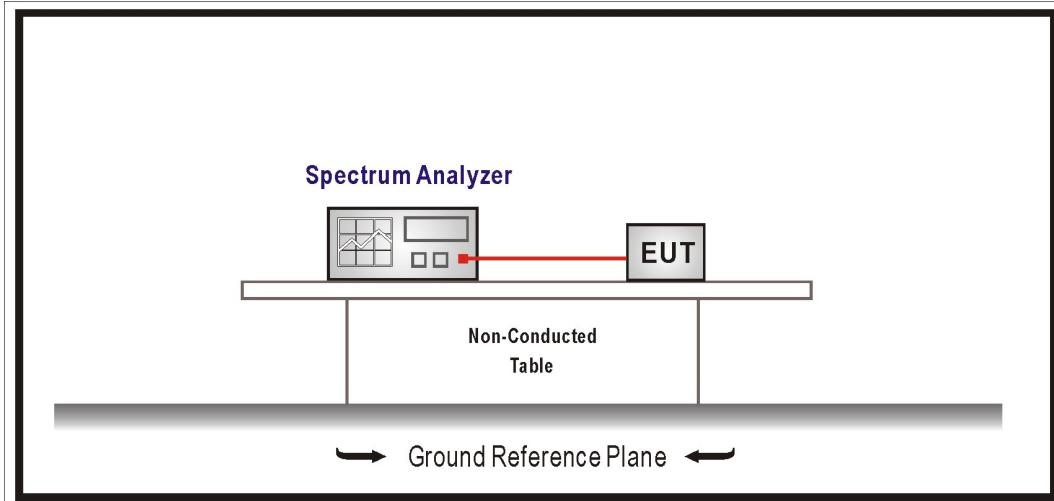

4.2. Test Limit

Intentional radiators must be designed to ensure that the 20dB emission bandwidth in the specific band 13.553 ~ 13.567 MHz.

4.3. Test Procedures


1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. Because the measured signal is CW or CW-like adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.

4.4. Test Result of Emission Bandwidth

Refer as Appendix B

5. Frequency Stability

5.1. Test Setup

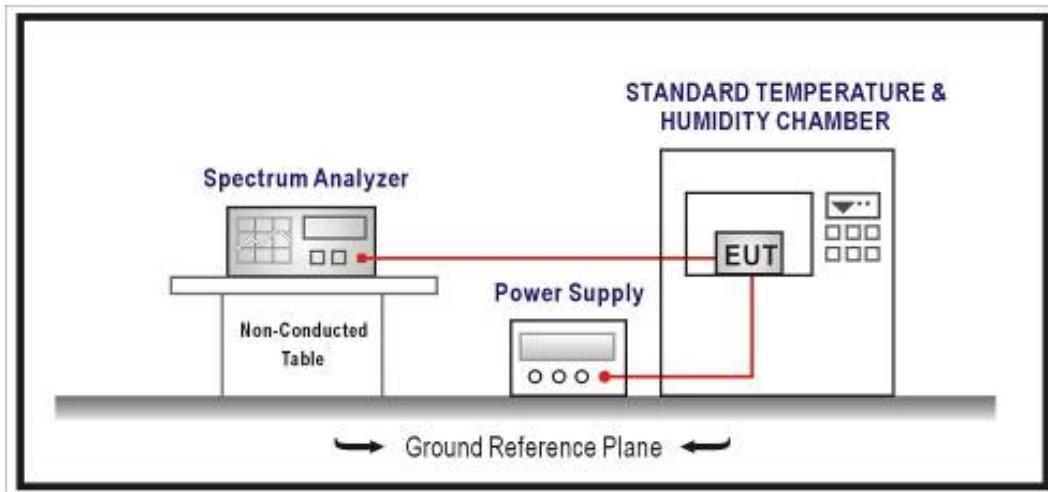

5.2. Test Limit

Carrier frequency stability shall be maintained to $\pm 0.01\%$ (± 100 ppm).

5.3. Test Procedures

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.


For battery operated equipment, the equipment tests shall be performed using a new battery.

5.4. Test Result of Frequency Stability

Refer as Appendix C

6. Field Strength of Fundamental Emissions and Spectrum Mask

6.1. Test Setup

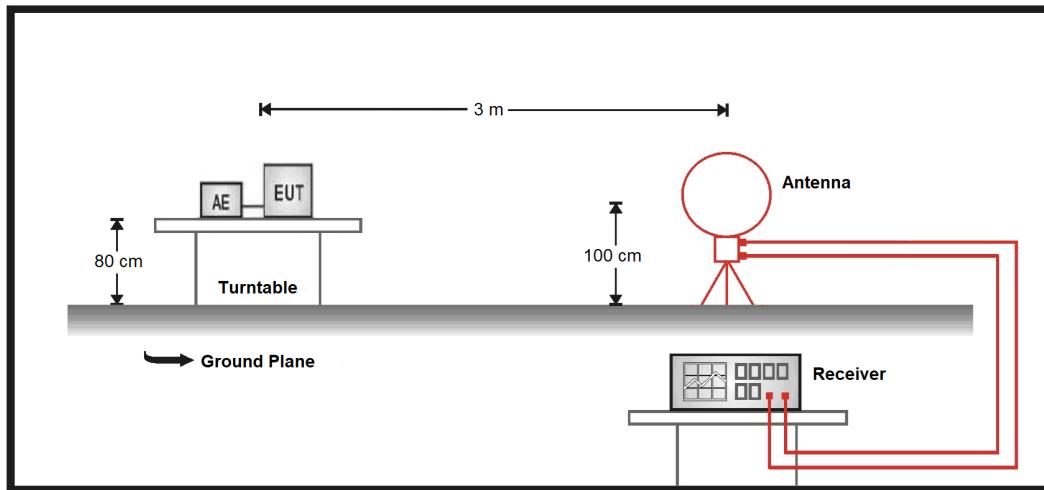

6.2. Test Limit

Field Strength of Fundamental Emissions			
Frequencies (MHz)	Field Strength (microvolts/meter) at 30m	Field Strength (dB μ V/m) at 10m	Field Strength (dB μ V/m) at 3m
13.553 – 13.567 MHz	15848	103.08 (QP)	124 (QP)
Quasi peak measurement of the fundamental.			

Spectrum Mask					
Description	Freq. of Emission (MHz)	Field Strength			
		(uV/m)@30m	(dB μ V/m)@30m	(dB μ V/m)@10m	(dB μ V/m)@3m
Limit	1.705~13.110	30	29.5	48.6	69.5
	13.110~13.410	106	40.5	59.6	80.5
	13.410~13.553	334	50.5	69.6	90.5
	13.553~13.567	15848	84.0	103.1	124.0
	13.567~13.710	334	50.5	69.6	90.5
	13.710~14.010	106	40.5	59.6	80.5
	14.010~30.000	30	29.5	48.6	69.5

6.3. Test Procedure

1. Configure the EUT according to ANSI C63.10: 2013. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
4. For Fundamental emissions, use the receiver to measure QP reading.
5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
6. Compliance with the spectrum mask is tested using a spectrum analyzer with RBW set to a 9kHz for the band 13.553 – 13.567 MHz.


6.4. Test Result of Field Strength of Fundamental Emissions and Spectrum Mask

Refer as Appendix D


7. Radiated Emission

7.1. Test Setup

9 kHz ~ 30 MHz

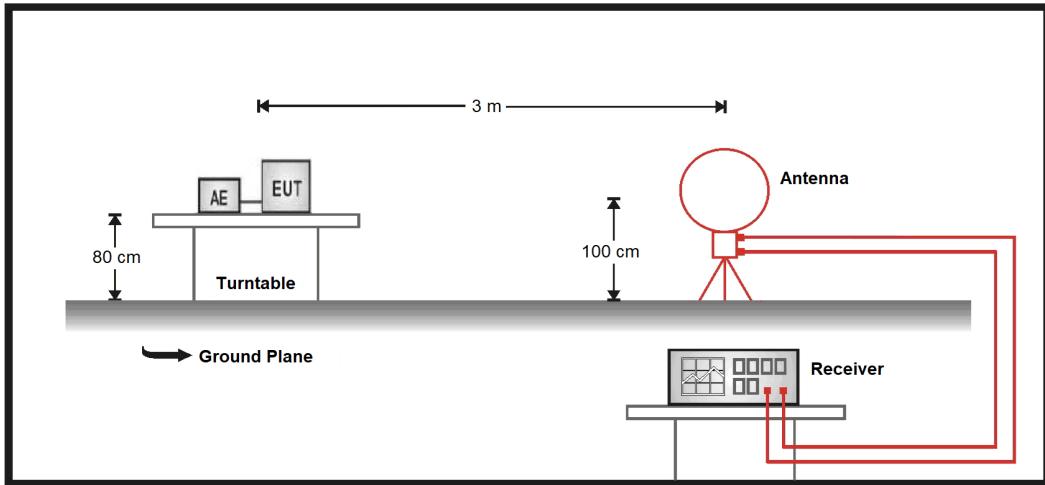

30 MHz ~ 1 GHz

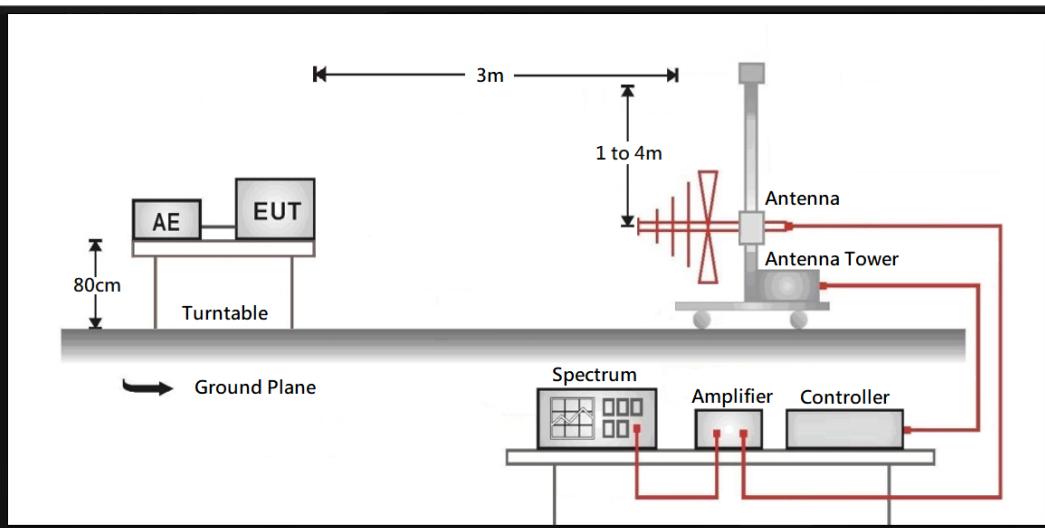

7.2. Test Limit

The field strength of any emissions which appear outside of 13.553 ~ 13.567MHz band shall not exceed the general radiated emissions limits.

Frequency (MHz)	Field strength (uV/m)	Field strength (dBuV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	20 log (2400/F(kHz))	300
0.490 – 1.705	24000/F(kHz)	20 log (24000/F(kHz))	30
1.705 - 30	30	29.5	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

Remarks:

1. Field strength (dBuV/m) = 20 log Field strength (uV/m)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

7.3. Test Procedure

1. Configure the EUT according to ANSI C63.10: 2013. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

7.4. Test Result of Radiated Emission

Refer as Appendix E