



## **STC Test Report**

**Date:** 2016-09-12

**Page 1 of 86**

**No.:** DM124918

**Applicant:**

Monster LLC  
3837 Bay Lake Trail, Suite 103, North Las Vegas, NV  
89030, USA

**Manufacturer:**

Guangzhou Sun Yong Electronics Co., Ltd.  
No.158, Dayu Road, Dongchong Town, Nansha District,  
Guangzhou City, China

**Description of Sample(s):**

Product: MONSTER BLUETOOTH  
HEADPHONES  
Brand Name: MONSTER  
Model Number: 190686  
FCC ID: RJE190686

**Date Sample(s) Received:**

2016-08-23

**Date Tested:**

2016-08-30 to 2016-09-09

**Investigation Requested:**

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2015 and ANSI C63.10: 2013 for FCC Certification.

**Conclusion(s):**

The submitted product COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.

**Remark(s):**

Bluetooth FHSS (GFSK/  $\pi/4$ -DQPSK/ 8DPSK)

  
LONG Yun Jian/Along  
Authorized Signatory  
ElectroMagnetic Compatibility Department  
For and on behalf of  
STC (Dongguan) Company Limited

**STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## **STC Test Report**

**Date: 2016-09-12**

**No.: DM124918**

**Page 2 of 86**

### **CONTENT:**

|                                                                |                  |
|----------------------------------------------------------------|------------------|
| Cover                                                          | Page 1 of 86     |
| Content                                                        | Page 2 of 86     |
| <b><u>1.0 General Details</u></b>                              |                  |
| 1.1 Test Laboratory                                            | Page 3 of 86     |
| 1.2 Equipment Under Test [EUT]<br>Description of EUT operation | Page 3 of 86     |
| 1.3 Date of Order                                              | Page 3 of 86     |
| 1.4 Submitted Sample                                           | Page 3 of 86     |
| 1.5 Test Duration                                              | Page 3 of 86     |
| 1.6 Country of Origin                                          | Page 3 of 86     |
| 1.7 RF Module Details                                          | Page 4 of 86     |
| 1.8 Antenna Details                                            | Page 4 of 86     |
| <b><u>2.0 Technical Details</u></b>                            |                  |
| 2.1 Investigations Requested                                   | Page 5 of 86     |
| 2.2 Test Standards and Results Summary                         | Page 5 of 86     |
| 2.3 Table for Test Modes                                       | Page 6 of 86     |
| <b><u>3.0 Test Results</u></b>                                 |                  |
| 3.1 Emission                                                   | Page 7 –82 of 86 |
| <b><u>Appendix A</u></b><br>List of Measurement Equipment      | Page 83 of 86    |
| <b><u>Appendix B</u></b><br>Ancillary Equipment                | Page 83 of 86    |
| <b><u>Appendix C</u></b><br>Photographs                        | Page 84-86 of 86 |

### **STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## **STC Test Report**

**Date: 2016-09-12**

**Page 3 of 86**

**No.: DM124918**

### **1.0 General Details**

#### **1.1 Test Laboratory**

STC (Dongguan) Company Limited  
EMC Laboratory  
68 Fumin Nan Road, Dalang, Dongguan, Guangdong, China  
Telephone: (86 769) 81119888  
Fax: (86 769) 81116222

#### **1.2 Equipment Under Test [EUT] Description of Sample(s)**

Product: MONSTER BLUETOOTH HEADPHONES  
Manufacturer: Guangzhou Sun Yong Electronics Co., Ltd.  
No.158, Dayu Road, Dongchong Town, Nansha District,  
Guangzhou City, China  
Brand Name: MONSTER  
Model Number: 190686  
Rating: 5.0Vd.c. (Powered by USB port) / 3.7Vd.c Li-ion  
rechargeable battery

##### **1.2.1 Description of EUT Operation**

The Equipment Under Test (EUT) is a MONSTER BLUETOOTH HEADPHONES. The r.f. signal was modulated by IC and type of modulation was frequency hopping spread spectrum Modulation.

#### **1.3 Date of Order**

2016-08-23

#### **1.4 Submitted Sample(s):**

1 Sample

#### **1.5 Test Duration**

2016-08-30 to 2016-09-09

#### **1.6 Country of Origin**

China

### **STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## **STC Test Report**

**Date: 2016-09-12**

**Page 4 of 86**

**No.: DM124918**

### **1.7 RF Module Details**

|                           |                                                        |
|---------------------------|--------------------------------------------------------|
| Module Model Number:      | K549AH                                                 |
| Module FCC ID:            |                                                        |
| Module Transmission Type: | Bluetooth V4.1                                         |
| Modulation:               | FHSS (GFSK / $\pi/4$ -DQPSK/ 8DPSK)                    |
| Data Rates:               | 1Mbps: GFSK<br>2 Mbps: $\pi/4$ -DQPSK<br>3 Mbps: 8DPSK |
| Frequency Range:          | 2400-2483.5MHz                                         |
| Carrier Frequencies:      | 2402MHz – 2480MHz                                      |

Module Specification (specification provided by manufacturer)

### **1.8 Antenna Details**

|               |                         |
|---------------|-------------------------|
| Antenna Type: | Dielectric Chip Antenna |
| Antenna Gain: | 2.0dBi                  |

**STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

**Date: 2016-09-12**

**Page 5 of 86**

**No.: DM124918**

### **2.0 Technical Details**

#### **2.1 Investigations Requested**

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2015 Regulations and ANSI C63.10: 2013 for FCC Certification.

#### **2.2 Test Standards and Results Summary Tables**

| <b>EMISSION<br/>Results Summary</b> |                             |                   |                     |                                     |                          |                          |
|-------------------------------------|-----------------------------|-------------------|---------------------|-------------------------------------|--------------------------|--------------------------|
| Test Condition                      | Test Requirement            | Test Method       | Class /<br>Severity | Test Result                         |                          |                          |
|                                     |                             |                   |                     | Pass                                | Fail                     | N/A                      |
| Maximum Peak Conducted Output Power | FCC 47CFR 15.247(b)(1)      | ANSI C63.10: 2013 | N/A                 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Radiated Spurious Emissions         | FCC 47CFR 15.209            | ANSI C63.10: 2013 | N/A                 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| AC Mains Conducted Emissions        | FCC 47CFR 15.207            | ANSI C63.10: 2013 | N/A                 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Number of Hopping Frequency         | FCC 47CFR 15.247 (b)(1)     | ANSI C63.10: 2013 | N/A                 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 20dB Bandwidth                      | FCC 47CFR 15.247(a)(2)      | ANSI C63.10: 2013 | N/A                 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Hopping Channel Separation          | FCC 47CFR 15.247(a)(1)      | ANSI C63.10: 2013 | N/A                 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Band-edge measurement (Radiated)    | FCC 47CFR 15.247(d)         | ANSI C63.10: 2013 | N/A                 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Pseudorandom Hopping Algorithm      | FCC 47CFR 15.247(a)(1)      | N/A               | N/A                 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Time of Occupancy (Dwell Time)      | FCC 47CFR 15.247(a)(1)(iii) | ANSI C63.10: 2013 | N/A                 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| Antenna requirement                 | FCC 47CFR 15.203            | N/A               | N/A                 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

Note: N/A – Not Applicable

#### **STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## **STC Test Report**

**Date: 2016-09-12**

**Page 6 of 86**

**No.: DM124918**

### **2.3 Table for Test Modes**

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate in the table below is the worst case rate with respect to the specific test item.

Investigation has been done on all the possible configurations for searching the worst cases.

The device was realized by test software.

The following table is a list of the test modes shown in this test report.

| <b>Test Items</b>                          | <b>Mode</b>                   | <b>Data Rate</b>      |
|--------------------------------------------|-------------------------------|-----------------------|
| Maximum Peak Conducted Output Power        | GFSK / $\pi/4$ -DQPSK / 8DPSK | 1MBps / 2MBps / 3MBps |
| Hopping Channel Separation                 | GFSK / $\pi/4$ -DQPSK / 8DPSK | 1MBps / 2MBps / 3MBps |
| Number of Hopping Frequency                | GFSK / $\pi/4$ -DQPSK / 8DPSK | 1MBps / 2MBps / 3MBps |
| Time of Occupancy(Dwell Time)              | 8DPSK (DH1 / DH3 / DH5)       | 3MBps                 |
| Radiated Spurious Emissions                | GFSK / $\pi/4$ -DQPSK / 8DPSK | 1MBps / 2MBps / 3MBps |
| Band-edge compliance of Conducted Emission | GFSK / $\pi/4$ -DQPSK / 8DPSK | 1MBps / 2MBps / 3MBps |

### **STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## **STC Test Report**

**Date: 2016-09-12**

**Page 7 of 86**

**No.: DM124918**

### **3.0 Test Results**

#### **3.1 Emission**

##### **3.1.1 Maximum Peak Conducted Output Power**

|                    |                        |
|--------------------|------------------------|
| Test Requirement:  | FCC 47CFR 15.247(b)(1) |
| Test Method:       | ANSI C63.10: 2013      |
| Test Date:         | 2016-08-30             |
| Mode of Operation: | Tx mode                |


#### **Test Method:**

A temporary antenna connector was soldered to the RF output. The RF output of the EUT was connected to the spectrum analyzer. All the attenuation or cable loss will be added to the measured maximum output power. The results are recorded in dBm.

#### **Spectrum Analyzer Setting:**

RBW = 3 MHz, VBW = 3MHz, Sweep = Auto, Span = 10MHz  
Detector = Peak, Trace = Max. hold

#### **Test Setup:**

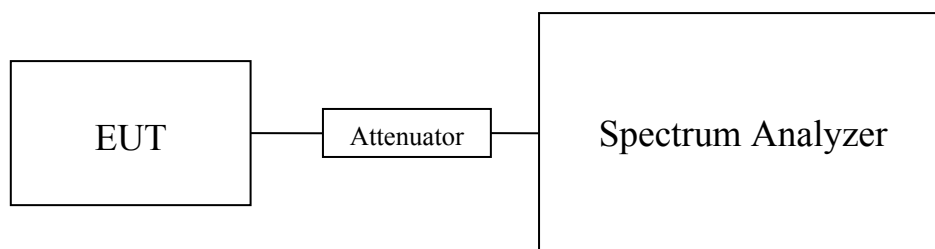

Note: a temporary antenna connector was soldered to the RF output.

### **STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

**Date: 2016-09-12**

**Page 8 of 86**

**No.: DM124918**

**Limits for Maximum Peak Conducted Output Power [FCC 47CFR 15.247]:**

The maximum peak output power shall not exceed the following limits:

For Digital Transmission systems in 2400-2483.5 MHz Band: 1 Watt

Results of Bluetooth Communication mode (GFSK) (Fundamental Power): Pass

| Transmitter Frequency (MHz) | Maximum conducted output power (Watt) |
|-----------------------------|---------------------------------------|
| 2402                        | 0.002612                              |

| Transmitter Frequency (MHz) | Maximum conducted output power (Watt) |
|-----------------------------|---------------------------------------|
| 2441                        | 0.003756                              |

| Transmitter Frequency (MHz) | Maximum conducted output power (Watt) |
|-----------------------------|---------------------------------------|
| 2480                        | 0.003556                              |

The maximum peak output power shall not exceed the following limits:

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 Watts

Results of Bluetooth Communication mode ( $\pi/4$ -DQPSK) (Fundamental Power): Pass

| Transmitter Frequency (MHz) | Maximum conducted output power (Watt) |
|-----------------------------|---------------------------------------|
| 2402                        | 0.001507                              |

| Transmitter Frequency (MHz) | Maximum conducted output power (Watt) |
|-----------------------------|---------------------------------------|
| 2441                        | 0.002415                              |

| Transmitter Frequency (MHz) | Maximum conducted output power (Watt) |
|-----------------------------|---------------------------------------|
| 2480                        | 0.002244                              |

The maximum peak output power shall not exceed the following limits:

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 Watts

Results of Bluetooth Communication mode (8 DPSK) (Fundamental Power): Pass

| Transmitter Frequency (MHz) | Maximum conducted output power (Watt) |
|-----------------------------|---------------------------------------|
| 2402                        | 0.001706                              |

| Transmitter Frequency (MHz) | Maximum conducted output power (Watt) |
|-----------------------------|---------------------------------------|
| 2441                        | 0.002636                              |

| Transmitter Frequency (MHz) | Maximum conducted output power (Watt) |
|-----------------------------|---------------------------------------|
| 2480                        | 0.002443                              |

Calculated measurement uncertainty : 30MHz to 1GHz 1.7dB  
1GHz to 18GHz 1.7dB

Remark:

1. All test data for each data rate were verified, but only the worst case was reported.
2. The EUT is programmed to transmit signals continuously for all testing.

**STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.




## STC Test Report

Date: 2016-09-12

No.: DM124918


Page 9 of 86

### Test plot of Maximum Peak Conducted Output Power : Bluetooth Communication mode (GFSK, 2402MHz)

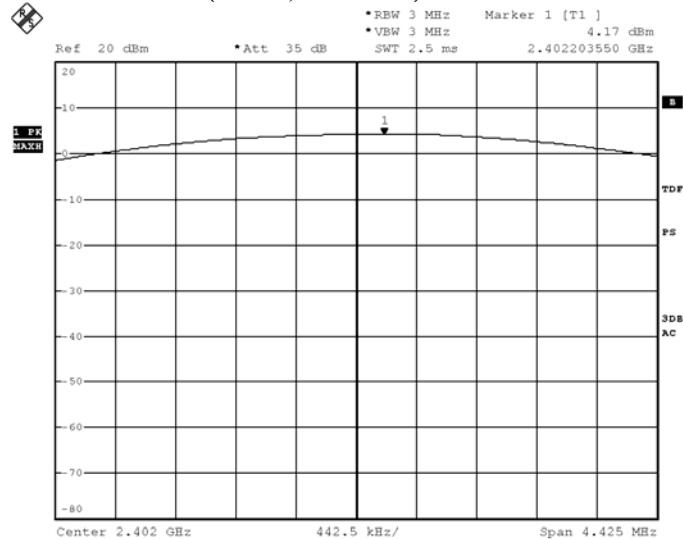

BMP  
Date: 30.AUG.2016 10:41:49

### Bluetooth Communication mode (GFSK, 2441MHz)

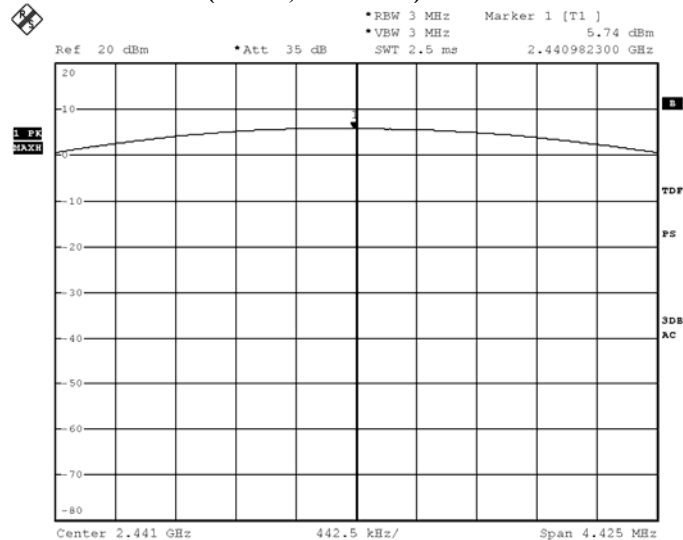

BMP  
Date: 30.AUG.2016 10:42:06

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.




## STC Test Report

Date: 2016-09-12

No.: DM124918

Page 10 of 86


### Bluetooth Communication mode (GFSK, 2480MHz)

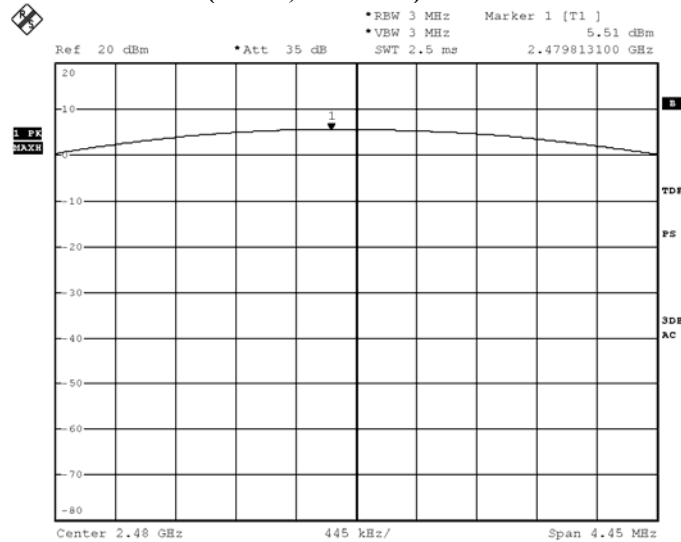

BMP

Date: 30.AUG.2016 10:42:42

### Bluetooth Communication mode ( $\pi/4$ DQPSK, 2402MHz)

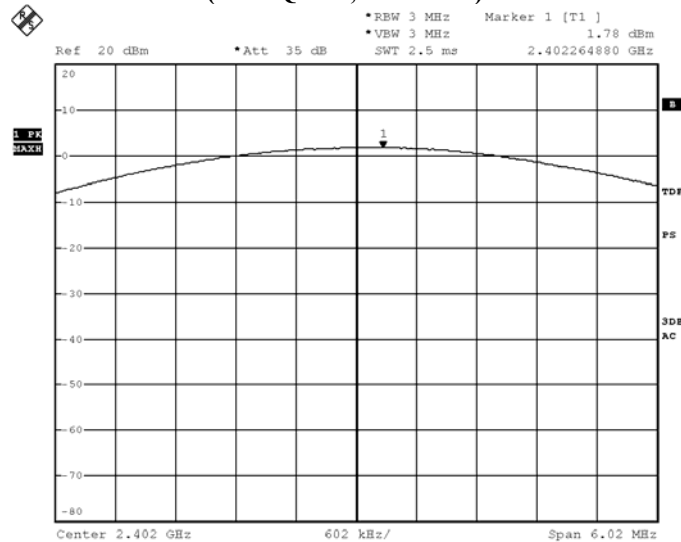

BMP

Date: 30.AUG.2016 10:44:15

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.




## STC Test Report

Date: 2016-09-12

No.: DM124918

Page 11 of 86


### Bluetooth Communication mode ( $\pi/4$ DQPSK, 2441MHz)

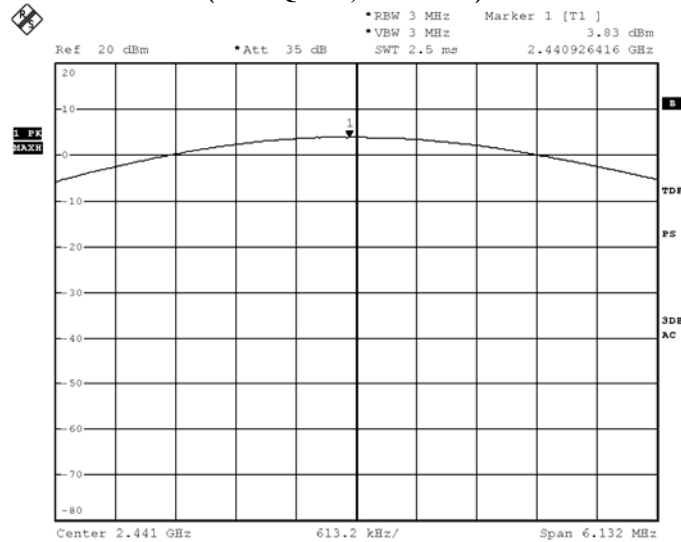

BMP

Date: 30.AUG.2016 10:43:48

### Bluetooth Communication mode ( $\pi/4$ DQPSK, 2480MHz)

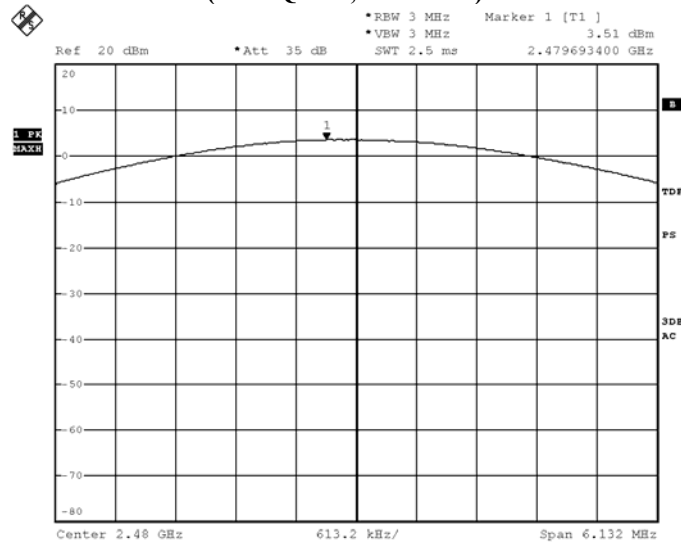

BMP

Date: 30.AUG.2016 10:43:23

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.




## STC Test Report

Date: 2016-09-12

No.: DM124918

Page 12 of 86


### Bluetooth Communication mode (8DPSK, 2402MHz)

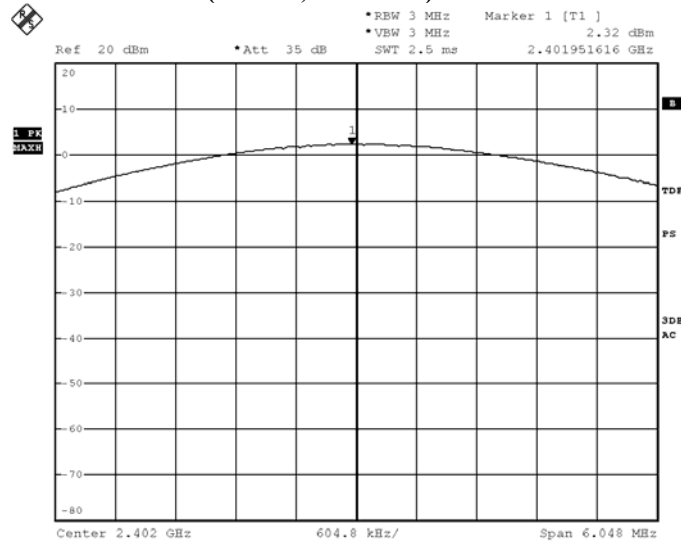

BMP

Date: 30.AUG.2016 10:44:59

### Bluetooth Communication mode (8DPSK, 2441MHz)

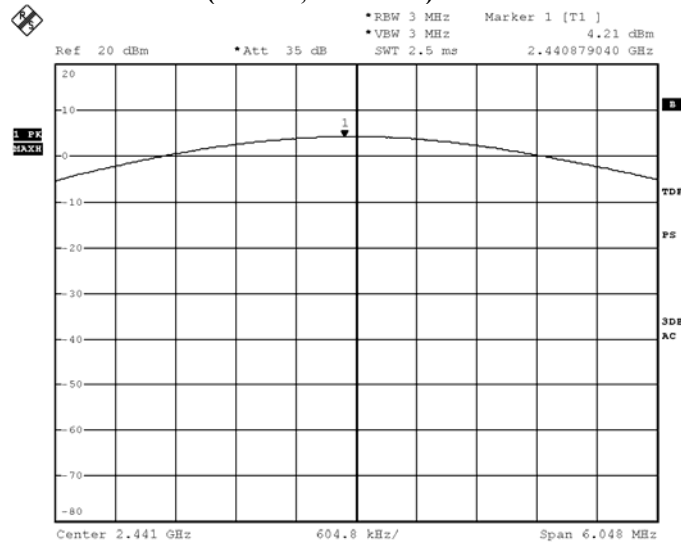

BMP

Date: 30.AUG.2016 10:45:29

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.




## STC Test Report

Date: 2016-09-12

Page 13 of 86

No.: DM124918

### Bluetooth Communication mode (8DPSK, 2480MHz)

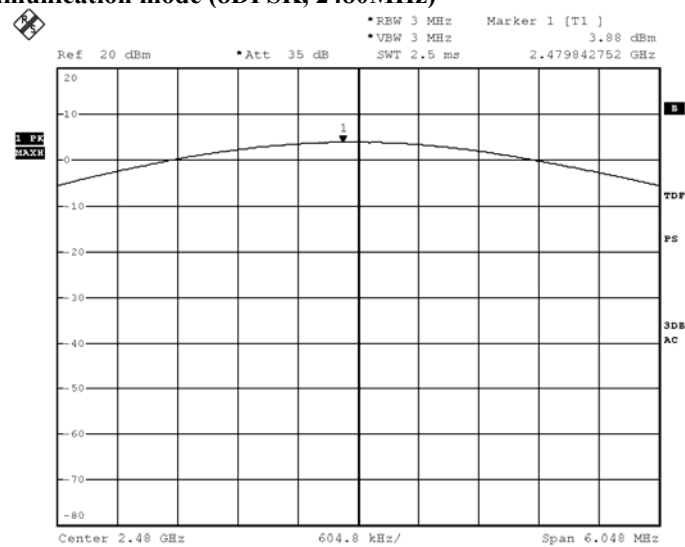

BMP

Date: 30.AUG.2016 10:45:56

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## **STC Test Report**

**Date: 2016-09-12**

**Page 14 of 86**

**No.: DM124918**

### **3.1.2 Radiated Spurious Emissions**

|                    |                                        |
|--------------------|----------------------------------------|
| Test Requirement:  | FCC 47CFR 15.209                       |
| Test Method:       | ANSI C63.10: 2013                      |
| Test Date:         | 2016-09-08                             |
| Mode of Operation: | Tx mode / Bluetooth Communication mode |

#### **Test Method:**

For emission measurements at or below 1 GHz, the sample was placed 0.8m above the ground plane of semi-anechoic Chamber\*. For emission measurements above 1 GHz, the sample was placed 1.5m above the ground plane of semi-anechoic Chamber\*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

- \*: Semi-anechoic chamber located on the STC (Dongguan) Company Ltd. 68 Fumin Nan Road, Dalang, Dongguan, Guangdong, PRC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 629686.

#### **STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

**Date: 2016-09-12**

**Page 15 of 86**

**No.: DM124918**

### **Spectrum Analyzer Setting:**

9KHz – 30MHz (Pk & Av)

RBW: 10kHz  
VBW: 30kHz  
Sweep: Auto  
Span: Fully capture the emissions being measured  
Trace: Max. hold


30MHz – 1GHz (QP)

RBW: 120kHz  
VBW: 120kHz  
Sweep: Auto  
Span: Fully capture the emissions being measured  
Trace: Max. hold

Above 1GHz (Pk & Av)

RBW: 1MHz  
VBW: 1MHz  
Sweep: Auto  
Span: Fully capture the emissions being measured  
Trace: Max. hold

### **Test Setup:**

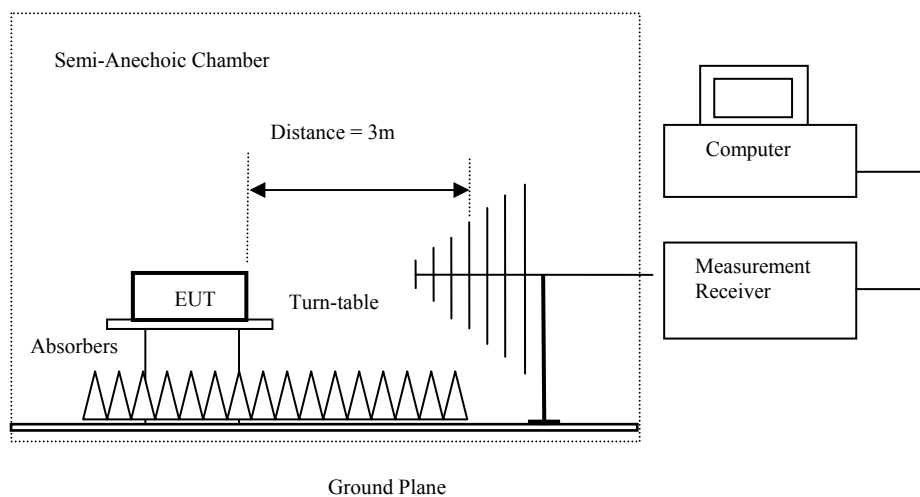

- Absorbers placed on top of the ground plane are for measurements above 1000MHz only.
- Measurements between 30MHz to 1000MHz made with Bi-log antennas, above 1000MHz horn antennas are used, 9kHz to 30MHz loop antennas are used.

### **Block for Radiated emission:**



### **STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

Date: 2016-09-12

Page 16 of 86

No.: DM124918

### Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

| Frequency Range<br>[MHz] | Quasi-Peak Limits<br>[μV/m] |
|--------------------------|-----------------------------|
| 0.009-0.490              | 2400/F (kHz)                |
| 0.490-1.705              | 24000/F (kHz)               |
| 1.705-30                 | 30                          |
| 30-88                    | 100                         |
| 88-216                   | 150                         |
| 216-960                  | 200                         |
| Above 960                | 500                         |

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

### Result of Tx mode (2402.0 MHz) (GFSK mode) (9kHz – 30MHz): Pass

| Field Strength of Spurious Emissions<br>Peak Value          |                           |                              |                             |                           |               |                     |
|-------------------------------------------------------------|---------------------------|------------------------------|-----------------------------|---------------------------|---------------|---------------------|
| Frequency<br>MHz                                            | Measured<br>Level<br>dBμV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBμV/m | Field<br>Strength<br>uV/m | Limit<br>uV/m | E-Field<br>Polarity |
| Emissions detected are more than 20 dB below the FCC Limits |                           |                              |                             |                           |               |                     |

### Result of Tx mode (2402.0 MHz) (GFSK mode) (Above 1GHz): Pass

| Field Strength of Spurious Emissions<br>Peak Value |                               |                              |                             |                        |                  |                     |
|----------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency<br>MHz                                   | Measured<br>Level @3m<br>dBμV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBμV/m | Limit<br>@3m<br>dBμV/m | Margin<br>dBμV/m | E-Field<br>Polarity |
| 4804.0                                             | 12.3                          | 41.5                         | 53.8                        | 74.0                   | 20.2             | Vertical            |
| 4804.0                                             | 13.7                          | 42.4                         | 56.1                        | 74.0                   | 17.9             | Horizontal          |
| 7206.0                                             | 10.1                          | 45.1                         | 55.2                        | 74.0                   | 18.8             | Vertical            |
| 7206.0                                             | 9.3                           | 46.2                         | 55.5                        | 74.0                   | 18.5             | Horizontal          |
| 9608.0                                             | 7.6                           | 48.0                         | 55.6                        | 74.0                   | 18.4             | Vertical            |
| 9608.0                                             | 6.6                           | 48.8                         | 55.4                        | 74.0                   | 18.6             | Horizontal          |
| 12010.0                                            | 4.5                           | 51.5                         | 56.0                        | 74.0                   | 18.0             | Vertical            |
| 12010.0                                            | 3.7                           | 52.4                         | 56.1                        | 74.0                   | 17.9             | Horizontal          |

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

**Date: 2016-09-12**

**Page 17 of 86**

**No.: DM124918**

**Result of Tx mode (2402.0 MHz) (GFSK mode) (Above 1GHz): Pass**

| Field Strength of Spurious Emissions |                               |                              |                             |                        |                  |                     |
|--------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Average Value                        |                               |                              |                             |                        |                  |                     |
| Frequency<br>MHz                     | Measured<br>Level @3m<br>dBuV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBuV/m | Limit<br>@3m<br>dBuV/m | Margin<br>dBuV/m | E-Field<br>Polarity |
| 4804.0                               | 0.8                           | 41.5                         | 42.3                        | 54.0                   | 11.7             | Vertical            |
| 4804.0                               | -1.4                          | 42.4                         | 41.0                        | 54.0                   | 13.0             | Horizontal          |
| 7206.0                               | -4.6                          | 45.1                         | 40.5                        | 54.0                   | 13.5             | Vertical            |
| 7206.0                               | -6.0                          | 46.2                         | 40.2                        | 54.0                   | 13.8             | Horizontal          |
| 9608.0                               | -7.5                          | 48.0                         | 40.5                        | 54.0                   | 13.5             | Vertical            |
| 9608.0                               | -7.5                          | 48.8                         | 41.3                        | 54.0                   | 12.7             | Horizontal          |
| 12010.0                              | -10.8                         | 51.5                         | 40.7                        | 54.0                   | 13.3             | Vertical            |
| 12010.0                              | -10.1                         | 52.4                         | 42.3                        | 54.0                   | 11.7             | Horizontal          |

**Result of Tx mode (2441.0 MHz) (GFSK mode) (9kHz – 30MHz): Pass**

| Field Strength of Spurious Emissions                        |                           |                              |                             |                           |               |                     |
|-------------------------------------------------------------|---------------------------|------------------------------|-----------------------------|---------------------------|---------------|---------------------|
| Peak Value                                                  |                           |                              |                             |                           |               |                     |
| Frequency<br>MHz                                            | Measured<br>Level<br>dBuV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBuV/m | Field<br>Strength<br>uV/m | Limit<br>uV/m | E-Field<br>Polarity |
| Emissions detected are more than 20 dB below the FCC Limits |                           |                              |                             |                           |               |                     |

**Result of Tx mode (2441.0 MHz) (GFSK mode) (Above 1GHz): Pass**

| Field Strength of Spurious Emissions |                               |                              |                             |                        |                  |                     |
|--------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Peak Value                           |                               |                              |                             |                        |                  |                     |
| Frequency<br>MHz                     | Measured<br>Level @3m<br>dBuV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBuV/m | Limit<br>@3m<br>dBuV/m | Margin<br>dBuV/m | E-Field<br>Polarity |
| 4882.0                               | 15.9                          | 41.6                         | 57.5                        | 74.0                   | 16.5             | Vertical            |
| 4882.0                               | 11.6                          | 42.5                         | 54.1                        | 74.0                   | 19.9             | Horizontal          |
| 7323.0                               | 10.6                          | 45.2                         | 55.8                        | 74.0                   | 18.2             | Vertical            |
| 7323.0                               | 8.7                           | 46.3                         | 55.0                        | 74.0                   | 19.0             | Horizontal          |
| 9764.0                               | 7.5                           | 48.1                         | 55.6                        | 74.0                   | 18.4             | Vertical            |
| 9764.0                               | 5.7                           | 48.9                         | 54.6                        | 74.0                   | 19.4             | Horizontal          |
| 12205.0                              | 3.7                           | 51.6                         | 55.3                        | 74.0                   | 18.7             | Vertical            |
| 12205.0                              | 3.2                           | 52.5                         | 55.7                        | 74.0                   | 18.3             | Horizontal          |

**STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

**Date: 2016-09-12**

**Page 18 of 86**

**No.: DM124918**

**Result of Tx mode (2441.0 MHz) (GFSK mode) (Above 1GHz): Pass**

| Field Strength of Spurious Emissions<br>Average Value |                               |                              |                             |                        |                  |                     |
|-------------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency<br>MHz                                      | Measured<br>Level @3m<br>dBuV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBuV/m | Limit<br>@3m<br>dBuV/m | Margin<br>dBuV/m | E-Field<br>Polarity |
| 4882.0                                                | -1.4                          | 41.6                         | 40.2                        | 54.0                   | 13.8             | Vertical            |
| 4882.0                                                | -1.2                          | 42.5                         | 41.3                        | 54.0                   | 12.7             | Horizontal          |
| 7323.0                                                | -4.7                          | 45.2                         | 40.5                        | 54.0                   | 13.5             | Vertical            |
| 7323.0                                                | -5.8                          | 46.3                         | 40.5                        | 54.0                   | 13.5             | Horizontal          |
| 9764.0                                                | -7.2                          | 48.1                         | 40.9                        | 54.0                   | 13.1             | Vertical            |
| 9764.0                                                | -8.1                          | 48.9                         | 40.8                        | 54.0                   | 13.2             | Horizontal          |
| 12205.0                                               | -11.1                         | 51.6                         | 40.5                        | 54.0                   | 13.5             | Vertical            |
| 12205.0                                               | -10.7                         | 52.5                         | 41.8                        | 54.0                   | 12.2             | Horizontal          |

**Result of Tx mode (2480.0 MHz) (GFSK mode) (9kHz – 30MHz): Pass**

| Field Strength of Spurious Emissions<br>Peak Value          |                           |                              |                             |                           |               |                     |
|-------------------------------------------------------------|---------------------------|------------------------------|-----------------------------|---------------------------|---------------|---------------------|
| Frequency<br>MHz                                            | Measured<br>Level<br>dBuV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBuV/m | Field<br>Strength<br>uV/m | Limit<br>uV/m | E-Field<br>Polarity |
| Emissions detected are more than 20 dB below the FCC Limits |                           |                              |                             |                           |               |                     |

**Result of Tx mode (2480.0 MHz) (GFSK mode) (Above 1GHz): Pass**

| Field Strength of Spurious Emissions<br>Peak Value |                               |                              |                             |                        |                  |                     |
|----------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency<br>MHz                                   | Measured<br>Level @3m<br>dBuV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBuV/m | Limit<br>@3m<br>dBuV/m | Margin<br>dBuV/m | E-Field<br>Polarity |
| 4960.0                                             | 15.2                          | 41.4                         | 56.6                        | 74.0                   | 17.4             | Vertical            |
| 4960.0                                             | 13.6                          | 42.7                         | 56.3                        | 74.0                   | 17.7             | Horizontal          |
| 7440.0                                             | 9.4                           | 45.6                         | 55.0                        | 74.0                   | 19.0             | Vertical            |
| 7440.0                                             | 8.3                           | 46.5                         | 54.8                        | 74.0                   | 19.2             | Horizontal          |
| 9920.0                                             | 6.2                           | 48.6                         | 54.8                        | 74.0                   | 19.2             | Vertical            |
| 9920.0                                             | 5.8                           | 49.7                         | 55.5                        | 74.0                   | 18.5             | Horizontal          |
| 12400.0                                            | 3.9                           | 51.7                         | 55.6                        | 74.0                   | 18.4             | Vertical            |
| 12400.0                                            | 2.6                           | 52.7                         | 55.3                        | 74.0                   | 18.7             | Horizontal          |

**STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

Date: 2016-09-12

Page 19 of 86

No.: DM124918

Result of Tx mode (2480.0 MHz) (GFSK mode) (Above 1GHz): Pass

| Field Strength of Spurious Emissions<br>Average Value |                               |                              |                             |                        |                  |                     |
|-------------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency<br>MHz                                      | Measured<br>Level @3m<br>dBuV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBuV/m | Limit<br>@3m<br>dBuV/m | Margin<br>dBuV/m | E-Field<br>Polarity |
| 4960.0                                                | -0.2                          | 41.4                         | 41.2                        | 54.0                   | 12.8             | Vertical            |
| 4960.0                                                | -1.4                          | 42.7                         | 41.3                        | 54.0                   | 12.7             | Horizontal          |
| 7440.0                                                | -5.0                          | 45.6                         | 40.6                        | 54.0                   | 13.4             | Vertical            |
| 7440.0                                                | -4.8                          | 46.5                         | 41.7                        | 54.0                   | 12.3             | Horizontal          |
| 9920.0                                                | -9.0                          | 48.6                         | 39.6                        | 54.0                   | 14.4             | Vertical            |
| 9920.0                                                | -9.2                          | 49.7                         | 40.5                        | 54.0                   | 13.5             | Horizontal          |
| 12400.0                                               | -10.0                         | 51.7                         | 41.7                        | 54.0                   | 12.3             | Vertical            |
| 12400.0                                               | -11.4                         | 52.7                         | 41.3                        | 54.0                   | 12.7             | Horizontal          |

Result of Tx mode (2402.0 MHz) ( $\pi/4$ -DQPSK mode) (9kHz – 30MHz): Pass

| Field Strength of Spurious Emissions<br>Peak Value          |                           |                              |                             |                           |               |                     |
|-------------------------------------------------------------|---------------------------|------------------------------|-----------------------------|---------------------------|---------------|---------------------|
| Frequency<br>MHz                                            | Measured<br>Level<br>dBuV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBuV/m | Field<br>Strength<br>uV/m | Limit<br>uV/m | E-Field<br>Polarity |
| Emissions detected are more than 20 dB below the FCC Limits |                           |                              |                             |                           |               |                     |

Result of Tx mode (2402.0 MHz) ( $\pi/4$ -DQPSK mode) (Above 1GHz): Pass

| Field Strength of Spurious Emissions<br>Peak Value |                                     |                              |                                   |                              |                        |                     |
|----------------------------------------------------|-------------------------------------|------------------------------|-----------------------------------|------------------------------|------------------------|---------------------|
| Frequency<br>MHz                                   | Measured<br>Level @3m<br>dB $\mu$ V | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dB $\mu$ V/m | Limit<br>@3m<br>dB $\mu$ V/m | Margin<br>dB $\mu$ V/m | E-Field<br>Polarity |
| 4804.0                                             | 13.2                                | 41.5                         | 54.7                              | 74.0                         | 19.3                   | Vertical            |
| 4804.0                                             | 12.9                                | 42.4                         | 55.3                              | 74.0                         | 18.7                   | Horizontal          |
| 7206.0                                             | 9.8                                 | 45.1                         | 54.9                              | 74.0                         | 19.1                   | Vertical            |
| 7206.0                                             | 8.9                                 | 46.2                         | 55.1                              | 74.0                         | 18.9                   | Horizontal          |
| 9608.0                                             | 7.8                                 | 48.0                         | 55.8                              | 74.0                         | 18.2                   | Vertical            |
| 9608.0                                             | 5.7                                 | 48.8                         | 54.5                              | 74.0                         | 19.5                   | Horizontal          |
| 12010.0                                            | 4.0                                 | 51.5                         | 55.5                              | 74.0                         | 18.5                   | Vertical            |
| 12010.0                                            | 3.3                                 | 52.4                         | 55.7                              | 74.0                         | 18.3                   | Horizontal          |

**STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

**Date: 2016-09-12**

**Page 20 of 86**

**No.: DM124918**

**Result of Tx mode (2402.0 MHz) ( $\pi/4$ -DQPSK mode) (Above 1GHz): Pass**

| Field Strength of Spurious Emissions<br>Average Value |                               |                              |                             |                        |                  |                     |
|-------------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency<br>MHz                                      | Measured<br>Level @3m<br>dBuV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBuV/m | Limit<br>@3m<br>dBuV/m | Margin<br>dBuV/m | E-Field<br>Polarity |
| 4804.0                                                | -0.1                          | 41.5                         | 41.4                        | 54.0                   | 12.6             | Vertical            |
| 4804.0                                                | -1.9                          | 42.4                         | 40.5                        | 54.0                   | 13.5             | Horizontal          |
| 7206.0                                                | -4.8                          | 45.1                         | 40.3                        | 54.0                   | 13.7             | Vertical            |
| 7206.0                                                | -5.5                          | 46.2                         | 40.7                        | 54.0                   | 13.3             | Horizontal          |
| 9608.0                                                | -7.3                          | 48.0                         | 40.7                        | 54.0                   | 13.3             | Vertical            |
| 9608.0                                                | -7.4                          | 48.8                         | 41.4                        | 54.0                   | 12.6             | Horizontal          |
| 12010.0                                               | -10.1                         | 51.5                         | 41.4                        | 54.0                   | 12.6             | Vertical            |
| 12010.0                                               | -10.8                         | 52.4                         | 41.6                        | 54.0                   | 12.4             | Horizontal          |

**Result of Tx mode (2441.0 MHz) ( $\pi/4$ -DQPSK mode) (9kHz – 30MHz): Pass**

| Field Strength of Spurious Emissions<br>Peak Value          |                           |                              |                             |                           |               |                     |
|-------------------------------------------------------------|---------------------------|------------------------------|-----------------------------|---------------------------|---------------|---------------------|
| Frequency<br>MHz                                            | Measured<br>Level<br>dBuV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBuV/m | Field<br>Strength<br>uV/m | Limit<br>uV/m | E-Field<br>Polarity |
| Emissions detected are more than 20 dB below the FCC Limits |                           |                              |                             |                           |               |                     |

**Result of Tx mode (2441.0 MHz) ( $\pi/4$ -DQPSK mode) (Above 1GHz): Pass**

| Field Strength of Spurious Emissions<br>Peak Value |                               |                              |                             |                        |                  |                     |
|----------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency<br>MHz                                   | Measured<br>Level @3m<br>dBuV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBuV/m | Limit<br>@3m<br>dBuV/m | Margin<br>dBuV/m | E-Field<br>Polarity |
| 4882.0                                             | 15.3                          | 41.6                         | 56.9                        | 74.0                   | 17.1             | Vertical            |
| 4882.0                                             | 13.3                          | 42.5                         | 55.8                        | 74.0                   | 18.2             | Horizontal          |
| 7323.0                                             | 10.4                          | 45.2                         | 55.6                        | 74.0                   | 18.4             | Vertical            |
| 7323.0                                             | 8.4                           | 46.3                         | 54.7                        | 74.0                   | 19.3             | Horizontal          |
| 9764.0                                             | 6.9                           | 48.1                         | 55.0                        | 74.0                   | 19.0             | Vertical            |
| 9764.0                                             | 6.3                           | 48.9                         | 55.2                        | 74.0                   | 18.8             | Horizontal          |
| 12205.0                                            | 4.7                           | 51.6                         | 56.3                        | 74.0                   | 17.7             | Vertical            |
| 12205.0                                            | 1.9                           | 52.5                         | 54.4                        | 74.0                   | 19.6             | Horizontal          |

**STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

Date: 2016-09-12

Page 21 of 86

No.: DM124918

**Result of Tx mode (2441.0 MHz) ( $\pi/4$ -DQPSK mode) (Above 1GHz): Pass**

| Field Strength of Spurious Emissions<br>Average Value |                               |                              |                             |                        |                  |                     |
|-------------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency<br>MHz                                      | Measured<br>Level @3m<br>dBuV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBuV/m | Limit<br>@3m<br>dBuV/m | Margin<br>dBuV/m | E-Field<br>Polarity |
| 4882.0                                                | -0.1                          | 41.6                         | 41.5                        | 54.0                   | 12.5             | Vertical            |
| 4882.0                                                | -1.5                          | 42.5                         | 41.0                        | 54.0                   | 13.0             | Horizontal          |
| 7323.0                                                | -4.6                          | 45.2                         | 40.6                        | 54.0                   | 13.4             | Vertical            |
| 7323.0                                                | -5.6                          | 46.3                         | 40.7                        | 54.0                   | 13.3             | Horizontal          |
| 9764.0                                                | -6.6                          | 48.1                         | 41.5                        | 54.0                   | 12.5             | Vertical            |
| 9764.0                                                | -8.3                          | 48.9                         | 40.6                        | 54.0                   | 13.4             | Horizontal          |
| 12205.0                                               | -10.4                         | 51.6                         | 41.2                        | 54.0                   | 12.8             | Vertical            |
| 12205.0                                               | -10.9                         | 52.5                         | 41.6                        | 54.0                   | 12.4             | Horizontal          |

**Result of Tx mode (2480.0 MHz) ( $\pi/4$ -DQPSK mode) (9kHz – 30MHz): Pass**

| Field Strength of Spurious Emissions<br>Peak Value          |                           |                              |                             |                           |               |                     |
|-------------------------------------------------------------|---------------------------|------------------------------|-----------------------------|---------------------------|---------------|---------------------|
| Frequency<br>MHz                                            | Measured<br>Level<br>dBuV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBuV/m | Field<br>Strength<br>uV/m | Limit<br>uV/m | E-Field<br>Polarity |
| Emissions detected are more than 20 dB below the FCC Limits |                           |                              |                             |                           |               |                     |

**Result of Tx mode (2480.0 MHz) ( $\pi/4$ -DQPSK mode) (Above 1GHz): Pass**

| Field Strength of Spurious Emissions<br>Peak Value |                               |                              |                             |                        |                  |                     |
|----------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency<br>MHz                                   | Measured<br>Level @3m<br>dBuV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBuV/m | Limit<br>@3m<br>dBuV/m | Margin<br>dBuV/m | E-Field<br>Polarity |
| 4960.0                                             | 16.2                          | 41.4                         | 57.6                        | 74.0                   | 16.4             | Vertical            |
| 4960.0                                             | 13.3                          | 42.7                         | 56.0                        | 74.0                   | 18.0             | Horizontal          |
| 7440.0                                             | 8.9                           | 45.6                         | 54.5                        | 74.0                   | 19.5             | Vertical            |
| 7440.0                                             | 8.5                           | 46.5                         | 55.0                        | 74.0                   | 19.0             | Horizontal          |
| 9920.0                                             | 6.8                           | 48.6                         | 55.4                        | 74.0                   | 18.6             | Vertical            |
| 9920.0                                             | 5.6                           | 49.7                         | 55.3                        | 74.0                   | 18.7             | Horizontal          |
| 12400.0                                            | 4.8                           | 51.7                         | 56.5                        | 74.0                   | 17.5             | Vertical            |
| 12400.0                                            | 3                             | 52.7                         | 55.7                        | 74.0                   | 18.3             | Horizontal          |

**STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

**Date: 2016-09-12**

**Page 22 of 86**

**No.: DM124918**

**Result of Tx mode (2480.0 MHz) ( $\pi/4$ -DQPSK mode) (Above 1GHz): Pass**

| Field Strength of Spurious Emissions<br>Average Value |                               |                              |                             |                        |                  |                     |
|-------------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency<br>MHz                                      | Measured<br>Level @3m<br>dBuV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBuV/m | Limit<br>@3m<br>dBuV/m | Margin<br>dBuV/m | E-Field<br>Polarity |
| 4960.0                                                | 0.3                           | 41.4                         | 41.7                        | 54.0                   | 12.3             | Vertical            |
| 4960.0                                                | -1.4                          | 42.7                         | 41.3                        | 54.0                   | 12.7             | Horizontal          |
| 7440.0                                                | -4.3                          | 45.6                         | 41.3                        | 54.0                   | 12.7             | Vertical            |
| 7440.0                                                | -5.3                          | 46.5                         | 41.2                        | 54.0                   | 12.8             | Horizontal          |
| 9920.0                                                | -7.2                          | 48.6                         | 41.4                        | 54.0                   | 12.6             | Vertical            |
| 9920.0                                                | -8.2                          | 49.7                         | 41.5                        | 54.0                   | 12.5             | Horizontal          |
| 12400.0                                               | -9.6                          | 51.7                         | 42.1                        | 54.0                   | 11.9             | Vertical            |
| 12400.0                                               | -12.4                         | 52.7                         | 40.3                        | 54.0                   | 13.7             | Horizontal          |

**Result of Tx mode (2402.0 MHz) (8DPSK mode) (9kHz – 30MHz): Pass**

| Field Strength of Spurious Emissions<br>Peak Value          |                           |                              |                             |                           |               |                     |
|-------------------------------------------------------------|---------------------------|------------------------------|-----------------------------|---------------------------|---------------|---------------------|
| Frequency<br>MHz                                            | Measured<br>Level<br>dBuV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBuV/m | Field<br>Strength<br>uV/m | Limit<br>uV/m | E-Field<br>Polarity |
| Emissions detected are more than 20 dB below the FCC Limits |                           |                              |                             |                           |               |                     |

**Result of Tx mode (2402.0 MHz) (8DPSK mode) (Above 1GHz): Pass**

| Field Strength of Spurious Emissions<br>Peak Value |                                     |                              |                                   |                              |                        |                     |
|----------------------------------------------------|-------------------------------------|------------------------------|-----------------------------------|------------------------------|------------------------|---------------------|
| Frequency<br>MHz                                   | Measured<br>Level @3m<br>dB $\mu$ V | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dB $\mu$ V/m | Limit<br>@3m<br>dB $\mu$ V/m | Margin<br>dB $\mu$ V/m | E-Field<br>Polarity |
| 4804.0                                             | 15.3                                | 41.5                         | 56.8                              | 74.0                         | 17.2                   | Vertical            |
| 4804.0                                             | 13.1                                | 42.4                         | 55.5                              | 74.0                         | 18.5                   | Horizontal          |
| 7206.0                                             | 9.1                                 | 45.1                         | 54.2                              | 74.0                         | 19.8                   | Vertical            |
| 7206.0                                             | 9.2                                 | 46.2                         | 55.4                              | 74.0                         | 18.6                   | Horizontal          |
| 9608.0                                             | 7.8                                 | 48.0                         | 55.8                              | 74.0                         | 18.2                   | Vertical            |
| 9608.0                                             | 6.2                                 | 48.8                         | 55.0                              | 74.0                         | 19.0                   | Horizontal          |
| 12010.0                                            | 4.7                                 | 51.8                         | 56.5                              | 74.0                         | 17.5                   | Vertical            |
| 12010.0                                            | 3.1                                 | 52.4                         | 55.5                              | 74.0                         | 18.5                   | Horizontal          |

**STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

**Date: 2016-09-12**

**Page 23 of 86**

**No.: DM124918**

**Result of Tx mode (2402.0 MHz) (8DPSK mode) (Above 1GHz): Pass**

| Field Strength of Spurious Emissions<br>Average Value |                               |                              |                             |                        |                  |                     |
|-------------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency<br>MHz                                      | Measured<br>Level @3m<br>dBuV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBuV/m | Limit<br>@3m<br>dBuV/m | Margin<br>dBuV/m | E-Field<br>Polarity |
| 4804.0                                                | -0.5                          | 41.5                         | 41.0                        | 54.0                   | 13.0             | Vertical            |
| 4804.0                                                | -0.6                          | 42.4                         | 41.8                        | 54.0                   | 12.2             | Horizontal          |
| 7206.0                                                | -5.1                          | 45.1                         | 40.0                        | 54.0                   | 14.0             | Vertical            |
| 7206.0                                                | -4.9                          | 46.2                         | 41.3                        | 54.0                   | 12.7             | Horizontal          |
| 9608.0                                                | -6.6                          | 48.0                         | 41.4                        | 54.0                   | 12.6             | Vertical            |
| 9608.0                                                | -7.5                          | 48.8                         | 41.3                        | 54.0                   | 12.7             | Horizontal          |
| 12010.0                                               | -10.4                         | 51.8                         | 41.4                        | 54.0                   | 12.6             | Vertical            |
| 12010.0                                               | -11.0                         | 52.4                         | 41.4                        | 54.0                   | 12.6             | Horizontal          |

**Result of Tx mode (2441.0 MHz) (8DPSK mode) (9kHz – 30MHz): Pass**

| Field Strength of Spurious Emissions<br>Peak Value          |                           |                              |                             |                           |               |                     |
|-------------------------------------------------------------|---------------------------|------------------------------|-----------------------------|---------------------------|---------------|---------------------|
| Frequency<br>MHz                                            | Measured<br>Level<br>dBuV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBuV/m | Field<br>Strength<br>uV/m | Limit<br>uV/m | E-Field<br>Polarity |
| Emissions detected are more than 20 dB below the FCC Limits |                           |                              |                             |                           |               |                     |

**Result of Tx mode (2441.0 MHz) (8DPSK mode) (Above 1GHz): Pass**

| Field Strength of Spurious Emissions<br>Peak Value |                               |                              |                             |                        |                  |                     |
|----------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency<br>MHz                                   | Measured<br>Level @3m<br>dBuV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBuV/m | Limit<br>@3m<br>dBuV/m | Margin<br>dBuV/m | E-Field<br>Polarity |
| 4882.0                                             | 15.1                          | 41.6                         | 56.7                        | 74.0                   | 17.3             | Vertical            |
| 4882.0                                             | 13.3                          | 42.5                         | 55.8                        | 74.0                   | 18.2             | Horizontal          |
| 7323.0                                             | 10.1                          | 45.2                         | 55.3                        | 74.0                   | 18.7             | Vertical            |
| 7323.0                                             | 8.4                           | 46.3                         | 54.7                        | 74.0                   | 19.3             | Horizontal          |
| 9764.0                                             | 7                             | 48.1                         | 55.1                        | 74.0                   | 18.9             | Vertical            |
| 9764.0                                             | 5.8                           | 48.9                         | 54.7                        | 74.0                   | 19.3             | Horizontal          |
| 12205.0                                            | 4.0                           | 51.5                         | 55.5                        | 74.0                   | 18.5             | Vertical            |
| 12205.0                                            | 3.2                           | 52.5                         | 55.7                        | 74.0                   | 18.3             | Horizontal          |

**STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

**Date: 2016-09-12**

**Page 24 of 86**

**No.: DM124918**

**Result of Tx mode (2441.0 MHz) (8DPSK mode) (Above 1GHz): Pass**

| Field Strength of Spurious Emissions<br>Average Value |                               |                              |                             |                        |                  |                     |
|-------------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency<br>MHz                                      | Measured<br>Level @3m<br>dBuV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBuV/m | Limit<br>@3m<br>dBuV/m | Margin<br>dBuV/m | E-Field<br>Polarity |
| 4882.0                                                | -0.7                          | 41.6                         | 40.9                        | 54.0                   | 13.1             | Vertical            |
| 4882.0                                                | -2.0                          | 42.5                         | 40.5                        | 54.0                   | 13.5             | Horizontal          |
| 7323.0                                                | -4.6                          | 45.2                         | 40.6                        | 54.0                   | 13.4             | Vertical            |
| 7323.0                                                | -5.9                          | 46.3                         | 40.4                        | 54.0                   | 13.6             | Horizontal          |
| 9764.0                                                | -7.8                          | 48.1                         | 40.3                        | 54.0                   | 13.7             | Vertical            |
| 9764.0                                                | -8.4                          | 48.9                         | 40.5                        | 54.0                   | 13.5             | Horizontal          |
| 12205.0                                               | -11.0                         | 51.6                         | 40.6                        | 54.0                   | 13.4             | Vertical            |
| 12205.0                                               | -10.0                         | 52.5                         | 42.5                        | 54.0                   | 11.5             | Horizontal          |

**Result of Tx mode (2480.0 MHz) (8DPSK mode) (9kHz – 30MHz): Pass**

| Field Strength of Spurious Emissions<br>Peak Value          |                           |                              |                             |                           |               |                     |
|-------------------------------------------------------------|---------------------------|------------------------------|-----------------------------|---------------------------|---------------|---------------------|
| Frequency<br>MHz                                            | Measured<br>Level<br>dBuV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBuV/m | Field<br>Strength<br>uV/m | Limit<br>uV/m | E-Field<br>Polarity |
| Emissions detected are more than 20 dB below the FCC Limits |                           |                              |                             |                           |               |                     |

**Result of Tx mode (2480.0 MHz) (8DPSK mode) (Above 1GHz): Pass**

| Field Strength of Spurious Emissions<br>Peak Value |                               |                              |                             |                        |                  |                     |
|----------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency<br>MHz                                   | Measured<br>Level @3m<br>dBuV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBuV/m | Limit<br>@3m<br>dBuV/m | Margin<br>dBuV/m | E-Field<br>Polarity |
| 4960.0                                             | 14.9                          | 41.4                         | 56.3                        | 74.0                   | 17.7             | Vertical            |
| 4960.0                                             | 12.8                          | 42.7                         | 55.5                        | 74.0                   | 18.5             | Horizontal          |
| 7440.0                                             | 8.8                           | 45.6                         | 54.4                        | 74.0                   | 19.6             | Vertical            |
| 7440.0                                             | 8.1                           | 46.5                         | 54.6                        | 74.0                   | 19.4             | Horizontal          |
| 9920.0                                             | 6.9                           | 48.6                         | 55.5                        | 74.0                   | 18.5             | Vertical            |
| 9920.0                                             | 5.0                           | 49.7                         | 54.7                        | 74.0                   | 19.3             | Horizontal          |
| 12400.0                                            | 4.9                           | 51.7                         | 56.6                        | 74.0                   | 17.4             | Vertical            |
| 12400.0                                            | 3.3                           | 52.7                         | 56.0                        | 74.0                   | 18.0             | Horizontal          |

**STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## **STC Test Report**

**Date: 2016-09-12**

**Page 25 of 86**

**No.: DM124918**

**Result of Tx mode (2480.0 MHz) (8DPSK mode) (Above 1GHz): Pass**

| <b>Field Strength of Spurious Emissions<br/>Average Value</b> |                               |                              |                             |                        |                  |                     |
|---------------------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency<br>MHz                                              | Measured<br>Level @3m<br>dBuV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBuV/m | Limit<br>@3m<br>dBuV/m | Margin<br>dBuV/m | E-Field<br>Polarity |
| 4960.0                                                        | 0.1                           | 41.4                         | 41.5                        | 54.0                   | 12.5             | Vertical            |
| 4960.0                                                        | -2.4                          | 42.7                         | 40.3                        | 54.0                   | 13.7             | Horizontal          |
| 7440.0                                                        | -3.9                          | 45.6                         | 41.7                        | 54.0                   | 12.3             | Vertical            |
| 7440.0                                                        | -7.1                          | 46.5                         | 39.4                        | 54.0                   | 14.6             | Horizontal          |
| 9920.0                                                        | -7.6                          | 48.6                         | 41.0                        | 54.0                   | 13.0             | Vertical            |
| 9920.0                                                        | -9.4                          | 49.7                         | 40.3                        | 54.0                   | 13.7             | Horizontal          |
| 12400.0                                                       | -9.3                          | 51.7                         | 42.4                        | 54.0                   | 11.6             | Vertical            |
| 12400.0                                                       | -11.2                         | 52.7                         | 41.5                        | 54.0                   | 12.5             | Horizontal          |

Note: Above 13GHz Emissions detected are more than 20 dB below the FCC Limits .

**Remarks:**

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz

\* Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 9kHz-30MHz 3.3dB  
30MHz -1GHz 4.6dB  
1GHz -26GHz 4.4dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.

**STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

**Date: 2016-09-12**

**Page 26 of 86**

**No.: DM124918**

### **Radiated Emissions Measurement:**

#### **Limit :**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).

#### **Result: Radiated Emissions (GFSK Lowest)**

| Field Strength of Band-edge Compliance<br>Peak Value |                               |                              |                             |                        |                  |                     |
|------------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency<br>MHz                                     | Measured<br>Level @3m<br>dBμV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBμV/m | Limit<br>@3m<br>dBμV/m | Margin<br>dBμV/m | E-Field<br>Polarity |
| 2390.0                                               | 13.3                          | 36.8                         | 50.1                        | 74.0                   | 23.9             | Vertical            |

| Field Strength of Band-edge Compliance<br>Average Value |                               |                              |                             |                        |                  |                     |
|---------------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency<br>MHz                                        | Measured<br>Level @3m<br>dBμV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBμV/m | Limit<br>@3m<br>dBμV/m | Margin<br>dBμV/m | E-Field<br>Polarity |
| 2390.0                                                  | 5.4                           | 36.8                         | 42.2                        | 54.0                   | 11.8             | Vertical            |

#### **Result: Radiated Emissions (GFSK Highest)**

| Field Strength of Band-edge Compliance<br>Peak Value |                               |                              |                             |                        |                  |                     |
|------------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency<br>MHz                                     | Measured<br>Level @3m<br>dBμV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBμV/m | Limit<br>@3m<br>dBμV/m | Margin<br>dBμV/m | E-Field<br>Polarity |
| 2483.5                                               | 28.4                          | 36.4                         | 64.8                        | 74.0                   | 9.2              | Horizontal          |

| Field Strength of Band-edge Compliance<br>Average Value |                               |                              |                             |                        |                  |                     |
|---------------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency<br>MHz                                        | Measured<br>Level @3m<br>dBμV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBμV/m | Limit<br>@3m<br>dBμV/m | Margin<br>dBμV/m | E-Field<br>Polarity |
| 2483.5                                                  | 4.3                           | 36.4                         | 40.7                        | 54.0                   | 13.3             | Horizontal          |

### **STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.




## STC Test Report


Date: 2016-09-12  
No.: DM124918

Page 27 of 86

### Radiated Emissions (GFSK Lowest)

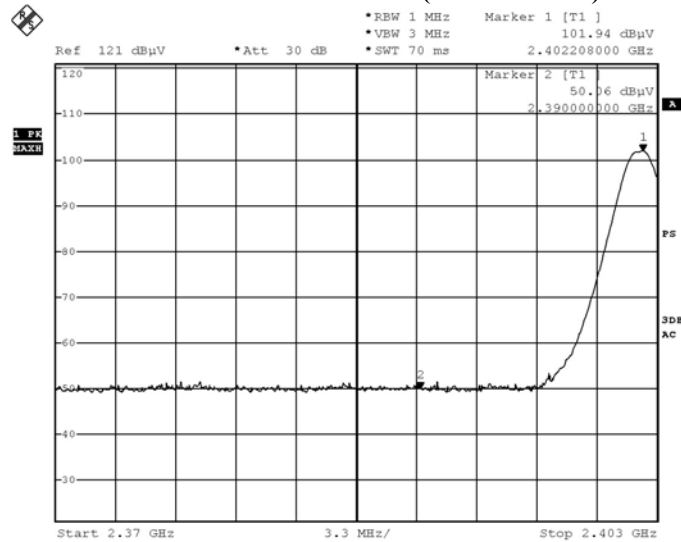

### Radiated Emissions (GFSK Highest)

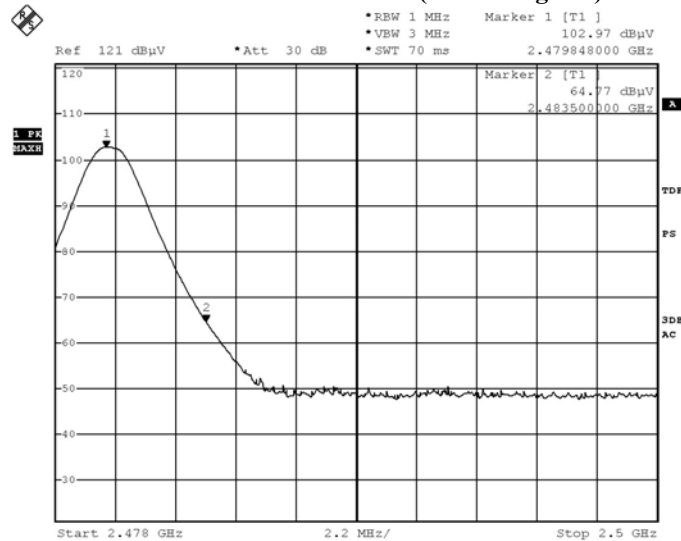

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

**Date: 2016-09-12**

**Page 28 of 86**

**No.: DM124918**

### **Radiated Emissions Measurement:**

#### **Limit :**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).

#### **Result: Radiated Emissions ( $\pi/4$ -DQPSK Lowest)**

| Field Strength of Band-edge Compliance<br>Peak Value |                                     |                              |                                   |                              |                        |                     |
|------------------------------------------------------|-------------------------------------|------------------------------|-----------------------------------|------------------------------|------------------------|---------------------|
| Frequency<br>MHz                                     | Measured<br>Level @3m<br>dB $\mu$ V | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dB $\mu$ V/m | Limit<br>@3m<br>dB $\mu$ V/m | Margin<br>dB $\mu$ V/m | E-Field<br>Polarity |
| 2390.0                                               | 12.9                                | 36.8                         | 49.7                              | 74.0                         | 24.3                   | Vertical            |

| Field Strength of Band-edge Compliance<br>Average Value |                                     |                              |                                   |                              |                        |                     |
|---------------------------------------------------------|-------------------------------------|------------------------------|-----------------------------------|------------------------------|------------------------|---------------------|
| Frequency<br>MHz                                        | Measured<br>Level @3m<br>dB $\mu$ V | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dB $\mu$ V/m | Limit<br>@3m<br>dB $\mu$ V/m | Margin<br>dB $\mu$ V/m | E-Field<br>Polarity |
| 2390.0                                                  | 4.7                                 | 36.8                         | 41.5                              | 54.0                         | 12.5                   | Vertical            |

#### **Result: Radiated Emissions ( $\pi/4$ -DQPSK Highest)**

| Field Strength of Band-edge Compliance<br>Peak Value |                                     |                              |                                   |                              |                        |                     |
|------------------------------------------------------|-------------------------------------|------------------------------|-----------------------------------|------------------------------|------------------------|---------------------|
| Frequency<br>MHz                                     | Measured<br>Level @3m<br>dB $\mu$ V | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dB $\mu$ V/m | Limit<br>@3m<br>dB $\mu$ V/m | Margin<br>dB $\mu$ V/m | E-Field<br>Polarity |
| 2483.5                                               | 27.8                                | 36.4                         | 64.2                              | 74.0                         | 9.8                    | Horizontal          |

| Field Strength of Band-edge Compliance<br>Average Value |                                     |                              |                                   |                              |                        |                     |
|---------------------------------------------------------|-------------------------------------|------------------------------|-----------------------------------|------------------------------|------------------------|---------------------|
| Frequency<br>MHz                                        | Measured<br>Level @3m<br>dB $\mu$ V | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dB $\mu$ V/m | Limit<br>@3m<br>dB $\mu$ V/m | Margin<br>dB $\mu$ V/m | E-Field<br>Polarity |
| 2483.5                                                  | 6.6                                 | 36.4                         | 43.0                              | 54.0                         | 11.0                   | Horizontal          |

### **STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.




## STC Test Report


Date: 2016-09-12  
No.: DM124918

Page 29 of 86

### Radiated Emissions ( $\pi/4$ -DQPSK Lowest)

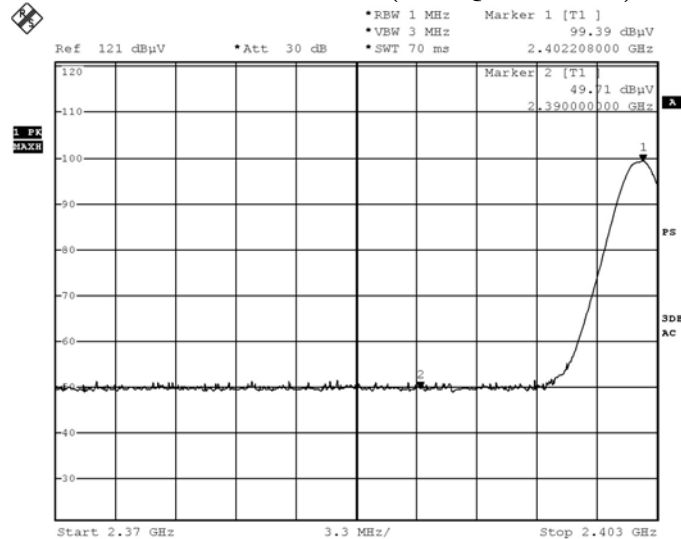

### Radiated Emissions ( $\pi/4$ -DQPSK Highest)

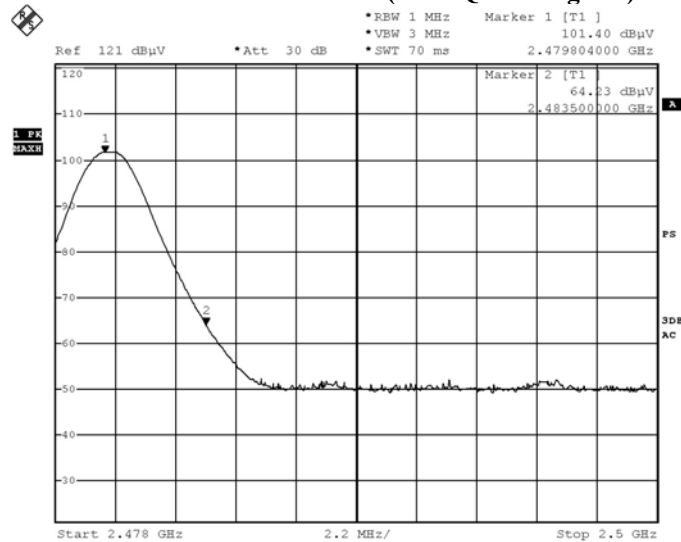

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

**Date: 2016-09-12**

**Page 30 of 86**

**No.: DM124918**

### **Radiated Emissions Measurement:**

#### **Limit :**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).

#### **Result: Radiated Emissions (8DPSK Lowest)**

| Field Strength of Band-edge Compliance<br>Peak Value |                               |                              |                             |                        |                  |                     |
|------------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency<br>MHz                                     | Measured<br>Level @3m<br>dBμV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBμV/m | Limit<br>@3m<br>dBμV/m | Margin<br>dBμV/m | E-Field<br>Polarity |
| 2400.0                                               | 13.3                          | 36.8                         | 50.1                        | 74.0                   | 23.9             | Vertical            |

| Field Strength of Band-edge Compliance<br>Average Value |                               |                              |                             |                        |                  |                     |
|---------------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency<br>MHz                                        | Measured<br>Level @3m<br>dBμV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBμV/m | Limit<br>@3m<br>dBμV/m | Margin<br>dBμV/m | E-Field<br>Polarity |
| 2400.0                                                  | 4.9                           | 36.8                         | 41.7                        | 54.0                   | 12.3             | Vertical            |

#### **Result: Radiated Emissions (8DPSK Highest)**

| Field Strength of Band-edge Compliance<br>Peak Value |                               |                              |                             |                        |                  |                     |
|------------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency<br>MHz                                     | Measured<br>Level @3m<br>dBμV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBμV/m | Limit<br>@3m<br>dBμV/m | Margin<br>dBμV/m | E-Field<br>Polarity |
| 2483.5                                               | 27.9                          | 36.4                         | 64.3                        | 74.0                   | 9.7              | Horizontal          |

| Field Strength of Band-edge Compliance<br>Average Value |                               |                              |                             |                        |                  |                     |
|---------------------------------------------------------|-------------------------------|------------------------------|-----------------------------|------------------------|------------------|---------------------|
| Frequency<br>MHz                                        | Measured<br>Level @3m<br>dBμV | Correction<br>Factor<br>dB/m | Field<br>Strength<br>dBμV/m | Limit<br>@3m<br>dBμV/m | Margin<br>dBμV/m | E-Field<br>Polarity |
| 2483.5                                                  | 6.4                           | 36.4                         | 42.8                        | 54.0                   | 11.2             | Horizontal          |

### **STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.




## STC Test Report


Date: 2016-09-12  
No.: DM124918

Page 31 of 86

### Radiated Emissions (8DPSK Lowest)

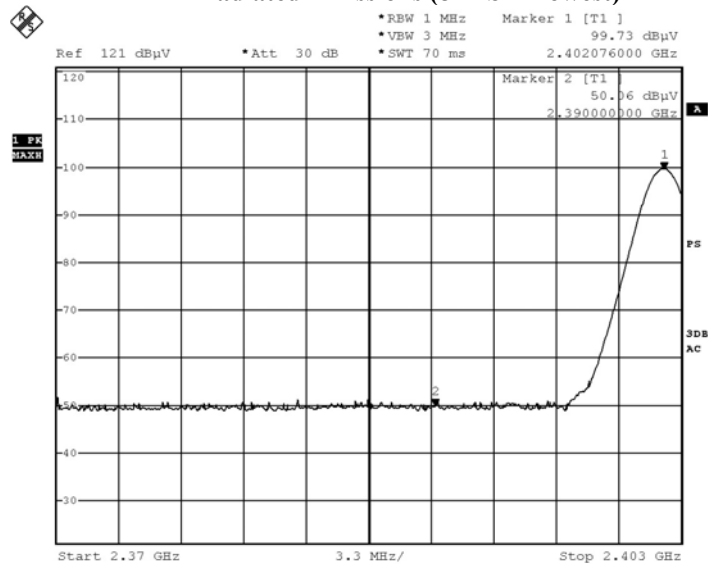

### Radiated Emissions (8DPSK Highest)

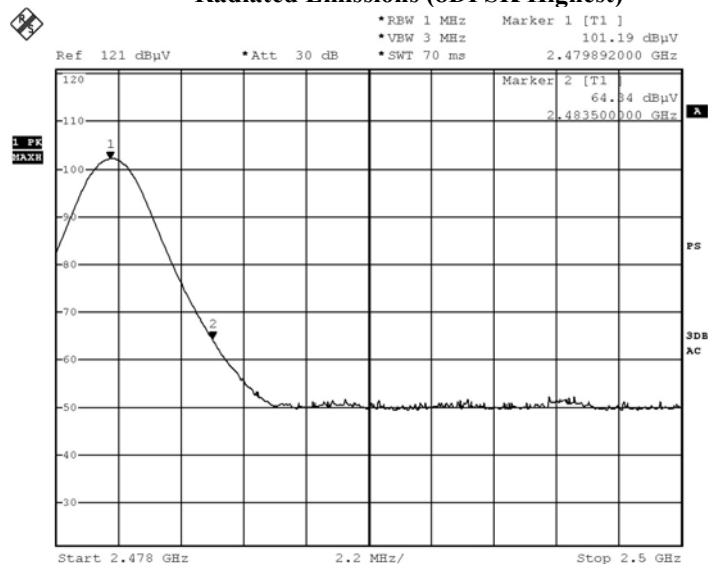

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

Date: 2016-09-12

Page 32 of 86

No.: DM124918

### Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:


| Frequency Range | Quasi-Peak Limits   |
|-----------------|---------------------|
| [MHz]           | [ $\mu\text{V/m}$ ] |
| 0.009-0.490     | 2400/F (kHz)        |
| 0.490-1.705     | 24000/F (kHz)       |
| 1.705-30        | 30                  |
| 30-88           | 100                 |
| 88-216          | 150                 |
| 216-960         | 200                 |
| Above960        | 500                 |

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

### Result of Bluetooth Communication mode (2402MHz, GFSK) (30MHz – 1GHz): Pass

Please refer to the following table for result details(The data is the worst cases)

Horizontal

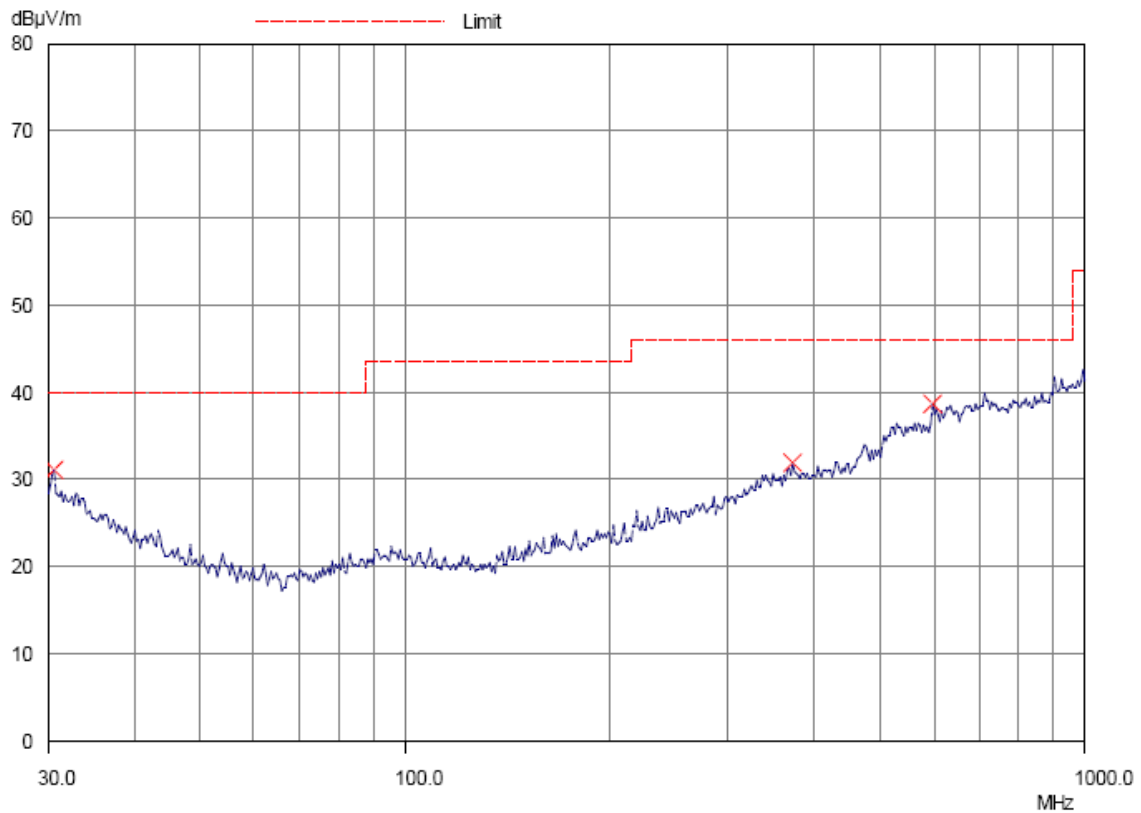

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## **STC Test Report**

**Date: 2016-09-12**

**Page 33 of 86**

**No.: DM124918**

**Result of Bluetooth Communication mode (2402MHz, GFSK) (30MHz – 1GHz): Pass**

| <b>Radiated Emissions<br/>Quasi-Peak</b> |                     |                              |                              |                           |                           |
|------------------------------------------|---------------------|------------------------------|------------------------------|---------------------------|---------------------------|
| Emission<br>Frequency<br>MHz             | E-Field<br>Polarity | Level<br>@3m<br>dB $\mu$ V/m | Limit<br>@3m<br>dB $\mu$ V/m | Level<br>@3m<br>$\mu$ V/m | Limit<br>@3m<br>$\mu$ V/m |
| 30.3                                     | Horizontal          | 31.0                         | 40.0                         | 15.1                      | 100                       |
| 369.8                                    | Horizontal          | 31.9                         | 46.0                         | 17.7                      | 200                       |
| 596.5                                    | Horizontal          | 38.6                         | 46.0                         | 15.1                      | 200                       |

**STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

Date: 2016-09-12

Page 34 of 86

No.: DM124918

### Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:


| Frequency Range | Quasi-Peak Limits |
|-----------------|-------------------|
| [MHz]           | [ $\mu$ V/m]      |
| 0.009-0.490     | 2400/F (kHz)      |
| 0.490-1.705     | 24000/F (kHz)     |
| 1.705-30        | 30                |
| 30-88           | 100               |
| 88-216          | 150               |
| 216-960         | 200               |
| Above960        | 500               |

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

### Result of Bluetooth Communication mode (2402MHz, GFSK) (30MHz – 1GHz): Pass

Please refer to the following table for result details(The data is the worst cases)

Vertical

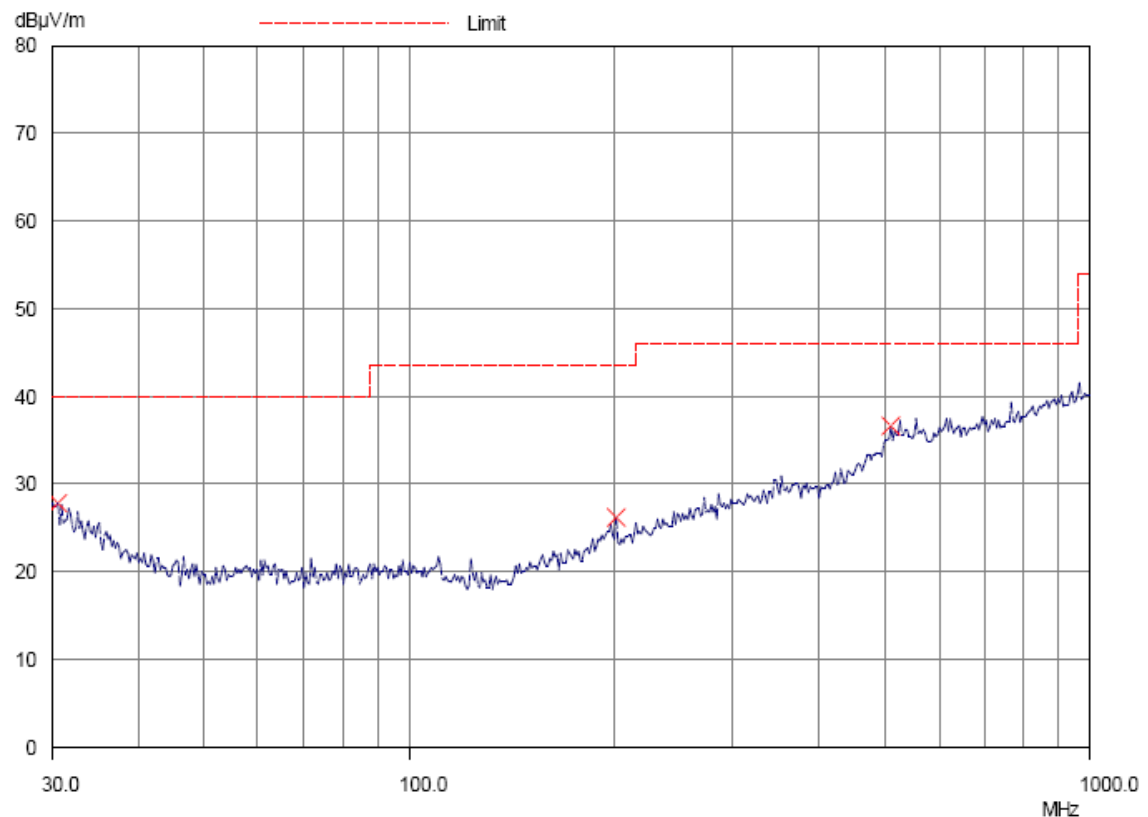

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## **STC Test Report**

**Date: 2016-09-12**

**Page 35 of 86**

**No.: DM124918**

**Result of Bluetooth Communication mode (2402MHz, GFSK) (30MHz – 1GHz): Pass**

| <b>Radiated Emissions<br/>Quasi-Peak</b> |                     |                              |                              |                           |                           |
|------------------------------------------|---------------------|------------------------------|------------------------------|---------------------------|---------------------------|
| Emission<br>Frequency<br>MHz             | E-Field<br>Polarity | Level<br>@3m<br>dB $\mu$ V/m | Limit<br>@3m<br>dB $\mu$ V/m | Level<br>@3m<br>$\mu$ V/m | Limit<br>@3m<br>$\mu$ V/m |
| 30.4                                     | Vertical            | 27.9                         | 40.0                         | 24.8                      | 100                       |
| 199.8                                    | Vertical            | 26.1                         | 43.5                         | 20.2                      | 150                       |
| 506.5                                    | Vertical            | 36.6                         | 46.0                         | 67.6                      | 200                       |

Remarks:

Calculated measurement uncertainty (30MHz – 1GHz): 4.9dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.

**STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## **STC Test Report**

**Date: 2016-09-12**  
**No.: DM124918**

**Page 36 of 86**


### **3.1.3 AC Mains Conducted Emissions (0.15MHz to 30MHz)**

|                    |                   |
|--------------------|-------------------|
| Test Requirement:  | FCC 47CFR 15.207  |
| Test Method:       | ANSI C63.10: 2013 |
| Test Date:         | 2016-09-01        |
| Mode of Operation: | Charging mode     |
| Test Voltage:      | 120Va.c. 60Hz     |


#### **Test Method:**

The test was performed in accordance with ANSI C63.10: 2013, with the following: an initial measurement was performed in peak and average detection mode on the live line, any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

#### **Test Setup:**

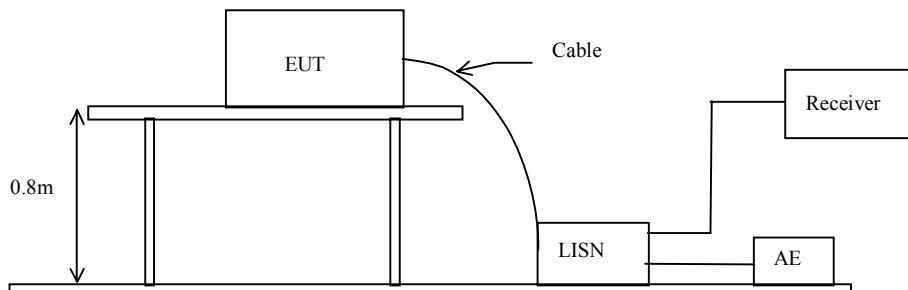

#### **Block for Conducted Emission:**



#### **STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

Date: 2016-09-12

Page 37 of 86

No.: DM124918

### Limit for Conducted Emissions (FCC 47 CFR 15.207):


| Frequency Range<br>[MHz] | Quasi-Peak Limits<br>[dBμV] | Average<br>[dBμV] |
|--------------------------|-----------------------------|-------------------|
| 0.15-0.5                 | 66 to 56*                   | 56 to 46*         |
| 0.5-5.0                  | 56                          | 46                |
| 5.0-30.0                 | 60                          | 50                |

\* Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

### Result of Charging mode (L): PASS

Please refer to the following diagram for individual results. (The data is the worst cases)

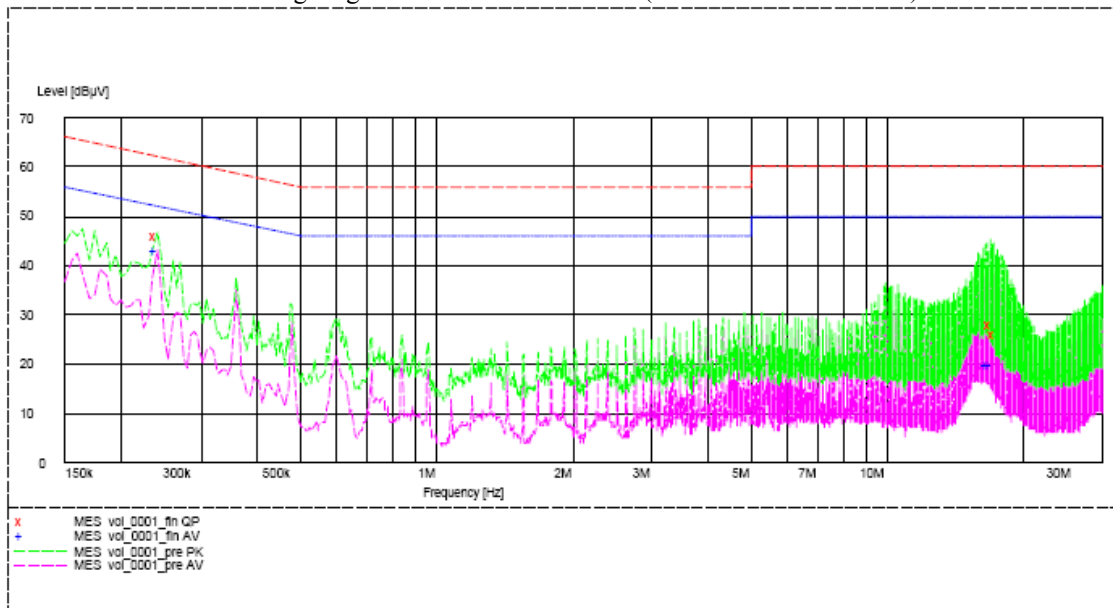

| Conductor<br>Live or Neutral | Frequency<br>MHz | Quasi-peak    |               | Average       |               |
|------------------------------|------------------|---------------|---------------|---------------|---------------|
|                              |                  | Level<br>dBμV | Limit<br>dBμV | Level<br>dBμV | Limit<br>dBμV |
| Live                         | 0.240            | 46.0          | 62.0          | -*-           | -*-           |
| Live                         | 16.905           | 27.9          | 60.0          | -*-           | -*-           |
| Live                         | 17.265           | 26.3          | 60.0          | -*-           | -*-           |
| Live                         | 0.240            | -*-           | -*-           | 43.2          | 52.0          |
| Live                         | 16.665           | -*-           | -*-           | 19.9          | 50.0          |
| Live                         | 16.905           | -*-           | -*-           | 19.8          | 50.0          |

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

Date: 2016-09-12

Page 38 of 86

No.: DM124918

### Limit for Conducted Emissions (FCC 47 CFR 15.207):


| Frequency Range<br>[MHz] | Quasi-Peak Limits<br>[dB $\mu$ V] | Average<br>[dB $\mu$ V] |
|--------------------------|-----------------------------------|-------------------------|
| 0.15-0.5                 | 66 to 56*                         | 56 to 46*               |
| 0.5-5.0                  | 56                                | 46                      |
| 5.0-30.0                 | 60                                | 50                      |

\* Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

### Result of Charging mode (N): PASS

Please refer to the following diagram for individual results. (The data is the worst cases)

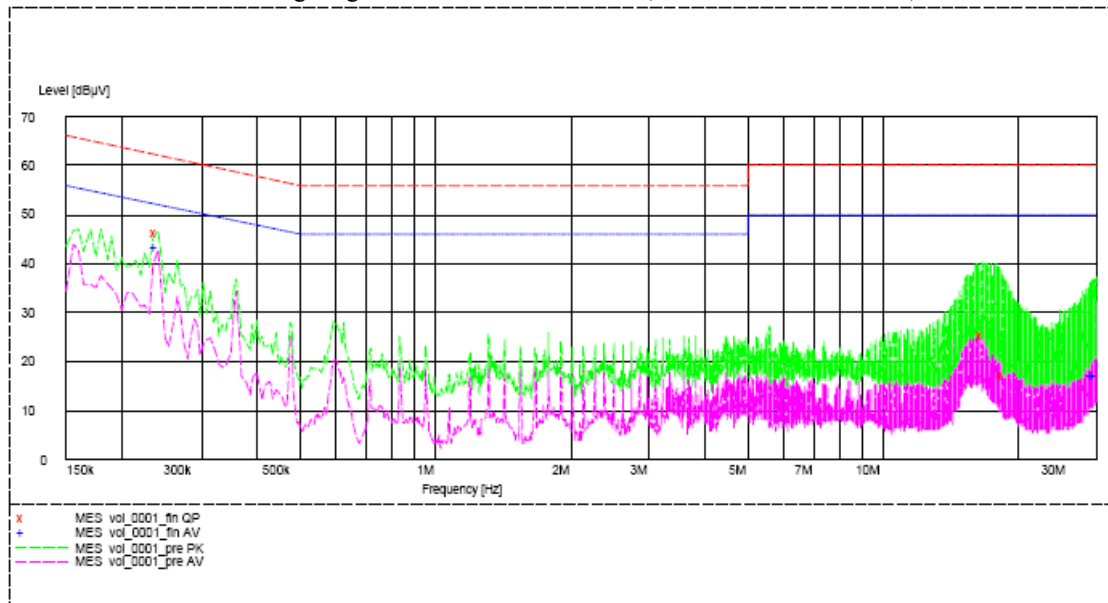

| Conductor<br>Live or Neutral | Frequency<br>MHz | Quasi-peak          |                     | Average             |                     |
|------------------------------|------------------|---------------------|---------------------|---------------------|---------------------|
|                              |                  | Level<br>dB $\mu$ V | Limit<br>dB $\mu$ V | Level<br>dB $\mu$ V | Limit<br>dB $\mu$ V |
| Neutral                      | 0.240            | 46.1                | 62.0                | -*-                 | -*-                 |
| Neutral                      | 16.605           | 25.4                | 60.0                | -*-                 | -*-                 |
| Neutral                      | 18.515           | 17.2                | 60.0                | -*-                 | -*-                 |
| Neutral                      | 0.240            | -*-                 | -*-                 | 43.4                | 52.0                |
| Neutral                      | 29.405           | -*-                 | -*-                 | 17.3                | 50.0                |
| Neutral                      | 19.645           | -*-                 | -*-                 | 17.5                | 50.0                |

Remarks:

Calculated measurement uncertainty (0.15MHz – 30MHz): 3.2dB

-\*- Emission(s) that is far below the corresponding limit line.

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

Date: 2016-09-12

Page 39 of 86

No.: DM124918

### 3.1.4 Number of Hopping Frequency

#### Limit of Number of Hopping Frequency

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels

#### Test Method:

The RF output of the EUT was connected to the spectrum analyzer by a low loss cable.

#### Spectrum Analyzer Setting:


RBW = 1MHz, VBW  $\geq$  RBW, Sweep = Auto, Span = the frequency band of operation  
Detector = Peak, Trace = Max. hold

#### Test Setup:

As Test Setup of clause 3.1.1 in this test report.

#### Measurement Data:

##### GFSK: 79 of 79 Channel

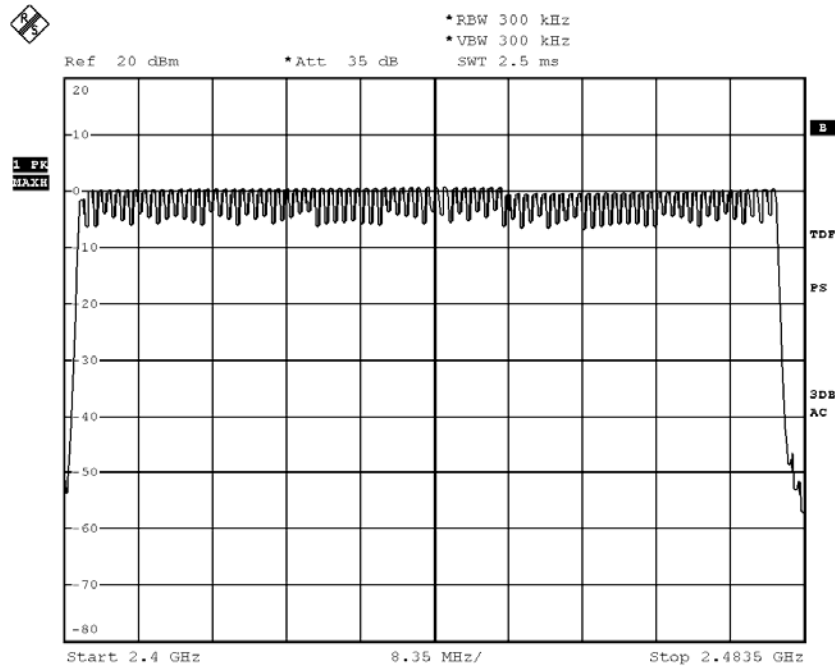

BMP

Date: 30.AUG.2016 11:12:54

#### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.




## STC Test Report

Date: 2016-09-12

No.: DM124918


Page 40 of 86

$\pi/4$ -DQPSK: 79 of 79 Channel

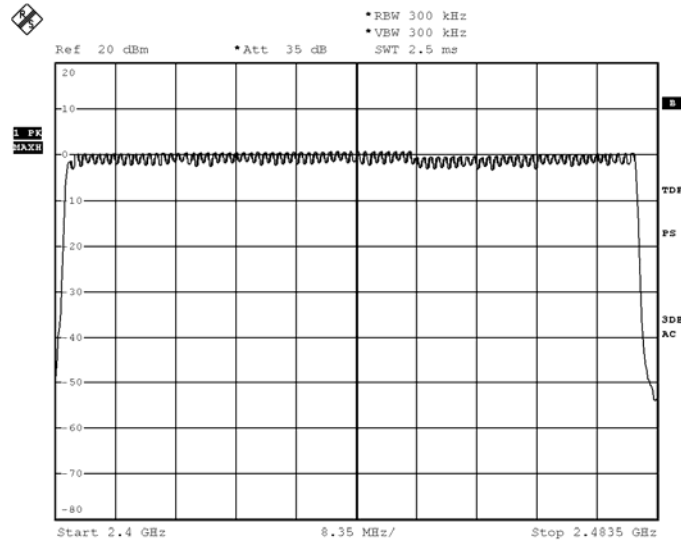

BMP  
Date: 30.AUG.2016 11:03:10

8DPSK: 79 of 79 Channel

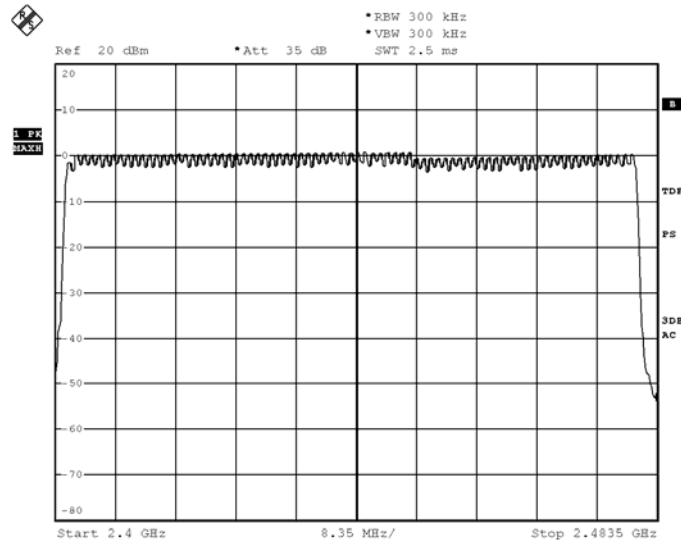

BMP  
Date: 30.AUG.2016 10:57:36

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## **STC Test Report**

**Date: 2016-09-12**

**Page 41 of 86**

**No.: DM124918**

### **3.1.5 20dB Bandwidth**

|                    |                        |
|--------------------|------------------------|
| Test Requirement:  | FCC 47CFR 15.247(a)(1) |
| Test Method:       | ANSI C63.10: 2013      |
| Test Date:         | 2016-08-30             |
| Mode of Operation: | TX mode                |

#### **Remark:**

The result has been done on all the possible configurations for searching the worst cases.

#### **Test Method:**

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

#### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.

**STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report


Date: 2016-09-12

Page 42 of 86

No.: DM124918

| Fundamental Frequency<br>[MHz] | 20dB Bandwidth<br>[kHz] | FCC Limits<br>[MHz] |
|--------------------------------|-------------------------|---------------------|
| 2402                           | 885.0                   | Within 2400-2483.5  |

### (Lowest Operating Frequency) - (GFSK)

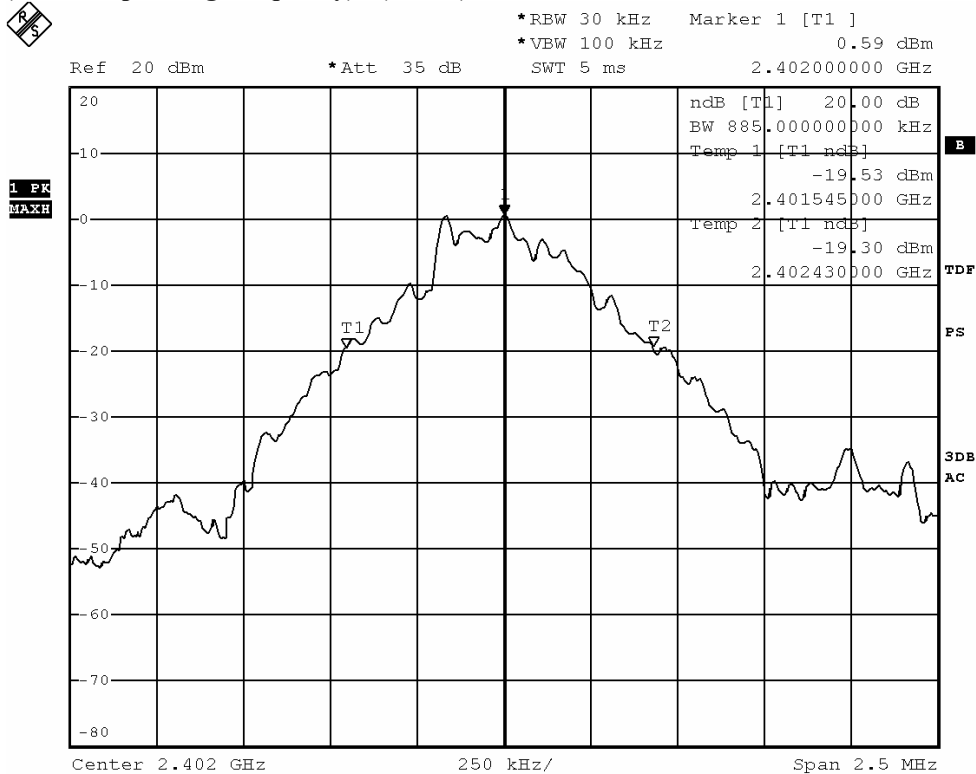

BMP

Date: 30.AUG.2016 10:03:27

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report


Date: 2016-09-12

Page 43 of 86

No.: DM124918

| Fundamental Frequency<br>[MHz] | 20dB Bandwidth<br>[kHz] | FCC Limits<br>[MHz] |
|--------------------------------|-------------------------|---------------------|
| 2441                           | 885.0                   | Within 2400-2483.5  |

### (Middle Operating Frequency) - (GFSK)

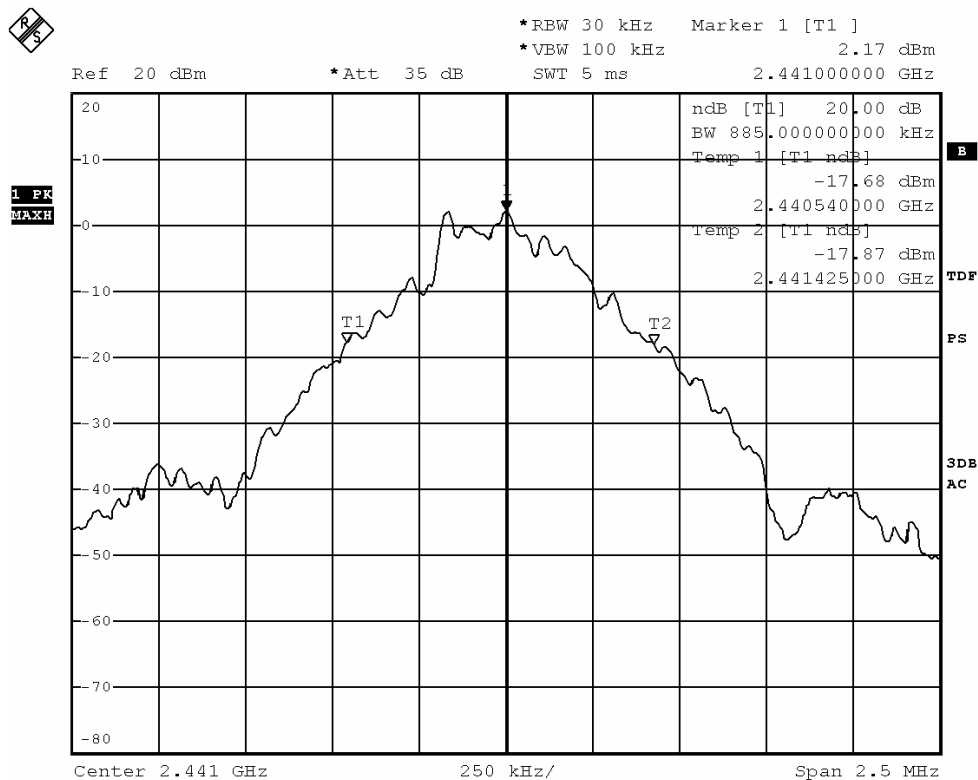

BMP

Date: 30.AUG.2016 10:03:59

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report


Date: 2016-09-12

Page 44 of 86

No.: DM124918

| Fundamental Frequency<br>[MHz] | 20dB Bandwidth<br>[kHz] | FCC Limits<br>[MHz] |
|--------------------------------|-------------------------|---------------------|
| 2480                           | 890.0                   | Within 2400-2483.5  |

### (Highest Operating Frequency) - (GFSK)

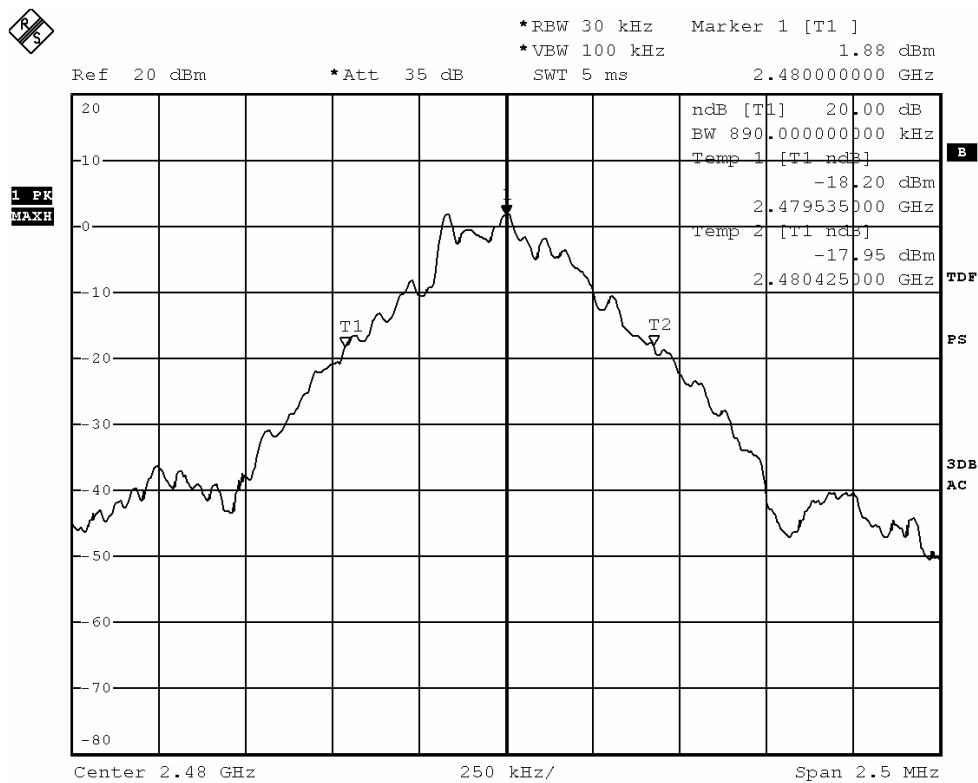

BMP

Date: 30.AUG.2016 10:04:30

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report


Date: 2016-09-12

Page 45 of 86

No.: DM124918

| Fundamental Frequency<br>[MHz] | 20dB Bandwidth<br>[MHz] | FCC Limits<br>[MHz] |
|--------------------------------|-------------------------|---------------------|
| 2402                           | 1.204                   | Within 2400-2483.5  |

### (Lowest Operating Frequency) - ( $\pi/4$ -DQPSK)

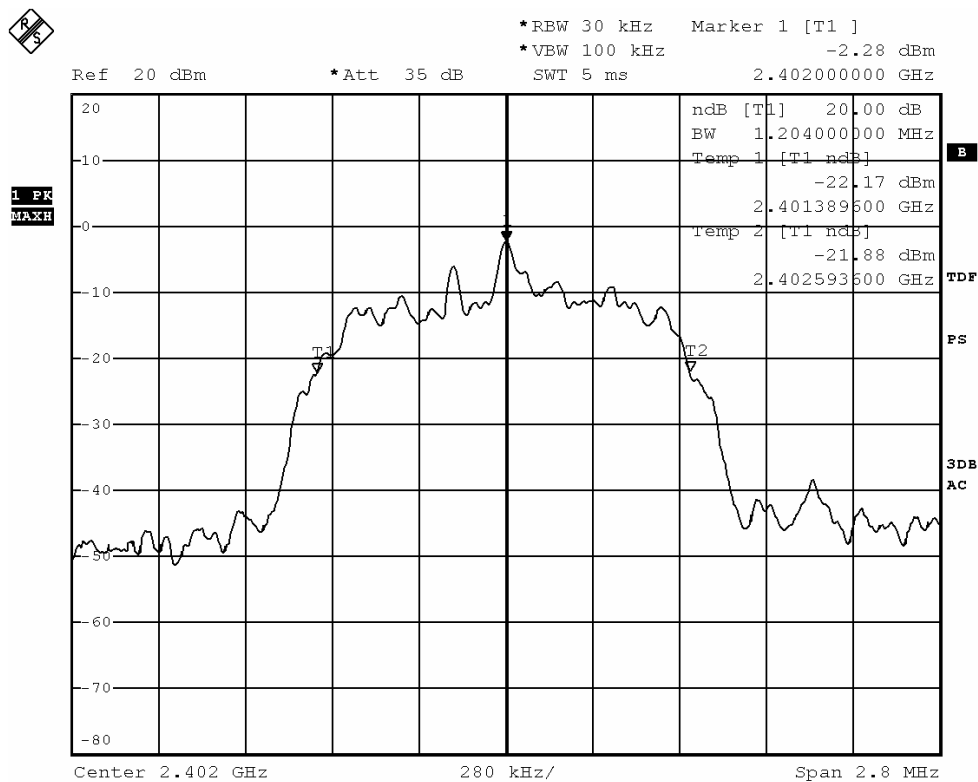

BMP

Date: 30.AUG.2016 10:07:06

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report


Date: 2016-09-12

Page 46 of 86

No.: DM124918

| Fundamental Frequency<br>[MHz] | 20dB Bandwidth<br>[MHz] | FCC Limits<br>[MHz] |
|--------------------------------|-------------------------|---------------------|
| 2441                           | 1.2264                  | Within 2400-2483.5  |

(Middle Operating Frequency) - ( $\pi/4$  -DQPSK)

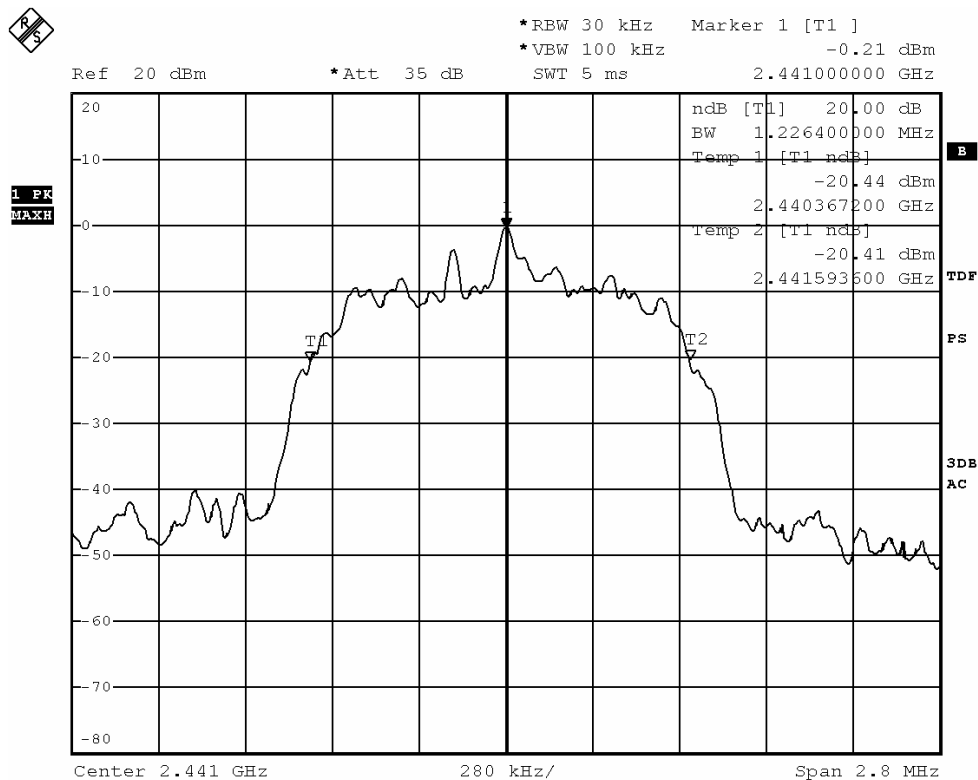

BMP

Date: 30.AUG.2016 10:06:05

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report


Date: 2016-09-12

Page 47 of 86

No.: DM124918

| Fundamental Frequency<br>[MHz] | 20dB Bandwidth<br>[MHz] | FCC Limits<br>[MHz] |
|--------------------------------|-------------------------|---------------------|
| 2480                           | 1.2264                  | Within 2400-2483.5  |

### (Highest Operating Frequency) - ( $\pi/4$ -DQPSK)

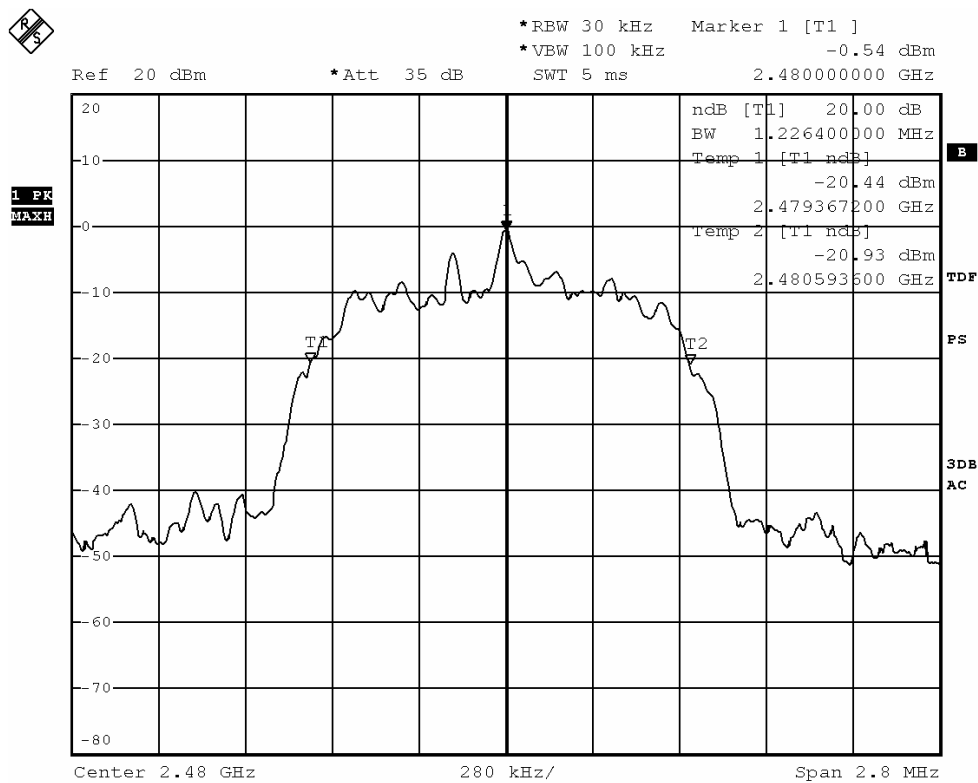

BMP

Date: 30.AUG.2016 10:05:28

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report


Date: 2016-09-12

Page 48 of 86

No.: DM124918

| Fundamental Frequency<br>[MHz] | 20dB Bandwidth<br>[MHz] | FCC Limits<br>[MHz] |
|--------------------------------|-------------------------|---------------------|
| 2402                           | 1.2096                  | Within 2400-2483.5  |

### (Lowest Operating Frequency) - (8DPSK)

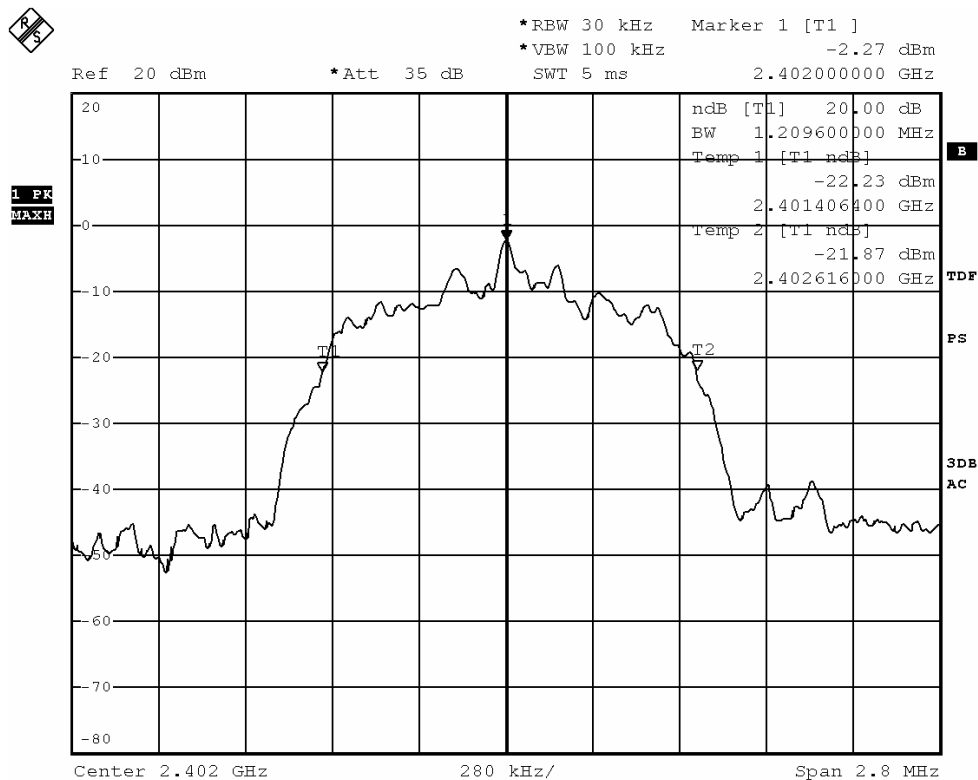

BMP

Date: 30.AUG.2016 10:07:56

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report


Date: 2016-09-12

Page 49 of 86

No.: DM124918

| Fundamental Frequency<br>[MHz] | 20dB Bandwidth<br>[MHz] | FCC Limits<br>[MHz] |
|--------------------------------|-------------------------|---------------------|
| 2441                           | 1.2096                  | Within 2400-2483.5  |

### (Middle Operating Frequency) - (8DPSK)

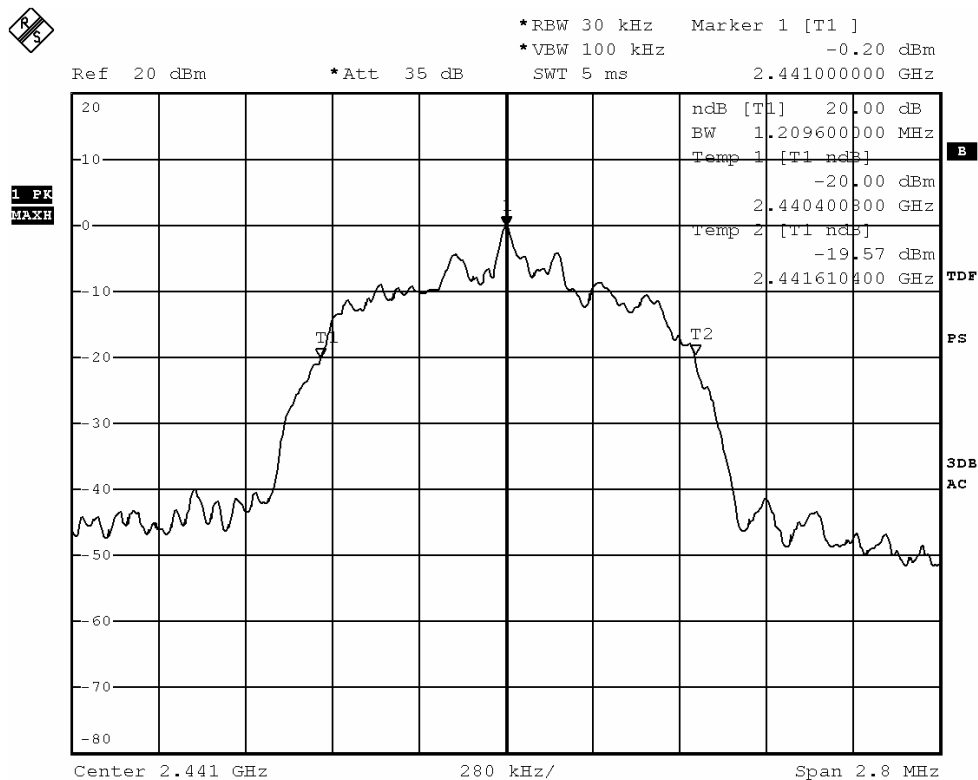

BMP

Date: 30.AUG.2016 10:08:34

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report


Date: 2016-09-12

Page 50 of 86

No.: DM124918

| Fundamental Frequency<br>[MHz] | 20dB Bandwidth<br>[MHz] | FCC Limits<br>[MHz] |
|--------------------------------|-------------------------|---------------------|
| 2480                           | 1.2096                  | Within 2400-2483.5  |

### (Highest Operating Frequency) - (8DPSK)

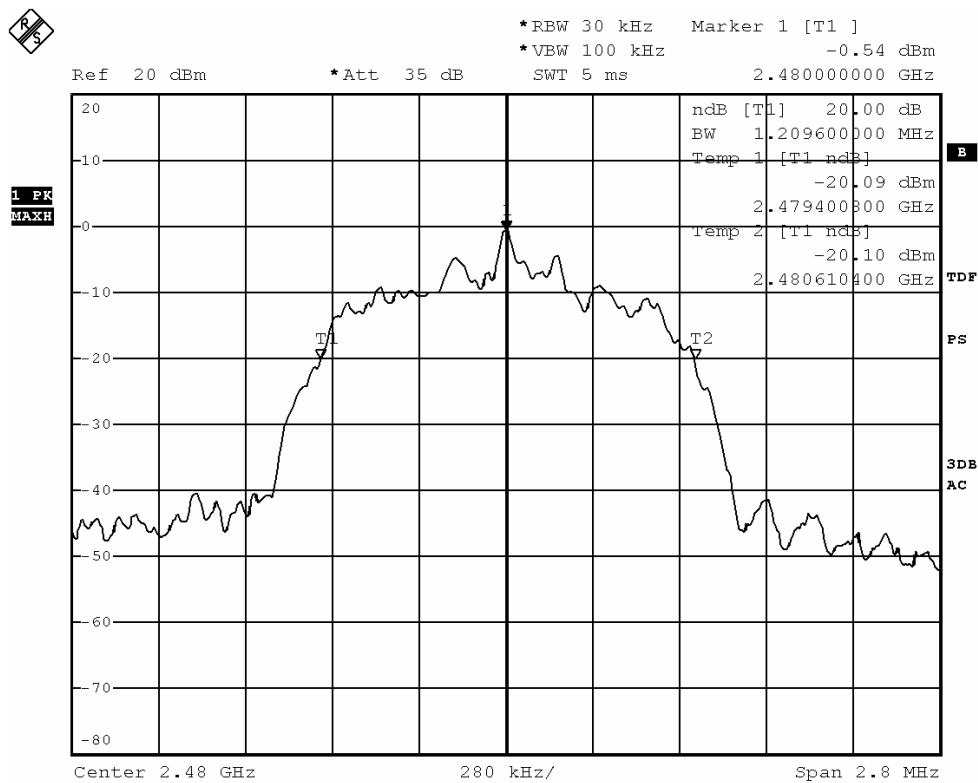

BMP

Date: 30.AUG.2016 10:09:25

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## **STC Test Report**

**Date: 2016-09-12**

**Page 51 of 86**

**No.: DM124918**

### **3.1.6 Hopping Channel Separation**

#### **Requirements:**

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### **Limit:**

The measured maximum bandwidth = 890KHz (GFSK)

The measured maximum bandwidth \* 2/3 = 1.2264MHz \* 2/3 = 817.6kHz( $\pi/4$  DQPSK, 8DPSK)

#### **STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.




## STC Test Report

Date: 2016-09-12

Page 52 of 86

No.: DM124918

Channel separation = 1MHz (>890kHz) (Lowest) (GFSK)

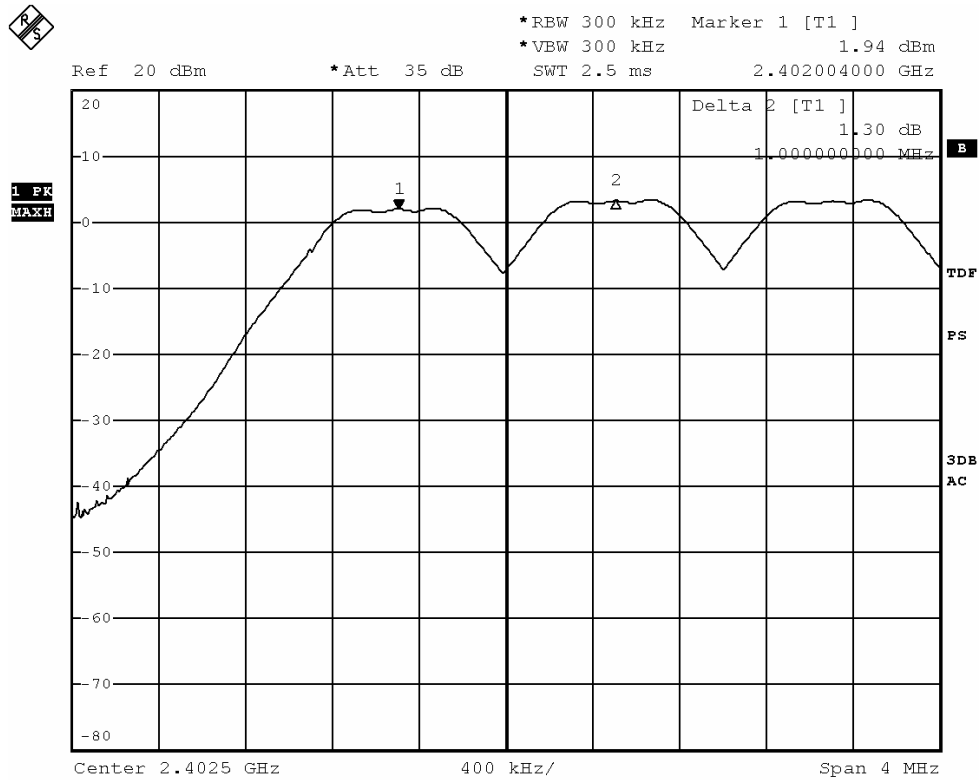

BMP

Date: 30.AUG.2016 10:23:13

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.




## STC Test Report

Date: 2016-09-12

No.: DM124918

Page 53 of 86

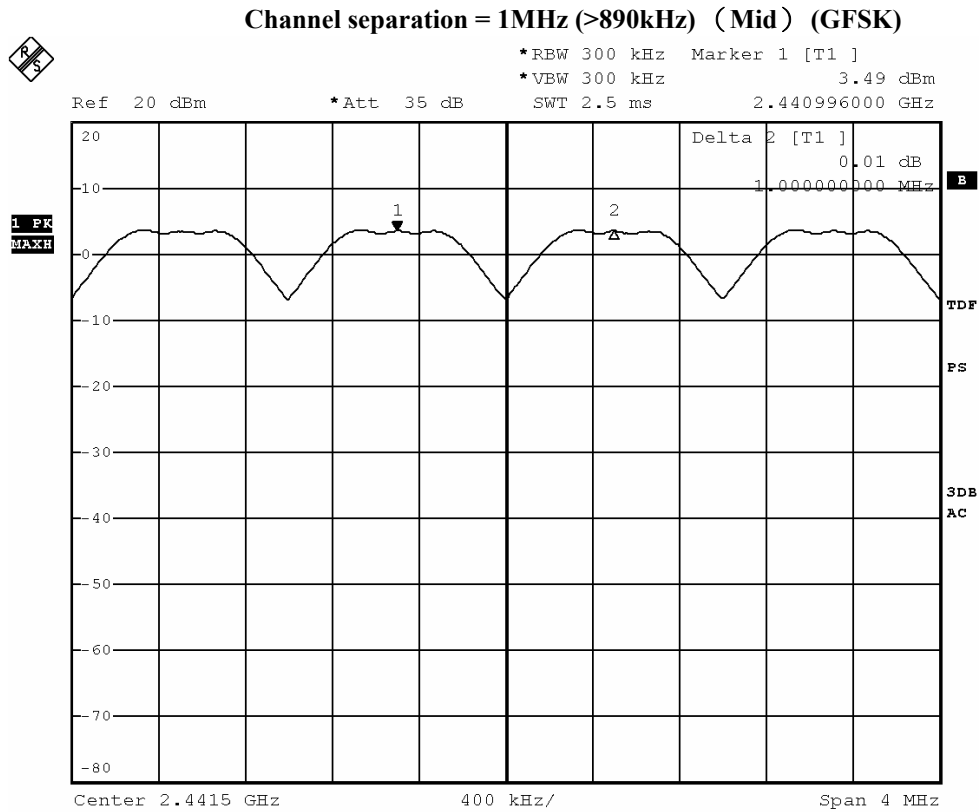

BMP

Date: 30.AUG.2016 10:21:45

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.




## STC Test Report

Date: 2016-09-12

Page 54 of 86

No.: DM124918

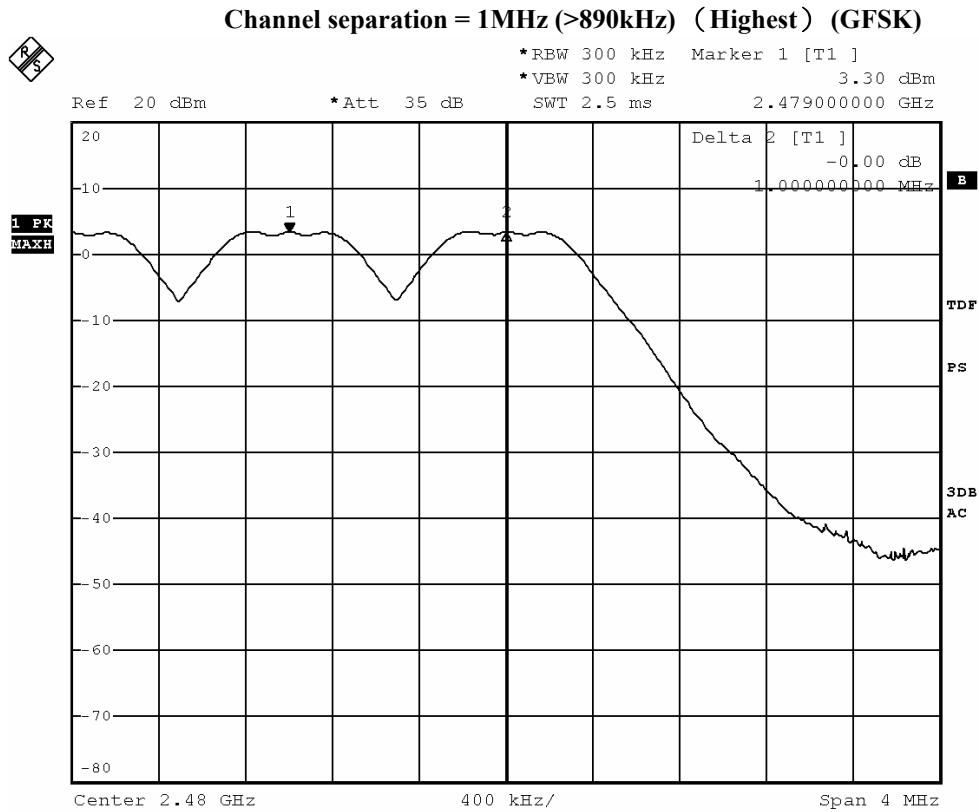

BMP

Date: 30.AUG.2016 10:20:38

**STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.




## STC Test Report

Date: 2016-09-12

Page 55 of 86

No.: DM124918

Channel separation = 1MHz (>817.6kHz) (Lowest) ( $\pi/4$  DQPSK)

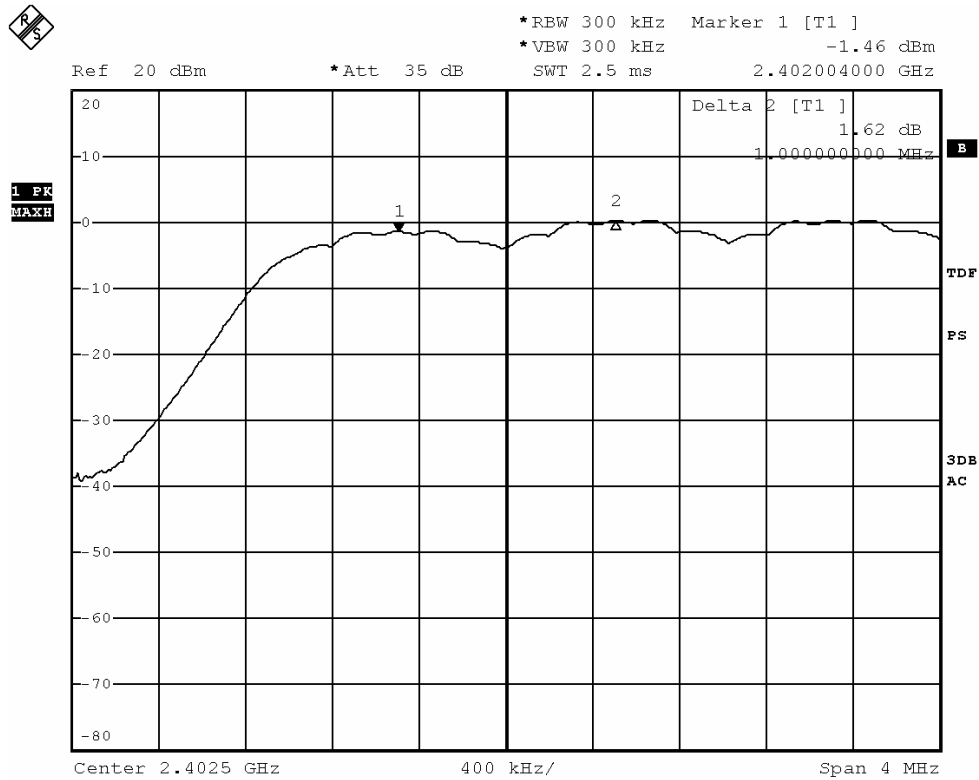

BMP

Date: 30.AUG.2016 10:16:39

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.




## STC Test Report

Date: 2016-09-12

Page 56 of 86

No.: DM124918

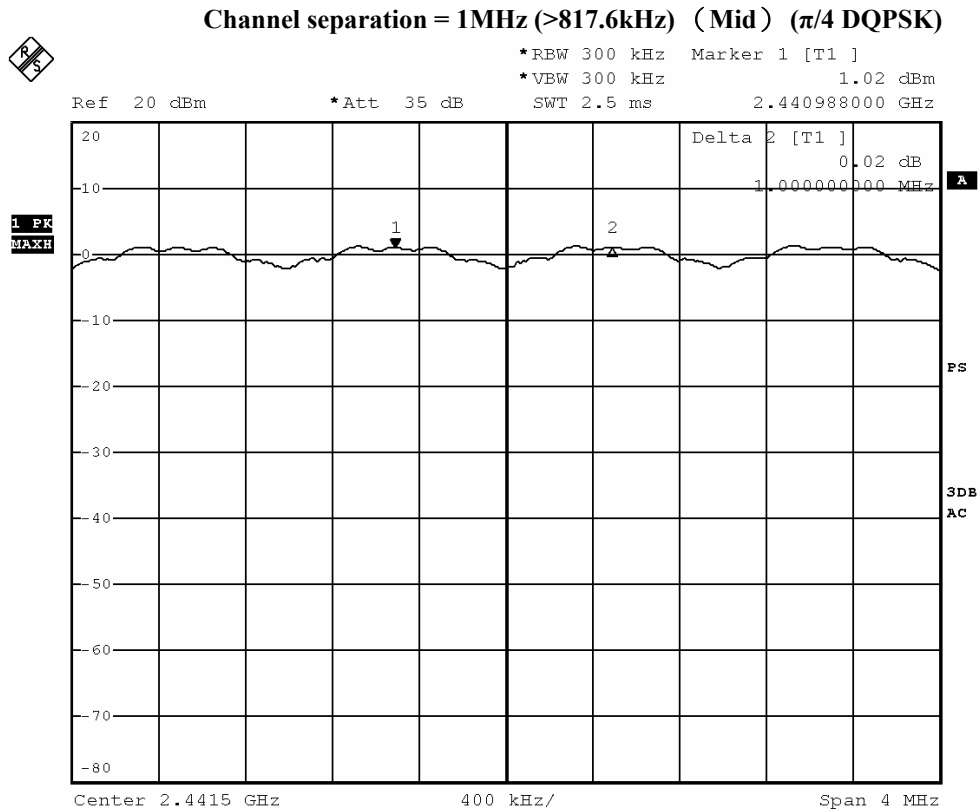

BMP

Date: 30.AUG.2016 11:11:56

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.




## STC Test Report

Date: 2016-09-12

Page 57 of 86

No.: DM124918

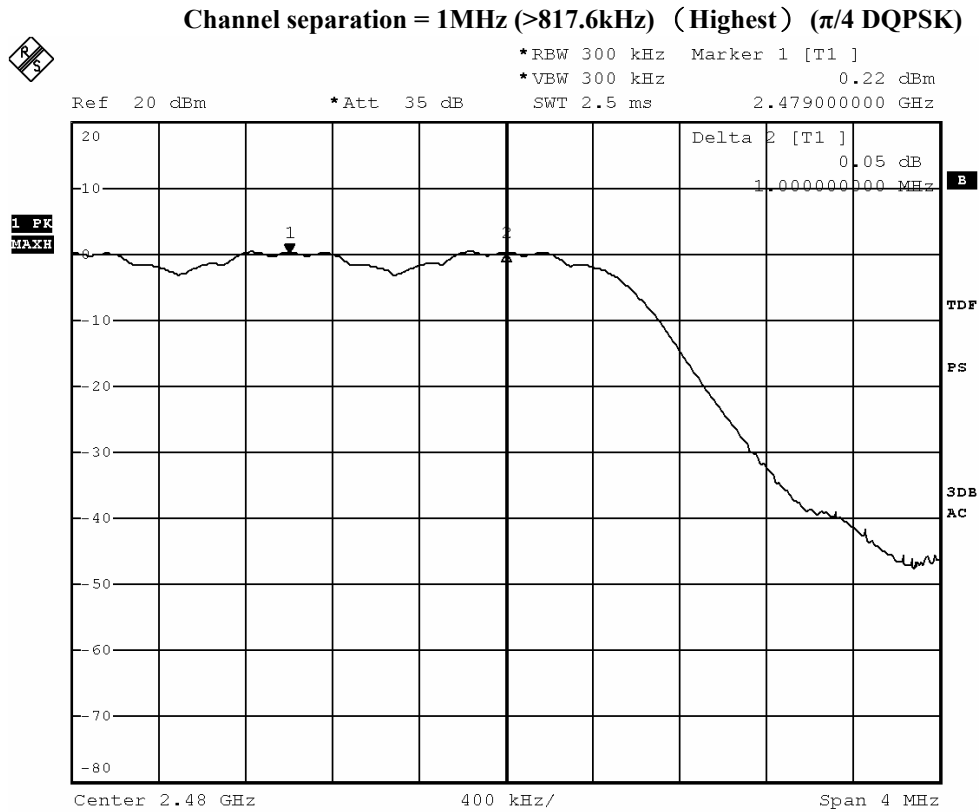

BMP

Date: 30.AUG.2016 10:19:19

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.




## STC Test Report

Date: 2016-09-12

Page 58 of 86

No.: DM124918

Channel separation = 1MHz (>817.6kHz) (Lowest) (8DPSK)

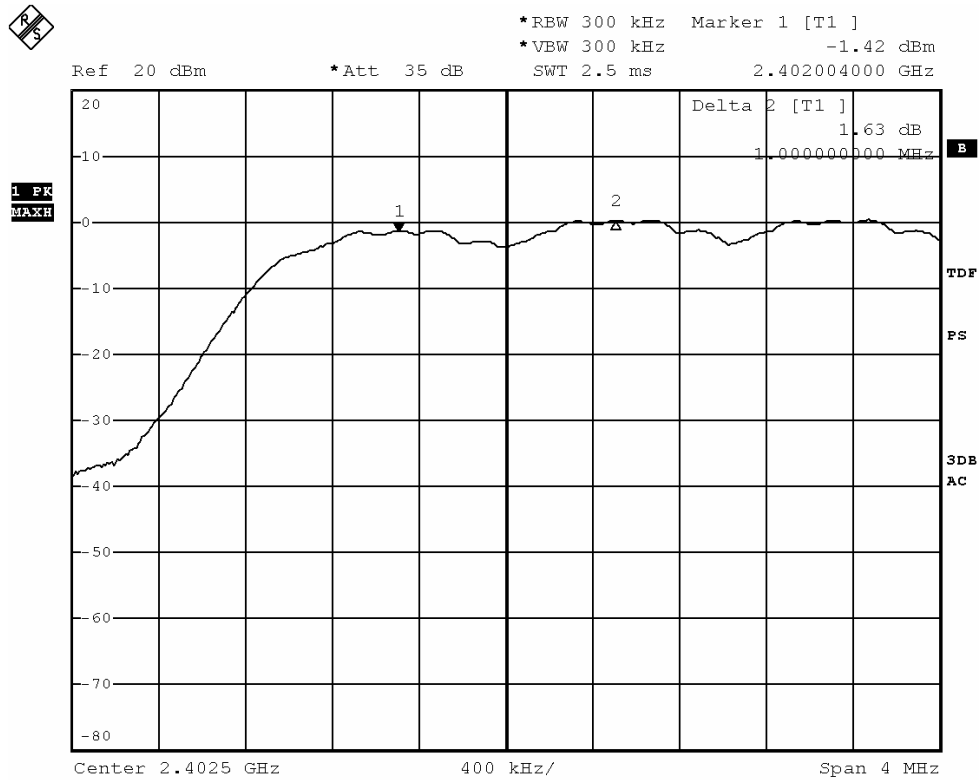

BMP

Date: 30.AUG.2016 10:13:31

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.




## STC Test Report

Date: 2016-09-12

Page 59 of 86

No.: DM124918

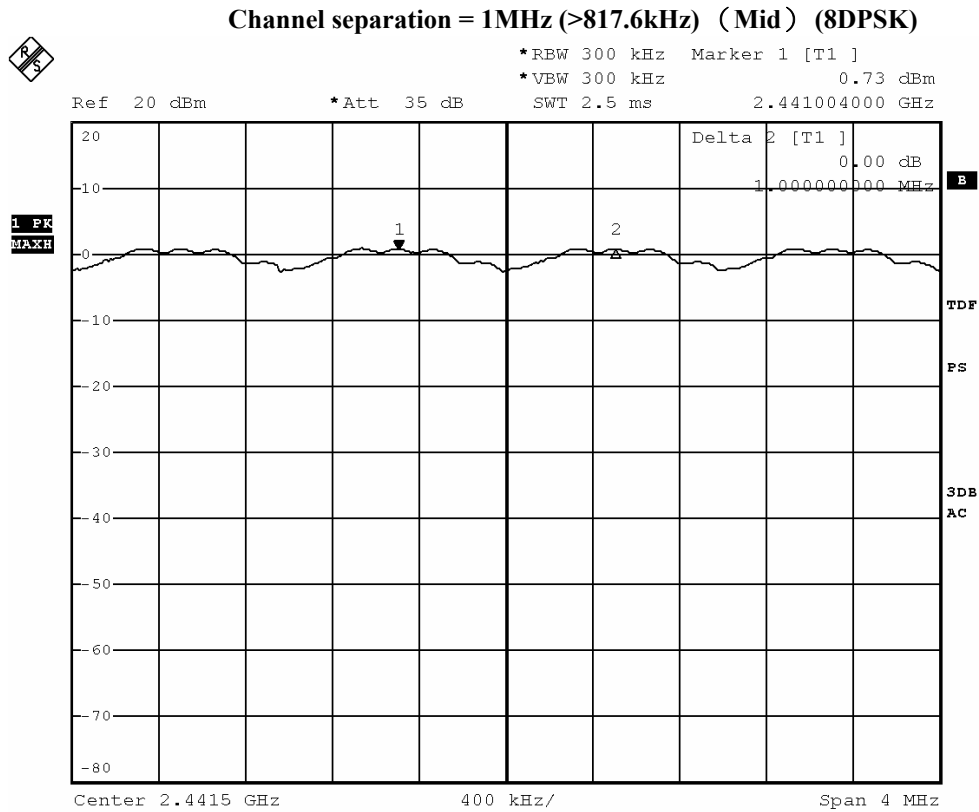

BMP

Date: 30.AUG.2016 10:11:57

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.




## STC Test Report

Date: 2016-09-12

Page 60 of 86

No.: DM124918

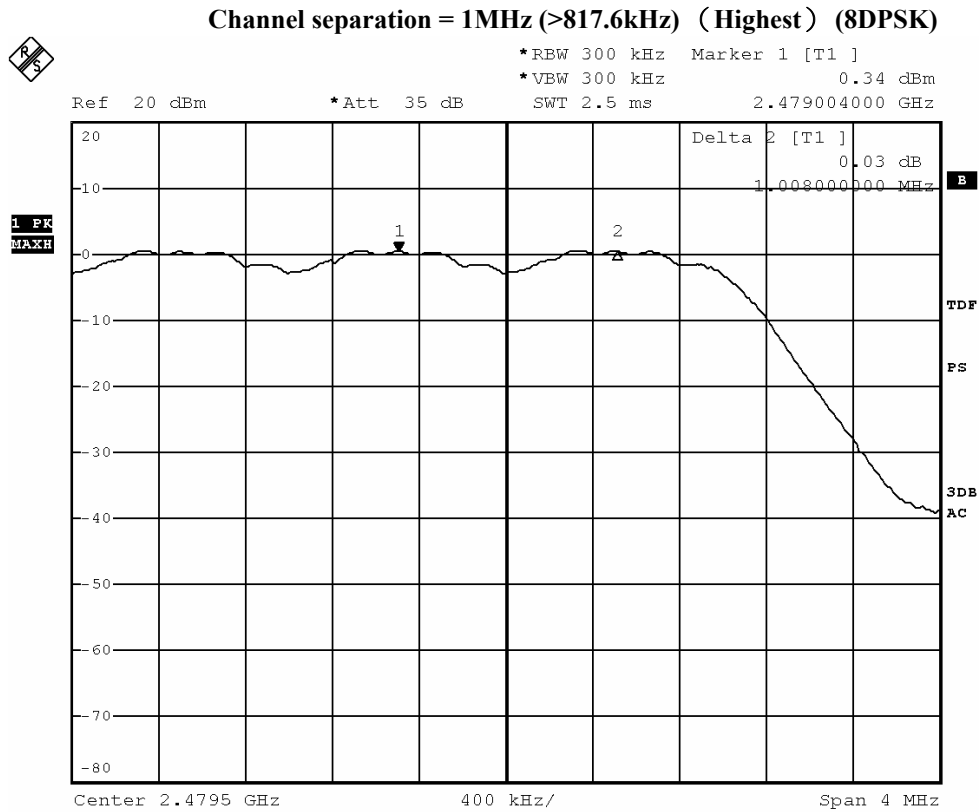

BMP

Date: 30.AUG.2016 10:10:40

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

Date: 2016-09-12

Page 61 of 86

No.: DM124918

### 3.1.7 Band-edge Compliance of RF Conducted Emissions Measurement:


#### Limit :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. According to the test method DA 00-705.

Remark: Emissions under the fixed frequency mode and hopping mode have been investigated, the worst-case measurement results were recorded in the test report

| Frequency Range                  | Radiated Emission Attenuated below the Fundamental |
|----------------------------------|----------------------------------------------------|
| [MHz]                            | [dB]                                               |
| 2400 – Lowest Fundamental (2402) | 51.86                                              |

### Band-edge Compliance of RF Conducted Emissions (GFSK Lowest)

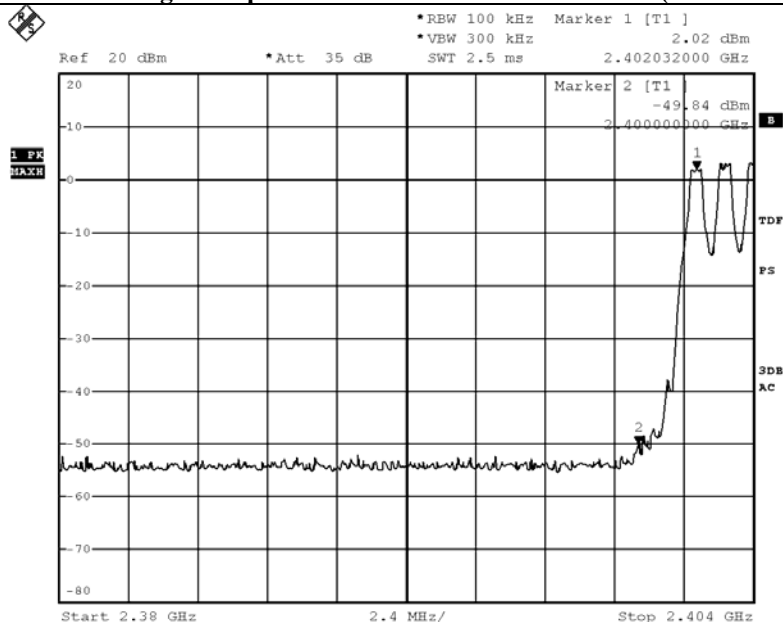

BMP

Date: 30.AUG.2016 10:26:20

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

Date: 2016-09-12


Page 62 of 86

No.: DM124918

### Band-edge Compliance of RF Conducted Emissions Measurement:

| Frequency Range<br>[MHz]            | Radiated Emission Attenuated below the<br>Fundamental<br>[dB] |
|-------------------------------------|---------------------------------------------------------------|
| Highest Fundamental (2480) - 2483.5 | 57.48                                                         |

### Band-edge Compliance of RF Conducted Emissions (GFSK Highest)

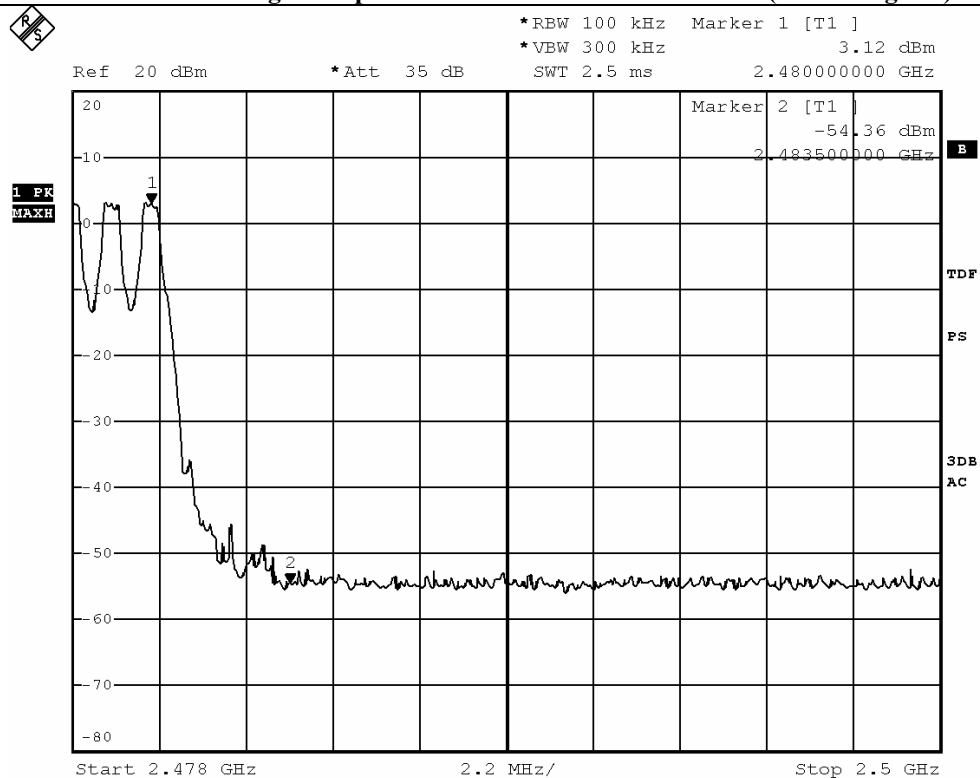

BMP

Date: 30.AUG.2016 10:32:20

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

Date: 2016-09-12


Page 63 of 86

No.: DM124918

### Band-edge Compliance of RF Conducted Emissions Measurement:

| Frequency Range<br>[MHz]         | Radiated Emission Attenuated below the<br>Fundamental<br>[dB] |
|----------------------------------|---------------------------------------------------------------|
| 2400 – Lowest Fundamental (2402) | 48.89                                                         |

### Band-edge Compliance of RF Conducted Emissions ( $\pi/4$ DQPSK Lowest)

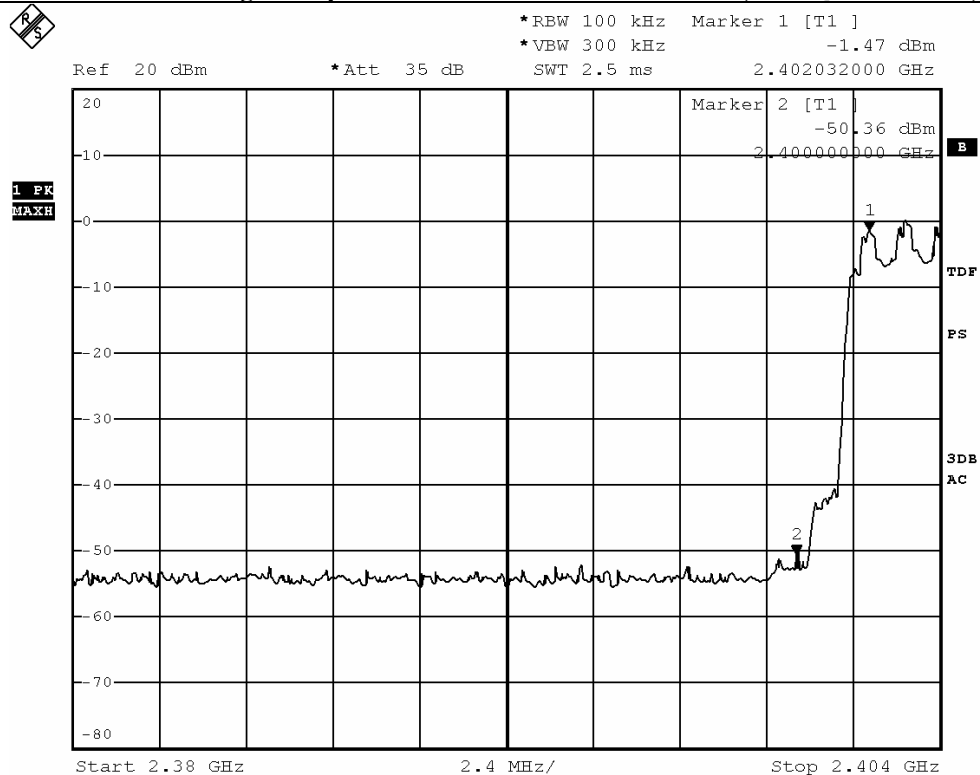

BMP

Date: 30.AUG.2016 10:27:27

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

Date: 2016-09-12


Page 64 of 86

No.: DM124918

### Band-edge Compliance of RF Conducted Emissions Measurement:

| Frequency Range<br>[MHz]            | Radiated Emission Attenuated below the<br>Fundamental<br>[dB] |
|-------------------------------------|---------------------------------------------------------------|
| Highest Fundamental (2480) - 2483.5 | 53.57                                                         |

### Band-edge Compliance of RF Conducted Emissions ( $\pi/4$ DQPSK Highest)

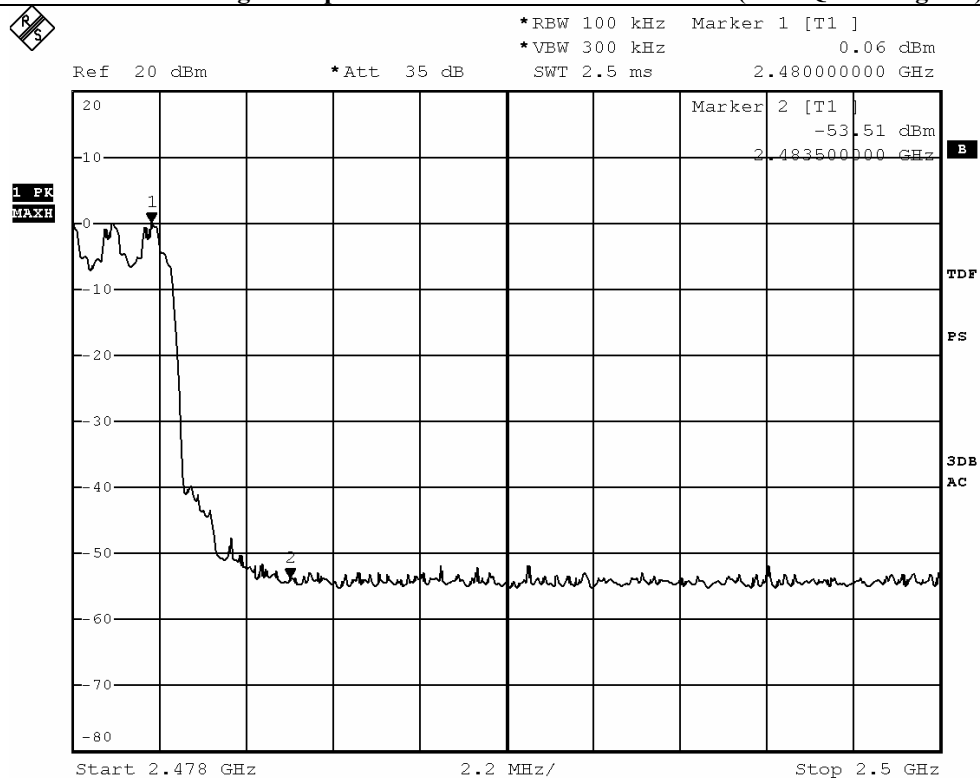

BMP

Date: 30.AUG.2016 10:31:25

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

Date: 2016-09-12


Page 65 of 86

No.: DM124918

### Band-edge Compliance of RF Conducted Emissions Measurement:

| Frequency Range<br>[MHz]         | Radiated Emission Attenuated below the<br>Fundamental<br>[dB] |
|----------------------------------|---------------------------------------------------------------|
| 2400 – Lowest Fundamental (2402) | 50.11                                                         |

### Band-edge Compliance of RF Conducted Emissions (8DPSK Lowest)

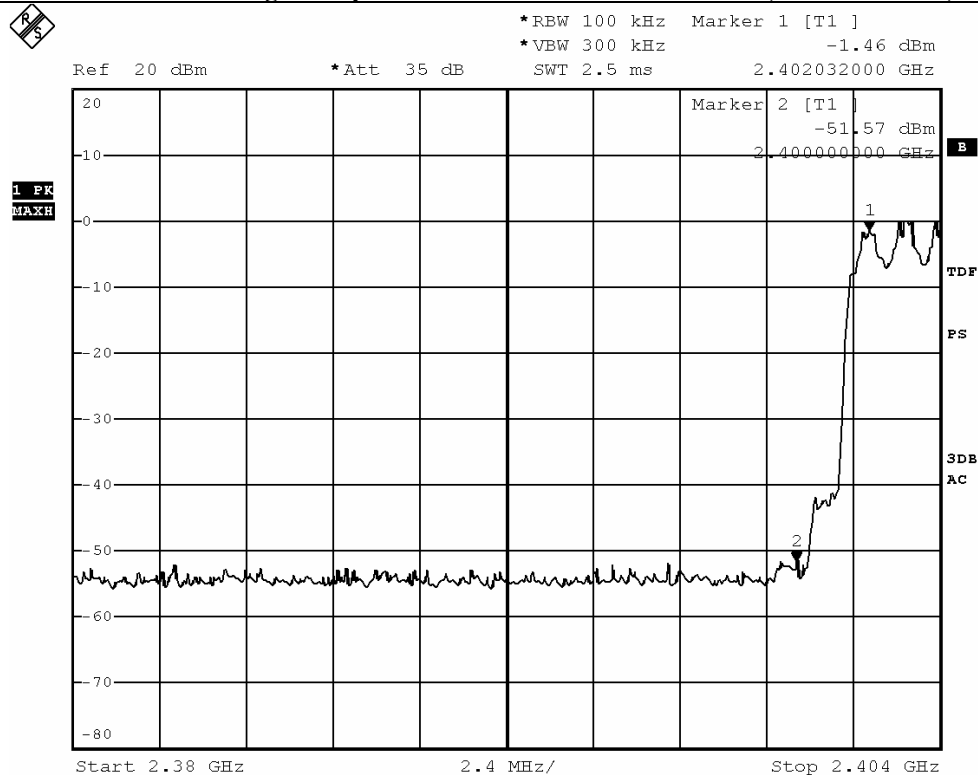

BMP

Date: 30.AUG.2016 10:28:21

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

Date: 2016-09-12


Page 66 of 86

No.: DM124918

### Band-edge Compliance of RF Conducted Emissions Measurement:

| Frequency Range<br>[MHz]            | Radiated Emission Attenuated below the<br>Fundamental<br>[dB] |
|-------------------------------------|---------------------------------------------------------------|
| Highest Fundamental (2480) - 2483.5 | 54.36                                                         |

### Band-edge Compliance of RF Conducted Emissions (8DPSK Highest)

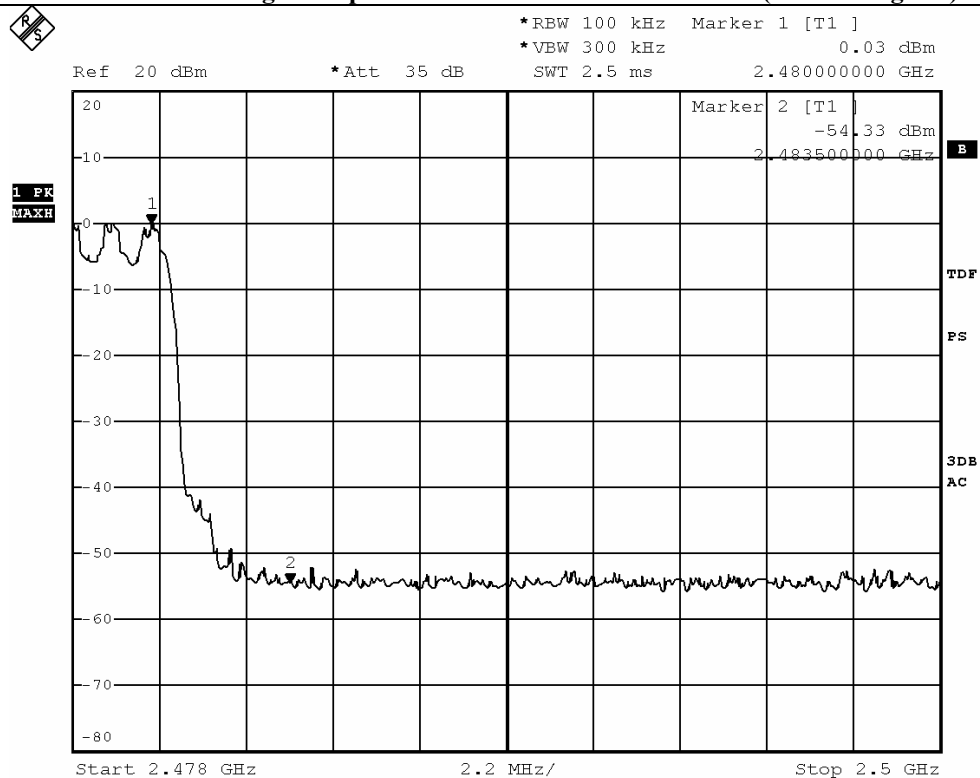

BMP

Date: 30.AUG.2016 10:30:06

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

Date: 2016-09-12

Page 67 of 86


No.: DM124918

### Band-edge Compliance of RF Conducted Emissions Measurement:

#### Limit :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. According to the test method DA 00-705.

Remark: Emissions under the fixed frequency mode and hopping mode have been investigated, the worst-case measurement results were recorded in the test report

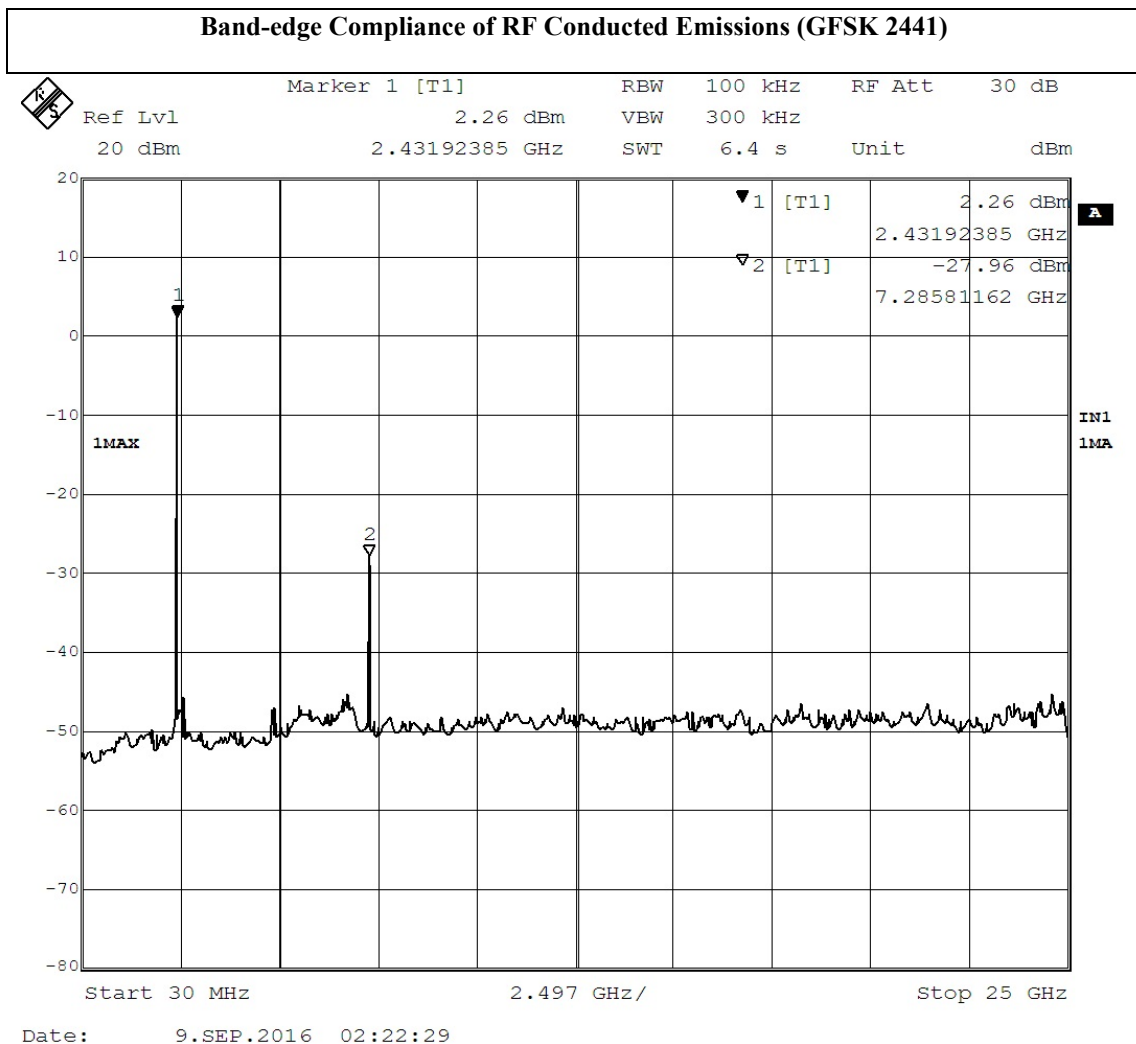

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.




## STC Test Report

Date: 2016-09-12

Page 68 of 86

No.: DM124918

### Band-edge Compliance of RF Conducted Emissions ( $\pi/4$ -DQPSK 2441)

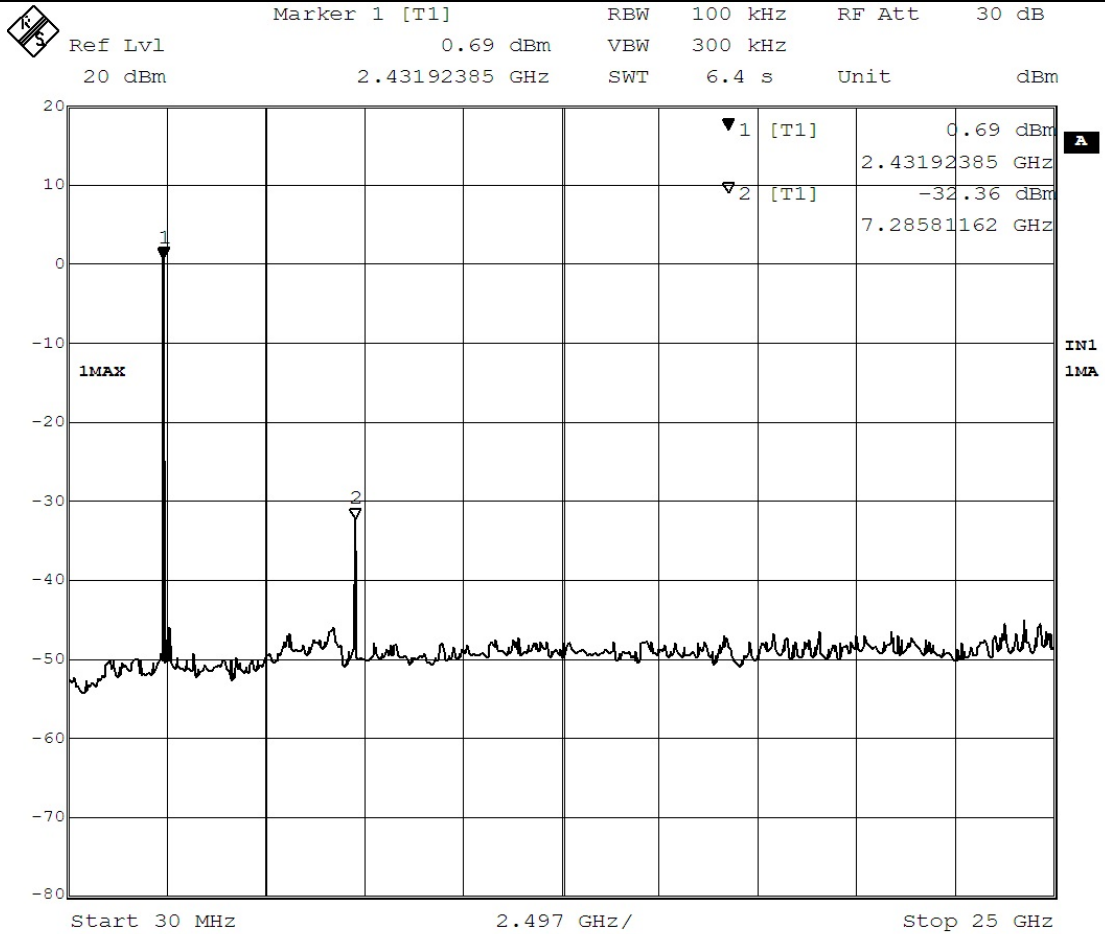

Date: 9.SEP.2016 02:24:32

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.




## STC Test Report

Date: 2016-09-12  
No.: DM124918

Page 69 of 86

### Band-edge Compliance of RF Conducted Emissions (8DPSK 2441)

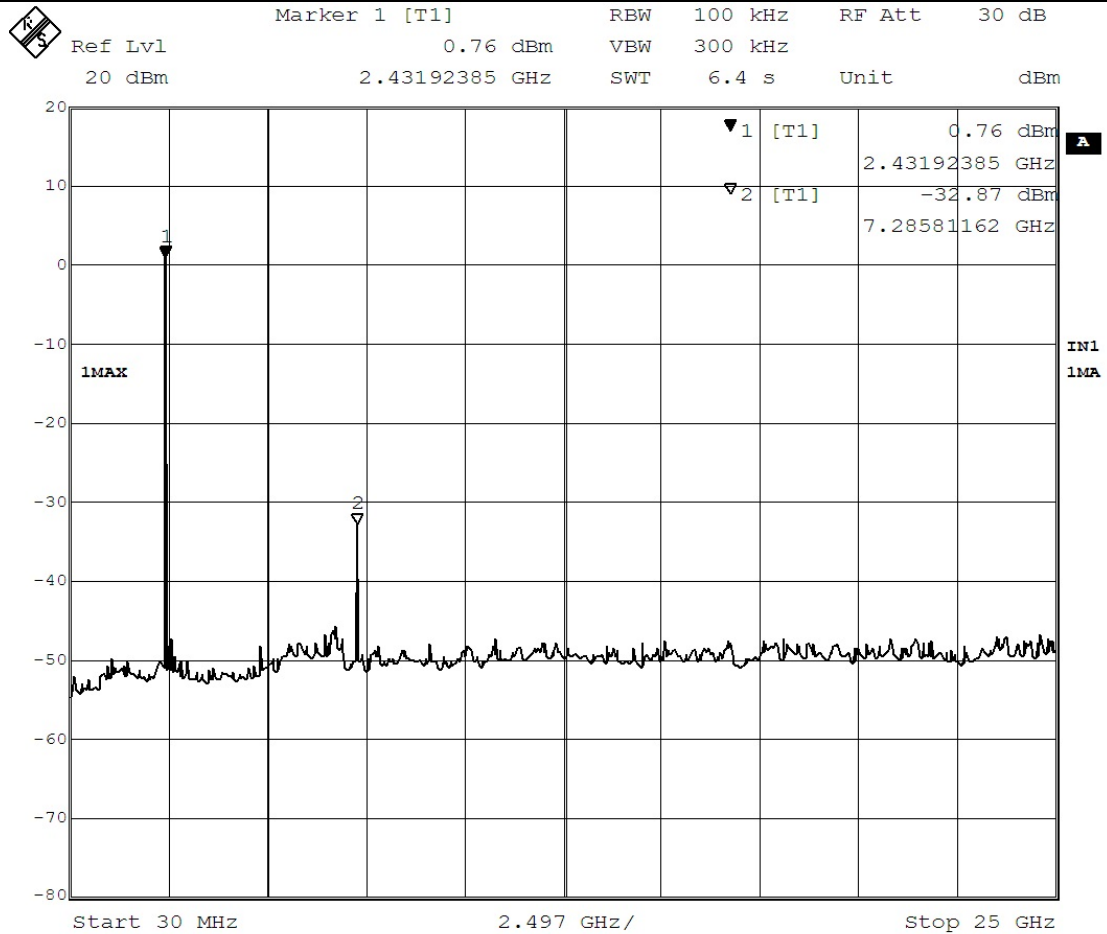

Date: 9.SEP.2016 02:26:16

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

Date: 2016-09-12  
No.: DM124918

Page 70 of 86

### 3.1.8 Time of Occupancy (Dwell Time)

#### Requirements:


The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channel employed.  
No requirements for Digital Transmission System.

**Dwell Time = Pulse Duration \* hop rate / number of channel \* observation duration**

**Observed duration: 0.4s x 79 = 31.6s**

#### Measurement Data:

**Channel Occupied in 8DPSK: 79 of 79 Channel**

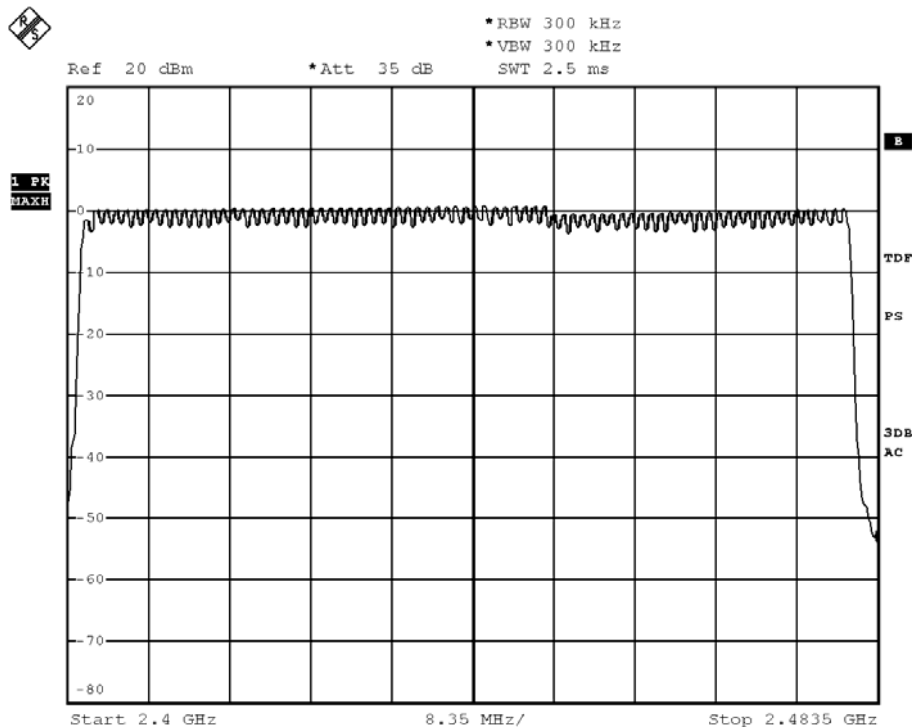

BMP

Date: 30.AUG.2016 10:57:36

#### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

Date: 2016-09-12


Page 71 of 86

No.: DM124918

### DH5 Packet:

DH5 Packet permit maximum  $1600/79/6 = 3.37$  hops per second in each channel (5 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times  $3.37 \times 31.6 = 106.6$  within 31.6 seconds

**Fig. A**  
**[Pulse duration of Lowest Channel]**

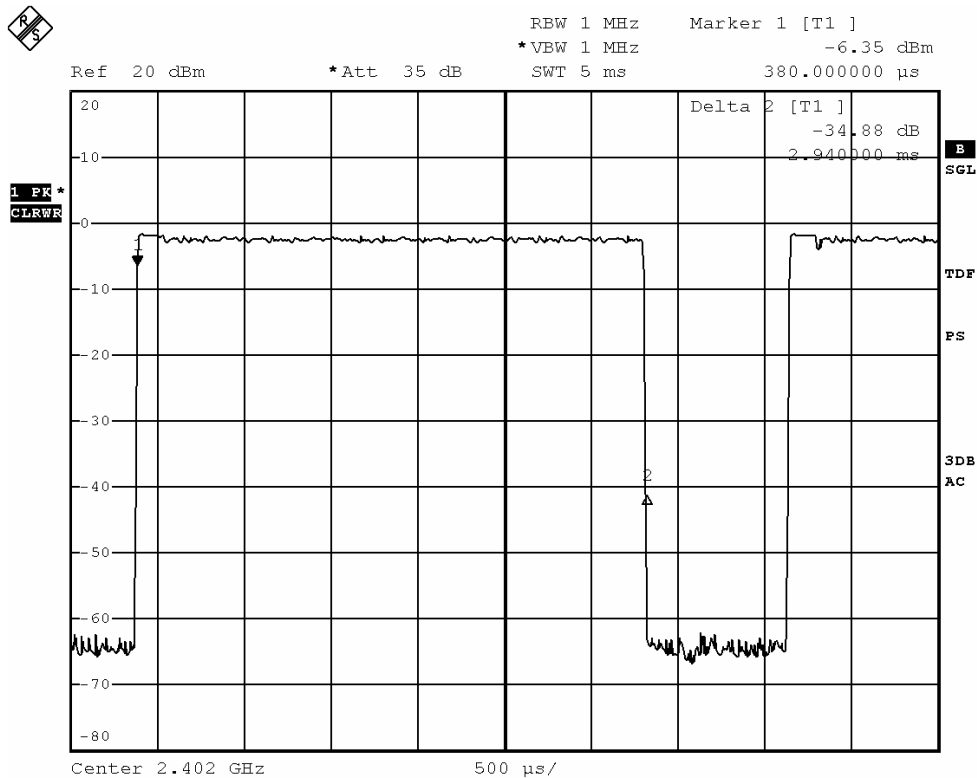

BMP

Date: 30.AUG.2016 10:37:08

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.




## STC Test Report

Date: 2016-09-12

Page 72 of 86

No.: DM124918

**Fig. B**  
**[Pulse duration of Middle Channel]**

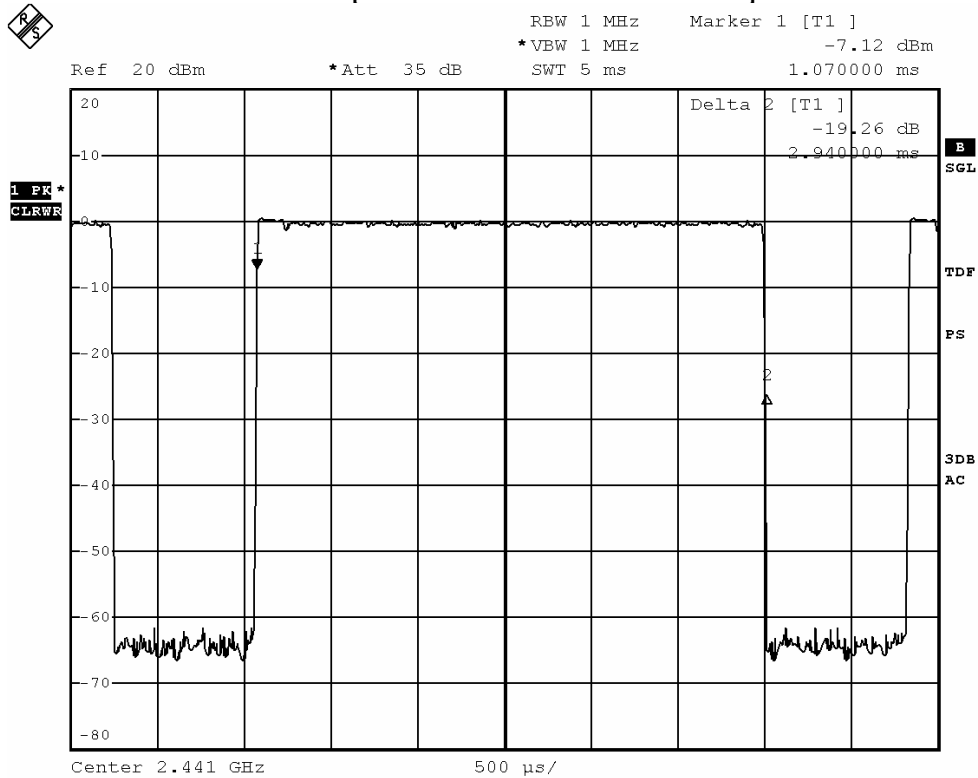

BMP

Date: 30.AUG.2016 10:36:44

**STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.




## STC Test Report

Date: 2016-09-12

No.: DM124918

Page 73 of 86

**Fig. C**  
**[Pulse duration of Highest Channel]**

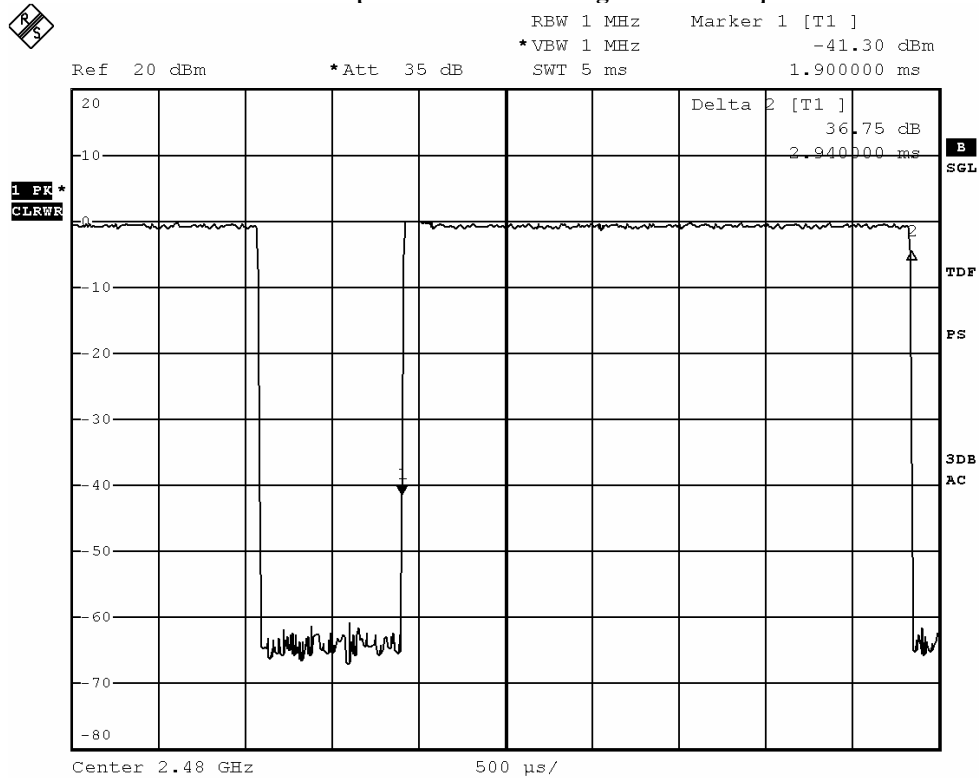

BMP

Date: 30.AUG.2016 10:36:21

**STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

Date: 2016-09-12


Page 74 of 86

No.: DM124918

### DH3 Packet:

DH3 Packet permit maximum  $1600/79/4 = 5.06$  hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times  $5.06 \times 31.6 = 160$  within 31.6 seconds

**Fig. D**  
**[Pulse duration of Lowest Channel]**

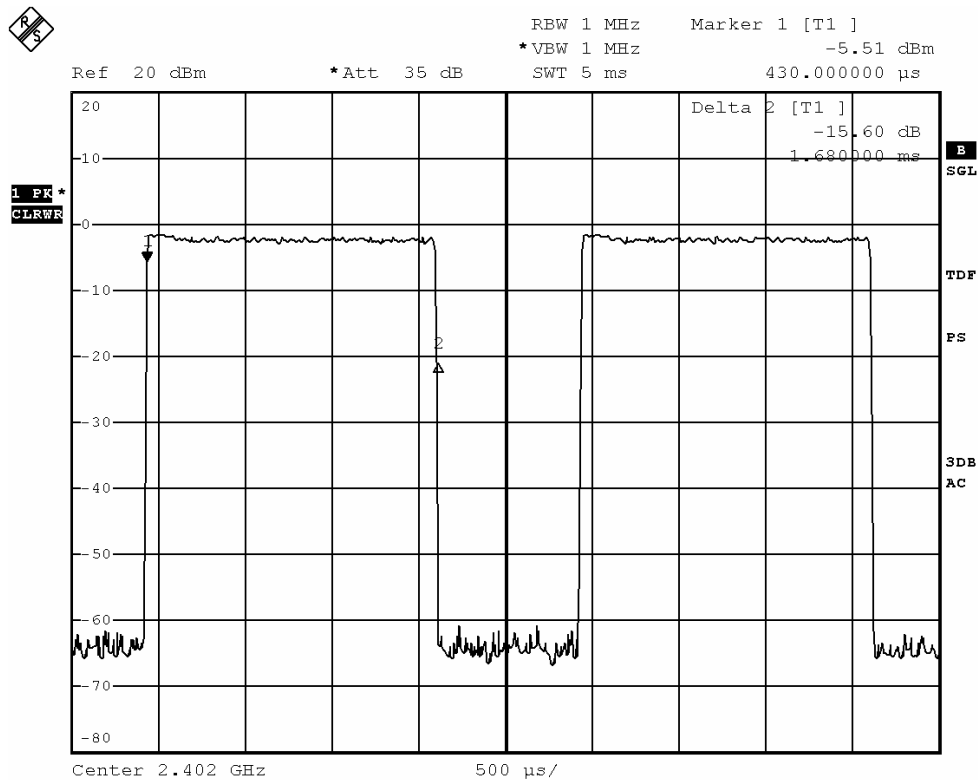

BMP

Date: 30.AUG.2016 10:34:40

### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.




## STC Test Report

Date: 2016-09-12

Page 75 of 86

No.: DM124918

**Fig. E**  
**[Pulse duration of Middle Channel]**

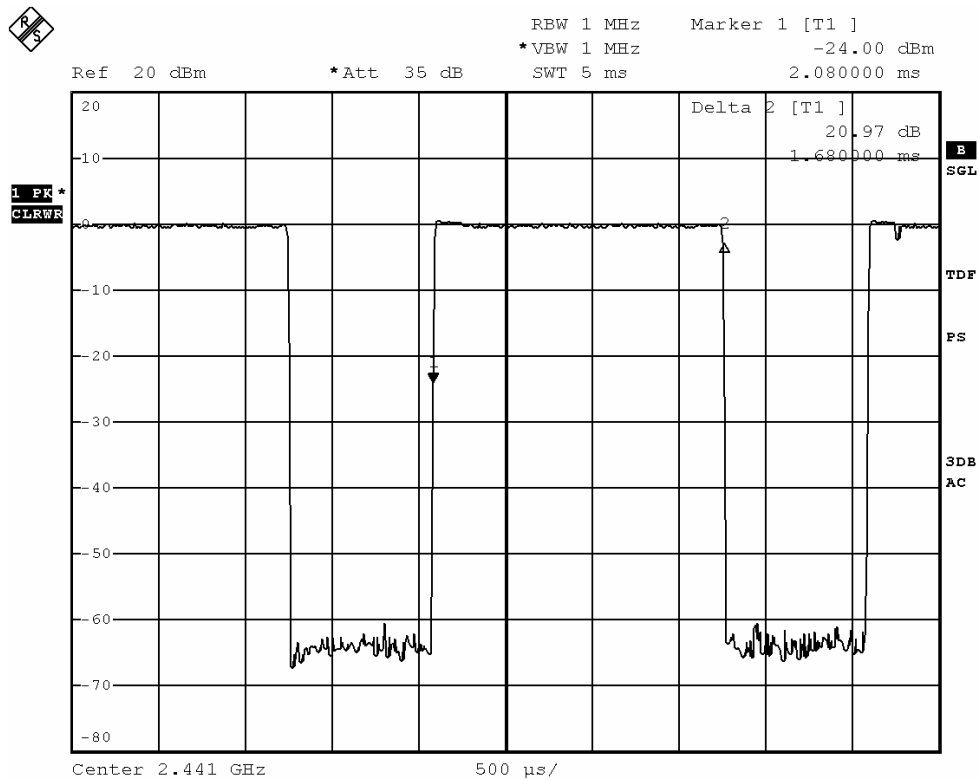

BMP

Date: 30.AUG.2016 10:35:11

**STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.




## STC Test Report

Date: 2016-09-12  
No.: DM124918

Page 76 of 86

**Fig. F**  
**[Pulse duration of Highest Channel]**

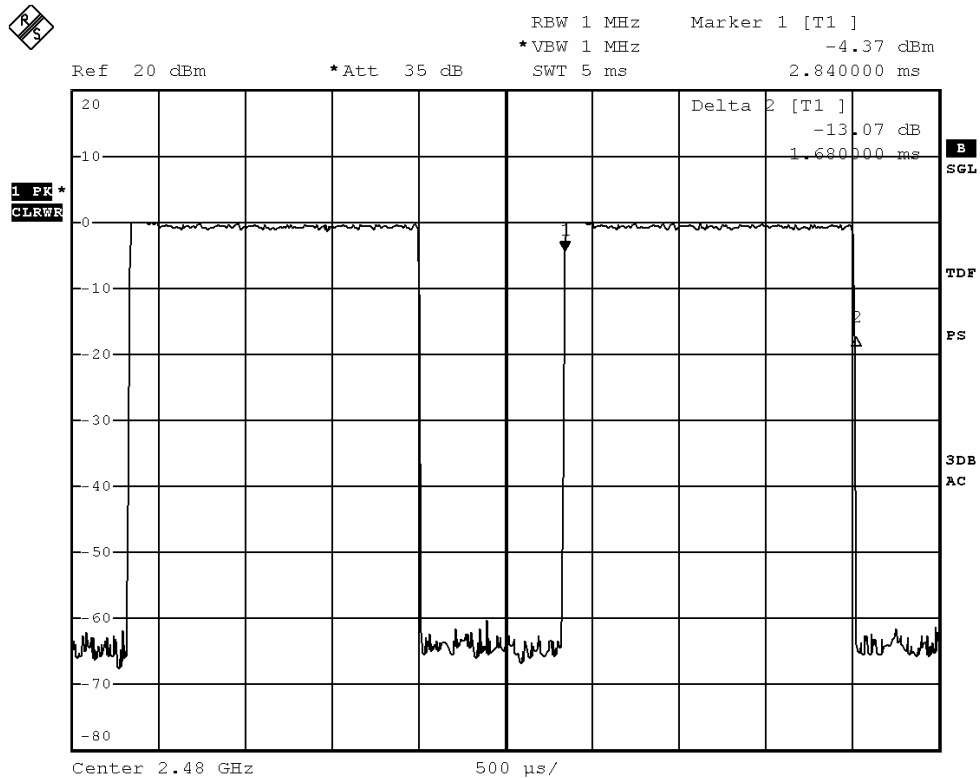

BMP

Date: 30.AUG.2016 10:35:40

**STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

Date: 2016-09-12


Page 77 of 86

No.: DM124918

### DH1 Packet:

DH1 Packet permit maximum  $1600/79/2 = 10.12$  hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times  $10.12 \times 31.6 = 320$  within 31.6 seconds

**Fig. G**  
**[Pulse duration of Lowest Channel]**

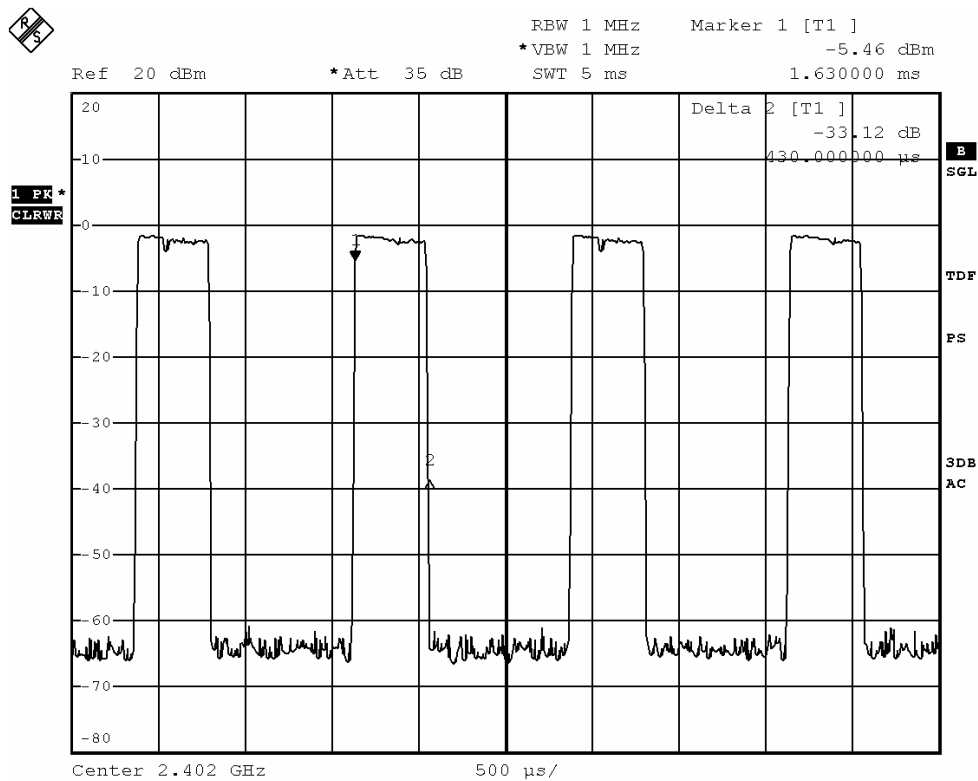

BMP

Date: 30.AUG.2016 10:34:10

**STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.




## STC Test Report

Date: 2016-09-12

No.: DM124918

Page 78 of 86

**Fig. H**  
**[Pulse duration of Middle Channel]**

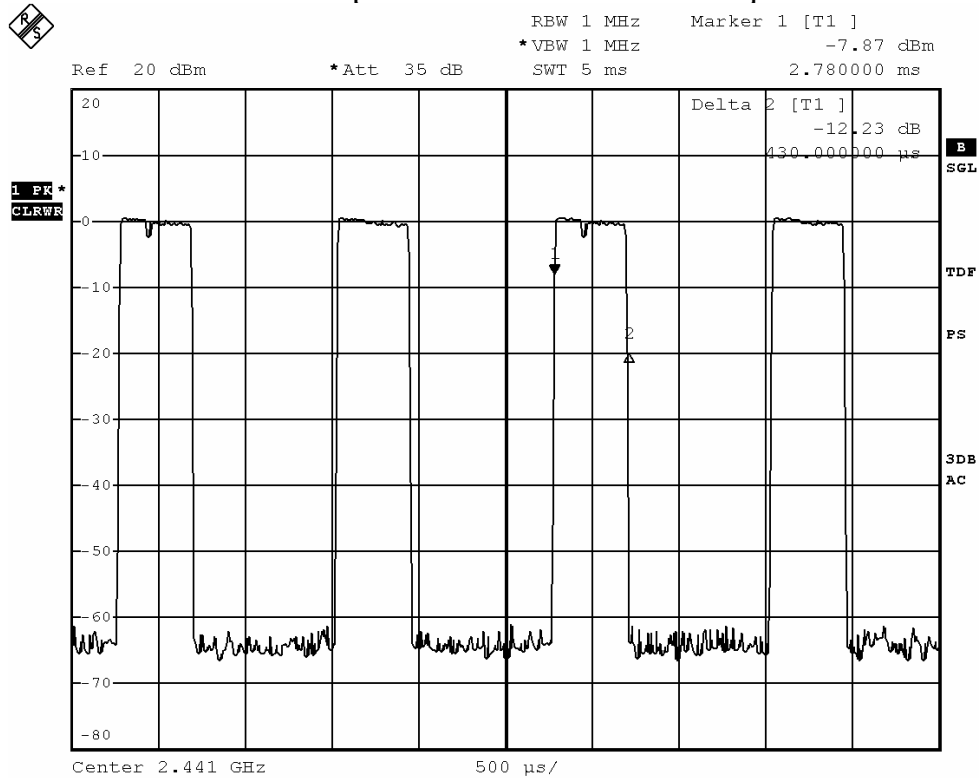

BMP

Date: 30.AUG.2016 10:33:44

**STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.




## STC Test Report

Date: 2016-09-12  
No.: DM124918

Page 79 of 86

**Fig. I**  
**[Pulse duration of Highest Channel]**

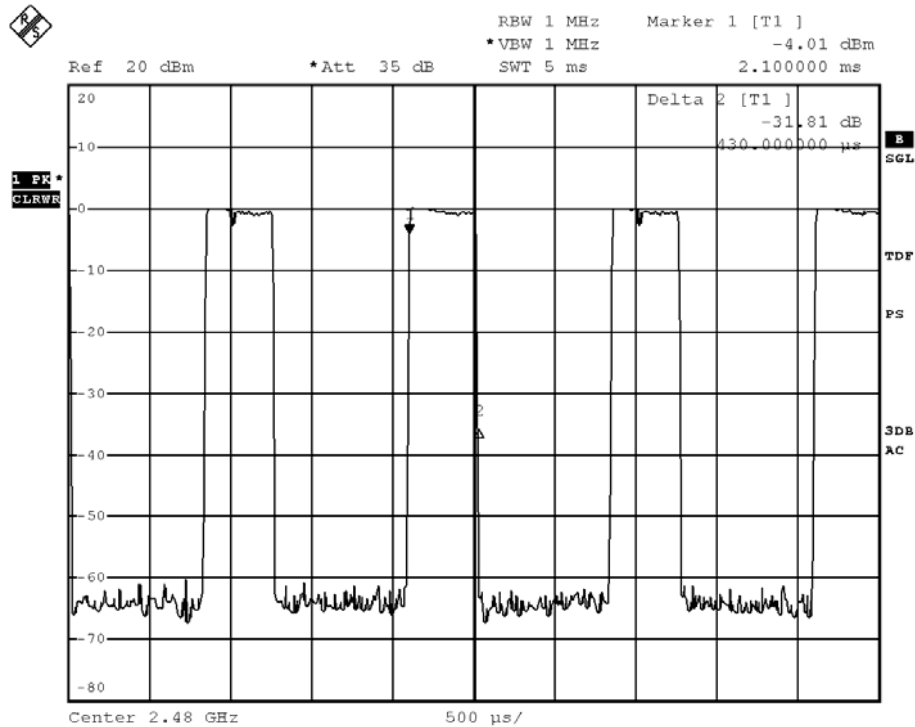

BMP

Date: 30.AUG.2016 10:33:18

**Time of occupancy (Dwell Time):**

| Data Packet | Frequency (MHz) | Pulse Duration (ms) | Dwell Time (s) | Limits (s) | Test Results |
|-------------|-----------------|---------------------|----------------|------------|--------------|
| DH5         | 2402            | 2.940               | 0.313          | 0.400      | Complies     |
| DH5         | 2441            | 2.940               | 0.313          | 0.400      | Complies     |
| DH5         | 2480            | 2.940               | 0.313          | 0.400      | Complies     |
| DH3         | 2402            | 1.680               | 0.269          | 0.400      | Complies     |
| DH3         | 2441            | 1.680               | 0.269          | 0.400      | Complies     |
| DH3         | 2480            | 1.680               | 0.269          | 0.400      | Complies     |
| DH1         | 2402            | 0.430               | 0.138          | 0.400      | Complies     |
| DH1         | 2441            | 0.430               | 0.138          | 0.400      | Complies     |
| DH1         | 2480            | 0.430               | 0.138          | 0.400      | Complies     |

**STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## **STC Test Report**

**Date: 2016-09-12**

**Page 80 of 86**

**No.: DM124918**

### **3.1.9 Channel Centre Frequency**

**Requirements:**

Frequency hopping system in the 2400-2483.5MHz band shall use at least 79 (Channel 1 to 79) non-overlapping channels.

The EUT operates in according with the Bluetooth system specification within the 2400 - 2483.5 MHz frequency band.

RF channels for Bluetooth systems are spaced 1 MHz and are ordered in channel number k. In order to comply with out-of-band regulations, a lower frequency guard band of 2.0 MHz and a higher frequency guard band of 3.5MHz is used.

The operating frequencies of each channel are as follows:

First RF channel start from 2400MHz + 2MHz guard band = 2402MHz

Frequency of RF Channel = 2402+k MHz, k = 1,...,79 (Channel separation = 1MHz)

### **STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## **STC Test Report**

**Date: 2016-09-12**

**Page 81 of 86**

**No.: DM124918**

### **3.1.10 Pseudorandom Hopping Algorithm**

#### **Requirements:**

The channel frequencies shall be selected from a pseudorandom ordered list of hopping frequencies. Each frequency must be used equally by the transmitter.

#### **EUT Pseudorandom Hopping Algorithm**

The EUT is a Bluetooth device, the Pseudo-random hopping pattern; hopping characteristics and algorithm are based on the Bluetooth specification.

**STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## **STC Test Report**

**Date: 2016-09-12**

**Page 82 of 86**

**No.: DM124918**

### **3.1.11 Antenna Requirement**

**Test Requirements: § 15.203**

#### **Test Specification:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### **Test Results:**

This is Dielectric Chip antenna. There is no external antenna, the antenna gain =2dBi. User is unable to remove or changed the Antenna.

**STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## STC Test Report

**Date: 2016-09-12**  
**No.: DM124918**

**Page 83 of 86**

### Appendix A

#### List of Measurement Equipment

| EQP NO. | DESCRIPTION                                  | MANUFACTURER              | MODEL NO.         | SERIAL NO.     | LAST CAL   | DUE CAL    |
|---------|----------------------------------------------|---------------------------|-------------------|----------------|------------|------------|
| EMD004  | LISN                                         | ROHDE & SCHWARZ           | ESH3-Z5           | 100102         | 2016.3.29  | 2017.3.29  |
| EMD022  | EMI Test Receiver                            | ROHDE & SCHWARZ           | ESCS30            | 100314         | 2016.3.29  | 2017.3.29  |
| EMD035  | EMI Test Receiver                            | ROHDE & SCHWARZ           | ESCI              | 100441         | 2016.3.29  | 2017.3.29  |
| EMD036  | EMI Test Receiver                            | ROHDE & SCHWARZ           | ESIB 26           | 100388         | 2016.3.29  | 2017.3.29  |
| EMD041  | TWO-LINE V-NETWORK                           | ROHDE & SCHWARZ           | ENV216            | 100261         | 2016.3.29  | 2017.3.29  |
| EMD061  | Biconilog Antenna                            | ETS.LINDGREN              | 3142C             | 00060439       | 2014.11.29 | 2016.11.29 |
| EMD062  | Double-Ridged Waveguide (1GHz – 18GHz)       | ETS.LINDGREN              | 3117              | 00075933       | 2014.11.15 | 2016.11.15 |
| EMD084  | MULTI-DVICE CONTROLLER                       | ETS.LINDGREN              | 2090              | 00060107       | N/A        | N/A        |
| EMD088  | Video Contol Unit                            | ETS.LINDGREN              | Y21953A           | 2601073        | N/A        | N/A        |
| EMD093  | Monitor                                      | ViewSonic                 | VA9036            | Q8X064201876   | N/A        | N/A        |
| EMD102  | Intelligent Frequency                        | Ainuo Instrument Co., Ltd | AN97005SS         | 79707454       | N/A        | N/A        |
| EMD103  | Intelligent Frequency                        | Ainuo Instrument Co., Ltd | AN97005SS         | 79707455       | N/A        | N/A        |
| EMD105  | FACT-3 EMC Chamber                           | ETS.LINDGREN              | FACT-3            | 3803           | N/A        | N/A        |
| EMD106  | Shielding Room #1                            | ETS.LINDGREN              | RFD-100           | 3802           | N/A        | N/A        |
| EMD111  | Power meter                                  | ROHDE & SCHWARZ           | NRVD              | 102051         | 2016.3.29  | 2017.3.29  |
|         | 100V Insertion Unit                          | ROHDE & SCHWARZ           | URV5-Z4           | 100464         | 2016.3.29  | 2017.3.29  |
| EMD113  | Pre-Amplifier                                | ROHDE & SCHWARZ           | N/A               | 1129588        | 2016.3.29  | 2017.3.29  |
| EMD124  | Loop Antenna                                 | ETS-Lindgren              | 6502              | 00104905       | 2015.04.28 | 2017.04.28 |
| EMD131  | Standard Gain Horn Antenna (18GHz – 26.5GHz) | Chengdu AINFO Inc.        | JXTXLB-42-15-C-KF | J2021100721001 | 2015.04.09 | 2017.04.09 |
| RE01    | RF cable                                     | N/A                       | N/A               | N/A            | 2014-9-28  | 2016-9-27  |
| RE02    | RF cable                                     | N/A                       | N/A               | N/A            | 2014-9-28  | 2016-9-27  |

Remarks:-

N/A Not Applicable or Not Available

### Appendix B

#### Ancillary Equipment

| ITEM NO. | DESCRIPTION   | MODEL NO. | FCC ID | REMARK                          |
|----------|---------------|-----------|--------|---------------------------------|
| 1        | DELL COMPUTER | DCSM      | N/A    | CONNECTED TO THE EUT INPUT PORT |
| 2        | USB Cable     | N/A       | N/A    | 80 cm unshielded cable          |

#### STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## **STC Test Report**

**Date: 2016-09-12**  
**No.: DM124918**

**Page 84 of 86**

### **Appendix C**

#### **Photographs of EUT**

**Front View of the product**



**Rear View of the product**



**Inside View of the product**



**Inner Circuit Top View**



**Inner Circuit Bottom View**



#### **STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.



## **STC Test Report**


**Date: 2016-09-12**

**Page 85 of 86**


**No.: DM124918**

**Photographs of EUT**

**Measurement of Radiated Emission Test Set Up**

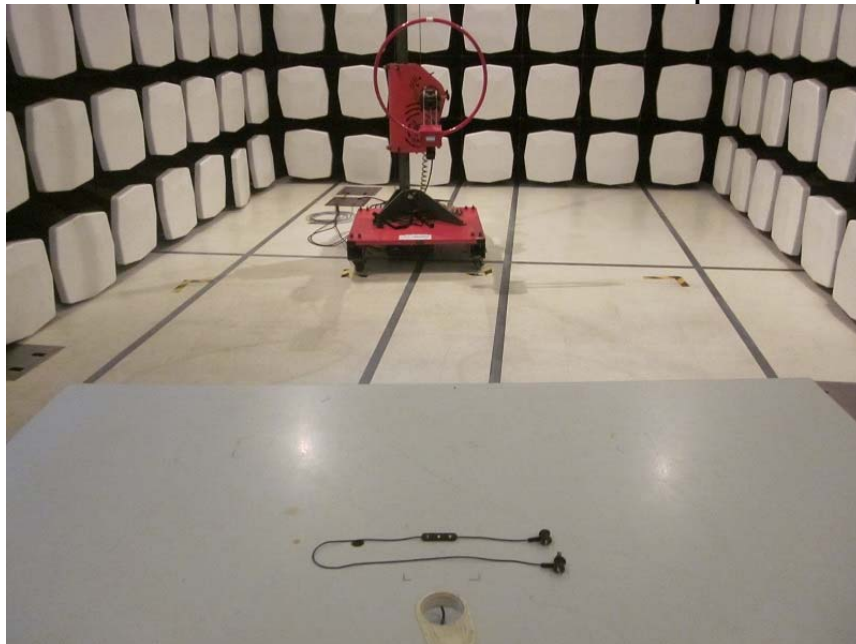

**Measurement of Radiated Emission Test Set Up**

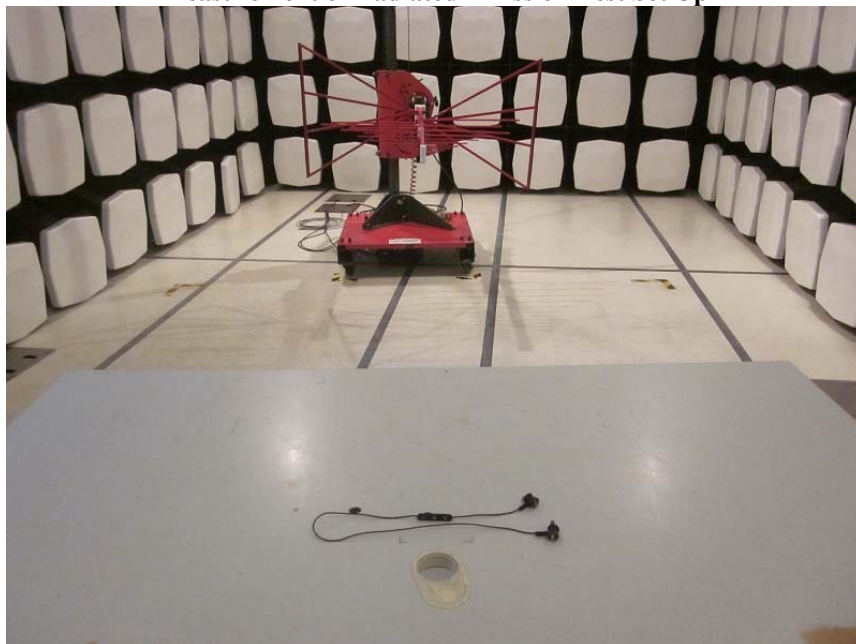

**STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.




## **STC Test Report**

**Date: 2016-09-12**  
**No.: DM124918**

**Page 86 of 86**

### **Photographs of EUT**

#### **Measurement of Radiated Emission Test Set Up**

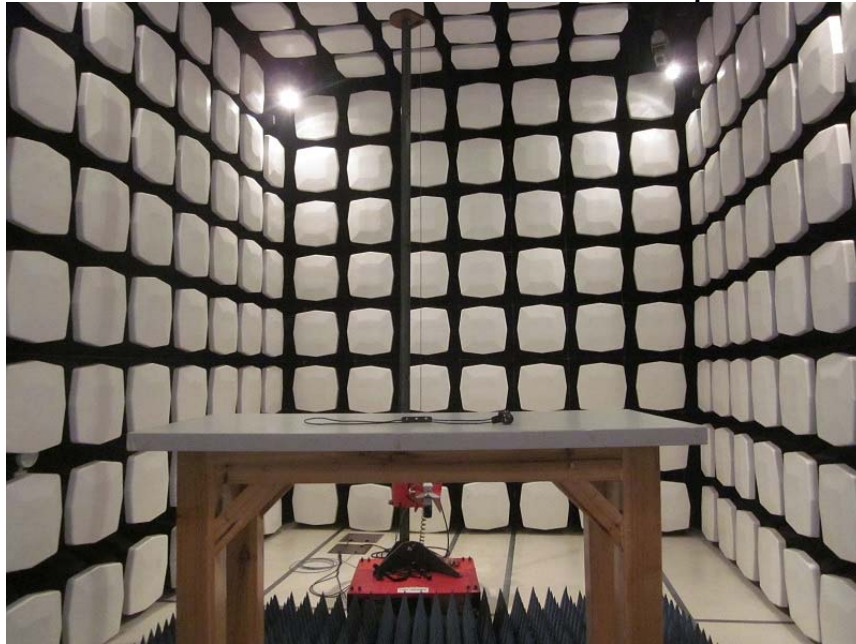

#### **Measurement of Conducted Emission Test Set Up**



**\*\*\*\*\* End of Test Report \*\*\*\*\***

### **STC (Dongguan) Company Limited**

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770)  
Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org

This report shall not be reproduced unless with prior written approval from STC (Dongguan) Company Limited.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage.