



## MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE ! BALTIMORE, MARYLAND 21230-3432 ! PHONE (410) 354-3300 ! FAX (410) 354-3313

December 22, 2003

**NexGen City LP**  
**1680 N. Glenville Suite 100**  
**Richardson Texas 75081**

Reference: **NexPod V.01 version A**  
FCC ID:RL7-SKU102-001-0A

Dear Mr. David Meitzen,

Enclosed is the EMC Test Report for the **NexGen City LP**. The **NexGen City LP** **NexPod V.01 version A** was tested to the requirements of the FCC Rules and Regulations, Section 15.247, of Title 47 of the CFR, for a Part 15 Transmitter.

Thank you for using the testing services of MET Laboratories. If you have any questions regarding these results or if MET can be of further assistance to you, please feel free to contact me. We appreciate your business and look forward to working with you again soon.

Kindest Regards,  
MET LABORATORIES, INC.

**Marianne T. Bosley**  
Documentation Department

Enclosures: (EMC14840-FCC247.rpt)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc. While use of the National Voluntary Laboratory Accreditation Program (NVLAP) letters or the NVLAP Logo in this report reflects the MET Accreditation under the NVLAP Program, these letters, logo, or Statements do not claim product endorsement by NVLAP or any Agency of the U.S. Government.



NexGen City LP

NexPod V.01 Version A

FCC ID: RL7-SKU102-001-0A

December 22, 2003

## **Electro-Magnetic Compatibility**

### **Test Report**

for the

**NexGen City LP**  
**NexPod V.01 Version A**

#### **Tested Under**

FCC Part 15 Subpart C  
Section 15.247  
Title 47 of the CFR  
for Intentional Radiators

## **MET REPORT: EMC14840-FCC247**

December 22, 2003

#### **PREPARED FOR:**

**NexGen City LP**  
**1680 N. Glenville Suite 100**  
**Richardson Texas 75081**

#### **PREPARED BY:**

MET Laboratories, Inc.  
914 West Patapsco Avenue  
Baltimore, Maryland 21230-3432

---

**Copyright 2004, MET Laboratories, Inc.**

This report shall not be reproduced except in full, without the express written consent of MET Laboratories, Inc., nor shall this report, or any copy thereof be provided to a competitor of MET Laboratories, Inc.



## Electro-Magnetic Compatibility

### Test Report for the

**NexGen City LP  
NexPod V.01 Version A**

### Tested Under

FCC Part 15 Subpart C  
Section 15.247  
Title 47 of the CFR  
for Intentional Radiators

**MET REPORT: EMC14840-FCC247**

December 22, 2003

### PREPARED FOR:

**NexGen City LP  
1680 N. Glenville Suite 100  
Richardson Texas 75081**

A handwritten signature in blue ink, appearing to read "Len Knight".

---

Len Knight  
EMC LAB MANAGER

A handwritten signature in blue ink, appearing to read "Marianne T. Bosley".

---

Marianne T. Bosley  
Report Writer

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Part 15, Section 15.247, of the FCC Rules under normal use and maintenance.

A handwritten signature in blue ink, appearing to read "Liming Xu".

---

Liming Xu  
Project Engineer



## Table of Contents

I.	Executive Summary .....	1
A.	Purpose of Test .....	2
B.	Executive Summary .....	2
II.	General .....	3
A.	Test Site .....	4
B.	Description of Test Sample .....	4
C.	General Test Setup .....	4
D.	Mode of Operation .....	4
E.	Modifications .....	7
F.	Disposition of Test Sample .....	7
III.	Antenna Requirements .....	8
IV.	Emissions Requirements .....	10
A.	Conducted Emissions .....	11
B.	Radiated Emissions - General .....	17
V.	Bandwidth & Bandedge Requirements .....	20
VI.	Peak Output Power Requirements .....	26
A.	Peak Output Power (Conducted) .....	27
B.	RF Exposure Requirements .....	29
VII.	Spurious Emissions - Radiated & RF Conducted - Requirements .....	30
VIII.	Power Spectral Density Requirements .....	37
IX.	Test Equipment .....	41
X.	Certification Label & User's Manual Information .....	43
A.	Certification Information .....	44
B.	Label and User's Manual Information .....	47



## List of Tables

Table 1.	Summary of Test Results .....	v
Table 2.	Summary of Test Data .....	v
Table 3.	EUT Compliance .....	2
Table 4.	References .....	2
Table 5.	Limits for Conducted Emissions from Intentional Radiators .....	11
Table 6.	Conducted Emissions Voltage-AC Power Phase, Worst Case Summary .....	13
Table 7.	Conducted Emissions Voltage-AC Power Neutral, Worst Case Summary .....	15
Table 8.	Limits for Spurious Emissions from Intentional Radiators .....	17
Table 9.	Radiated Emissions (Spurious) Results - 30MHz - 1GHz .....	19
Table 10.	Test Equipment for Intentional Radiators - §15.247 .....	42

## List of Figures

Figure 1. Test Configuration .....	5
Figure 2. FCC Intentional Radiators Tests Setup Photo .....	12



## List of Terms and Abbreviations

<b>AC</b>	Alternating Current
<b>Cal</b>	Calibration
<b>d</b>	Measurement Distance
<b>dB</b>	Decibels
<b>dB<math>\mu</math>A</b>	Decibels above one <b>microamp</b>
<b>dB<math>\mu</math>V</b>	Decibels above one <b>microvolt</b>
<b>dB<math>\mu</math>A/m</b>	Decibels above one <b>microamp per meter</b>
<b>dB<math>\mu</math>V/m</b>	Decibels above one <b>microvolt per meter</b>
<b>DC</b>	Direct Current
<b>E</b>	Electric Field
<b>DSL</b>	Digital Subscriber Line
<b>ESD</b>	Electrostatic Discharge
<b>EUT</b>	Equipment Under Test
<b>f</b>	Frequency
<b>FCC</b>	Federal Communications Commission
<b>CISPR</b>	Comite International Special des Perturbations Radioelectriques (International Special Committee on Radio Interference)
<b>GRP</b>	Ground Reference Plane
<b>H</b>	Magnetic Field
<b>HCP</b>	Horizontal Coupling Plane
<b>Hz</b>	Hertz
<b>IEC</b>	International Electrotechnical Commission
<b>kHz</b>	kilohertz
<b>kPa</b>	kilopascal
<b>kV</b>	kilovolt
<b>LISN</b>	Line Impedance Stabilization Network
<b>MHz</b>	Megahertz
<b><math>\mu</math>H</b>	microhenry
<b><math>\mu</math>F</b>	microfarad
<b><math>\mu</math>s</b>	microseconds
<b>NEBS</b>	Network Equipment-Building System
<b>OATS</b>	Open Area Test Site
<b>PRF</b>	Pulse Repetition Frequency
<b>RF</b>	Radio Frequency
<b>RMS</b>	Root-Mean-Square
<b>TWT</b>	Traveling Wave Tube
<b>V/m</b>	Volts per meter
<b>VCP</b>	Vertical Coupling Plane



## Summary of Test Results

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart C, Section 15.247. All tests were conducted using measurement procedure ANSI C63.4-1992.

Type of Submission/Rule Part:	Original Filing
EUT:	NexPod V.01 Version A
FCC ID:	RL7-SKU102-001-0A
Equipment Code:	DSSS
RF Power output:	0.32W Conducted
Frequency Range (MHz):	2.410 GHz - 2.470 GHz

**Table 1.**

## Summary of Test Data

Name of Test	FCC Rule Part/Section	Results
Conducted Emissions	15.207(a)	Complies
Radiated Emissions	15.209(a)	Complies
Bandwidth & Channelization	15.247(a)	Complies
Output Power and RF Exposure	15.247(b)	Complies
Spurious Emissions - Radiated and RF Conducted	15.247(c)	Complies
Power Spectral Density	15.247(d)	Complies

**Table 2.**



NexGen City LP

NexPod V.01 Version A

FCC ID: RL7-SKU102-001-0A

December 22, 2003

---

## I. Executive Summary

---



## I. Executive Summary

### A. Purpose of Test

An EMC evaluation to determine compliance of the EUT with the requirements of Part 15, Section 15.247, was conducted. (All references are to the most current version of Title 47 of the Code of Federal Regulations in effect). In accordance with §2.1033, the following data is presented in support of the Certification of the **NexGen City LP**. should retain a copy of this document should be kept on file for at least five years after the manufacturing of the Marconi has been **permanently** discontinued.

### B. Executive Summary

The following tests were performed in accordance with **NexGen City LP**.

Specifications	Description	Compliance
Title 47 of the CFR, Part 15, Subpart C, §15.207(a)	Electromagnetic Compatibility - Conducted Emissions for an Intentional Radiator	Complies
Title 47 of the CFR, Part 15, Subpart C, §15.209(a)	Electromagnetic Compatibility - Radiated Emissions for an Intentional Radiator	Complies
Title 47 of the CFR, Part 15, Subpart C, §15.247(a)	Electromagnetic Compatibility - Bandwidth & Channelization Requirements	Complies
Title 47 of the CFR, Part 15, Subpart C, 15.247(b)	Electromagnetic Compatibility - Output Power and RF Exposure Requirements	Complies
Title 47 of the CFR, Part 15, Subpart C, §15.247(c)	Electromagnetic Compatibility - Spurious Emissions Requirements - Radiated and RF Conducted	Complies
Title 47 of the CFR, Part 15, Subpart C, §15.247(d)	Electromagnetic Compatibility - Power Spectral Density	Complies

**Table 3. EUT Compliance**

The EUT, as supplied to MET Laboratories, complied with the requirements stated in this test report.

References	Description
ANSI-C63.4:1992	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
FCC 47CFR, Chapter 1, Part 2	Title 47 Code of Federal Regulations Part 2 - Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
FCC 47CFR, Chapter 1, Part 15	Title 47 Code of Federal Regulations Part 15 - Radio Frequency Devices
FCC DA 00-705	Public Notice - Filing and Measurement Guidelines for DSSS Systems

**Table 4. References**



---

NexGen City LP

NexPod V.01 Version A

FCC ID: RL7-SKU102-001-0A

December 22, 2003

---

---

## II. General

---



## II. General

### A. Test Site

All testing was conducted at MET Laboratories, Inc., 914 West Patapsco Avenue, Baltimore, Maryland 21230-3432. Radiated Emissions measurements were performed inside of a Semi Anechoic Chamber. In accordance with §2.948(a)(2), a complete site description is filed with the Commission's Laboratory in Columbia, Maryland. MET Laboratories has been accredited by the National Voluntary Laboratory Accreditation Program (Lab Code: 100273-0)

### B. Description of Test Sample

Broadband wireless transceiver for wireless infrastructure micro-cell for use by "first responders". Data transmission to "first responder" vehicles supporting VoIP, Streaming video and biometric wireless applications.

### C. General Test Setup

The EUT was tested in the configuration shown on the following pages.

### D. Mode of Operation

Broadband wireless transceiver for wireless infrastructure micro-cell for use by "first responders". Data transmission to "first responder" vehicles supporting VoIP, Streaming video and biometric wireless applications.  
only a single mode of operation



NexGen City LP

NexPod V.01 Version A

FCC ID: RL7-SKU102-001-0A

December 22, 2003

## II. General

### E. Modifications

N/A

### F. Disposition of Test Sample

Returned to:

NexGen City LP  
1680 N. Glenville Suite 100  
Richardson Texas 75081



---

### III. Antenna Requirements

---



### III. Antenna Requirements

#### Antenna Evaluation Criteria

**Requirements:** The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- (a) Antenna be permanently attached to the unit.
- (b) Antenna must use a unique type of connector to attach to the EUT.
- (c) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

**Results:**

The N connector requires special tools and installation knowledge to effect the proper connection and all tested antennas use the connector. The N connector is unique.

Antenna is Permanently Mounted

When each device is deployed the antennas are permanently mounted. The mounting is on municipal owned power poles and light poles located such that access is only by special trucks with lifts owned by the city. In addition all antennas mounting hardware is locked down with Locktite and special sealant. To remove the antenna will destroy the mounting and connector.

\* see installation guide provided by NexGen

#### Antenna list:

Antenna	Model #	Gain dBi	RF conducted power to antenna	photo #
Hyper Gain	HG2407 U	6	25 dBm	0
Hyper Gain	HG2409 MU	8	25 dBm	1
OD Series	OD12	12	25 dBm	2
OD Series	OD9	9	25 dBm	3
Corner Reflector	SCR14-2400	14	25 dBm	4
Body Mount	RM5-2400N	5	25 dBm	5
Parabolic	PA18-2400	18	25 dBm	6



NexGen City LP

NexPod V.01 Version A

FCC ID: RL7-SKU102-001-0A

December 22, 2003



Photo #0



Photo # 1



Photo #2



Photo #3



Photo #4



Photo 5



Photo 6



---

## IV. Emissions Requirements

---



## IV. Emissions Requirements

### A. Conducted Emissions

**Requirements:** The EUT shall meet the limits shown below:

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5	56	46
5 - 30	60	50

**Table 5. Limits for Intentional Radiators from FCC Part 15 §15.207(a)/CISPR 22**

\*Decreases with the logarithm of the frequency.

**Test Equipment:** Test equipment utilized in this test is located in Section IX of this report.

**Test Configuration:** The EUT was installed inside a shielded enclosure. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the shielded enclosure, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50 Ω/50 μH Line Impedance Stabilization Network (LISN).

**Procedure:** The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with ANSI C63.4-1992 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHZ." The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 Ω/50 μH LISN as the input transducer to an EMC/Field Intensity Meter. The tests were conducted in a RF shielded enclosure.

**Results:** The EUT complies with the Conducted Emissions Limits of 15.207(a).

**Test Engineer:** **Norman Daquioag**

**Test Date:** **December 18, 2003**



#### IV. Emissions Requirements

**Subject:** Conducted Emissions - Voltage, Data Plot

**Port:** AC Power Phase

**Requirements:** FCC Part 15 Subpart C, §15.207(a)/CISPR 22

**Results:** Equipment meets the specifications of §15.207(a)/CISPR 22(B). Plot appears on the following page.

Line Under Test	FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Pass/Fail QP	MARGIN (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Pass/Fail AVG	MARGIN (dB) AVG
Phase A	0.192	55.2	79	PASS	-23.8	48.8	66	PASS	-17.2
Phase A	0.255	51.9	79	PASS	-27.1	43.5	66	PASS	-22.5
Phase A	0.318	51.1	79	PASS	-27.9	41.2	66	PASS	-24.8
Phase A	0.383	50.6	79	PASS	-28.4	39.5	66	PASS	-26.5
Phase A	0.509	53.2	73	PASS	-19.8	42	60	PASS	-18
Phase A	0.57	54.4	73	PASS	-18.6	42.3	60	PASS	-17.7
Phase A	0.636	52.4	73	PASS	-20.6	40.6	60	PASS	-19.4
Phase A	0.767	49.8	73	PASS	-23.2	39.9	60	PASS	-20.1
Phase A	0.825	49.8	73	PASS	-23.2	39.7	60	PASS	-20.3
Phase A	0.892	48.9	73	PASS	-24.1	40.6	60	PASS	-19.4


Table 6. Conducted Emissions Voltage, AC Power Phase line , Worst Case Emissions Summary

Test Engineer: Norman Daquioag


Test Date: December 18, 2003



#### IV. Emissions Requirements

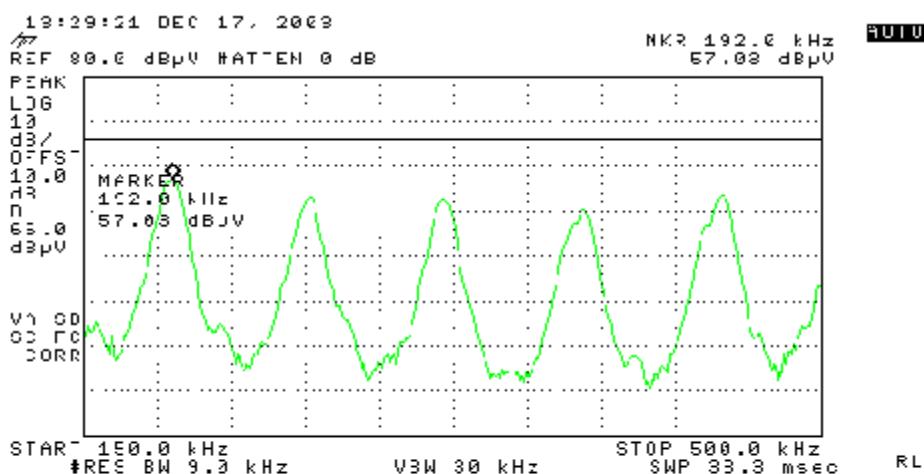

## NexGen City #14840, Phase Line Plot, 150kHz to 500kHz With Battery

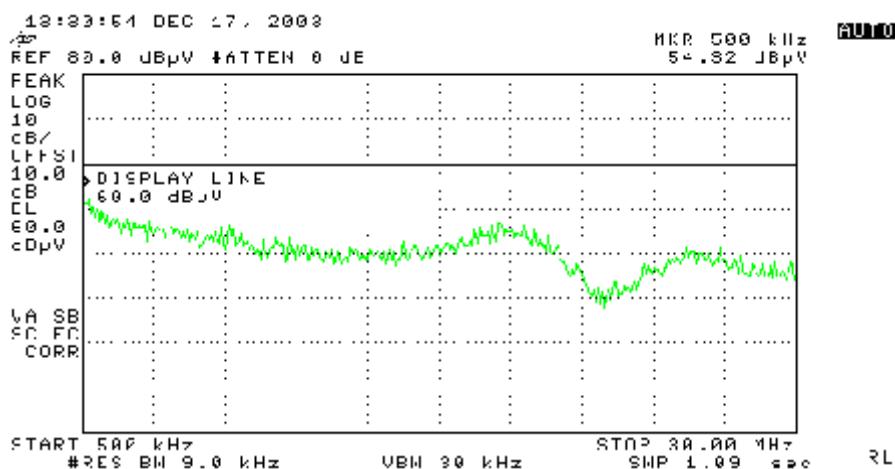

## NexGen City #14840, Phase Line Plot, 500kHz to 30MHz With Battery

## Conducted Emissions Voltage, AC Power Phase line plot

**Test Engineer:** **Norman Daquioag**

**Test Date:** December 18, 2003



#### IV. Emissions Requirements

Subject: Conducted Emissions - Voltage, Data Plot

Port: AC Power Neutral

Requirements: FCC Part 15 Subpart C, §15.207(a)/CISPR 22


Results: Equipment meets the specifications of §15.207(a)/CISPR 22(B). Plot appears on the following page.

Line Under Test	FRE Q. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Pass/Fail QP	MARGIN (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Pass/Fail AVG	MARGIN (dB) AVG
-----------------	--------------	-------------------------------	-----------------	--------------	----------------	--------------------------------	------------------	---------------	-----------------


Neutral 1	0.19	55.6	79	PASS	-23.4	48.8	66	PASS	-17.2
Neutral 9	0.44	51	79	PASS	-28	35.9	66	PASS	-30.1
Neutral	0.51	53.4	73	PASS	-19.6	42.2	60	PASS	-17.8
Neutral	0.57	54.7	73	PASS	-18.3	43.4	60	PASS	-16.6
Neutral	0.63	52.4	73	PASS	-20.6	40.5	60	PASS	-19.5
Neutral	0.7	50.8	73	PASS	-22.2	39.4	60	PASS	-20.6
Neutral	0.82	49.7	73	PASS	-23.3	39.5	60	PASS	-20.5
Neutral	0.89	48.8	73	PASS	-24.2	40.2	60	PASS	-19.8
Neutral	0.95	48.3	73	PASS	-24.7	38.8	60	PASS	-21.2
Neutral 1	1.14	48.1	73	PASS	-24.9	35	60	PASS	-25

Table 7. Conducted Emissions Voltage, AC Power Neutral, Worst Case Emissions Summary

Test Engineer: Norman Daquioag  
Test Date: December 18, 2003

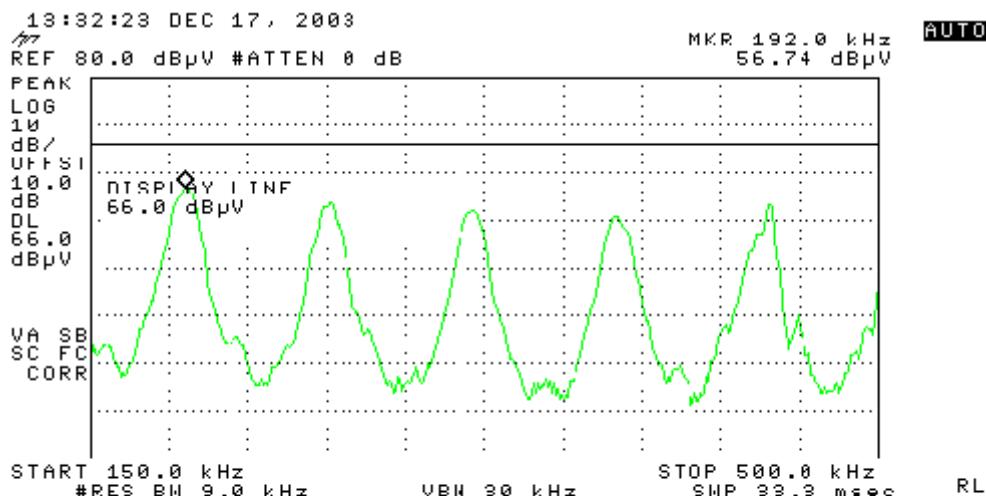


## NexGen City #14840, Neutral Line Plot, 150kHz to 500kHz With Battery

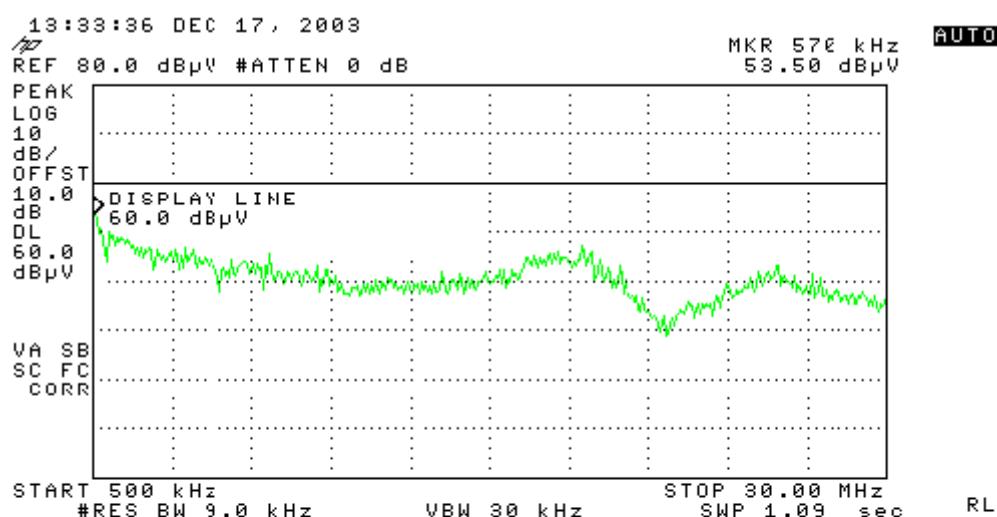

## NexGen City #14840, Neutral Line Plot, 500kHz to 30MHz With Battery

## Conducted Emissions Voltage, AC Power Neutral line plot

**Test Engineer:** Norman Daquioag  
**Test Date:** December 18, 2003

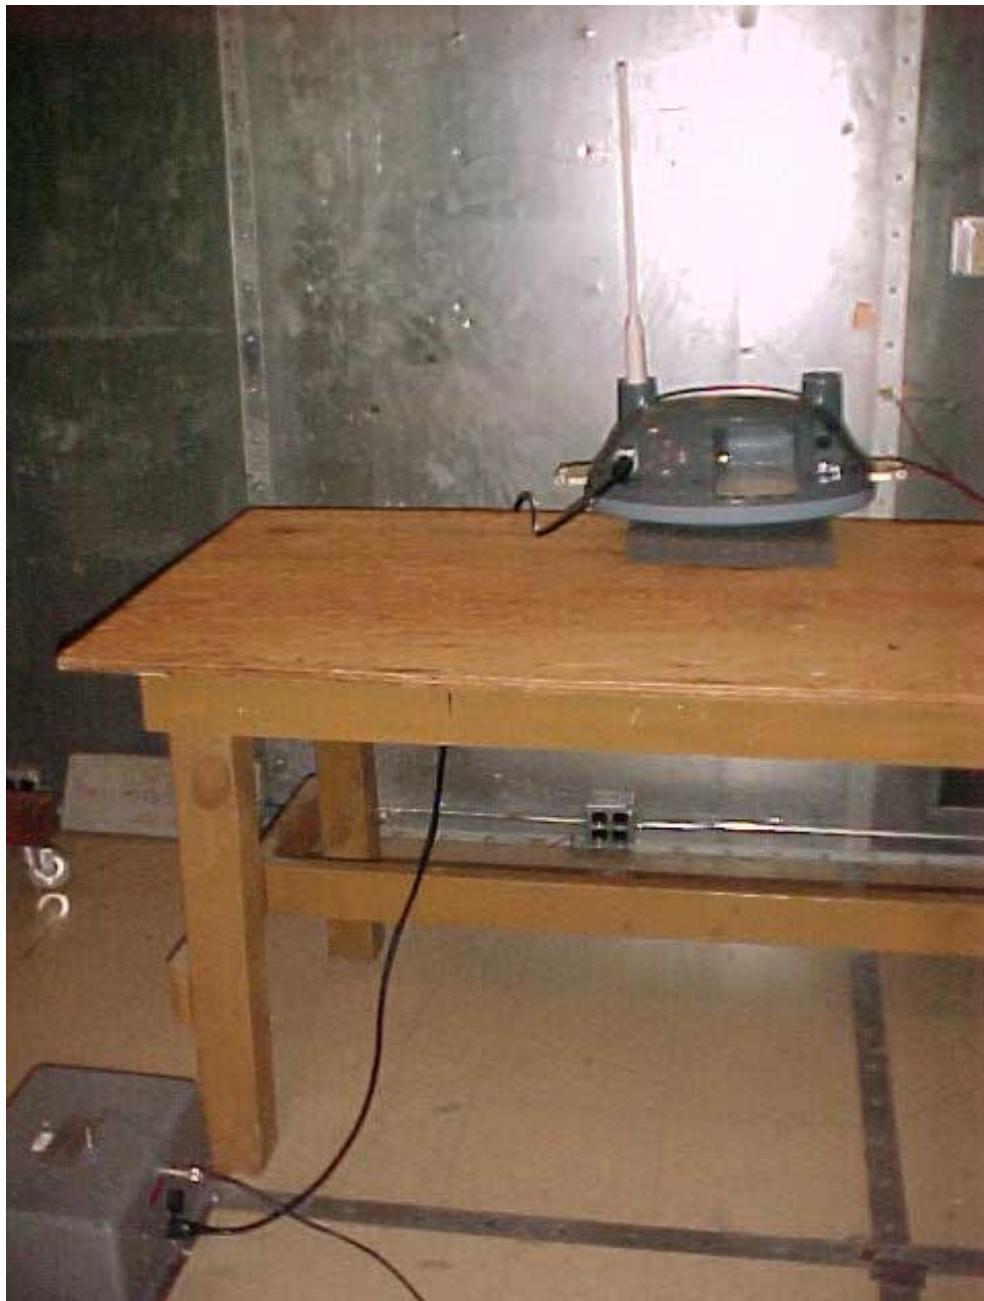

**Conducted Emissions Voltage, Set up Photo**



## IV. Emissions Requirements

### B. Radiated Emissions - General

Requirements: The EUT shall meet the limits shown below:

Frequency (MHz)	Limit (dB $\mu$ V/m) @ 3 m
30 - 88	100**
88 - 216	150**
216 - 960	200**
Above 960	500

Table 8. Limits for Spurious Emissions from Intentional Radiators from FCC Part 15 § 15.209(a)

\*\* Except as provided in §15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. Sections 15.231 and 15.241.

Test Equipment: Test equipment for this test is located in Section IX of this report.

Test Conditions: The EUT was placed on a 0.8 m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in a semi-anechoic chamber or OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst case orientation for maximum emissions.

For frequencies from 30 MHz to 1 GHZ, measurements were made using a quasi-peak detector with a 120 kHz bandwidth. For frequencies above 1 GHZ, peak measurements were made with a resolution bandwidth of 1 MHz and a video bandwidth of 1MHz and average measurements were made with RBW = 1MHz and VBW = 10 Hz.

For intentional radiators with a digital device portion which operates below 10 GHZ, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10<sup>th</sup> harmonic of the highest fundamental frequency or to 40 GHZ, whichever is lower.

In accordance with §15.35(b) the limit on the radio frequency emissions as measured using instrumentation with a peak detector function shall be 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.



#### IV. Emissions Requirements

**Procedure:** For pre-scanning, the EMI receiver scanned the frequency range from 30 MHz to 10 GHZ, per §15.33(a)(4) to obtain an Emission profile of the EUT. For each point of measurement, the turntable was rotated, the positions of the interface cables were varied, and the antenna height was varied between 1 m and 4 m, in order to find the maximum radiated Emissions. Measurements were taken using this technique with the antenna in two polarizations: horizontal and vertical.

**Subject:** Radiated Emissions - (Spurious) Electric Field Test Results

**Specification:** FCC Part 15 Subpart B and C, §15.109 and 15.209

Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarit y (H/V)	Antenna HEIG HT (m)	Uncorrected Amplit ude (dBuv)	Antenn a Correct ion Factor (dB) (+)	Cabl e Loss (dB) (-)	Distanc e Correct ion Factor (dB) (-)	Correct ed Amplitu de (dBuv)	Lim i t (dBu v)	Margi n (dB)
30.36	314	H	2.5	18.37	5.09	1.31	10.46	14.31	39	-24.69
30.36	104	V	1	32.42	4.89	1.31	10.46	28.16	39	-10.84
33.709	237	H	1.2	25.7	6.90	1.35	10.46	23.50	39	-15.50
33.709	208	V	1	25	6.70	1.35	10.46	22.60	39	-16.40
255.99 9	174	H	2	21.75	12.96	3.36	10.46	27.61	46.4	-18.79
255.99 9	63	V	1.2	19.81	12.78	3.36	10.46	25.49	46.4	-20.91
415.99 9	214	H	1.4	25.13	15.08	4.20	10.46	33.95	46.4	-12.45
415.99 9	52	V	1.8	20.57	15.00	4.20	10.46	29.31	46.4	-17.09
447.99 6	218	H	1.2	24.03	16.12	4.29	10.46	33.98	46.4	-12.42
447.99 6	200	V	1	16.86	16.42	4.29	10.46	27.11	46.4	-19.29
512	134	H	1.8	14.79	17.40	4.52	10.46	26.25	46.4	-20.15
512	58	V	1.2	14.2	16.90	4.52	10.46	25.16	46.4	-21.24

**Table 9. Radiated Emissions (spurious) Results - 30 MHz - 1 GHZ**

\* There is no detectable emissions between 965.5 MHz and 24.8 GHz

**Results:** The EUT complied with the radiated Emissions limits of Section 15.209(a).

**Test Engineer:** Liming Xu and Norman Daquioag

**Test Date:** December 18, 2003




NexGen City LP

NexPod V.01 Version A

FCC ID: RL7-SKU102-001-0A

December 22, 2003

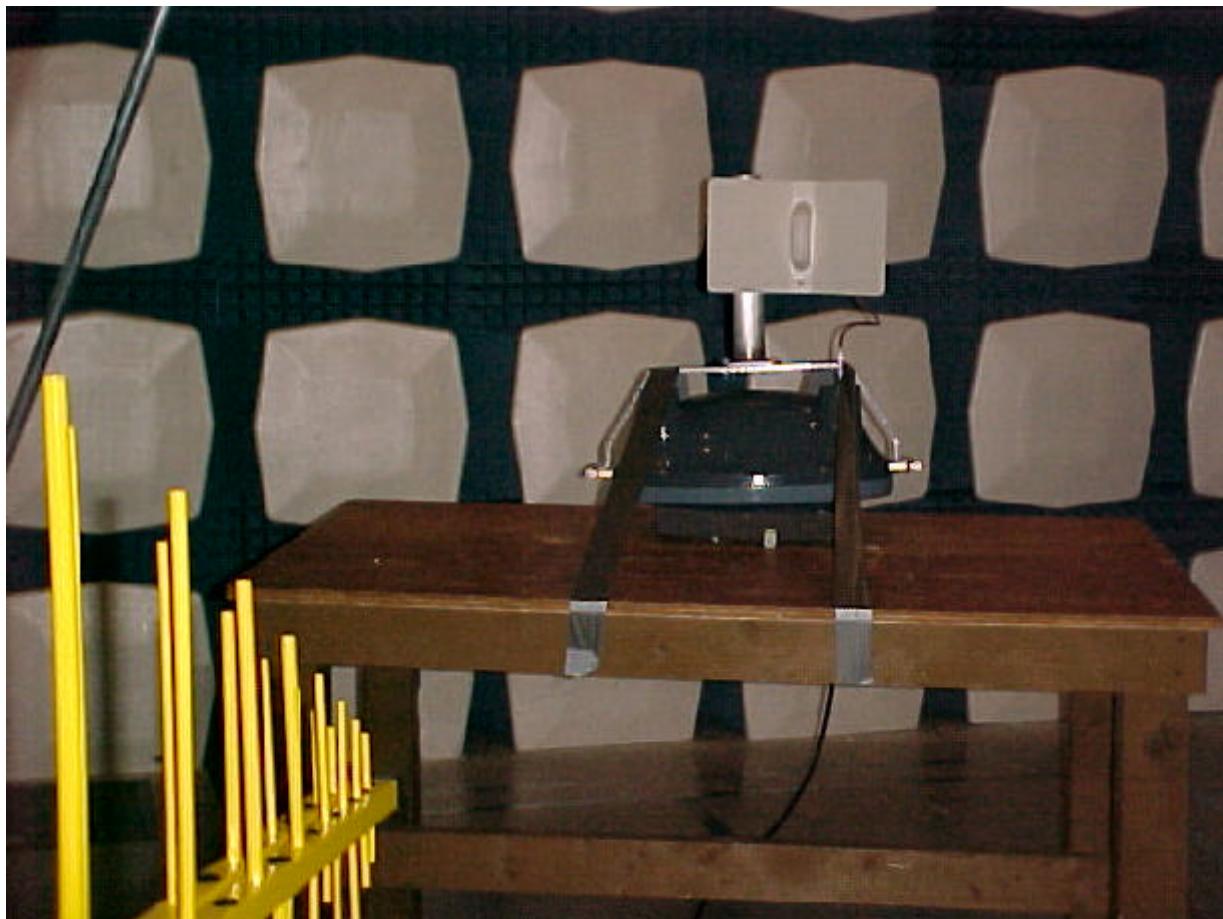



---

## V. Bandwidth & Bandedge Requirements

---



## V. Bandwidth & Bandedge Requirements

### Bandwidth & Bandedge Requirements - §15.247(a)

**Requirements:** For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. For DTS, the minimum 6dB bandwidth shall be at least 500 kHz. For frequency hopping systems, the EUT shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

**Test Equipment:** Test equipment for this test is located in Section IX of this report

#### Test Configuration/

**Procedure:** The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth,  $VBW \geq RBW$ . The 6 dB bandwidth was measured and recorded.


**Results:** Equipment complies with § 15.247 (a). The 6 dB bandwidth was determined from the following plots:

The frequency band was verified by set Lowest channel @ 2.41 GHz  
And Highest channel @ 2.47 GHz

The frequency Range is 2.410 GHz - 2.470 GHz



## V. Bandwidth & Bandedge Requirements

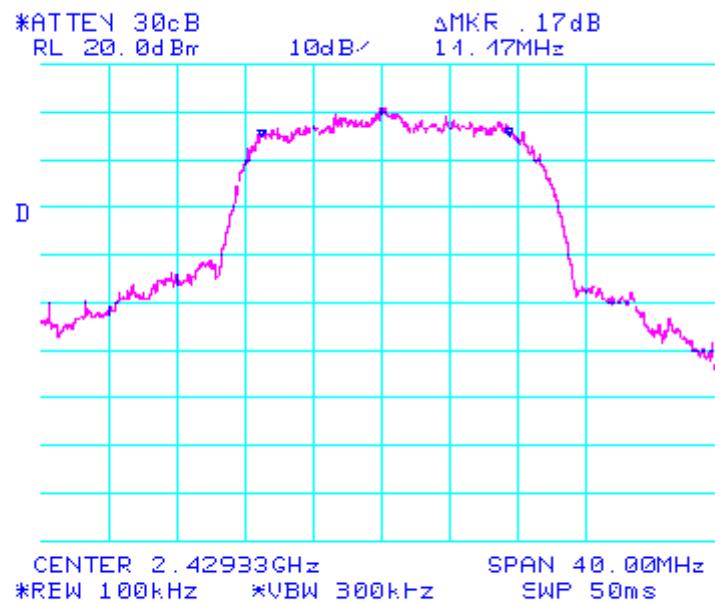

**6 dB Bandwidth**

**Test Engineer:**  
Test Date:

Liming Xu  
December 19, 2003

**NAME OF TEST: RADIATED SPURIOUS EMISSIONS INTO ADJACENT RESTRICTED BAND**


**REQUIREMENTS:** Emissions that fall in the restricted bands (15.205). These emissions must be less than or equal to 500 uV/m (54 dBuV/m).

**TEST PROCEDURE:** An in band field strength measurement of the fundamental Emission using the RBW and detector function required by C63.4-2000 and FCC Rules. The procedure was repeated with an average detector ( RBW = 1MHz and VBW = 10Hz )

Antenna	Model #	Gain dBi (numerical gain)	RF conducted power to antenna	RE ( 3 meters ) @2.483 GHz	RE ( 3 meters ) @2.390 GHz	Limit @ 3 meters dBuV	Setup #
Hyper Gain	HG2407 U	6 ( 4.0 )	25 dBm	47.68 dBuV	42.55 dBuV	54dBuV	0
Hyper Gain	HG2409 MU	8 ( 6.3 )	25 dBm	49.84 dBuV	42.41 dBuV	54dBuV	1
OD Series	OD12	12 (15.9)	25 dBm	47.81 dBuV	44.51 dBuV	54dBuV	2
OD Series	OD9	9 (7.9)	25 dBm	43.69 dBuV	40.22 dBuV	54dBuV	3
Corner Reflector	SCR14-2400	14 (25.1)	25 dBm	49.7 dBuV	44.04 dBuV	54dBuV	4
Body Mount	RM5-2400N	5 (3.2)	25 dBm	50.38 dBuV	42.75 dBuV	54dBuV	5
Parabolic	PA18-2400	18 (63.1)	25 dBm	37.21 dBuV	34.09 dBuV	54dBuV	6

**Test Engineer:** Liming Xu

**Test Date:** December 19, 2003

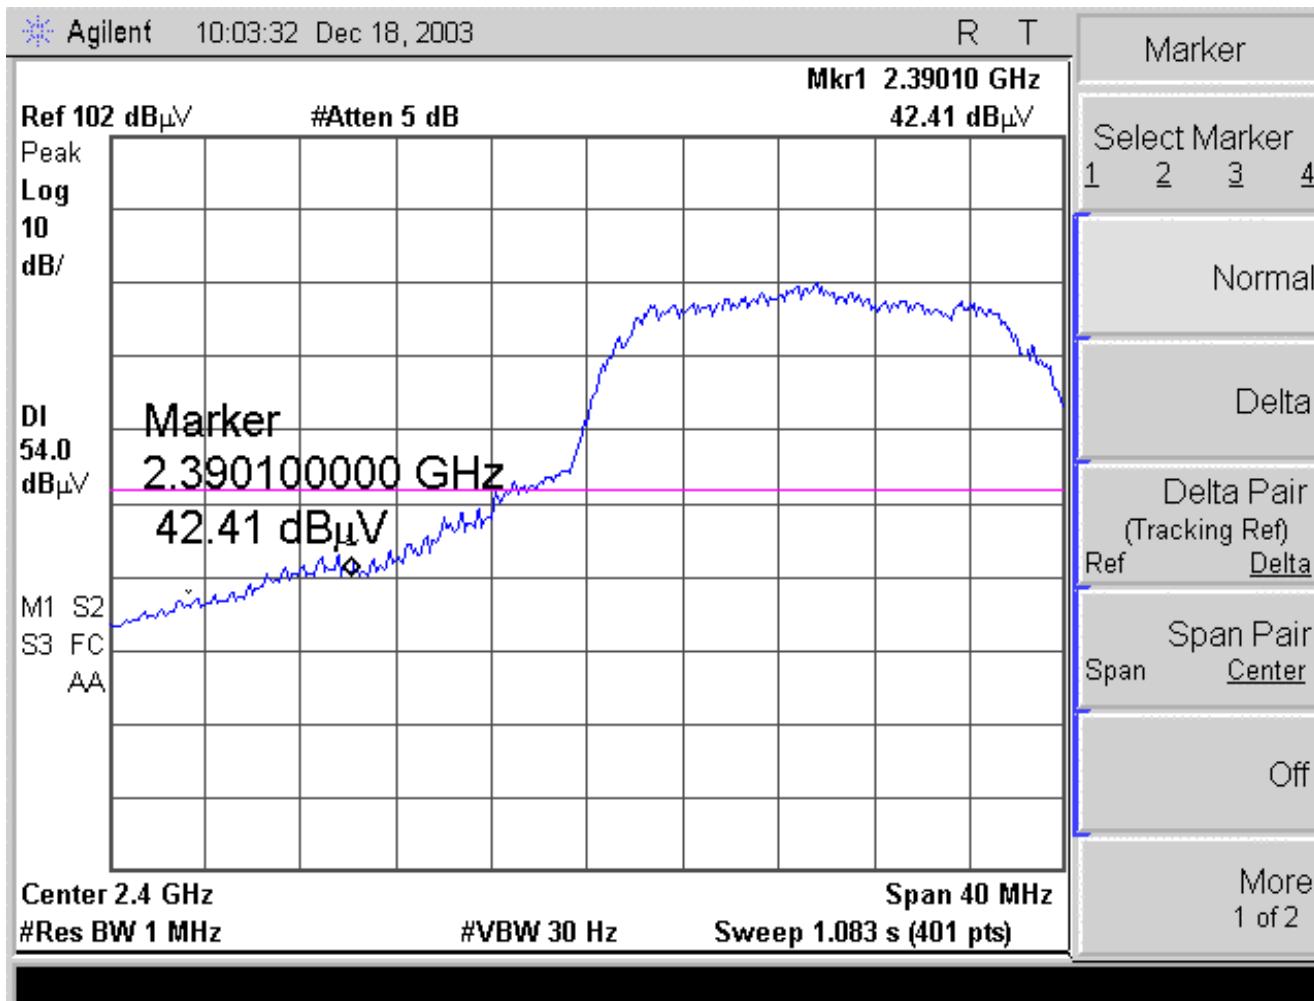


Antenna model : HG2409MU At 2.390 GHz

Test Engineer:

Liming Xu

Test Date:


December 19, 2003

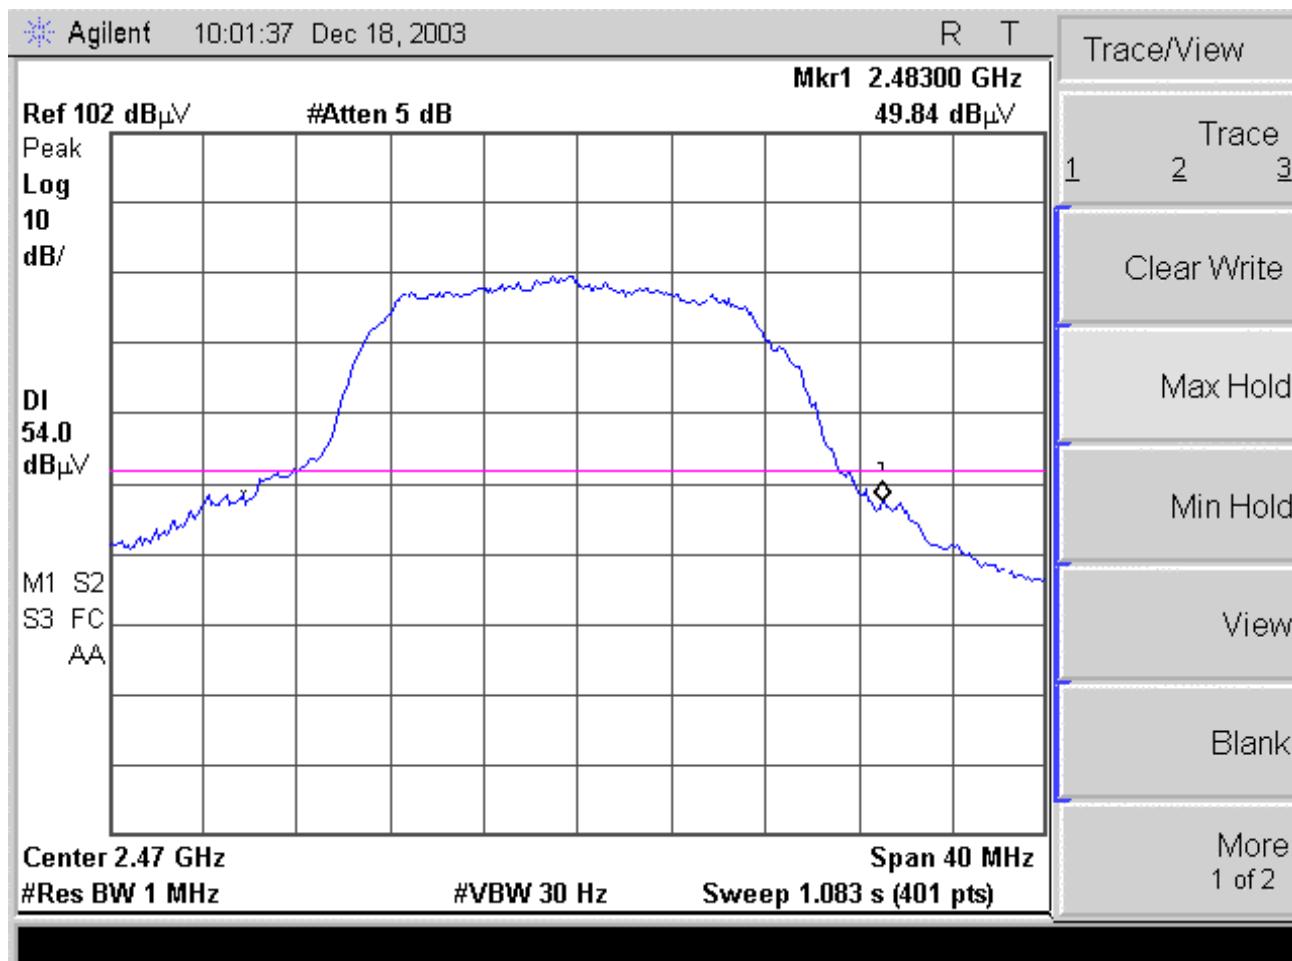

Antenna Model : HG2409MU at 2.483 GHz

Test Engineer:  
Test Date:


Liming Xu  
December 19, 2003

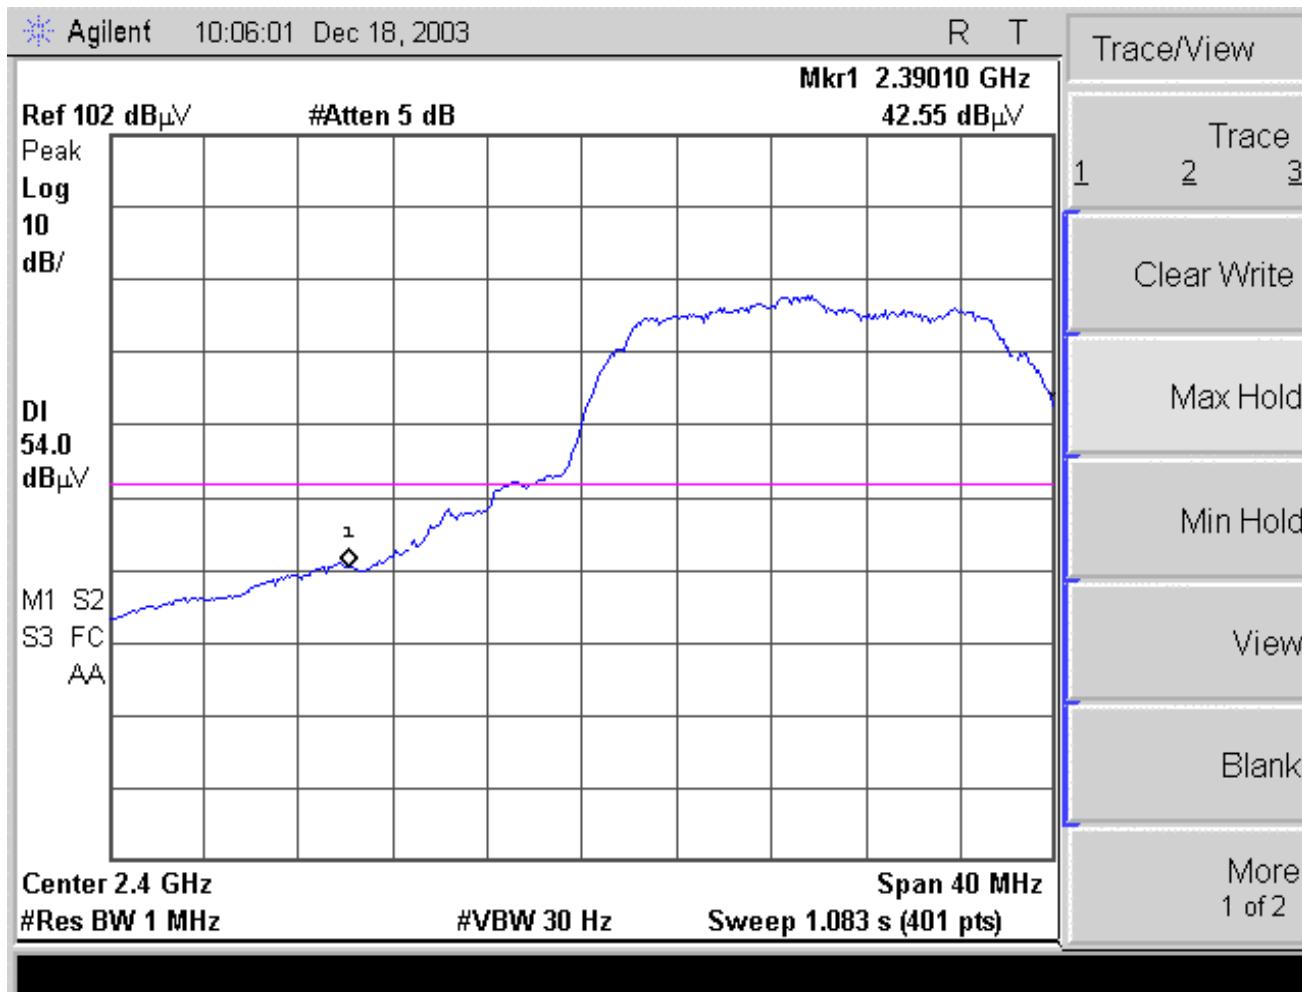

Antenna model : HG2409U At 2.390 GHz


Test Engineer:  
Test Date:

Liming Xu  
December 19, 2003

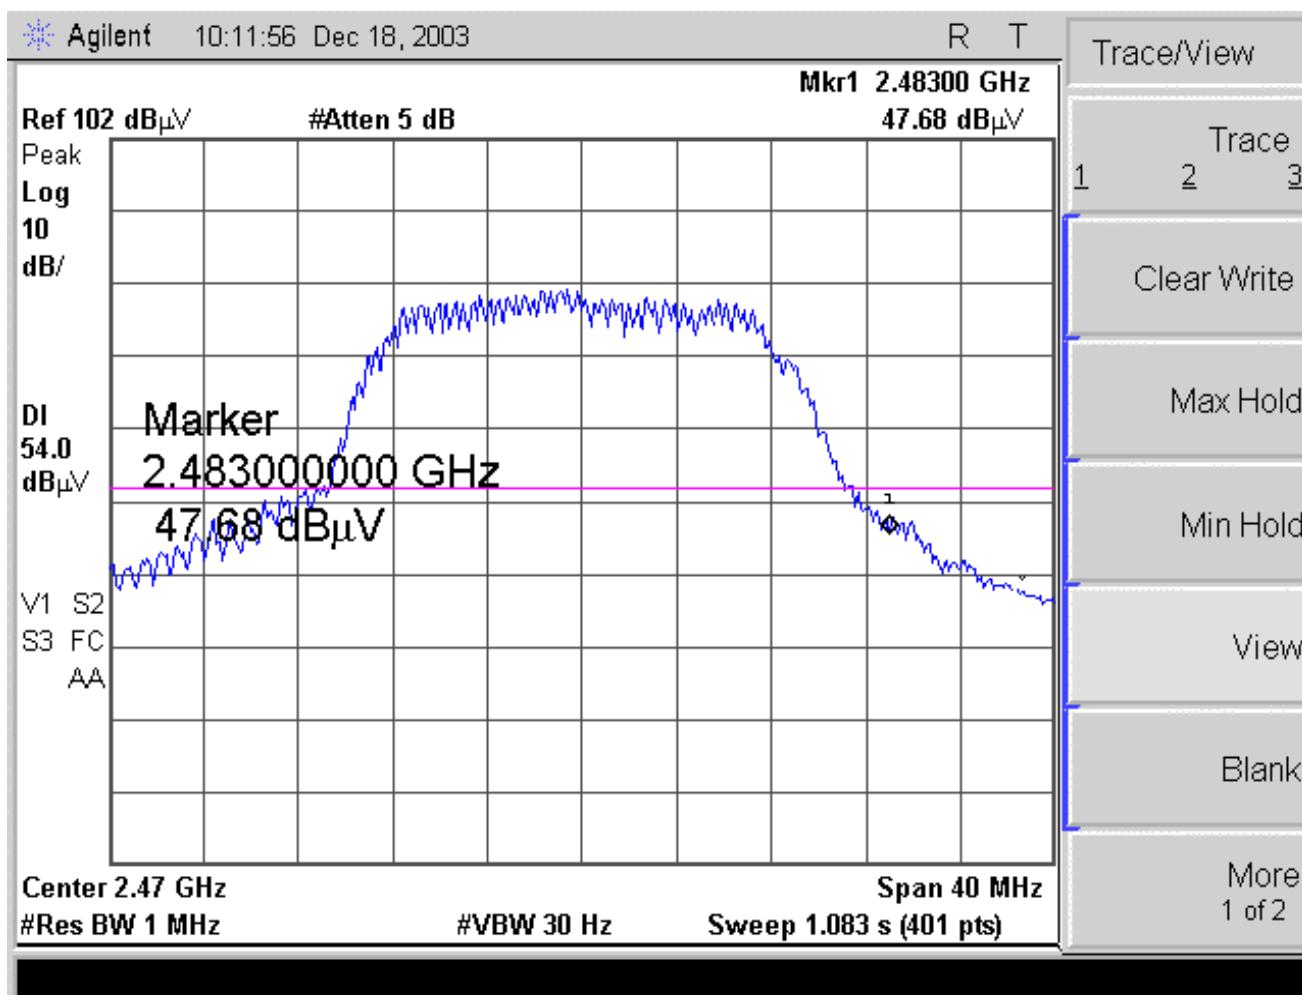


Antenna Model : HG2409U at 2.483 GHz

Test Engineer: Liming Xu  
Test Date: December 19, 2003

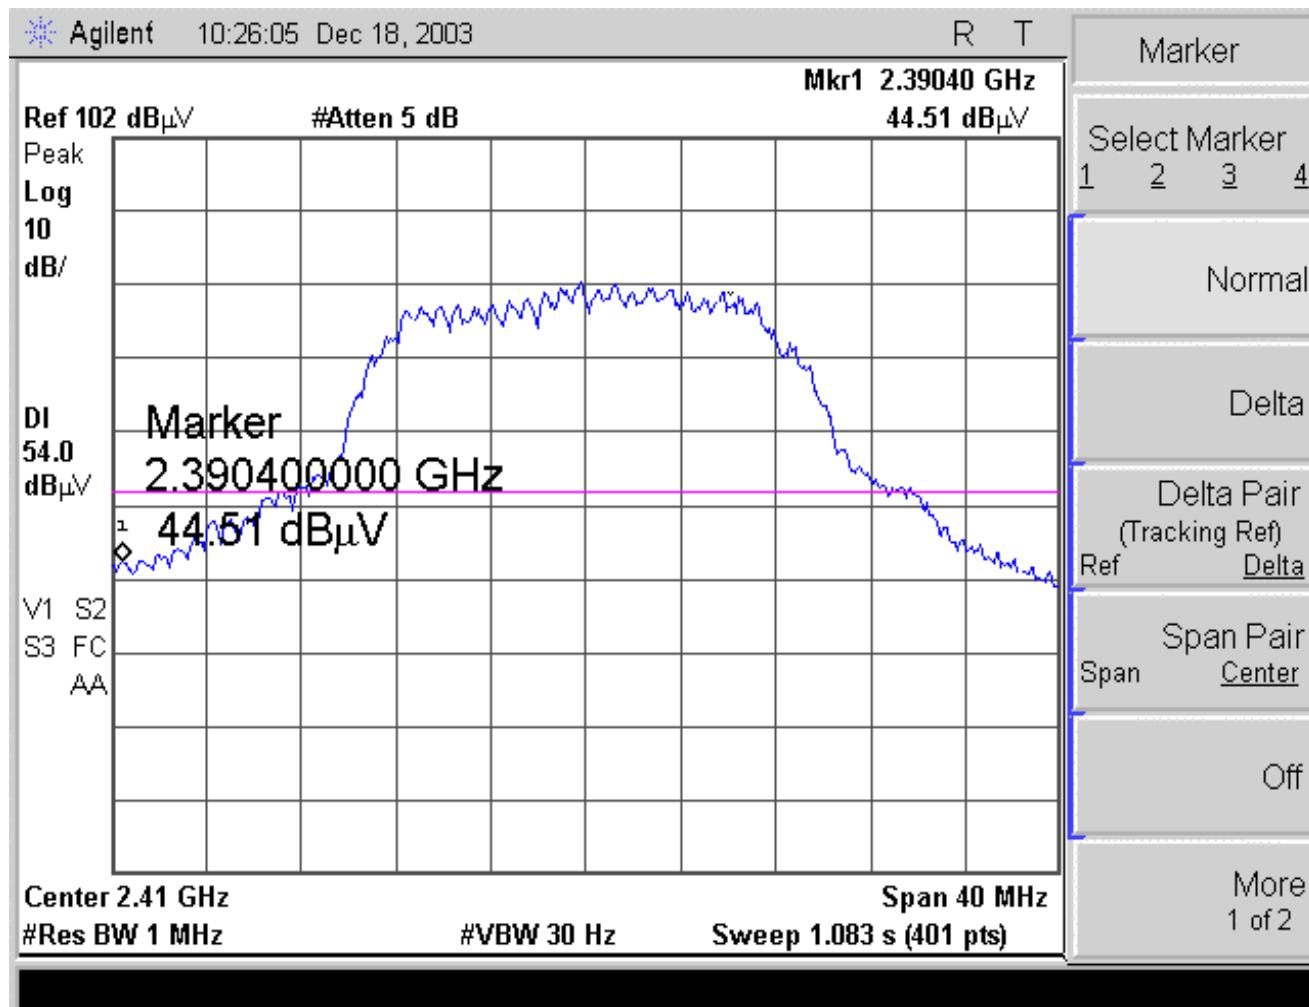


Antenna model : OD12 At 2.390 GHz

Test Engineer: Liming Xu  
Test Date: December 19, 2003

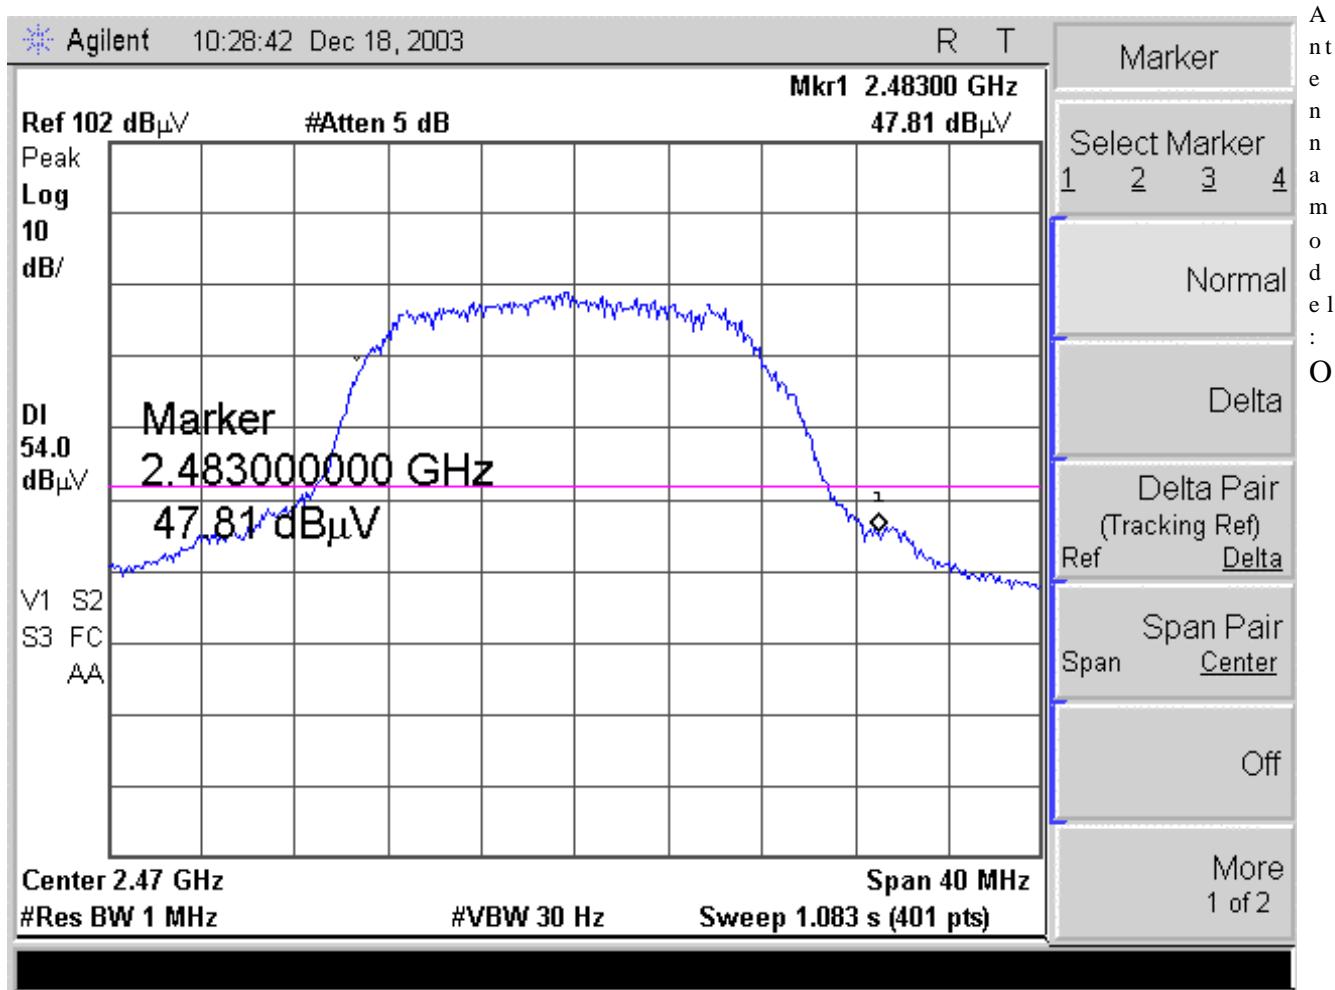

D12 At 2.483 GHz

Test Engineer: Liming Xu  
Test Date: December 19, 2003

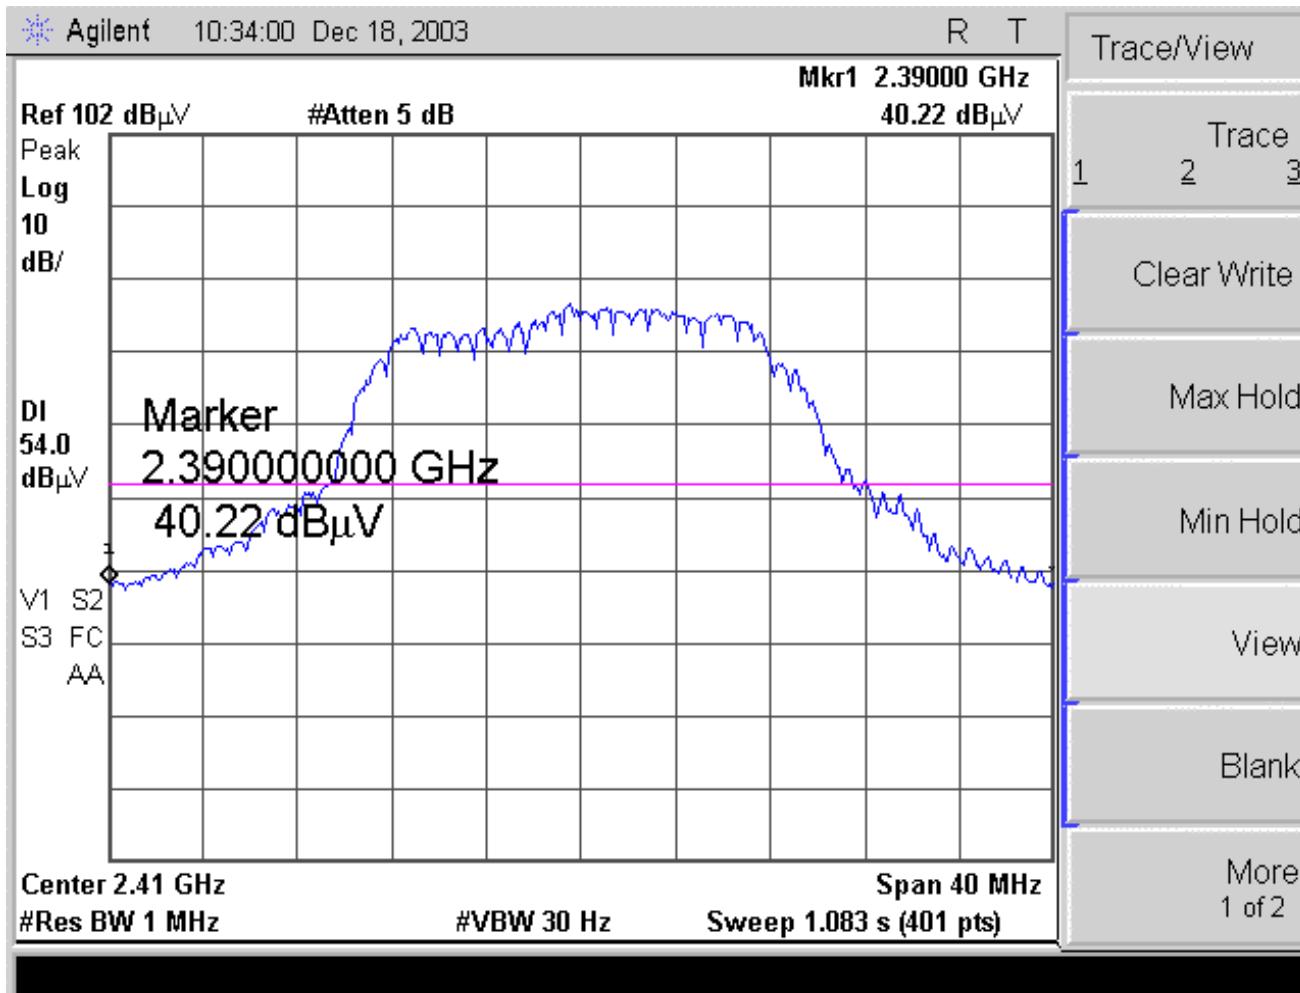


Antenna model : OD9 At 2.390 GHz

Test Engineer:

Liming Xu


Test Date:

December 19, 2003

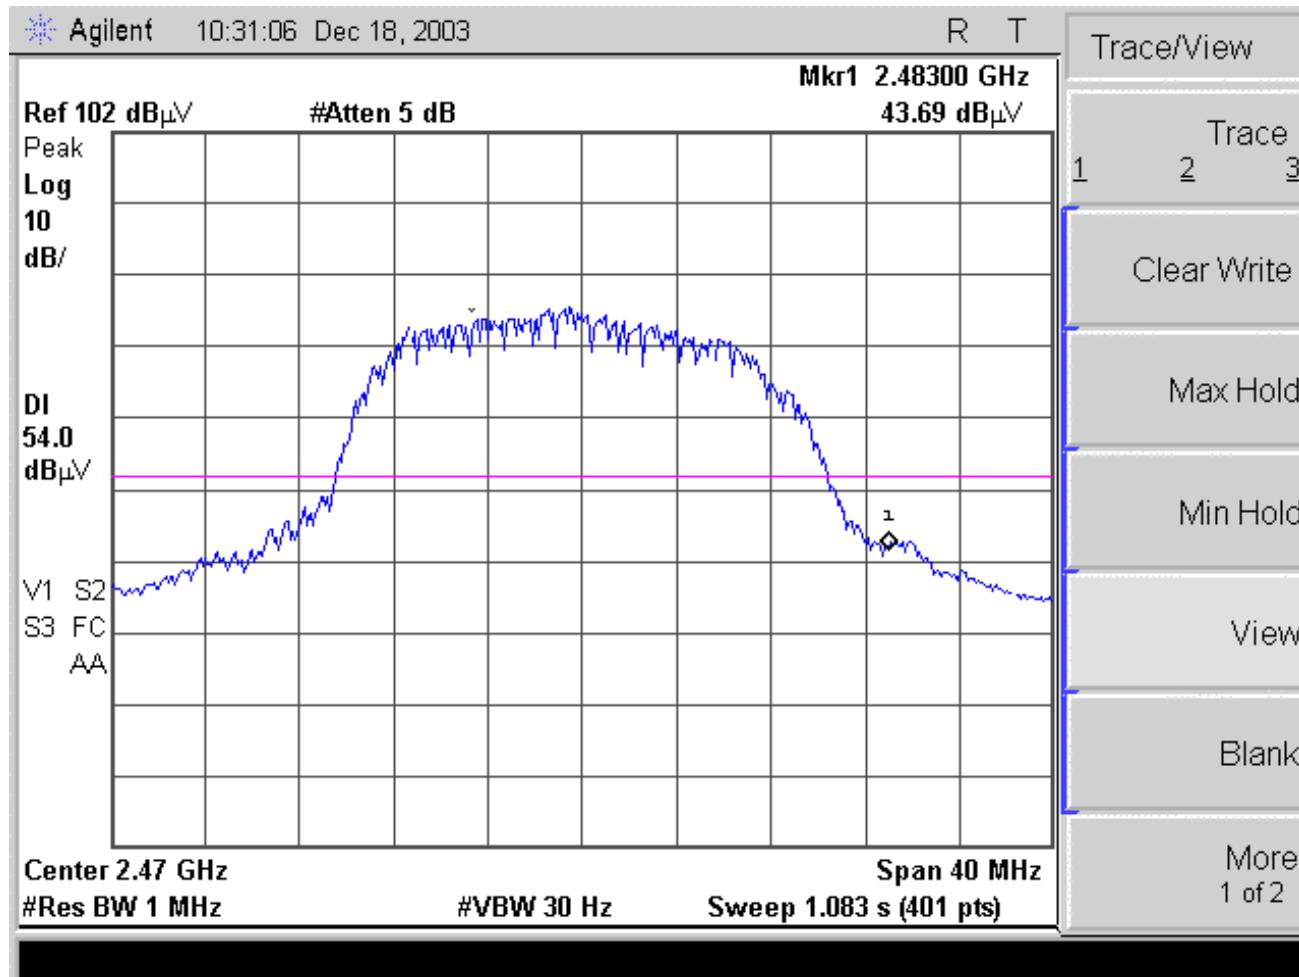


Antenna model : OD9 At 2.483 GHz

Test Engineer: Liming Xu  
Test Date: December 19, 2003

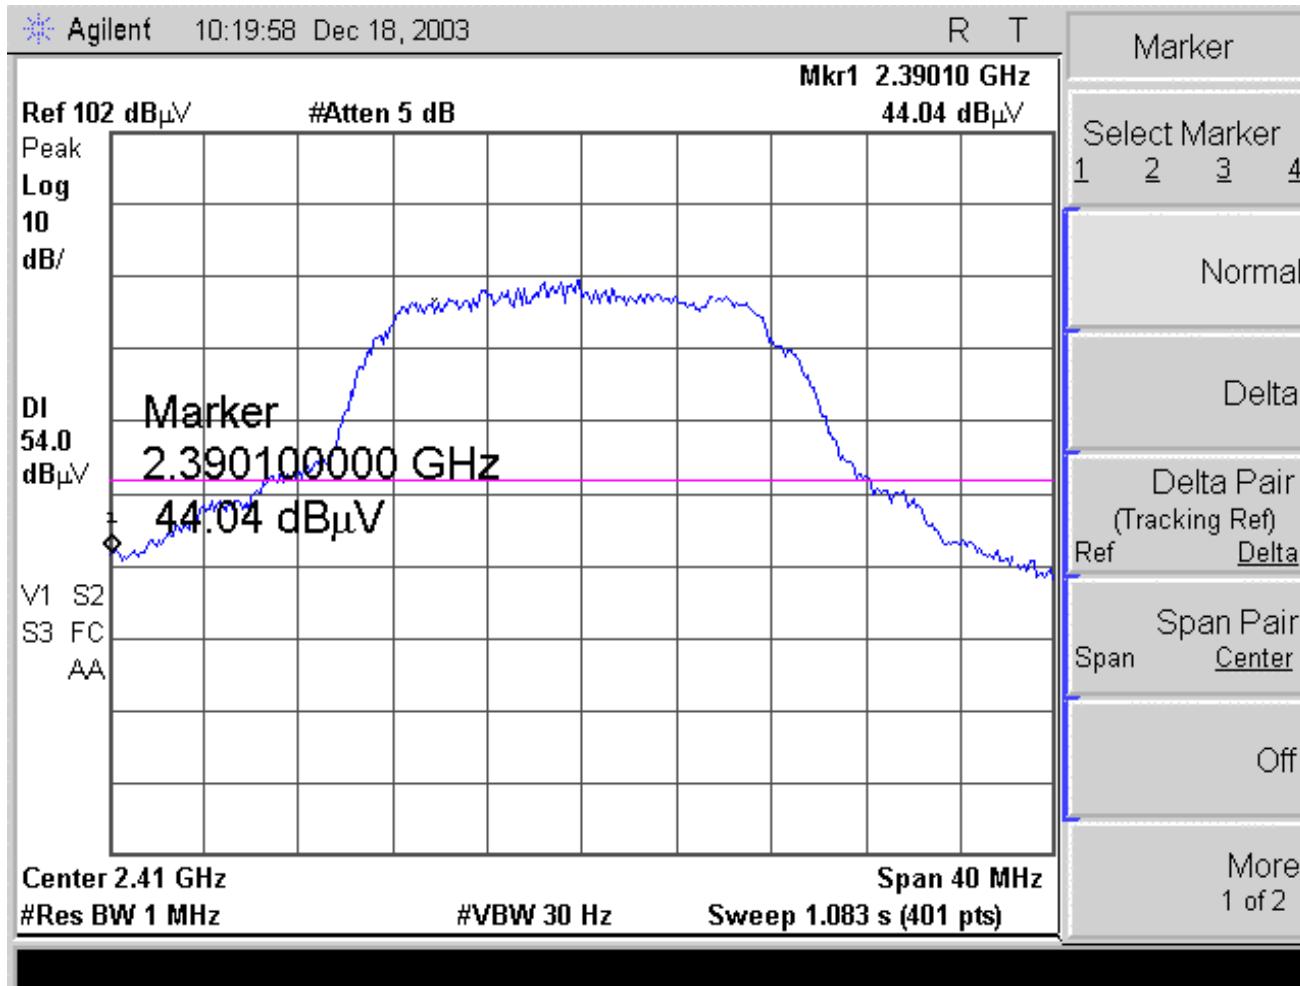


Antenna model : Corner R At 2.390 GHz

Test Engineer: Liming Xu  
Test Date: December 19, 2003

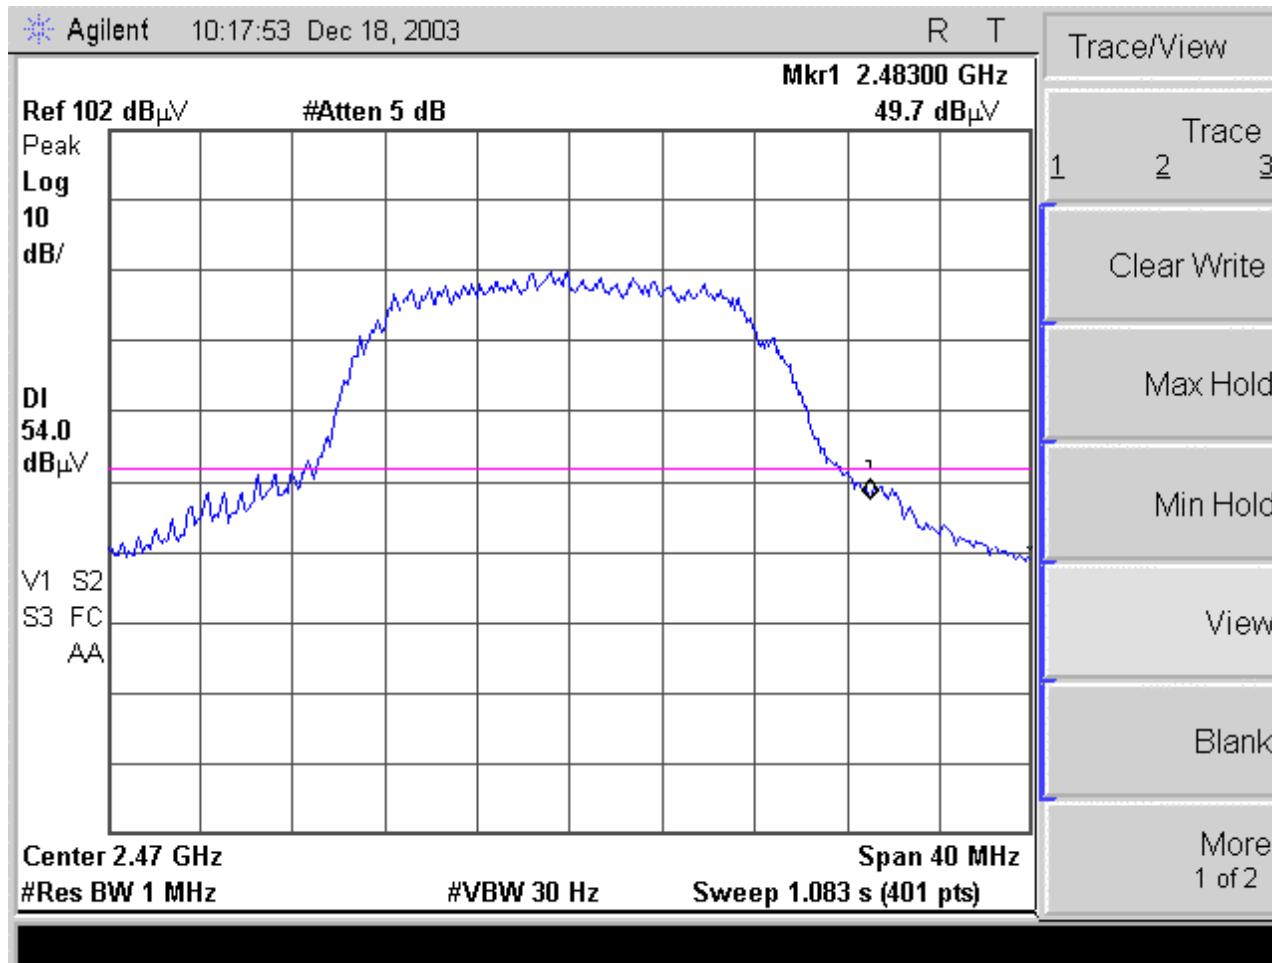


Antenna model : Corner R At 2.483 GHz

Test Engineer: Liming Xu  
Test Date: December 19, 2003

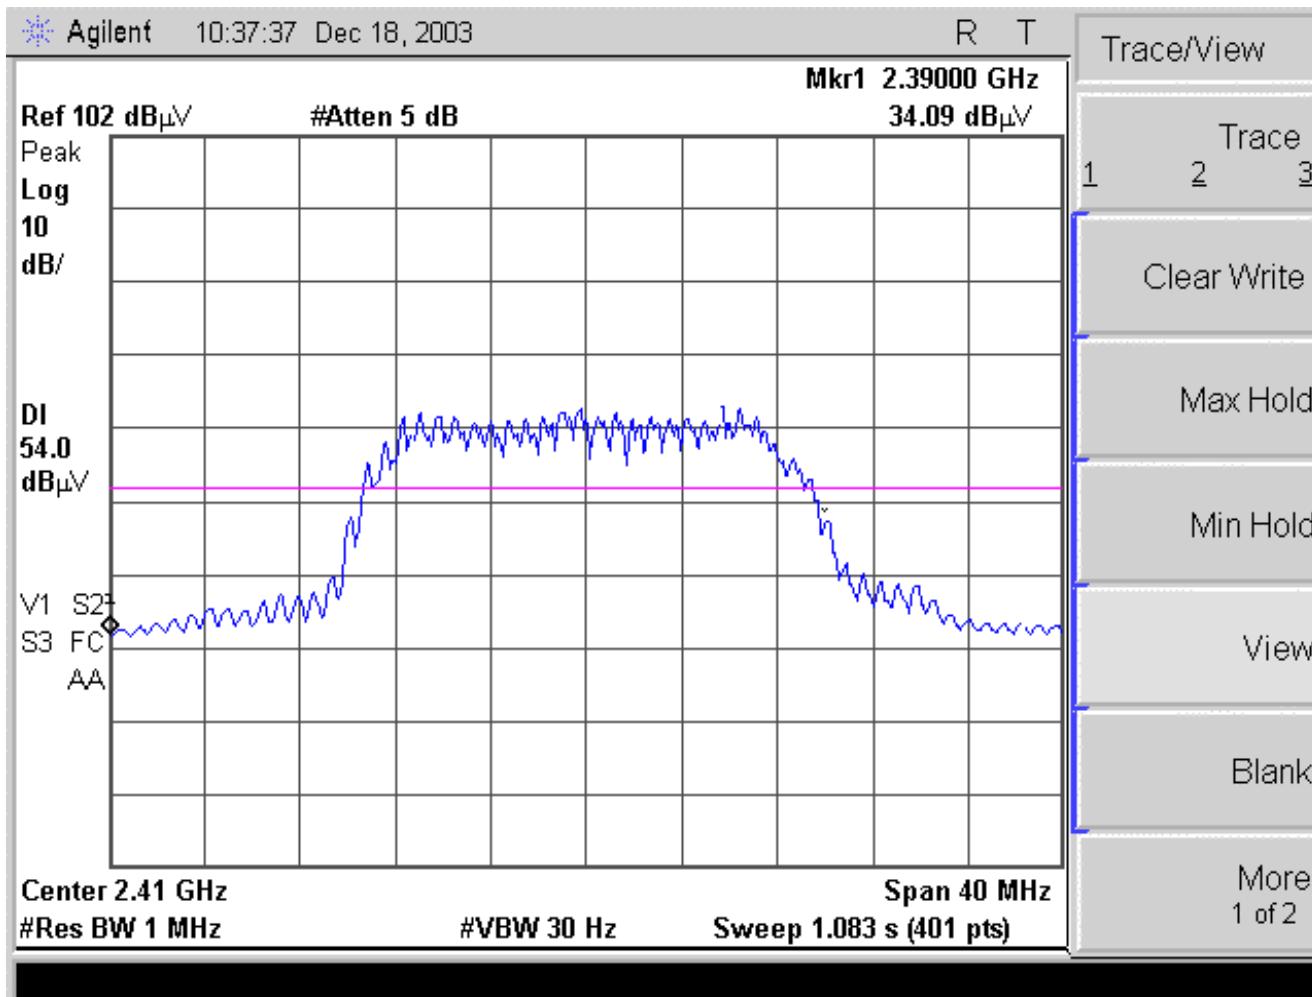

Antenna model : Parabolic At 2.390 GHz

**Test Engineer:** Liming Xu  
**Test Date:** December 19, 2003

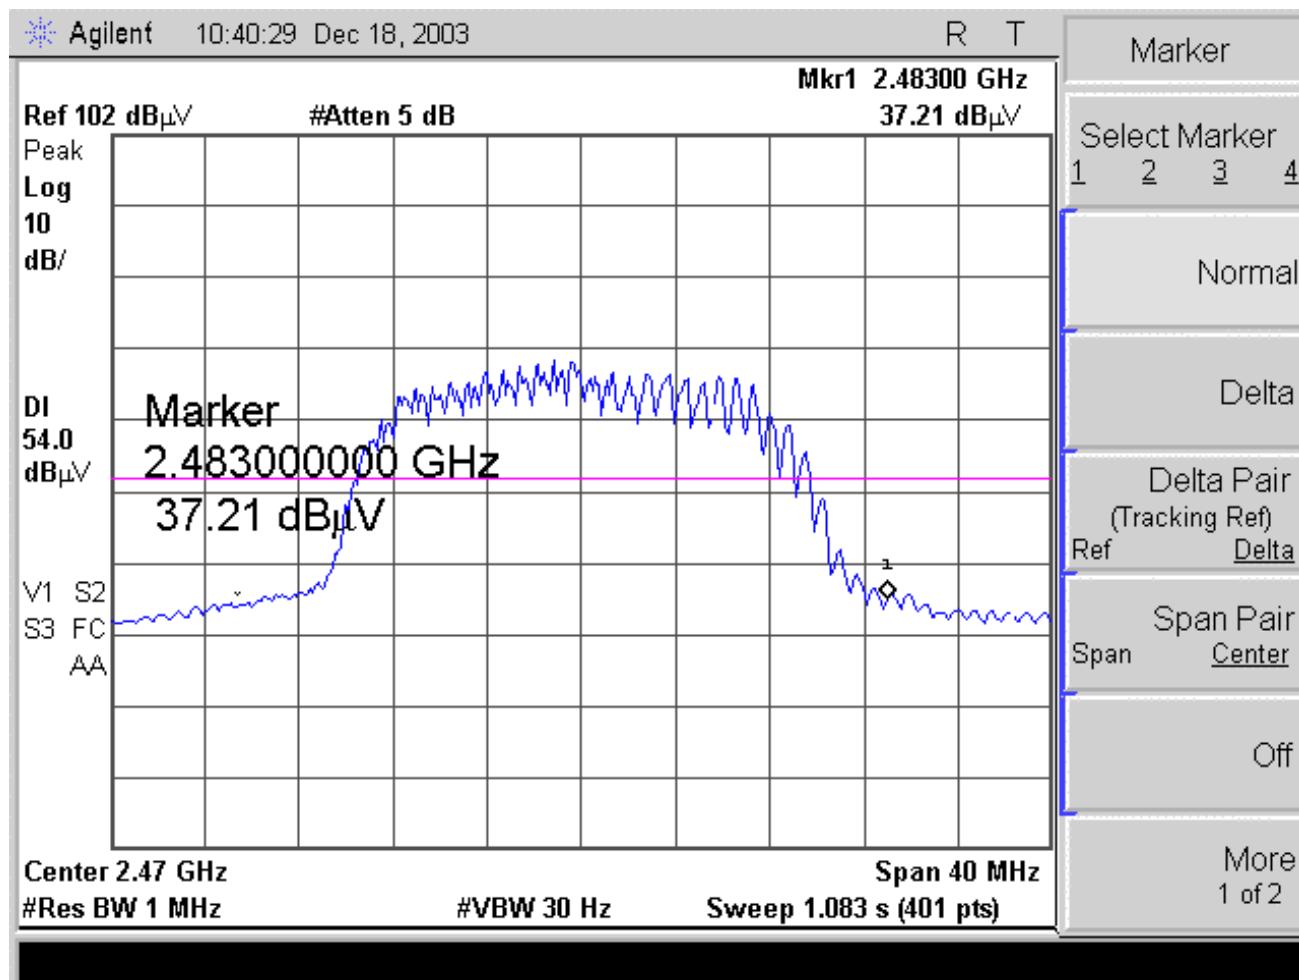

Antenna model : Parabolic At 2.483 GHz

Test Engineer: Liming Xu  
Test Date: December 19, 2003

**Setup 0****Setup 1****Setup 2**

**Setup 3****Setup 4****Setup 5****Setup 6**



---

## VI. Peak Output Power Requirements

---



## VI. Peak Output Power Requirements

### A. Peak Output Power (Conducted) - §15.247(b)

**Requirements:** The EUT maximum peak output power shall not exceed 1 watt for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band. For all other frequency hopping systems in the 2400-2483.5 MHz band the maximum peak output power shall not exceed 0.125 watts.  
For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

**Test Equipment:** Test equipment for this test is located in Section IX of this report

**Test Configuration/**

**Procedure:** The transmitter output was connected to a Agilent power meter ( E4416A )  
With power sensor ( E9327A ).

**Results:**

Equipment complies with § 15.247 (b)  
Peak Output Power = 0.32 W (Conducted)



## VI. Peak Output Power Requirements

### B. RF Exposure Requirements - §15.247(b)(5); §1.1307(b)(1)

**Specification:** Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

EUT is a mobile device

EUT meets the requirements of these sections as proven through MPE calculation

The MPE calculation for NexGen City NexPod V.01 @ 100cm

Based on the highest P = 320 mW and G = 18 ( Parabolic antenna )

$$\begin{aligned} Pd &= PG / 4\pi * R^2 \\ &= (320 \times 63.1) / 12.566 * (100)^2 \\ &= (20192) / 12.56637 \times 10000 = 20192 / 125663.7 \\ &= 0.16 \text{ mW/cm}^2 \end{aligned}$$

\*Pd = power density in mW/cm<sup>2</sup>

\* G = Antenna numeric gain (63.1); Log G = g/10 ( g = 18 ).

\* P = Conducted RF power to antenna ( 320 mW ).

\* R = Minimum allowable distance. ( 100 cm )

\*The power density Pd = 0.16 mW/cm<sup>2</sup> is less than 1 mW/cm<sup>2</sup> (listed MPE limit)

\*The SAR evaluation is not needed ( this is a mobile device )

\* The EUT(all antenna ) must be 1 meter away from the General Population.



---

## **VII. Spurious Emissions - RF Conducted - Requirements**

---



## VII. Spurious Emissions - Radiated and RF Conducted - Requirements

### Spurious Emissions - RF Conducted -

**Requirements:** FCC Part 15 Subpart C, §15.209(a); 15.247(c); for any emissions in restricted bands, as defined in Section 15.205

**Test Equipment:** Test equipment for this test is located in Section IX of this report

**Test Configuration/**

**Procedure:**

The EUT was placed on a 0.8 m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in a semi-anechoic chamber or OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst case orientation for maximum emissions.

For intentional radiators with a digital device portion which operates below 10 GHZ, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10<sup>th</sup> harmonic of the highest fundamental frequency or to 40 GHZ, whichever is lower.

In accordance with §15.35(b) the limit on the radio frequency emissions as measured using instrumentation with a peak detector function shall be 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.


For RF Conducted Emissions, the transmit output connected to the analyzer through the attenuation. RBW = 100kHz, VBW  $\geq$  RBW. (Scan through 10<sup>th</sup> harmonic)

If the spur emissions were found, the RBW and VBW settings will be :

For frequencies from 30 MHz to 1 GHZ, measurements were made using a quasi-peak detector with a 120 kHz bandwidth. For frequencies above 1 GHZ, peak measurements were made with a resolution bandwidth of 1 MHz and a video bandwidth of 1MHz and average measurements were made with RBW = 1MHz and VBW = 10 Hz.

**Results:**

Equipment complies with § 15.247 (◎) - there are no detectable emissions up through the 10<sup>th</sup> harmonic of the carrier.

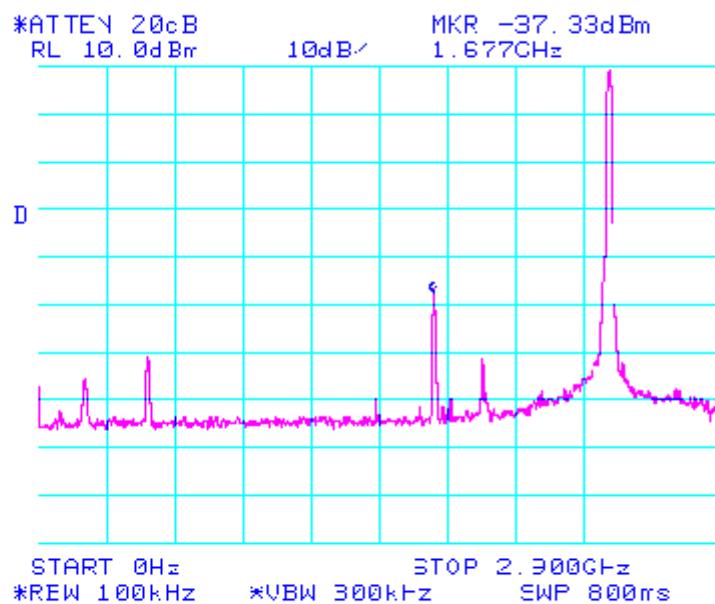


**Test Engineer:**


Liming Xu

**Test Date:**

December 19, 2003

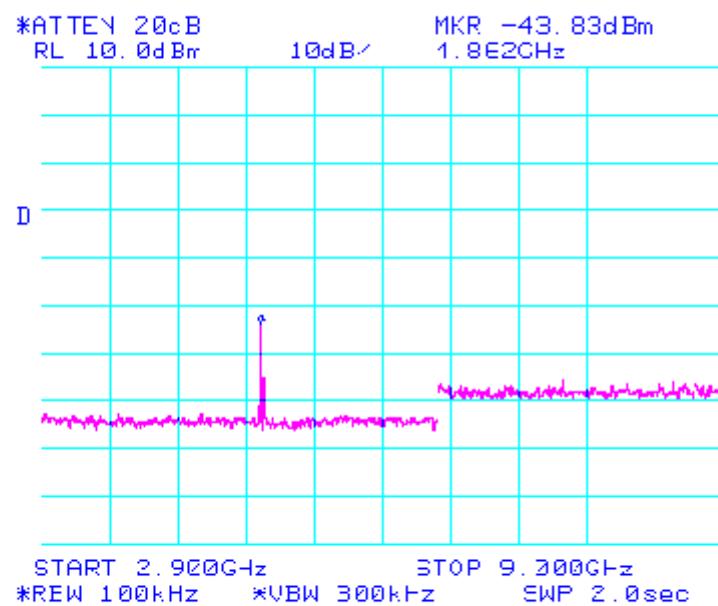


**Test Engineer:** Liming Xu  
**Test Date:** December 19, 2003

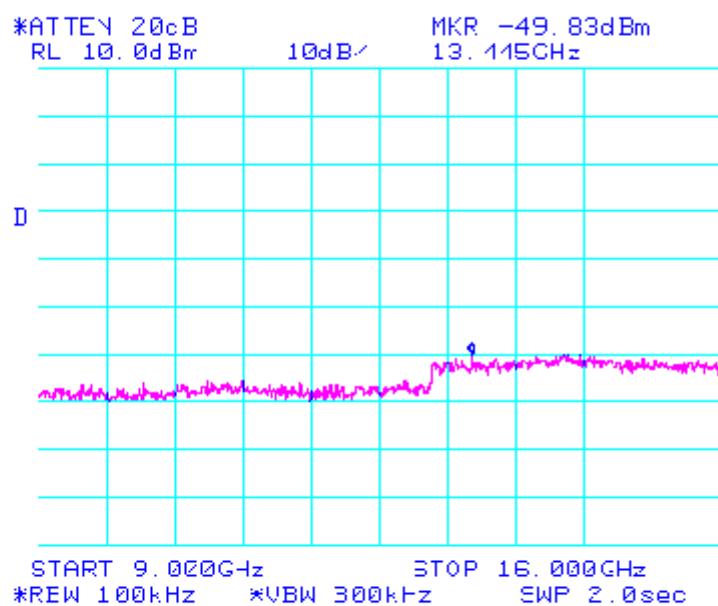

**Test Engineer:**  
Test Date:

Liming Xu  
December 19, 2003

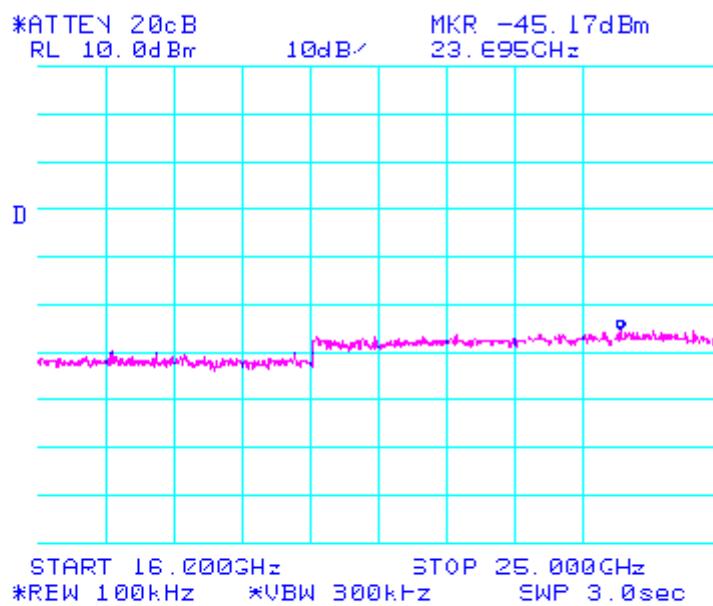

**Test Engineer:**  
Test Date:

Liming Xu  
December 19, 2003



---

NexGen City LP

NexPod V.01 Version A

FCC ID: RL7-SKU102-001-0A

December 22, 2003

---

---

## **VIII. Power Spectral Density Requirements**

---



## VIII. Power Spectral Density Requirements

### Power Spectral Density - §15.247(d)

**Requirements:** For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

**Test Equipment:** Test equipment for this test is located in Section IX of this report


#### Test Configuration/

**Procedure:** The transmitter output was connected to the spectrum analyzer through an attenuation. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth,  $VBW \geq RBW$ . The 20 dB bandwidth was measured and recorded.

**Results:** Equipment complies with § 15.247 (d). See the following plots:



### VIII. Power Spectral Density Requirements

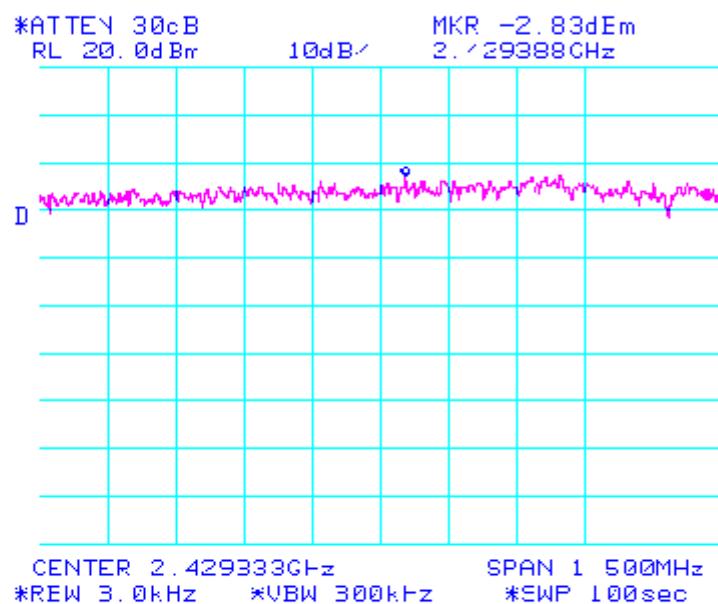

**Test Engineer:** Liming Xu  
**Test Date:** December 19, 2003



NexGen City LP

NexPod V.01 Version A

FCC ID: RL7-SKU102-001-0A

December 22, 2003

---

## IX. Test Equipment

---



## IX. Test Equipment

MET #	Equipment	Manufacturer	Mode I	Cal Date	Cal Due
1T430 0	SEMIANECHOI C CHAMBER # 1	ETS	NONE	5/3/03	5/3/04
1T435 3	Power meter	Agilent	E4416 A	9/29/03	9/29/04
1T434 9	power sensor	Agilent	E9327 A	2/7/03	2/7/04
1T430 3	ANTENNA; BILOG	SCHAFNE R - CHASE	CBL6 140A	4/9/03	4/9/04
1T430 2	EMI Receiver	HP	8546A	10/16/03	10/16/04

Table 10.

Test Equipment for Intentional Radiators - §15.247

Note: Functionally verified test equipment is verified at the time of testing.

Equipment	Manufacturer	Model	MET #	Cal Date	Cal Due
Semi-Anechoic Chamber	ETS	Chamber 1	1T430 0	05/03/2003	05/03/2004
Spectrum Analyzer	Hewlett Packard	8591E	1T419 2	11/04/2003	11/04/2004
Transient Limiter	Hewlett Packard	11947A	1T429 5	01/13/2003	Functional
LISN	Solar Electronic s	9252-50-R-24-BNC	1T421 2	10/06/2003	10/06/2004

Table 11.

Test Equipment for conducted emissions - §15.207(a)/CISPR 22(B).



---

NexGen City LP

NexPod V.01 Version A

FCC ID: RL7-SKU102-001-0A

December 22, 2003

---

---

## X. Certification Label & User's Manual Information

---



## A. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

### § 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of emitting radio-frequency energy by radiation, conduction, or other means. Radio-frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

### § 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
  - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
  - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.
- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:



- (i) Compliance testing;
- (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
- (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.

(e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.

(f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.

**The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:**

**§ 2.901 Basis and Purpose**

(a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.<sup>1</sup> In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.

<sup>1</sup>In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart C (of Part 15), which deals with intentional radiators.



(b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, or the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant, whichever is applicable.

#### **§ 2.907 Certification.**

(a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.

(b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

#### **§ 2.948 Description of measurement facilities.**

(a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.

(1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.

(i) If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.

(ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.

(2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.



## B. Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

### § 15.19 Labeling requirements.

(a) In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:

(1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

(2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

(3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

(4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

(5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

### § 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment



## § 15.27(a) Special Accessories.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in §2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

## § 15.105 Information to the user.

(a) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

**Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help



---

NexGen City LP

NexPod V.01 Version A

FCC ID: RL7-SKU102-001-0A

December 22, 2003

---

**END OF REPORT**

---