



FCC TEST REPORT

REPORT NO.: RF930713L02

MODEL NO.: ASS2101

RECEIVED: June 30, 2004

TESTED: June 30, 2004 ~ July 20, 2004

APPLICANT: Astarte Technology Co., Ltd.

ADDRESS: 11F, No. 166, Dah-Yeh RD., Peitou 112, Taipei,
Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 19, Hwa Ya 2nd rd., Kueishan, Taoyuan,
Taiwan, R.O.C.

This test report consists of 61 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA

Table of Contents

1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY.....	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS	8
3.5	CONFIGURATION OF SYSTEM UNDER TEST.....	9
4	TEST TYPES AND RESULTS	10
4.1	CONDUCTED EMISSION MEASUREMENT.....	10
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	10
4.1.2	TEST INSTRUMENTS	10
4.1.3	TEST PROCEDURES	11
4.1.4	DEVIATION FROM TEST STANDARD	11
4.1.5	TEST SETUP	12
4.1.6	EUT OPERATING CONDITIONS	12
4.1.7	TEST RESULTS (A).....	13
4.1.8	TEST RESULTS (B).....	19
4.2	RADIATED EMISSION MEASUREMENT	25
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	25
4.2.2	TEST INSTRUMENTS	26
4.2.3	TEST PROCEDURES	27
4.2.4	DEVIATION FROM TEST STANDARD	27
4.2.5	TEST SETUP	28
4.2.6	EUT OPERATING CONDITIONS	28
4.2.7	TEST RESULTS (A).....	29
4.2.8	TEST RESULTS (B).....	30
4.2.9	TEST RESULTS	32
4.3	6dB BANDWIDTH MEASUREMENT	35
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT.....	35
4.3.2	TEST INSTRUMENTS	35
4.3.3	TEST PROCEDURE	36
4.3.4	DEVIATION FROM TEST STANDARD	36
4.3.5	TEST SETUP	36

4.3.6	EUT OPERATING CONDITIONS	36
4.3.7	TEST RESULTS	37
4.4	MAXIMUM PEAK OUTPUT POWER	41
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	41
4.4.2	TEST INSTRUMENTS	41
4.4.3	TEST PROCEDURES	42
4.4.4	DEVIATION FROM TEST STANDARD	42
4.4.5	TEST SETUP	42
4.4.6	EUT OPERATING CONDITIONS	42
4.4.7	TEST RESULTS	43
4.5	POWER SPECTRAL DENSITY MEASUREMENT	44
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	44
4.5.2	TEST INSTRUMENTS	44
4.5.3	TEST PROCEDURE	45
4.5.4	DEVIATION FROM TEST STANDARD	45
4.5.5	TEST SETUP	45
4.5.6	EUT OPERATING CONDITIONS	45
4.5.7	TEST RESULTS	46
4.6	BAND EDGES MEASUREMENT	50
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	50
4.6.2	TEST INSTRUMENTS	50
4.6.3	TEST PROCEDURE	50
4.6.4	DEVIATION FROM TEST STANDARD	50
4.6.5	EUT OPERATING CONDITION	51
4.6.6	TEST RESULTS	51
4.7	ANTENNA REQUIREMENT	56
4.7.1	STANDARD APPLICABLE	56
4.7.2	ANTENNA CONNECTED CONSTRUCTION	56
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	57
6	INFORMATION ON THE TESTING LABORATORIES	61

1 CERTIFICATION

PRODUCT : Wireless USB Dongle
MODEL NO.: ASS2101
BRAND: Astarte
APPLICANT : Astarte Technology Co., Ltd.
TESTED: June 30, 2004 ~ July 20, 2004
TEST ITEM: ENGINEERING SAMPLE
STANDARDS : FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2001

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : *Stacy Hsueh* , **DATE:** July 21, 2004
(Stacy Hsueh)

**TECHNICAL
ACCEPTANCE** : *Gary Chang* , **DATE:** July 21, 2004
(Gary Chang)

APPROVED BY : *Cody Chang* , **DATE:** July 21, 2004
(Cody Chang
/ Supervisor)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -13.85dB at 0.158MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit : min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -5.84dB at 4824.00MHz.
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

NOTE: The information of measurement uncertainty is available upon the customer's request.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

Measurement	Frequency	Uncertainty
Conducted emissions	9k~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.73 dB
	200MHz ~ 1000MHz	3.74 dB
	1GHz ~ 18GHz	2.20 dB
	18GHz ~ 40GHz	1.88 dB

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless USB Dongle
MODEL NO.	ASS2101
POWER SUPPLY	5.0 Vdc from host equipment
MODULATION TYPE	BPSK, QPSK, CCK
MODULATION TECHNOLOGY	DSSS
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
MAXIMUM OUTPUT POWER	18.00dBm
ANTENNA TYPE	Chip antenna with 0dBi gain
DATA CABLE	19cm shielded USB cable without core
I/O PORTS	USB
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT backwards compatible with IEEE 802.11b product.
2. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. Below 1GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, the worst case, was chosen for final test.
2. Above 1GHz, the channel 1, 6, and 11 were tested individually.
3. From our experience and technical viewpoint, we have chosen data rates 11Mbps for CCK technique, as the worst cases for the test among other data rate.
4. In the conduction and radiation below 1GHz, There are two test results presented in the following sections. The test results A is for EUT connects notebook via a USB cable and the test results B is for EUT plug-in notebook directly.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Wireless USB Dongle. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)
ANSI C63.4-2001

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	16484462992	E2K24CLNS
2	PRINTER	EPSON	LQ-300+	DCGY054147	FCC DoC Approved
3	MODEM	ACEEX	1414V/3	0401008269	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m shielded cable without core.
3	1.2m shielded cable without core.


NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

TEST MODE A

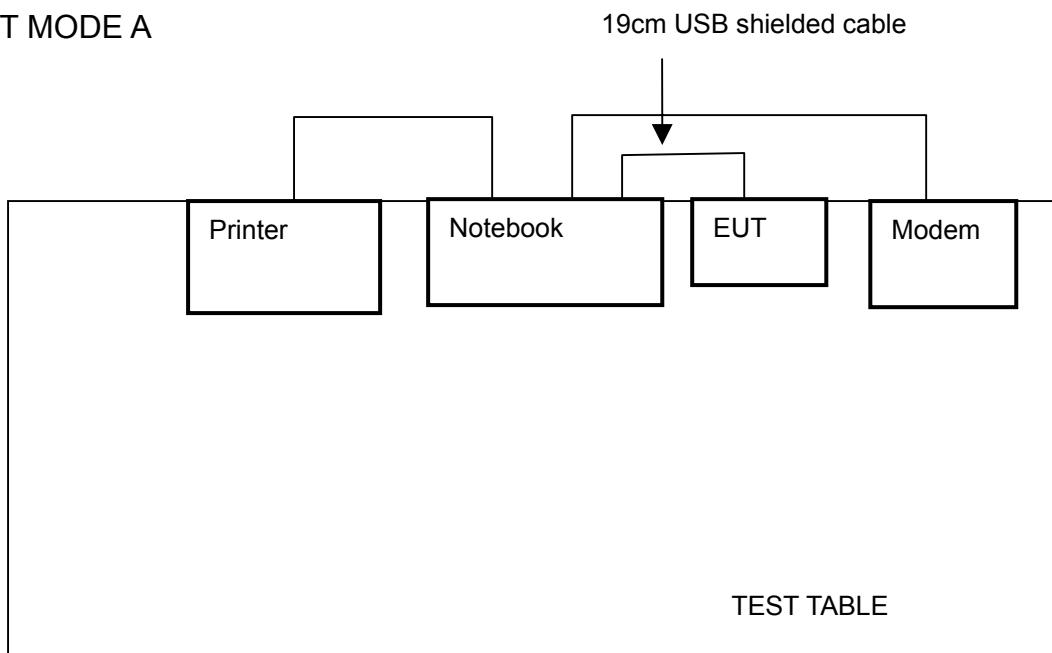

TEST MODE B

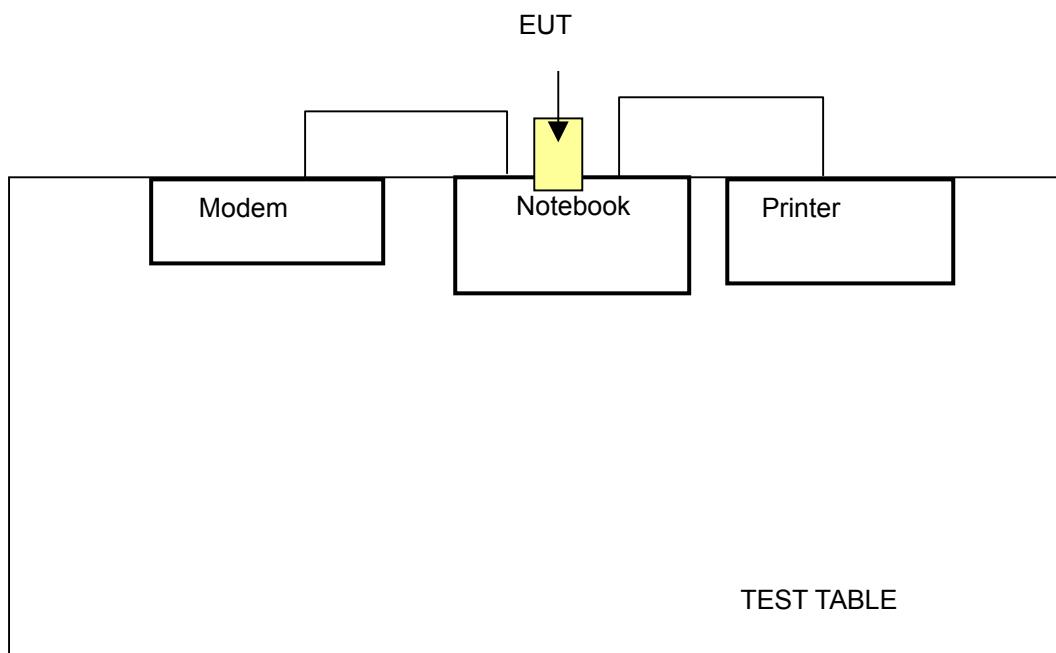

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Dec. 11, 2004
RF signal cable Woken	5D-FB	Cable-HyC02-01	Mar. 07, 2005
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Mar. 10, 2005
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Mar. 04, 2005
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2.
 3. The VCCI Site Registration No. is C-2047.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under Limit - 20dB was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

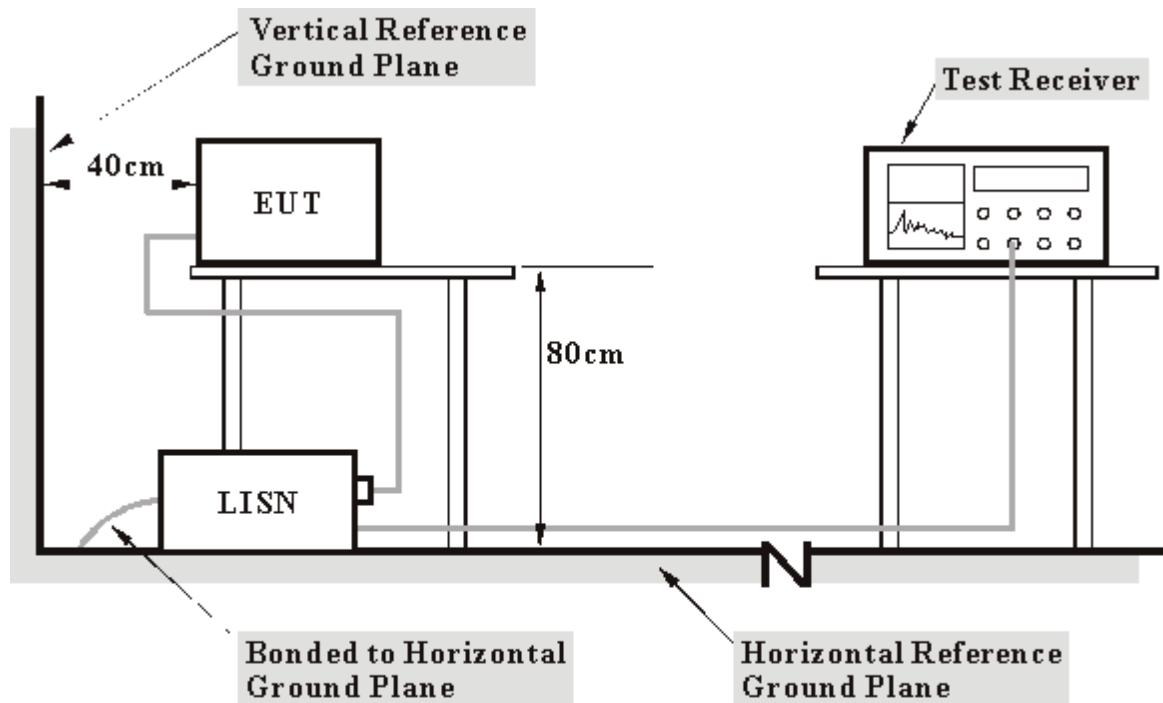

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMIN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Plug the EUT to a computer system placed on a testing table.
- b. The notebook ran a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The computer system show "H" messages on its screen.
- d. The computer system sent "H" messages to modem.
- e. The computer system sent "H" messages to printer, and the printer prints them on paper.
- f. Repeated c ~e.


4.1.7 TEST RESULTS (A)

EUT	Wireless USB Dongle	MODEL	ASS2101
MODE	Channel 1	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa	TESTED BY:	Leo Hung

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.10	46.49	-	46.59	-	65.79	55.79	-19.19	-
2	0.322	0.11	29.83	-	29.94	-	59.66	49.66	-29.72	-
3	1.859	0.26	31.40	-	31.66	-	56.00	46.00	-24.34	-
4	3.969	0.31	23.57	-	23.88	-	56.00	46.00	-32.12	-
5	9.797	0.52	32.63	-	33.15	-	60.00	50.00	-26.85	-
6	15.605	0.73	21.89	-	22.62	-	60.00	50.00	-37.38	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

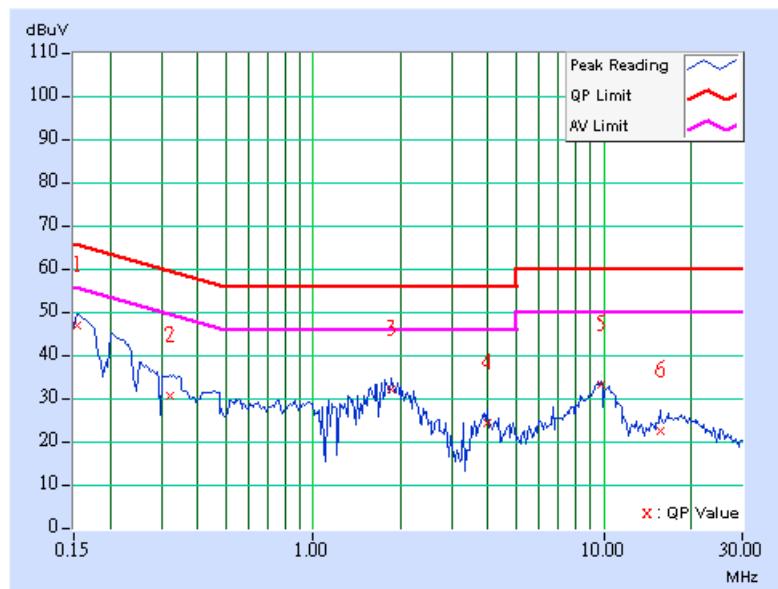

EUT	Wireless USB Dongle	MODEL	ASS2101
MODE	Channel 1	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa		TESTED BY: Leo Hung

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.10	41.46	-	41.56	-	65.58	55.58	-24.02	-
2	0.209	0.10	26.49	-	26.59	-	63.26	53.26	-36.67	-
3	0.455	0.13	26.31	-	26.44	-	56.79	46.79	-30.35	-
4	1.684	0.25	32.61	-	32.86	-	56.00	46.00	-23.14	-
5	3.746	0.30	25.00	-	25.30	-	56.00	46.00	-30.70	-
6	10.184	0.49	29.00	-	29.49	-	60.00	50.00	-30.51	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

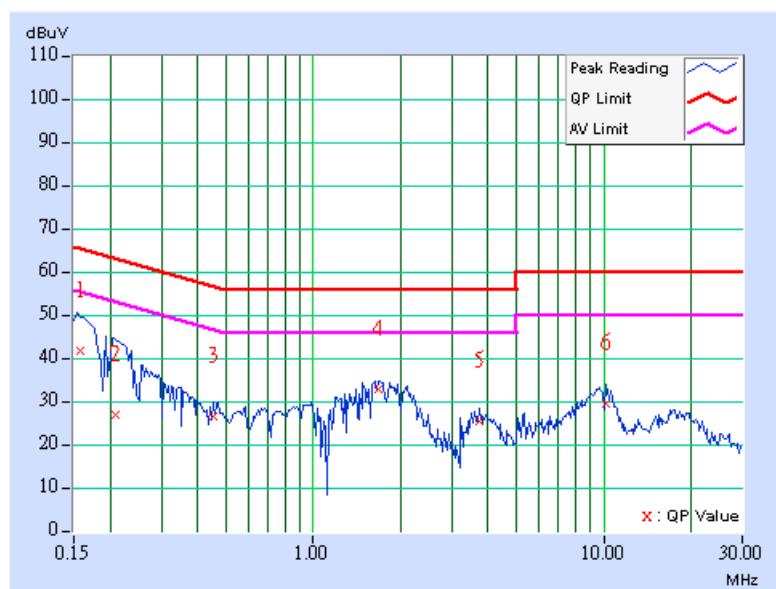

EUT	Wireless USB Dongle	MODEL	ASS2101
MODE	Channel 6	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa	TESTED BY:	Leo Hung

No	Freq. [MHz]	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.166	0.10	44.64	-	44.74	-	65.18	55.18	-20.43	-
2	0.209	0.10	41.02	-	41.12	-	63.26	53.26	-22.14	-
3	0.322	0.11	30.49	-	30.60	-	59.66	49.66	-29.06	-
4	1.773	0.26	31.11	-	31.37	-	56.00	46.00	-24.63	-
5	3.871	0.31	23.72	-	24.03	-	56.00	46.00	-31.97	-
6	9.480	0.51	29.03	-	29.54	-	60.00	50.00	-30.46	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

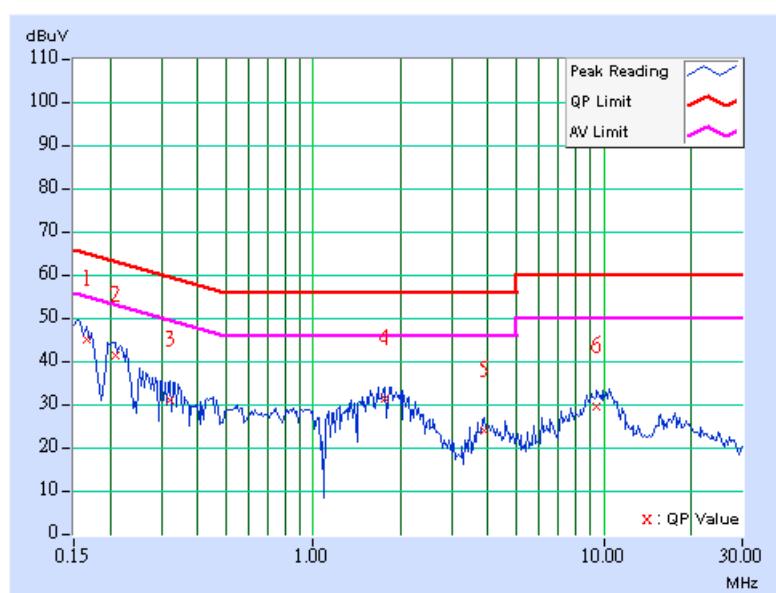


EUT	Wireless USB Dongle	MODEL	ASS2101
MODE	Channel 6	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa		TESTED BY: Leo Hung

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.10	46.16	-	46.26	-	65.58	55.58	-19.32	-
2	0.216	0.10	39.64	-	39.74	-	62.96	52.96	-23.21	-
3	0.463	0.13	27.90	-	28.03	-	56.65	46.65	-28.62	-
4	1.828	0.25	32.36	-	32.61	-	56.00	46.00	-23.39	-
5	3.879	0.30	25.42	-	25.72	-	56.00	46.00	-30.28	-
6	10.074	0.49	29.84	-	30.33	-	60.00	50.00	-29.67	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

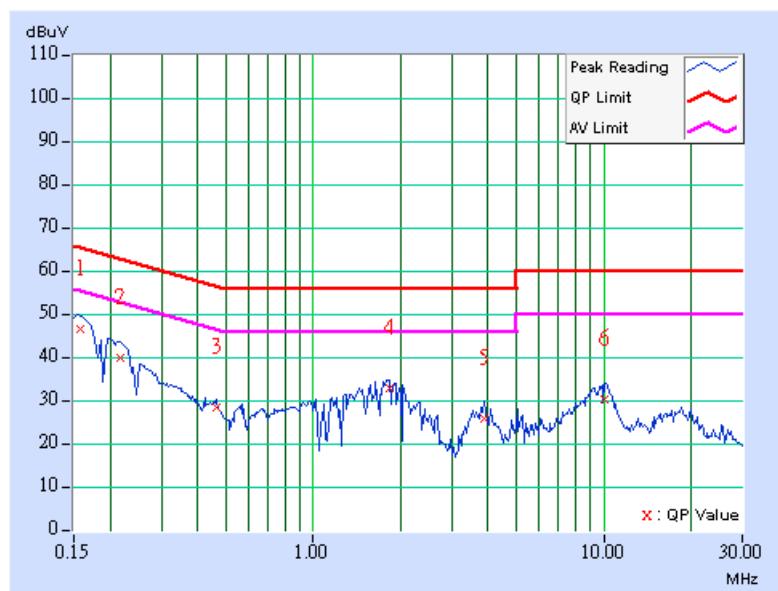


EUT	Wireless USB Dongle	MODEL	ASS2101
MODE	Channel 11	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa		TESTED BY: Leo Hung

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.10	45.35	-	45.45	-	65.58	55.58	-20.12	-
2	0.213	0.10	39.70	-	39.80	-	63.11	53.11	-23.31	-
3	1.703	0.26	31.38	-	31.64	-	56.00	46.00	-24.36	-
4	3.563	0.30	22.34	-	22.64	-	56.00	46.00	-33.36	-
5	9.578	0.52	29.43	-	29.95	-	60.00	50.00	-30.05	-
6	17.449	0.81	22.51	-	23.32	-	60.00	50.00	-36.68	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

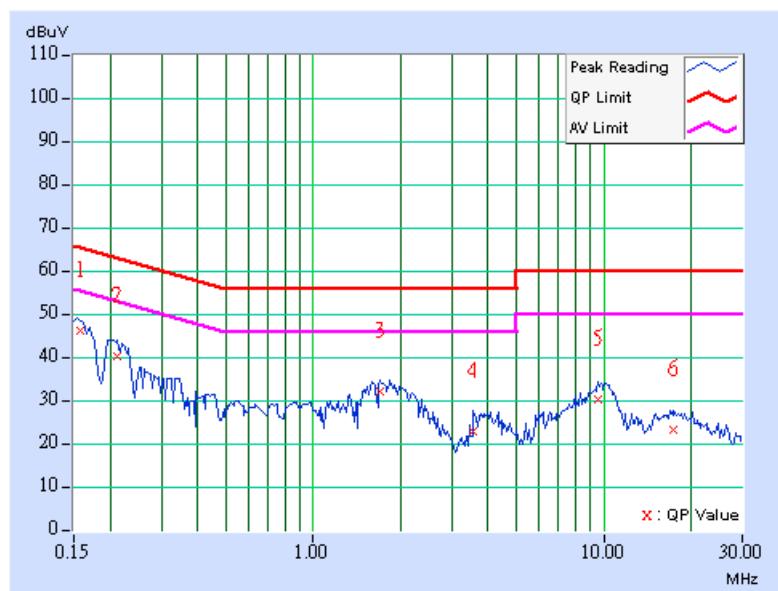


EUT	Wireless USB Dongle	MODEL	ASS2101
MODE	Channel 11	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa	TESTED BY:	Leo Hung

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.10	46.22	-	46.32	-	65.58	55.58	-19.26	-
2	0.209	0.10	40.49	-	40.59	-	63.26	53.26	-22.67	-
3	0.310	0.11	30.24	-	30.35	-	59.97	49.97	-29.62	-
4	1.723	0.25	32.70	-	32.95	-	56.00	46.00	-23.05	-
5	3.574	0.29	24.99	-	25.28	-	56.00	46.00	-30.72	-
6	10.418	0.50	29.27	-	29.77	-	60.00	50.00	-30.23	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

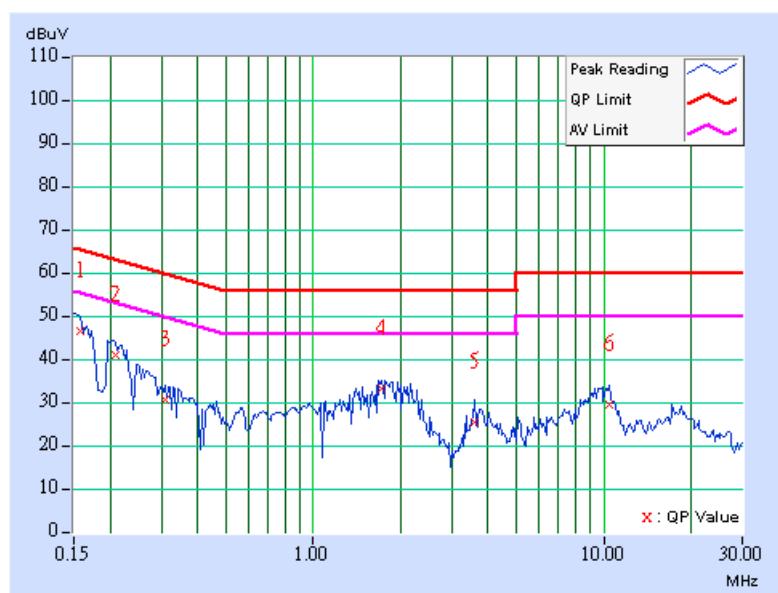


4.1.8 TEST RESULTS (B)

EUT	Wireless USB Dongle	MODEL	ASS2101
MODE	Channel 1	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa	TESTED BY:	Leo Hung

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.10	51.62	-	51.72	-	65.58	55.58	-13.85	-
2	0.209	0.10	46.55	-	46.65	-	63.26	53.26	-16.61	-
3	0.466	0.13	28.68	-	28.81	-	56.58	46.58	-27.77	-
4	1.883	0.26	28.71	-	28.97	-	56.00	46.00	-27.03	-
5	4.176	0.32	21.61	-	21.93	-	56.00	46.00	-34.07	-
6	10.316	0.54	28.01	-	28.55	-	60.00	50.00	-31.45	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

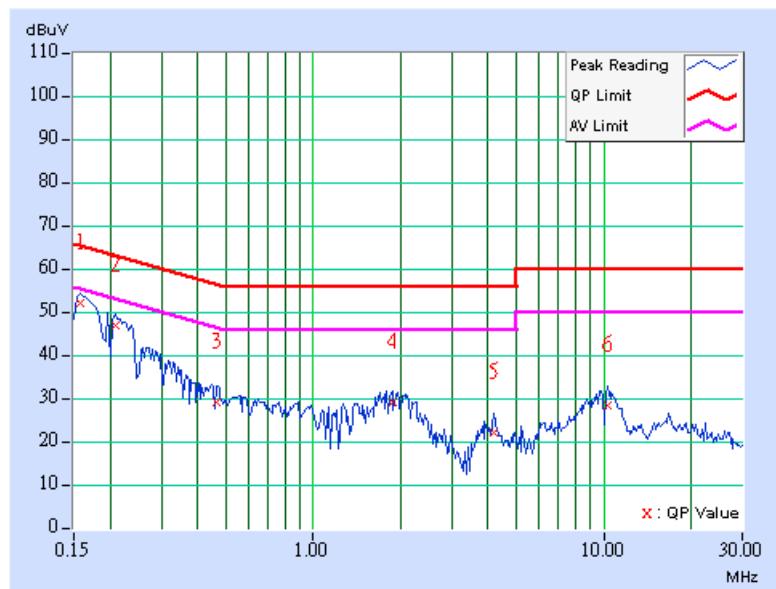


EUT	Wireless USB Dongle	MODEL	ASS2101
MODE	Channel 1	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa		TESTED BY: Leo Hung

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.10	50.09	-	50.19	-	65.38	55.38	-15.19	-
2	0.209	0.10	45.95	-	46.05	-	63.26	53.26	-17.21	-
3	0.404	0.11	29.16	-	29.27	-	57.77	47.77	-28.50	-
4	1.813	0.25	30.44	-	30.69	-	56.00	46.00	-25.31	-
5	5.047	0.35	21.22	-	21.57	-	60.00	50.00	-38.43	-
6	9.609	0.48	27.86	-	28.34	-	60.00	50.00	-31.66	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

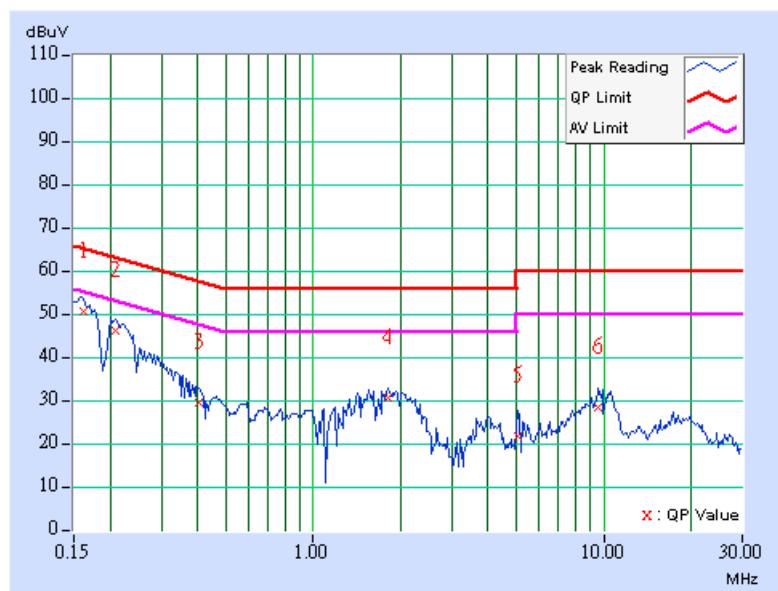

EUT	Wireless USB Dongle	MODEL	ASS2101
MODE	Channel 6	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa	TESTED BY:	Leo Hung

No	Freq. [MHz]	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.10	49.35	-	49.45	-	65.58	55.58	-16.12	-
2	0.213	0.10	43.65	-	43.75	-	63.11	53.11	-19.36	-
3	0.463	0.13	28.47	-	28.60	-	56.65	46.65	-28.05	-
4	1.797	0.26	29.29	-	29.55	-	56.00	46.00	-26.45	-
5	4.316	0.33	21.49	-	21.82	-	56.00	46.00	-34.18	-
6	9.586	0.52	28.06	-	28.58	-	60.00	50.00	-31.42	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss


6. Emission Level = Correction Factor + Reading Value.

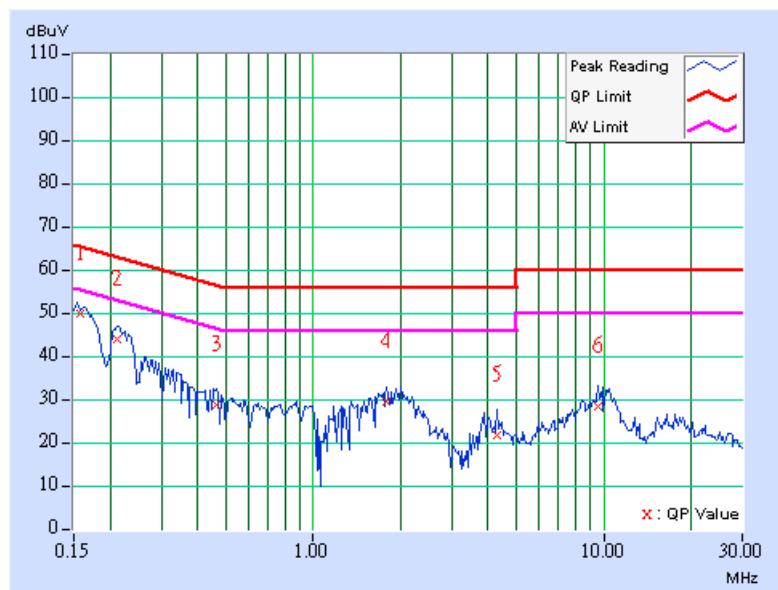

EUT	Wireless USB Dongle	MODEL	ASS2101
MODE	Channel 6	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa		TESTED BY: Leo Hung

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.10	48.41	-	48.51	-	64.98	54.98	-16.48	-
2	0.209	0.10	45.28	-	45.38	-	63.26	53.26	-17.88	-
3	1.797	0.25	30.64	-	30.89	-	56.00	46.00	-25.11	-
4	4.008	0.30	23.72	-	24.02	-	56.00	46.00	-31.98	-
5	9.859	0.49	28.34	-	28.83	-	60.00	50.00	-31.17	-
6	18.156	0.62	22.01	-	22.63	-	60.00	50.00	-37.37	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

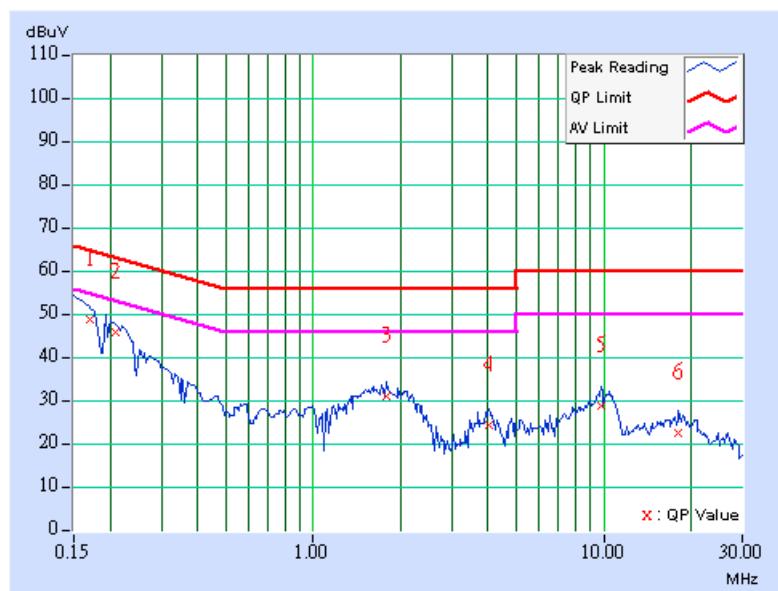


EUT	Wireless USB Dongle	MODEL	ASS2101
MODE	Channel 11	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa		TESTED BY: Leo Hung

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.10	48.94	-	49.04	-	65.58	55.58	-16.53	-
2	0.213	0.10	43.11	-	43.21	-	63.11	53.11	-19.90	-
3	1.816	0.26	30.12	-	30.38	-	56.00	46.00	-25.62	-
4	3.891	0.31	22.96	-	23.27	-	56.00	46.00	-32.73	-
5	6.211	0.41	20.66	-	21.07	-	60.00	50.00	-38.93	-
6	10.344	0.54	28.50	-	29.04	-	60.00	50.00	-30.96	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

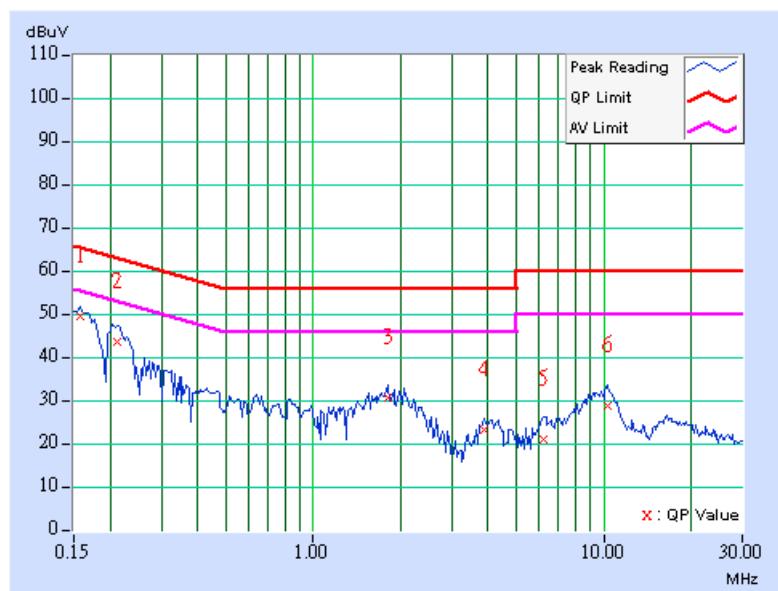


EUT	Wireless USB Dongle	MODEL	ASS2101
MODE	Channel 11	6dB BANDWIDTH	9kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa		TESTED BY: Leo Hung

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.10	48.84	-	48.94	-	65.58	55.58	-16.64	-
2	0.205	0.10	42.63	-	42.73	-	63.42	53.42	-20.69	-
3	1.469	0.24	30.23	-	30.47	-	56.00	46.00	-25.53	-
4	3.855	0.30	24.24	-	24.54	-	56.00	46.00	-31.46	-
5	9.980	0.49	29.05	-	29.54	-	60.00	50.00	-30.46	-
6	19.305	0.64	21.85	-	22.49	-	60.00	50.00	-37.51	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

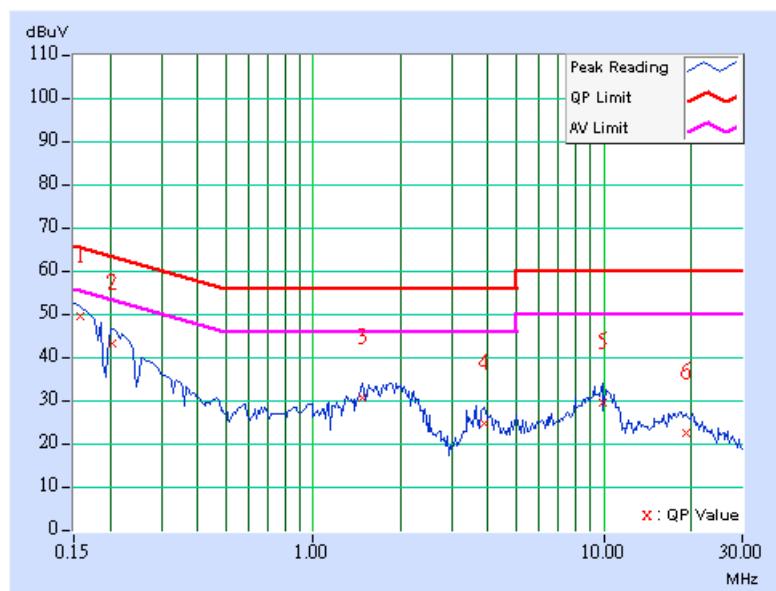

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_uV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESIB7	100188	Jan. 13, 2005
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Dec. 15, 2004
BILOG Antenna SCHWARZBECK	VULB9168	9168-157	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-407	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170241	Feb. 23, 2005
Preamplifier Agilent	8449B	3008A01961	Jan. 22, 2005
Preamplifier Agilent	8447D	2944A10629	Jan. 14, 2005
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218182/4	Mar. 04, 2005
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218194/4	Mar. 04, 2005
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower ADT.	AT100	AT93021702	NA
Turn Table ADT.	TT100.	TT93021702	NA
Controller ADT.	SC100.	SC93021702	NA

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 1.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The IC Site Registration No. is IC4924-2.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter 9*6*6 chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

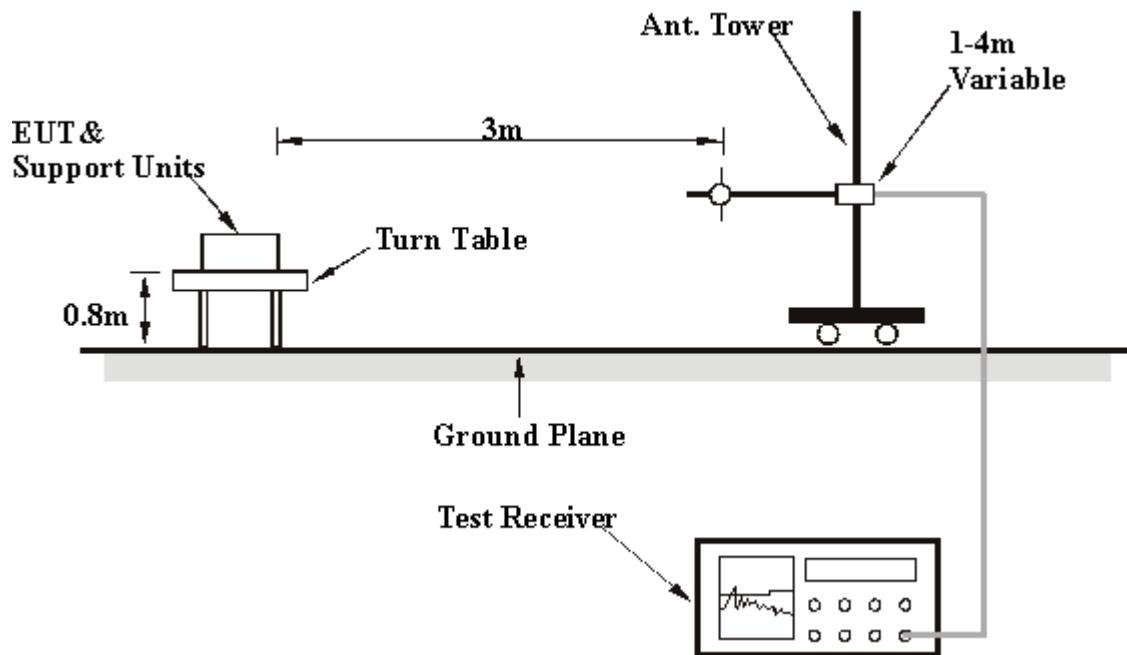

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS (A)

EUT	Wireless USB Dongle	MODEL	ASS2101
MODE	Channel 11	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25 deg. C, 63 % RH, 991hPa		TESTED BY: Steven Lu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	123.31	30.96 QP	43.50	-12.54	1.75 H	220	17.70	13.26
2	220.50	34.97 QP	46.00	-11.03	1.50 H	181	23.10	11.87
3	265.21	39.56 QP	46.00	-6.44	1.00 H	13	25.98	13.58
4	307.98	39.15 QP	46.00	-6.85	1.00 H	19	24.46	14.68
5	397.39	33.14 QP	46.00	-12.86	1.00 H	31	16.45	16.69
6	440.16	29.84 QP	46.00	-16.16	1.75 H	316	12.03	17.81
7	484.87	32.45 QP	46.00	-13.55	1.50 H	31	13.92	18.53
8	529.58	29.52 QP	46.00	-16.48	1.50 H	34	10.22	19.30
9	572.34	31.44 QP	46.00	-14.56	1.50 H	31	11.16	20.28
10	599.56	32.49 QP	46.00	-13.51	1.25 H	25	11.49	21.00
11	661.76	31.42 QP	46.00	-14.58	1.00 H	19	9.59	21.83
12	708.42	30.80 QP	46.00	-15.20	1.00 H	109	8.29	22.51
13	749.24	33.08 QP	46.00	-12.92	1.00 H	52	9.57	23.51

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.83	29.85 QP	40.00	-10.15	1.50 V	115	15.28	14.57
2	134.97	31.38 QP	43.50	-12.12	1.00 V	223	17.31	14.07
3	166.07	28.14 QP	43.50	-15.36	1.00 V	295	13.84	14.30
4	220.50	28.15 QP	46.00	-17.85	1.25 V	325	16.28	11.87
5	265.21	30.04 QP	46.00	-15.96	1.50 V	46	16.46	13.58
6	307.98	34.52 QP	46.00	-11.48	1.25 V	352	19.84	14.68
7	440.16	27.28 QP	46.00	-18.72	1.25 V	88	9.47	17.81
8	484.87	31.77 QP	46.00	-14.23	1.00 V	97	13.24	18.53
9	572.34	28.71 QP	46.00	-17.29	1.00 V	79	8.43	20.28
10	599.56	30.26 QP	46.00	-15.74	1.25 V	40	9.27	21.00
11	661.76	28.78 QP	46.00	-17.22	1.25 V	316	6.95	21.83
12	731.74	30.81 QP	46.00	-15.19	1.00 V	19	7.73	23.08

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

4.2.8 TEST RESULTS (B)

EUT	Wireless USB Dongle	MODEL	ASS2101
MODE	Channel 11	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25 deg. C, 63 % RH, 991hPa	TESTED BY: Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	201.06	34.94 QP	43.50	-8.56	1.75 H	10	23.52	11.41
2	307.98	34.15 QP	46.00	-11.85	1.00 H	1	19.47	14.68
3	397.39	33.31 QP	46.00	-12.69	1.00 H	31	16.62	16.69
4	440.16	31.29 QP	46.00	-14.71	1.75 H	25	13.48	17.81
5	484.87	34.38 QP	46.00	-11.62	1.75 H	49	15.85	18.53
6	556.79	34.13 QP	46.00	-11.87	1.50 H	160	14.26	19.87
7	572.34	34.20 QP	46.00	-11.80	1.50 H	46	13.92	20.28
8	630.66	37.27 QP	46.00	-8.73	1.50 H	157	15.85	21.42
9	667.60	36.42 QP	46.00	-9.58	1.50 H	196	14.52	21.90
10	749.24	38.09 QP	46.00	-7.91	1.00 H	64	14.57	23.51
11	793.95	37.94 QP	46.00	-8.06	1.00 H	55	14.16	23.78
12	836.71	36.50 QP	46.00	-9.50	1.75 H	205	12.41	24.09
13	881.42	37.55 QP	46.00	-8.45	1.50 H	214	12.78	24.77

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

EUT	Wireless USB Dongle	MODEL	ASS2101
MODE	Channel 11	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25 deg. C, 63 % RH, 991hPa	TESTED BY: Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.83	29.29 QP	40.00	-10.71	1.25 V	307	14.72	14.57
2	121.36	31.69 QP	43.50	-11.81	1.00 V	61	18.57	13.12
3	226.33	25.97 QP	46.00	-20.03	1.00 V	130	13.74	12.23
4	307.98	26.74 QP	46.00	-19.26	1.00 V	319	12.06	14.68
5	397.39	28.32 QP	46.00	-17.68	1.25 V	283	11.62	16.69
6	484.87	35.45 QP	46.00	-10.55	1.00 V	310	16.92	18.53
7	572.34	33.69 QP	46.00	-12.31	1.00 V	97	13.41	20.28
8	599.56	31.91 QP	46.00	-14.09	1.00 V	181	10.91	21.00
9	661.76	33.15 QP	46.00	-12.85	1.00 V	82	11.33	21.83
10	749.24	35.48 QP	46.00	-10.52	1.00 V	61	11.97	23.51
11	793.95	34.43 QP	46.00	-11.57	1.00 V	133	10.64	23.78
12	838.66	35.34 QP	46.00	-10.66	1.00 V	124	11.24	24.11
13	881.42	34.44 QP	46.00	-11.56	1.50 V	157	9.68	24.77
14	926.13	31.60 QP	46.00	-14.40	1.50 V	154	6.21	25.39

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

4.2.9 TEST RESULTS

EUT	Wireless USB Dongle	MODEL	ASS2101
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	28 deg. C, 60 % RH, 991hPa	TESTED BY	Allen Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2387.40	46.48 PK	74.00	-27.52	1.26 H	183	12.67	33.81
1	2387.40	38.48 AV	54.00	-15.52	1.26 H	183	4.67	33.81
2	*2412.00	107.97 PK			1.26 H	183	74.04	33.93
2	*2412.00	99.97 AV			1.26 H	183	66.04	33.93
3	4824.00	54.02 PK	74.00	-19.98	1.00 H	18	13.36	40.66
3	4824.00	43.86 AV	54.00	-10.14	1.00 H	18	3.20	40.66

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2387.40	51.11 PK	74.00	-22.89	1.26 V	171	17.30	33.81
1	2387.40	43.05 AV	54.00	-10.95	1.26 V	171	9.24	33.81
2	*2412.00	112.60 PK			1.26 V	171	78.67	33.93
2	*2412.00	104.54 AV			1.26 V	171	70.61	33.93
3	4824.00	53.92 PK	74.00	-20.08	1.00 V	354	13.26	40.66
3	4824.00	48.16 AV	54.00	-5.84	1.00 V	354	7.50	40.66

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*”: Fundamental frequency.

EUT	Wireless USB Dongle	MODEL	ASS2101
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	28 deg. C, 60 % RH, 991hPa	TESTED BY	Allen Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	108.17 PK			1.00 H	184	74.12	34.05
1	*2437.00	100.01 AV			1.00 H	184	65.96	34.05
2	4874.00	54.49 PK	74.00	-19.51	1.00 H	343	13.80	40.69
2	4874.00	43.39 AV	54.00	-10.61	1.00 H	343	2.70	40.69

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	112.72 PK			1.00 V	100	78.67	34.05
1	*2437.00	104.63 AV			1.00 V	100	70.58	34.05
2	4874.00	56.64 PK	74.00	-17.36	1.00 V	0	15.95	40.69
2	4874.00	47.92 AV	54.00	-6.08	1.00 V	0	7.23	40.69

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*”: Fundamental frequency.

EUT	Wireless USB Dongle	MODEL	ASS2101
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~25GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	28 deg. C, 60 % RH, 991hPa	TESTED BY	Allen Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.17 PK			1.00 H	187	73.01	34.16
1	*2462.00	99.29 AV			1.00 H	187	65.13	34.16
2	2483.50	46.05 PK	74.00	-27.95	1.00 H	187	11.79	34.26
2	2483.50	38.17 AV	54.00	-15.83	1.00 H	187	3.91	34.26
3	4924.00	54.21 PK	74.00	-19.79	1.00 H	343	13.35	40.86
3	4924.00	44.10 AV	54.00	-9.90	1.00 H	343	3.24	40.86

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.48 PK			1.22 V	181	78.32	34.16
1	*2462.00	104.36 AV			1.22 V	181	70.20	34.16
2	2483.50	51.36 PK	74.00	-22.64	1.22 V	181	17.10	34.26
2	2483.50	43.24 AV	54.00	-10.76	1.22 V	181	8.98	34.26
3	4924.00	56.85 PK	74.00	-17.15	1.00 V	360	15.99	40.86
3	4924.00	47.00 AV	54.00	-7.00	1.00 V	360	6.14	40.86

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*”: Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

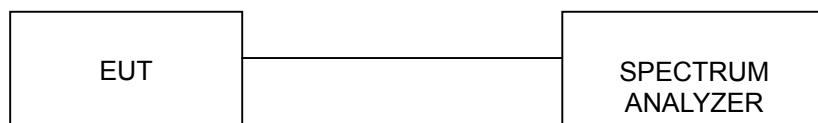

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS


EUT	Wireless USB Dongle	MODEL	ASS2101
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa
TESTED BY:	Leo Hung		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	9.54	0.5	PASS
6	2437	9.90	0.5	PASS
11	2462	10.34	0.5	PASS


CH1

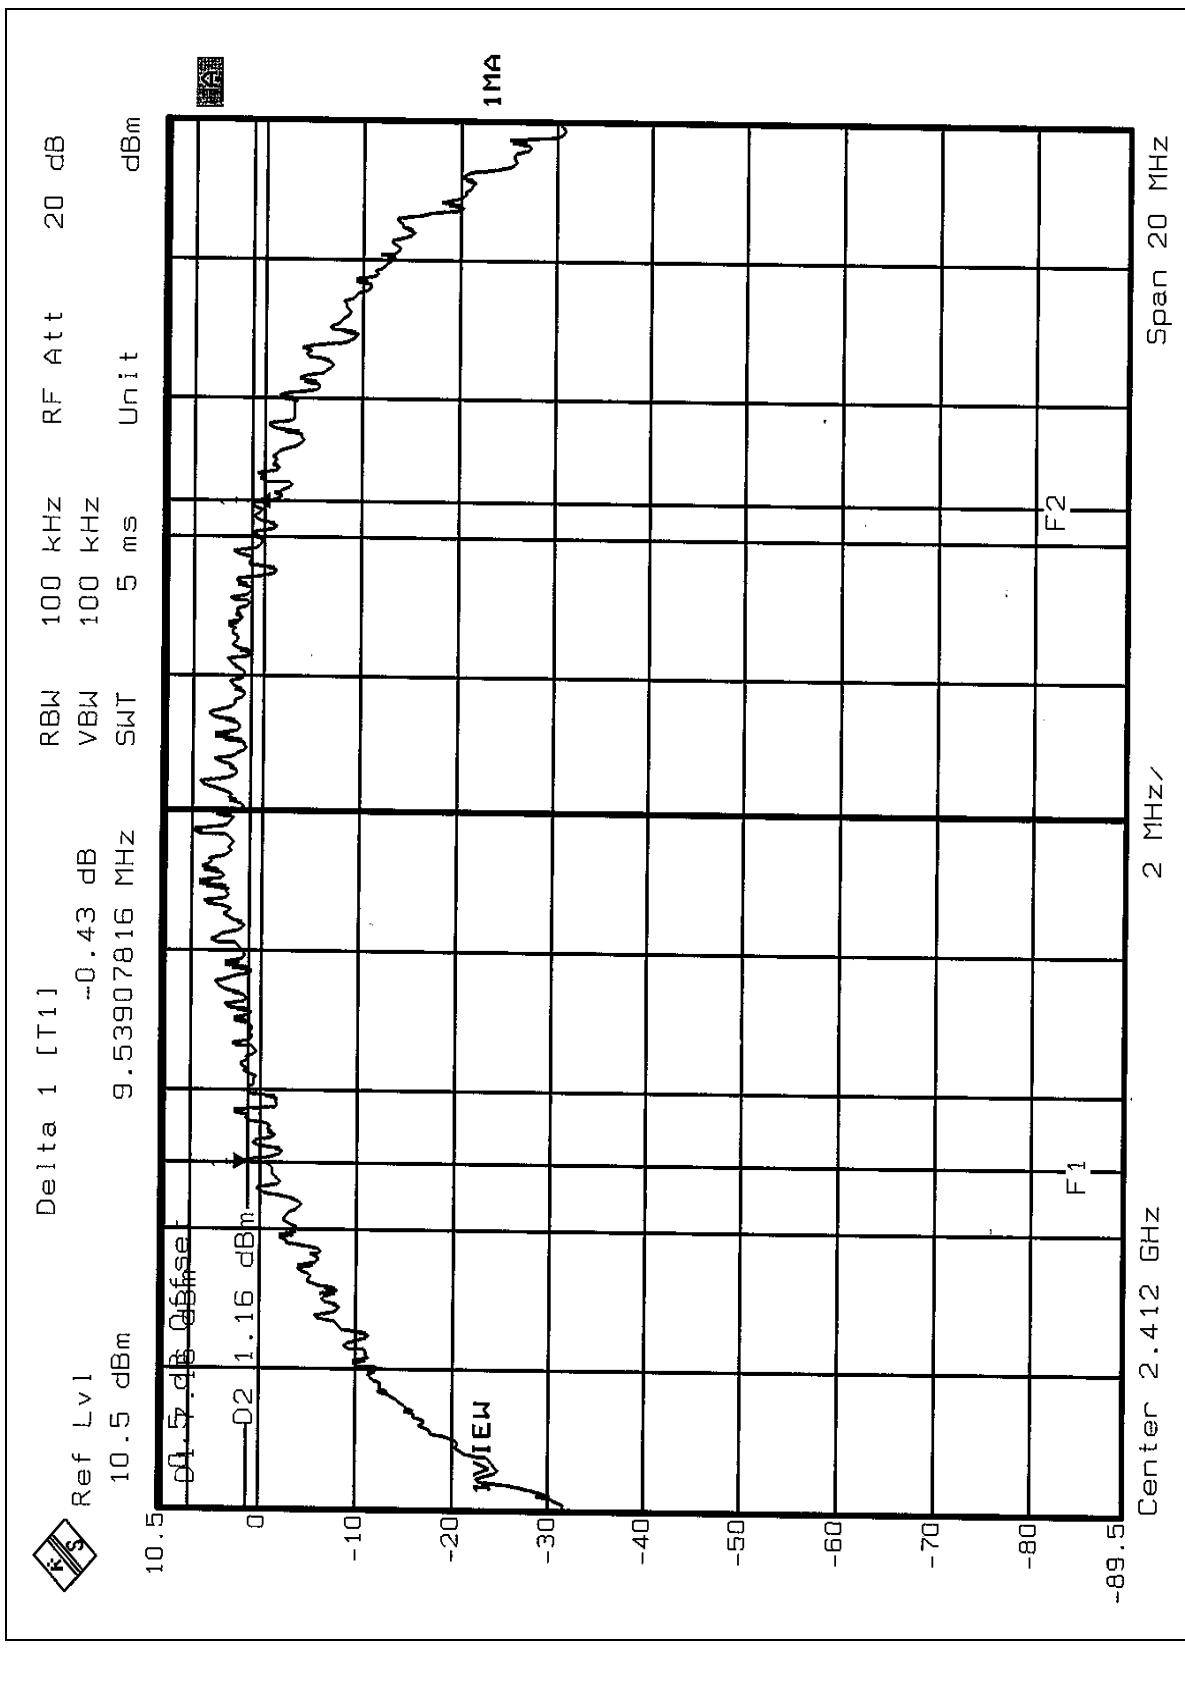

CH6

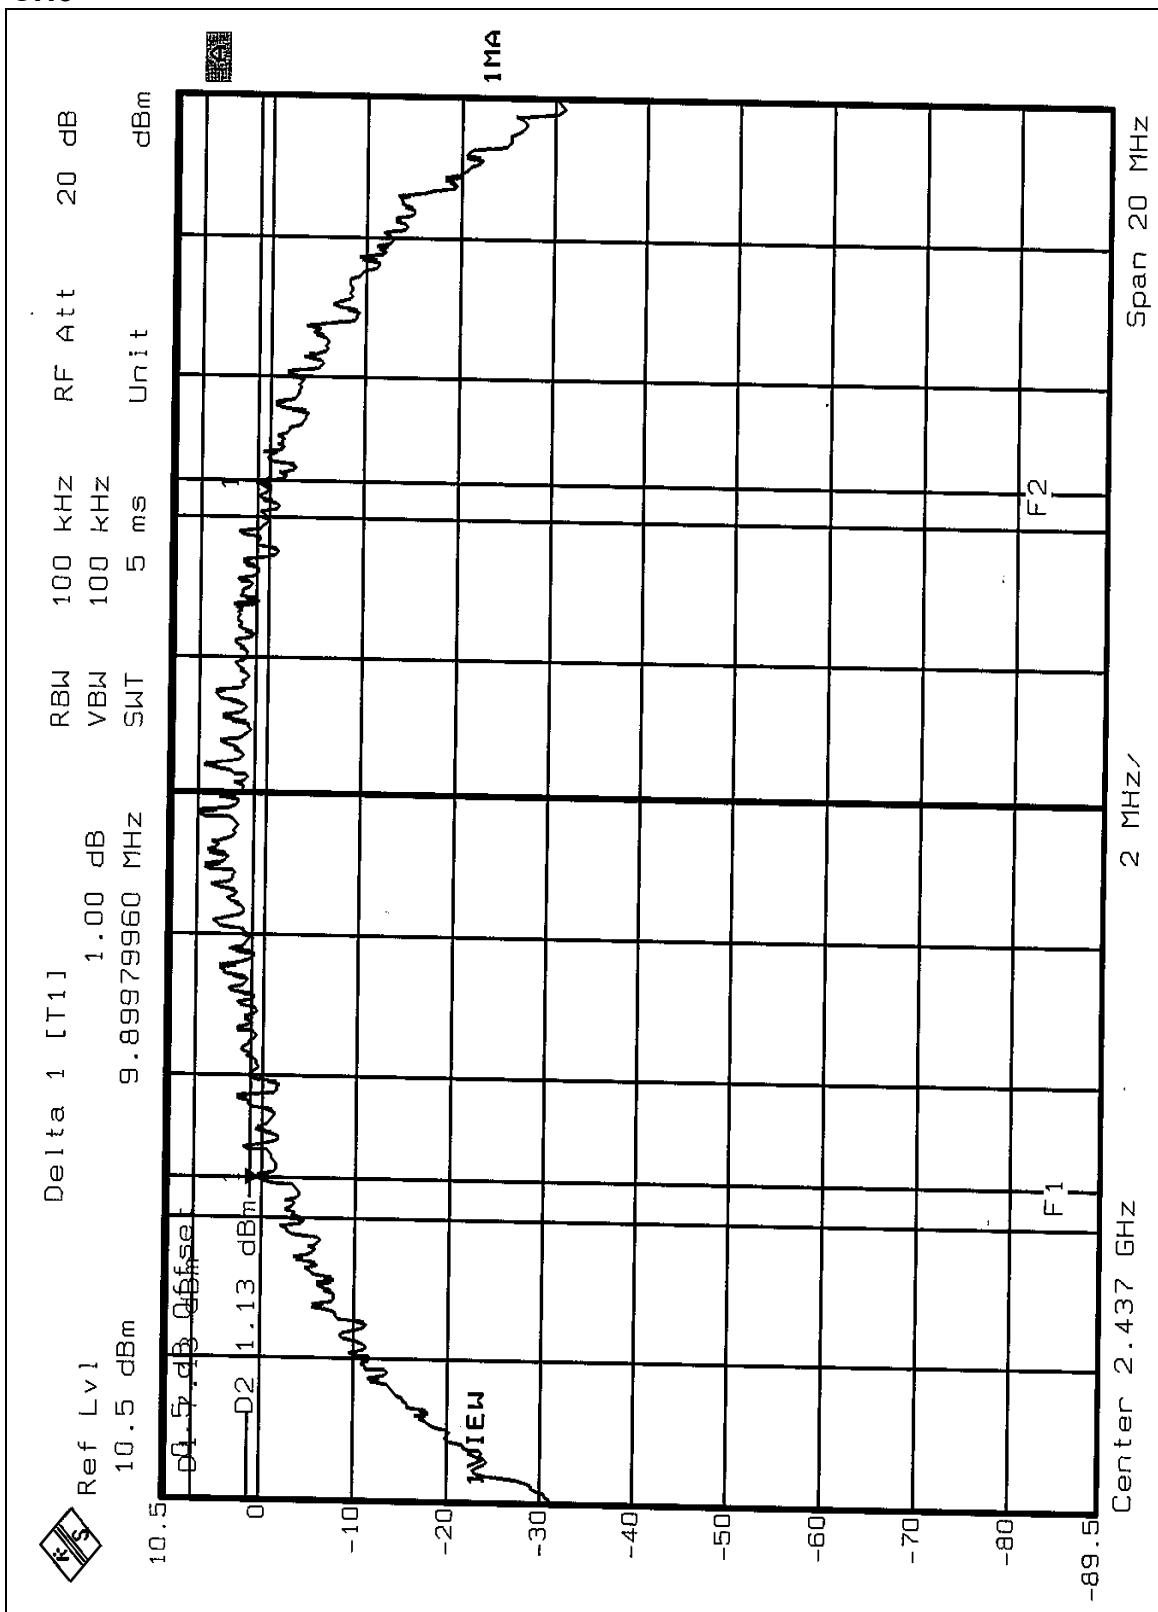

CH11

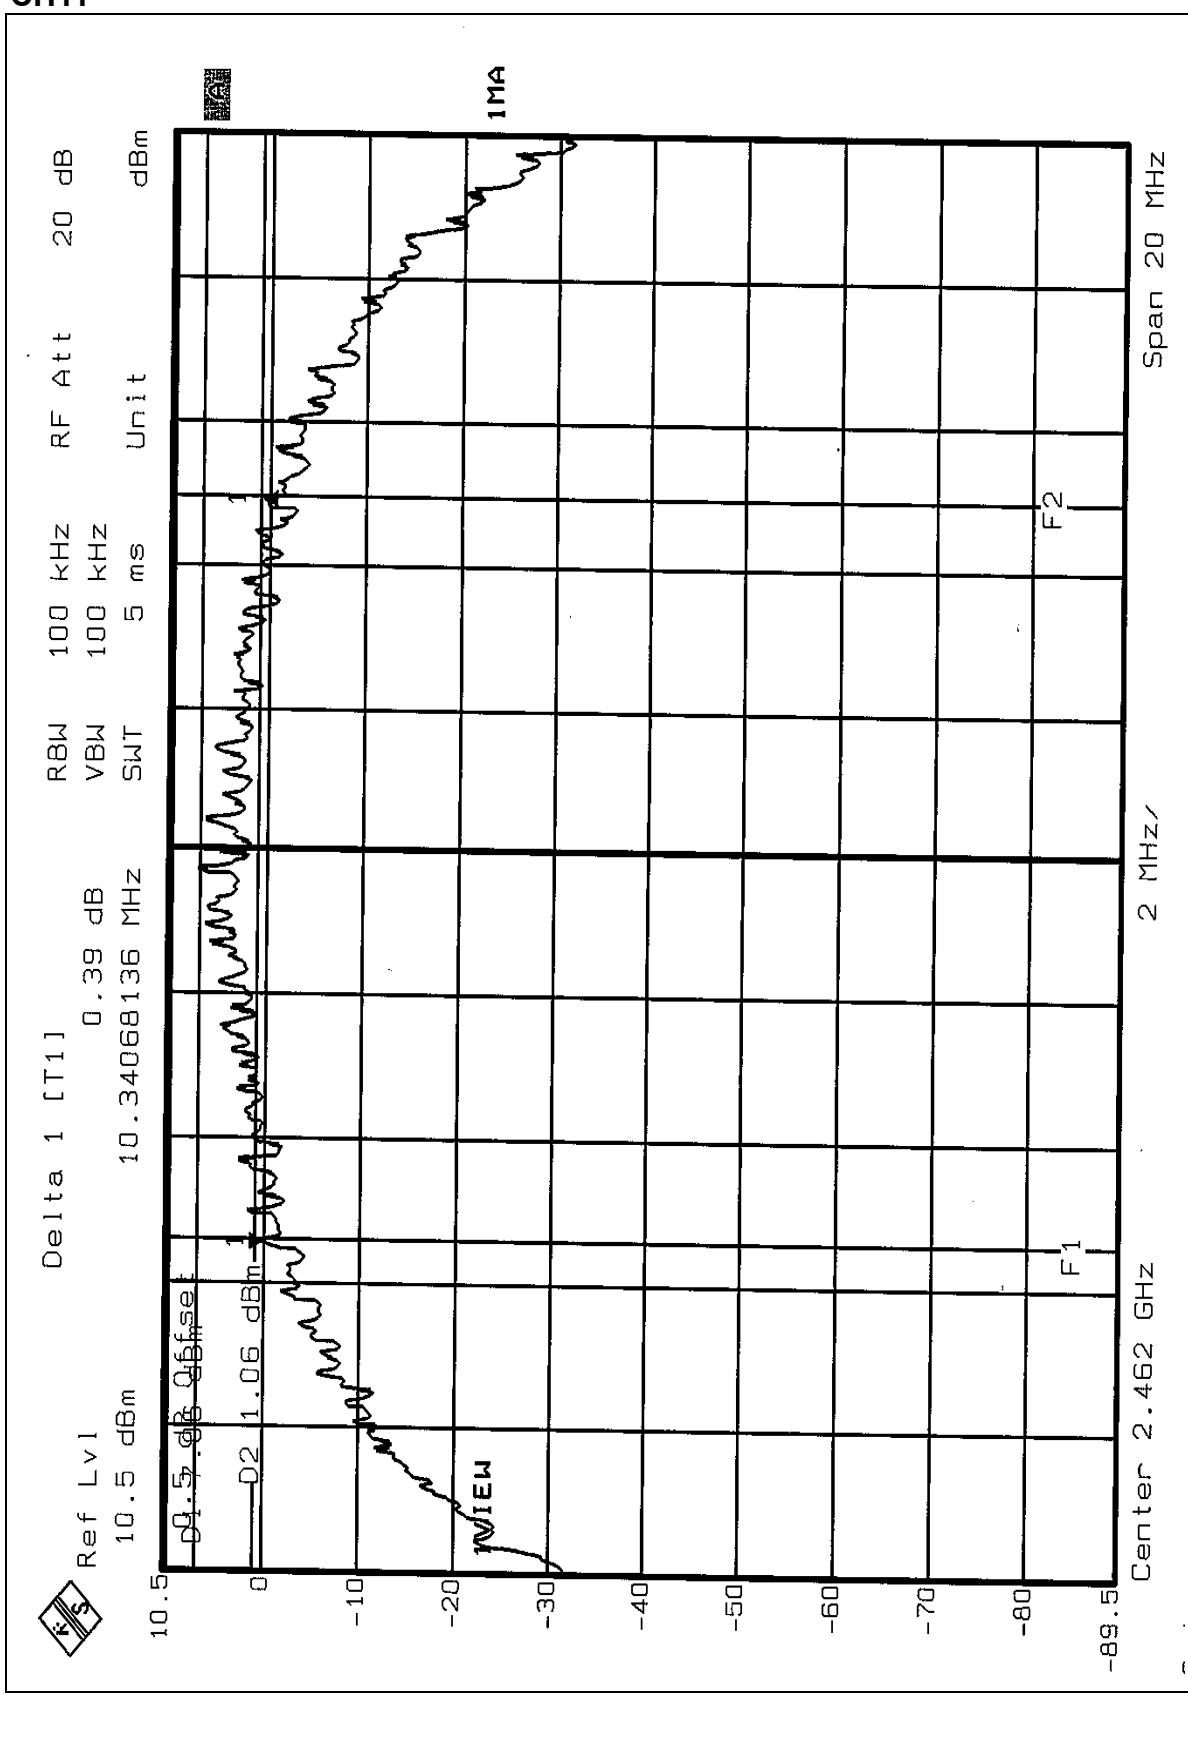

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 31, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	C019167	Feb. 1, 2005
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to peak the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS

EUT	Wireless USB Dongle	MODEL	ASS2101
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH, 991hPa
TESTED BY:	Leo Hung		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	18.00	30	PASS
6	2437	18.00	30	PASS
11	2462	18.00	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS


Same as 4.3.6

4.5.7 TEST RESULTS


EUT	Wireless USB Dongle	MODEL	ASS2101
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH, 991hPa
TESTED BY:	Leo Hung		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-5.87	8	PASS
6	2437	-5.90	8	PASS
11	2462	-5.00	8	PASS


CH1

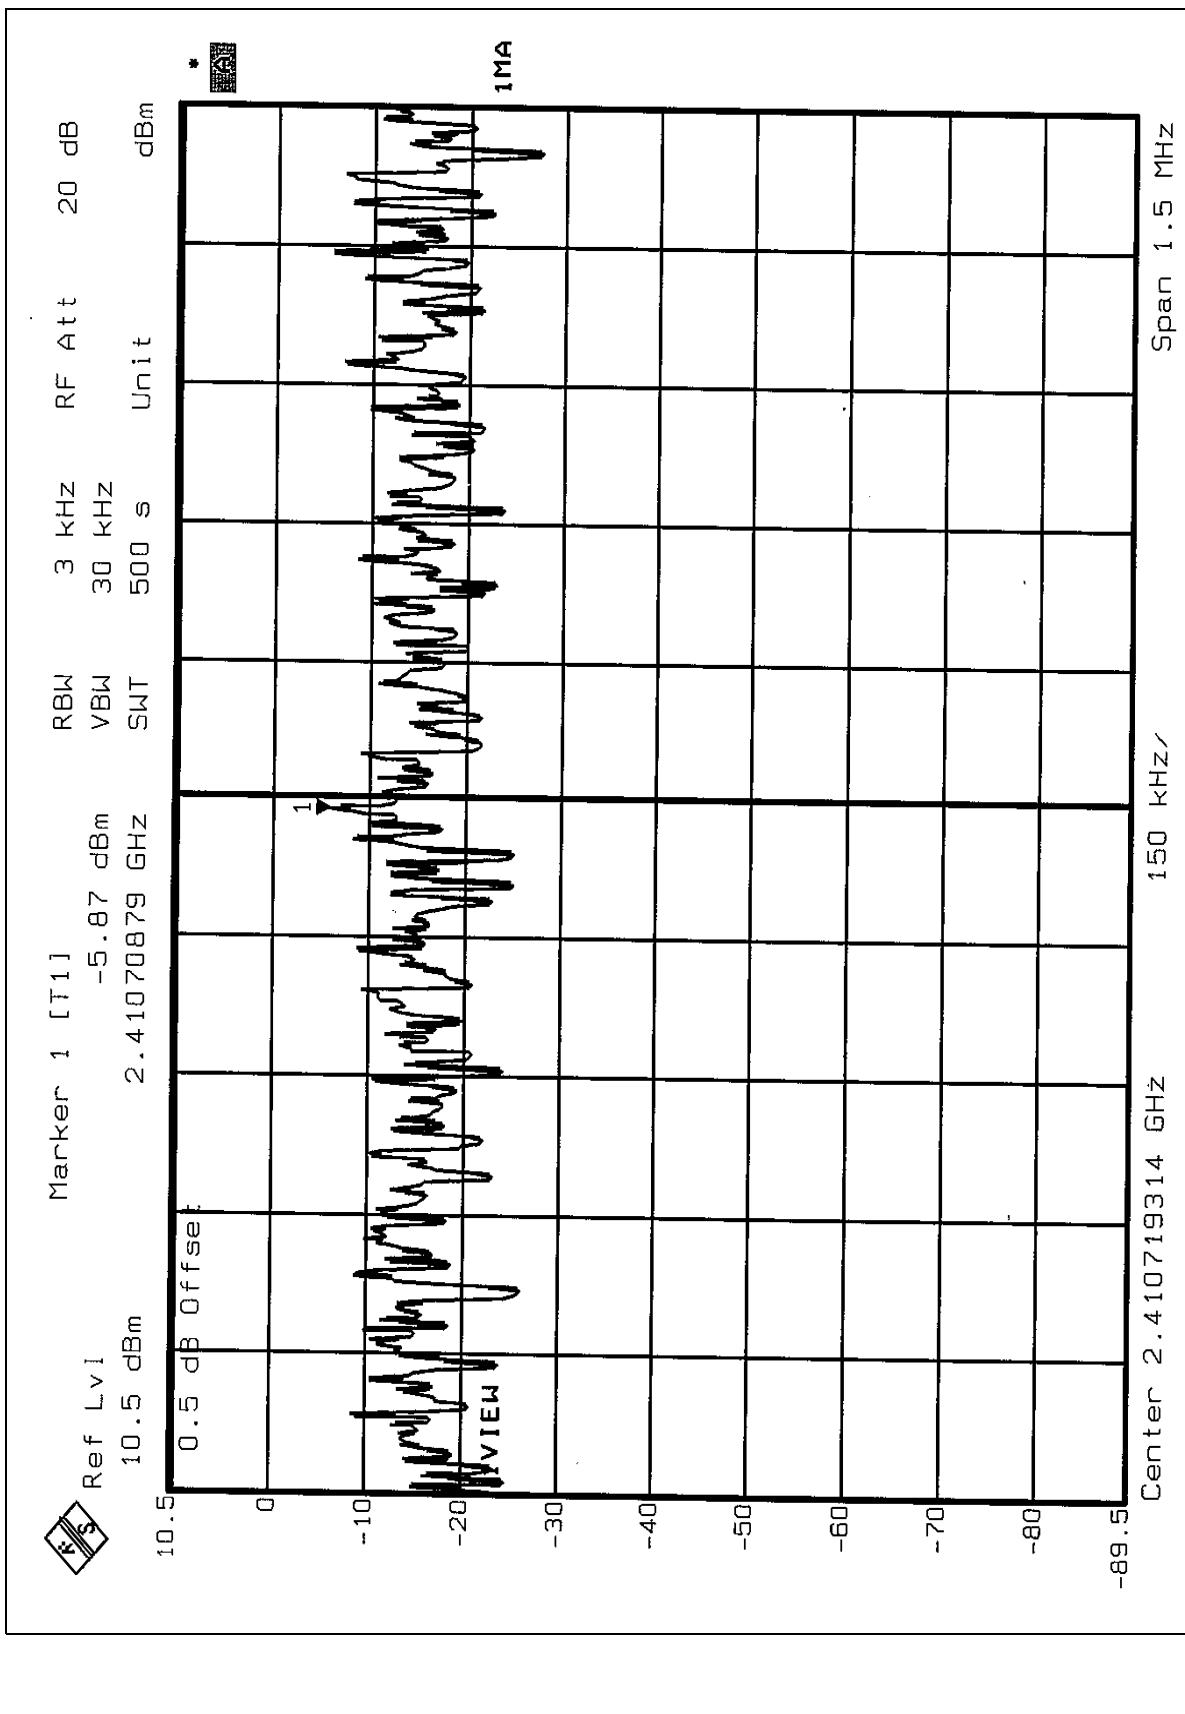

CH6

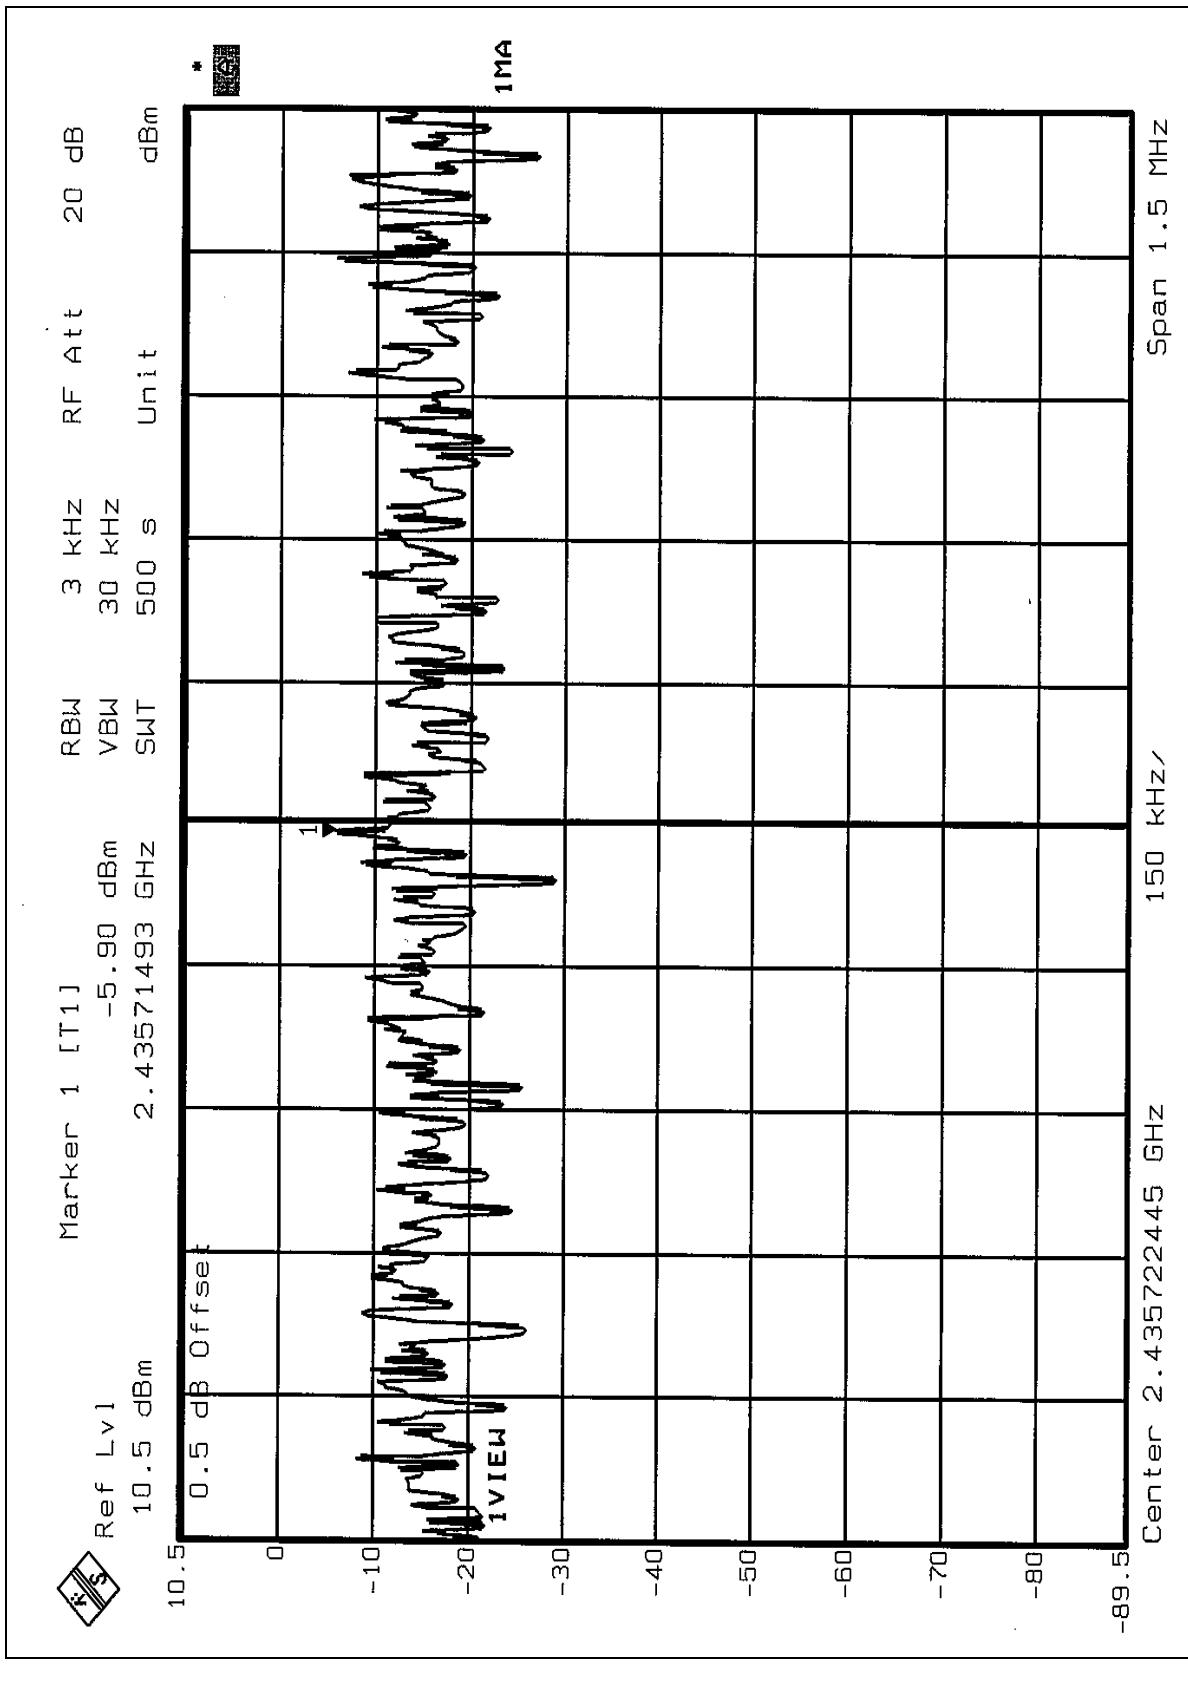

CH11

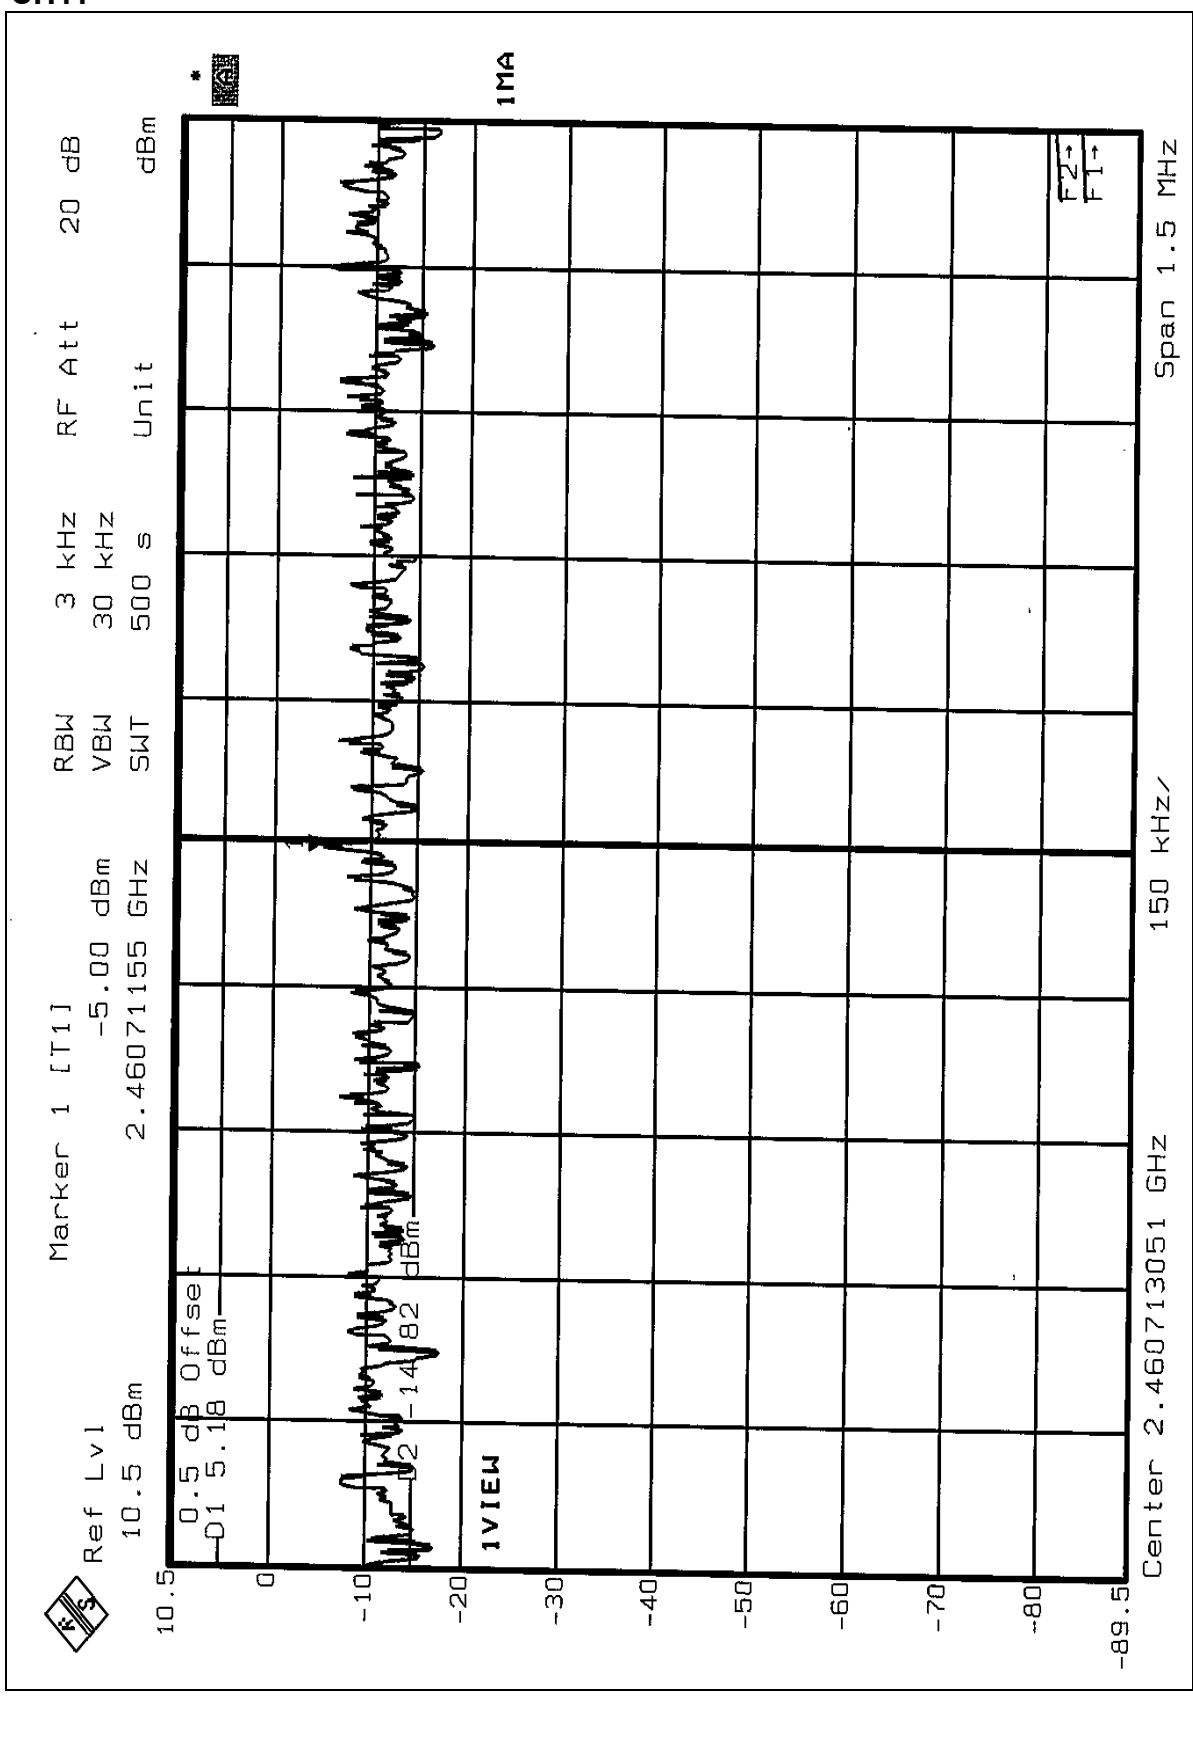

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.6 TEST RESULTS


The spectrum plots are attached on the following 4 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).


NOTE 1:


The band edge emission plot of CCK technique on the following 1-2 pages shows 59.80dB delta between carrier maximum power and local maximum emission in restrict band (2.3876GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.9 is 104.54dB_uV/m, so the maximum field strength in restrict band is $104.54 - 59.80 = 44.74$ dB_uV/m which is under 54dB_uV/m limit.


NOTE 2:

The band edge emission plot of CCK technique on the following 3-4 pages shows 61.51dB delta between carrier maximum power and local maximum emission in restrict band (2.4839GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.9 is 104.36dB_uV/m, so the maximum field strength in restrict band is $104.36 - 61.51 = 42.85$ dB_uV/m which is under 54dB_uV/m limit.

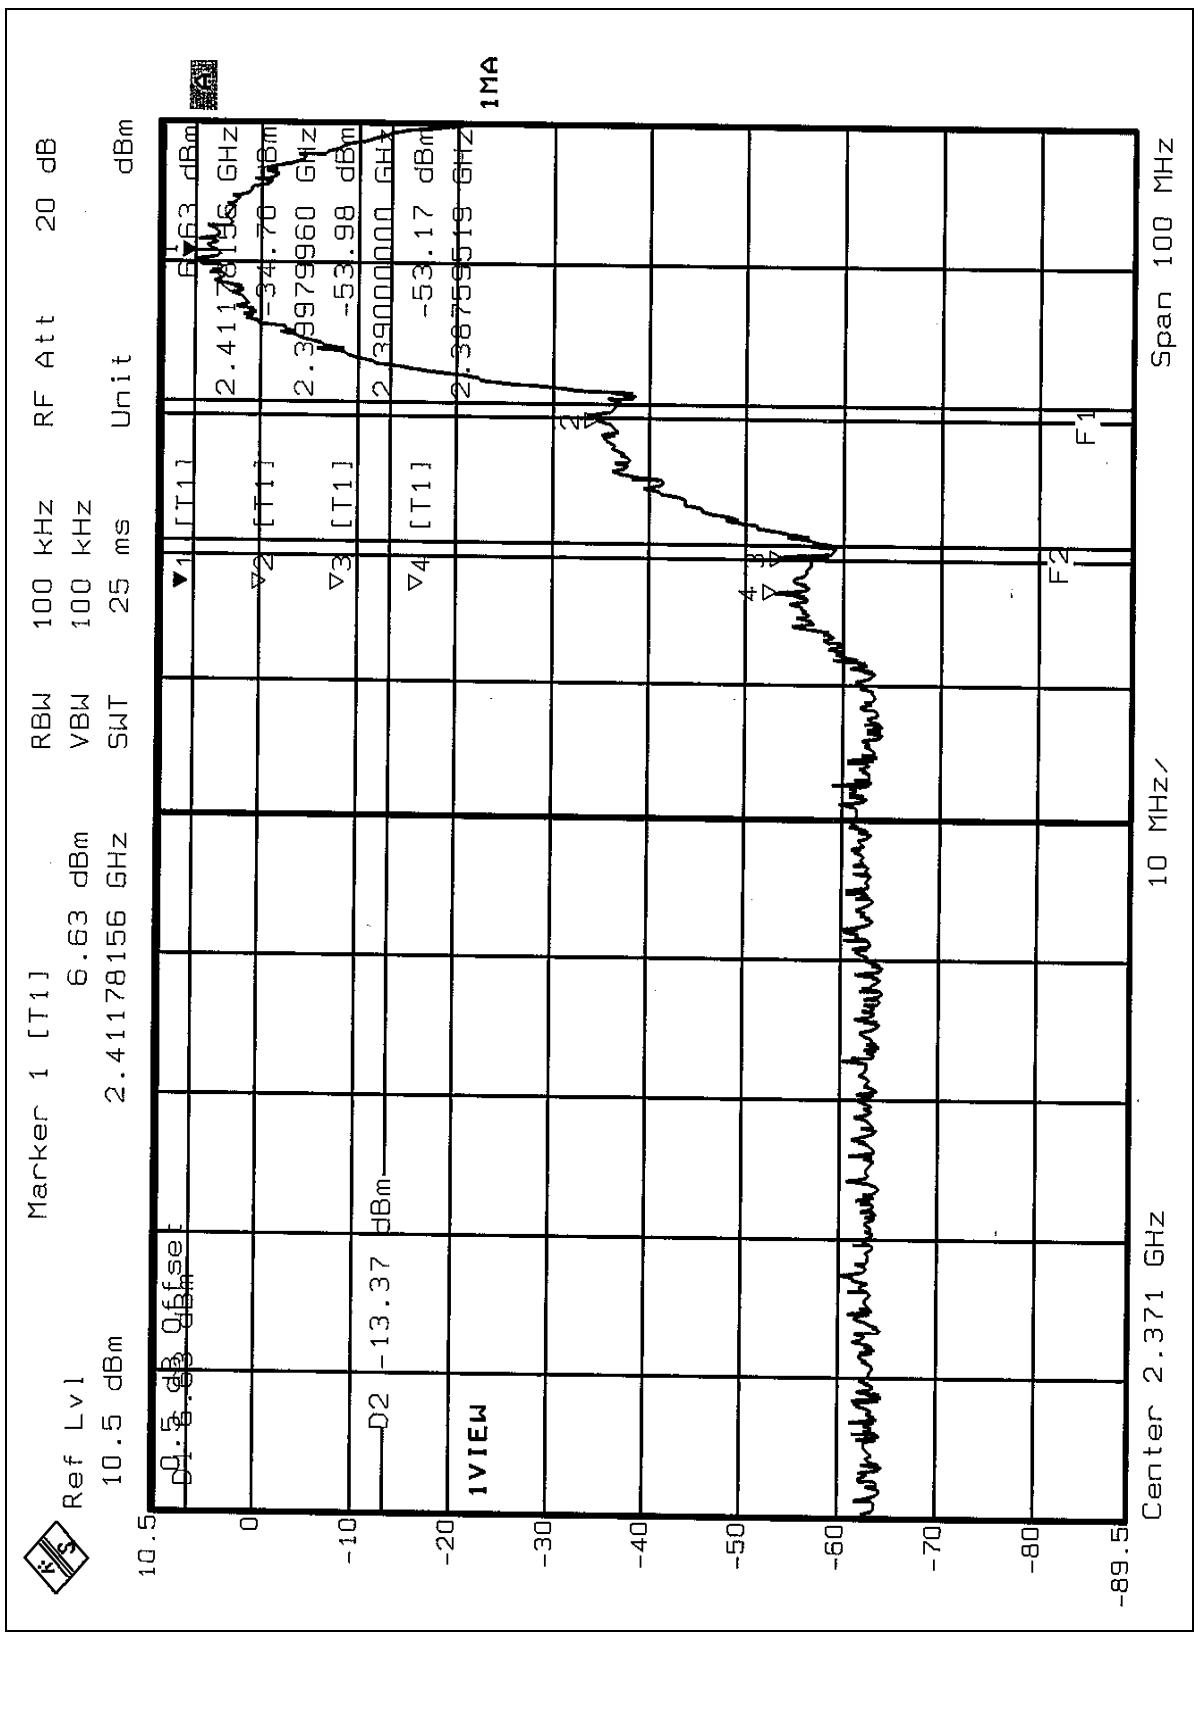

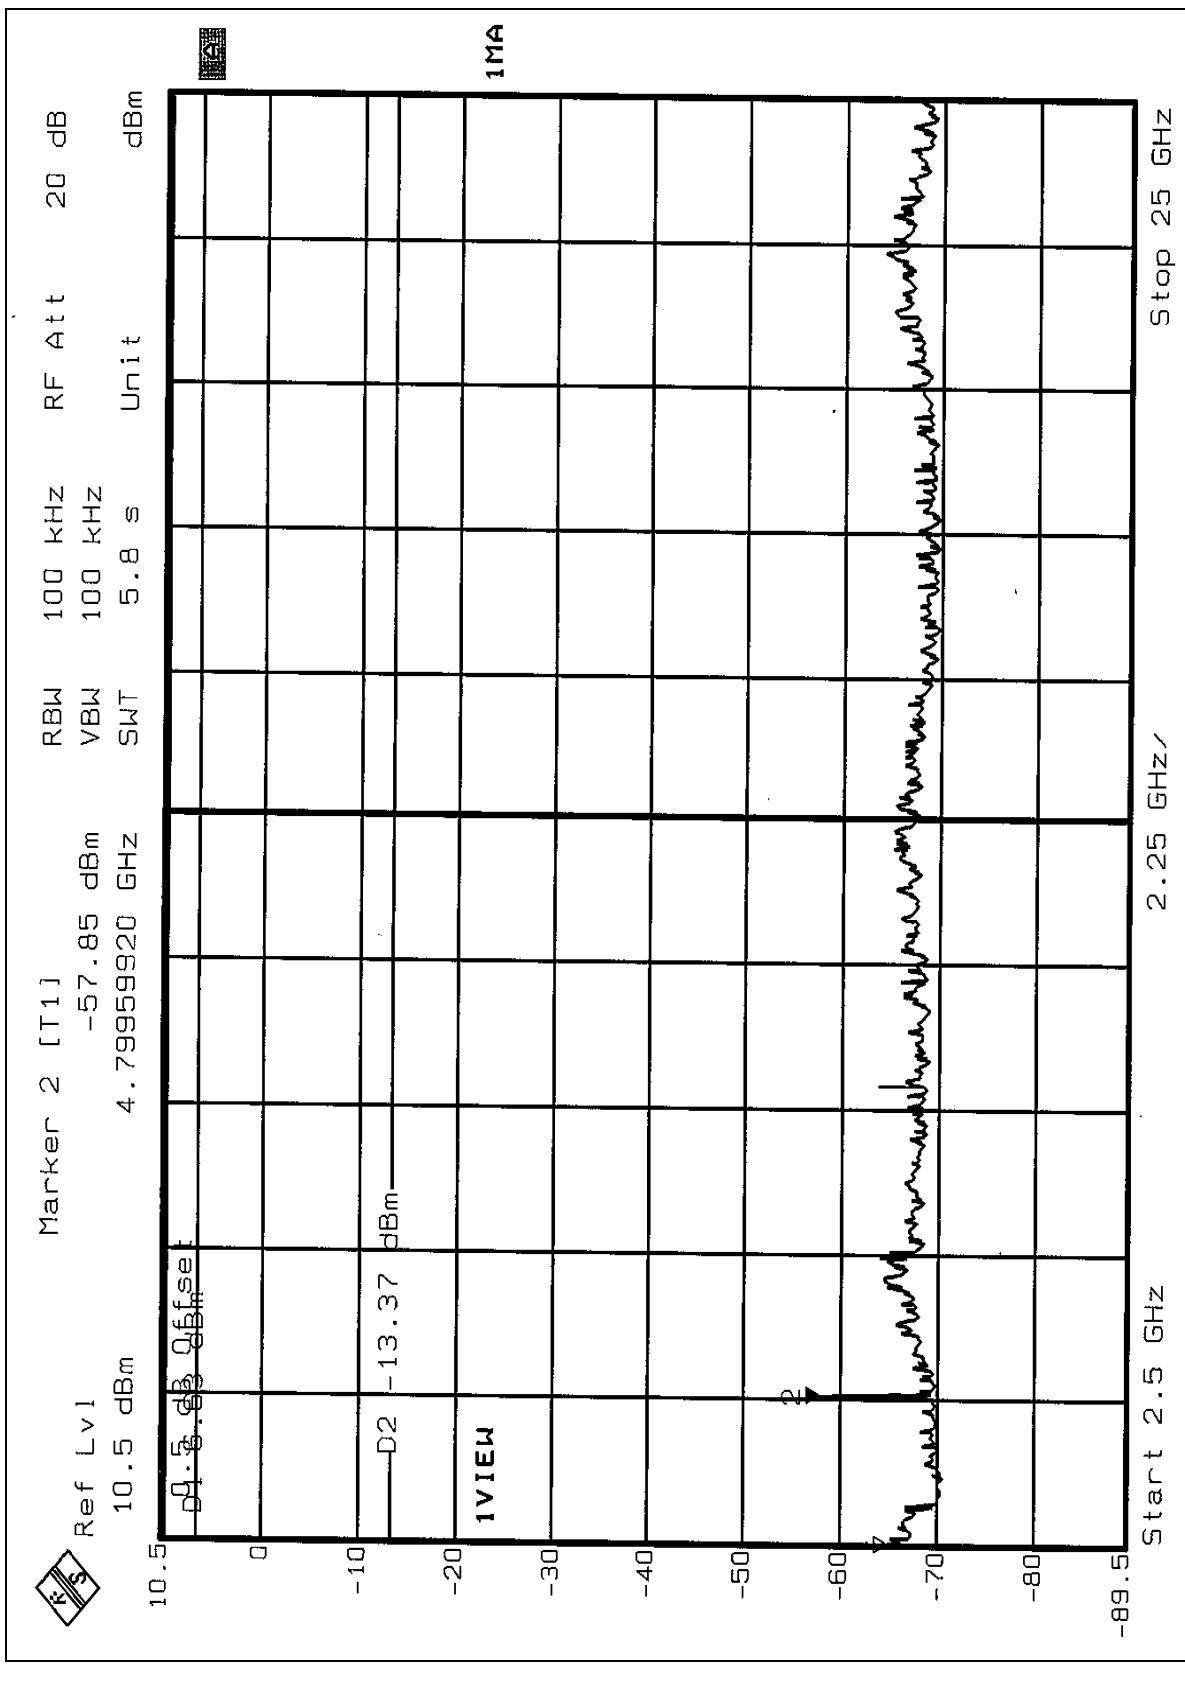

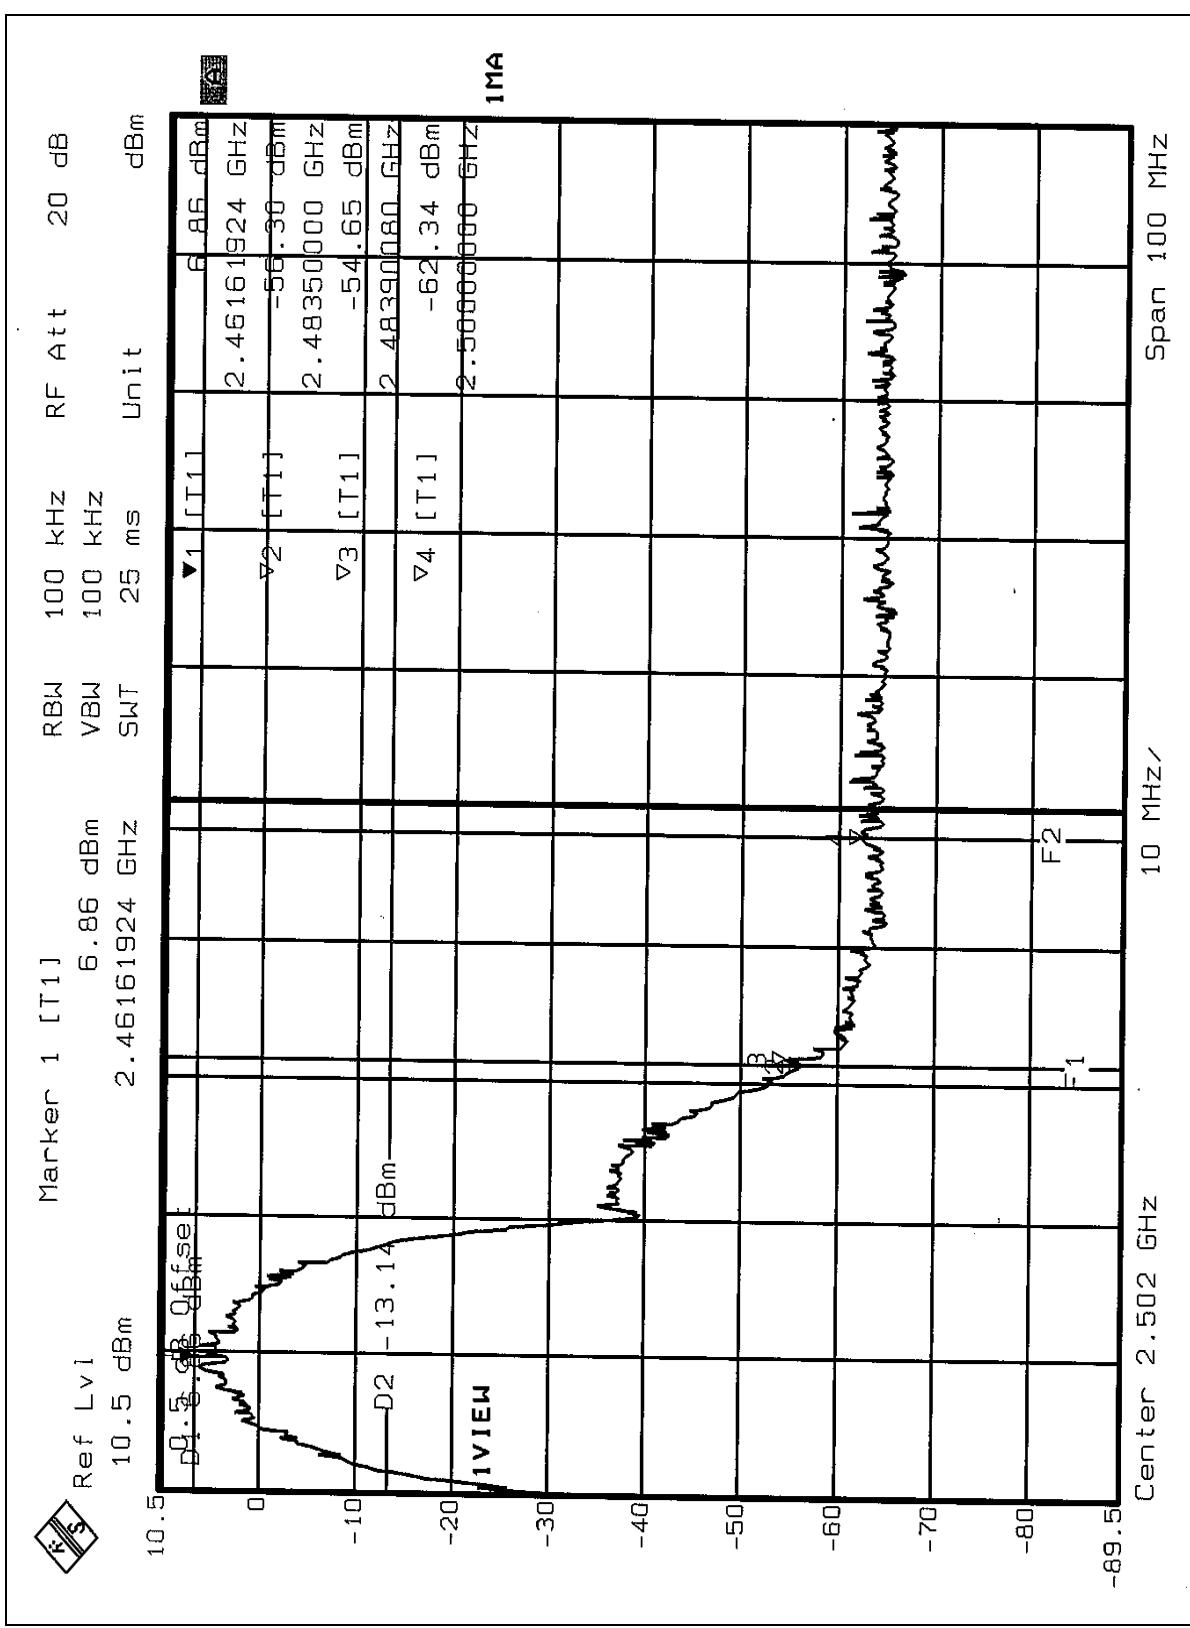

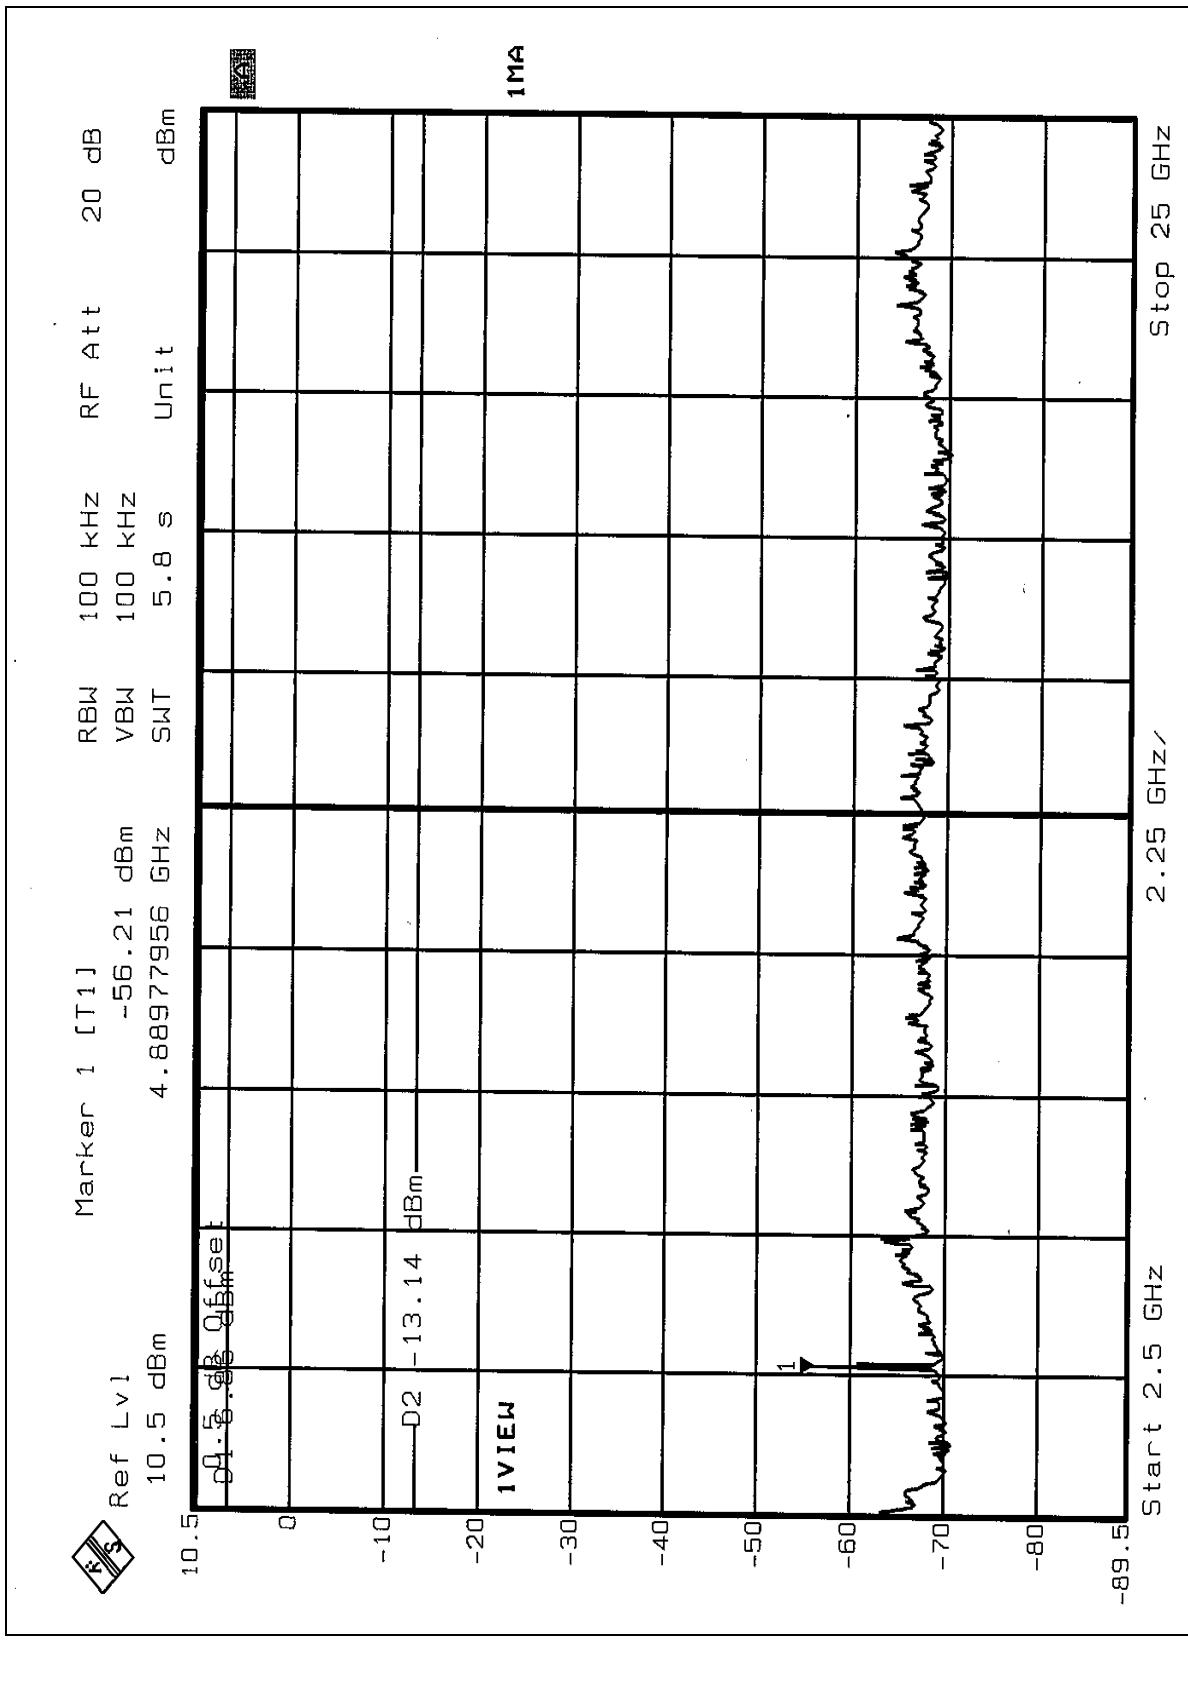



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna type used in this product is chip antenna without antenna connector. The maximum Gain of this antenna is only 0dBi.

**5 PHOTOGRAPHS OF THE TEST CONFIGURATION
CONDUCTED EMISSION TEST
(TEST MODE A)**





(TEST MODE B)



FCC ID: ROL-ASS21010000





RADIATED EMISSION TEST
(TEST MODE A)

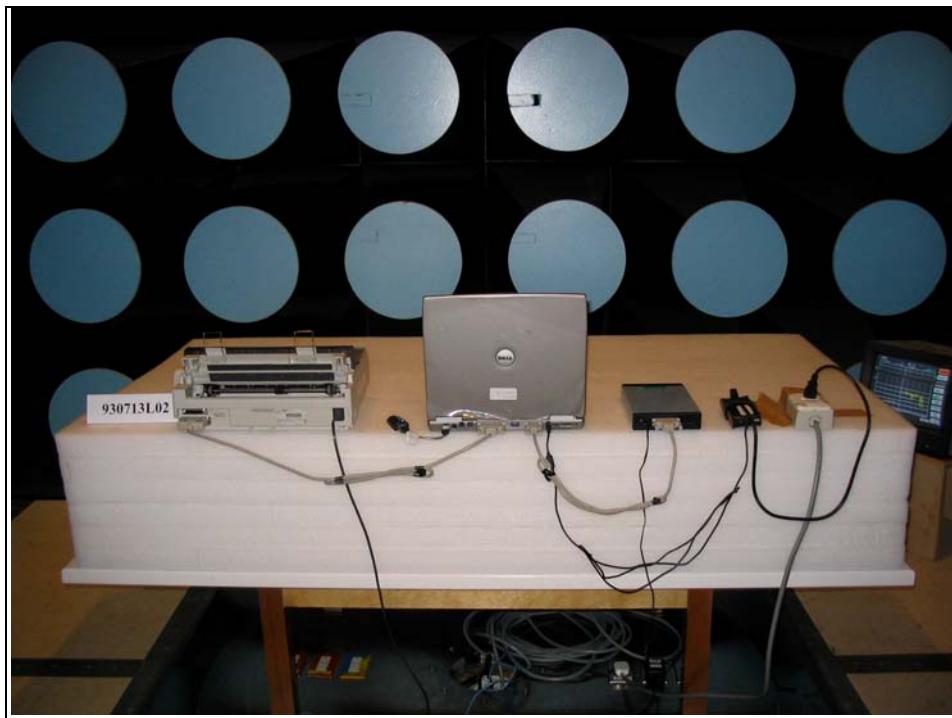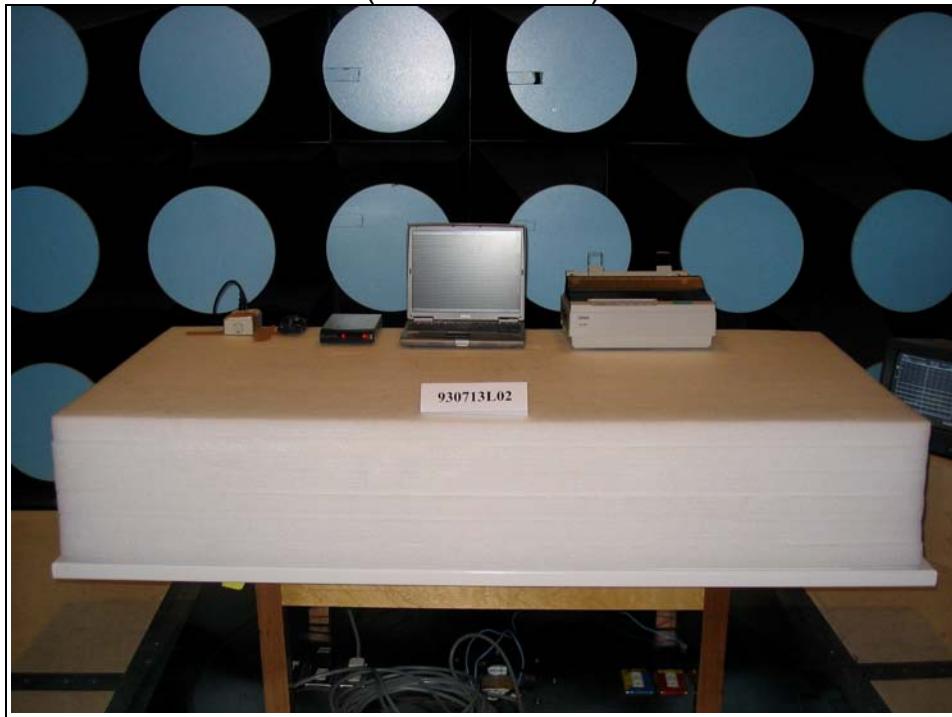

FCC ID: ROL-ASS21010000



(TEST MODE B)

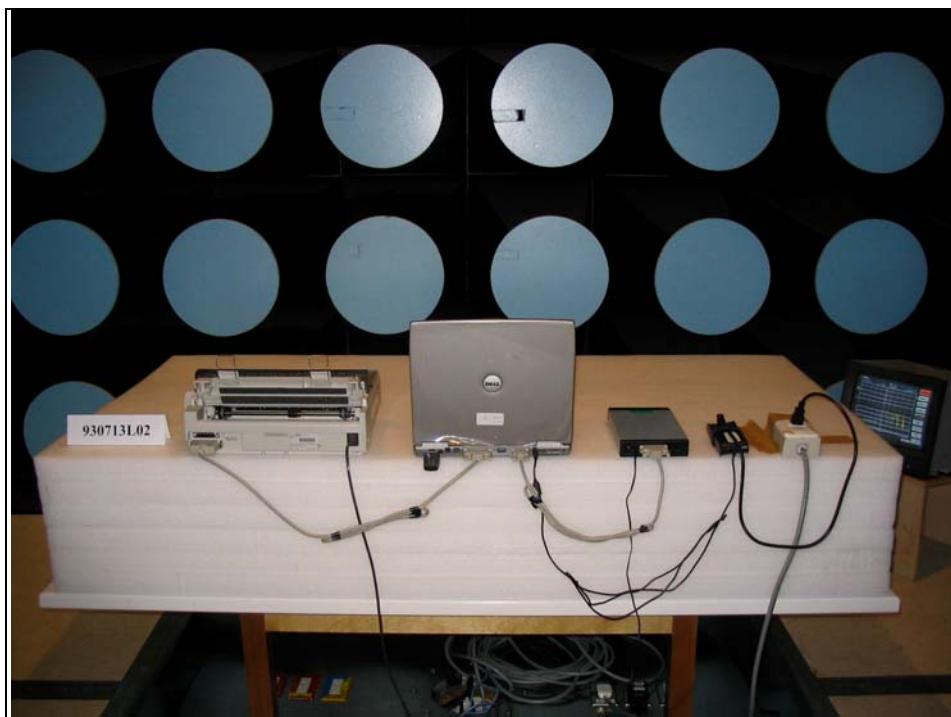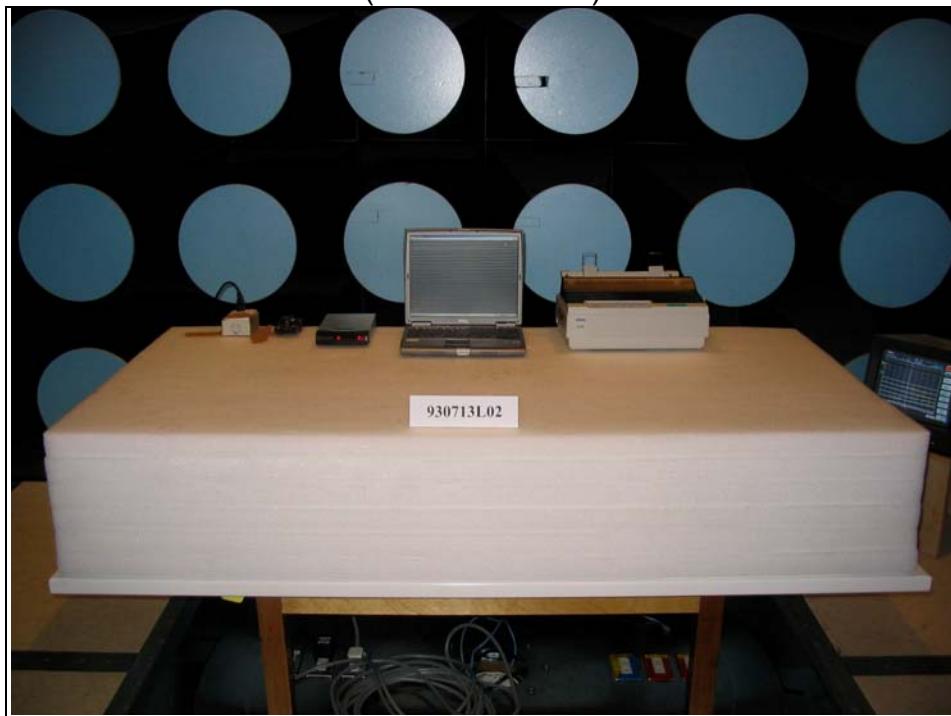

6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232
Fax: 886-3-3185050

Linko RF Lab.

Tel: 886-3-3270910
Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

Report Format Version 1.0