



EMISSION TEST REPORT

Test report file No. : **03-IST-295/FB** Date of issue : Dec. 16, 2003

Model / Type No. : INV-17W

Basic	Alternate
-------	-----------

Kind of product : LCD Monitor

Brand name : INNOVIEW

Applicant : INNOVIEW Co., Ltd.

Manufacturer : INNOVIEW Co., Ltd.

License holder : INNOVIEW Co., Ltd.

Address : 3F DongNam B/D, 1458-9, Gayang-Dong, Gangseo-Gu, Seoul, Korea

Test result according to the regulation(s)

Positive

Negative

at page 3.

This test report with appendix consists of 16 pages. The test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the Test Laboratory.

This equipment is complied with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-1992.

D I R E C T O R Y

A) Documentation.	Page
Directory	<u>2</u>
Test regulations	<u>3</u>
Information of Test Regulation	<u>3</u>
Equipment under Test	<u>4</u>
Test Conditions	<u>5 ~ 6</u>
Test Result	<u>7</u>
Measurement Uncertainty	<u>8</u>
Test-setup	<u>9 ~ 11</u>
Summary	<u>17</u>

B) Test Data.

Conducted emissions (Mains)	: 150 kHz - 30 MHz	<u>12 ~ 14</u>
Radiated emissions	: 30 MHz – 1 GHz	<u>15 ~ 16</u>

C) Appendix

TEST REGULATIONS

The tests were performed according to the following regulations ;

- FCC Part 15, Subpart B (Unintentional Radiators, Class B)

Information of Test Laboratory

IST EMC Lab.

San 21-8 Goan-Ri, Baekam-Myun, Yongin-Si, Kyunggi-Do, Korea

International - Tel : 82-31 - 333 - 4093. Fax : 82-31 - 333 - 4094.

Domestic - Tel : 031 - 333 - 4093. Fax : 031 - 333 - 4094.

EQUIPMENT UNDER TEST

Equipment Description :

LCD Pannel :	Type(LG) : TFT active matrix wide color
Resolution :	1280 x 768(WXGA)
Color display :	16.1M
Dimensions :	450mm(W) x 410mm(H) x 180mm(D)
Power Source :	DC 12V
Power Consumption :	Normal : 36W, Stand-by-mode : Under 5W
	Model : DTA-SXGA03
Power Supply Adater :	Maker : Display Technology Co.,ltd.
	Input : 100 ~ 240 Vac, 50/60 Hz, 1.2 A,
	Output : 12 Vdc, 4.5 A

EUT Type :

- ☒ Table-Top.
☐ Floor-Standing.
☐ Table-Top and Floor-Standing(Combination).

Operation – mode of the E.U.T. :

The equipment under test was operated during the measurement under following conditions :

- ☐ Standby.
☒ Operational Condition : Scrolling “H” characters under MS Windows,
 at test mode of 1280 X 768, 60 Hz

Configuration of the equipment under test :

Following peripheral devices and interface cables were connected during the measurement :

Equipment	Type	Brand	Serial No.
PC	Vetra VL420MT	HP	SG23101784
Keyboard	SK-2502C	HP	M020321066
PS/2 Mouse	M-S48A	HP	LZC20602926
Serial Mouse	M-S428	Logitech	LCA53305547
Printer	A0302384	Northern Telecom	26633S60168
Head set	NM-V33	TOCO	N/A
Connecting Interface Cables :			
- Unshielded AC power cable : 1.8 m			
- Unshielded DC power cable(with one ferrite core) : 1.5 m			
- Shielded monitor's signal cable(with two ferrite core) : 1.5 m			
- Shielded printer's signal cable (with two ferrite core): 1.8 m			

TEST CONDITIONS

The measurement of the conducted emissions (Interference voltage) was performed in a shielded room.

Test location :

☒ Shielded room. No.1

☐ Compact chamber 2

Used testing instruments :

Name	Type	Manufacturer	Calibration. Date	Serial Number
ESH 3	Test Receiver	Rohde & Schwarz	Jul. 22, 2003	892108/018
3725/2	LISN	EMCO	Jul. 23, 2003	9101-2068
KNW-407	LISN	Hyup-Rip	Jul. 23, 2003	8-883-10
ESH 3-Z2	Pulse Limiter	Rohde & Schwarz	Jul. 23, 2003	357.8810.52

Test - accessories :

Type	Manufacturer
Aneroid Barometer	Sato
Hygrometer	Sato

Measurement Procedures :

Conducted emissions measurements were made in accordance with ANSI C-63.4-1992, "Method of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The measurement were performed over the frequency range of 0.15MHz to 30MHz using a 50T/50uH LISN as the input transducer to an EMI/Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within an IF bandwidth of 10kHz or for "quasi-peak" within a bandwidth of 9kHz.

All used test-instruments as well as the test-accessories are calibrated regularly.

Test engineer :



B.S. Shim / Research engineer
IST EMC Lab.

The **measurement of the radiated emissions (Electric field)** in the frequency range from 30 MHz to 1GHz was performed in horizontal and vertical antenna polarization at a open-site which meet the site attenuation requirement of ANSI C63.4-1992 and a test distance of :

Location : ☐ Open Site No. 1 ☒ Open Site No. 2 ☐ Open Site No. 3
 Distance : ☒ 3 meters ☐ 10 meters

Used testing instruments :

Name	Type	Manufacturer	Calibration. Date	Serial Number
ESVP	Test Receiver	Rohde & Schwarz	Jul. 22, 2003	861744/004
VULB 9160	Antenna	Schwarzbeck	Jul. 09, 2003	3048

Test - accessories :

Type	Manufacturer
Aneroid Barometer	Sato
Hygrometer	Sato

Measurement procedures

Radiated measurements were in accordance with ANSI C63.4-1992 "Method of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The measurements were performed over the frequency range of 30MHz to 1GHz using antenna as the input transducer to a EMI/Field Intensity Meter. The measurements were made with the detector set for "quasi-peak" within a bandwidth of 120kHz.

All used test-instruments as well as the test-accessories are calibrated regularly.

Test engineer :



B.S. Shim / Research engineer
IST EMC Lab.

TEST RESULT

Conducted emissions : 150 kHz - 30 MHz

The requirements are.

☒ KEPT

☐ NOT KEPT

Min. limit margin

_____ 5.3 _____ dB at _____ 0.266 _____ MHz

Remarks : See test-data at pages 12 ~ 14.

Radiated emissions (electric field) 30 MHz - 1000 MHz

The requirements are.

☒ KEPT

☐ NOT KEPT

Min. limit margin

_____ 3.4 _____ dB at _____ 476.1 _____ MHz

Remarks : See test-data at page 15 ~ 16.

Measurement Uncertainty Calculation

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994).

Contribution (Conducted Emissions)	Probability Distribution	Uncertainty ($\pm$ dB)
		0.15-30MHz
Receiver Specification	Rectangular	1.5
LISN Coupling Specification	Rectangular	1.5
Cable and Input Attenuator Calibration	Normal (k=2)	0.5
Mismatch to Reciver	U-Shaped	-0.8 / +0.7
System Repeatability	Normal (k=1)	0.2
Combined Standard Uncertainty	Normal (k=2)	-1.85 / +1.71
Expanded Uncertainty U	Normal (k=2)	-3.7 / +3.42

$$U_{c,min us} = -1.85, U_{c,plus} = 1.71$$

$$U = -3.70 / +3.42 \text{ (k=2, 95.45\% confidence level)}$$


Contribution (Radiated Emissions)	Probability Distribution	Uncertainties($\pm$ dB)
		3 m
Antenna		
Factor	Normal (k=2)	0.9968
Frequency Interpolation	Rectangular	0.1039
Height Variation	Rectangular	-2.6 / +1.5
Directivity Difference	Rectangular	-1.0 / +0
Phase Center Location	Rectangular	1.0
Cable Loss	Normal (k=2)	0.5
Receiver		
Voltage Accuracy	Normal (k=2)	2.0
Pulse Response	Rectangular	1.5
Absolute Repetition Rate	Rectangular	1.5
Mismatch to Receiver		
$ \tilde{u}_{antenna} = 0.33$	U-Shaped	-1.0 / +0.9
$ \tilde{u}_{receiver} = 0.33$		
System Repeatability	Std Deviation	0.5
Combined Standard Uncertainty	Normal	-2.6048 / 2.2775
Expanded Uncertainty U	Normal (k=2)	-5.21 / +4.55

$$U_{c,min us} = -2.6048, U_{c,plus} = 2.2775$$


$$U = -5.21 / +4.55 \text{ (k=2, 95.45\% confidence level)}$$

TEST SETUP (Drawings)

Type : INV-17W

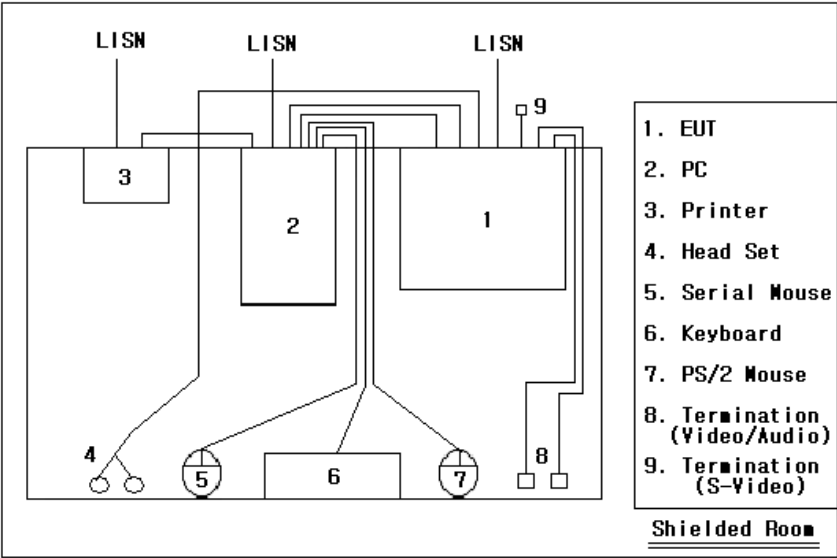

Conducted Emissions 150kHz - 30 MHz

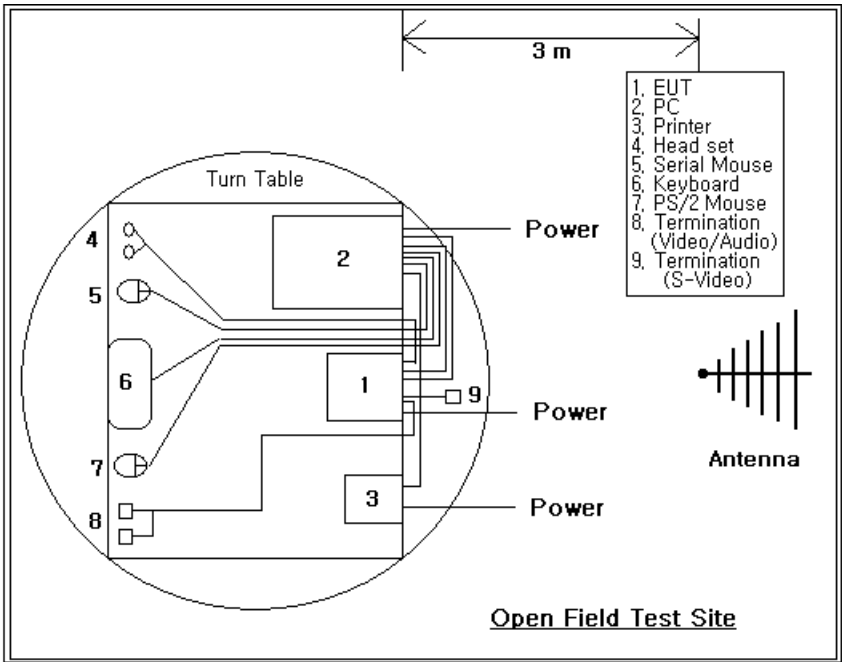

Radiated Emissions 30 MHz - 1000 MHz

Type : INV-17W

Conducted Emissions 150kHz - 30 MHz



TEST SETUP (Photos)

Type : INV-17W



Radiated Emissions 30MHz - 1000 MHz



IST EMC LAB. Y.Y

Conducted Emission Test Data

Type	INV-17W		
Manufacturer	INNOVIEW Co., Ltd.		
Operation mode	Scrolling "H" pattern display at 1280 x 768, 60Hz		
Environmental Condition	Temperature	:	22.5 ℃
	Humidity	:	48 %
	Atmospheric pressure	:	1014mbar
Date	Dec. 16, 2003		

Highest Emissions relative to the limit


Frequency [MHz]	Reading [dBσV]		Phase	Insertion Loss (LISN)	Limit [dBσV]		Margin [dB]	
	Q-peak	AV			Q-peak	AV	Q-peak	AV
0.201	46.1	33.5	L1	0.8	63.6	53.6	16.7	19.3
0.267	51.6	43.3		0.8	61.2	51.2	8.8	7.1
0.668	30.2	27.4		0.8	56.0	46.0	25.0	17.8
1.469	28.9	28.4		0.8	56.0	46.0	26.3	16.8
3.608	30.5	29.6		0.8	60.0	50.0	24.7	15.6
15.573	31.1	24.5		0.8	60.0	50.0	28.1	24.7
0.199	47.5	35.1	N	0.8	63.7	53.7	15.4	17.8
0.266	51.3	45.1		0.8	61.2	51.2	9.1	5.3
0.599	30.0	24.8		0.8	56.0	46.0	25.2	20.4
3.528	31.9	30.0		0.8	56.0	46.0	23.3	15.2
6.390	26.6	23.4		0.8	60.0	50.0	32.6	25.8
14.580	26.6	20.0		0.8	60.0	50.0	32.6	29.2
Cable loss are less than 0.1 dB								


*L1 : Live Line

**N : Neutral Line

*** Please refer to data graphs at page 13 ~ 14.

Coverage factor of k=2 will ensure that the level of confidence will be approximately 95.45%,
 Uncertainty U = -3.70 / +3.42 [dB]

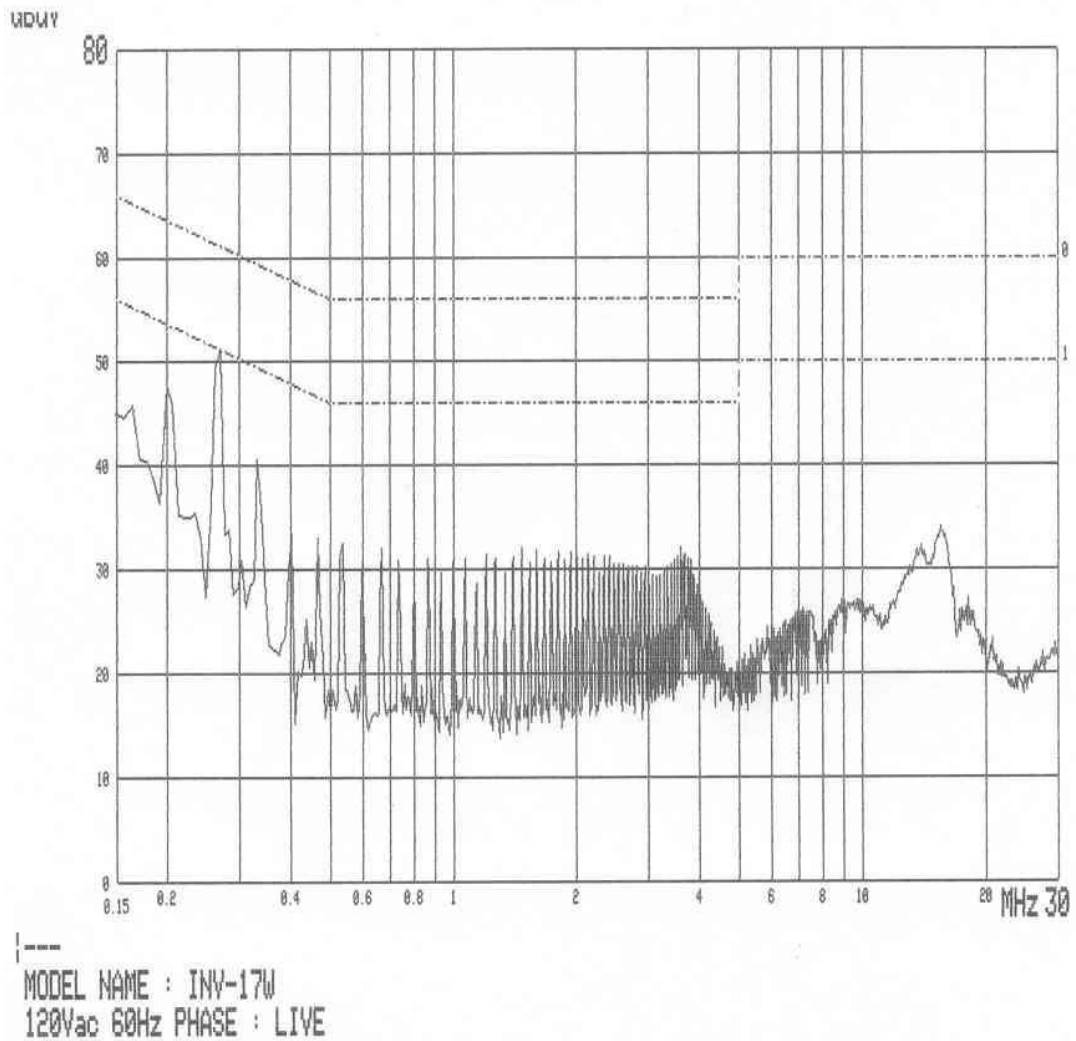

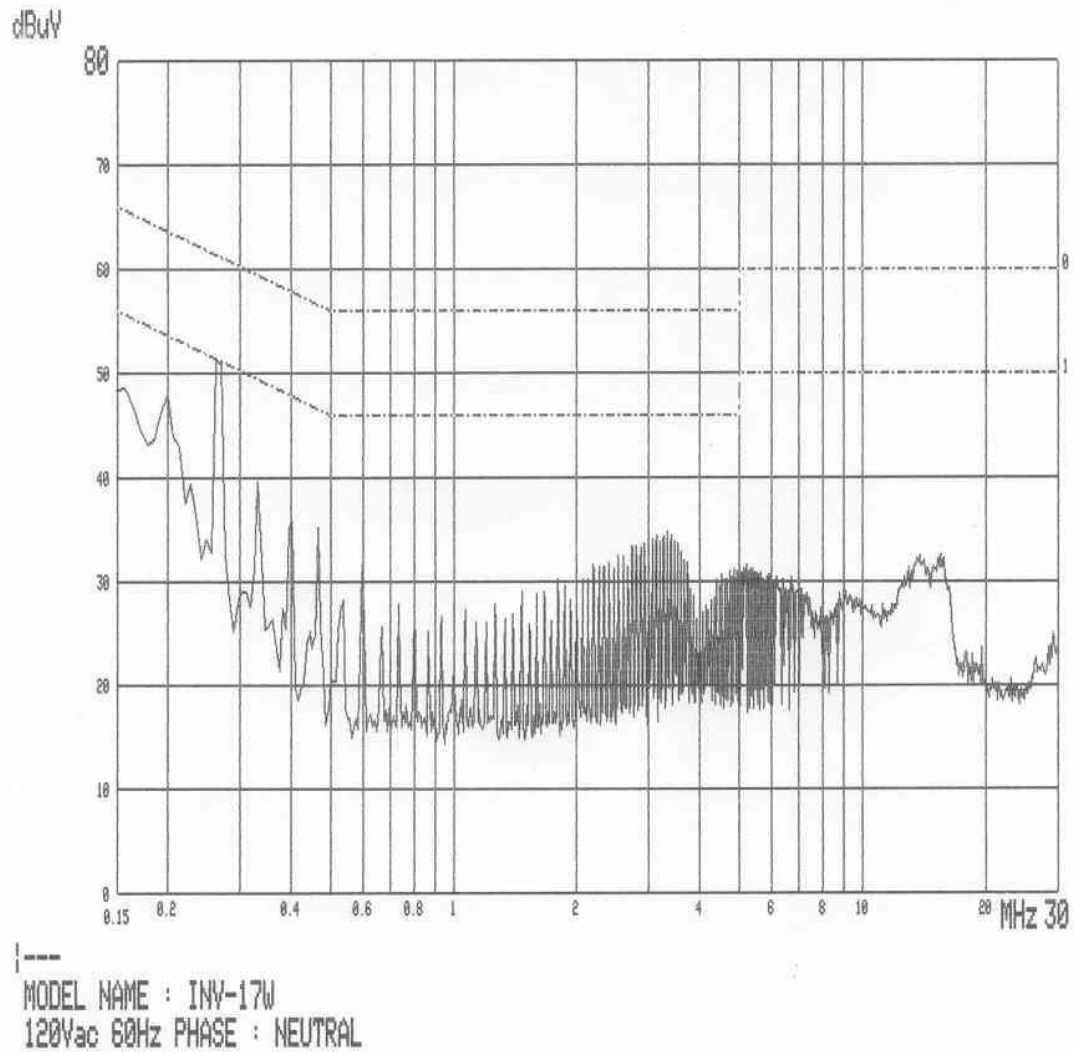


Radiation Test Data

Type	INV-17W
Manufacturer	INNOVIEW Co., Ltd.
Operation mode	Scrolling "H" pattern display at 1280 x 768, 60Hz
Environmental Condition	Temperature : 9 ℃ Humidity : 49 % Atmospheric pressure : 1014 mbar
Test distance	3 m
Antenna	VULB9160
Date	Dec. 16, 2003

Freq. [MHz]	Reading [dBuV]	Antenna Factor [dB]	Cable Loss [dB]	Angle [deg]	Height [cm]	Polar [H/V]	Result [dBuV]	Limit [dBuV]	Margin [dB]
48.0	14.2	12.1	1.4	295	110	V	27.7	40.0	12.3
78.2	12.6	8.3	1.9	32	110	V	22.8	40.0	17.2
84.3	16.4	8.0	2.0	200	168	V	26.4	40.0	13.6
136.0	13.9	12.4	2.8	158	110	V	29.1	43.5	14.4
167.1	20.7	12.5	3.0	300	190	H	36.2	43.5	7.3
199.3	18.7	9.3	3.3	100	155	V	31.3	43.5	12.2
208.6	17.5	9.2	3.3	152	125	V	30.0	43.5	13.5
240.4	7.8	10.8	3.9	278	120	H	22.5	46.0	23.5
399.6	8.5	14.5	5.1	169	140	V	28.1	46.0	17.9
408.1	22.0	14.7	5.2	170	140	V	41.9	46.0	4.1
476.1	20.2	16.5	5.9	360	200	H	42.6	46.0	3.4
501.5	14.8	16.9	6.0	360	110	V	37.7	46.0	8.3

Coverage factor of k=2 will ensure that the level of confidence will be approximately 95.45%,
 Uncertainty U = -5.21 / +4.55 [dB]

MEASUREMENT OF DISTURBANCE RADIATION

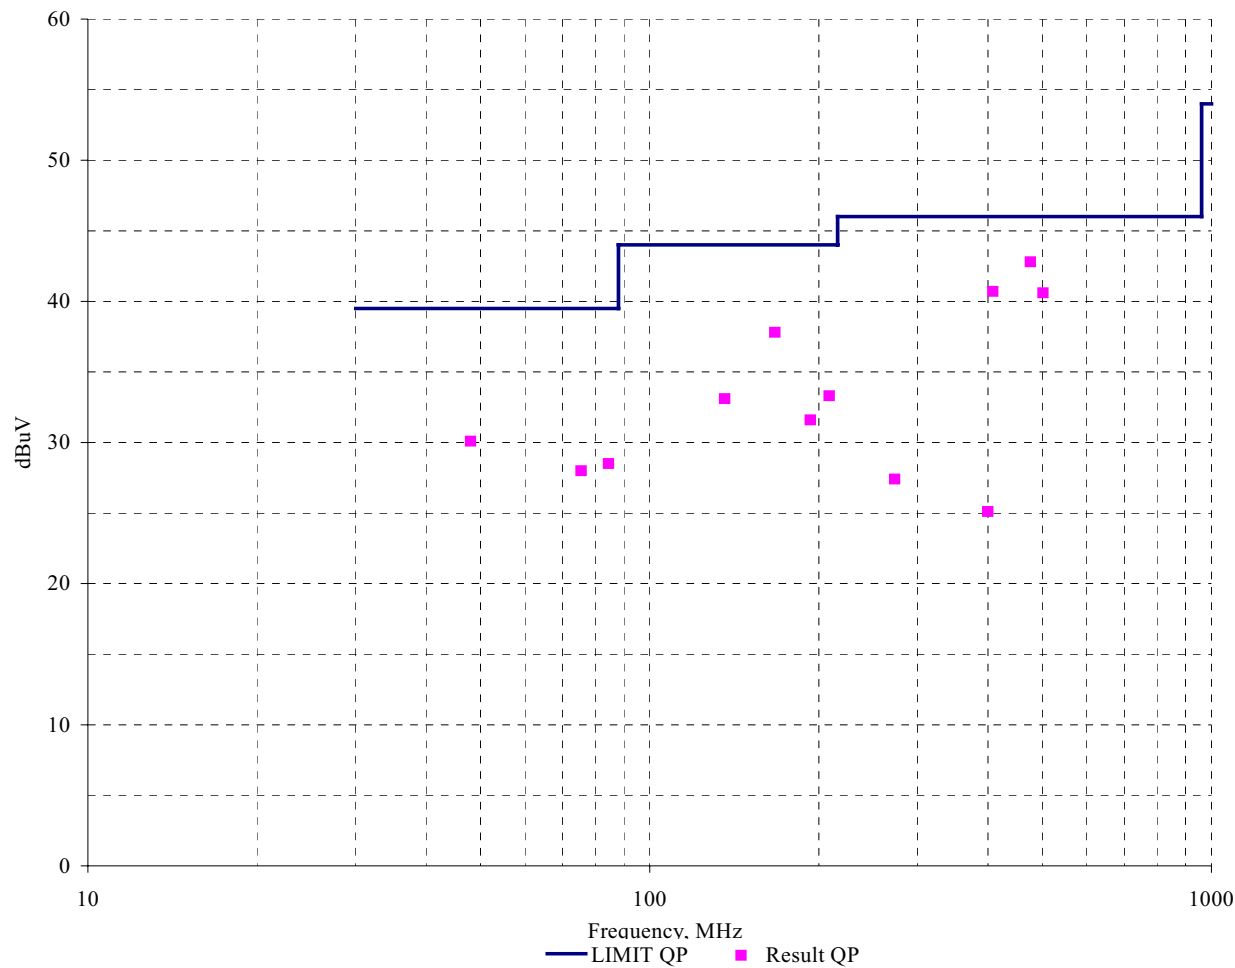

GENERAL REMARKS :

FINAL JUDGMENT :

☒ Kept ☐ Not kept

☒ Fulfill the general approval requirements mentioned on page 3.

☐ Not fulfill the general approval requirements mentioned on page 3.

Begin of testing : Dec. 16, 2003

End of testing : Dec. 16, 2003

Reviewed by :

John H. Lee

Joon H. Lee, EMC Manager
IST EMC Lab.

Approved by :

Qin Meng

G. Chung Chief of EMC Lab.