

Recognized by the
Federal Communications Commission
Anechoic chamber registration no.: 90462 (FCC)
Anechoic chamber registration no.: 3463 (IC)
TCB ID: DE 0001



Accredited by the
German Accreditation Council
DAR-Registration Number
TTI-P-G 166/98



Independent ETSI
compliance test house



Accredited Bluetooth™ Test Facility (BQTF)

Test report no.: 2-3770-01-01a/04

FCC Part 15.247

FCC ID: RPD-SA5252MPCI-01

SA5252 mPCI Rev1

CETECOM – ICT Services GmbH
Untertürkheimerstr. 6-10
D-66117 Saarbrücken, Germany

Telephone: + 49 (0) 681 / 598-0
Fax: + 49 (0) 681 / 9075

BLUETOOTH is a trademark owned by Bluetooth SIG, Inc. and licensed to Cetecom

Table of contents

1. ADMINISTRATIVE DATA	3
1.1. ADMINISTRATIVE DATA OF THE TEST FACILITY	3
1.1.1 Identification of the testing laboratory	3
1.1.2 Organizational items	3
1.1.3 Applicant's details	4
1.2 ADMINISTRATIVE DATA OF MANUFACTURER / MEMBER	4
1.3 DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)	5
1.3.1 EUT: Type, S/N etc.	5
Max. power radiated: dBm	5
1.3.2 If RF component testing only, description of additional used HW/SW	5
1.3.3 Additional EUT information	5
1.3.4 EUT operating modes	6
1.3.5 Extreme conditions testing values	6
2 TESTSTANDARD & SUMMARY LIST OF ALL PERFORMED TEST CASES	7
3 RF MEASUREMENT TESTING	8
3.1 DESCRIPTION OF TEST SET-UP	8
3.1.1 Radiated measurements	8
3.1.2 Conducted measurements	8
3.2 REFERENCED DOCUMENTS	9
3.3 ADDITIONAL COMMENTS	9
3.4 ANTENNA GAIN	9
3.5 PEAK POWER SPECTRAL DENSITY (DSSS) §15.247(D)	10
3.6 SPECTRUM BANDWIDTH OF A DSSS SYSTEM / 6 dB BANDWIDTH §15.247(A2)	18
3.7 SPECTRUM BANDWIDTH OF A OFDM SYSTEM / 6 dB BANDWIDTH §15.247(A2)	22
3.8 MAXIMUM OUTPUT POWER (CONDUCTED) (DSSS) §15.247 (B) (1)	26
3.9 MAXIMUM OUTPUT POWER (CONDUCTED) (OFDM) §15.247 (B) (1)	31
3.10 MAX. PEAK OUTPUT POWER (RADIATED) §15.247 (B) (1)	37
3.11 BAND-EDGE COMPLIANCE OF CONDUCTED EMISSIONS §15.247 (C)	38
3.12 BAND-EDGE COMPLIANCE OF RADIATED EMISSIONS §15.205	42
3.9 SPURIOUS EMISSIONS - CONDUCTED (TRANSMITTER) §15.247 (c)	55
3.10 SPURIOUS EMISSIONS - RADIATED (TRANSMITTER) §15.209	60
3.11 SPURIOUS EMISSIONS - RADIATED (RECEIVER) §15.109 / 209	70
3.12 SPURIOUS EMISSIONS - RADIATED <30 MHz §15.109	72
3.13 CONDUCTED EMISSIONS <30 MHz §15.107/207	73
4 PHOTOGRAPHS	78



ANNEX 1: TECHNICAL PRODUCT DESCRIPTION

1. Administrative data

1.1. Administrative data of the test facility


1.1.1 Identification of the testing laboratory

Company name:	Cetecom ICT Services GmbH
Address:	Untertürkheimerstr. 6-10 D-66117 Saarbruecken Germany
Laboratory accreditation:	DAR-Registration No. TTI-P-G166/98 Bluetooth Qualification Test Facility (BQTF)
Responsible for testing laboratory:	Harro Ames, Michael Berg Phone: +49 681 598 0 Fax: +49 681 598 9075 email: info@ict.cetecom.de

 / 
..... /
Responsible for testing laboratory
(Harro Ames, Michael Berg)

1.1.2 Organizational items

Reference No.:	2-3770-01-01a/04
Order No.:	
Responsible for test report and project leader:	Harro Ames, Michael Berg
Receipt of EUT:	2004-10-12
Date(s) of test:	2004-10-12 to 2004-10-14
Date of report:	2004-12-22
Number of report pages:	86
Number of diagram pages (annex):	
.....	
Version of template:	1.2

 / 
..... /
Responsible for test report
(Harro Ames, Michael Berg)

Note:

The test results of this test report relate exclusively to the item tested as specified in this report. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

During the test no hardware and software changes are allowed to be performed at the EUT.

1.1.3 Applicant's details

Applicant's name:	Philips Semiconductors Dresden AG
Address:	Am Waldschlösschen 1 D-01099 Dresden Germany
Contact person:	Mr. Jens Bretschneider Phone: 0049 351 80 800 519 Fax: 0049 351 80 800 39 email: jens.bretschneider@philips.com

1.2 Administrative data of manufacturer / member

Manufacturer's name:	- applicant -
Address:	

1.3 Description of the Equipment under test (EUT)

1.3.1 EUT: Type, S/N etc.

Product name	Product ID	Description	S/N serial number	HW hardware status	SW software status
SA5252 mPCI Rev1	SA5252	802.11/b/g mini PCI WLAN card	–	Rev1	–
Frequency Band [MHz]	Type of Modulation	Number of channels	Antenna	Power Supply	Temperature Range
2.4 GHz ISM	DHSS/ OFDM	13	Tested with external antenna on PCB-board	3.3V via PCI-slot	–

Max. power radiated: 25.5 dBm

Max. power conducted: 27.9 dBm

FCC ID: RPD-SA5252MPCI-01

1.3.2 If RF component testing only, description of additional used HW/SW

none

1.3.3 Additional EUT information

We used a special shielded PC with a passive miniPCI extender card to make the radiated test. (see pictures)

For all other tests we used a laptop with special software to set the card in test modes.

AC conducted measurements were also made with this laptop.

1.3.4 EUT operating modes

EUT operating mode no.*)	Description of operating modes	Additional information
Op. 0	Normal mode	Normal temperature and power source conditions

1.3.5 Extreme conditions testing values

Description	Shortcut	Unit	Value
Nominal Temperature / humidity	T _{nom}	°C / %	23° / 35%
Low Temperature	T _{low}	°C	
High Temperature	T _{high}	°C	
Nominal Power Source	V _{nom}	V	3.3
Low Power Source	V _{low}	V	
High Power Source	V _{high}	V	

Type of powersource: 3.3V DC

2 Teststandard & summary list of all performed test cases

TC identifier	Description	verdict	date	Remark
RF-Testing	FCC Part 15 §15.247			

Test Specification Clause	Test Case	Pass	Fail	Not applicable	Not performed
None	Antenna Gain	Yes			
§15.247 (d)	Peak power spectral density	Yes			
§15.247(a2)	Spectrum Bandwidth of a DSSS System / 6dB BW	Yes			
§ 15.247 (b) (3)	Maximum output power (conducted)	Yes			
§ 15.247 (b) (3)	Max. peak output power (radiated)	Yes			
§15.247 (c)	Band-edge compliance of conducted emissions	Yes			
§15.205	Band-edge compliance of radiated emissions	Yes			
§15.247 (c)	Spurious Emission - conducted (Transmitter)	Yes			
§ 15.209	Spurious Emission -radiated (Transmitter)	Yes			
§ 15.247 (c)	Spurious Emissions-radiated (Receiver)	Yes			
§ 15.109	Spurious Emissions-radiated <30 MHz	Yes			
§ 15.107/207	Conducted Emissions <30 MHz	Yes			

3 RF measurement testing

3.1 Description of test set-up

3.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas conform with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2003 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63-4-2003 clause 4.2.

Antennas conform with ANSI C63.2-1996 item 15.

150 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, passive loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, biconical antenna


200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna

>1GHz: Average, RBW 1MHz, VBW 10 MHz, waveguide horn with lownoise preamp

The EUT is powered by a special shielded pc with a passiv extender card to avoid spurs that are not caused by the test object.

3.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is connected to the spectrum analyzer. The specific losses for signal paths are first checked within a calibration. The measurement readings on the spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signaling unit and the spectrum analyzer are impedance matched on 50 Ohm.

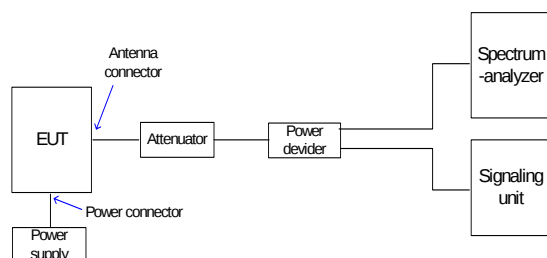

3.2 Referenced Documents

none

3.3 Additional comments

The test sample is a mini-PCI card that is able to work in 2.4 and 5 GHz range.

This test report regards only the 2.4 GHz range, the 5 GHz range can be seen in 2-3770-01-01b/04 from our house.

The sample has 13 channels to work with, but channel 12 and 13 are reduced in output power by the card settings to fulfil the bandedge requirements of the FCC rules.


In the test report we show compliance to the normal 11-channel system in USA and also measurements at channel 13 to show compliance to the general requirements of FCC part15.247.

3.4 Antenna gain

The antenna gain of the complete system is calculated by the difference of conducted power of the module and the radiated power in EIRP.

	low channel	mid channel	high channel
Conducted power [dBm]	DSSS 19.2 dB	DSSS 17.6 dB	DSSS 20.1 dB
	OFDM 27.9 dB	OFDM 26.7 dB	OFDM 27.5 dB
Radiated power [dBm]	DSSS 16.8 dB	DSSS 17.5 dB	DSSS 16.5 dB
	OFDM 24.0 dB	OFDM 25.5 dB	OFDM 24.2 dB
Gain [dBi]	Max -2.4 dBi	Max -0.1 dBi	Max -3.6 dBi

The used antenna is a typical build-in notebook antenna from Ethertronics.

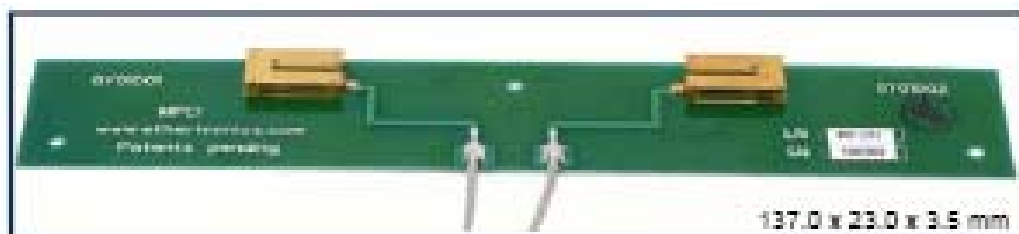

MPCI (mini-PCI) Internal Antenna Module


Measuring part:

3.5 Peak Power Spectral density (DSSS)

§15.247(d)


2412 MHz

Plot 1: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

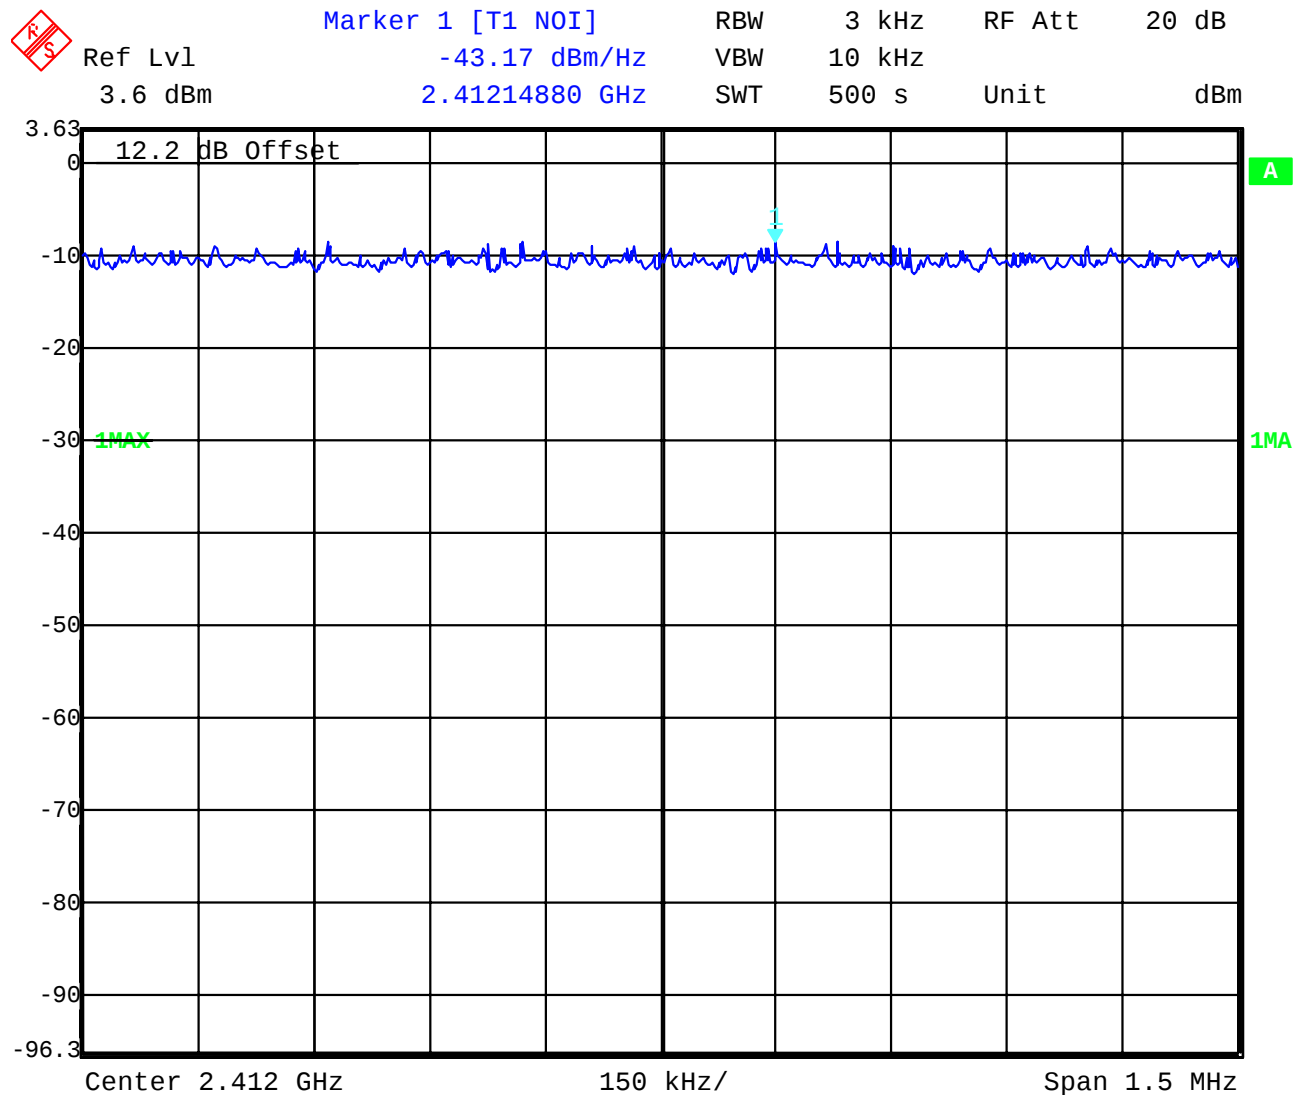


Plot 2: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

2437 MHz

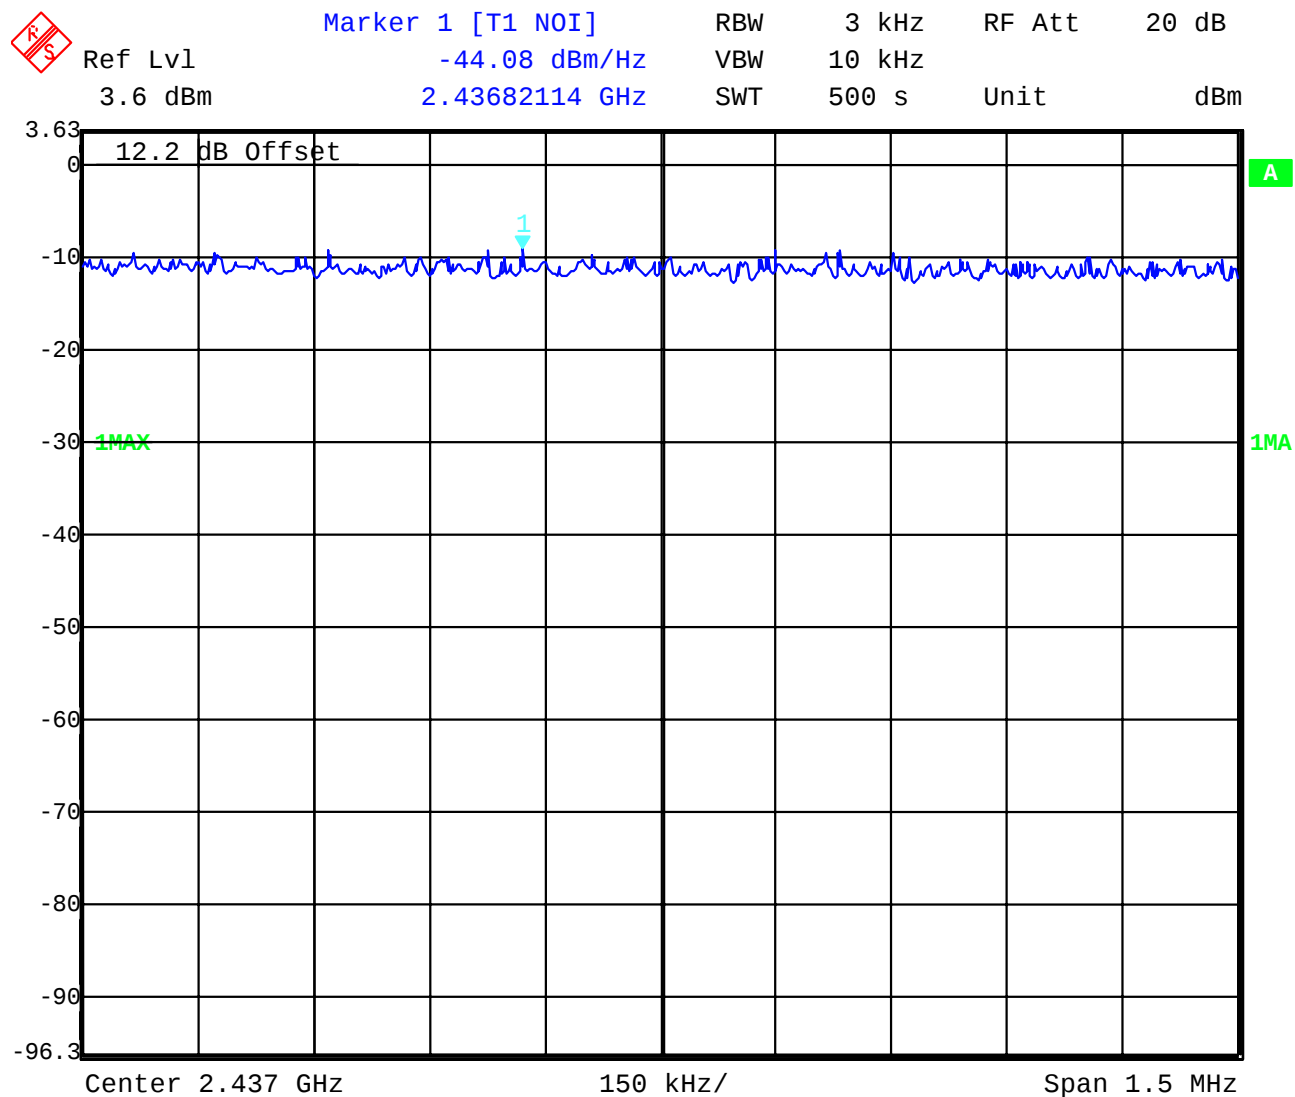


Plot 3: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

2462 MHz

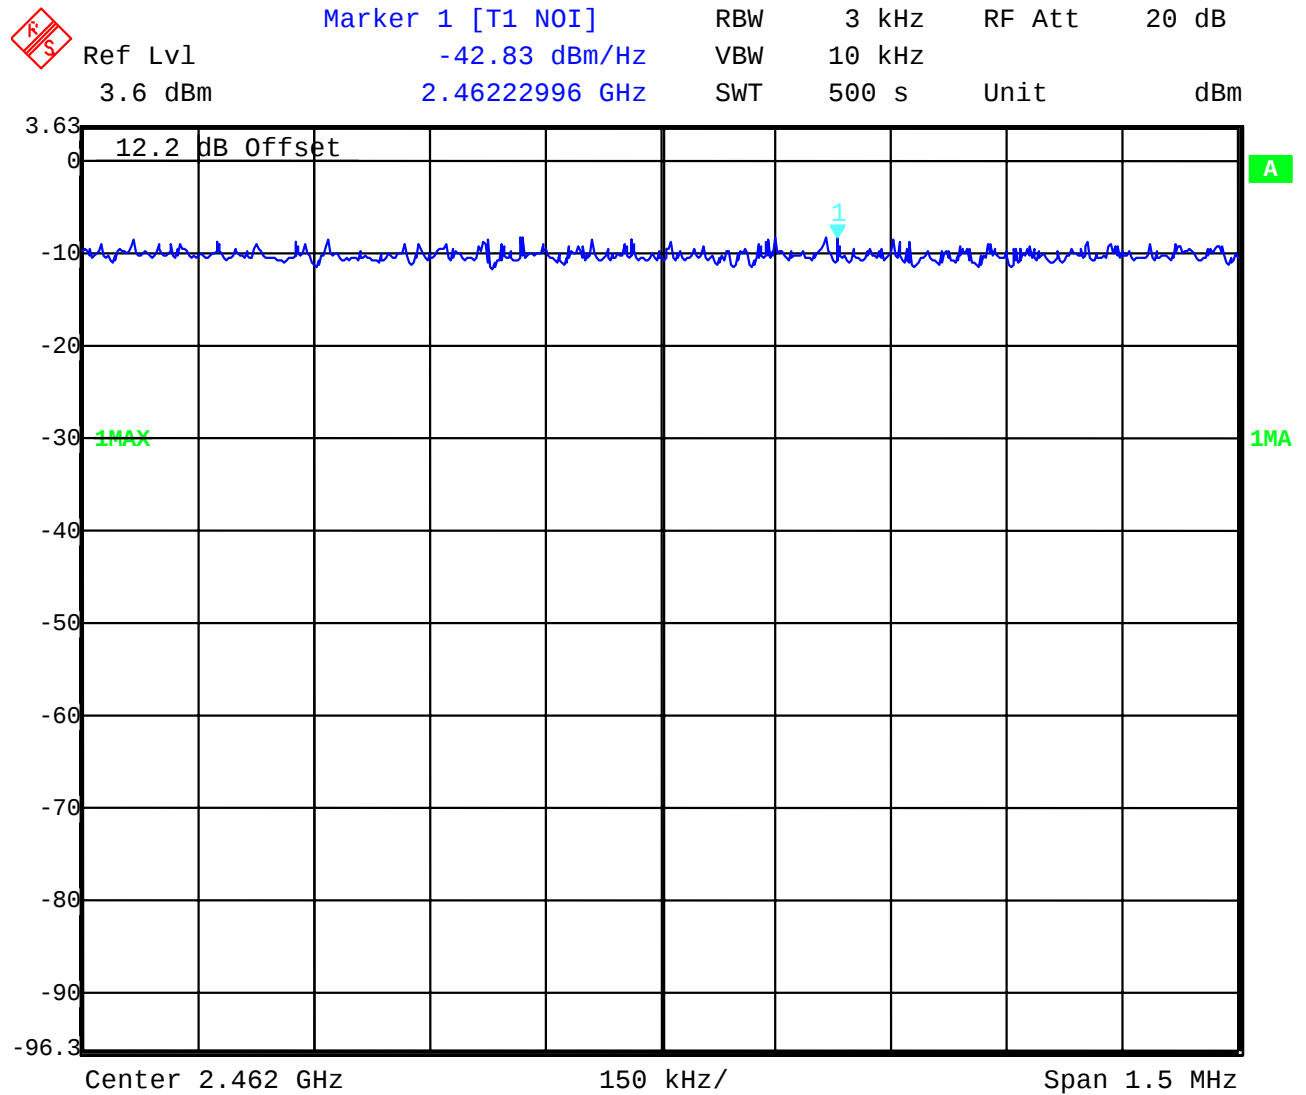

Plot 4: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

2472 MHz

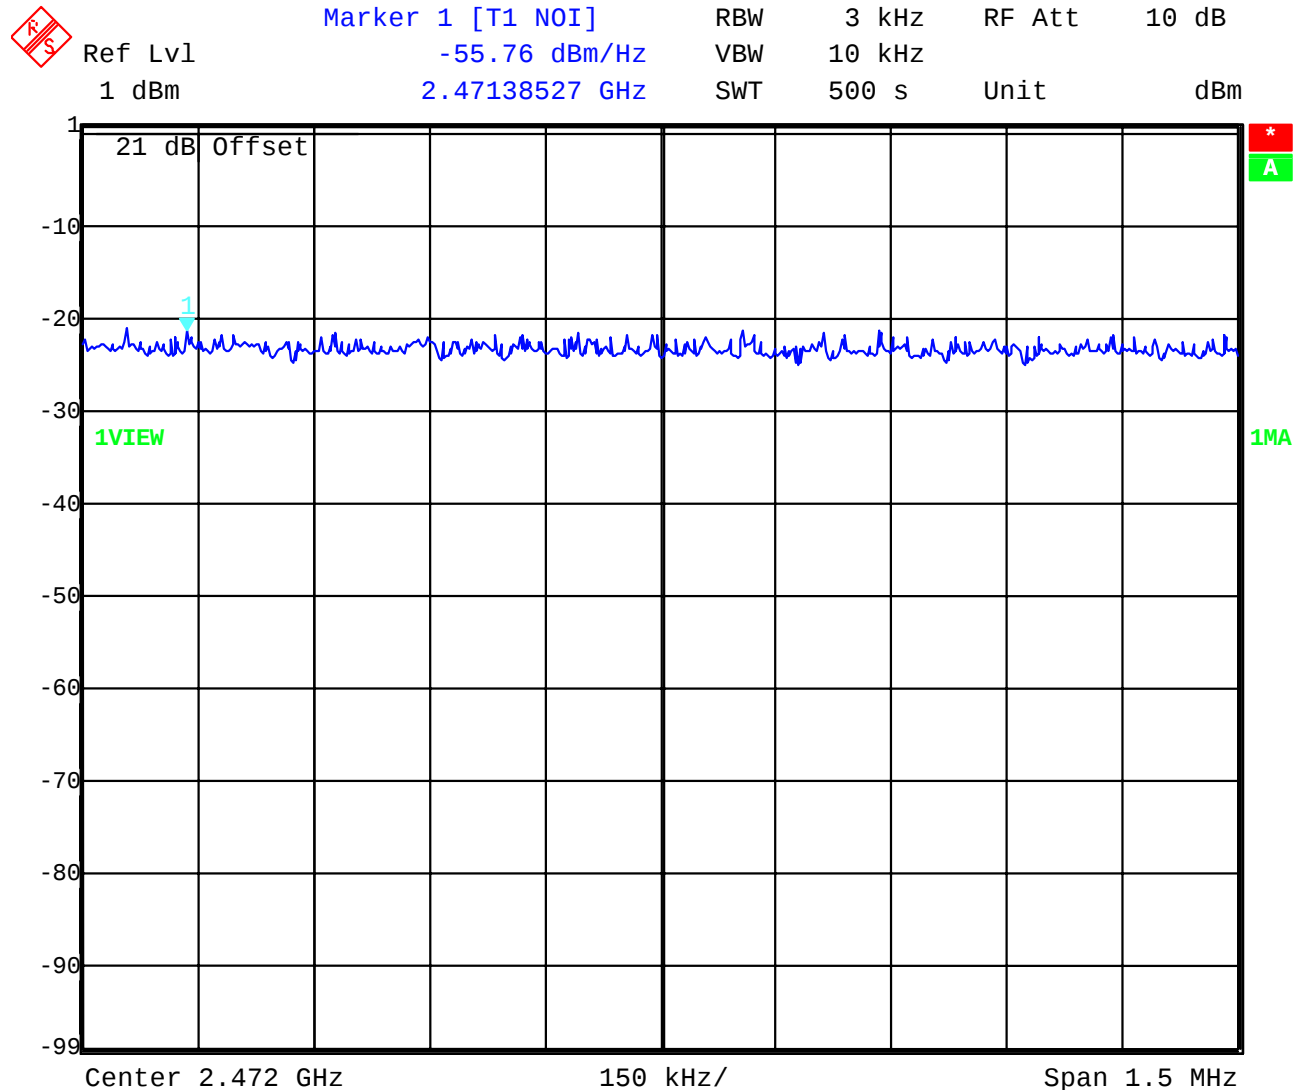

Results:

Plot 1: Power density : - 43.17 dBm/Hz = - 8.37 dBm / 3 KHz

Plot 2: Power density : - 44.08 dBm/Hz = - 9.28 dBm / 3 KHz

Plot 3: Power density : - 42.23 dBm/Hz = - 7.43 dBm / 3 KHz

Plot 4: Power density : - 55.76 dBm/Hz = - 20.96 dBm / 3 kHz

Correction factor from dBm/Hz to dBm/3KHz is +34,8 dB

Limits :


Under normal test conditions only	For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmission
-----------------------------------	---

Peak Power Spectral density (OFDM)

§15.247(d)


Plot 1: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

2412 MHz

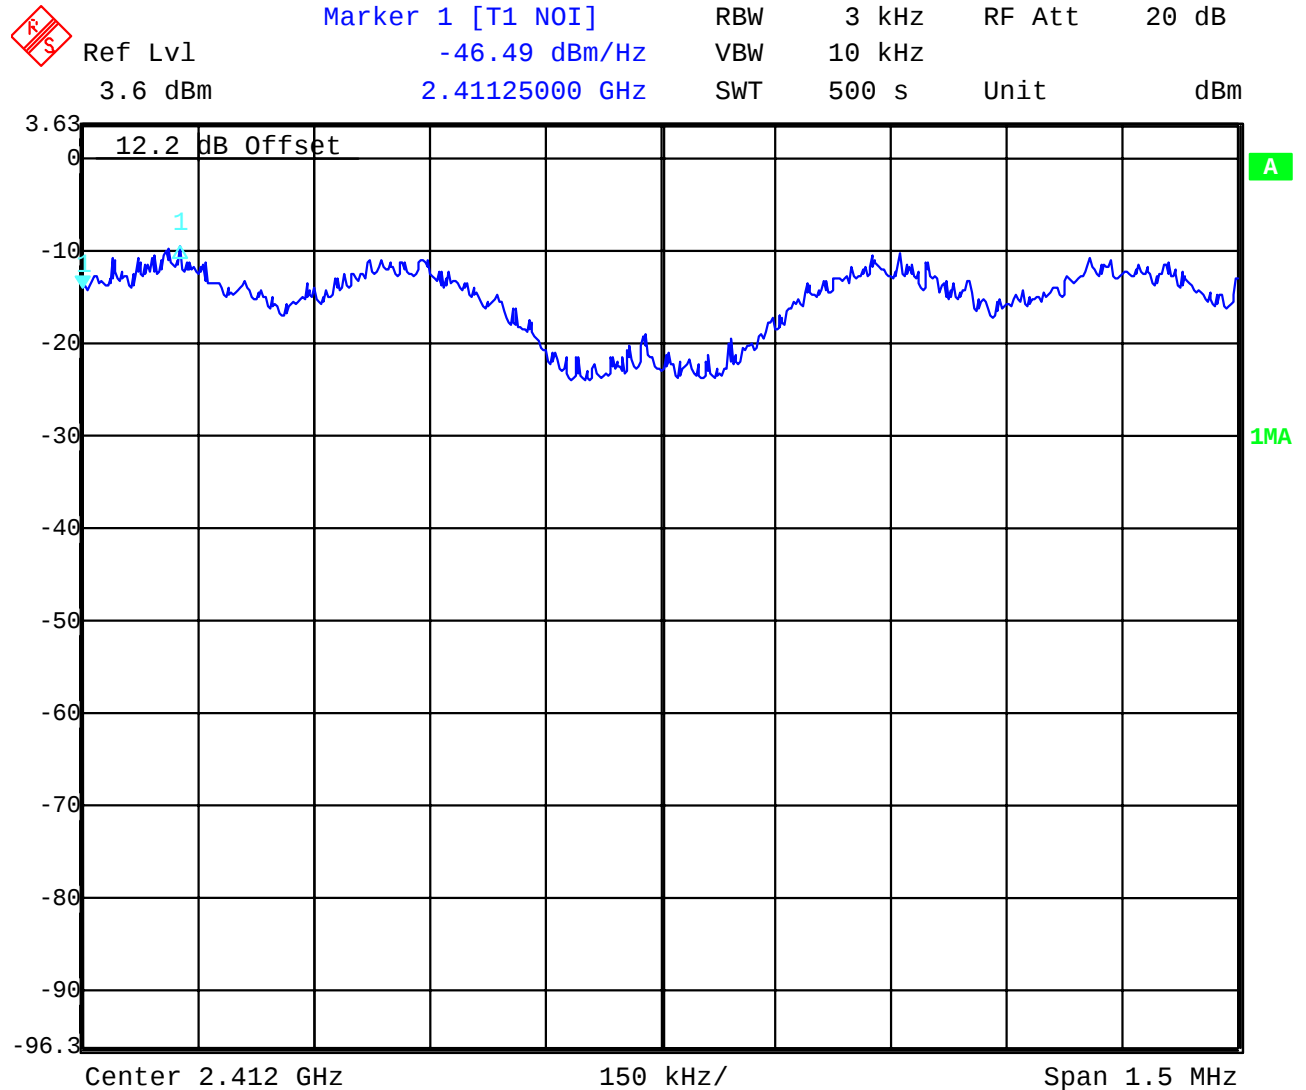


Plot 2: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

2437 MHz

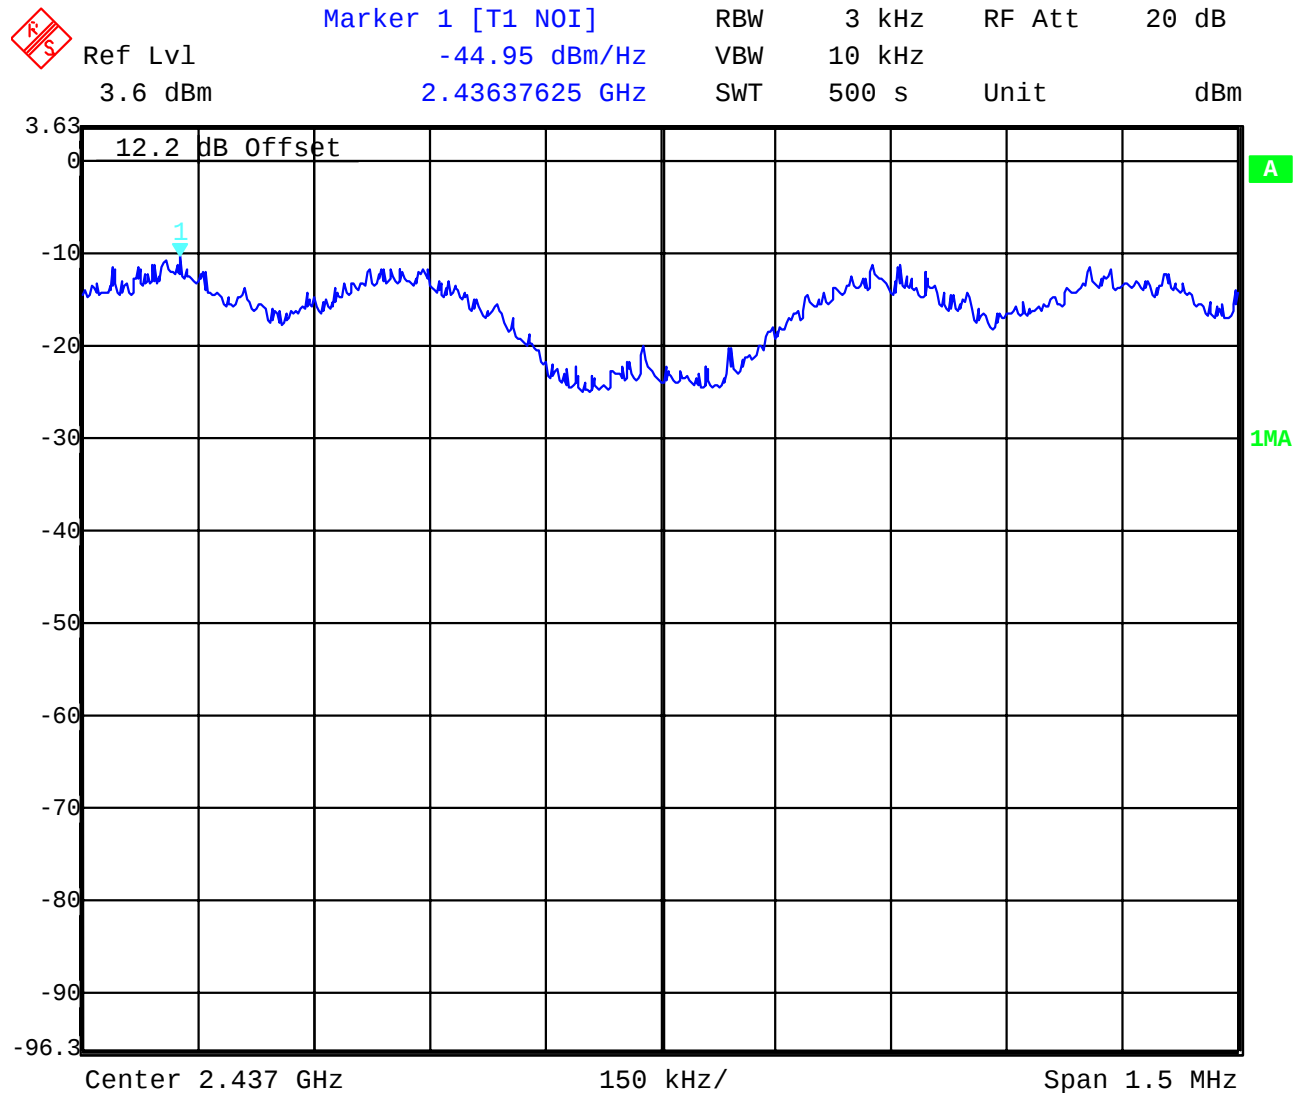

Plot 3: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

2462 MHz

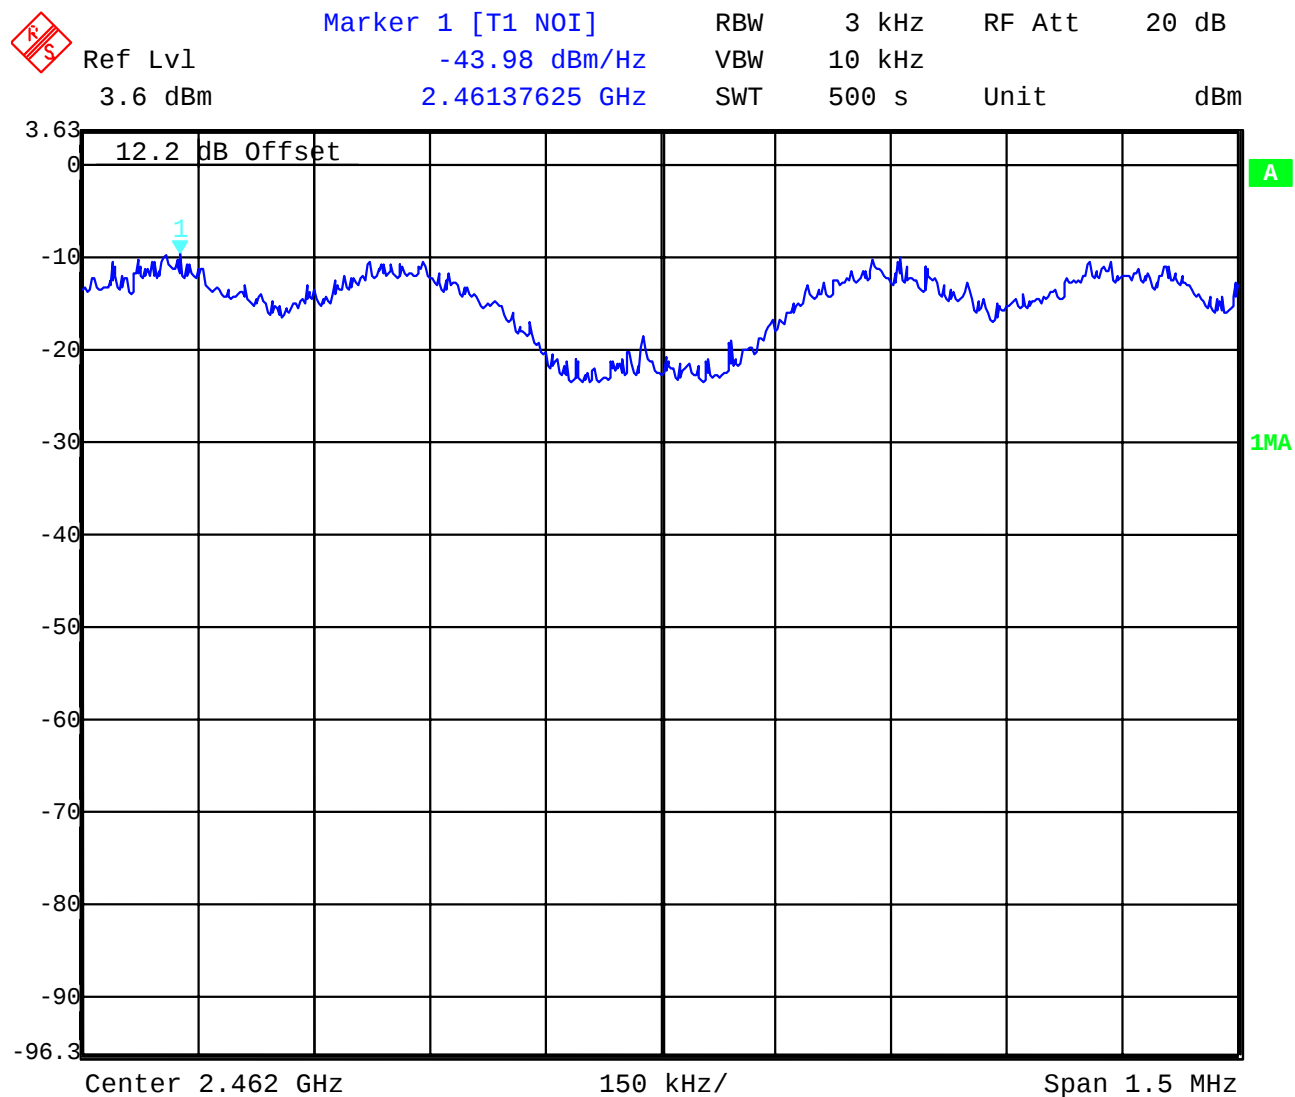

Plot 4: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

2472 MHz



Ref Lvl
1 dBm

Marker 1 [T1 NOI]

-57.85 dBm/Hz

2.47262675 GHz

RBW

3 kHz

RF Att

10 dB

VBW


10 kHz

SWT

500 s

Unit

dBm

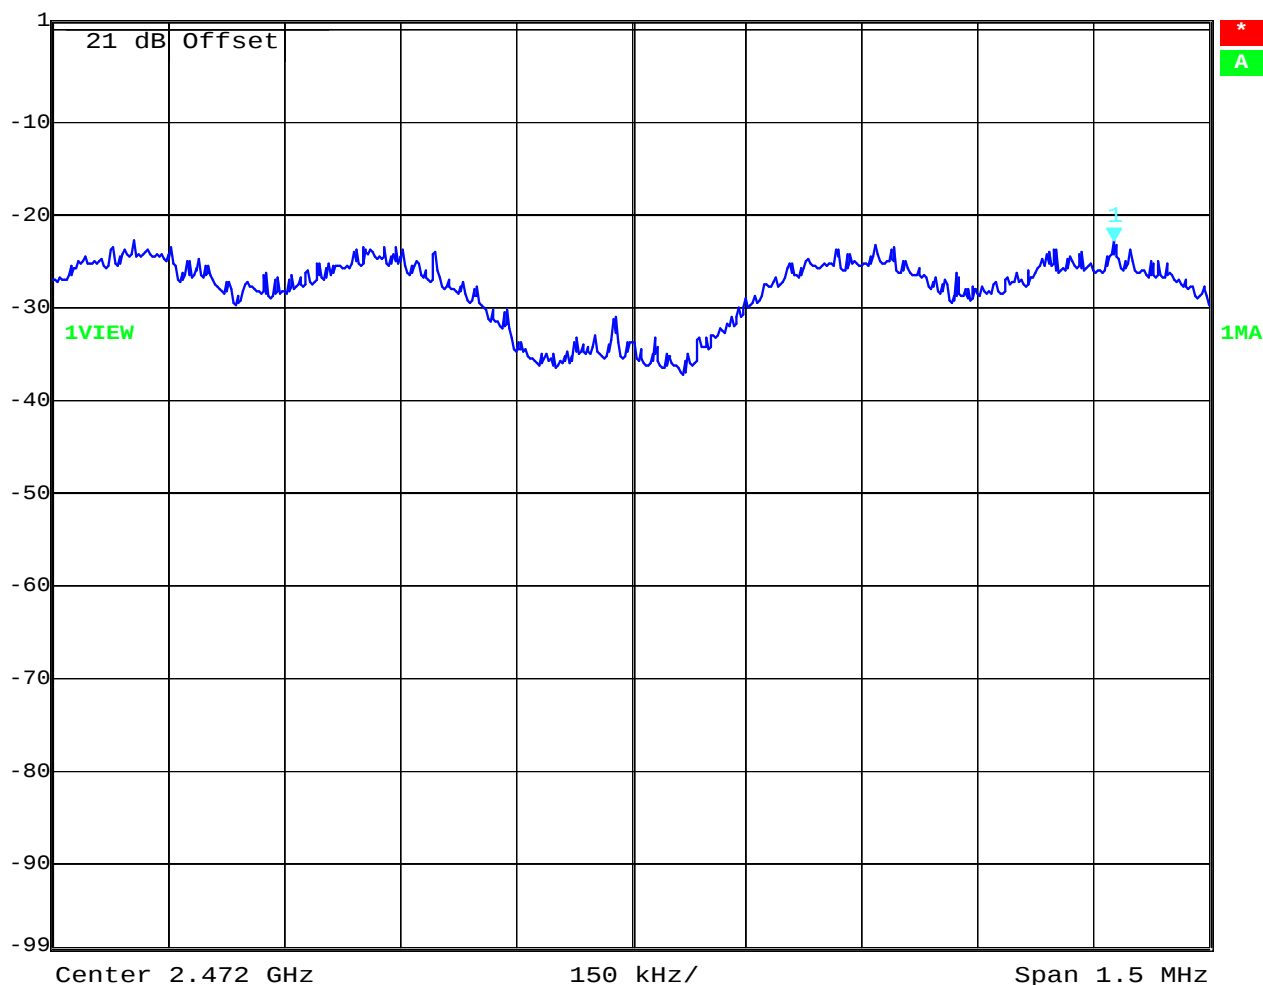

Date: 15.DEC.2004 07:22:44

Results: Plot 1: Power density : - 46.49 dBm/Hz = - 11.69 dBm / 3 KHz
 Plot 2: Power density : - 44.95 dBm/Hz = - 10.15 dBm / 3 KHz
 Plot 3: Power density : - 43.98 dBm/Hz = - 9.18 dBm / 3 KHz
 Plot 4: Power density : - 57.83 dBm/Hz = - 23.83 dBm / 3 KHz

Correction factor from dBm/Hz to dBm/3KHz is +34,8 dB


Limits :

Under normal test conditions only	For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmission
-----------------------------------	---

3.6 Spectrum Bandwidth of a DSSS System / 6 dB Bandwidth §15.247(a2)

Plot 1 :

2412 MHz

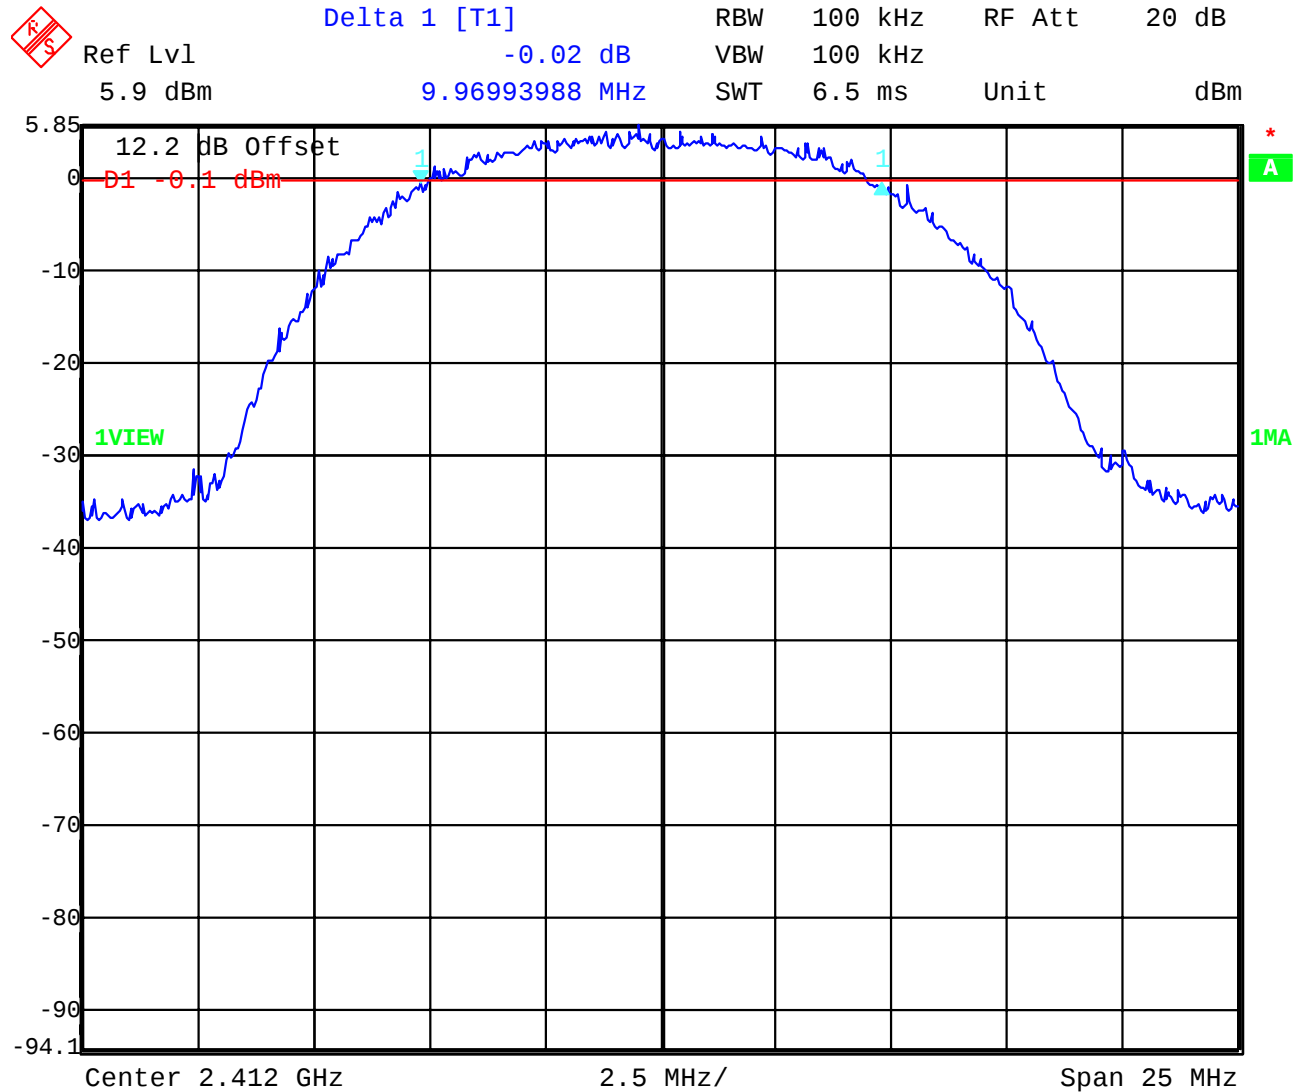

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-3770-01-01a/04

Date: 2004-12-22

Page 19 of 86

Plot 2:

2437 MHz

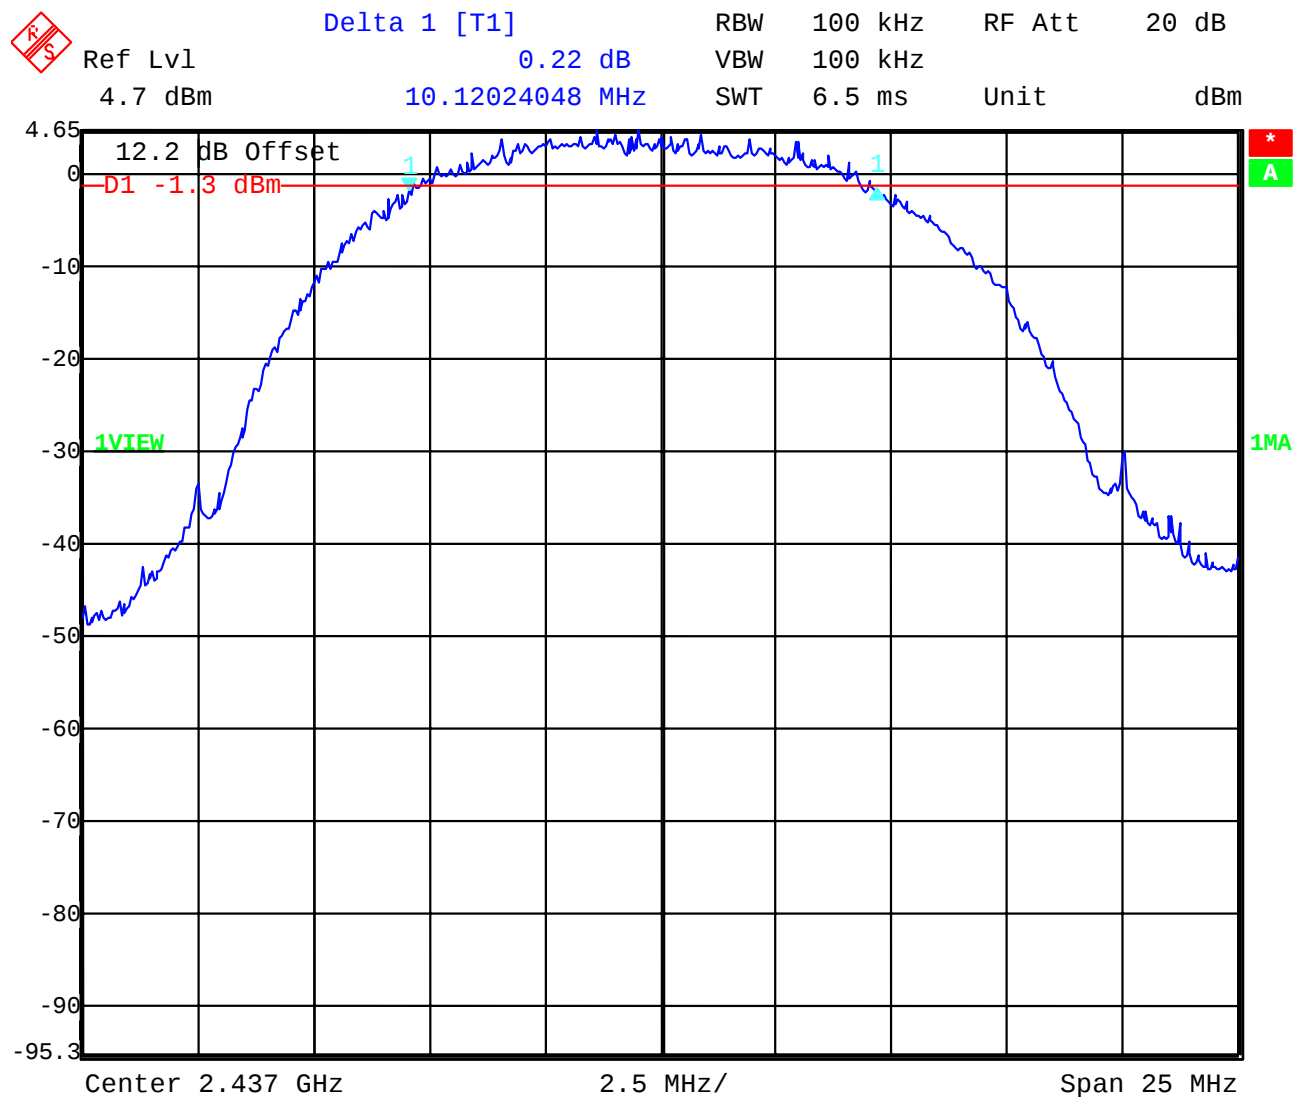

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-3770-01-01a/04

Date: 2004-12-22

Page 20 of 86


Plot 3:

2462 MHz

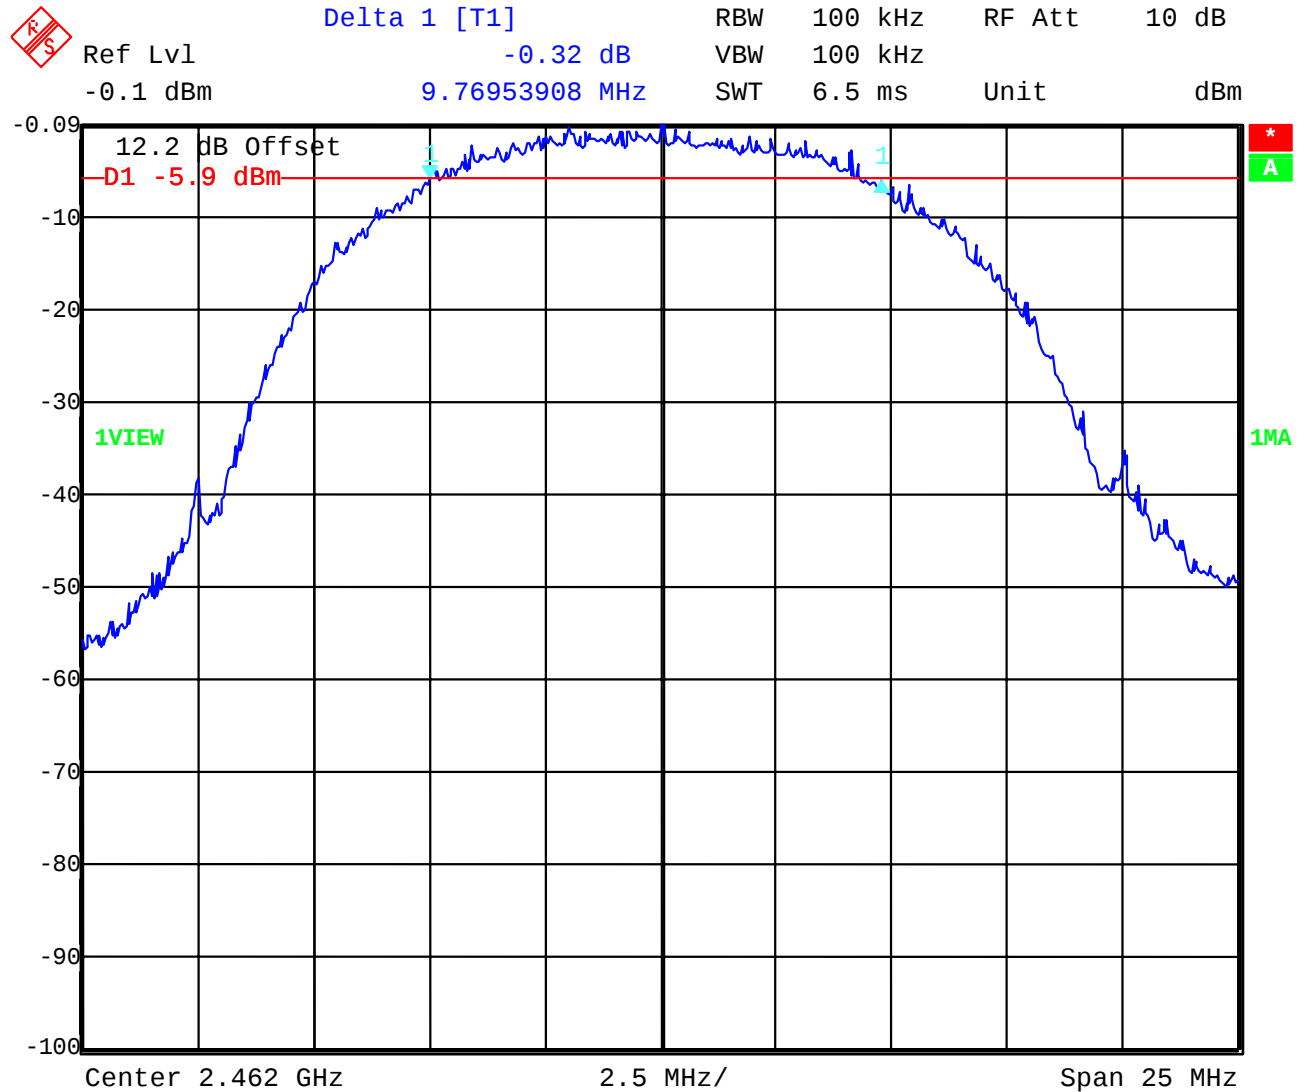

3.7 Spectrum Bandwidth of a OFDM System / 6 dB Bandwidth §15.247(a2)

Plot 1 : 2412 MHz

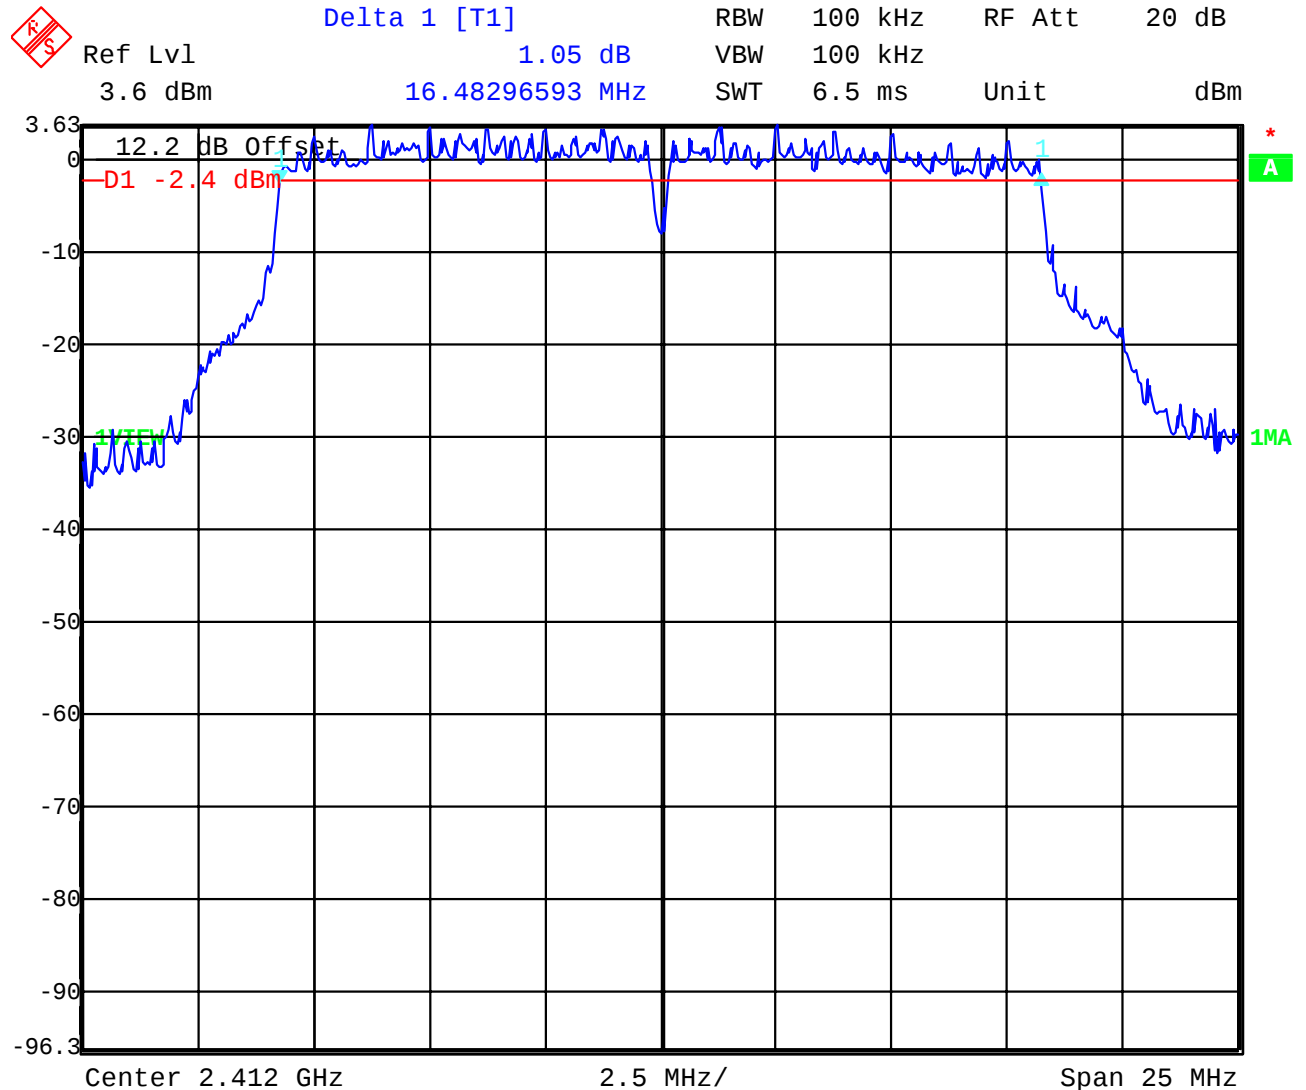

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-3770-01-01a/04

Date: 2004-12-22

Page 23 of 86

Plot 2: 2437 MHz

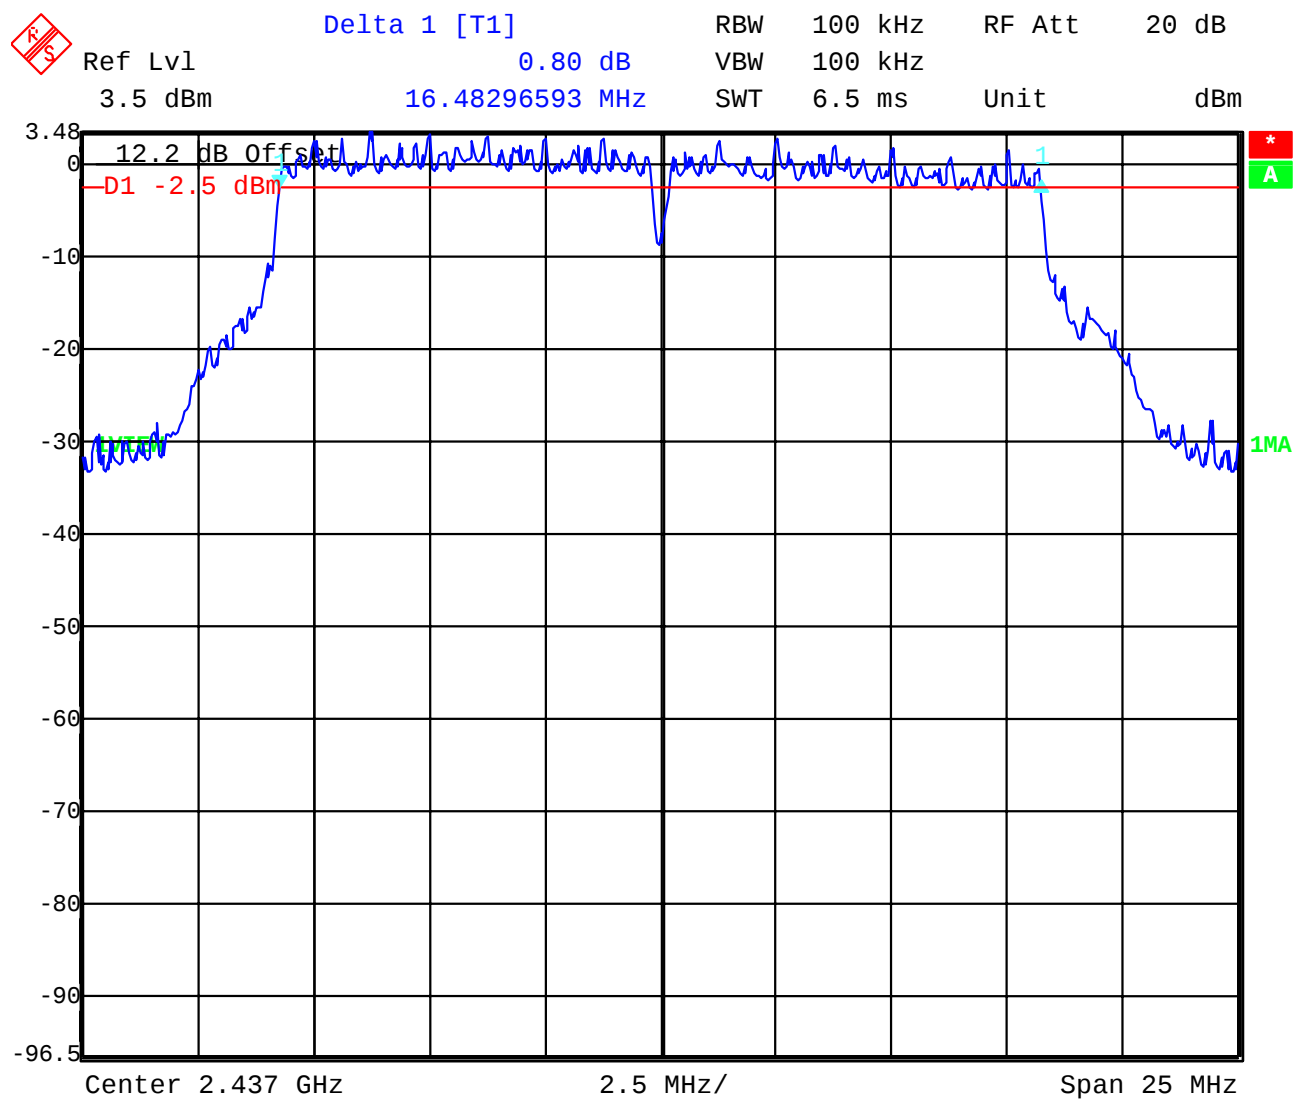

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-3770-01-01a/04


Date: 2004-12-22

Page 24 of 86

Plot 3: 2462 MHz

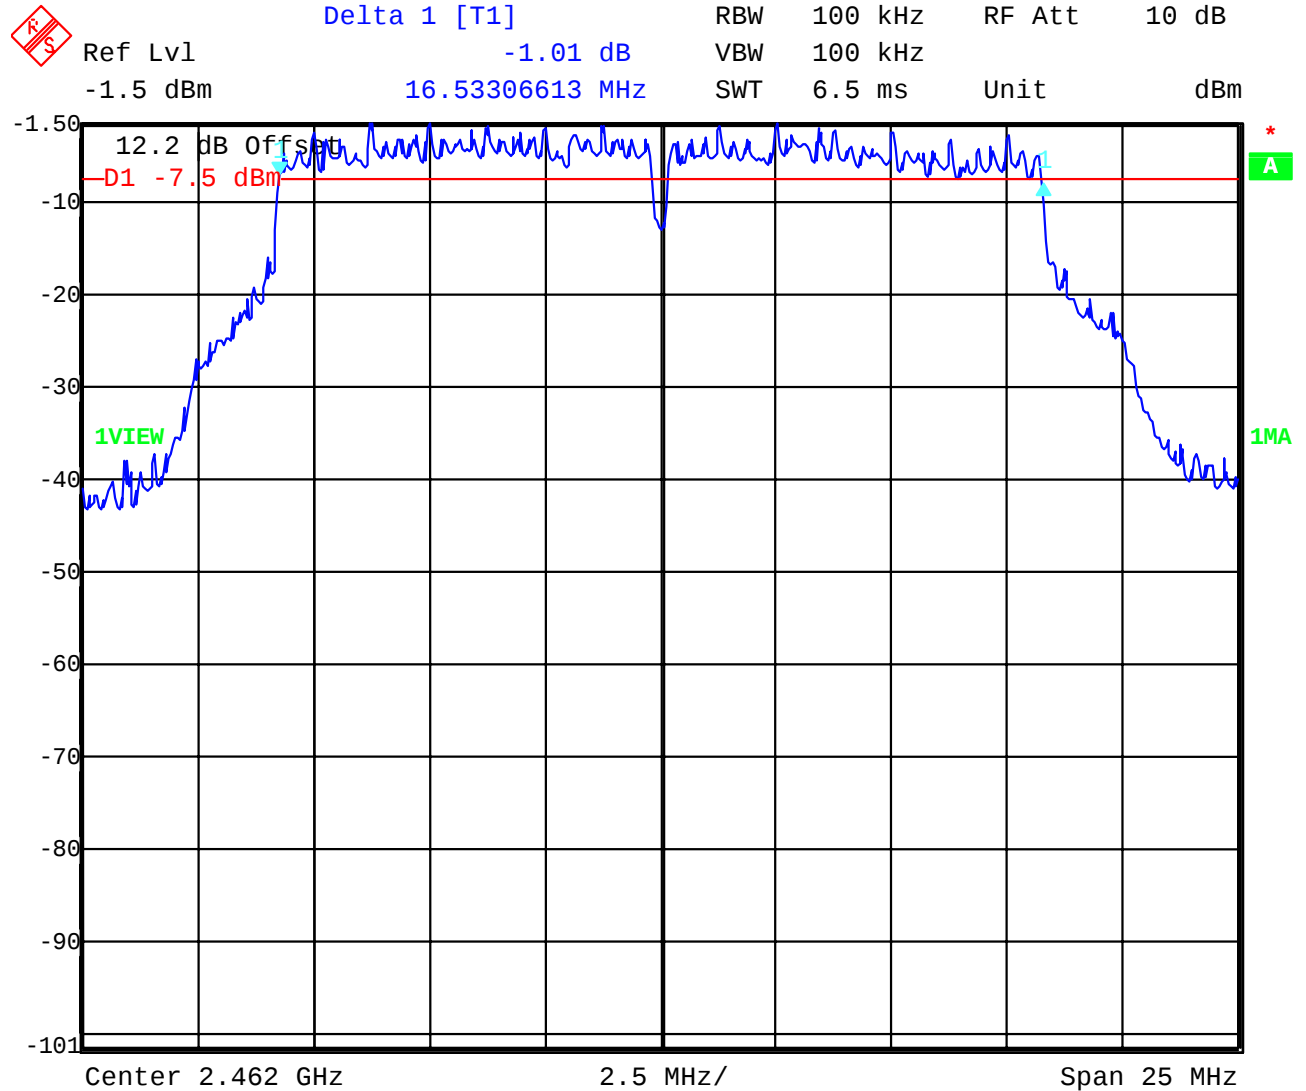

Plot 4: 2472 MHz

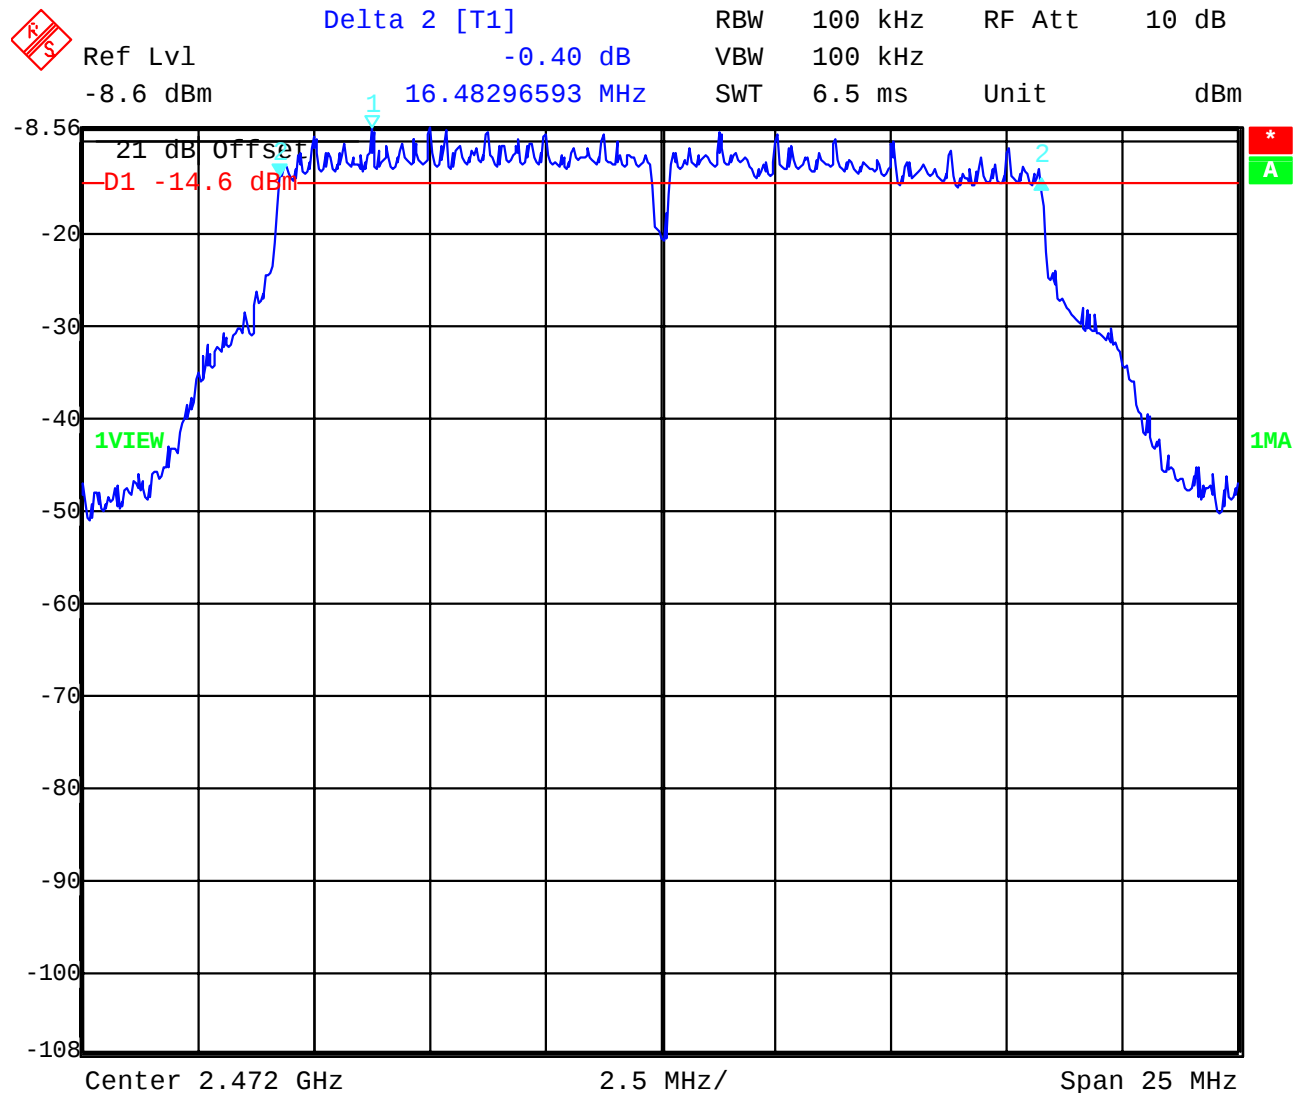

Results:

Test conditions		6 dB BANDWIDTH [MHz]			
Frequency [MHz]		2412	2437	2462	2472
T _{nom}	V _{nom}	16483	16483	16533	16482
Measurement uncertainty		±1kHz			

RBW: 100 kHz / VBW 100 kHz

Limits :

Under normal test conditions only	> 500 KHz
-----------------------------------	-----------

3.8 Maximum output power (conducted) (DSSS)

§15.247 (b) (1)

Plot 1: 2412 MHz



Ref Lvl

25 dBm

Marker 1 [T1]

19.17 dBm

2.41312725 GHz

RBW

10 MHz

RF Att

40 dB

VBW


10 MHz

SWT

5 ms

Unit

dBm

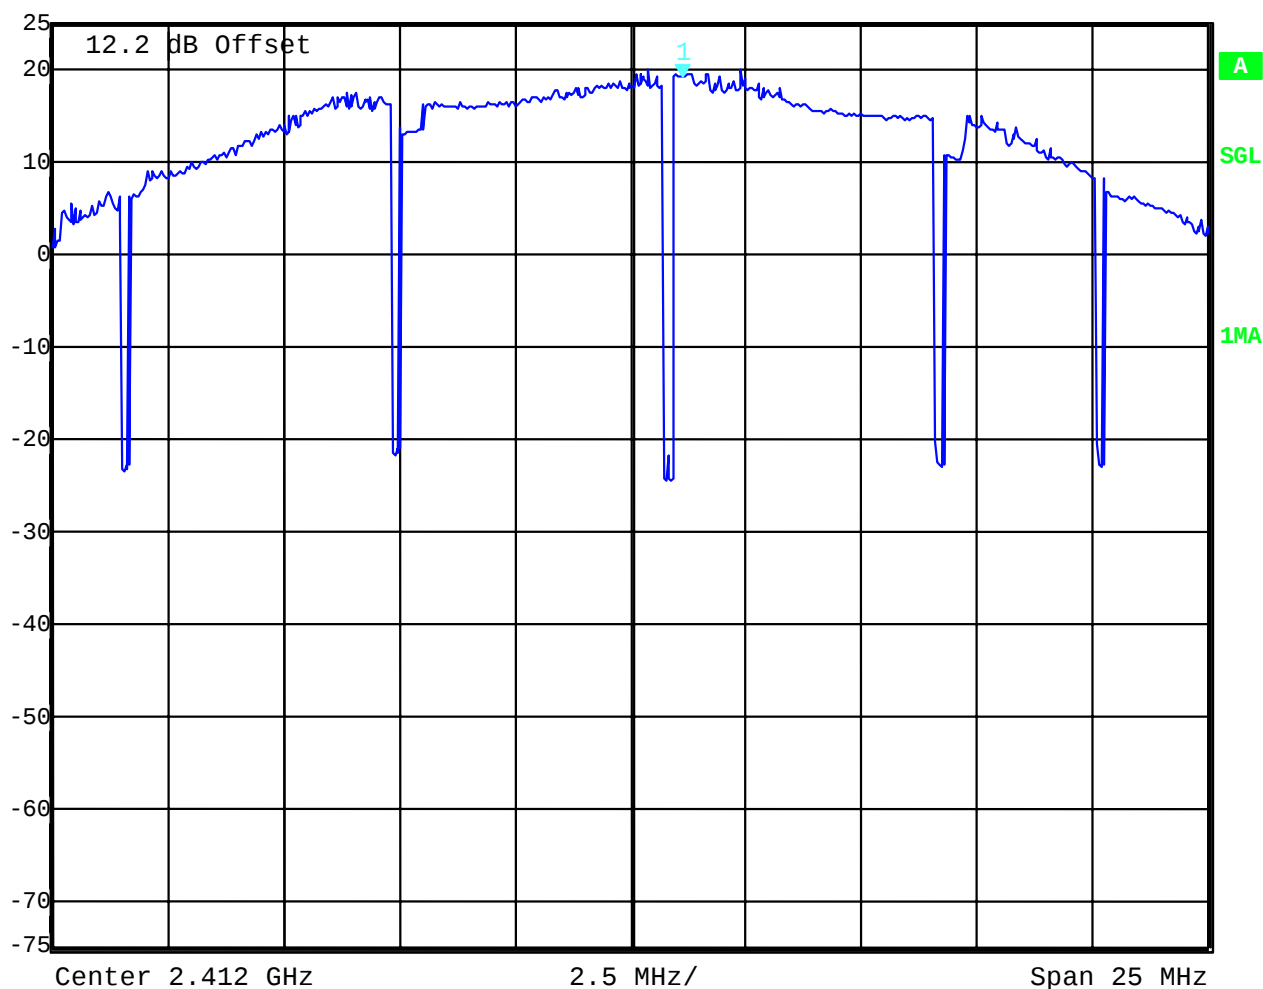

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-3770-01-01a/04

Date: 2004-12-22

Page 27 of 86

Plot 2: 2437 MHz

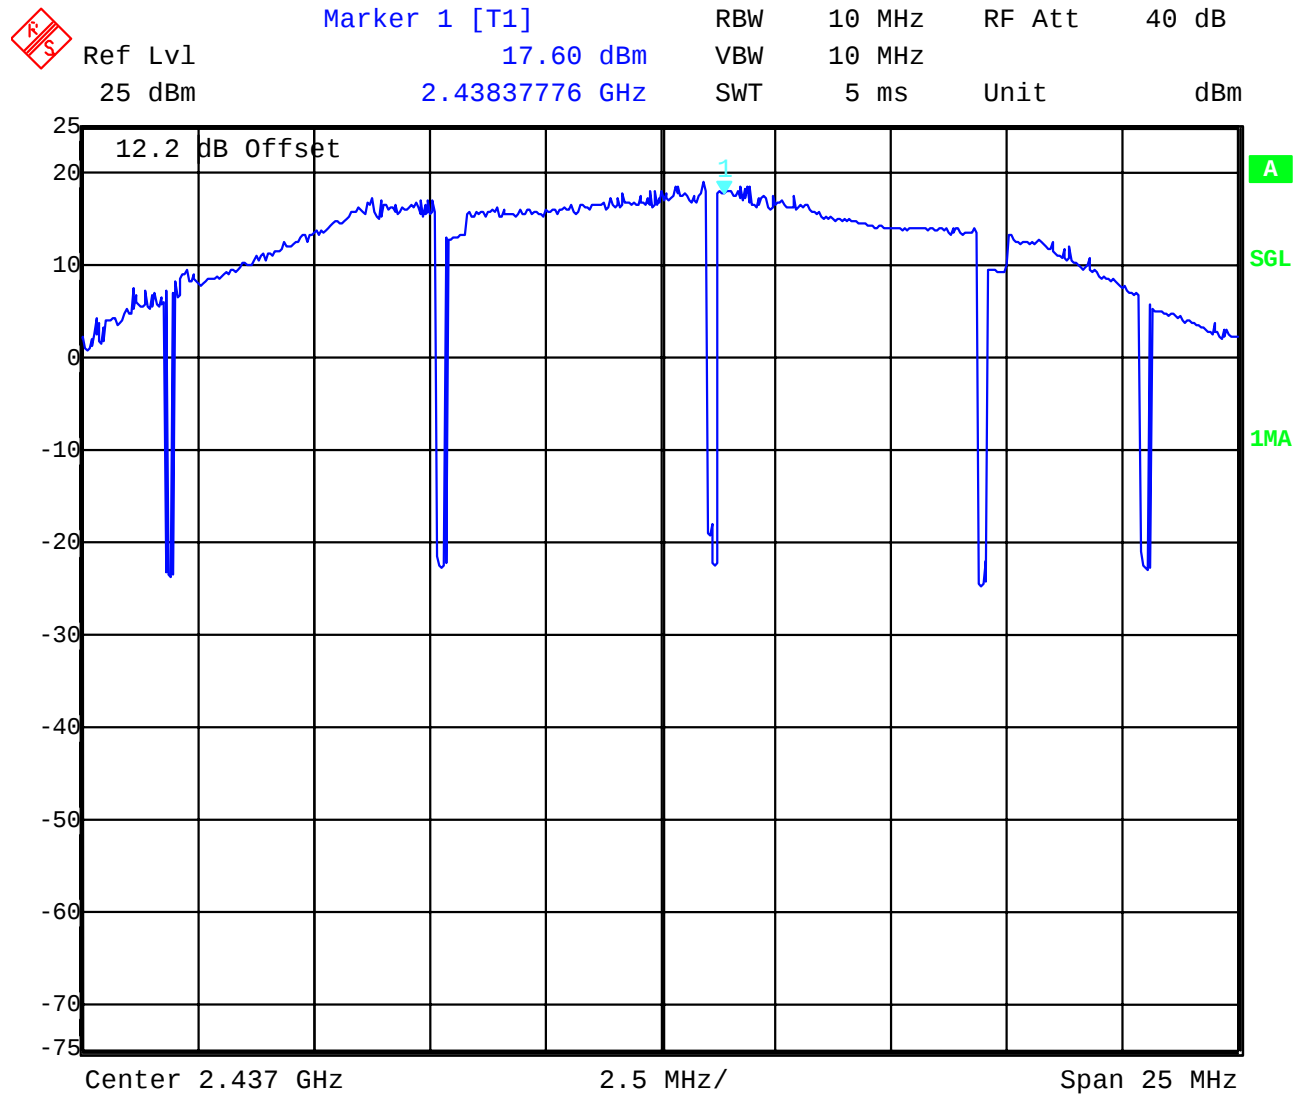

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-3770-01-01a/04

Date: 2004-12-22

Page 28 of 86

Plot 3: 2462 MHz

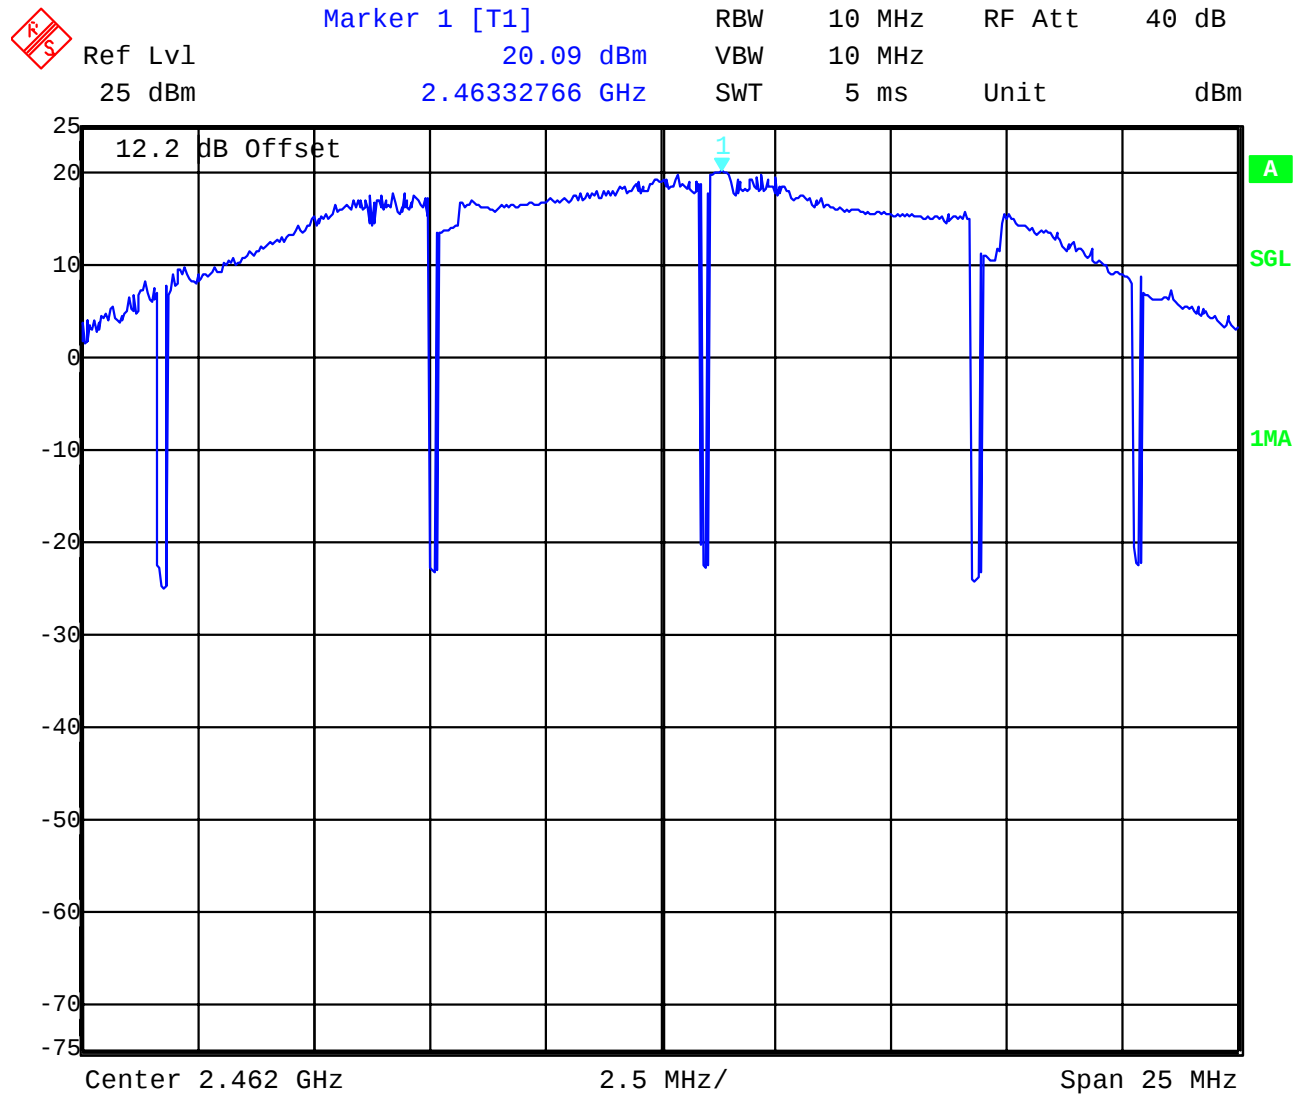

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2-3770-01-01a/04

Date: 2004-12-22

Page 29 of 86

Plot 4: 2472 MHz



Ref Lvl
20 dBm

Marker 1 [T1]

7.50 dBm

2.47387876 GHz

RBW

10 MHz

RF Att

20 dB

VBW


10 MHz

SWT

5 ms

Unit

dBm

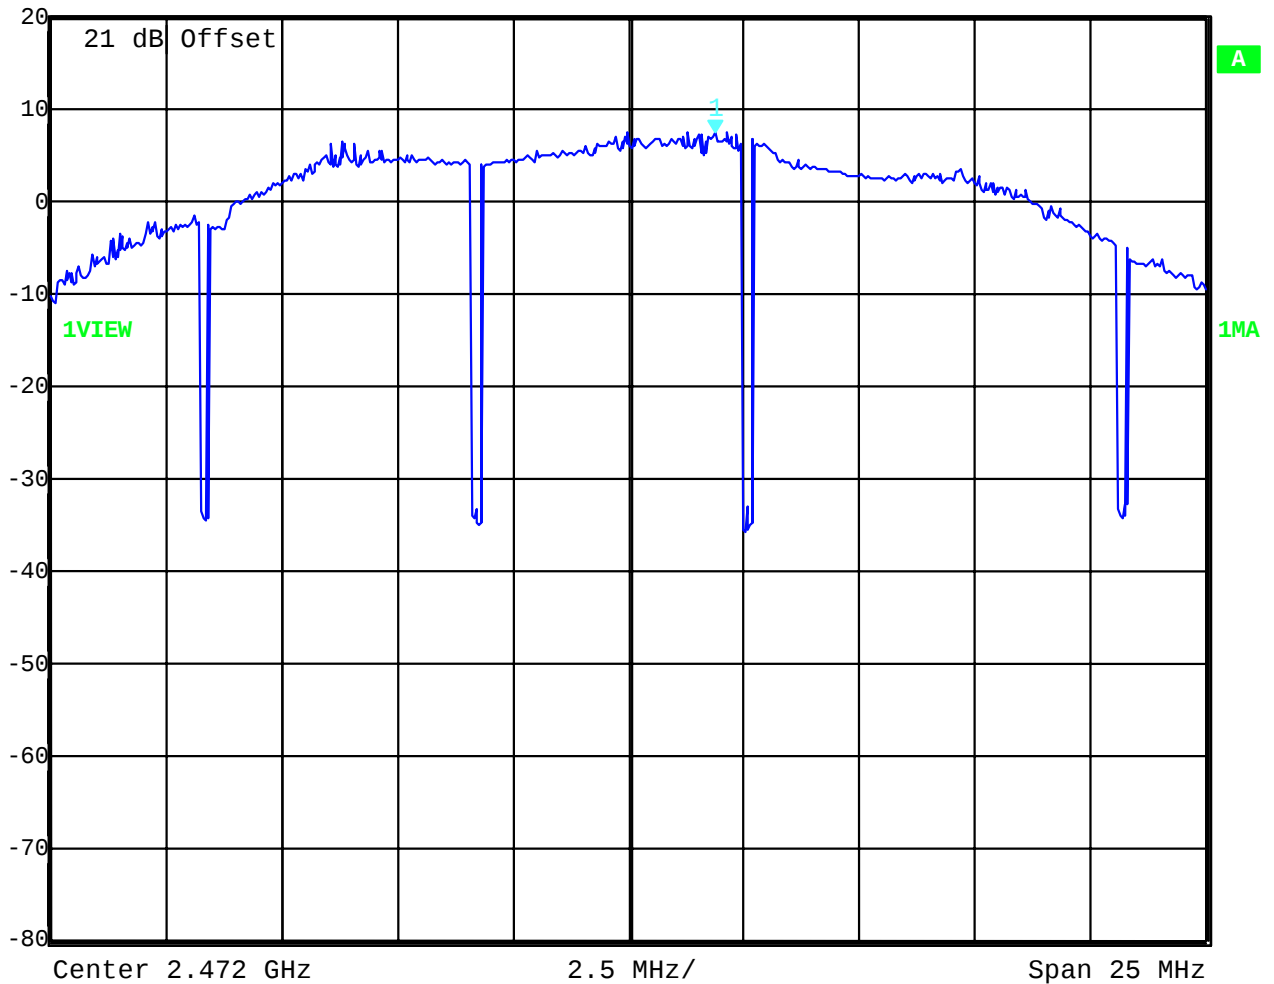

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2-3770-01-01a/04

Date: 2004-12-22

Page 30 of 86

Results:

Test conditions			Max. peak output power [dBm]			
Frequency [MHz]			2412	2437	2462	2472
T _{nom}	V _{nom}	PK	19.17	17.60	20.09	7.50
		PK corrected	19.17	17.60	20.09	7.50
EIRP (Peak) [dBm]			16.8	17.5	16.5	3.75
Antenna gain: [dBi] (calculated)			-2.37	-0.1	-3.59	-3.75
Measurement uncertainty			±3dB			

RBW / VBW : 10 MHz

Remark:

Here we have no correction factor as the measuring BW is as wide as the OBW.


Limits:

Under normal test conditions only, for frequency range 2400-2483.5 MHz	Max. 1.0 Watt / 30 dBm
---	------------------------

3.9 Maximum output power (conducted) (OFDM)

§15.247 (b) (1)

Plot 1: 2412 MHz

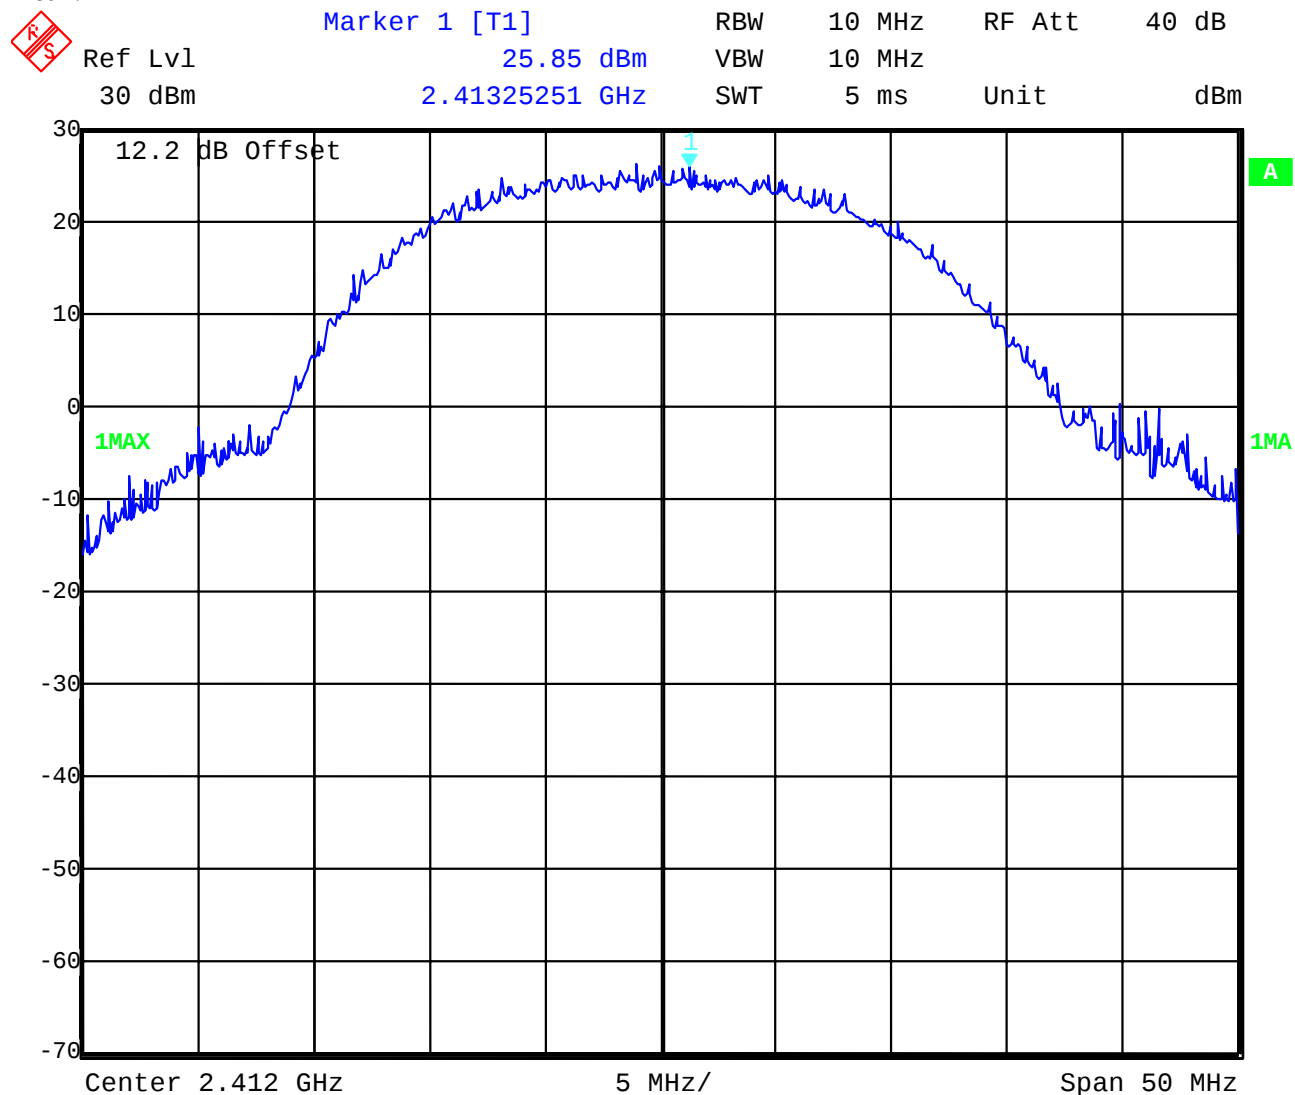

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-3770-01-01a/04

Date: 2004-12-22

Page 32 of 86

Plot 2: 2437 MHz

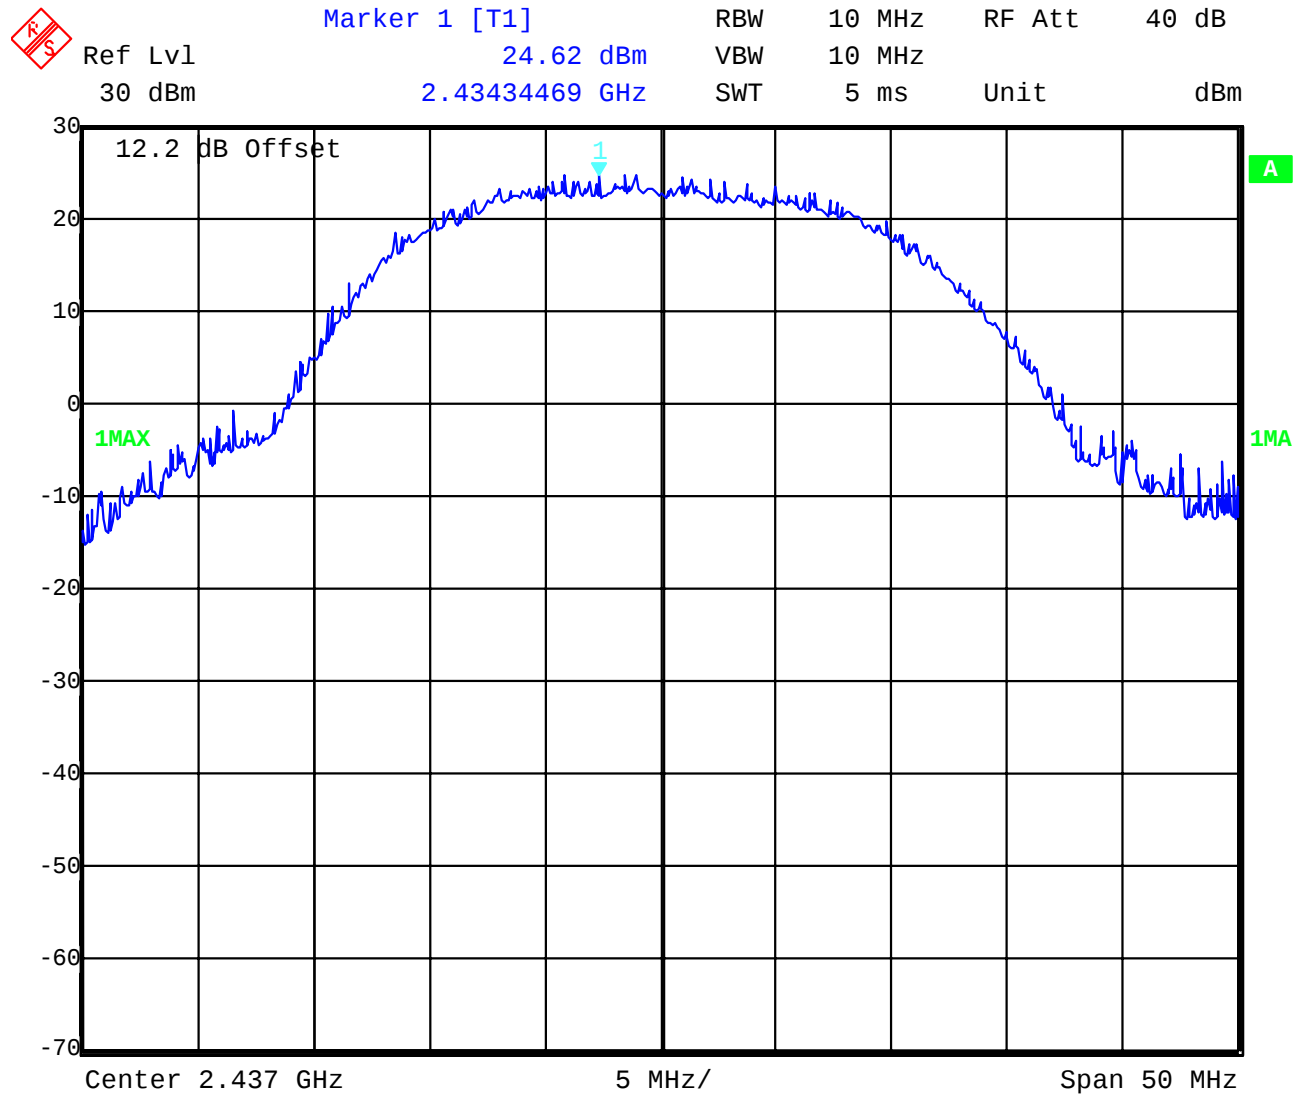

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-3770-01-01a/04

Date: 2004-12-22

Page 33 of 86

Plot 3: 2462 MHz

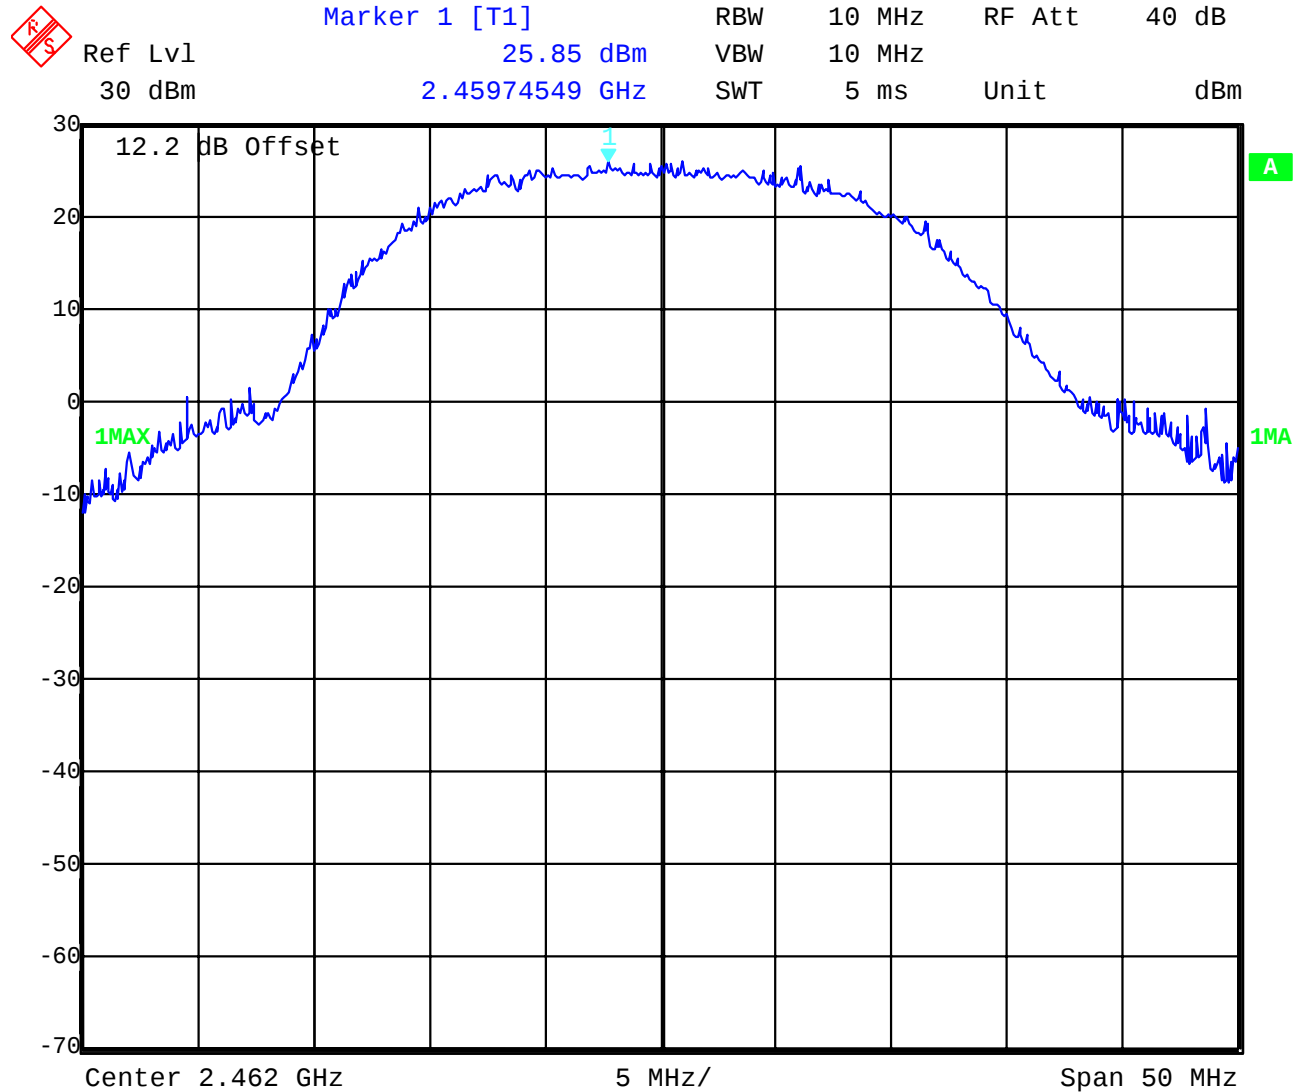

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2-3770-01-01a/04


Date: 2004-12-22

Page 34 of 86

Plot 4: 2472 MHz



Marker 1 [T1] RBW 10 MHz RF Att 20 dB
Ref Lvl 13.65 dBm VBW 10 MHz
20 dBm 2.47217535 GHz SWT 5 ms Unit dBm

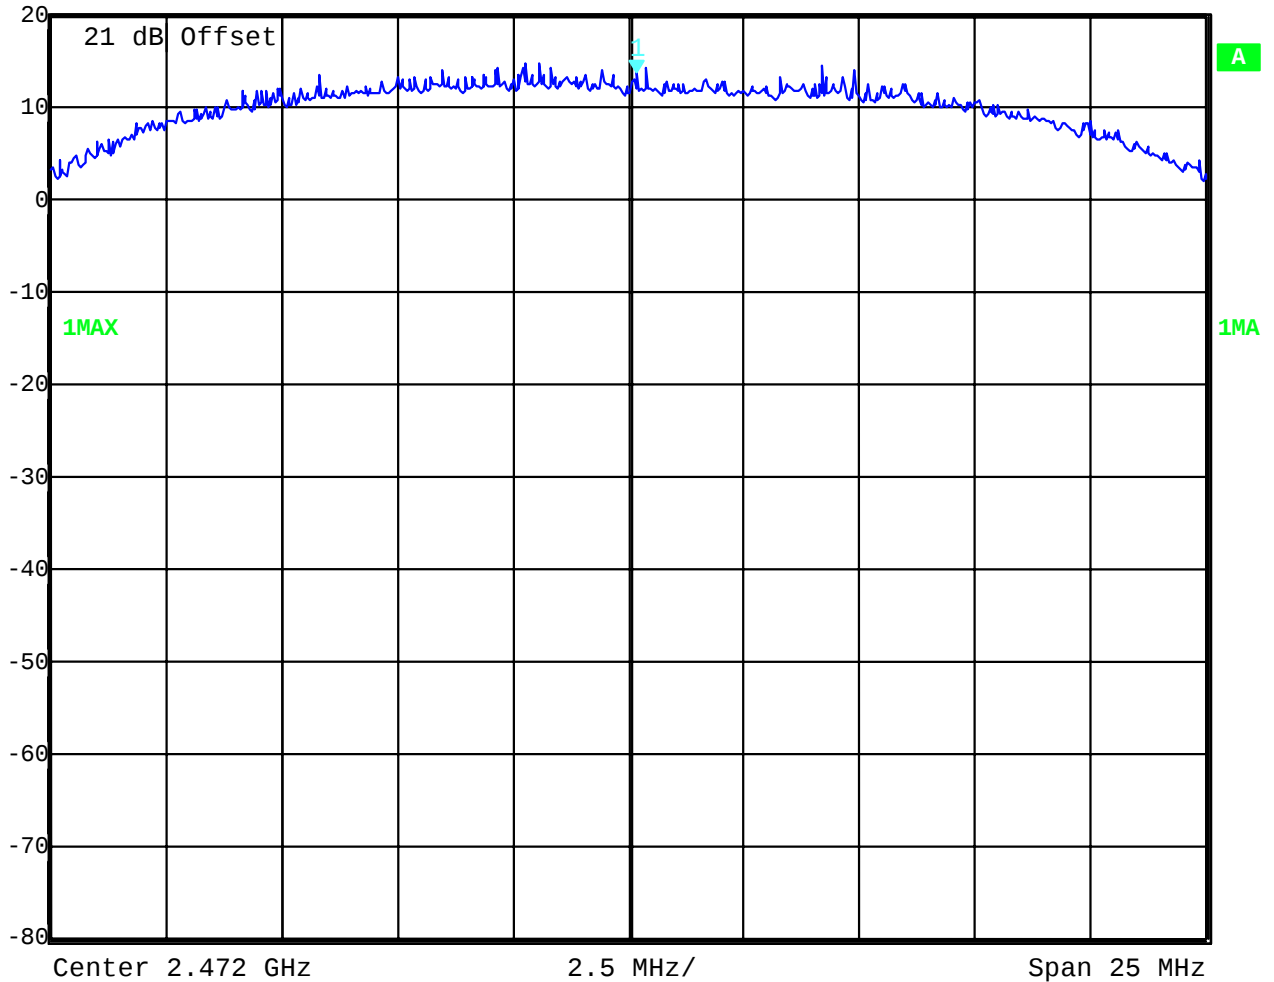

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2-3770-01-01a/04

Date: 2004-12-22

Page 35 of 86

Results:

Test conditions			Max. peak output power [dBm]			
Frequency [MHz]			2412	2437	2462	2472
T _{nom}	V _{nom}	PK	25.85	24.62	25.85	13.65
		PK corrected	27.95	26.72	27.95	15.75
EIRP (Peak) [dBm]			24.0	25.5	24.2	12.0
Antenna gain: [dBi] (calculated)			-3.95	-1.2	-3.75	-3.75
Measurement uncertainty			±3dB			

RBW / VBW : 10 MHz

Remark:

The correction factor is calculated by $10 \times \log(\text{measured BW} / \text{used BW})$ [dB], here +2.1 dB

Limits:

Under normal test conditions only, for frequency range 2400-2483.5 MHz	Max. 1.0 Watt / 30 dBm
---	------------------------

MPE calculation

These equations are generally accurate in the far field of an antenna but will over predict power density in the near field, where they could be used for making a “worst case” prediction.

$$S = PG/4\pi R^2$$

where S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units e.g. mW)

G = power gain of the antenna in the direction of interest relative to the isotropic radiator

R = distance to the center of radiation of the antenna (appropriate units e.g. cm)

Or

$$S = EIRP/4\pi R^2$$

where $EIRP$ = equivalent isotropically radiated power

Calculation: DSSS

(Calculated for max. EIRP)

EIRP: 17.5 dBm 56.23 (mW)

calculated at distance of 20 cm:

$$\text{power density} = 56.23 / 4\pi 20^2 = 0.0112 \text{ mW/ cm}^2$$

Calculation: OFDM

(Calculated for max. EIRP)

EIRP: 25.5 dBm 354.8 (mW)

calculated at distance of 20 cm:

$$\text{power density} = 354.8 / 4\pi 20^2 = 0.07 \text{ mW/ cm}^2$$

Limit:

1mW/ cm² is the reference level for general public exposure according to the OET Bulletin 65,
Edition 97-01 Table 1.

3.10 Max. peak output power (radiated)

§15.247 (b) (1)

Results: DSSS

Test conditions		Max. peak output power EIRP [dBm]			
Frequency [MHz]		2412	2437	2462	2472
T _{nom}	V _{nom}	16.8	17.5	16.5	3.75
Measurement uncertainty		±3dB			

Results: OFDM

Test conditions		Max. peak output power EIRP [dBm] Including +2.1 dB correction factor			
Frequency [MHz]		2412	2437	2462	2472
T _{nom}	V _{nom}	24.0	25.5	24.2	12.0
Measurement uncertainty		±3dB			

RBW / VBW : 10 MHz

Measured at a distance of 3m


Limits:

Under normal test conditions only, for frequency range 2400-2483.5 MHz	Max. 1.0 Watt
--	---------------

3.11 Band-edge compliance of conducted emissions

§15.247 (c)

Plot 1, lowest channel, worst case (OFDM)

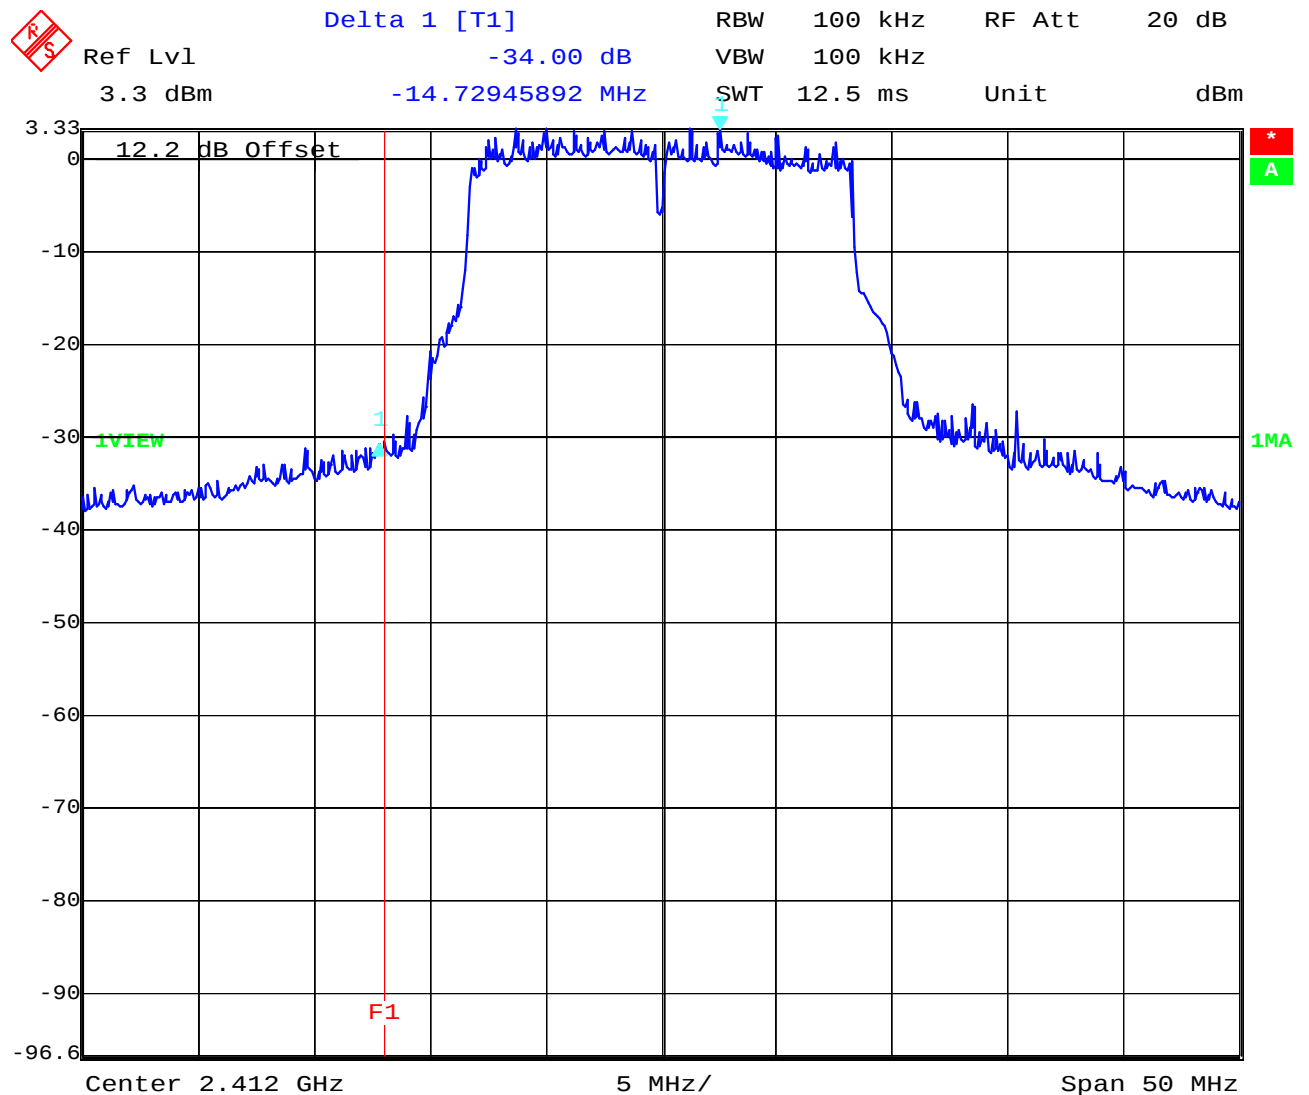

Date: 13.OCT.2004 15:59:05

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-3770-01-01a/04

Date: 2004-12-22

Page 39 of 86

Plot 2, 2462 MHz OFDM

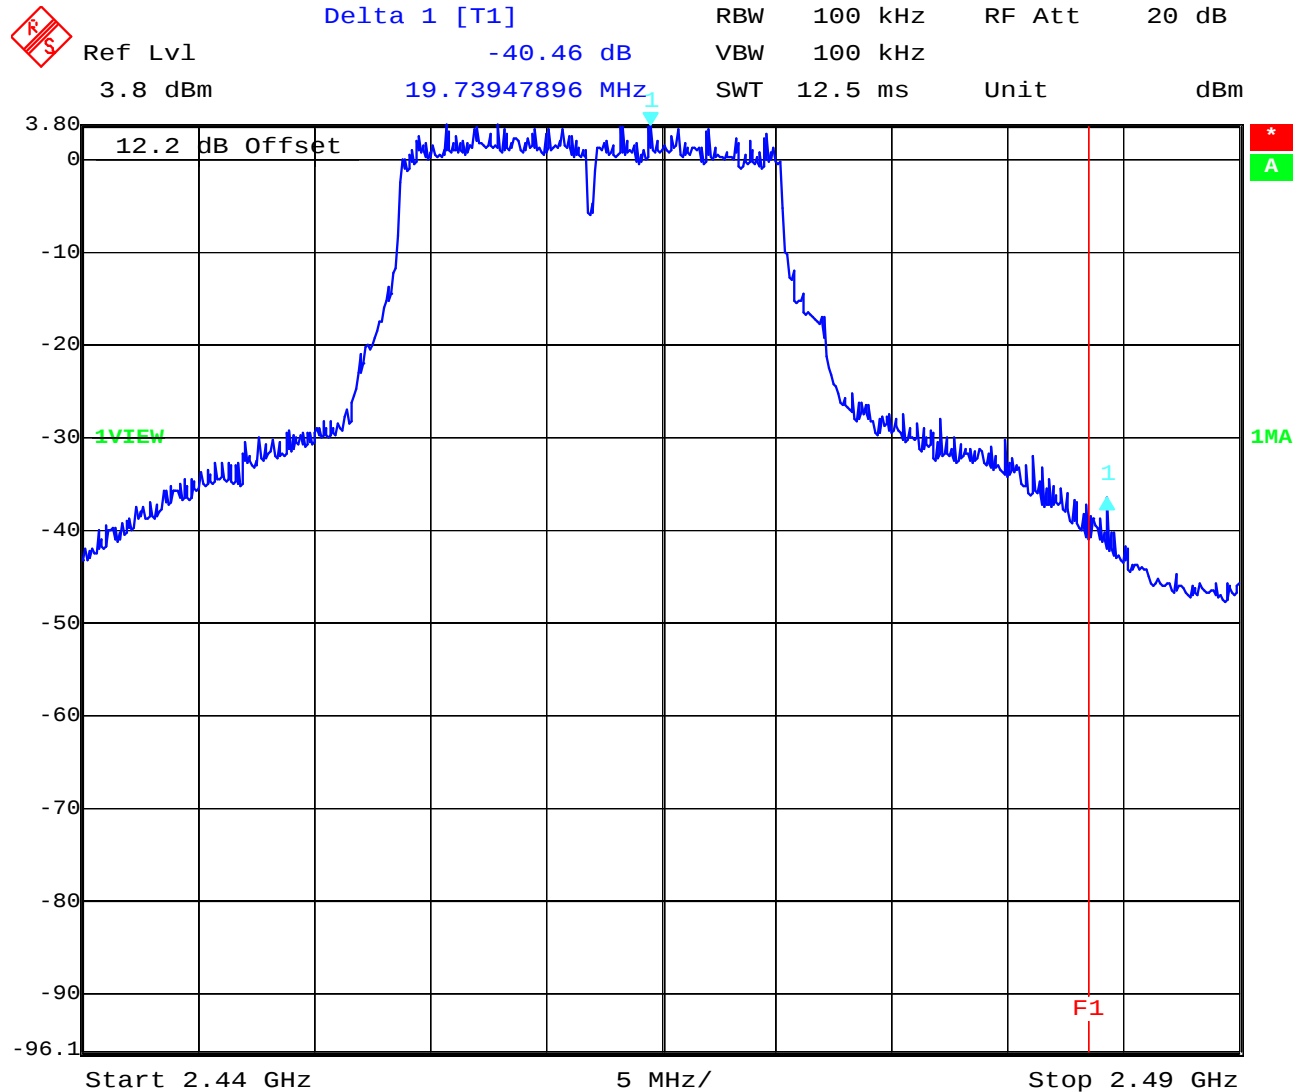

Date: 13.OCT.2004 16:00:31

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-3770-01-01a/04

Date: 2004-12-22


Page 40 of 86

Plot 3, 2467 MHz OFDM

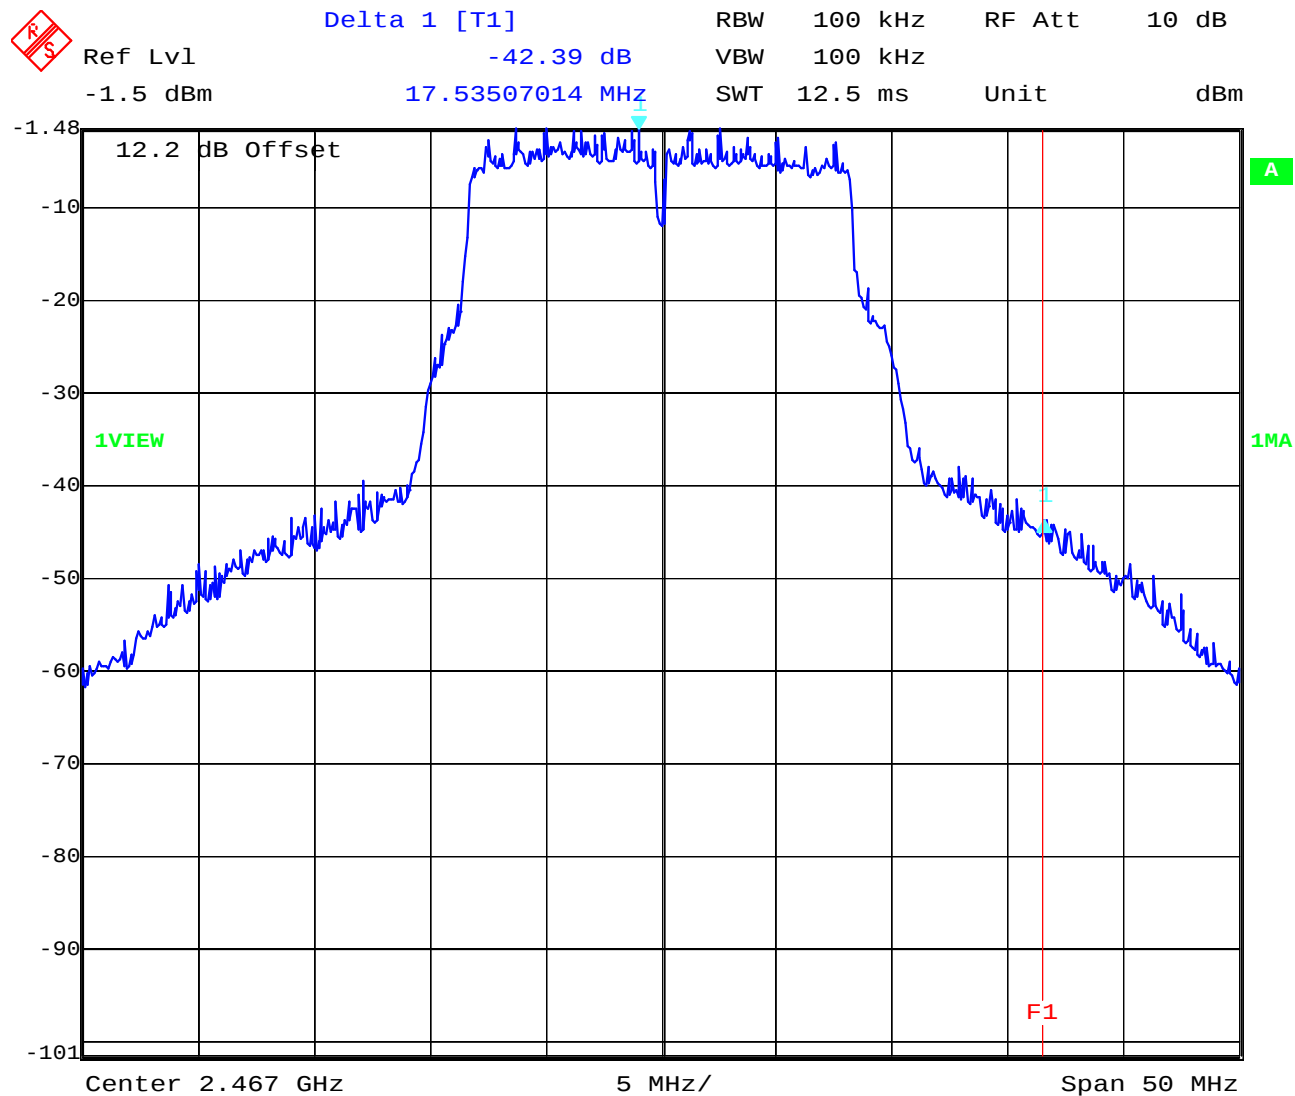

Date: 13.OCT.2004 16:03:11

Plot 4, 2472 MHz OFDM

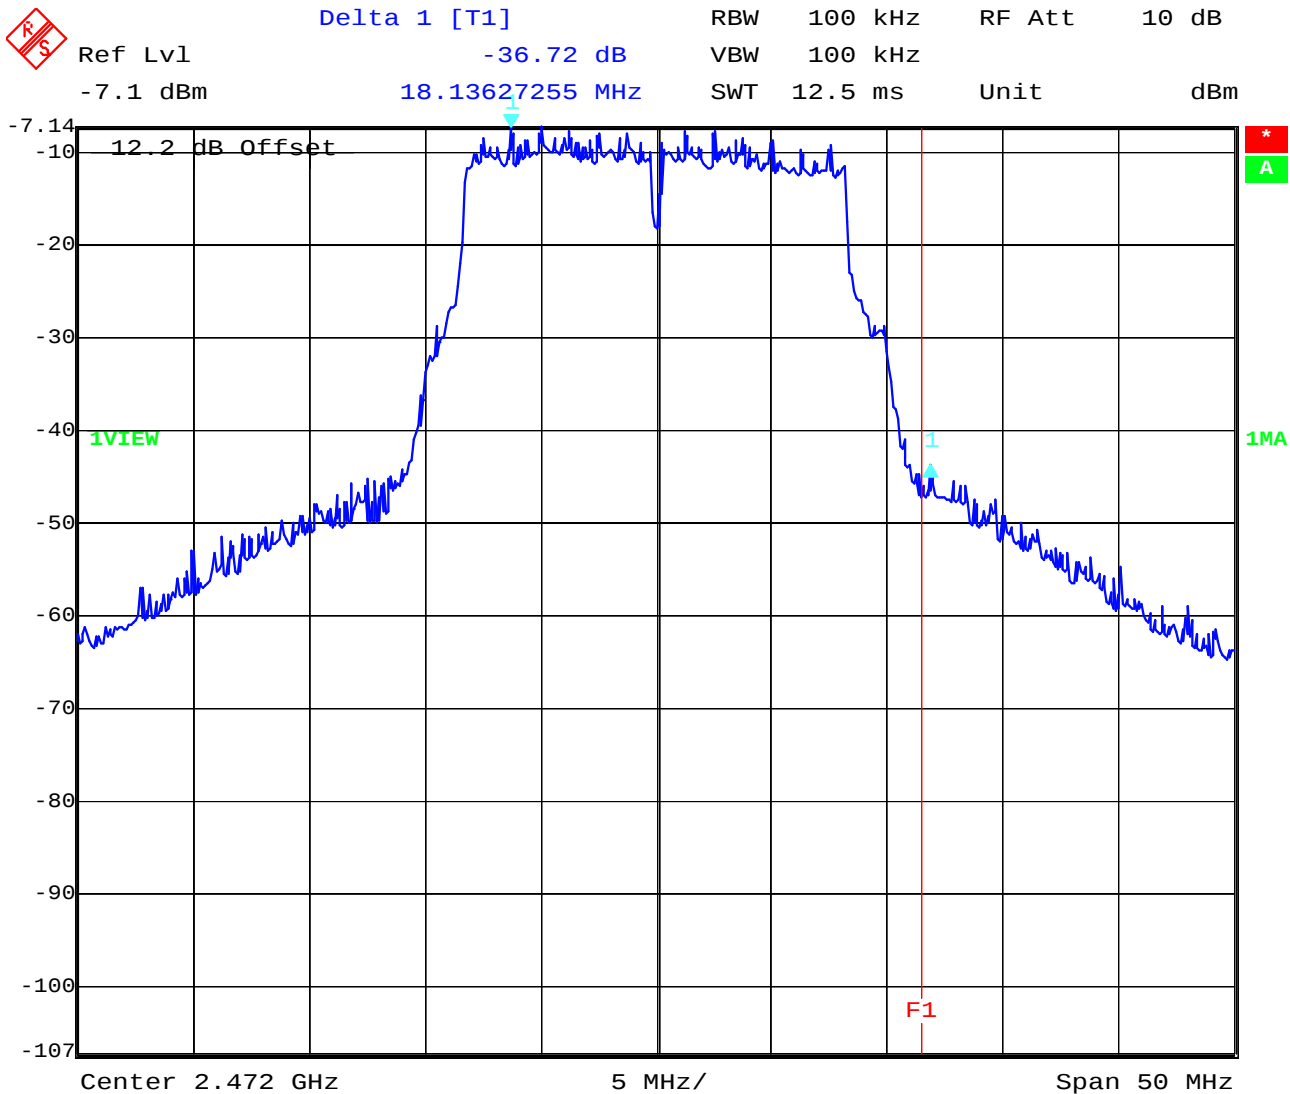

Date: 13.OCT.2004 16:02:29

Limits:


Under normal test conditions only	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).
-----------------------------------	--

3.12 Band-edge compliance of radiated emissions


§15.205

Here for 2462 MHz

Plot 1 : Max field strength in 3m distance (peak) OFDM

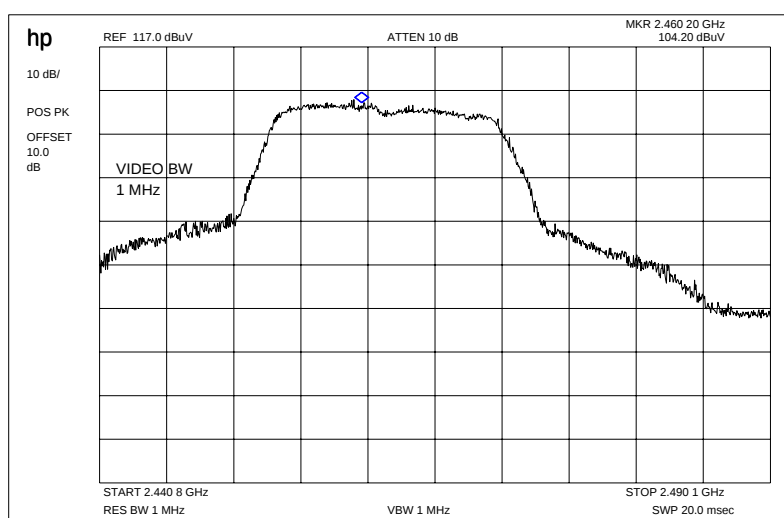


DSSS

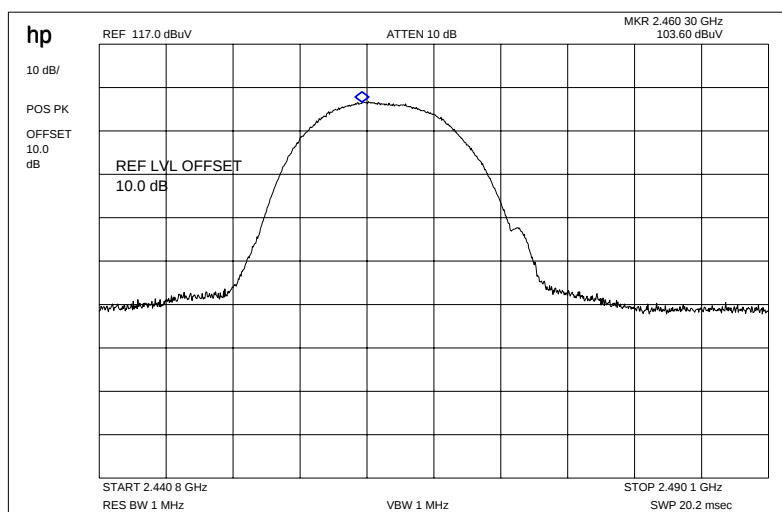


Result:

Frequency	Modulation	Cable loss	Antenna factor	Results
2462 MHz	OFDM	22.8 dB	-7.2	104.2 dB μ V
	DSSS			103.6 dB μ V

Plot 2 : Max field strength in 3m distance (average) OFDM

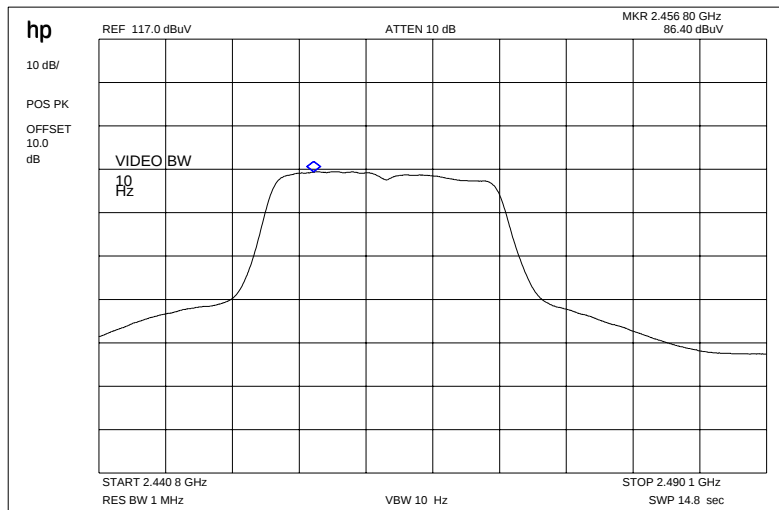


DSSS

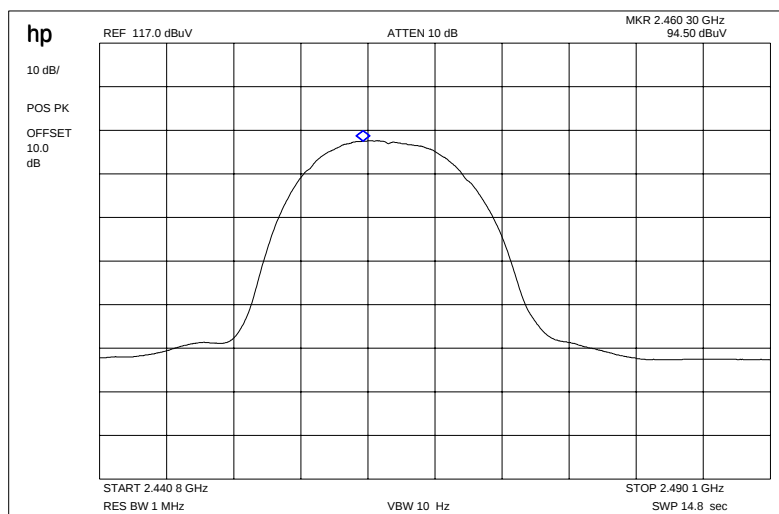

Result:


Frequency	Modulation	Cable loss	Antenna factor	Results
2462 MHz	OFDM	22.8 dB	-7.2	86.4 dB μ V
	DSSS			94.5 dB μ V

Plot 3: Marker-Delta Method RBW/VBW = 1% of span ,OFDM

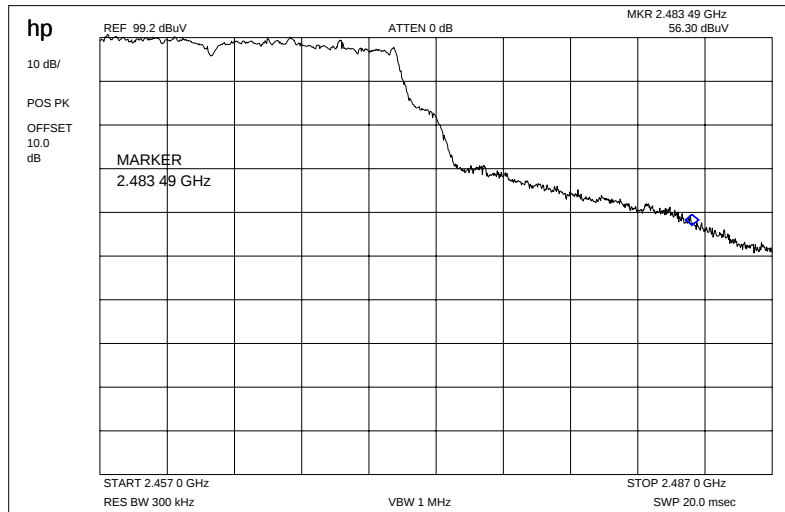

delta dB = 43.4 dB

DSSS

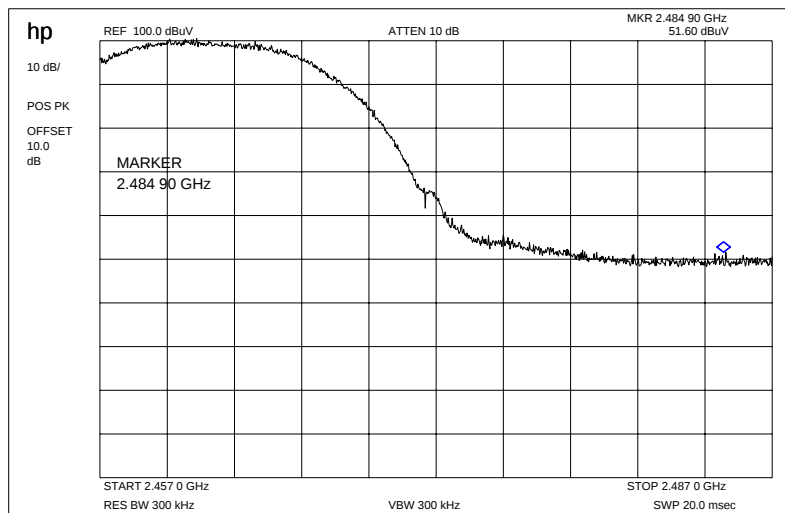

Result:

Marker-Delta-Value : 46.1 dB

This measurement was made to show that the behavior of the system is conform to FCC 15.205 (restricted bands)

Results & Limits:

Radiated field strength

The field strength was measured with an EMI measuring receiver and 1 MHz RBW / VBW for peak and with 1MHz RBW / 10Hz VBW for average at a distance of 3m.

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-3770-01-01a/04

Date: 2004-12-22

Page 45 of 86

high channel	setup	measured value (3m)		correction factor (3m)	calculated value (3m)
Max. peak value	1 MHz RBW /1 MHz VBW	88.6 dB μ V	OFDM	+15,6 dB	104.2 dB μ V
		88.0 dB μ V	DSSS		103.6 dB μ V
Max. average value	1 MHz RBW/10 Hz VBW	69.6 dB μ V	OFDM	+15.6 dB	86.4 dB μ V
		78.9 dB μ V	DSSS		94.5 dB μ V
Delta value	Peak 300 kHz RBW/VBW	43.4 dB	OFDM		
		48.4 dB	DSSS		
Value at band edge	limit 54 dB μ V/m		OFDM		43.0 dB μ V
			DSSS		46.1 dB μ V
Statement:					Complies

Here the complete restricted band

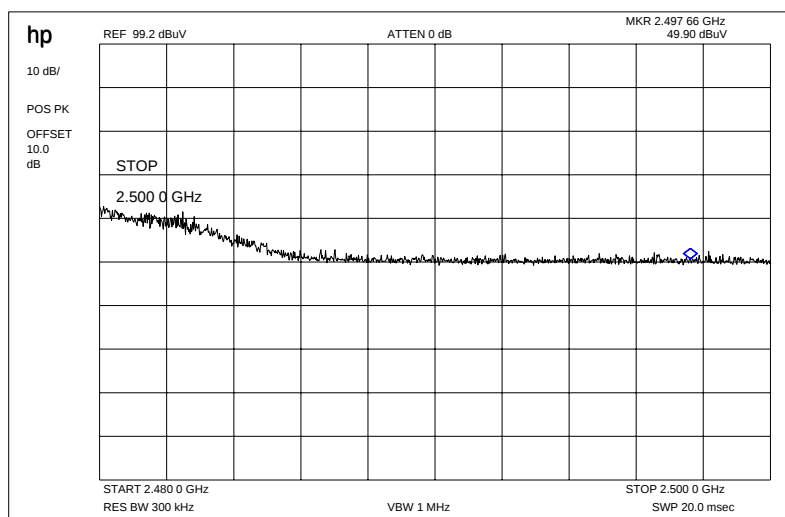


Band-edge compliance of radiated emissions


§15.205

Here for 2467 MHz

Plot 1 : Max field strength in 3m distance (peak) DSSS

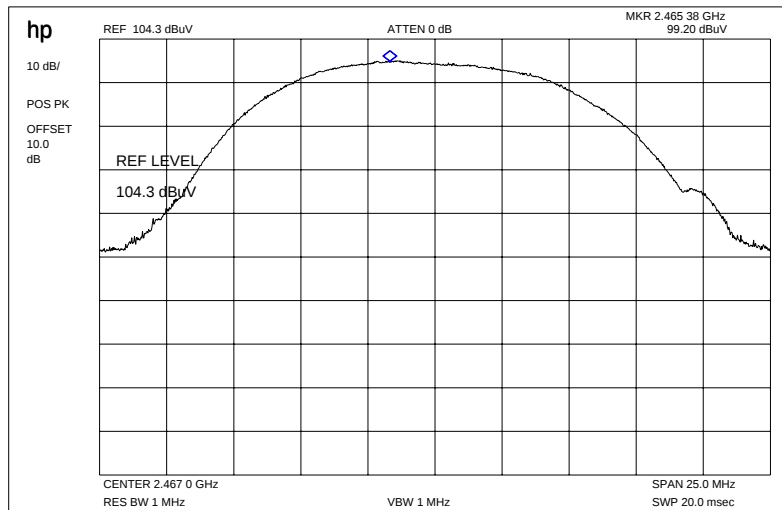


OFDM

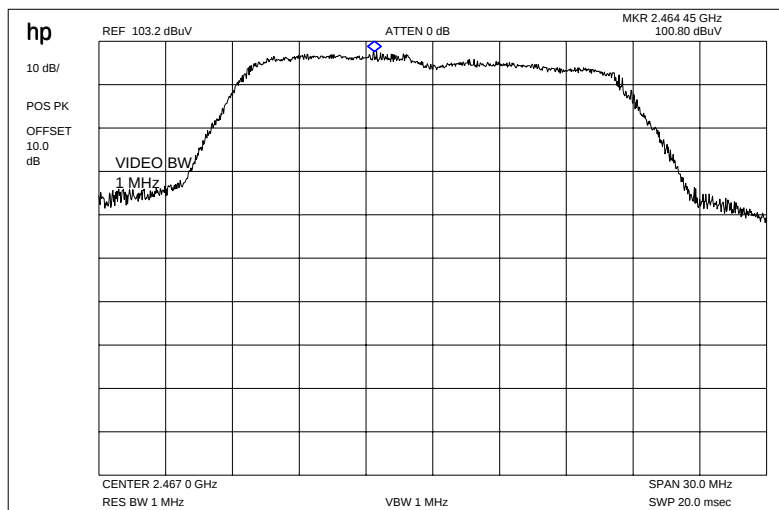


Result:

Frequency	Modulation	Cable loss	Antenna factor	Results
2467 MHz	DSSS	22.8 dB	-7.2	99.2 dB μ V
	OFDM			100.8 dB μ V

Plot 2 : Max field strength in 3m distance (average) DSSS

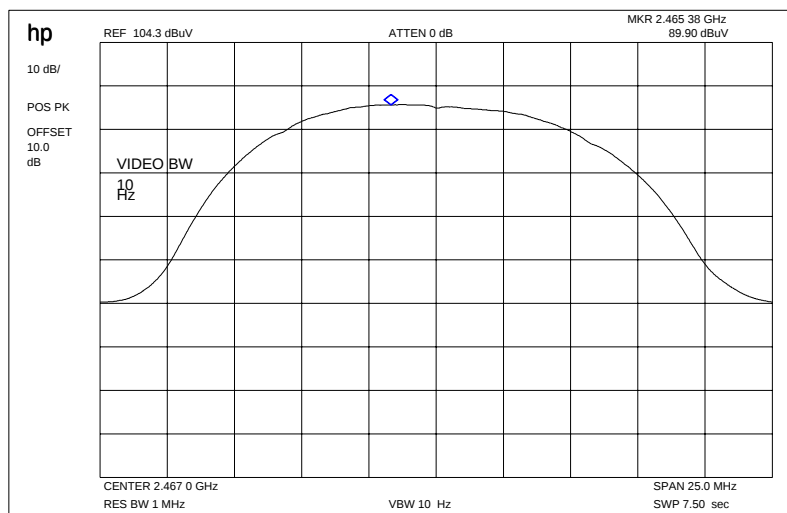


OFDM

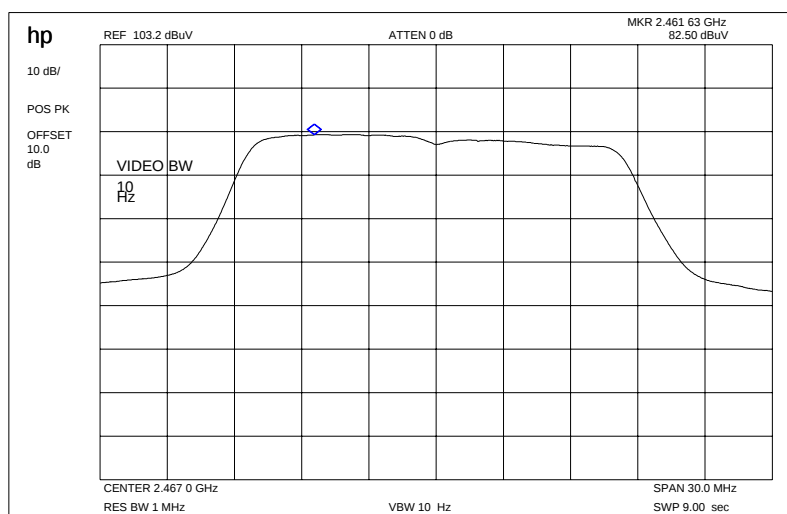

Result:

Frequency	Modulation	Cable loss	Antenna factor	Results
2467 MHz	DSSS	22.8 dB	-7.2	89.9 dB μ V
	OFDM			82.5 dB μ V


Plot 3: Marker-Delta Method RBW/VBW = 1% of span DSSS

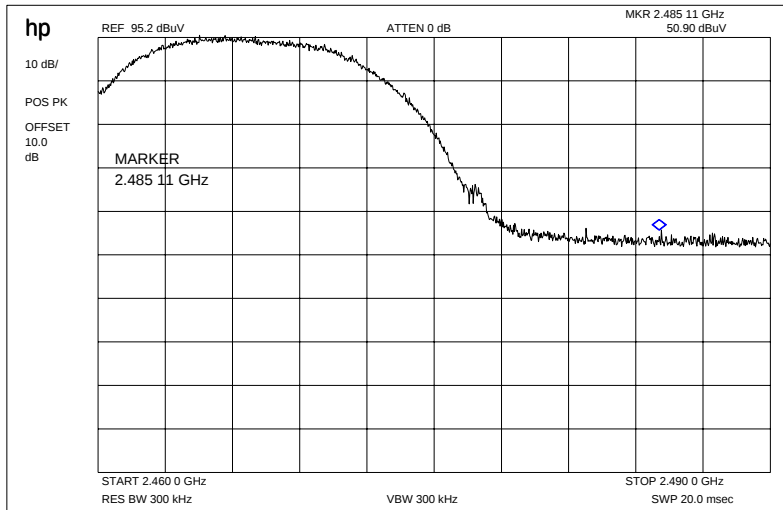

Result:

Marker-Delta-Value : 44.3 dB

OFDM

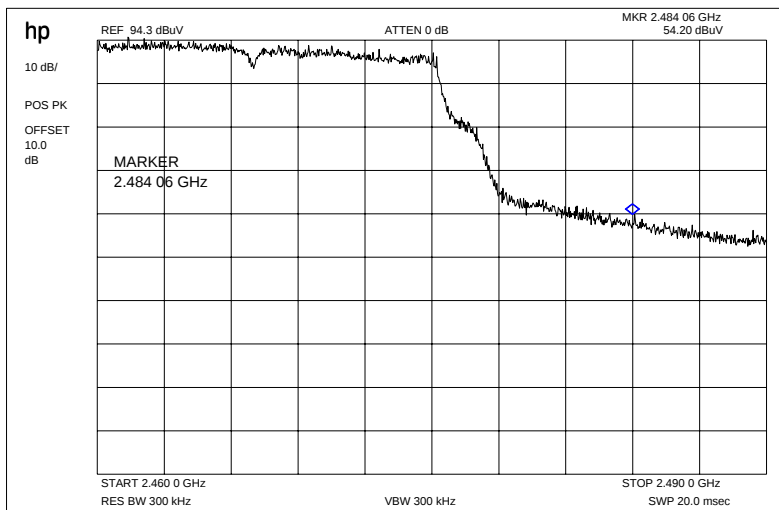

Result:

Marker-Delta-Value : 40.1 dB

This measurement was made to show that the behavior of the system is conform to FCC 15.205 (restricted bands)

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2-3770-01-01a/04

Date: 2004-12-22

Page 49 of 86


Results & Limits:

Radiated field strength

The field strength was measured with an EMI measuring receiver and 1 MHz RBW / VBW for peak and with 1MHz RBW / 10Hz VBW for average at a distance of 3m.

high channel	setup	Measured value (3m)		correction factor (3m)	calculated value (3m)
Max. peak value	1 MHz RBW /1 MHz VBW	85.2 dB μ V 83.6 dB μ V	OFDM DSSS	+15,6 dB	100.8 dB μ V 99.2 dB μ V
Max. average value	1 MHz RBW/10 Hz VBW	66.9 dB μ V 74.3 dB μ V	OFDM DSSS	+15.6 dB	82.5 dB μ V 89.9 dB μ V
Delta value	Peak 300 kHz RBW/VBW	42.4 dB 45.6 dB	OFDM DSSS		
Value at band edge	limit 54 dB μ V/m		OFDM DSSS		40.1 dB μ V 44.3 dB μ V
Statement:					Complies


Here the complete restricted band

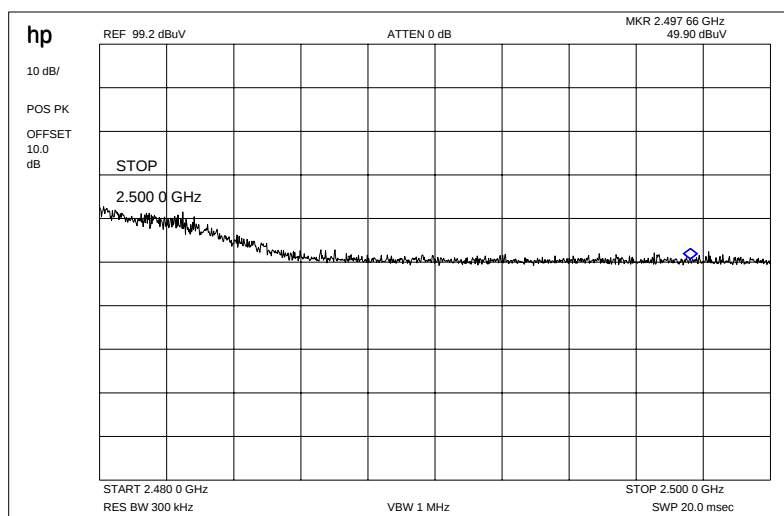

Band-edge compliance of radiated emissions


§15.205

Low frequency range

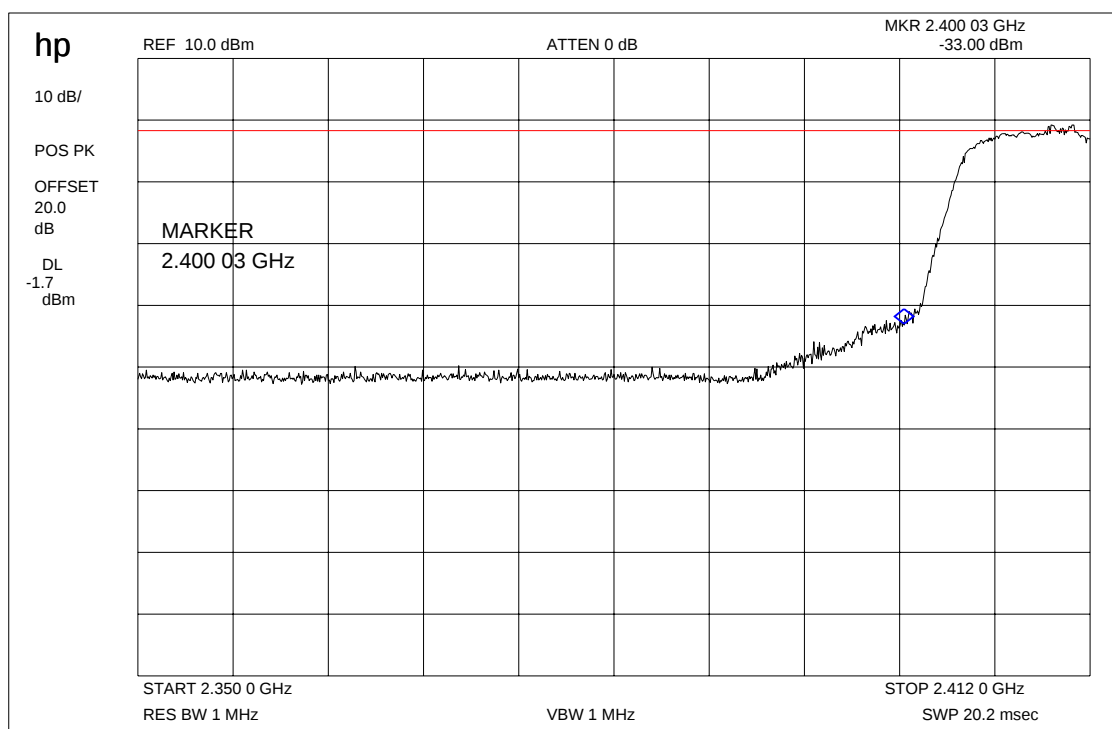


Here for 2472 MHz as highest channel according to the customer to show that is is possible to use 13 channels in USA and also fulfill the band edge requirements.

Plot 1 : Max field strength in 3m distance (peak) DSSS

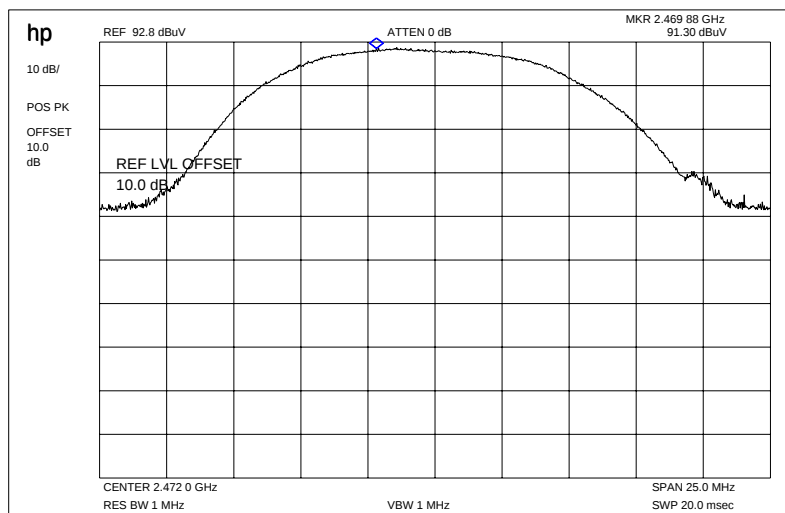


OFDM

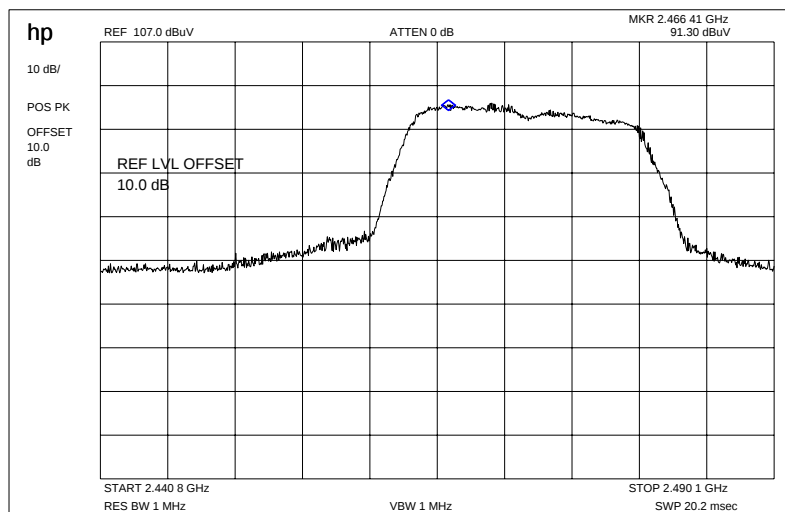


Result:

Frequency	Modulation	Cable loss	Antenna factor	Results
2472 MHz	DSSS	22.8 dB	-7.2	91.3 dB μ V
	OFDM			92.6 dB μ V

Plot 2 : Max field strength in 3m distance (average) DSSS

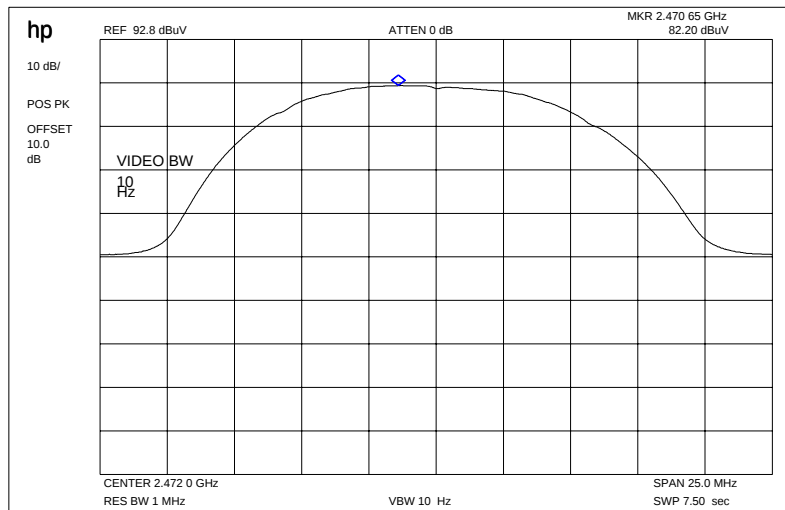


OFDM

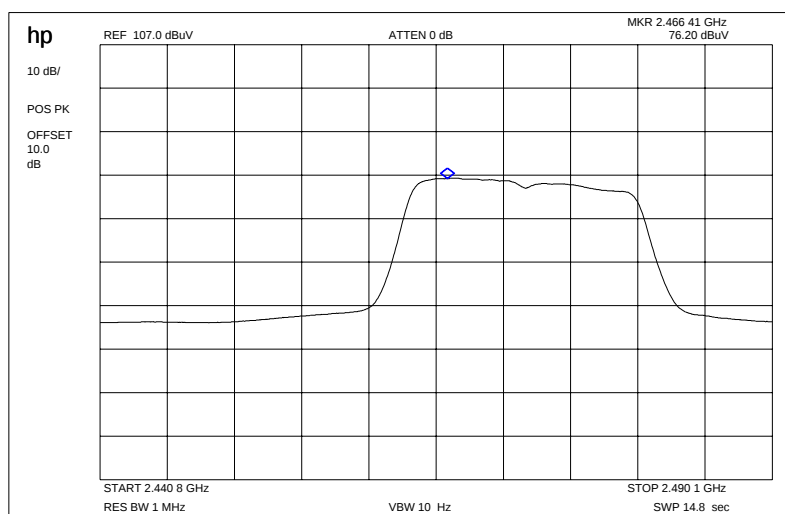

Result:

Frequency	Modulation	Cable loss	Antenna factor	Results
2472 MHz	DSSS	22.8 dB	-7.2	82.2 dB μ V
	OFDM			76.2 dB μ V


Plot 3: Marker-Delta Method RBW/VBW = 1% of span DSSS

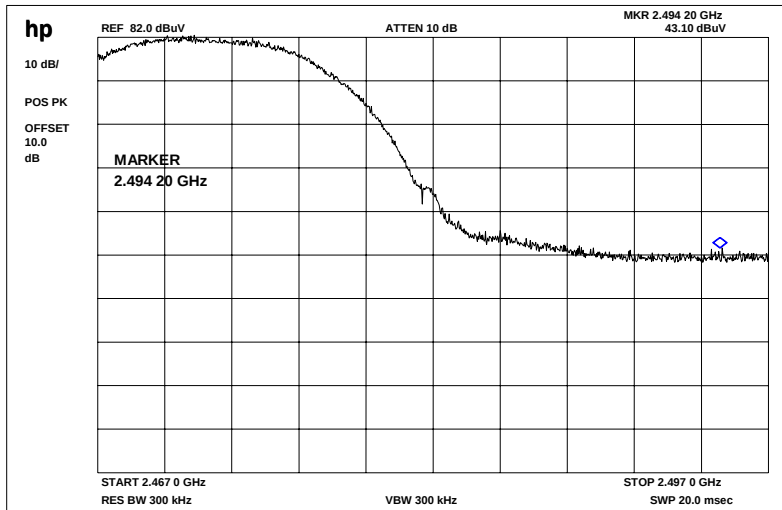

Result:

Marker-Delta-Value : 38.9 dB

OFDM

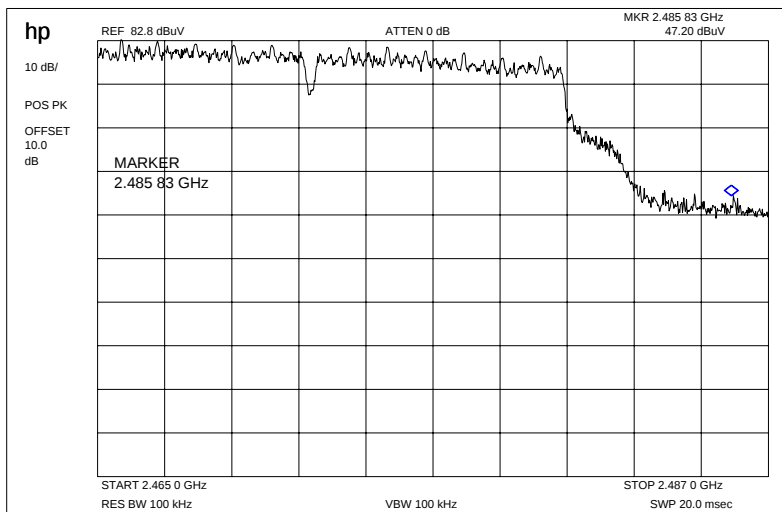

Result:

Marker-Delta-Value : 35.6 dB

This measurement was made to show that the behavior of the system is conform to FCC 15.205 (restricted bands)

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2-3770-01-01a/04

Date: 2004-12-22

Page 54 of 86


Results & Limits:

Radiated field strength

The field strength was measured with an EMI measuring receiver and 1 MHz RBW / VBW for peak and with 1MHz RBW / 10Hz VBW for average at a distance of 3m.

high channel	setup	Measured value (3m)		correction factor (3m)	calculated value (3m)
Max. peak value	1 MHz RBW /1 MHz VBW	77.0 dB μ V 75.7 dB μ V	OFDM DSSS	+15,6 dB	92.6 dB μ V 91.3 dB μ V
Max. average value	1 MHz RBW/10 Hz VBW	60.6 dB μ V 66.6 dB μ V	OFDM DSSS	+15.6 dB	76.2 dB μ V 82.2 dB μ V
Delta value	Peak 300 kHz RBW/VBW	35.6 dB 38.9 dB	OFDM DSSS		
Value at band edge	limit 54 dB μ V/m		OFDM DSSS		40.6 dB μ V 43.3 dB μ V
Statement:					Complies


Here the complete restricted band

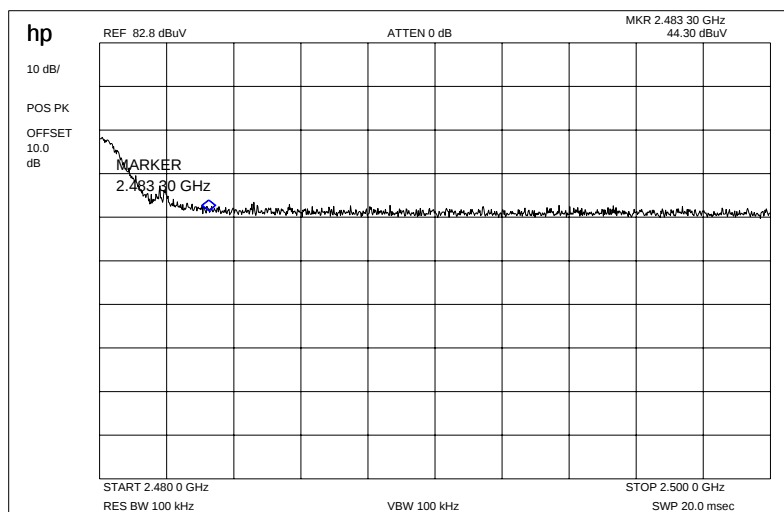

3.9 Spurious Emissions - conducted (Transmitter)

§15.247 (c)

Plot 1: 2412 MHz

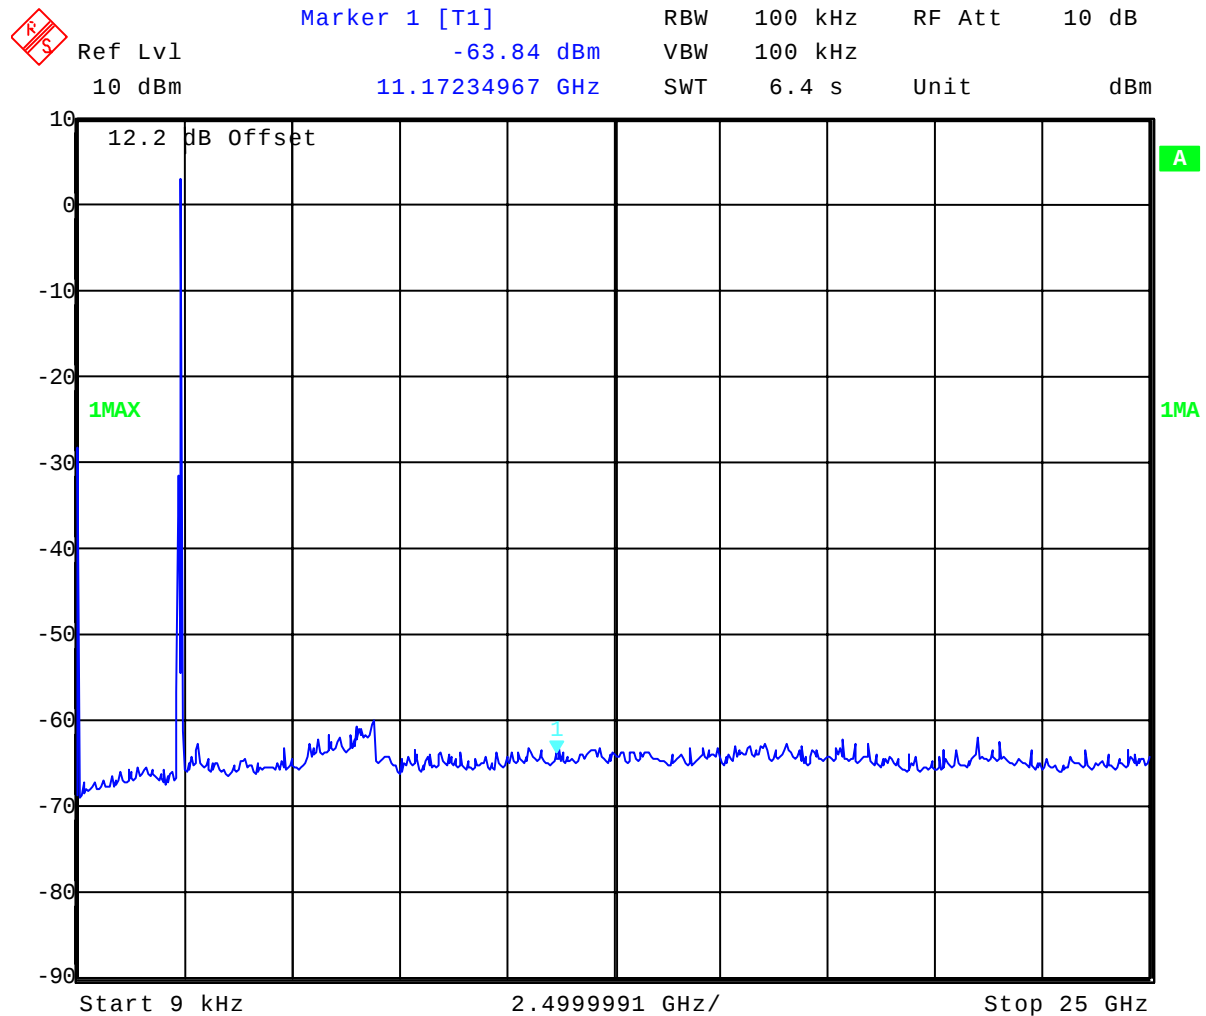

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-3770-01-01a/04

Date: 2004-12-22

Page 56 of 86

Plot 2: 2437 MHz

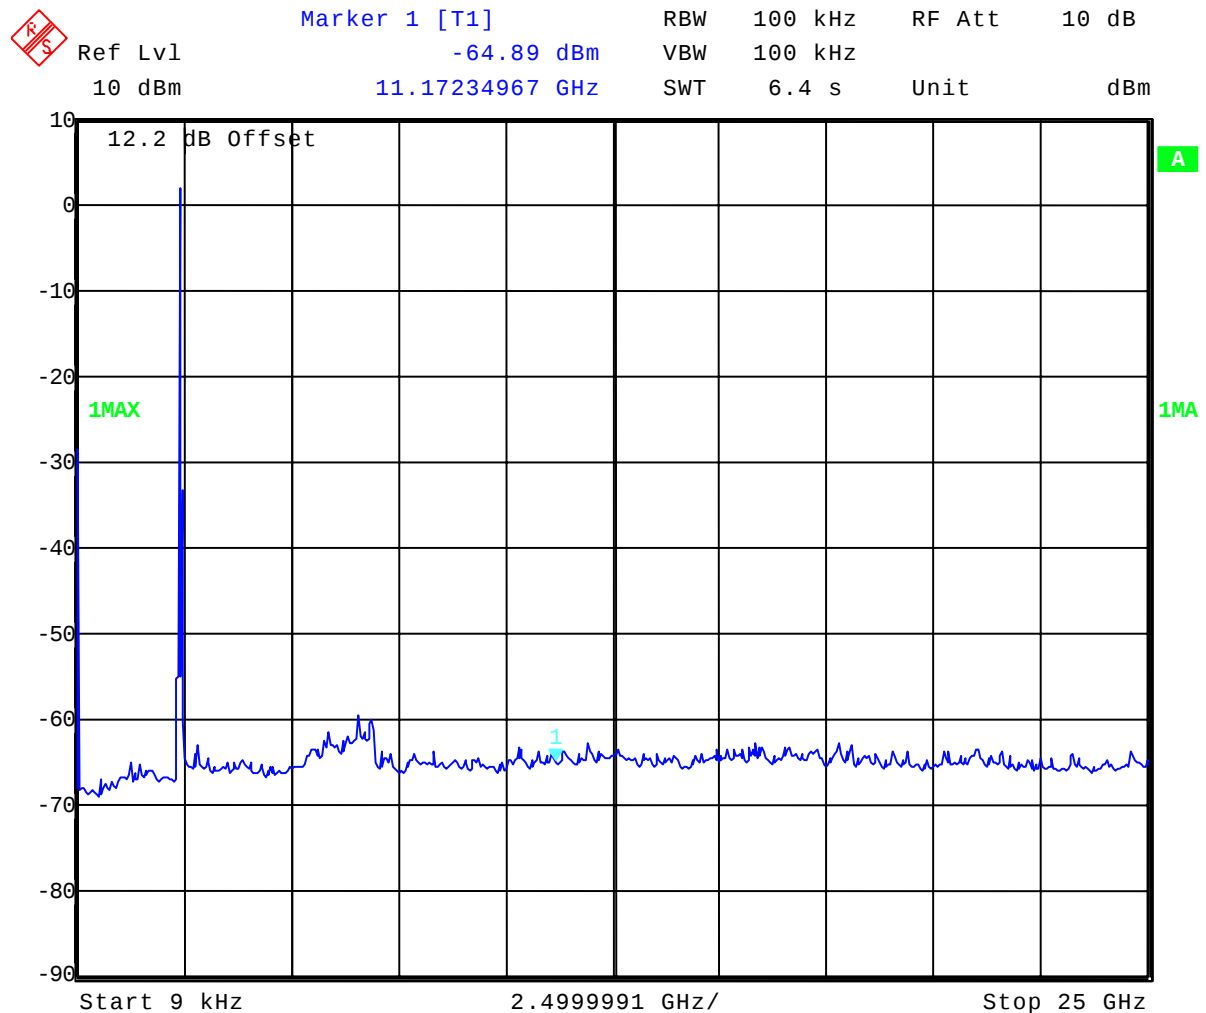

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2-3770-01-01a/04

Date: 2004-12-22

Page 57 of 86

Plot 3: 2462 MHz



Ref Lvl

11 dBm

Marker 1 [T1]

-8.40 dBm

2.47387876 GHz


RBW 100 kHz

VBW 100 kHz

SWT 6.4 s

RF Att 0 dB

Unit dBm

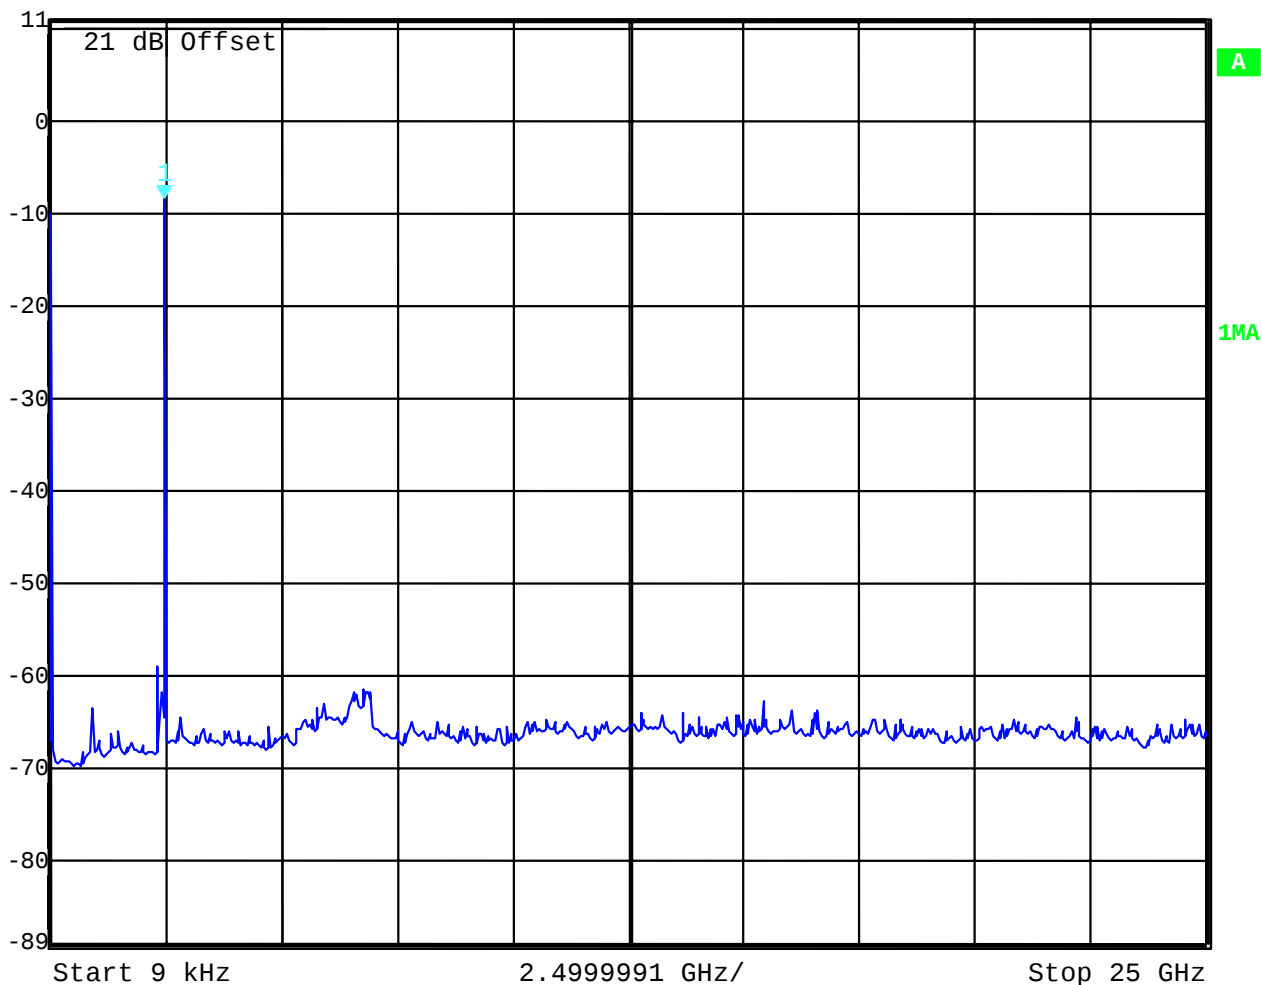

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-3770-01-01a/04

Date: 2004-12-22

Page 58 of 86

Plot 4: 2472 MHz

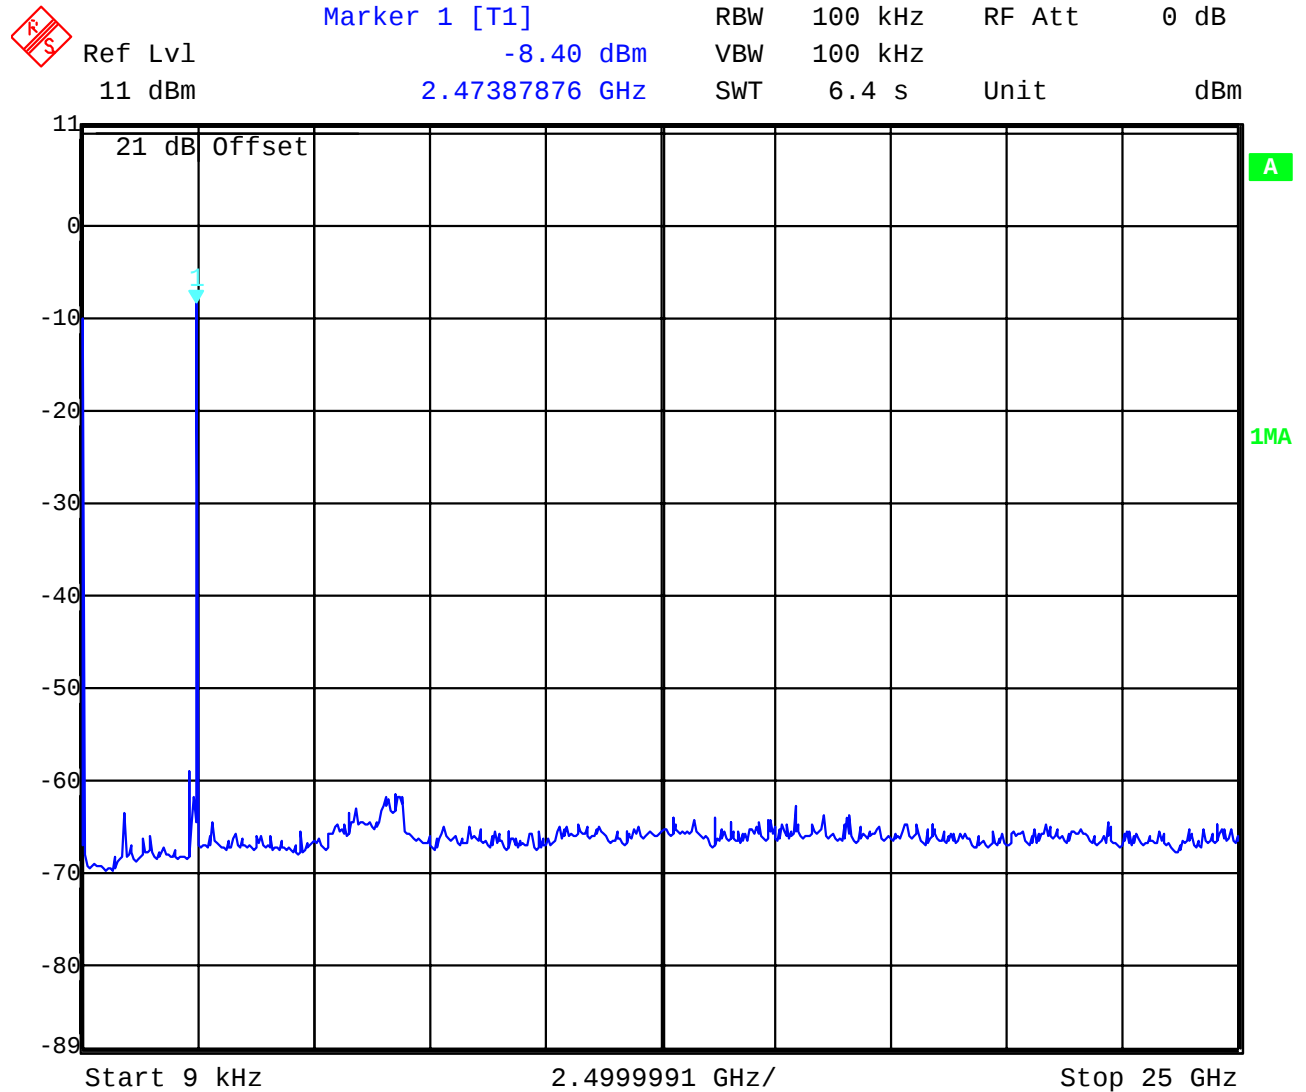

Result & Limits:

Emission Limitations					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emmission power	actual attenuation below frequency of operation [dB]	results
2412			30 dBm	-	Operating frequency
	No peaks	found			
2437			30 dBm		Operating frequency
	No peaks	found			
2462			30 dBm		Operating frequency
	No peaks	found			
2472			30 dBm		Operating frequency
	No peaks	found			
Measurement uncertainty		± 3dB			

RBW : 100 kHz VBW: 100 kHz


Under normal test conditions only	In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
-----------------------------------	--

Note: For emissions that fall into restricted bands you find the radiated emissions later in the report.

3.10 Spurious Emissions - radiated (Transmitter) §15.209


DSSS

Plot 1: 0.03 - 4 GHz vertical / horizontal (lowest channel)

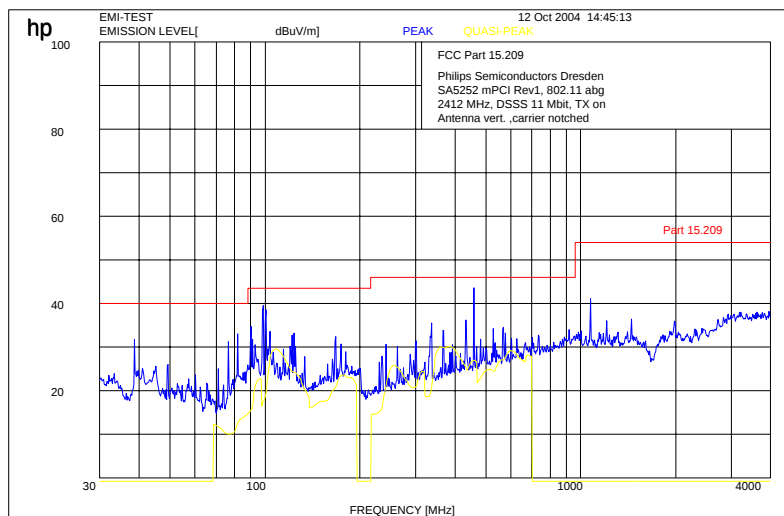

The yellow line shows the QP-values of the blue peak value line.
The peaks are caused by the measuring PC, not by the test sample.

Plot 2: 4- 12 GHz (lowest channel)

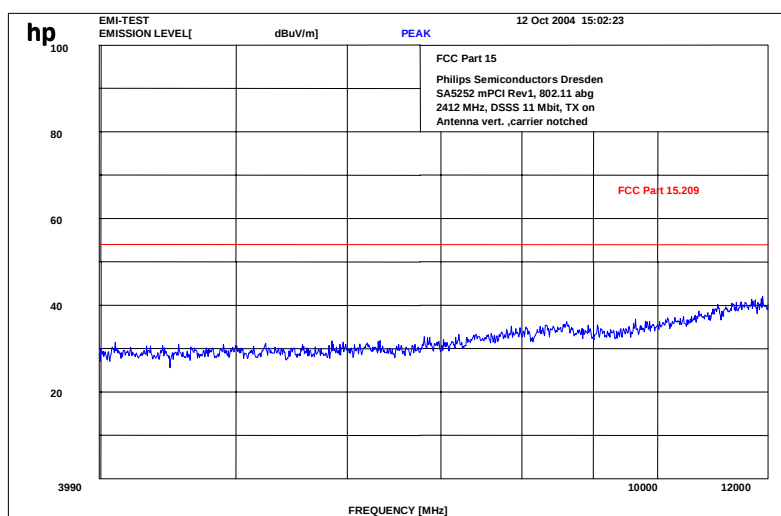

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-3770-01-01a/04


Date: 2004-12-22

Page 61 of 86


Plot 3: 12 – 25 GHz horizontal / vertical (valid for all three channels)

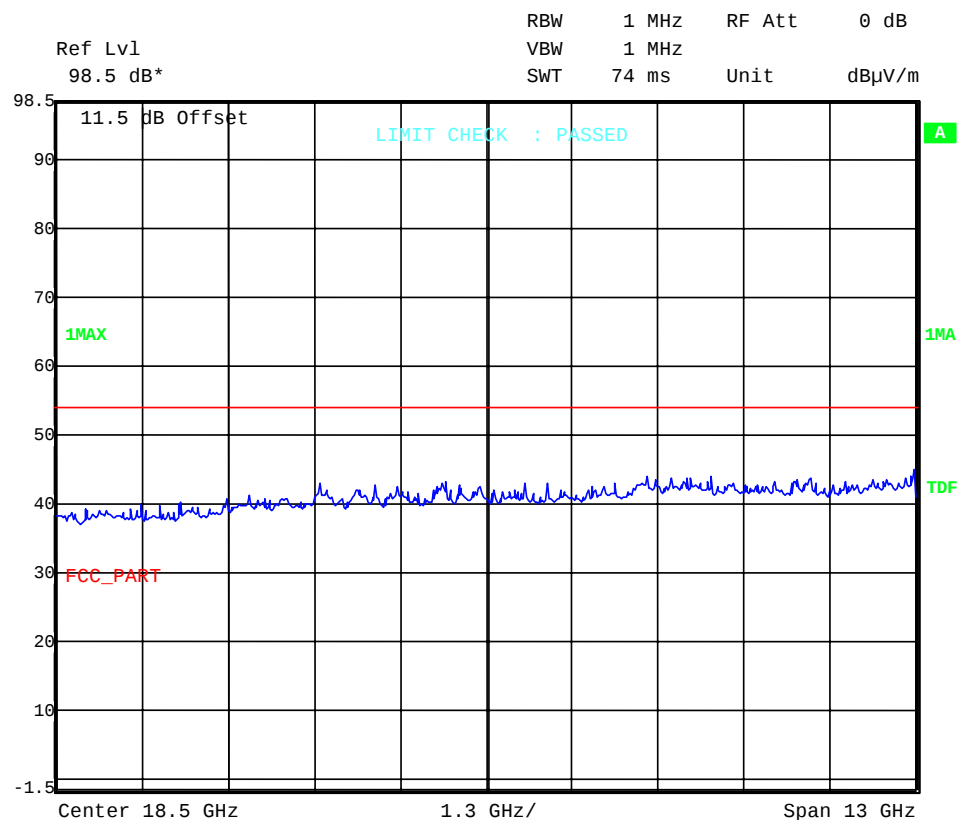


Plot 4: 0.03 - 4 GHz vertical / horizontal (middle channel)

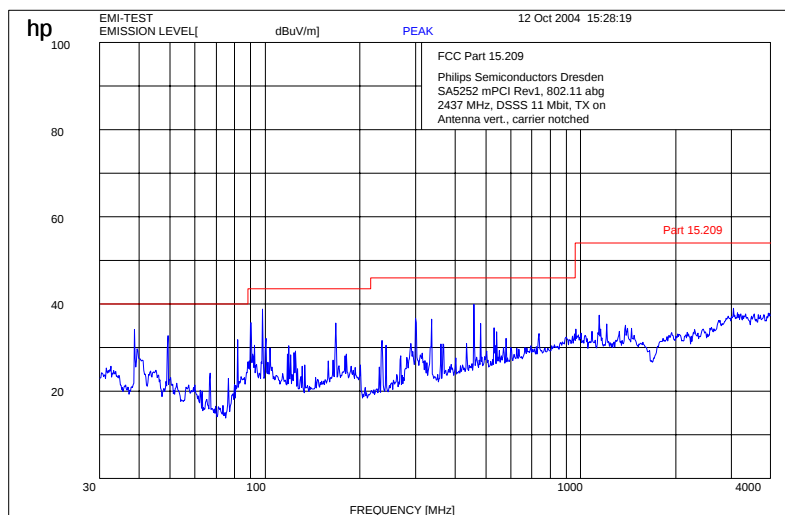


Plot 5: 4- 12 GHz (middle channel)

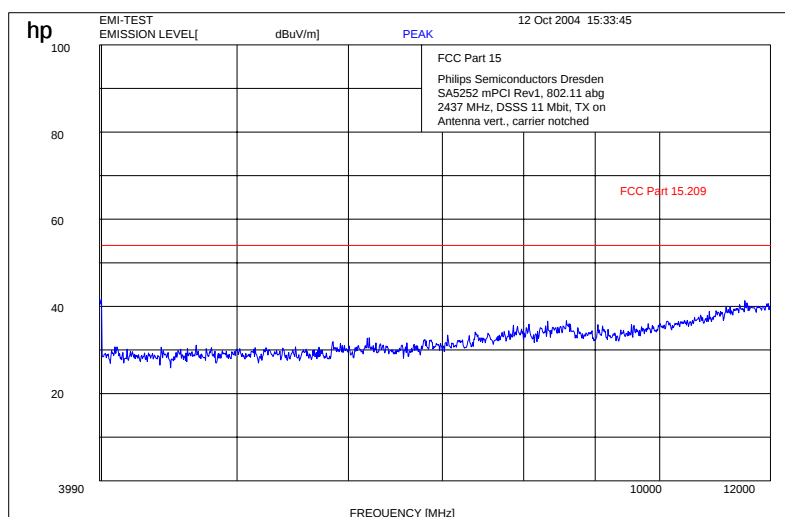

Plot 6: 0.03 - 4 GHz vertical / horizontal (highest channel)

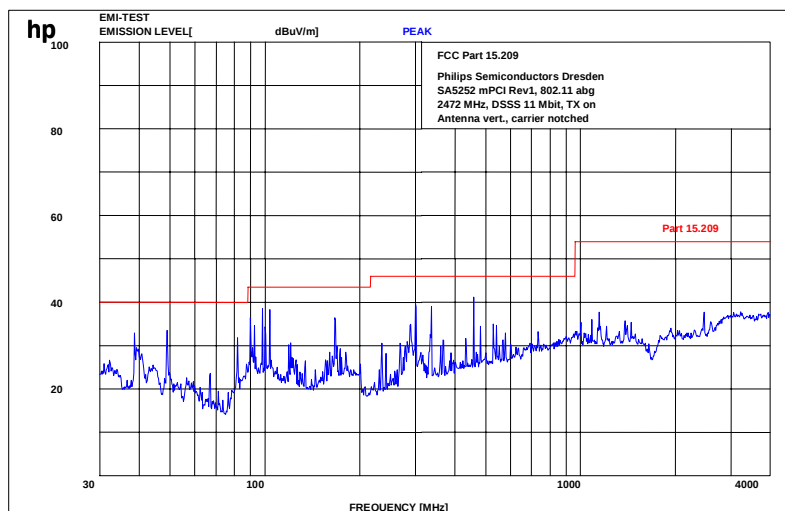

Plot 7: 4- 12 GHz (highest channel)

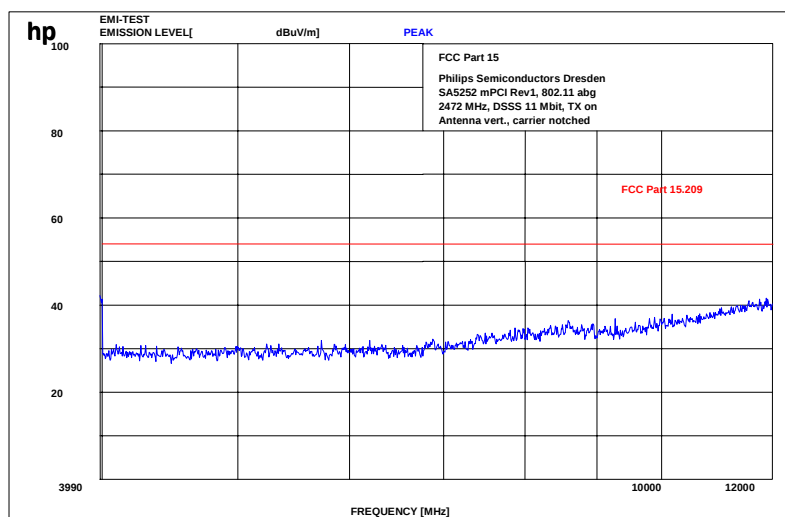

Results:

SPURIOUS EMISSIONS LEVEL §15.209								
2412 MHz			2437 MHz			2472 MHz		
F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]
All	found	peaks	were	caused	by	the	test	pc
Measurement uncertainty			±3 dB					

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

Limits: § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


Limits: § 15.209

Frequency [MHz]	Field strength [µV/m]	Measurement distance (m)
30 - 88	100 (40 dBµV/m)	3
88 - 216	150 (43.5 dBµV/m)	3
216 - 960	200 (46 dBµV/m)	3
above 960	500 (54 dBµV/m)	3

Spurious Emissions - radiated (Transmitter) §15.209


OFDM

Plot 1: 0.03 - 4 GHz vertical / horizontal (lowest channel)

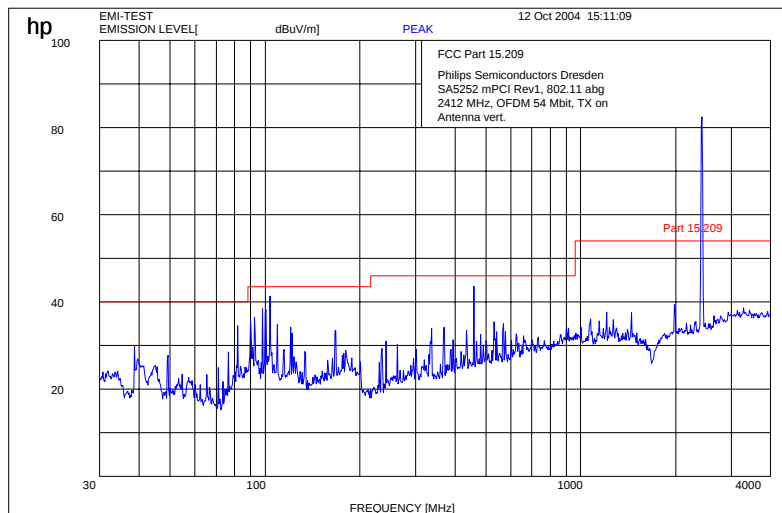

The peaks are caused by the measuring PC, not by the test sample.

Plot 2: 4- 12 GHz (lowest channel)

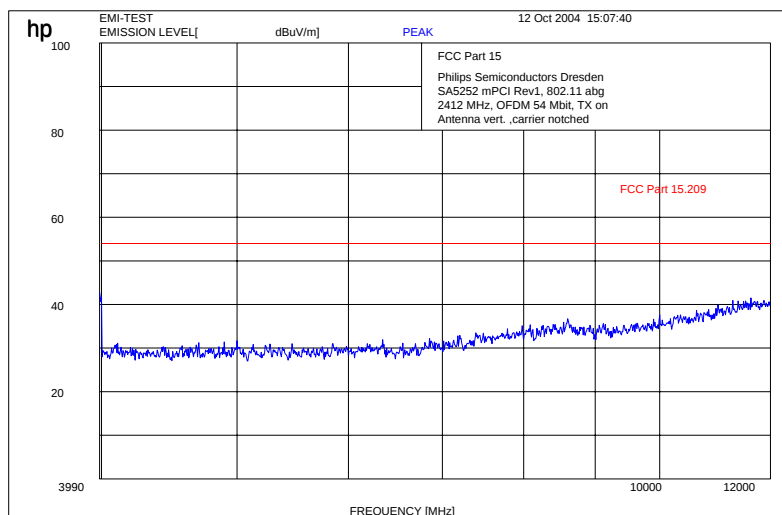

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-3770-01-01a/04

Date: 2004-12-22

Page 66 of 86

Plot 3: 12 – 25 GHz horizontal / vertical (valid for all three channels)

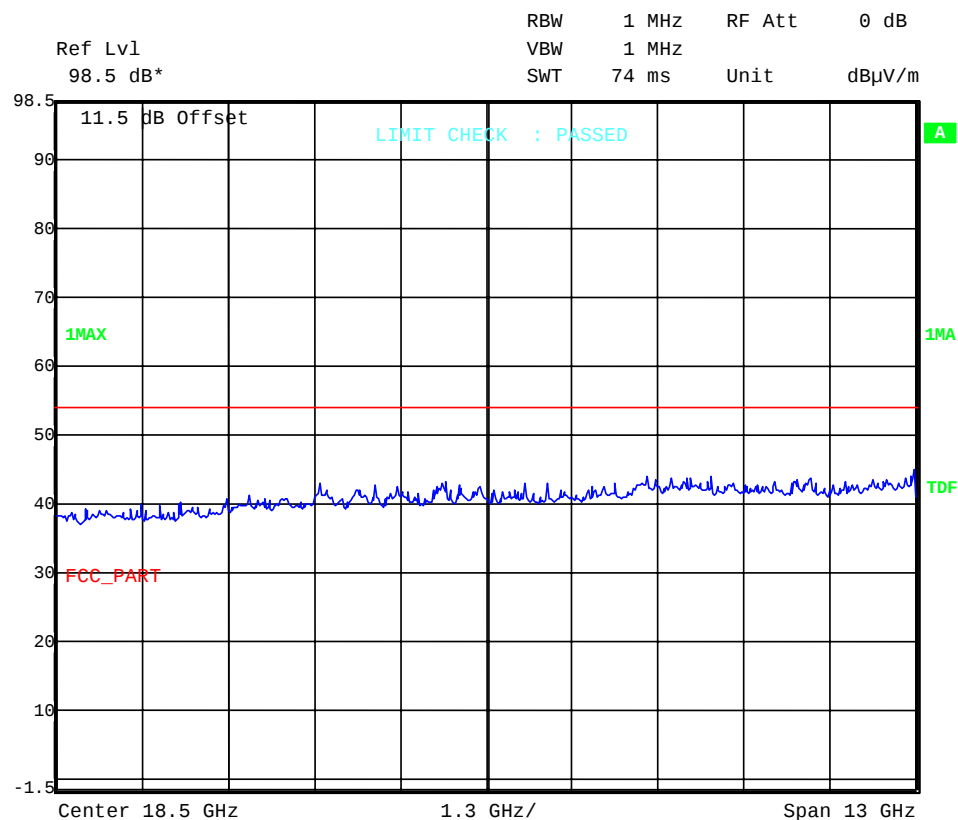

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-3770-01-01a/04


Date: 2004-12-22

Page 67 of 86


Plot 4: 0.03 - 4 GHz vertical / horizontal (middle channel)

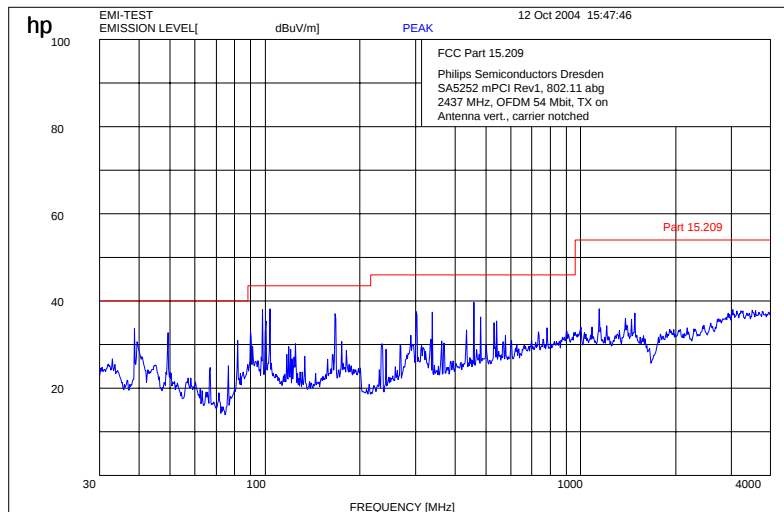


Plot 5: 4- 12 GHz (middle channel)

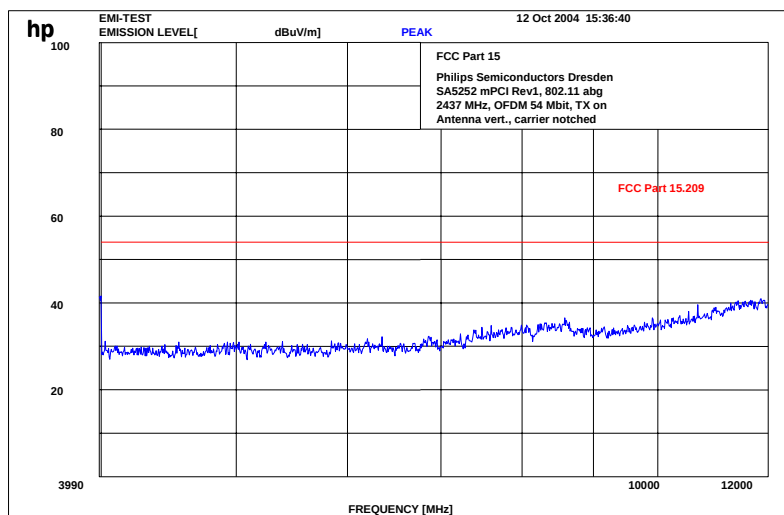

Plot 6: 0.03 - 4 GHz vertical / horizontal (highest channel)

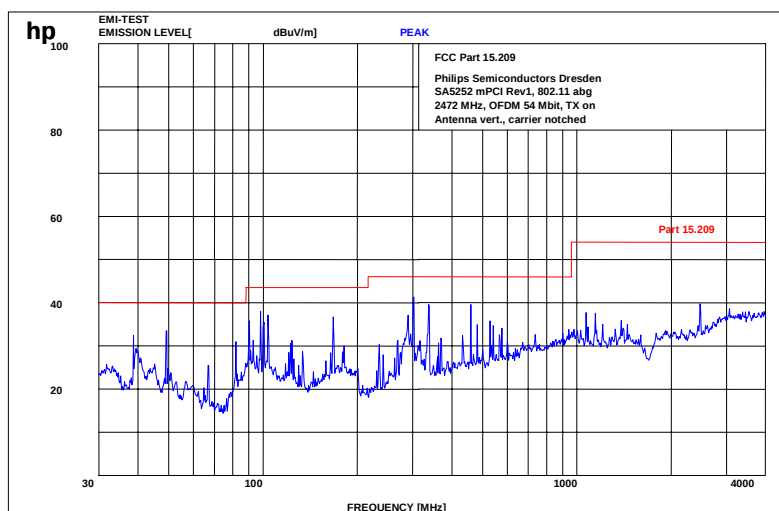


Plot 7: 4- 12 GHz (highest channel)

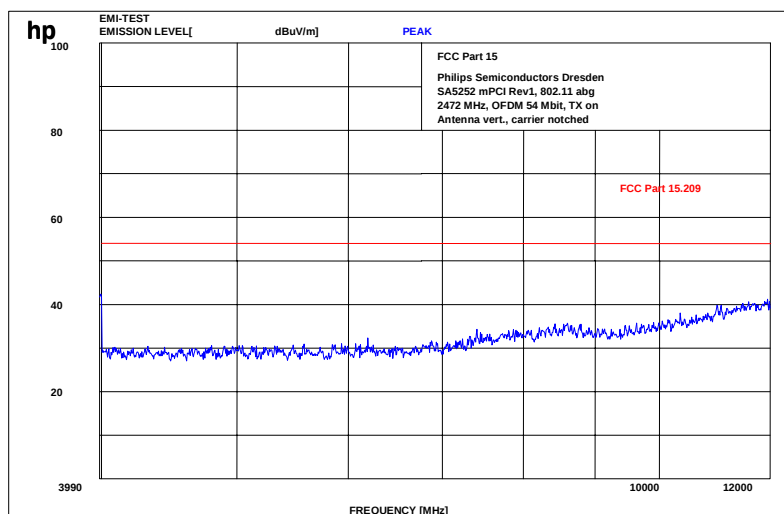

Frequency [MHz]	Field strength [$\mu\text{V/m}$]	Measurement distance (m)
30 - 88	100 (40 dB $\mu\text{V/m}$)	3
88 - 216	150 (43.5 dB $\mu\text{V/m}$)	3
216 - 960	200 (46 dB $\mu\text{V/m}$)	3
above 960	500 (54 dB $\mu\text{V/m}$)	3


3.11 Spurious Emissions - radiated (Receiver) §15.109 / 209

Plot 1: 0.03 - 4 GHz vertical / horizontal (receiver)

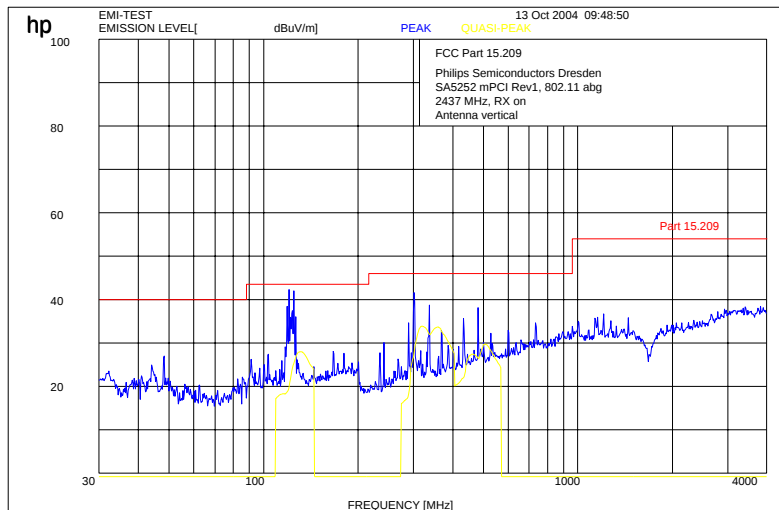


The yellow line shows the QP value of the signal.
All peaks were caused by the test-pc, not by the test sample.

Plot 2: 4- 12 GHz (receiver)

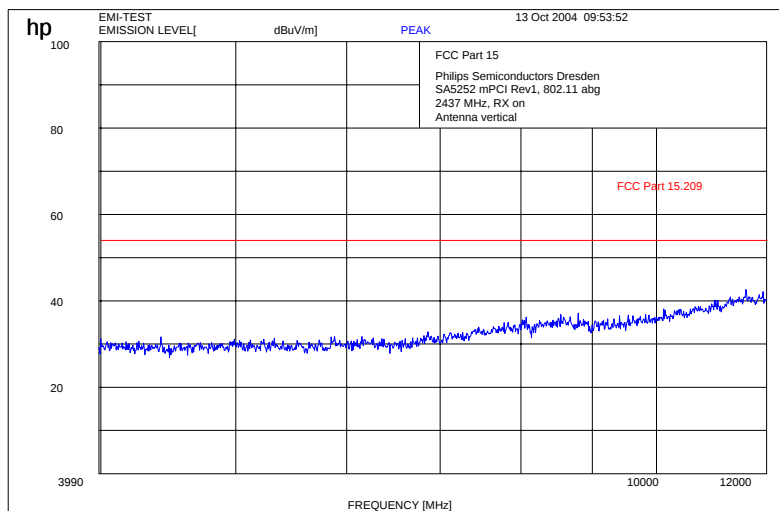

Plot 3: 12- 25 GHz (receiver)

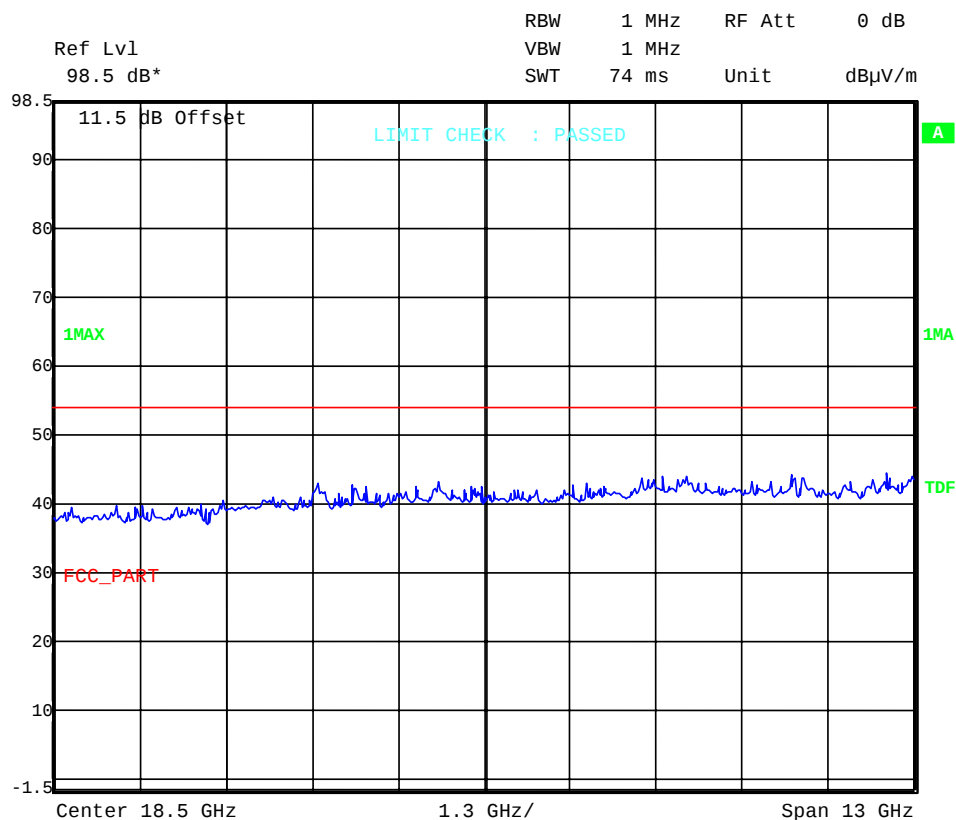

Results:

Spurious Emissions level [μV/m]								
CH 1 / 2 / 3								
f[MHz]	Detector	Level [μV/m]	f[MHz]	Detector	Level [μV/m]	f[MHz]	Detector	Level [μV/m]
no	peaks	found						
Measurement uncertainty			±3 dB					

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

see above plots

Measurement distance see table

Limits : § 15.109 / 209

Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
30 - 88	100 (40 dBμV/m)	3
88 - 216	150 (43.5 dBμV/m)	3
216 - 960	200 (46 dBμV/m)	3
above 960	500 (54 dBμV/m)	3


3.12 Spurious Emissions - radiated <30 MHz

§15.109

Measured at 3 m distance.

Values recalculated with 40 dB/decade according to FCC rules.

Plot 1:

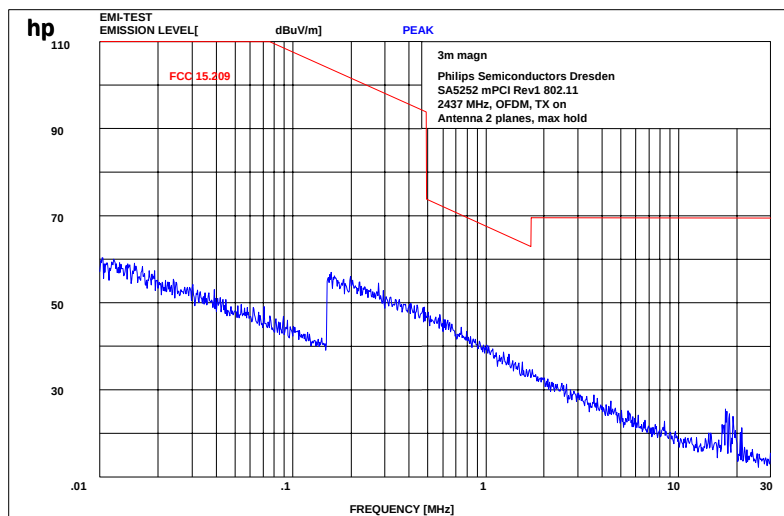


Limits:

Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dBμV/m	30
30 - 88	100 / 40 dBμV/m	3
88 - 216	150 / 43.5 dBμV/m	3
216 - 960	200 / 46 dBμV/m	3
above 960	54 dBμV/m	3

3.13 Conducted Emissions <30 MHz §15.107/207

Plot 1: CISPR 22

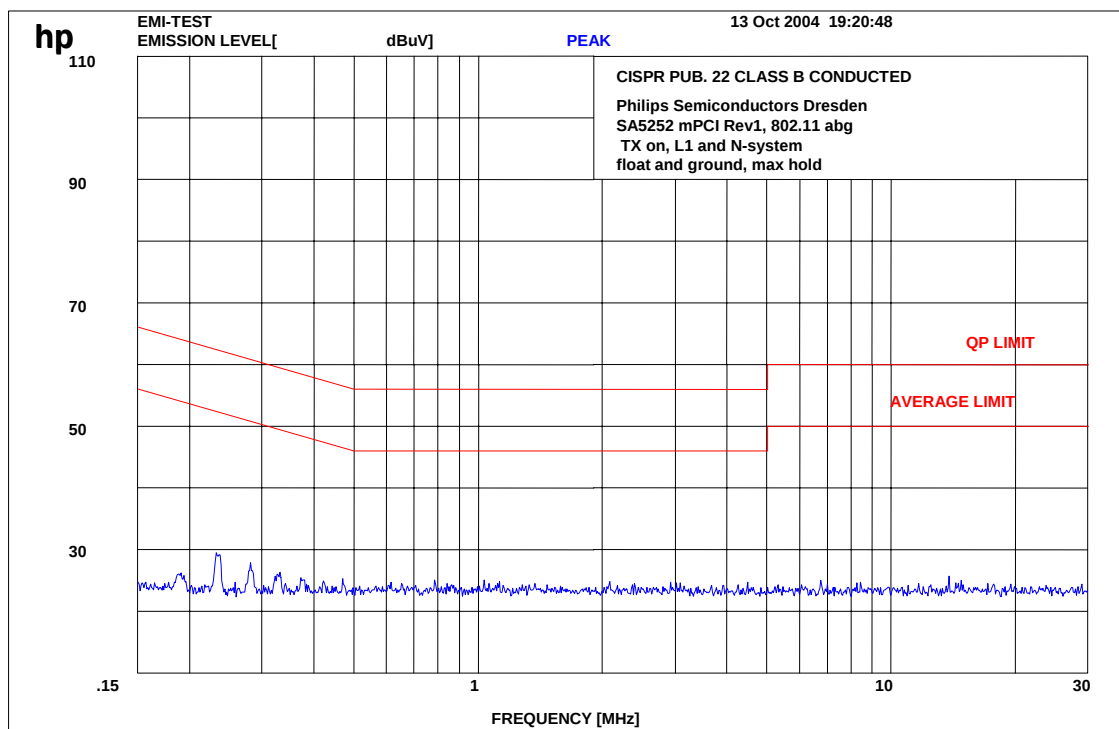

We measured in TX and RX mode, L1 and N floating and grounded, max value was hold.

Limits :

Under normal test conditions only	See plots
-----------------------------------	-----------

3.16 Used Testequipment

Anechoic chamber C:

Device	Manufacturer	Type	S/N Number	Inv. No. Cetecom
Spektrum Analyser	HP	8566B	2747A05306	300001000
Spektrum Analyser Display	HP	85662A	2816A16541	300002297
Quasi-Peak-Adapter	HP	85650A	2811A01131	300000999
Power Dupply	HP	6032A	2818A03450	300001040
Power Attenuator	Byrd	8325	1530	300001595
Bikonical Antenna	EMCO	3104	3758	300001602
Log. Period. Antenna	EMCO	3146	2130	300001603
Double Ridged Antenna	EMCO	HP 3115P	3088	300001032
Active Loop Antenna	EMCO	6502	2210	300001015
Antenna VDE/FCC		HP11965B		300002298
SRM-Drive	HP	9144A	2823e46556	300001044
Software	HP	EMI		300000983
Busisolator	Kontron			300001056
Absorberhalle	MWB		87400/02	300000996
Salzsäule	Kontron			300001055
Antenna	R&S	HMO20	832211/003	300002243
Indukt. Tast Antenna	R&S	HFH 2 Z4	881468/026	300001464
System-Rack	HP I.V.	85900	*	300000222
Spectrum Analyzer	HP	8566B	2747A05275	300000219
Quasi-Peak-Adapter	HP	85650A	2811A01135	300000216
RF-Preselector	HP	85685A	2837A00779	300000218
Rahmen Antenne	R&S	HFH2-Z2	891847-35	300001169
Leitungsteiler	HP	11850C		300000997
Breitband-Hornantenne EMI	HP	35155P		300002300
PC	HP	Vectra VL		300001688
VHF Meßantenne	Schwarzbeck	VHA 9103		300001778
Spectrum Analyzer Display	HP	85662A	2816A16497	300001690
VHF Meßantenna	Schwarzbeck	VHA 9103		300001780
Biconical Antenna	EMCO	3104 C	9909-4868	300002590

SRD Laboratory:

Device	300001207	Type	S/N Number	Inv. No. Cetecom
Spectrum Analyzer	300001208	494AP	B010241	300000863
Spectrum Analyzer	HP	71210A (70000)	2731A02347	300000321
Spectrum Analyzer Display	HP	70206A	2840A01553	300002017
Reference Frequency	HP	70310A	2736A00707	300002018
Local Oscillator	HP	70900A	2842A02221	300002019
ZF-Modul 10Hz-300 kHz	HP	70902A	2840A02145	300002020
ZF-Modul 100 kHz-3 MHz	HP	70903A	2835A01069	300002021
HF-Teil für 71210A 100Hz- 22GHz	HP	70908A		300002022
Spectrum Analyzer 2	HP	85660B	3138A07614	
Spectrum Analyzer Display 2	HP	85662A	3144A20627	

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2-3770-01-01a/04

Date: 2004-12-22

Page 75 of 86

Signal Generator DC-600 KHz	HP	8904A	2822A01213	300001157
Signal Generator DC-600 KHz	HP	8904A	2822A01214	300001158
Powersupply	HP	6038A	3122A11097	300001204
Netznachbildung	R&S	ESH3-Z5	828576/020	300001210
Amplituden Controller	R&S	SMDU-Z2	871829/051	300002309
Trenntrafo	Erfi	913501		300001205
Trenntrafo	Grundig	RT5A	9242	300001627
Relais Matrix	HP	3488A	2719A15013	300001156
Multimeter	Siemens	Multizet		300001102
Peak Power Calibrator	HP	8900B		300001084
Schallgeber	Schomandl	SG 1	10159	300001209
Schallgeber	Schomandl	SG 2	10176	300002473
Filter	FSY Microwave			300001206
Attenuatorer	Pro Nova			300002476
Klimaschrank	Heraeus Voetsch	VUK04/500		300001012
Spectrum Analyzer 3	HP	8566A	1925A00257	300001098
Spectrum Analyzer Display 3	HP	85662	1925A00860	300002306
Oszilloscope	Tektronix	2432	110261	300001165
Radiocom. Analyzer	R&S	CMTA 54	894043/010	300001175
Powersupply	HP	6038A	2848A07027	300001174
Signal Generator 0.01-1280 MHz	HP	8662A	2224A01012	300001110
Signal Generator (Funktionen)	R&S	AFGU	862490/032	300001201
Trenntrafo	Erfi	MPL	91350	300001155
Relais Matrix	R&S	PSU	893285/020	300001173
Power Meter	HP	436A	2101A12378	300001136
Powersensor	HP	8484A	2237A10156	300001140
Powersensor	HP	8482A	2237A06016	300001139
Relais Matrix	R&S	PSU	282628/004	300001214
Powersupply	Zentro		2007	300001109
Oszilloscope	Tektronix	7633		300001111
Klimaschrank	Heraeus Voetsch	VUK04/500	32926	300001500
Quasi-Peak Adapter	HP	85650A	2811A01204	300002308
Radiocom. Analyzer	R&S	CMTA 84	894199/012	300001176
Oszilloscope	HP	54510A	3022A02062	300001202
Funkmeßplatz	Schomandl	FD1000	34982	300001115
Signal Generator	R&S	SMPC	882416/019	300001162
Frequency counter	HP	5340A	2116A08138	300001104
Power Meter	HP	436A	2031U01461	300001105
Powersensor	HP	8482A		300001106
Powersensor	HP	8484A		300001107
Powersensor	HP	8485A		300001108
Powersupply	HP	6038A	2752A04866	300001161
Reflectionsmeter	R&S	NAP	879191	300001132
Signal Generator NF	R&S	SPN	880139/068	300001142
Trenntrafo	Erfi	MPL	91350	300001151
Attenuator	JFW	30 db	1350h/104	300001703
Attenuator	JFW	10 db	1350h/103	300001704
Attenuator	JFW	20 db	1350h/106	300001705
Attenuator	JFW	20 db	1350h/105	300001766
Filter	Spinner	153755		300001791

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2-3770-01-01a/04

Date: 2004-12-22


Page 76 of 86

Powersensor	HP	8484A	2237A10494	300001666
Powersupply	HP	6038A	3122A11097	300001204
Netznachbildung	R&S	ESH3-Z5	828576/020	300001210
Amplituden Controller	R&S	SMDU-Z2	871829/051	300002309
Trenntrafo	Erfi	913501		300001205
Trenntrafo	Grundig	RT5A	9242	300001627
Relais Matrix	HP	3488A	2719A15013	300001156
Multimeter	Siemens	Multizet		300001102
Peak Power Calibrator	HP	8900B		300001084
Schallgeber	Schomandl	SG 1	10159	300001209
Schallgeber	Schomandl	SG 2	10176	300002473
Filter	FSY Microwave			300001206
Attenuatorer	Pro Nova			300002476
Klimaschrank	Heraeus Voetsch	VUK04/500		300001012
Spectrum Analyzer 3	HP	8566A	1925A00257	300001098
Spectrum Analyzer Display 3	HP	85662	1925A00860	300002306
Oszilloscope	Tektronix	2432	110261	300001165
Radiocom. Analyzer	R&S	CMTA 54	894043/010	300001175
Powersupply	HP	6038A	2848A07027	300001174
Signal Generator 0.01-1280 MHz	HP	8662A	2224A01012	300001110
Signal Generator (Funktionen)	R&S	AFGU	862490/032	300001201
Trenntrafo	Erfi	MPL	91350	300001155
Relais Matrix	R&S	PSU	893285/020	300001173
Power Meter	HP	436A	2101A12378	300001136
Powersensor	HP	8484A	2237A10156	300001140
Powersensor	HP	8482A	2237A06016	300001139
Relais Matrix	R&S	PSU	282628/004	300001214
Powersupply	Zentro		2007	300001109
Oszilloscope	Tektronix	7633		300001111
Klimaschrank	Heraeus Voetsch	VUK04/500	32926	300001500
Quasi-Peak Adapter	HP	85650A	2811A01204	300002308
Radiocom. Analyzer	R&S	CMTA 84	894199/012	300001176
Oszilloscope	HP	54510A	3022A02062	300001202
Funkmeßplatz	Schomandl	FD1000	34982	300001115
Signal Generator	R&S	SMPC	882416/019	300001162
Frequency counter	HP	5340A	2116A08138	300001104
Power Meter	HP	436A	2031U01461	300001105
Powersensor	HP	8482A		300001106
Powersensor	HP	8484A		300001107
Powersensor	HP	8485A		300001108
Powersupply	HP	6038A	2752A04866	300001161
Reflectionsmeter	R&S	NAP	879191	300001132
Signal Generator NF	R&S	SPN	880139/068	300001142
Trenntrafo	Erfi	MPL	91350	300001151
Attenuator	JFW	30 db	1350h/104	300001703
Attenuator	JFW	10 db	1350h/103	300001704
Attenuator	JFW	20 db	1350h/106	300001705
Attenuator	JFW	20 db	1350h/105	300001766
Filter	Spinner	153755		300001791
Powersensor	HP	8484A	2237A10494	300001666


Powersensor	HP	8485A	2238A00849	300001668
Bandfilter	Telonic	TTF7255EE	20293-11	300001300
Bandfilter	Telonic	TTF12555EE	20292-6	300001302
Bandfilter	Telonic	TTF25055EE	20291-8	300001304
Bandfilter	Telonic	TTF50055EE	20290-7	300001305
Bandfilter	Telonic	TTF100055EE	20289-7	300001307
Bandfilter	Telonic	TTA300055EESN	20370-2	300001312
Bandstop	Telonic	TTR3753EE1	30013-1	300001314
Bandstop	Telonic	TTR723EE	20417-2	300001316
Bandstop	Telonic	TTR95-3EE	20372-4	300001318
Bandstop	Telonic	TTR1903EE	30036-4	300001320
Bandstop	Telonic	TTR3753EE	20369-5	300001321
Bandstop	Telonic	TTR750-3EE1	90177-1	300002387
Highpass	Pro Nova	HDP120-6GG	ohne	300001348
Highpass	Pro Nova	HMC500-6AA	HJ67-01?	300001350
Highpass	Narda	NHP 9000	0004	300001362
Highpass	Narda	HDP16-6GH	JV70-01	300001364
Highpass	RSD	HDP50-6GH, HDP200-6GG		300001371
Highpass	RSD	2099-02-01		300000370
Signal Generator 0.1-2060 MHz	HP	8657A	2838U00736	300001009
Radio Code Analyzer	Schlumberger	SL4922		300001038
Signal Analyzer	B&K	2033		300001047
Frequency counter	HP	5386A	2704A01243	300000998
Laufzeitelement	WR-Elektronik			300001036
Powersupply Stromversorgung	Syston	M5P 40/15A	828233	300001291
Powersupply	Heiden	1108-32	1701	300001392
Powersupply	Heiden	1108-32	1802	300001383
Powersupply	Heiden	1108-32	003202	300001187
Powersupply	Zentro	LA 2x30/5GB1	2011	300001276
Powersupply	Zentro	LA 2x30/5GB2	2012	300001275
Powersupply	Zentro	LA 30/5GA	2041,2042	300001287
Trenntrafo	Grundig	RT5A	8781	300001277
Trenntrafo	Grundig	RT5A	9242	300001263
Multimeter	Goerz Elektro	Unigor 6e P	911 355	300001625
Multimeter	Goerz Elektro	Unigor 6e P	911 391	300001281
Climatic Box	Heraeus Voetsch	VUK04/500	32679	300000299
Powersensor + Att.	HP	8482B	2703A02586	300001492
Attenuator 30 dB	HP	8498A	1801A02445	300001475
Signal Generator NF	HP		2822A01203	300001004
Attenuator	Spinner	BN 534171 D	51881	300001516
Attenuator coaxial	Bird	8325	2429	300001513
Impulsbegrenzer	R&S	ESH 3 Z2		300001460
4Port Box	R&S	4Port Box	860457/005	300001472
Signal Generator 0.1-4200 MHz	HP	8665A	2833A0011	300002299
NF-Spektrumanalyzer	B&K	2033A		300002301
Swissphone Freifeld-Messbox	Swissphone Schweiz			300002302
Trenntrafo regelbar	Grundig	RT5H	9242	300001628
Signal Generator	HP	8111A	2215G00867	300001117

4 Photographs


Test site:

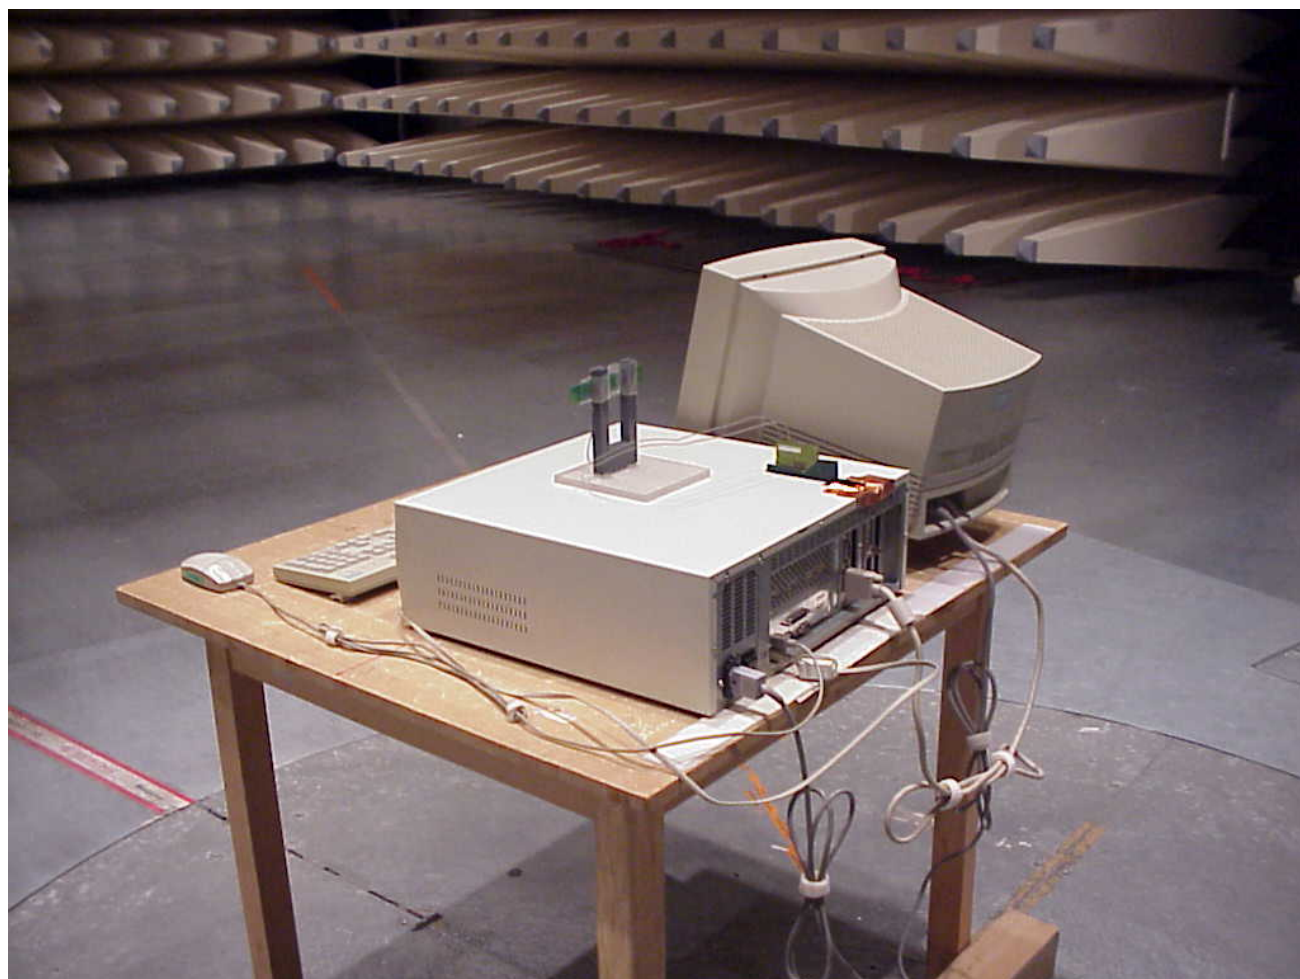

Test site:

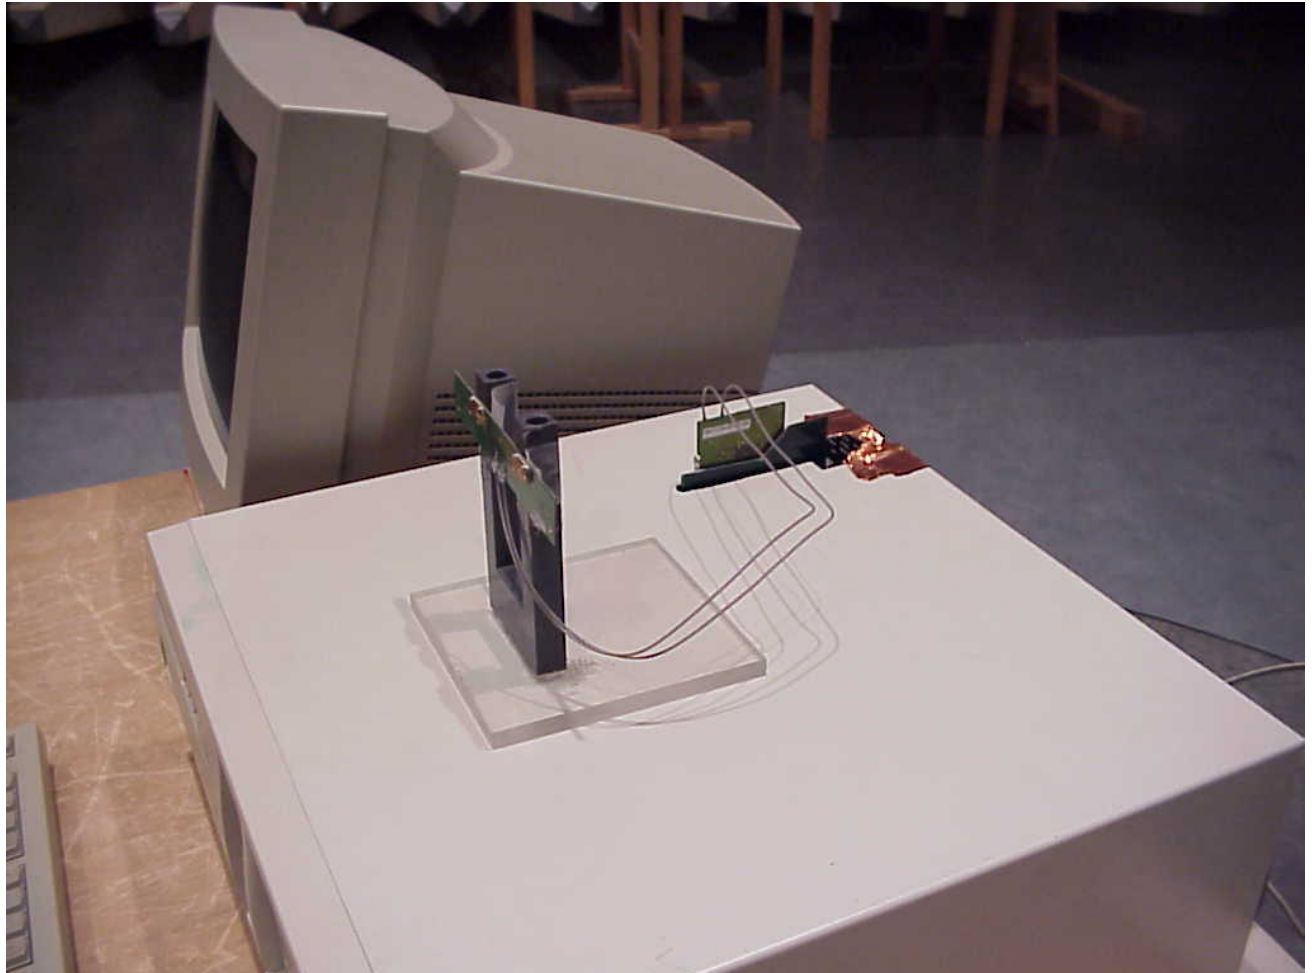

Test site:

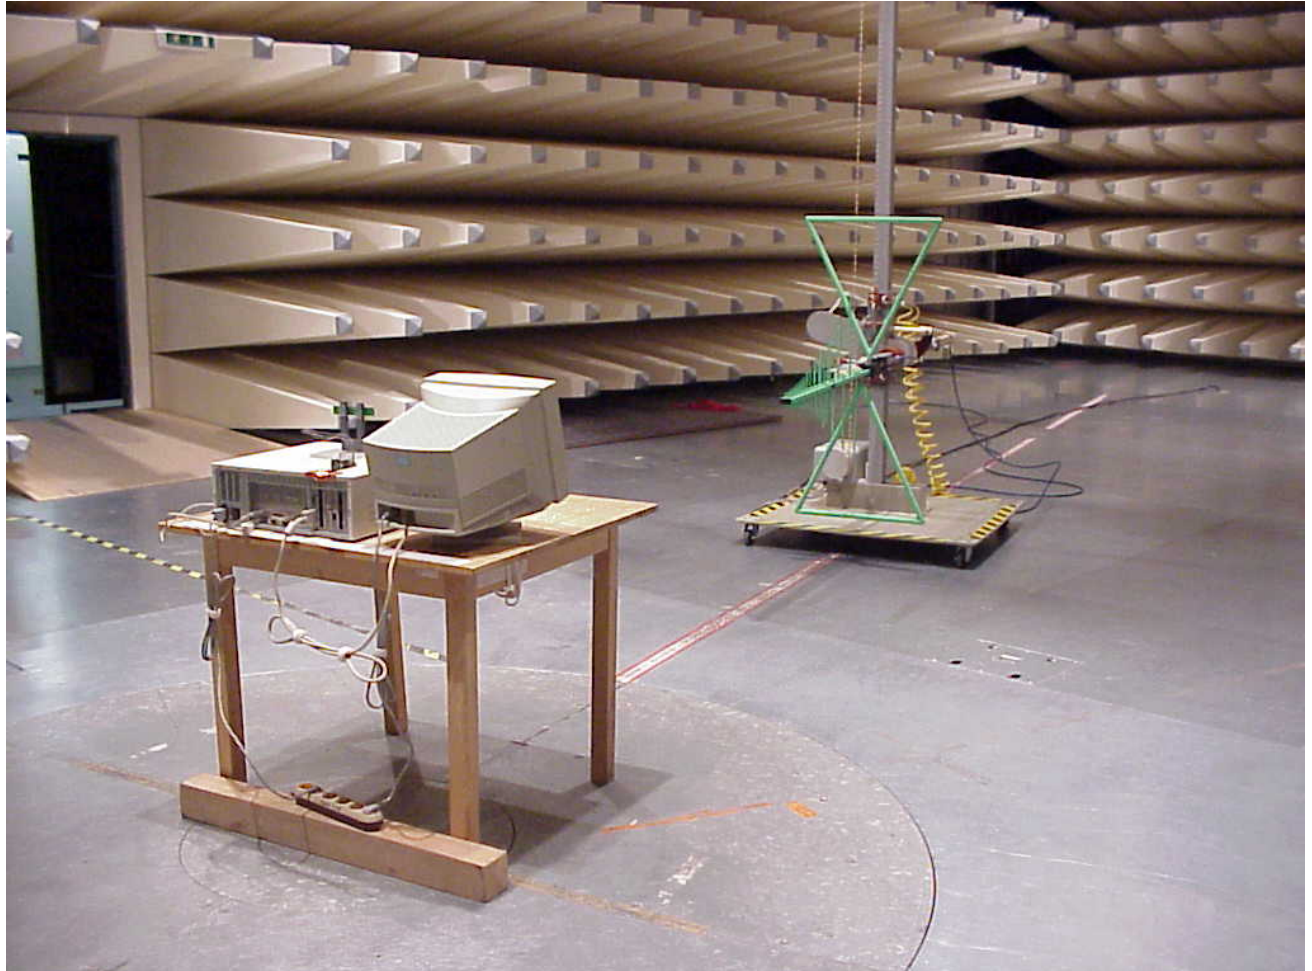

AC-conducted:



SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-3770-01-01a/04

Date: 2004-12-22

Page 82 of 86

Test sample:

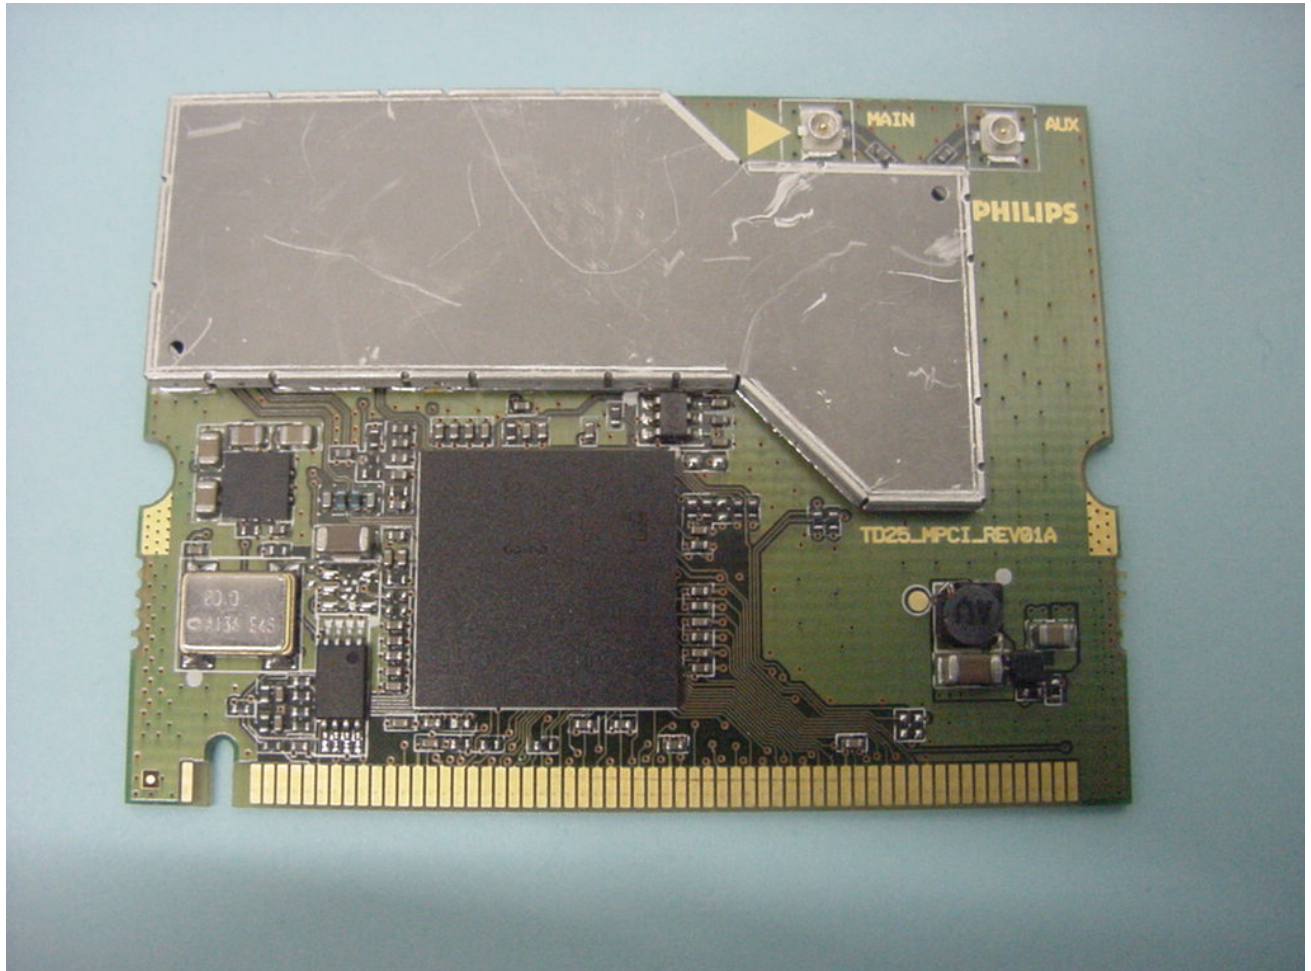



SRD-Testreport


CETECOM ICT Services GmbH Saarbruecken, Germany




Test report No.: 2-3770-01-01a/04

Date: 2004-12-22

Page 84 of 86

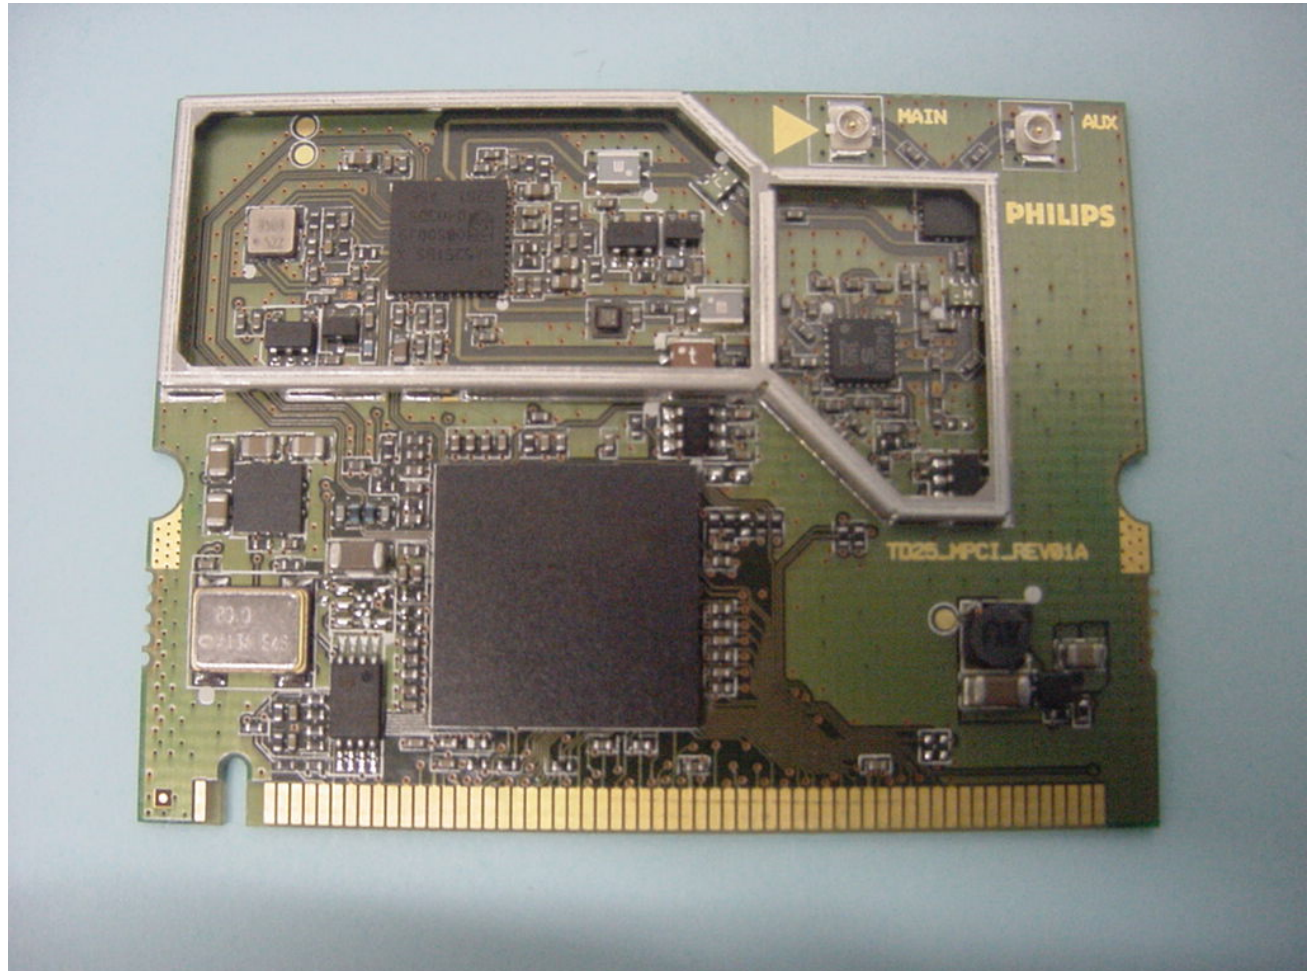

Antenna used for test.

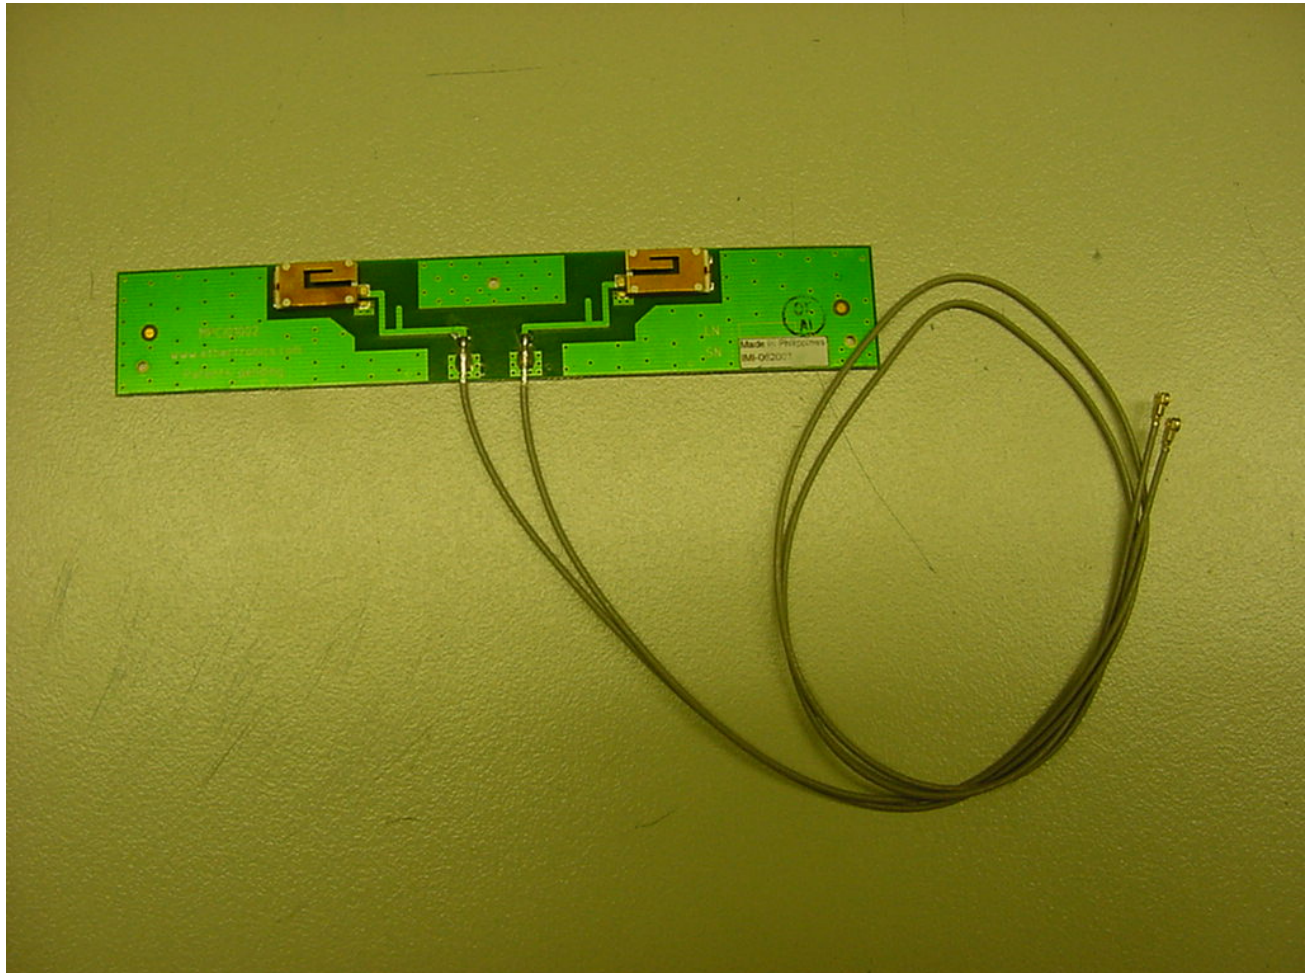

SRD-Testreport

CETECOM ICT Services GmbH Saarbruecken, Germany



Test report No.: 2-3770-01-01a/04

Date: 2004-12-22

Page 86 of 86

