

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT**

OF

CAR DVD/NAVIGATION Player

Model No.: New York 840, New York 845, CE6K04

Trade Mark: BLAUPUNKT

FCC ID: RPL-NY845

Report No.: KAD140925079E

Issue Date: October 20, 2014

Prepared for

**Blaupunkt Europe GmbH
Robert Bosch Str. 200 31139 Hildesheim, Niedersachsen Germany**

Prepared by

DONGGUAN EMTEK CO., LTD.

**No.281, Guantai Road, Nancheng District,
Dongguan, Guangdong, China
TEL: 86-769-22807078
FAX: 86-769-22807079**

VERIFICATION OF COMPLIANCE

Applicant:	Blaupunkt Europe GmbH Robert Bosch Str. 200 31139 Hildesheim, Niedersachsen Germany
Manufacturer:	HUIZHOU FORYOU GENERAL ELECTRONICS CO., LTD. Building 2, A Zone, Foryou Industrial Park, 1# North Shangxia Road, Dongjiang Hi-tech Industry Park, Huizhou, Guangdong, China
Product Description:	CAR DVD/NAVIGATION Player
Trade Mark:	BLAUPUNKT
Model Number:	New York 840, New York 845, CE6K04 (Note: The samples are the same except appearance and model no. So we prepare New York 845 for test.)
Kind of Device:	Bluetooth Ver.3.0+EDR
File Number:	KAD140925079E
Date of Test:	September 25, 2014 to October 10, 2014

We hereby certify that:

The above equipment was tested by DONGGUAN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247(2013).

The test results of this report relate only to the tested sample identified in this report.

Approved By



**Sam Lv / Q.A. Manager
DONGGUAN EMTEK CO., LTD.**

Modified Information

Version	Summary	Revision Date	Report No.
Ver.1.0	Original Report	/	KAD140925079E

Table of Contents

1.	GENERAL INFORMATION	6
1.1	PRODUCT DESCRIPTION.....	6
1.2	RELATED SUBMITTAL(S) / GRANT (S).....	6
1.3	TEST METHODOLOGY	6
1.4	SPECIAL ACCESSORIES.....	6
1.5	EQUIPMENT MODIFICATIONS	6
1.6	TEST FACILITY	7
2.	SYSTEM TEST CONFIGURATION	8
2.1	EUT CONFIGURATION.....	8
2.2	EUT EXERCISE	8
2.3	TEST PROCEDURE	8
2.4	LIMITATION	8
2.5	CONFIGURATION OF TESTED SYSTEM	12
3.	SUMMARY OF TEST RESULTS	13
4.	DESCRIPTION OF TEST MODES.....	13
5.	RADIATED EMISSION TEST	14
5.1	MEASUREMENT PROCEDURE	14
5.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	15
5.3	MEASUREMENT EQUIPMENT USED:	16
5.4	MEASUREMENT RESULT	16
5.5	RADIATED MEASUREMENT PHOTOS:.....	26
6.	CHANNEL SEPARATION TEST	27
6.1	MEASUREMENT PROCEDURE	27
6.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	27
6.3	MEASUREMENT EQUIPMENT USED:	27
6.4	MEASUREMENT RESULTS:.....	27
7.	20DB BANDWIDTH TEST	34
7.1	MEASUREMENT PROCEDURE	34
7.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	34
7.3	MEASUREMENT EQUIPMENT USED:	34
7.4	MEASUREMENT RESULTS:.....	34
8.	QUANTITY OF HOPPING CHANNEL TEST	41
8.1	MEASUREMENT PROCEDURE	41
8.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	41
8.3	MEASUREMENT EQUIPMENT USED:	41
8.4	MEASUREMENT RESULTS:.....	41

9.	TIME OF OCCUPANCY (DWELL TIME) TEST	42
9.1	TEST DESCRIPTION	42
9.2	TEST REQUIREMENTS / LIMITS.....	42
9.3	TEST PROTOCOL	42
9.4	TEST RESULT: DWELL TIME.....	43
10.	MAXIMUM PEAK OUTPUT POWER TEST	45
10.1	MEASUREMENT PROCEDURE	45
10.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	45
10.3	MEASUREMENT EQUIPMENT USED:.....	45
10.4	MEASUREMENT RESULTS:.....	46
11.	BAND EDGE TEST.....	52
11.1	MEASUREMENT PROCEDURE	52
11.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	52
11.3	MEASUREMENT EQUIPMENT USED:.....	52
11.4	MEASUREMENT RESULTS:.....	53
12.	ANTENNA APPLICATION	55
12.1	ANTENNA REQUIREMENT	55
12.2	RESULT	55
13.	RF EXPOSURE EVALUATION	56
13.1	FRIIS TRANSMISSION FORMULA: $P_D=(P_{OUT}*G)/(4*\pi*R^2)$	56
13.2	MEASUREMENT RESULT	56

1. GENERAL INFORMATION

1.1 Product Description

The Blaupunkt Europe GmbH, Model: New York 845 (referred to as the EUT in this report) The EUT is an short range, lower power transmitter. It is designed by way of utilizing the following modulation achieves the system operating.

A major technical descriptions of EUT is described as following:

- A). Operation Frequency: 2402-2480MHz
- B). Modulation: GFSK, $\pi/4$ -DQPSK, 8DPSK
- C). Number of Channel: 79
- D). Channel space: 1MHz
- E). Rated RF Output Power: 1.93dBm(1.560 mW)
- F). Antenna Type: Internal PCB antenna
- G). Antenna GAIN: 0dBi
- H). Power Supply: DC 12.0-14.4V

The basic data rate of 1Mbps uses GFSK modulation and the enhanced data rate uses PSK modulation. For the enhanced data rate of 3Mbps 8DPSK modulation and of 2Mbps $\pi/4$ -DQPSK modulation is used.

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: RPL-NY845 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules and FCC Public Notice DA 00-705.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2009). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

1.6 Test Facility

Site Description

EMC Lab. :
Accredited by FCC, June 18, 2014
The Certificate Number is 247565

Accredited by Industry Canada, February 19, 2014
The Certificate Number is 9444A.

Name of Firm : DONGGUAN EMTEK CO., LTD.
Site Location : No.281, Guantai Road, Nancheng District,
Dongguan, Guangdong, China

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. the Tx frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-2009. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2009.

2.4 Limitation

(1) Channel Separation test

FCC Part 15, Subpart C Section 15.247(a)(1). Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 Bandwidth of the hopping channel, whichever is greater.

Frequency Range (MHz)	Limit(kHz)
902-928	>25kHz
2400-2483.5	>25kHz
5725-5850	>25kHz

(2) 20dB Bandwidth

Frequency Range(MHz)	Quantity of Hopping Channel	Limit(kHz)			
		50	25	15	75
902-928		<250	>250	NA	NA
2400-2483.5		NA	NA	>1000	<1000

(3) Quantity of Hopping Channel

FCC Part 15, Subpart C Section 15.247

Frequency Range (MHz)	Limit(Quantity of Hopping Channel)			
	20dB bandwidth <250kHz	20dB bandwidth >250kHz	20dB bandwidth <1MHz	20dB bandwidth >1MHz
902-928	50	25	NA	NA
2400-2483.5	NA	NA	15	15
5725-5850	NA	NA	75	NA

(4) Time of Occupancy(Dwell Time)

FCC Part 15, Subpart C Section 15.247

Frequency Range (MHz)	20dB bandwidth <250kHz(50Channel)	LIMIT(rms)	
		20dB bandwidth >250kHz(25Channel)	20dB bandwidth <1MHz(75Channel)
902-928	400(20S)	400(10S)	NA
2400-2483.5	NA	NA	400(30S)
5725-5850	NA	NA	400(30S)

Note: The “()” is all channel's average time of occupancy.

(5) Maximum Peak Output Power

FCC Part 15, Subpart C Section 15.247

Frequency Range (MHz)	Quantity of Hopping Channel	LIMIT(W)			
		50	25	15	75
902-928		1(30dBm)	0.125(21dBm)	NA	NA
2400-2483.5		NA	NA	0.125(21dBm)	1(30dBm)
5725-5850		NA	NA	NA	1(30dBm)

(6) Band edge

FCC Part15, Subpart C Section 15.247, In any 100kHz bandwidth outside the frequency band in with the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

Operating Frequency Range(MHz)	Spurious emission frequency	Limit Peak power ration to emission(dBc)	Emission level(dBuV/m)
902-928	<902	>20	NA
	>928	>20	NA
	960-1240	NA	54
2400-2483.5	<2400	>20	NA
	>2483.5-2500	NA	54
5725-5850	<5350-5460	NA	54
	<5725	>20	NA
	>5850	>20	NA

(7) Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

(8) Radiated Emission

FCC Part 15, Subpart C Section 15.209 limit of radiated emission for frequency below 1000GHz. The emissions from an intentional radiator shall not exceed the field strength level specified in the following table:

Frequency (MHz)	Field strength $\mu\text{V/m}$	Distance(m)	Field strength at 3m dB $\mu\text{V/m}$
0.009-0.490	2400/F(kHz)	300	/
0.490-1.705	24000/F(kHz)	30	/
1.705-30.0	30	30	/
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

Remark 1. Emission level in dB $\mu\text{V/m}$ =20 log ($\mu\text{V/m}$)
: 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

FCC Part 15, Section 15.35(b) limit of radiated emission for frequency above 1000MHz

Frequency(MHz)	Class A(dB $\mu\text{V/m}$)(at 3m)		Class B(dB $\mu\text{V/m}$)(at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80.0	60.0	74.0	54.0

FCC Part 15, Subpart C Section 15.249. The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Frequency(MHz)	Filed Strength of Fundamental(at 3m)		Filed Strength of Harmonics(at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
902-928	114	94	74.0	54.0
2400-2483.5	114	94	74.0	54.0
5725-5875	114	94	74.0	54.0
24000-24250	128	108	88.0	68.0

2.5 Configuration of Tested System

Fig. 2-1 Configuration of Tested System



Table 2-1 Equipment Used in Tested System

Item	Equipment	Trade Mark	Model No.	FCC ID	Note
1.	CAR DVD/NAVIGATION Player	BLAUPUNKT	New York 845	RPL-NY845	EUT

Note:

- (1) Unless otherwise denoted as EUT in 『Remark』 column , device(s) used in tested system is a support equipment.

3. Summary of Test Results

FCC Rules	Description Of Test	Result
§15.247(a)(1)	Channel Separation test	Compliant
§15.247(a)(1)	20dB Bandwidth	Compliant
§15.247(a)(1)(iii)	Quantity of Hopping Channel	Compliant
§15.247(a)(1)(iii)	Time of Occupancy(Dwell Time)	Compliant
§15.247(b)	Max Peak output Power test	Compliant
§15.247(d)	Band edge test	Compliant
§15.207	AC Power Conducted Emission	N/A
§15.247(d),§15.209	Radiated Emission	Compliant
§15.203	Antenna Requirement	Compliant
§1.1310	RF Exposure	Compliant

Remark: The EUT is supplied by Battery, there is no need for AC Power Conducted Emission test to be performed on this product.

4. Description of test modes

The EUT has been tested under TX operating condition.

This EUT is a FHSS system, were conducted to determine the final configuration from all possible combinations. We use software control the EUT, Let EUT hopping on and transmit with highest power, All the modes GFSK, $\pi/4$ -DQPSK, 8DPSK have been tested. 79 Channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for test.

Channel	Frequency(MHz)
1	2402
40	2441
79	2480

5. Radiated Emission Test

5.1 Measurement Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured were complete.
5. For range 9KHz~30MHz, The measured value is really too low to be recorded.

When spectrum scanned from 30MHz to 1GHz setting resolution bandwidth 120KHz and video bandwidth 300KHz:

EMI Test Receiver	Setting
Attenuation	Auto
RB	120KHz
VB	300KHz
Detector	QP
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz:


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	10Hz
Detector	Peak
Trace	Max hold

5.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

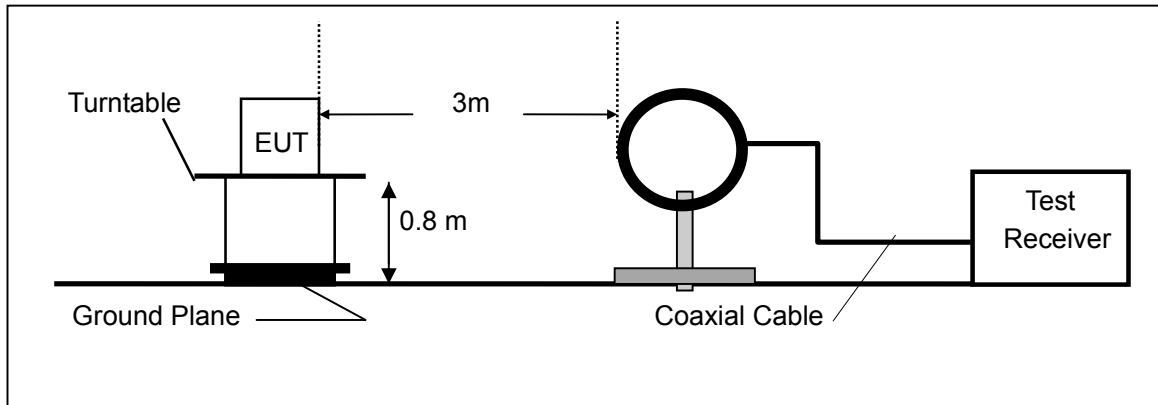

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

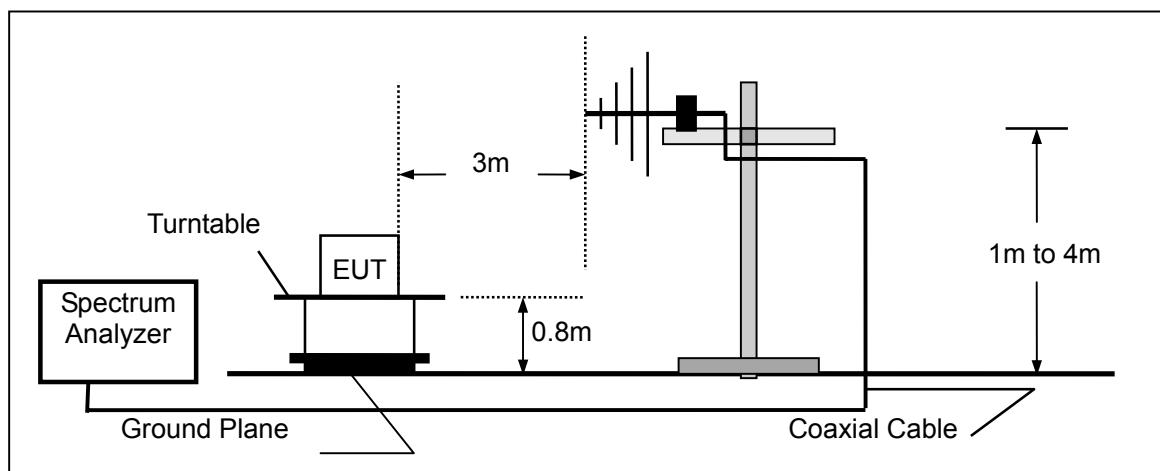

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

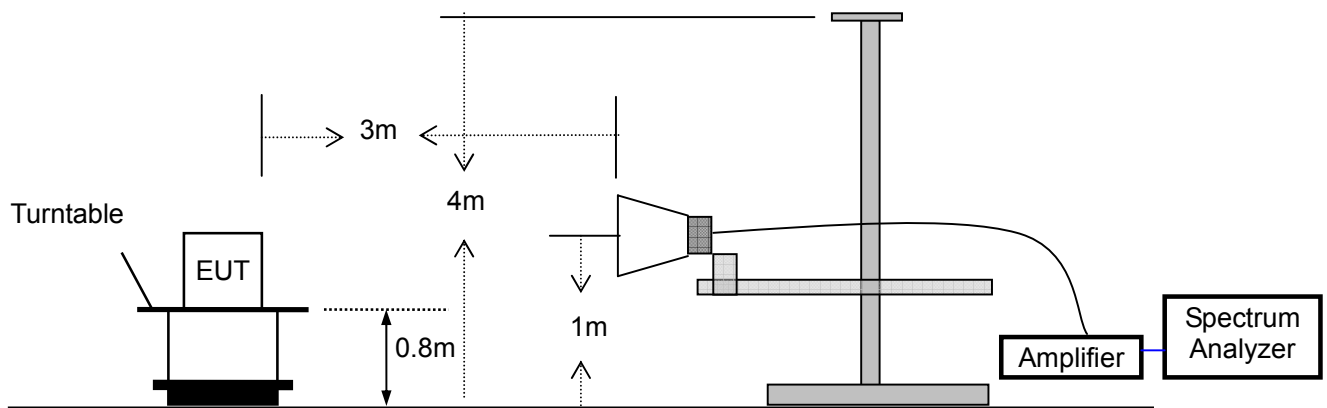


5.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	May 16, 2014	May 15, 2015
Spectrum Analyzer	HP	E4407B	839840481	May 16, 2014	May 15, 2015
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	May 16, 2014	May 15, 2015
Pre-Amplifier	HP	8447D	2944A07999	May 16, 2014	May 15, 2015
Bilog Antenna	Schwarzbeck	VULB9163	142	May 19, 2014	May 18, 2015
Loop Antenna	ARA	PLA-1030/B	1029	May 19, 2014	May 18, 2015
Horn Antenna	Electro-Metrics	EM-6961	103314	May 19, 2014	May 18, 2015
Horn Antenna	Schwarzbeck	BBHA 9120	D143	May 19, 2014	May 18, 2015

5.4 Measurement Result

Pass.

Please refer to the following data.

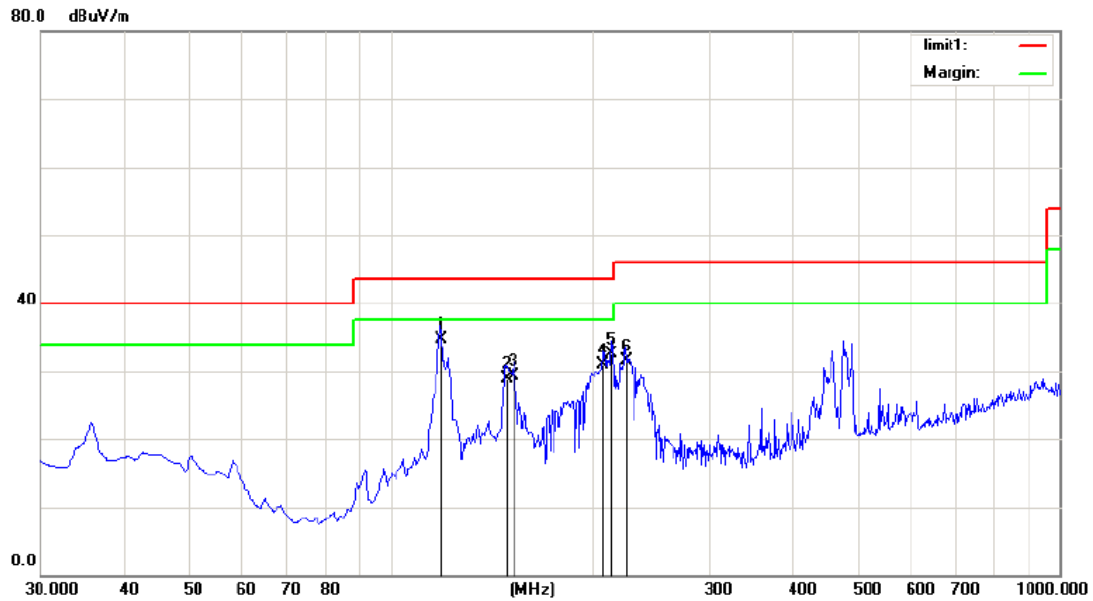


Site site #1 Polarization: **Horizontal** Temperature: 26
Limit: (RE)FCC PART 15 class C 3m Power: DC 12V Humidity: 55 %
Mode:TX 2402
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	119.2400	51.62	-17.01	34.61	43.50	-8.89	QP	0	
2		149.3100	46.64	-17.68	28.96	43.50	-14.54	QP	0	
3		153.1900	47.32	-18.03	29.29	43.50	-14.21	QP	0	
4		208.5800	48.05	-17.14	30.91	43.50	-12.59	QP	0	
5		214.3000	49.01	-16.56	32.45	43.50	-11.05	QP	0	
6		224.9700	47.61	-16.20	31.41	46.00	-14.59	QP	0	

*:Maximum data x:Over limit l:over margin


Operator: QIU

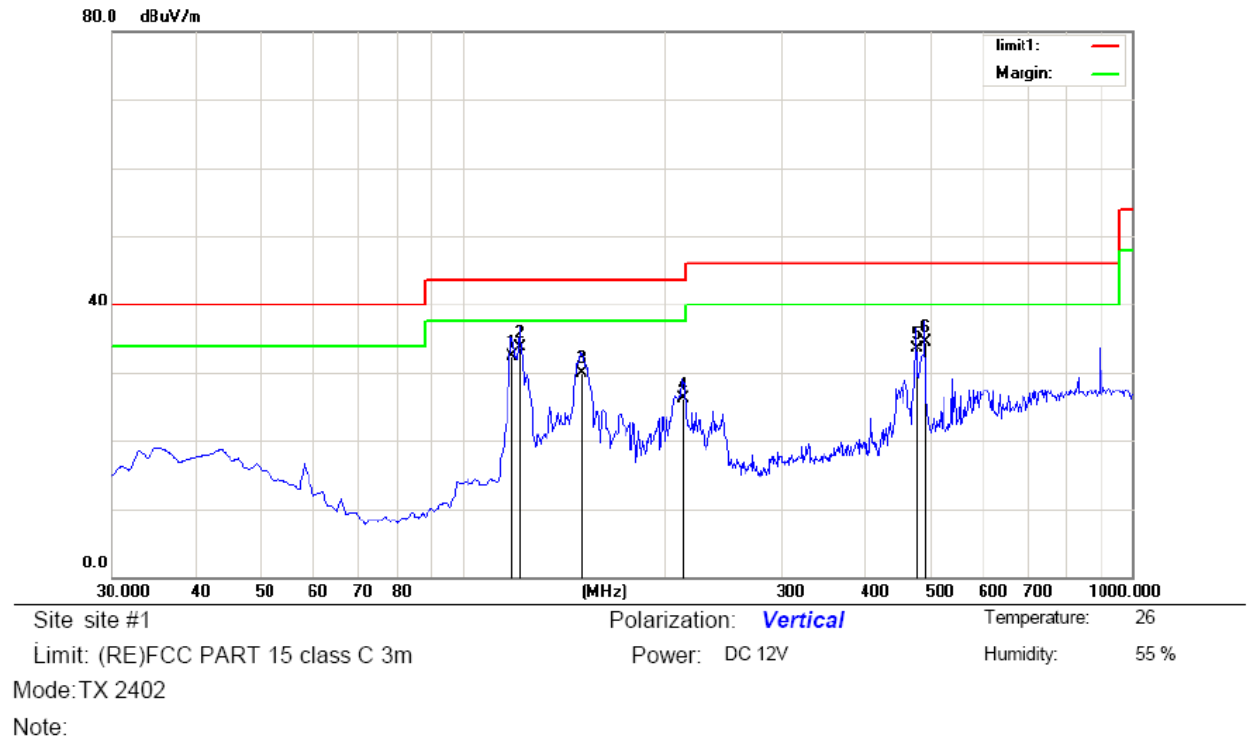

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		118.2700	49.37	-17.07	32.30	43.50	-11.20	QP	0	
2	*	122.1500	50.39	-16.72	33.67	43.50	-9.83	QP	0	
3		150.2800	47.60	-17.77	29.83	43.50	-13.67	QP	0	
4		213.3300	42.83	-16.67	26.16	43.50	-17.34	QP	0	
5		477.1700	44.07	-10.61	33.46	46.00	-12.54	QP	0	
6		491.7200	44.96	-10.43	34.53	46.00	-11.47	QP	0	

*:Maximum data x:Over limit !:over margin

Operator: QIU

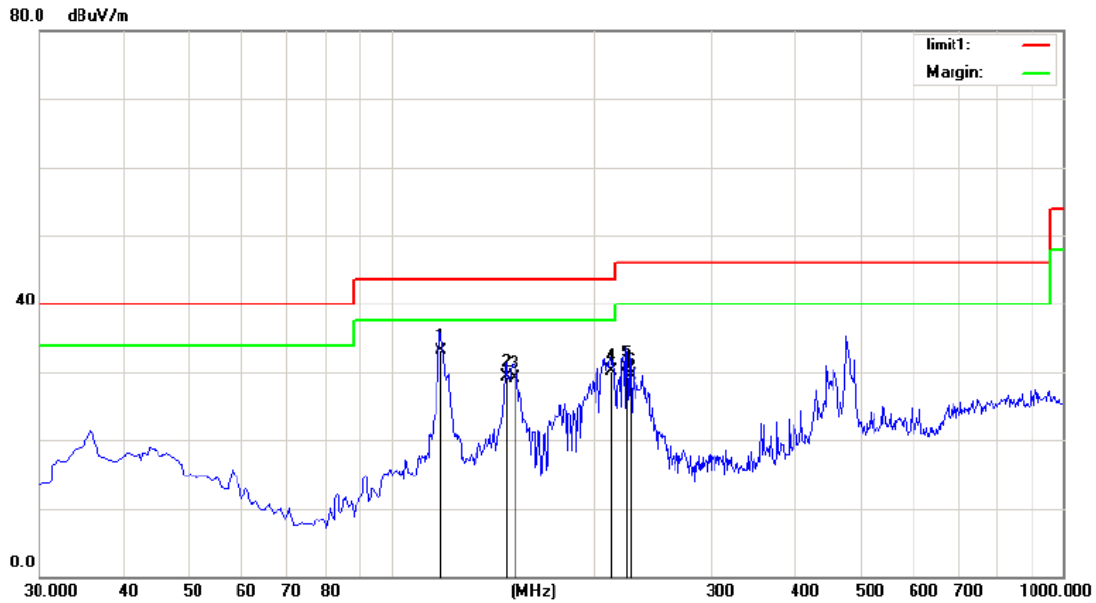


Site site #1 Polarization: **Horizontal** Temperature: 26
Limit: (RE)FCC PART 15 class C 3m Power: DC 12V Humidity: 55 %
Mode:TX 2441
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	118.2700	50.09	-17.07	33.02	43.50	-10.48	QP	0	
2		148.3400	47.03	-17.63	29.40	43.50	-14.10	QP	0	
3		152.2200	47.10	-17.94	29.16	43.50	-14.34	QP	0	
4		212.3600	46.92	-16.77	30.15	43.50	-13.35	QP	0	
5		224.0000	46.81	-16.18	30.63	46.00	-15.37	QP	0	
6		226.9100	45.70	-16.10	29.60	46.00	-16.40	QP	0	

*:Maximum data x:Over limit !:over margin

Operator: QIU

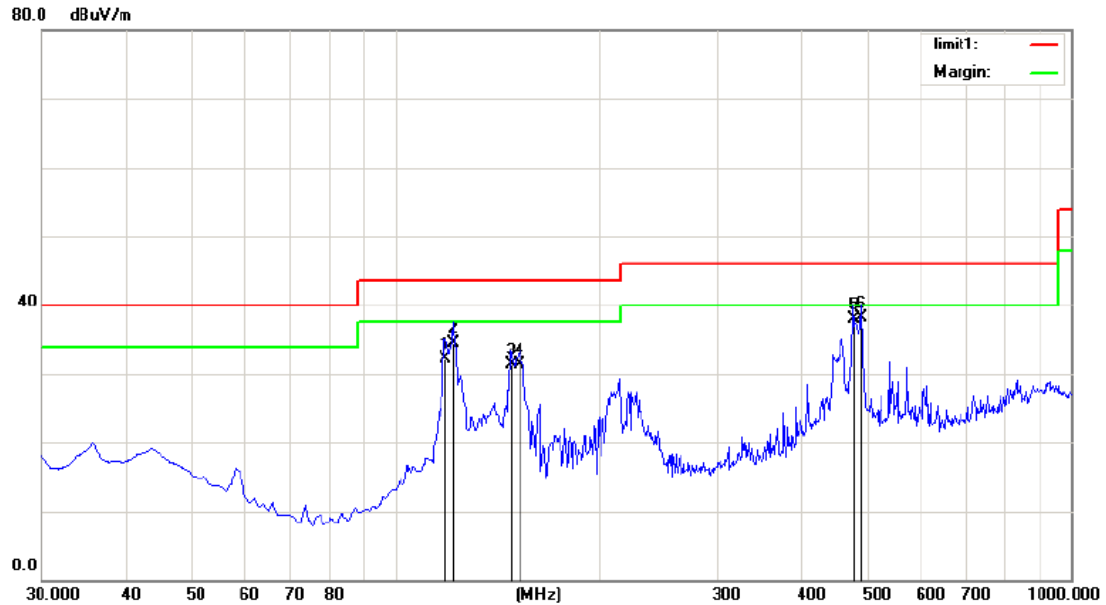


Site site #1 Polarization: **Vertical** Temperature: 26
Limit: (RE)FCC PART 15 class C 3m Power: DC 12V Humidity: 55 %
Mode:TX 2441
Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		118.2700	49.26	-17.07	32.19	43.50	-11.31	QP	0	
2		122.1500	51.20	-16.72	34.48	43.50	-9.02	QP	0	
3		148.3400	48.88	-17.63	31.25	43.50	-12.25	QP	0	
4		153.1900	49.28	-18.03	31.25	43.50	-12.25	QP	0	
5		477.1700	48.48	-10.61	37.87	46.00	-8.13	QP	0	
6	*	489.7800	48.62	-10.45	38.17	46.00	-7.83	QP	0	

*:Maximum data x:Over limit l:over margin

Operator: QIU

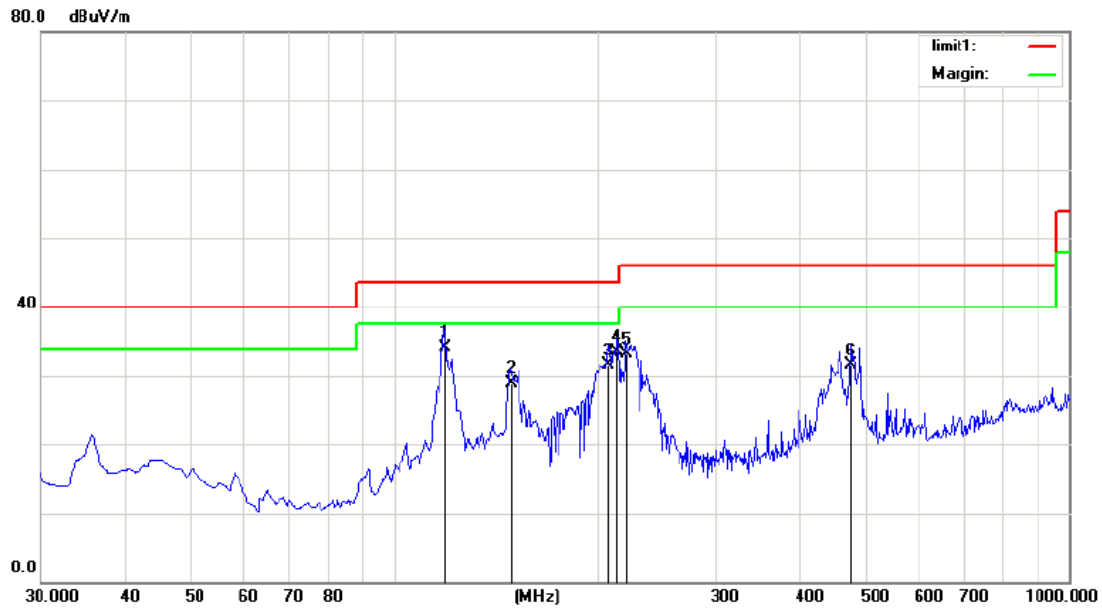


Site site #1 Polarization: **Horizontal** Temperature: 26
Limit: (RE)FCC PART 15 class C 3m Power: DC 12V Humidity: 55 %
Mode:TX 2480
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	*	119.2400	51.12	-17.01	34.11	43.50	-9.39	QP	0	
2		149.3100	46.64	-17.68	28.96	43.50	-14.54	QP	0	
3		208.5800	48.55	-17.14	31.41	43.50	-12.09	QP	0	
4		214.3000	50.01	-16.56	33.45	43.50	-10.05	QP	0	
5		221.0900	49.20	-16.15	33.05	46.00	-12.95	QP	0	
6		476.2000	42.18	-10.63	31.55	46.00	-14.45	QP	0	

*:Maximum data x:Over limit !:over margin

Operator: QIU

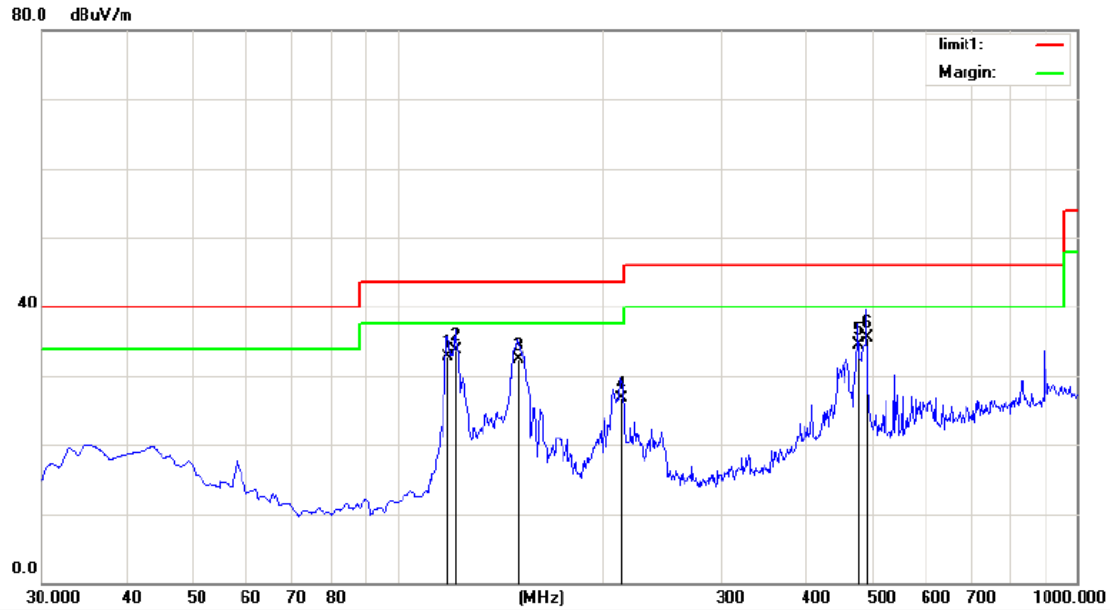

Site site #1 Polarization: **Vertical** Temperature: 26
Limit: (RE)FCC PART 15 class C 3m Power: DC 12V Humidity: 55 %
Mode:TX 2480
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		118.2700	49.87	-17.07	32.80	43.50	-10.70	QP	0	
2	*	122.1500	50.39	-16.72	33.67	43.50	-9.83	QP	0	
3		150.2800	50.10	-17.77	32.33	43.50	-11.17	QP	0	
4		213.3300	43.33	-16.67	26.66	43.50	-16.84	QP	0	
5		477.1700	45.07	-10.61	34.46	46.00	-11.54	QP	0	
6		491.7200	45.96	-10.43	35.53	46.00	-10.47	QP	0	

*:Maximum data x:Over limit !:over margin

Operator: QIU

Operation Mode: TX Mode (CH1: 2402MHz) Test Date : September 26, 2014
Frequency Range: 1-25GHz Temperature : 25 °C
Test Result: PASS Humidity : 50 %
Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4804	V	65.33	46.13	74	54	-8.67	-7.87
7206	V	64.20	45.72	74	54	-9.8	-8.28
9608	V	63.49	44.23	74	54	-10.51	-9.77
12010	V	62.72	43.39	74	54	-11.28	-10.61
14412	V	61.07	42.18	74	54	-12.93	-11.82
16814	V	60.33	41.08	74	54	-13.67	-12.92
4804	H	64.59	45.22	74	54	-9.41	-8.78
7206	H	63.82	44.95	74	54	-10.18	-9.05
9608	H	62.19	43.16	74	54	-11.81	-10.84
12010	H	61.07	42.26	74	54	-12.93	-11.74
14412	H	60.28	41.19	74	54	-13.72	-12.81
16814	H	59.82	40.27	74	54	-14.18	-13.73

Other harmonics emissions are lower than 20dB below the allowable limit.

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
 - (3) The average measurement was not performed when the peak measured data under the limit of average detection.
 - (4) The results of worst cased was recorded.

Operation Mode: TX Mode (CH40: 2441MHz) Test Date : September 26, 2014
Frequency Range: 1-25GHz Temperature : 25 °C
Test Result: PASS Humidity : 50 %
Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4882	V	66.22	45.11	74	54	-7.78	-8.89
7323	V	65.13	44.28	74	54	-8.87	-9.72
9764	V	64.05	43.95	74	54	-9.95	-10.05
12205	V	63.59	42.19	74	54	-10.41	-11.81
14646	V	62.72	41.04	74	54	-11.28	-12.96
17087	V	61.16	40.95	74	54	-12.84	-13.05
4882	H	65.95	46.36	74	54	-8.05	-7.64
7323	H	64.23	45.28	74	54	-9.77	-8.72
9764	H	63.71	44.15	74	54	-10.29	-9.85
12205	H	62.04	43.95	74	54	-11.96	-10.05
14646	H	61.29	42.01	74	54	-12.71	-11.99
17087	H	60.83	41.72	74	54	-13.17	-12.28

Other harmonics emissions are lower than 20dB below the allowable limit.

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
 - (3) The average measurement was not performed when the peak measured data under the limit of average detection.
 - (4) The results of worst cased was recorded.



Operation Mode: TX Mode (CH79: 2480MHz) Test Date : September 26, 2014
Frequency Range: 1-25GHz Temperature : 25 °C
Test Result: PASS Humidity : 50 %
Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4960	V	66.22	46.25	74	54	-7.78	-7.75
7440	V	65.89	45.72	74	54	-8.11	-8.28
9920	V	64.13	44.13	74	54	-9.87	-9.87
12400	V	63.59	43.29	74	54	-10.41	-10.71
14880	V	62.72	42.48	74	54	-11.28	-11.52
17360	V	61.07	41.19	74	54	-12.93	-12.81
4960	H	65.82	45.20	74	54	-8.18	-8.8
7440	H	64.36	44.36	74	54	-9.64	-9.64
9920	H	63.59	43.19	74	54	-10.41	-10.81
12400	H	62.72	42.59	74	54	-11.28	-11.41
14880	H	61.04	41.49	74	54	-12.96	-12.51
17360	H	60.36	40.29	74	54	-13.64	-13.71

Other harmonics emissions are lower than 20dB below the allowable limit.

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
 - (3) The average measurement was not performed when the peak measured data under the limit of average detection.
 - (4) The results of worst cased was recorded.

5.5 Radiated Measurement Photos:

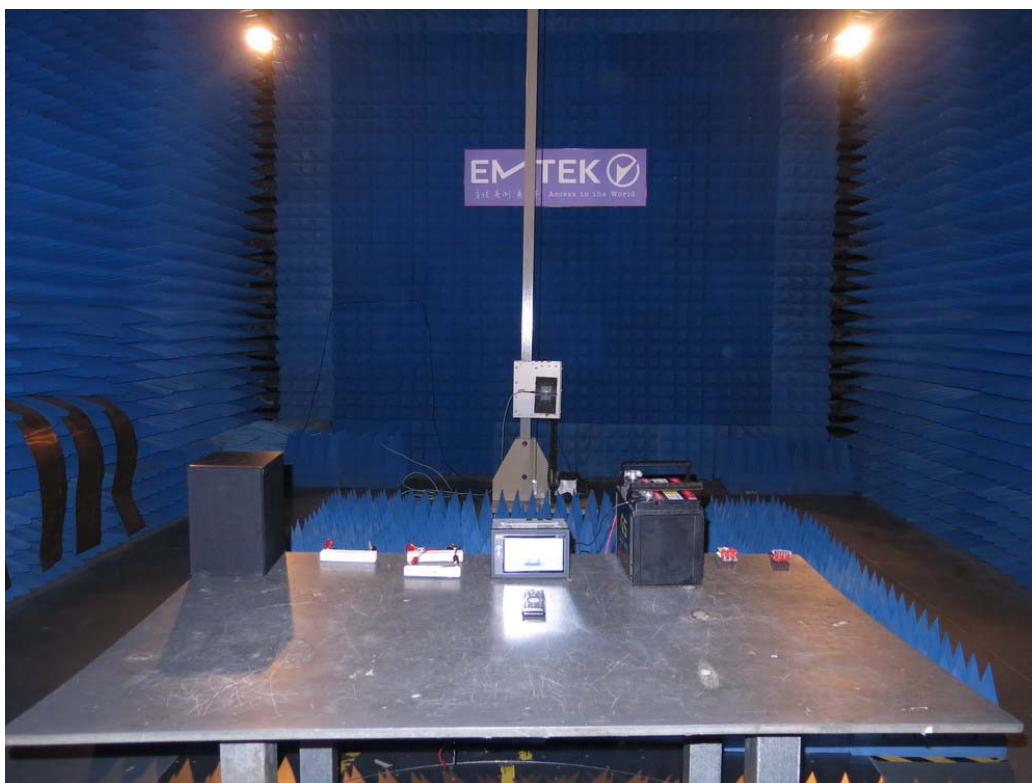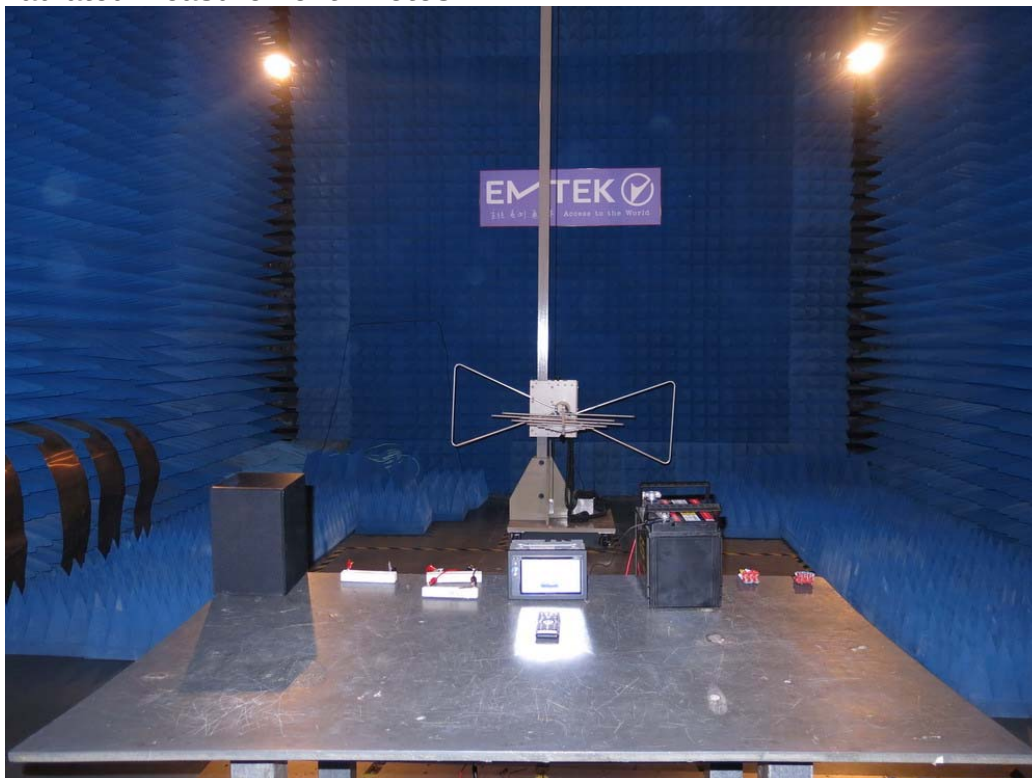


6. Channel Separation test

6.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

6.2 Test SET-UP (Block Diagram of Configuration)



6.3 Measurement Equipment Used:



Same as 5.3 Radiated Emission Measurement.


6.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	September 28, 2014
Test By:	Andy	Temperature :	24℃
Test Result:	PASS	Humidity :	53 %
Modulation:	GFSK		



Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 20dB Down BW(kHz)
1	2402	1000	>902
40	2441	1001	>905
79	2480	1000	>904

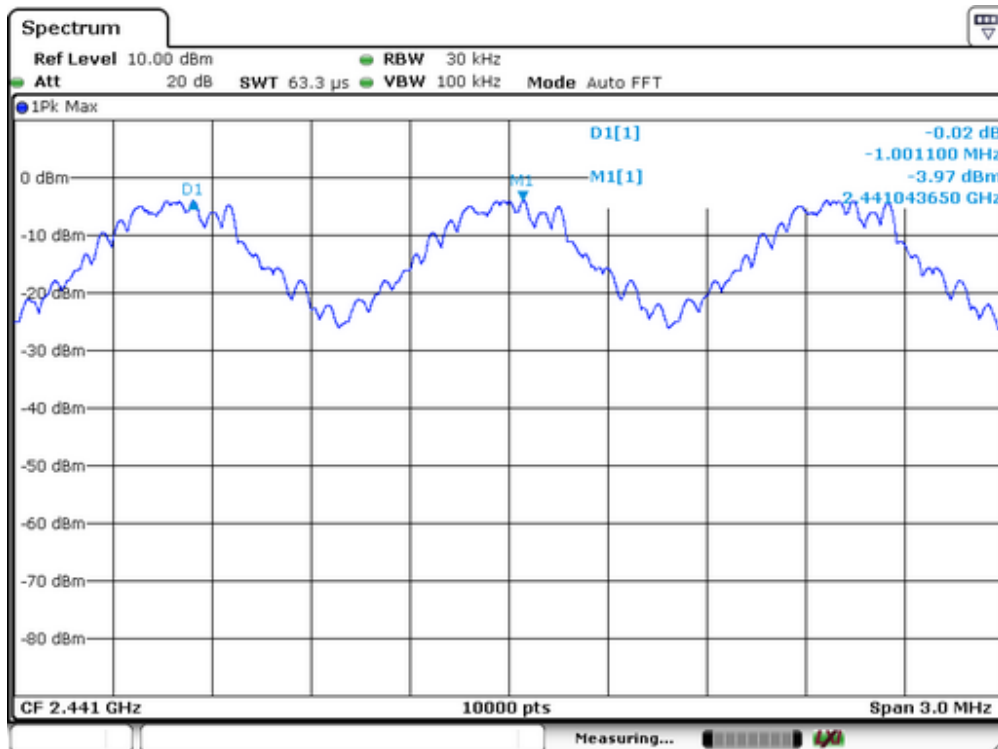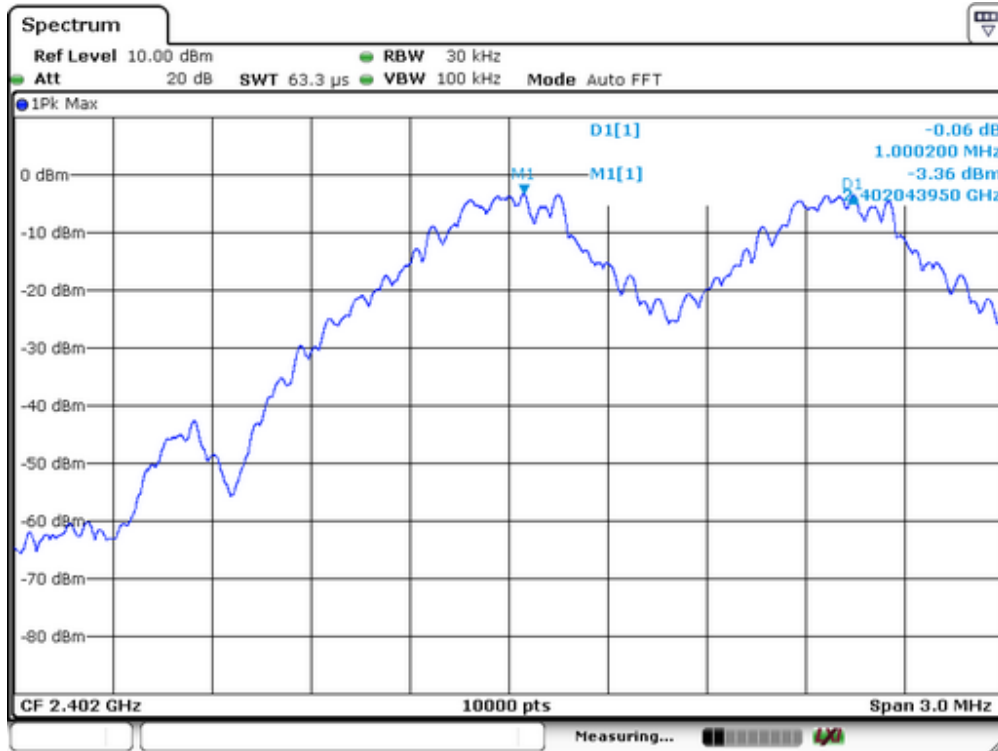


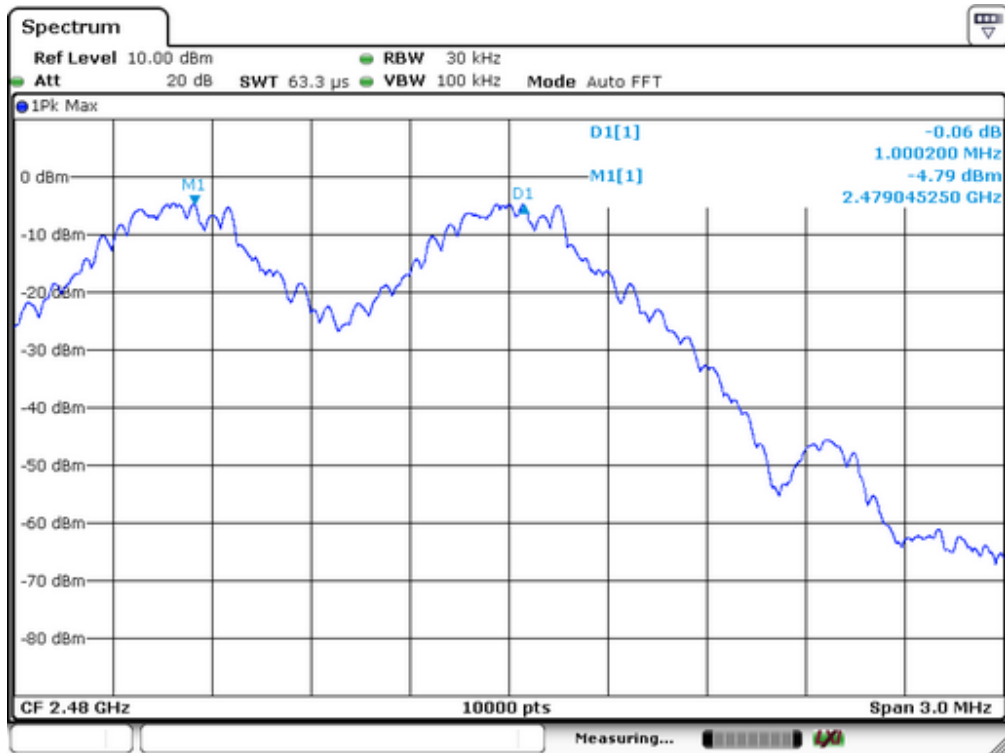

Spectrum Detector:	PK	Test Date :	September 28, 2014
Test By:	Andy	Temperature :	24°C
Test Result:	PASS	Humidity :	53 %
Modulation:	1/4Π-DQPSK		



Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
1	2402	1000	>890
40	2441	1000	>888
79	2480	1000	>891

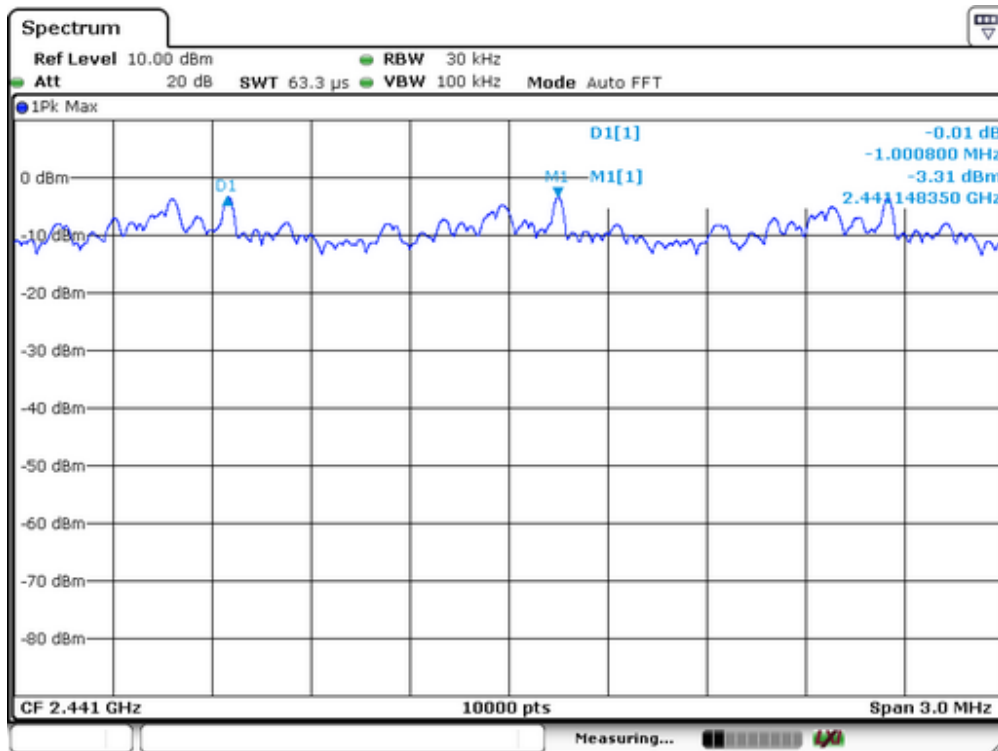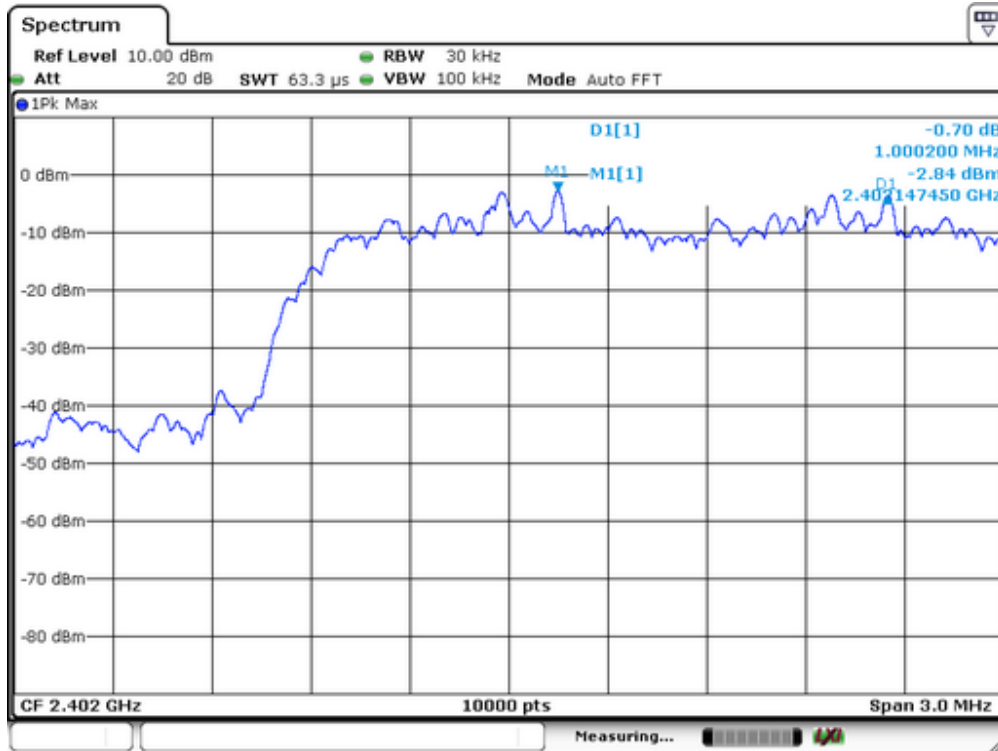


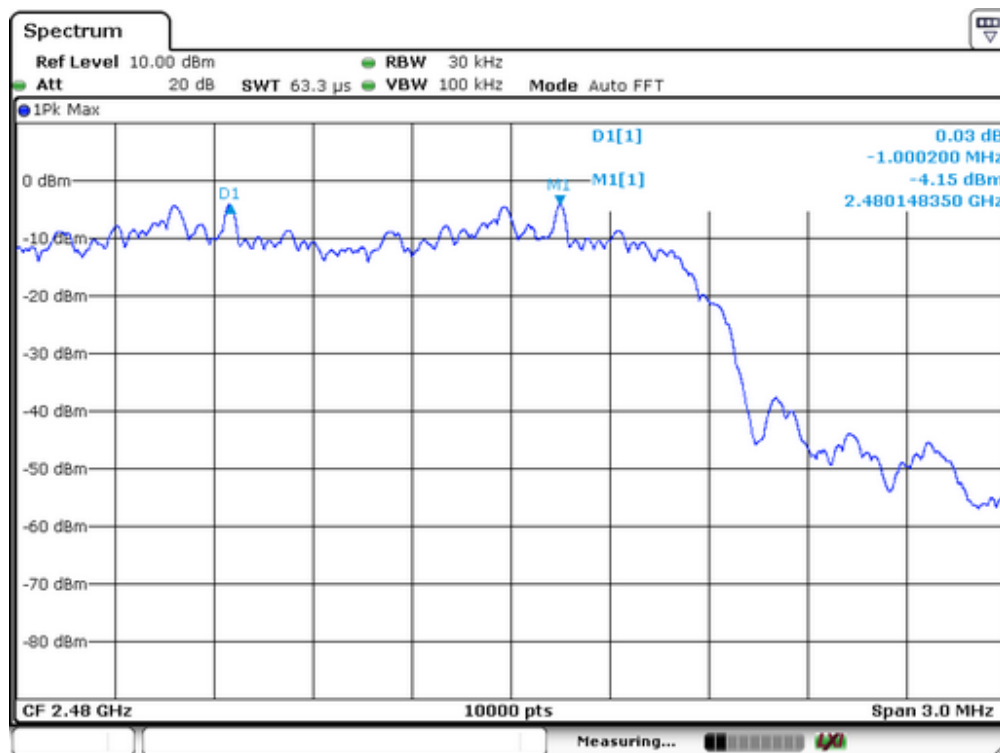

Spectrum Detector: PK Test Date : September 28, 2014
Test By: Andy Temperature : 24°C
Test Result: PASS Humidity : 53 %
Modulation: 8DPSK

Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
1	2402	1000	>886
40	2441	1000	>886
79	2480	1000	>888

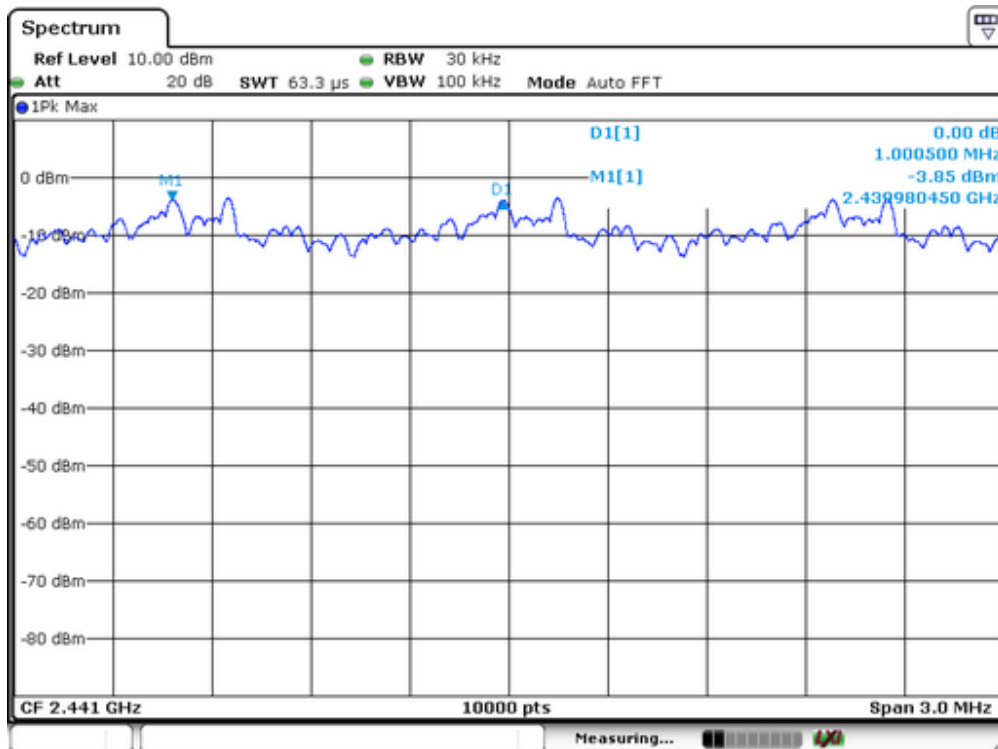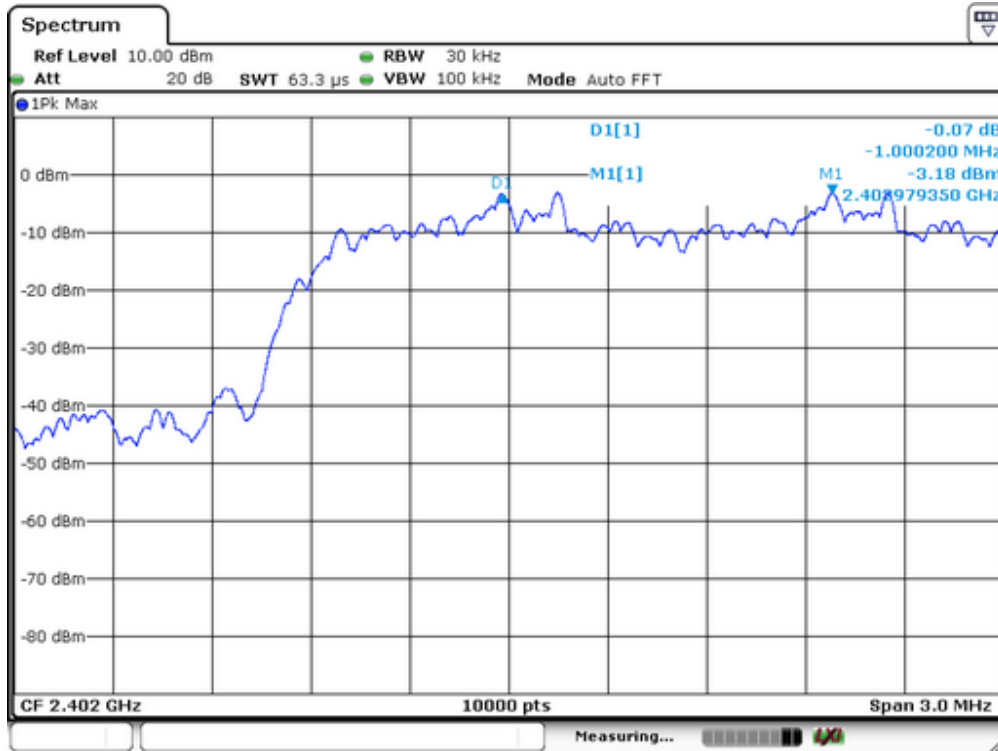

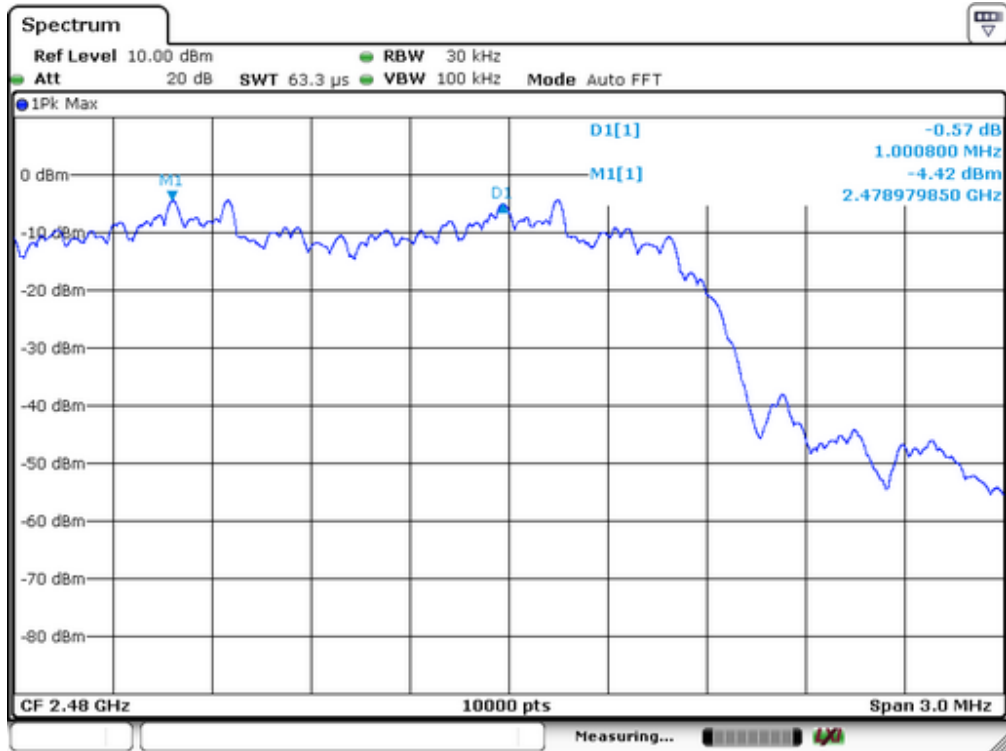


7. 20dB Bandwidth test

7.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

7.2 Test SET-UP (Block Diagram of Configuration)



7.3 Measurement Equipment Used:



Same as 5.3 Radiated Emission Measurement.


7.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	September 28, 2014
Test By:	Andy	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %
Modulation:	GFSK		



Channel number	Channel frequency (MHz)	20dB Down BW(KHz)
1	2402	902
40	2441	905
79	2480	904

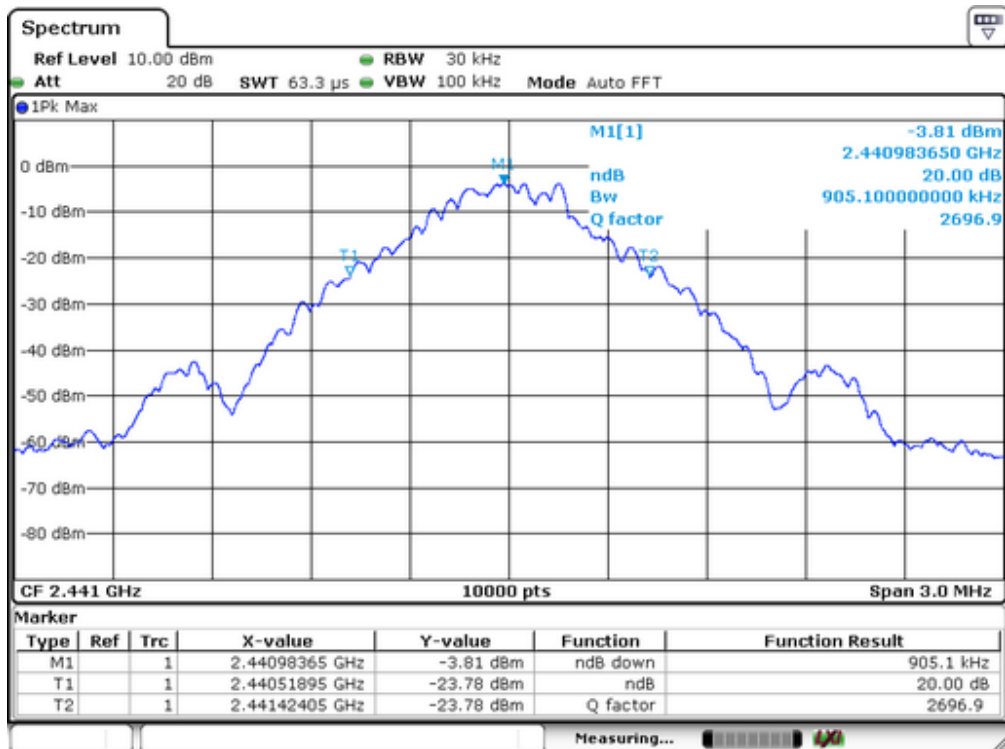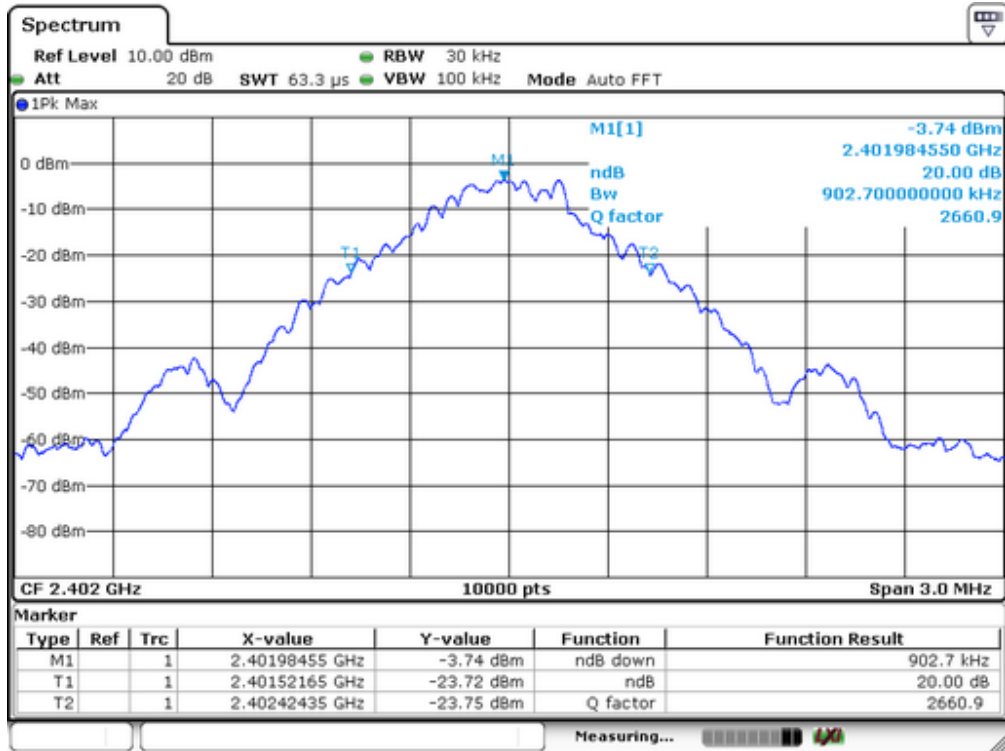


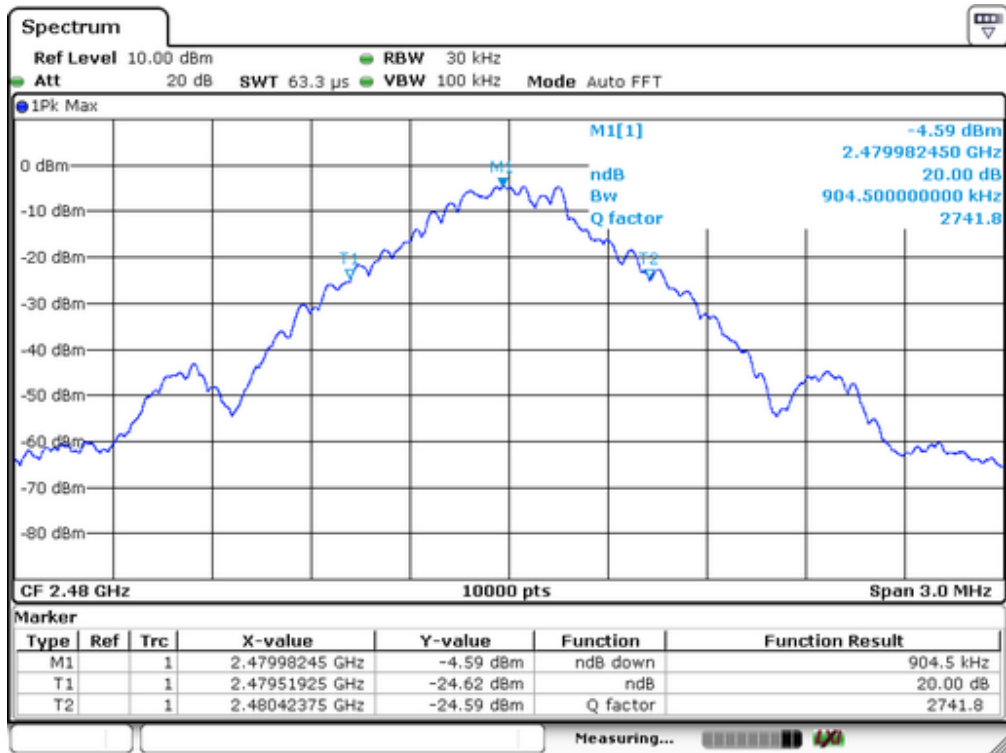

Spectrum Detector: PK Test Date : September 28, 2014
Test By: Andy Temperature : 24 °C
Test Result: PASS Humidity : 53 %
Modulation: $\pi/4$ -DQPSK



Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	1334
40	2441	1333
79	2480	1335

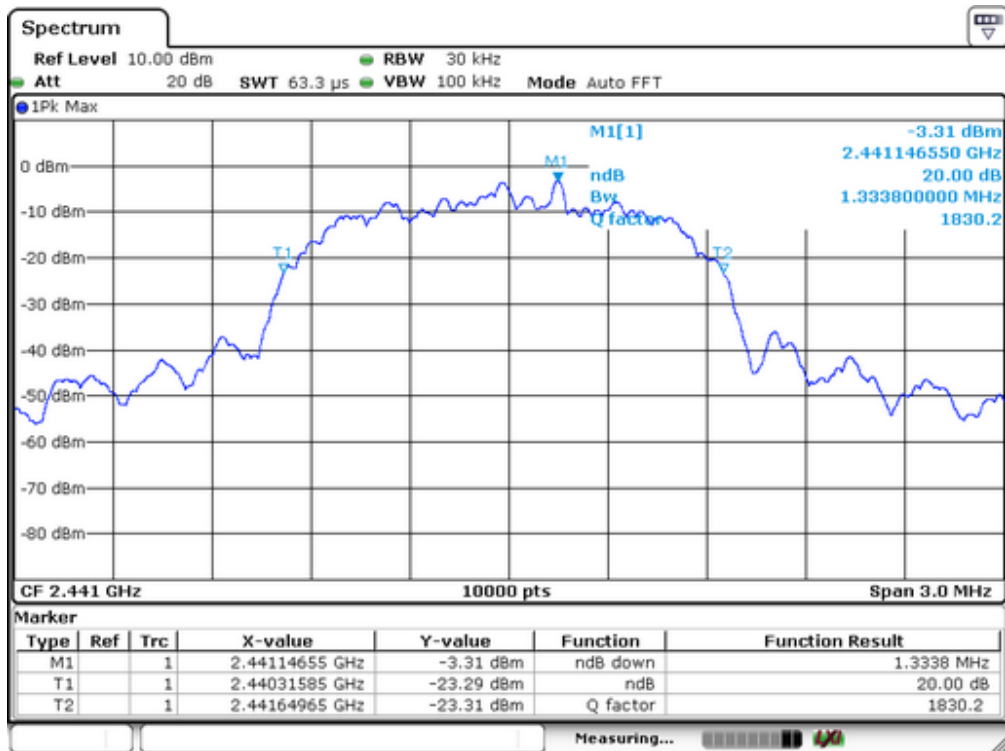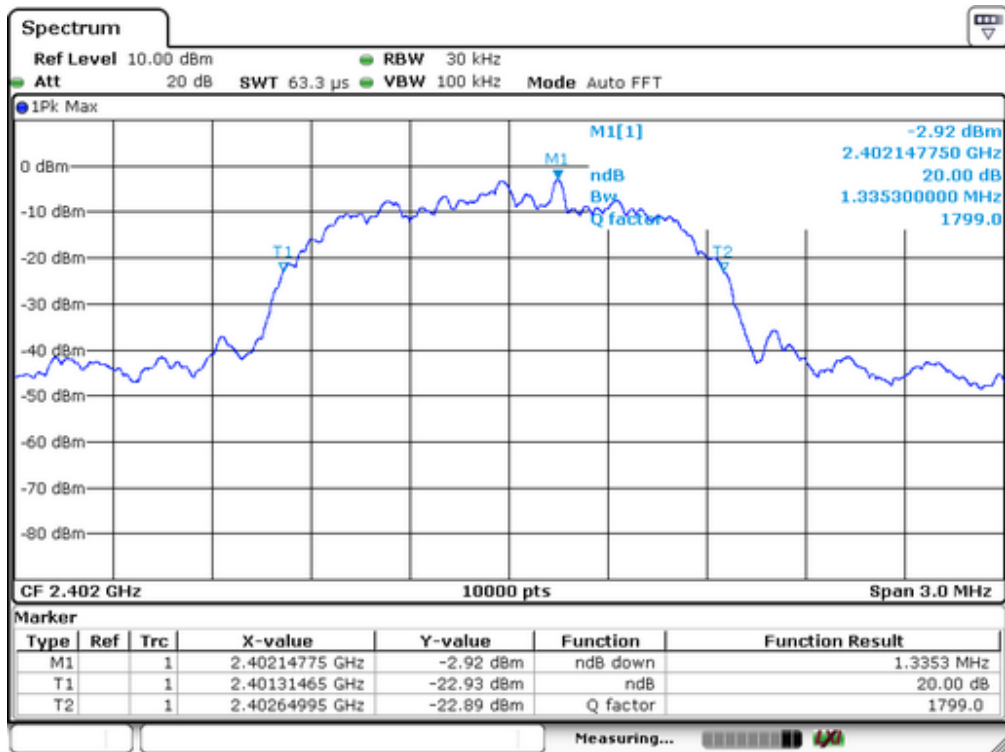


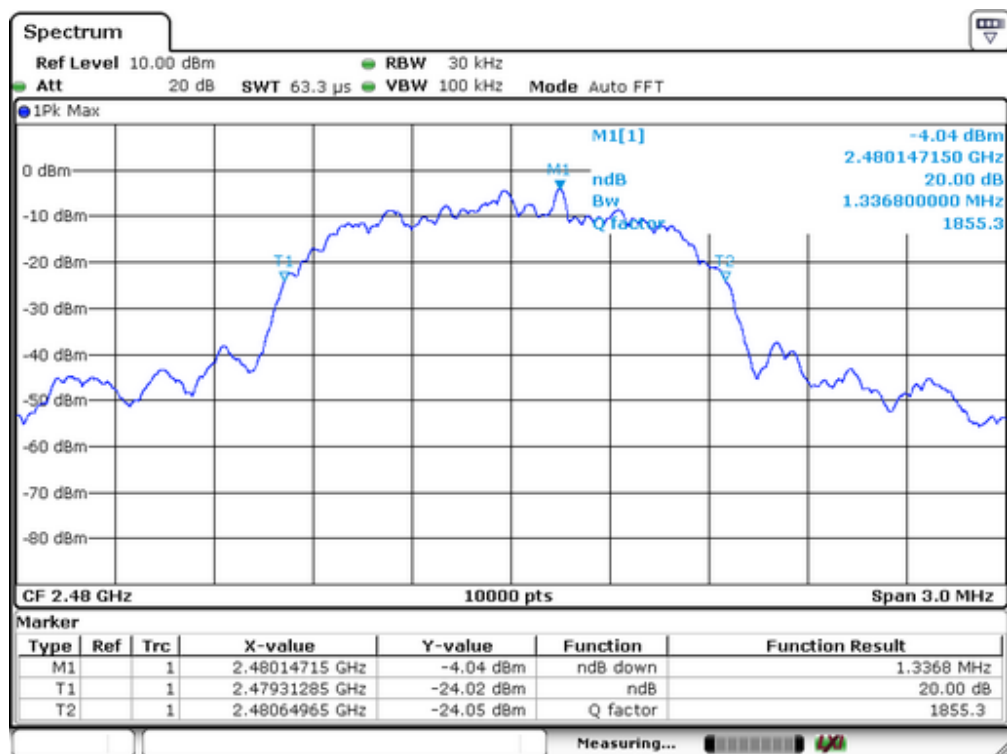

Spectrum Detector:	PK	Test Date :	September 28, 2014
Test By:	Andy	Temperature :	24°C
Test Result:	PASS	Humidity :	53 %
Modulation:	8DPSK		

Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	1330
40	2441	1330
79	2480	1332

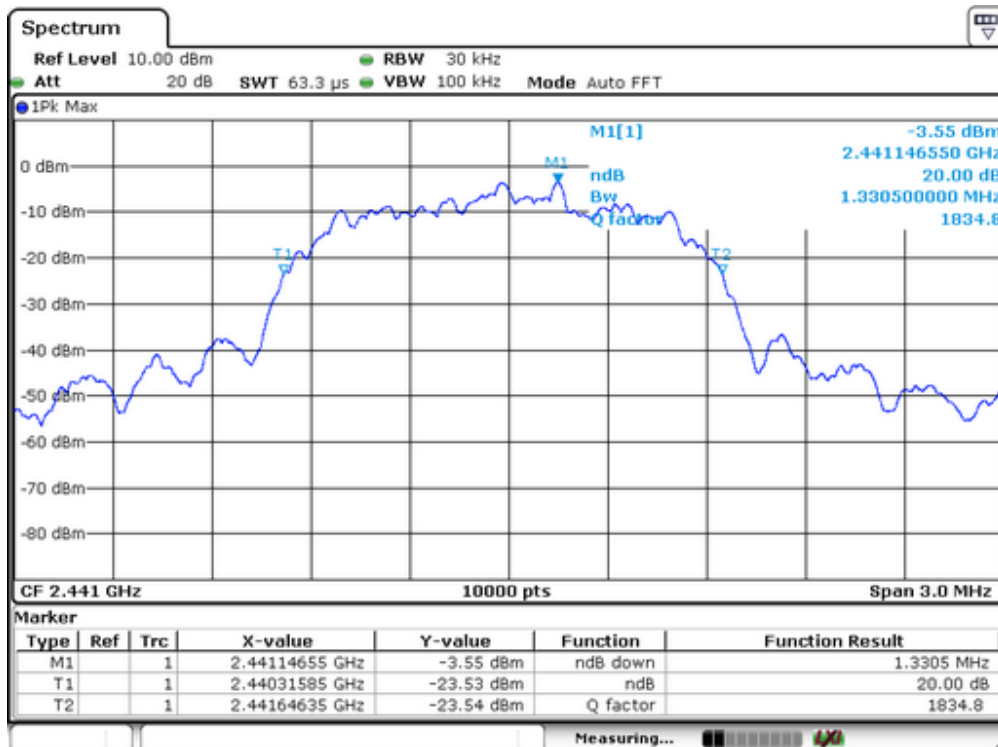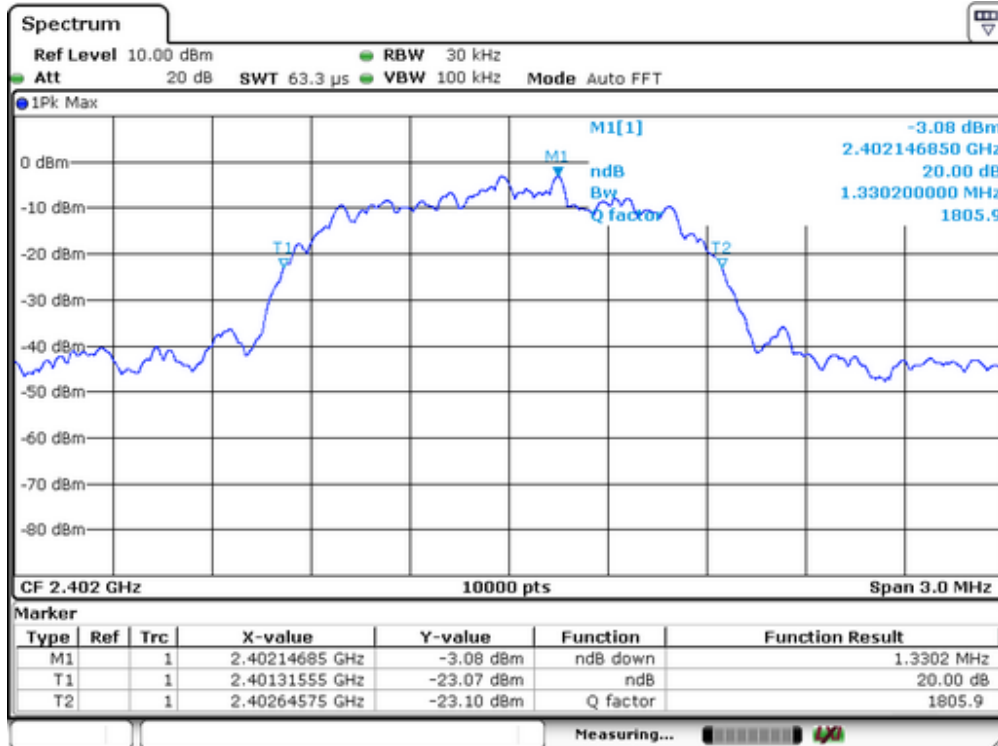

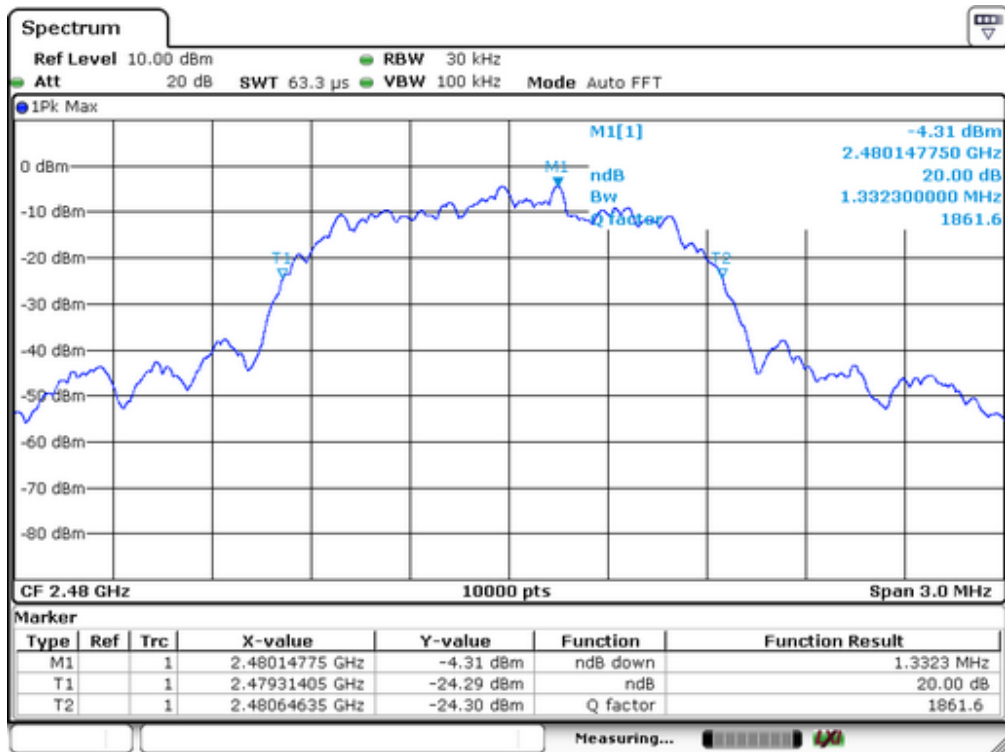


8. Quantity of Hopping Channel Test

8.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

8.2 Test SET-UP (Block Diagram of Configuration)



8.3 Measurement Equipment Used:


Same as 5.3 Radiated Emission Measurement.

8.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	September 26, 2014
Test By:	Andy	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel
2402-2480	79	> 15

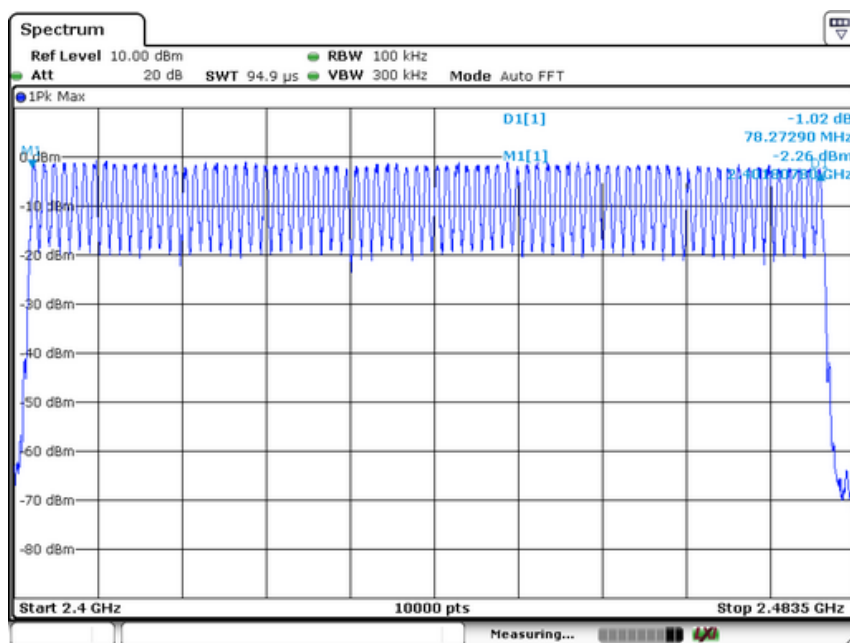

9. Time of Occupancy (Dwell Time) test

9.1 Test Description

The Equipment Under Test (EUT) was set up to perform the dwell time measurements. The EUT was connected to the spectrum analyzer via a short coax cable. The dwell time is calculated by:

$$\text{Dwell time} = \text{time slot length} * \text{hop rate} / \text{number of hopping channels} * 31.6\text{s}$$

with:

- hop rate = $1600/2 * 1/\text{s}$ for DH1 packets = 1600 s^{-1}
- hop rate = $1600/4 * 1/\text{s}$ for DH3 packets = 533.33 s^{-1}
- hop rate = $1600/6 * 1/\text{s}$ for DH5 packets = 320 s^{-1}
- number of hopping channels = 79
- $31.6 \text{ s} = 0.4 \text{ seconds multiplied by the number of hopping channels} = 0.4 \text{ s} * 79$

The highest value of the dwell time is reported.

9.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Since the Bluetooth technology uses 79 channels this period is calculated to be 31.6seconds. Refer to attached data chart.

9.3 Test Protocol

Packet type	Time slot length(ms)	Dwell time	Dwell time(ms)
DH1	0.388	time slot length *1600/2 /79 * 31.6	124.16
DH3	1.645	time slot length *1600/4 /79 * 31.6	263.20
DH5	2.893	time slot length *1600/6 /79 * 31.6	308.59


Remark:

- 1.The results of worst cased was recorded.


9.4 Test result: Dwell time

PASS.


DH1:

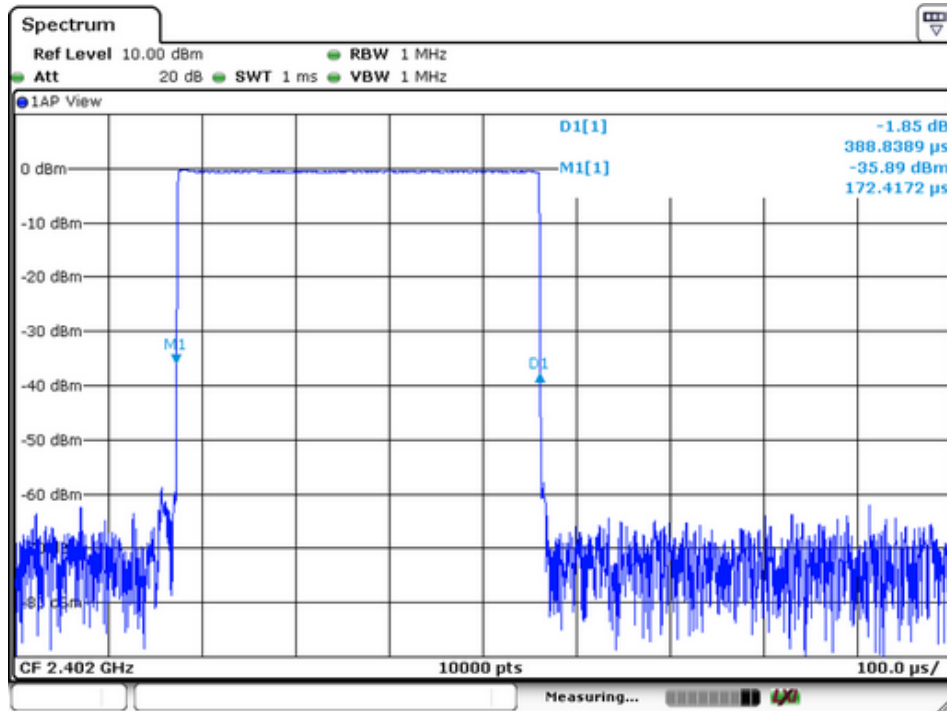

DH3:

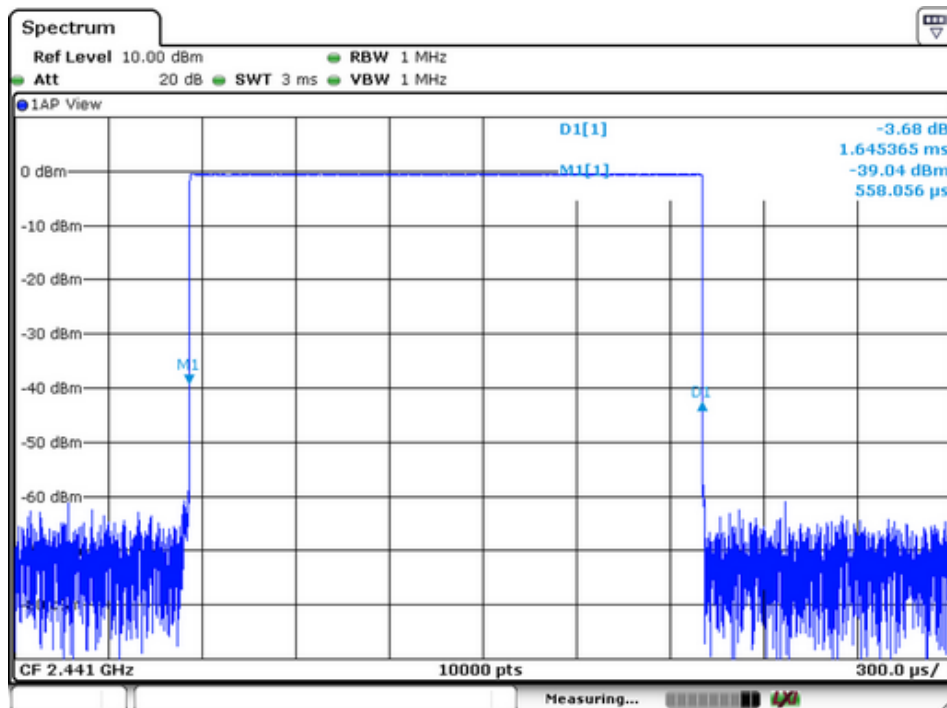

DH5:

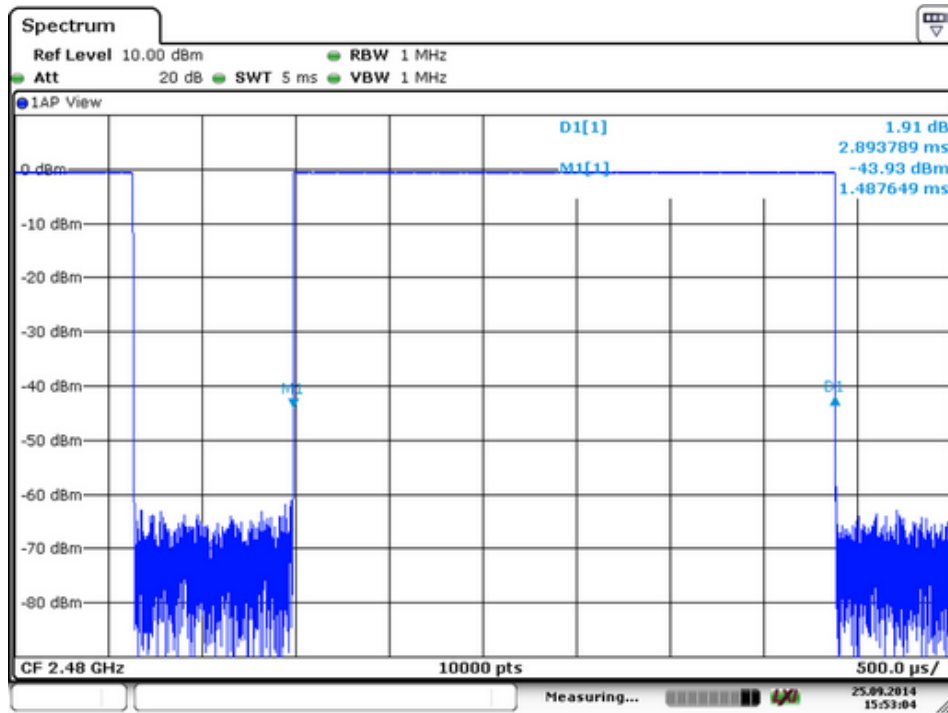


10. MAXIMUM PEAK OUTPUT POWER TEST

10.1 Measurement Procedure

- Check the calibration of the measuring instrument(SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- The center frequency of the spectrum analyzer is set to the fundamental frequency and using proper RBW and VBW setting.
- Measure the captured power within the band and recording the plot.
- Repeat above procedures until all frequencies required were complete.

10.2 Test SET-UP (Block Diagram of Configuration)



10.3 Measurement Equipment Used:


EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	05/18/2014	05/17/2015



10.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	September 28, 2014
Test By:	Andy	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %
Modulation:	GFSK		


Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power output(mW)	Peak Power Limit(mW)	Pass/Fail
1	2402	-0.50	0.891	1000	PASS
40	2441	-1.03	0.789	1000	PASS
79	2480	-1.81	0.659	1000	PASS


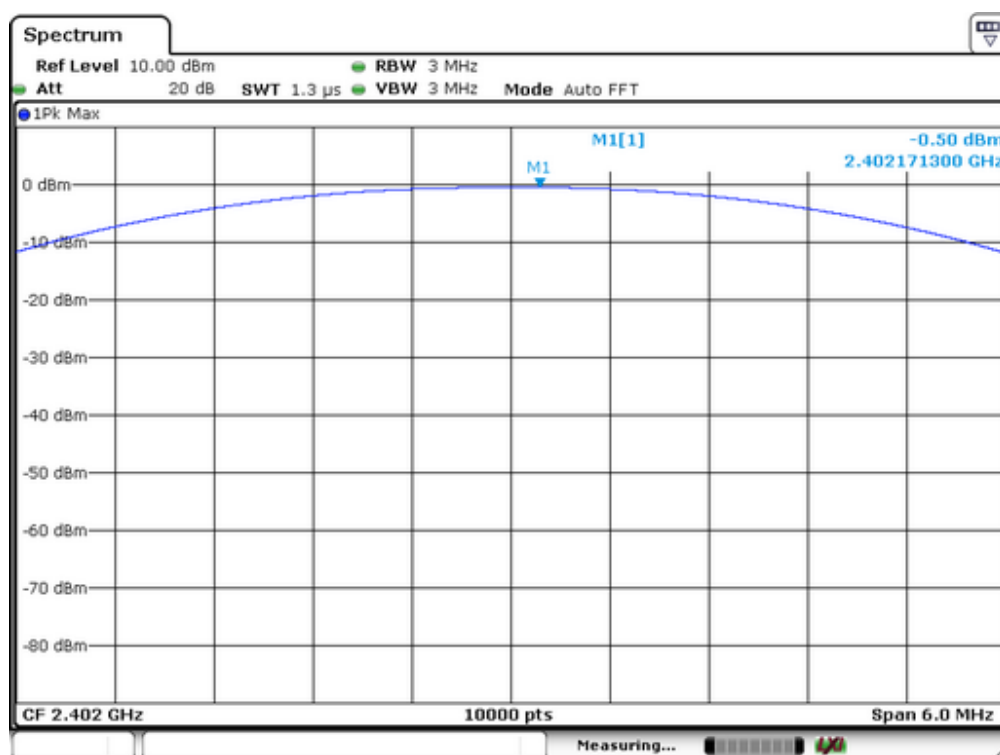


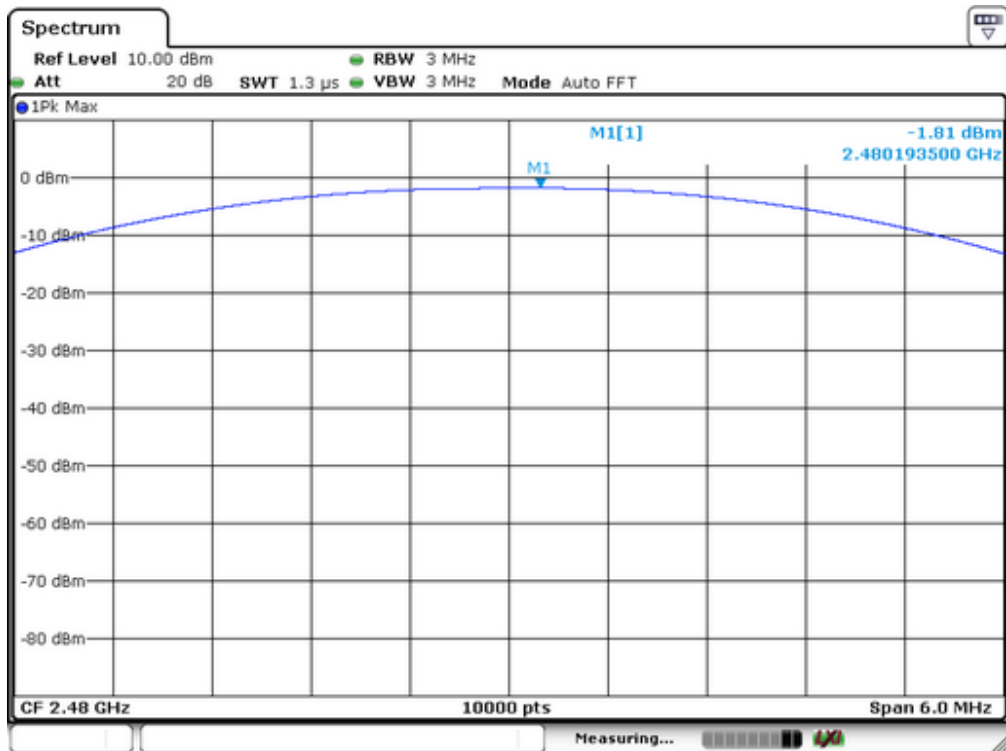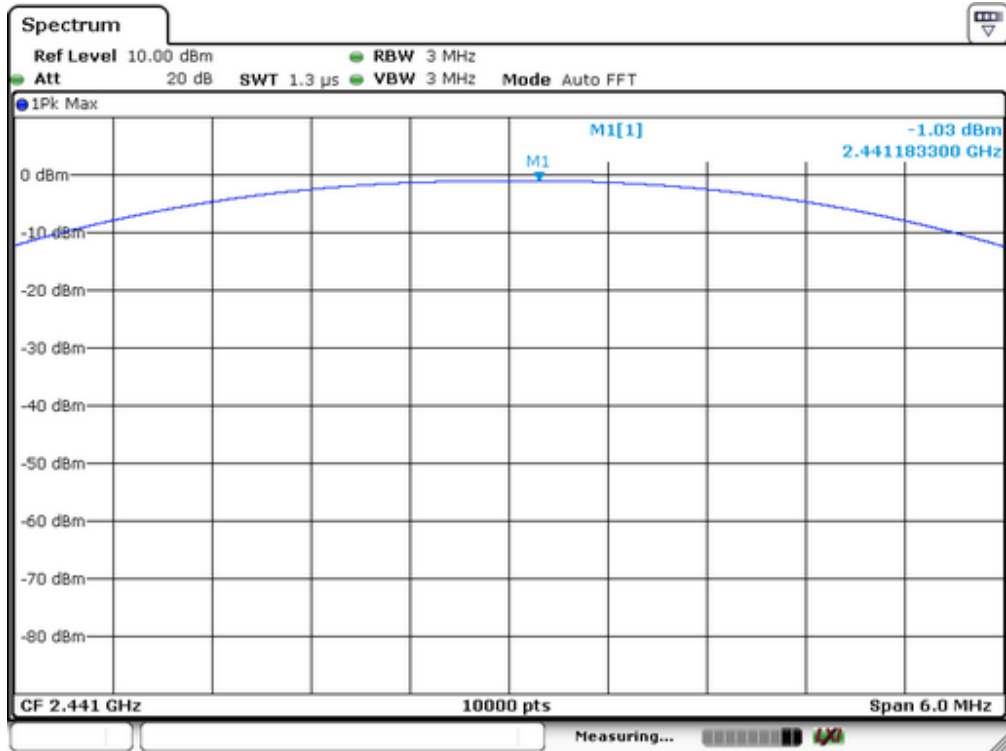

Spectrum Detector: PK Test Date : September 28, 2014
Test By: Andy Temperature : 25 °C
Test Result: PASS Humidity : 50 %
Modulation: $\Pi/4$ -DQPSK


Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power output(mW)	Peak Power Limit(mW)	Pass/Fail
1	2402	1.54	1.426	125	PASS
40	2441	1.31	1.352	125	PASS
79	2480	0.37	1.089	125	PASS


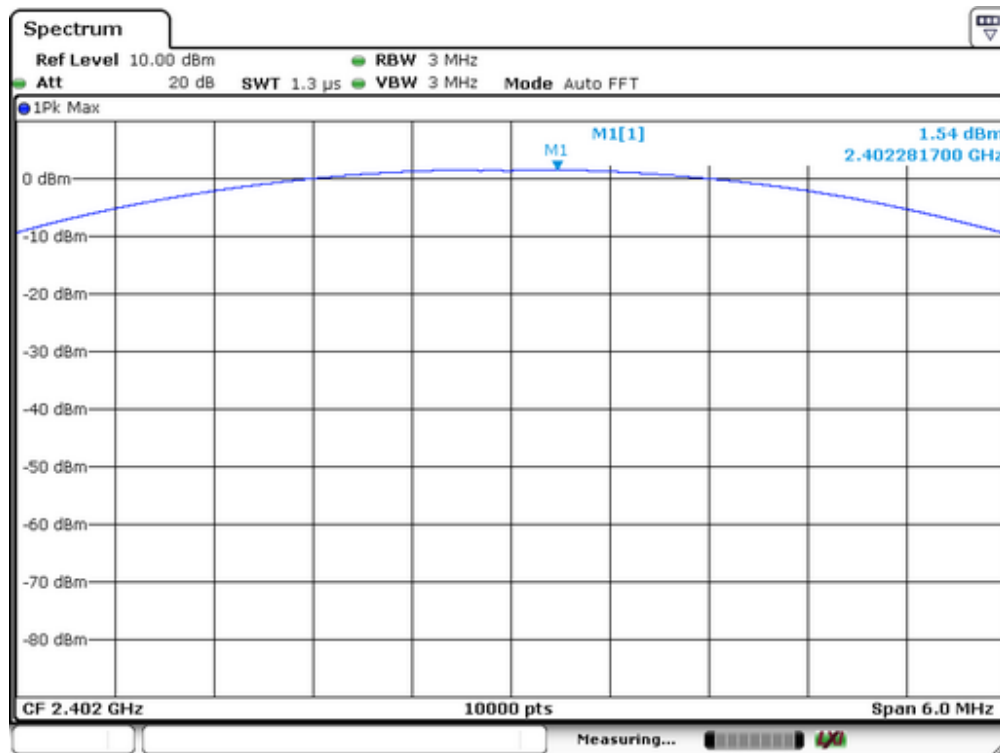


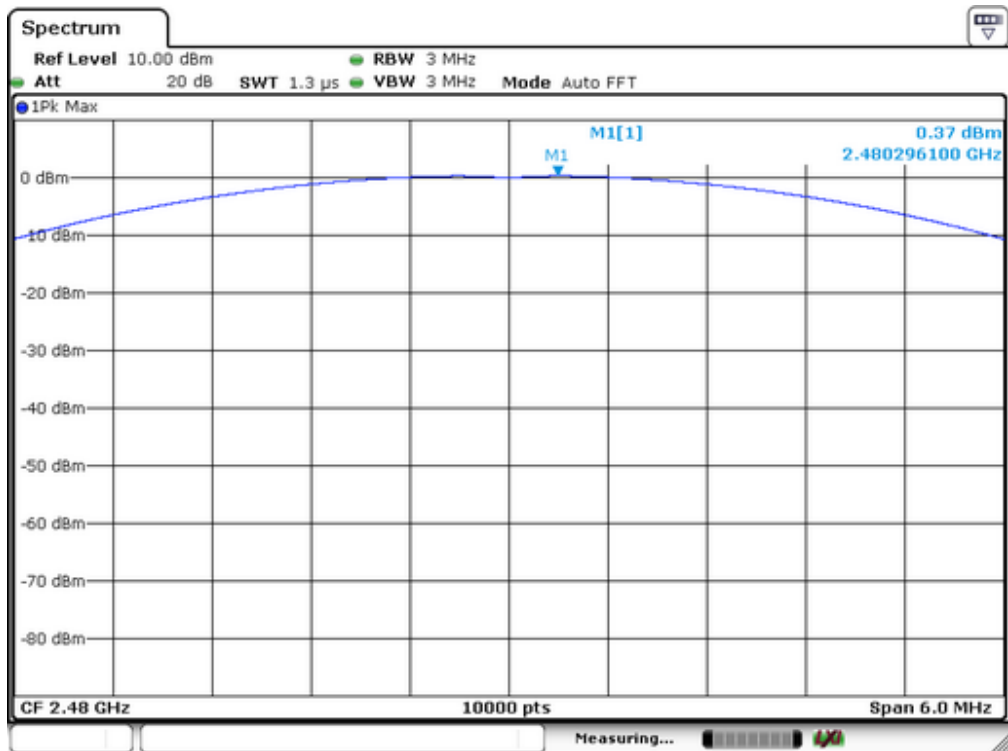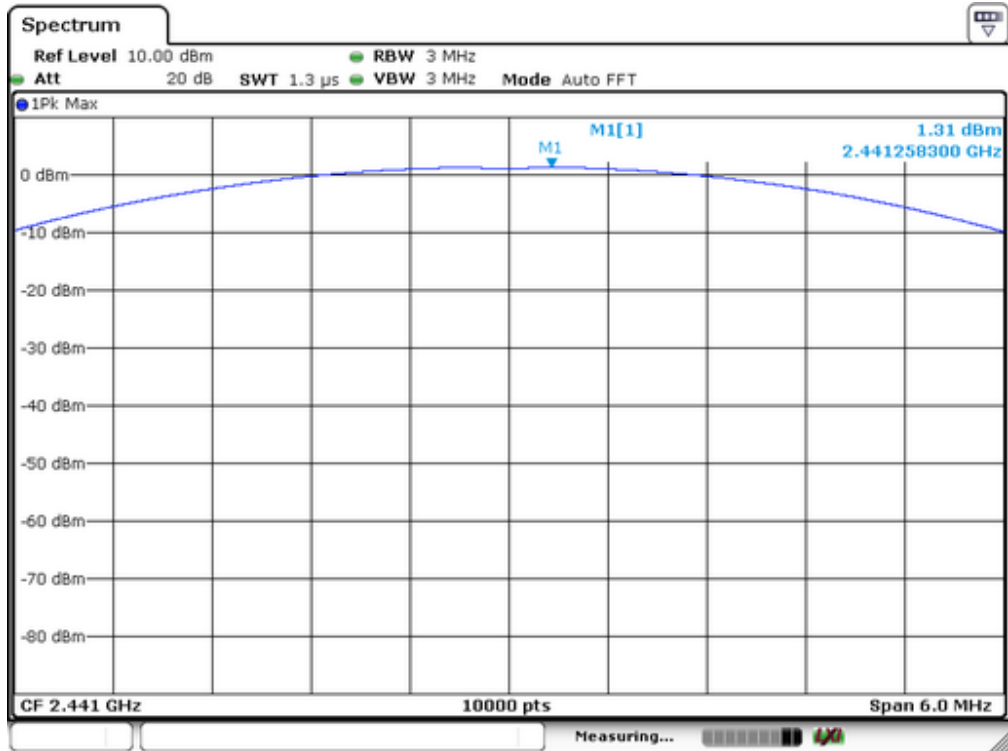

Spectrum Detector:	PK	Test Date :	September 28, 2014
Test By:	Andy	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %
Modulation:	8DPSK		

Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power output(mW)	Peak Power Limit(mW)	Pass/Fail
1	2402	1.93	1.560	125	PASS
40	2441	1.70	1.479	125	PASS
79	2480	0.71	1.178	125	PASS

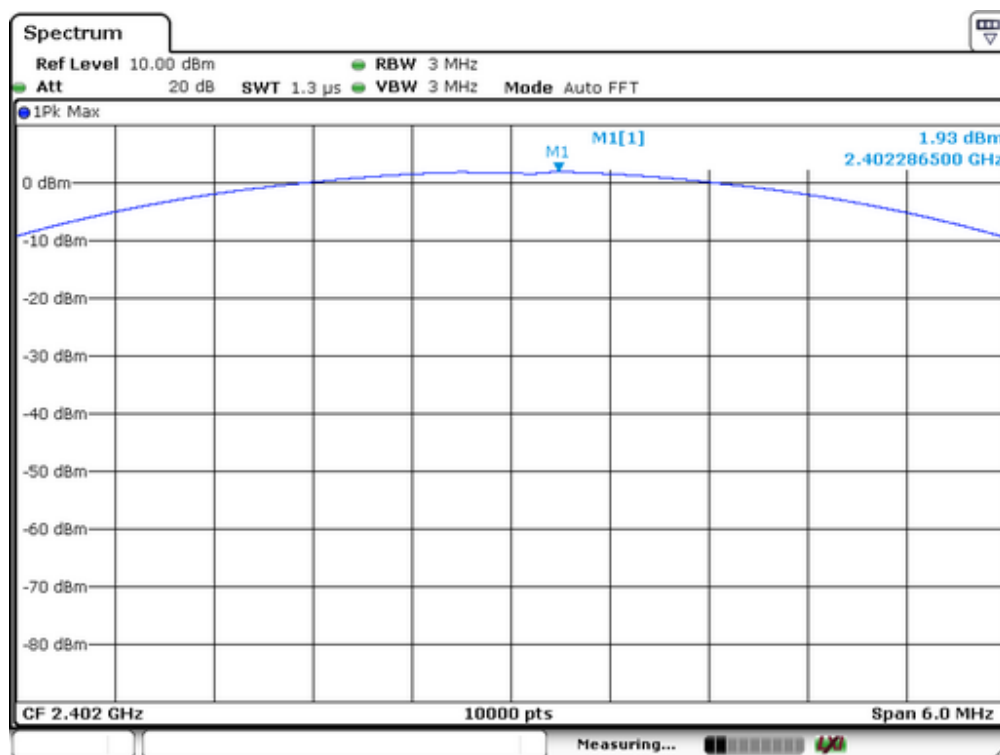

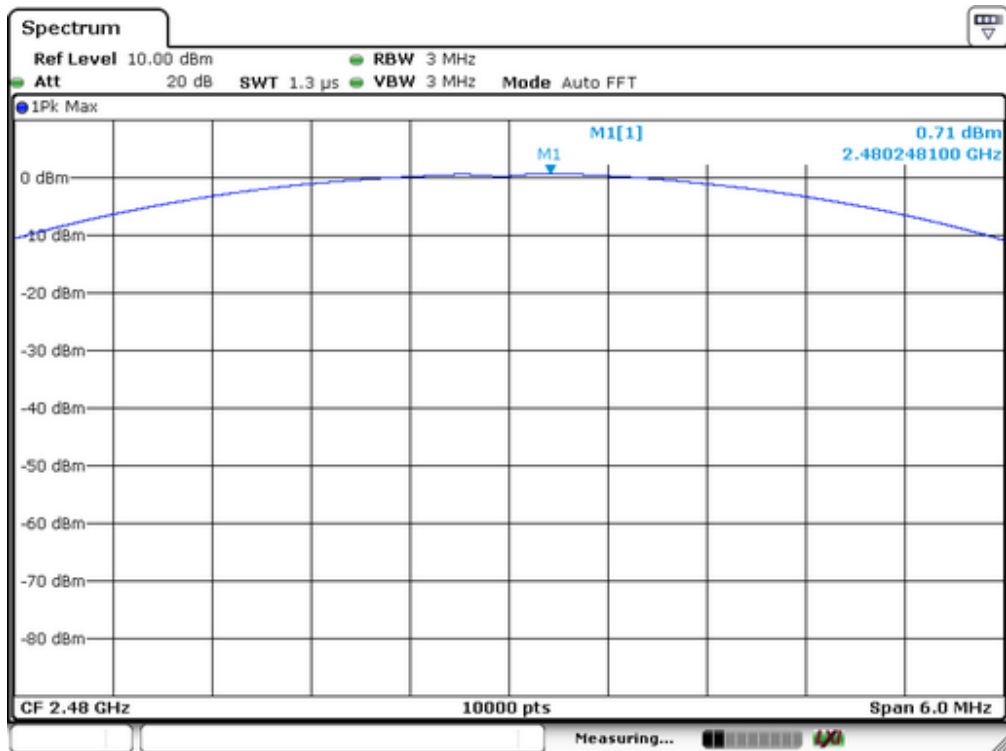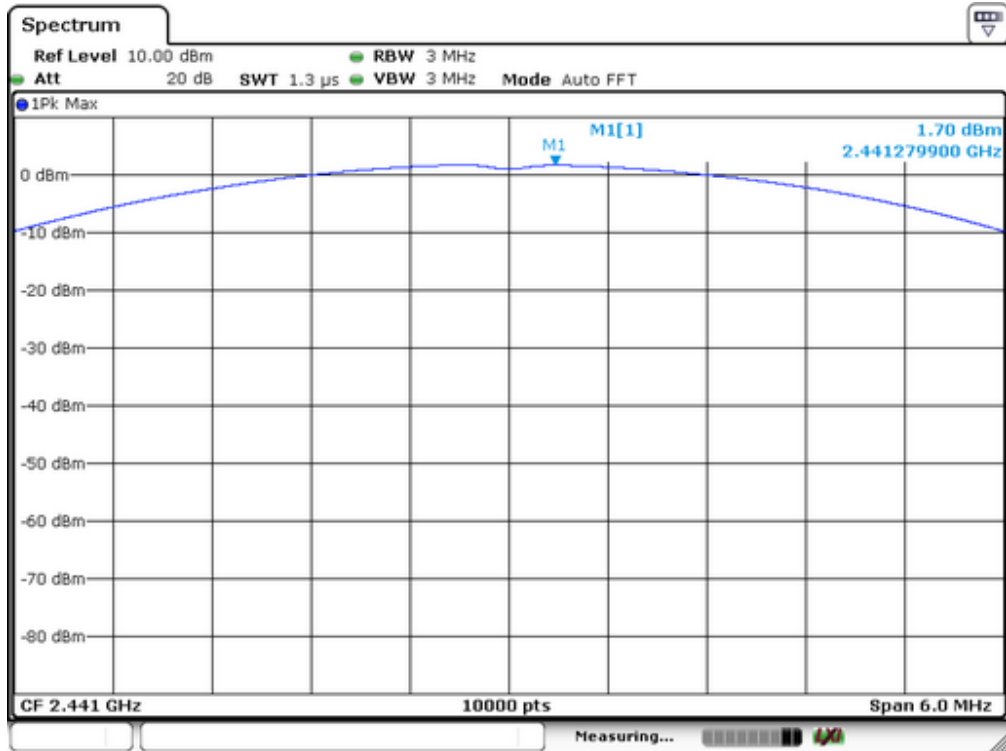

11. Band EDGE test

11.1 Measurement Procedure

1. The EUT was Operating in hopping mode or could be controlled its channel. Printed out test result from the spectrum by hard copy function.
2. The EUT was placed on a turn table which is 0.8m above ground plane.
3. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Repeat above procedures until all frequency measured were complete.

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:

EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz:

EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	10Hz
Detector	Peak
Trace	Max hold

11.2 Test SET-UP (Block Diagram of Configuration)

Same as 5.2 Radiated Emission Set-up.

11.3 Measurement Equipment Used:

Same as 5.3 Radiated Emission Measurement.

11.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector: PK Test Date : September 26, 2014
Test By: Andy Temperature : 25 °C
Test Result: PASS Humidity : 50 %

1. Conducted Test

For Non-Hopping mode:

Frequency (MHz)	Peak Power Output(dBm)	Emission read Value(dBm)	Result of Band edge(dBc)	Band edge Limit(dBc)
<2400	-0.62	-58.90	58.28	>20dBc
	-0.34	-49.11	48.77	>20dBc
	-0.29	-49.18	48.89	>20dBc
>2483.5	-1.93	-59.40	57.47	>20dBc
	-1.55	-56.71	55.16	>20dBc
	-1.53	-55.58	54.05	>20dBc

For Hopping mode:

Frequency (MHz)	Peak Power Output(dBm)	Emission read Value(dBm)	Result of Band edge(dBc)	Band edge Limit(dBc)
<2400	-0.73	-59.80	59.07	>20dBc
	-0.35	-50.60	50.25	>20dBc
	-0.33	-51.41	51.08	>20dBc
>2483.5	-1.90	-57.22	55.32	>20dBc
	-1.87	-58.05	56.18	>20dBc
	-1.57	-59.78	58.21	>20dBc

2. Radiated emission Test

For Non-Hopping mode:

Frequency (MHz)	Antenna polarization (H/V)	Emission (dBuV/m)		Band edge Limit (dBuV/m)	
		PK	AV	PK	AV
<2400	V	65.13	46.29	74.00	54.00
	H	60.59	41.13	74.00	54.00
>2483.5	V	64.09	47.28	74.00	54.00
	H	59.42	43.19	74.00	54.00

For Hopping mode:

Frequency (MHz)	Antenna polarization (H/V)	Emission (dBuV/m)		Band edge Limit (dBuV/m)	
		PK	AV	PK	AV
<2400	V	66.55	45.19	74.00	54.00
	H	62.49	44.25	74.00	54.00
>2483.5	V	63.59	46.07	74.00	54.00
	H	58.18	42.62	74.00	54.00

12. Antenna Application

12.1 Antenna requirement

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247.

FCC part 15C section 15.247 requirements:

Systems operating in the 2402-2480MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

12.2 Result

The EUT's antenna used a PCB antenna. The antenna's gain is 0dBi and meets the requirement.

13. RF EXPOSURE EVALUATION

According to FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency(RF) Radiation as specified in §1.1307(b)

Limits for Maximum Permissible Exposure(MPE)

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density(mW/cm ²)	Average Time
(A) Limits for Occupational/Control Exposures				
300-1500	--	--	F/300	6
1500-100000	--	--	5	6
(B) Limits for General Population/Uncontrol Exposures				
300-1500	--	--	F/1500	6
1500-100000	--	--	1	30

13.1 Friis transmission formula: $P_d = (P_{out} * G) / (4 * \pi * R^2)$

Where

P_d = Power density in mW/cm²

P_{out} =output power to antenna in Mw

G = gain of antenna in linear scale

π =3.1416

R = distance between observation point and center of the radiator in cm

P_d the limit of MPE, 1mW/cm². If we know the maximum gain of the antenna and total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.

13.2 Measurement Result.

Channel Frequency (MHz)	Output Peak power (mW)	Antenna Gain (dBi)	Antenna Gain (numeric)	Power density at 20cm (mW/cm ²)	Power density Limits (mW/cm ²)
2402	0.891	0	1	0.0001773	1
2441	0.789	0	1	0.0001570	1
2480	0.659	0	1	0.0001311	1
2402	1.426	0	1	0.0002837	1
2441	1.352	0	1	0.0002690	1
2480	1.089	0	1	0.0002166	1
2402	1.560	0	1	0.0003104	1
2441	1.479	0	1	0.0002942	1
2480	1.178	0	1	0.0002344	1

General Appearance of the EUT

