

FCC Part 22H & 24E Measurement and Test Report

For

Hyundai Corporation

25, Yulgok-ro 2-Gil, Jongno-gu, Seoul, South Korea

FCC ID: RQQHLT-FS50403

FCC Rules: FCC Part 22H, FCC Part 24E

Product Description: 4G Smart Phone

Tested Model: L503F PLUS

Report No.: STR18108046I-1

Sample Receipt Date: 2018-10-11

Tested Date: 2018-10-12 to 2018-11-05

Issued Date: 2018-11-05

Tested By: Jason Su / Engineer



Reviewed By: Silin Chen / EMC Manager



Approved & Authorized By: Jandy So / PSQ Manager



Prepared By:

Shenzhen SEM Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM. Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE.....	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	7
2. SUMMARY OF TEST RESULTS	9
3. RF EXPOSURE	10
3.1 STANDARD APPLICABLE.....	10
3.2 TEST RESULT.....	10
4. RF OUTPUT POWER	11
4.1 STANDARD APPLICABLE.....	11
4.2 TEST PROCEDURE.....	11
4.3 SUMMARY OF TEST RESULTS/PLOTS	11
5. PEAK-TO-AVERAGE RATIO (PAR) OF TRANSMITTER.....	16
5.1 STANDARD APPLICABLE.....	16
5.2 TEST PROCEDURE.....	16
5.3 SUMMARY OF TEST RESULTS	16
6. EMISSION BANDWIDTH.....	18
6.1 STANDARD APPLICABLE.....	18
6.2 TEST PROCEDURE.....	18
6.3 SUMMARY OF TEST RESULTS/PLOTS	18
7. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL.....	33
7.1 STANDARD APPLICABLE.....	33
7.2 TEST PROCEDURE.....	33
7.3 SUMMARY OF TEST RESULTS/PLOTS	33
8. SPURIOUS RADIATED EMISSIONS.....	66
8.1 STANDARD APPLICABLE.....	66
8.2 TEST PROCEDURE.....	66
8.3 SUMMARY OF TEST RESULTS/PLOTS	66
9. FREQUENCY STABILITY	77
9.1 STANDARD APPLICABLE.....	77
9.2 TEST PROCEDURE.....	77
9.3 SUMMARY OF TEST RESULTS/PLOTS	77

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Hyundai Corporation
Address of applicant: 25, Yulgok-ro 2-Gil, Jongno-gu, Seoul, South Korea

Manufacturer: Guizhou Fortuneship Technology Co., Ltd
Address of manufacturer: 2nd Floor, Factory Building 4, Hi-Tech Industrial Park, Xipu Economic Development Zone, Xipu New District, Zunyi City, Guizhou Province, P. R. China

General Description of EUT:	
Product Name:	4G Smart Phone
Brand Name:	HYUNDAI
Model No.:	L503F PLUS
Adding Model(s):	L503FS PLUS
Rated Voltage:	DC3.7V
Battery:	2200mAh
Adapter Model:	HT-C1000B Input:AC100-240V 50/60Hz 0.3A Output::DC5V 1000mA
Software Version:	HYUNDAI_L503F_V8.1.6_20180903
Hardware Version:	FS273-MB-V1.0
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The main-test model L503F PLUS has two SIM card slots, adding model L503FS PLUS has only one SIM card slots, but the circuit and the electronic construction do not change, declared by the manufacturer. The two models are test and only the worst case model is showed in the test report.</i>	

Technical Characteristics of EUT:	
2G	
Support Networks:	GSM, GPRS, EDGE
Support Band:	GSM850/PCS1900
Uplink Frequency:	GSM/GPRS/EDGE 850: 824~849MHz GSM/GPRS/EDGE 1900: 1850~1910MHz
Downlink Frequency:	GSM/GPRS/EDGE 850: 869~894MHz GSM/GPRS/EDGE 1900: 1930~1990MHz
Max RF Output Power:	GSM850: 33.43dBm, GSM1900: 30.60dBm EDGE850: 26.13dBm, EDGE1900: 25.65dBm
Type of Emission:	GSM850: 256KGXW, GSM1900: 255KGXW EDGE850: 250KG7W, EDGE1900: 248KG7W
Type of Modulation:	GMSK, 8PSK
Type of Antenna:	Integral Antenna
Antenna Gain:	GSM850: 0.49dBi; GSM1900: 0.54dBi
GPRS/EDGE Class:	Class 12
3G	
Support Networks:	WCDMA, HSDPA, HSUPA
Support Band:	WCDMA Band 2, WCDMA Band 5
Uplink Frequency:	WCDMA Band 2: 1850~1910MHz WCDMA Band 5: 824~849MHz
Downlink Frequency:	WCDMA Band 2: 1930~1990MHz WCDMA Band 5: 869~894MHz
RF Output Power:	WCDMA Band 2: 21.62dBm, WCDMA Band 5: 21.67dBm
Type of Emission:	WCDMA Band 2: 4M19F9W WCDMA Band 5: 4M18F9W
Type of Modulation:	BPSK
Antenna Type:	Integral Antenna
Antenna Gain:	WCDMA Band 2: 0.54dBi, WCDMA Band 5: 0.49dBi

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 2: FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

FCC Rules Part 22: PRIVATE LAND MOBILE RADIO SERVICES.

FCC Rules Part 24: PUBLIC MOBILE SERVICES

TIA/EIA 603 E March 2016: Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

ANSI C63.26-2015: American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

KDB 971168 D01 Power Meas License Digital Systems v03r01: MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with TIA/EIA 603 E/ KDB 971168/ ANSI C63.26. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	GSM 850	Low, Middle, High Channels
TM2	GPRS 850	Low, Middle, High Channels
TM3	EDGE 850	Low, Middle, High Channels
TM4	GSM 1900	Low, Middle, High Channels
TM5	GPRS 1900	Low, Middle, High Channels
TM6	EDGE 1900	Low, Middle, High Channels
TM7	WCDMA Band 5	Low, Middle, High Channels
TM8	HSDPA Band 5	Low, Middle, High Channels
TM9	HSUPA Band 5	Low, Middle, High Channels
TM10	WCDMA Band 2	Low, Middle, High Channels
TM11	HSDPA Band 2	Low, Middle, High Channels
TM12	HSUPA Band 2	Low, Middle, High Channels

Testing Configure			
Support Band	Support Standard	Channel Frequency(MHz)	Channel Number
GSM 850	GSM/GPRS/EDGE	824.2	128
		836.6	190
		848.8	251
PCS 1900	GSM/GPRS/EDGE	1850.2	512
		1880.0	661
		1909.8	810
WCDMA Band 5	WCDMA/HSDPA/HSUPA	826.4	4132
		836.6	4183
		846.6	4233
WCDMA Band 2	WCDMA/HSDPA/HSUPA	1852.4	9262
		1880.0	9400
		1907.6	9538
Note: the transmitter has been tested on the communications mode of GSM, GPRS, EDGE, WCDMA, HSDPA, HSUPA compliance test and record the worst case.			

Test Conditions	
Temperature:	22~25 °C
Relative humidity	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.2	Unshielded	Without Ferrite
Earphone Cable	1.45	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Frequency Stability	Conducted	2.3%
Transmitter Spurious Emissions	Conducted	$\pm 0.42\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2018-05-22	2019-05-21
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2018-05-22	2019-05-21
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2018-05-22	2019-05-21
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2018-05-22	2019-05-21
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2018-05-22	2019-05-21
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2018-05-22	2019-05-21
SEMT-1082	Power Divider	RF-Lambda	RFLT4W5M18G	14110400027	2018-05-22	2019-05-21

SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2018-05-22	2019-05-21
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2017-06-08	2020-06-07
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2018-05-22	2019-05-21
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2018-05-22	2019-05-21
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2018-05-22	2019-05-21
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2018-03-19	2021-03-18
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2018-05-22	2019-05-21
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2018-05-22	2019-05-21
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2018-05-22	2019-05-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2018-03-19	2019-03-18
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2018-03-19	2019-03-18
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2018-03-19	2019-03-18
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2018-03-19	2019-03-18
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 1.1307, § 2.1093	RF Exposure	Compliant
§ 22.913 (a), § 24.232 (c)	RF Output Power	Compliant
§ 24.51	Peak-to-average Ratio (PAR) of Transmitter	Compliant
§ 22.917 (b), § 24.238 (b)	Emission Bandwidth	Compliant
§ 22.917 (a), § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliant
§ 22.917 (a), § 24.238 (a)	Spurious Radiation Emissions	Compliant
§ 22.917 (a), § 24.238 (a)	Out of Band Emissions	Compliant
§ 22.355, § 24.235	Frequency Stability	Compliant

3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the SAR report.

4. RF Output Power


4.1 Standard Applicable

According to §22.913(a)(2), The ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to §24.232 (c), Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

4.2 Test Procedure

- Conducted output power test method:

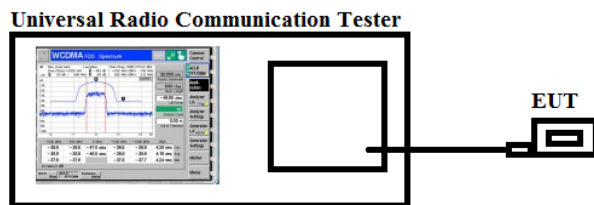

- Radiated power test method:

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

4.3 Summary of Test Results/Plots

➤ **Max. Radiated Power**

Mode	Channel	Antenna Polar	ERP (dBm)	Limit (dBm)	Result
GSM850	128	V	31.08	<38.45	Pass
		H	31.54		
	190	V	30.97		
		H	30.75		
	251	V	30.65		
		H	30.74		
GPRS850	128	V	31.32	<38.45	Pass
		H	31.20		
	190	V	31.24		
		H	31.05		
	251	V	31.25		
		H	31.44		
EGPRS850	128	V	24.05	<38.45	Pass
		H	24.21		
	190	V	24.32		
		H	24.08		
	251	V	24.19		
		H	24.35		

Mode	Channel	Antenna Polar	EIRP (dBm)	Limit (dBm)	Result
PCS1900	512	V	28.25	<33.00	Pass
		H	28.14		
	661	V	28.36		
		H	28.08		
	810	V	28.39		
		H	28.47		
GPRS1900	512	V	28.62	<33.00	Pass
		H	28.41		
	661	V	28.28		
		H	28.39		
	810	V	28.78		
		H	28.65		
EGPRS1900	512	V	24.18	<33.00	Pass
		H	24.36		
	661	V	23.36		
		H	23.98		
	810	V	23.78		
		H	23.69		

Mode	Channel	Antenna Polar	ERP	Limit (dBm)	Result
WCDMA Band V	4132	V	20.08	<38.45	Pass
		H	20.11		
	4183	V	20.31		
		H	20.41		
	4233	V	20.08		
		H	20.13		

Mode	Channel	Antenna Polar	EIRP	Limit (dBm)	Result
WCDMA Band II	9262	V	20.48	<33.00	Pass
		H	20.28		
	9400	V	20.65		
		H	20.41		
	9538	V	20.32		
		H	20.74		

Note: Pre-scan mode WCDMA/HSDPA/HSUPA find the worst case at WCDMA mode and recorded in the test report.

➤ **Max. Conducted Power (Average power)**

Conducted Average power (dBm)						
Band	GSM850			PCS1900		
Channel	128	190	251	512	661	810
Frequency(MHz)	824.20	836.60	848.80	1850.20	1880.00	1909.80
GSM	33.34	33.43	33.41	30.42	30.51	30.20
GPRS(1Slot)	33.29	33.38	33.36	30.52	30.60	30.23
EGPRS(1Slot)	25.84	26.13	25.80	25.38	25.51	25.65

Conducted Average power (dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4183	4233	9262	9400	9538
Frequency(MHz)	826.4	836.6	846.6	1852.4	1880.0	1907.6
RMC 12.2k	21.62	21.59	21.57	21.66	21.67	21.63
HSDPA Subtest-1	21.54	21.17	21.17	21.55	21.29	21.18
HSDPA Subtest-2	21.51	21.15	21.15	21.52	21.25	21.16
HSDPA Subtest-3	21.53	21.15	21.14	21.52	21.27	21.17
HSDPA Subtest-4	21.51	21.14	21.15	21.53	21.26	21.15
HSUPA Subtest-1	21.55	21.24	21.20	21.60	21.36	21.21
HSUPA Subtest-2	21.52	21.22	21.18	21.58	21.32	21.19
HSUPA Subtest-3	21.53	21.22	21.18	21.56	21.34	21.18
HSUPA Subtest-4	21.54	21.23	21.17	21.57	21.35	21.18
HSUPA Subtest-5	21.51	21.22	21.16	21.56	21.34	21.20

5. Peak-to-average Ratio (PAR) of Transmitter

5.1 Standard Applicable


According to §24.232(d), Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

5.2 Test Procedure

According with KDB 971168

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Configuration for the emission bandwidth testing:

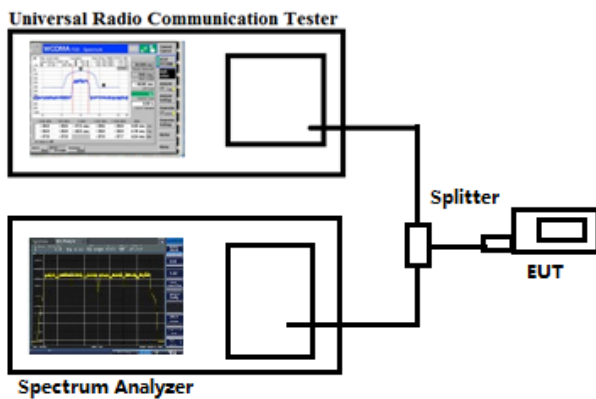

5.3 Summary of Test Results

PCS1900				
Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
GSM	661	1850.2	4.65	13

GPRS(1 Slot)	661	1850.2	5.38	13
EDGE(1 Slot)	661	1850.2	5.08	13

WCDMA Band II				
Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
WCDMA	9262	1852.4	5.32	13
	9400	1880.0	4.98	13
	9538	1907.6	5.17	13

Note: Only the worst case was selected to record.

6. Emission Bandwidth

6.1 Standard Applicable


According to §22.917(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §24.238(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

6.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 10kHz for GSM mode and 100kHz for WCDMA mode, VBW shall be at least 3 times the RBW, and the 26dB bandwidth was recorded.

Test Configuration for the emission bandwidth testing:



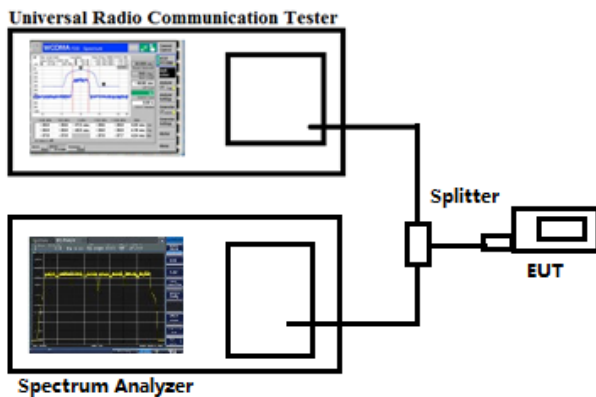


6.3 Summary of Test Results/Plots

EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (kHz)	-26dB bandwidth (kHz)
----------	---------	-----------------	----------------------------	-----------------------


GSM 850 (GMSK)	128	824.20	255.5912	316.049
	190	836.60	246.9060	316.276
	251	848.80	251.1988	327.608
GPRS850 (GMSK,1Slot)	128	824.20	245.1894	318.558
	190	836.60	249.7997	315.322
	251	848.80	242.1654	315.873
EGPRS850 (8PSK,1Slot)	128	824.20	247.3597	317.738
	190	836.60	247.8097	308.370
	251	848.80	249.6442	315.136
PCS1900 (GMSK)	512	1850.20	255.1821	322.044
	661	1880.00	245.3022	314.311
	810	1909.80	243.8903	320.214
GPRS1900 (GMSK,1Slot)	512	1850.20	246.5683	315.225
	661	1880.00	239.2634	325.057
	810	1909.80	237.0407	313.629
EGPRS1900 (8PSK,1Slot)	512	1850.20	243.5838	318.934
	661	1880.00	248.4348	316.960
	810	1909.80	245.4399	318.346

EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (kHz)	-26dB bandwidth (kHz)
WCDMA Band V	4132	826.40	4165.6	4709
	4183	836.60	4139.5	4695
	4233	846.60	4150.5	4679
HSDPA	4132	826.40	4145.8	4698
	4183	836.60	4164.5	4702
	4233	846.60	4153.3	4682
HSUPA	4132	826.40	4158.2	4697
	4183	836.60	4180.5	4683
	4233	846.60	4159.4	4679
WCDMA Band II	9262	1852.40	4159.4	4.696
	9400	1880.00	4141.6	4724
	9538	1907.60	4185.5	4705
HSDPA	9262	1852.40	4148.9	4688
	9400	1880.00	4145.4	4685
	9538	1907.60	4157.6	4709
HSUPA	9262	1852.40	4132.3	4670
	9400	1880.00	4152.7	4683
	9538	1907.60	4178.3	4707

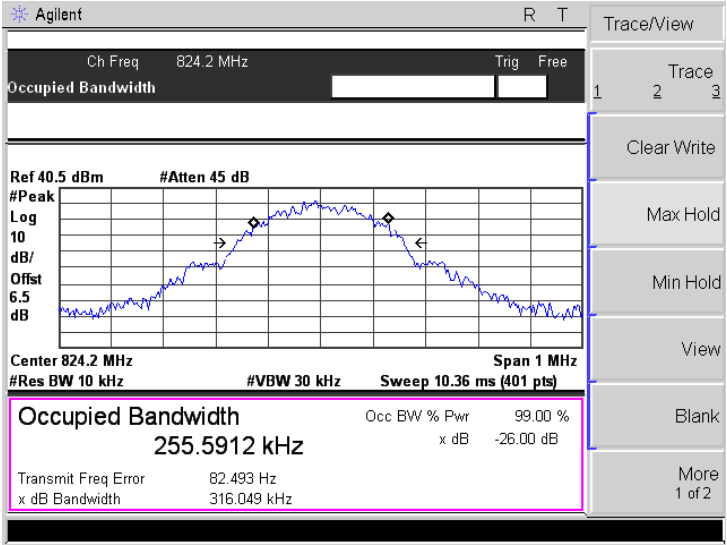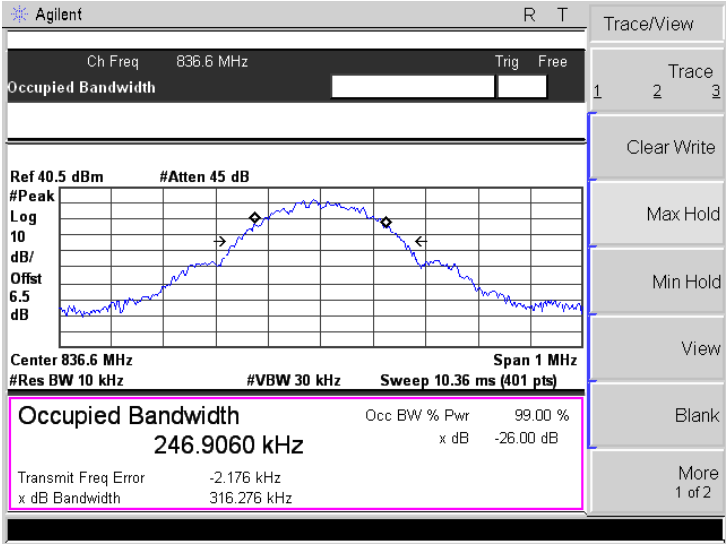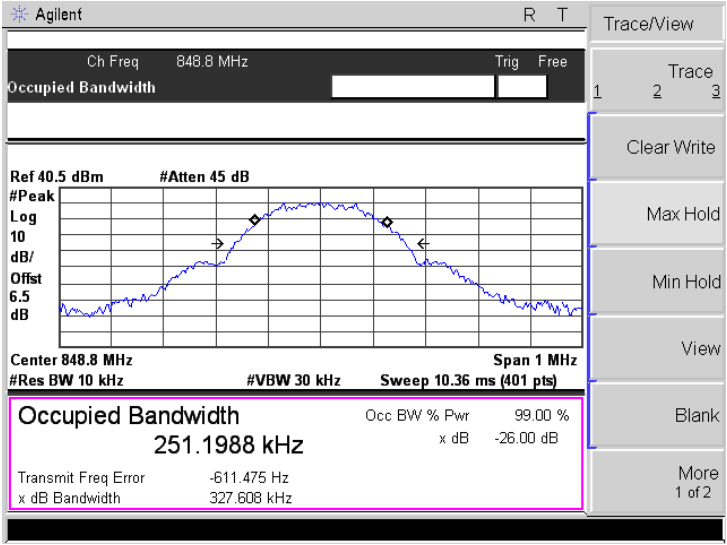
GSM850	
Low Channel	 Agilent R T Trace/View Ch Freq 824.2 MHz Trig Free Occupied Bandwidth Ref 40.5 dBm #Atten 45 dB #Peak Log 10 dB/Offset 6.5 dB Center 824.2 MHz Span 1 MHz #Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (401 pts) Occupied Bandwidth Occ BW % Pwr 99.00 % 255.5912 kHz x dB -26.00 dB Transmit Freq Error 82.493 Hz x dB Bandwidth 316.049 kHz Trace/View: 1 2 3, Clear Write, Max Hold, Min Hold, View, Blank, More 1 of 2
Middle Channel	 Agilent R T Trace/View Ch Freq 836.6 MHz Trig Free Occupied Bandwidth Ref 40.5 dBm #Atten 45 dB #Peak Log 10 dB/Offset 6.5 dB Center 836.6 MHz Span 1 MHz #Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (401 pts) Occupied Bandwidth Occ BW % Pwr 99.00 % 246.9060 kHz x dB -26.00 dB Transmit Freq Error -2.176 kHz x dB Bandwidth 316.276 kHz Trace/View: 1 2 3, Clear Write, Max Hold, Min Hold, View, Blank, More 1 of 2
High Channel	 Agilent R T Trace/View Ch Freq 848.8 MHz Trig Free Occupied Bandwidth Ref 40.5 dBm #Atten 45 dB #Peak Log 10 dB/Offset 6.5 dB Center 848.8 MHz Span 1 MHz #Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (401 pts) Occupied Bandwidth Occ BW % Pwr 99.00 % 251.1988 kHz x dB -26.00 dB Transmit Freq Error -611.475 Hz x dB Bandwidth 327.608 kHz Trace/View: 1 2 3, Clear Write, Max Hold, Min Hold, View, Blank, More 1 of 2

GPRS850


Low Channel

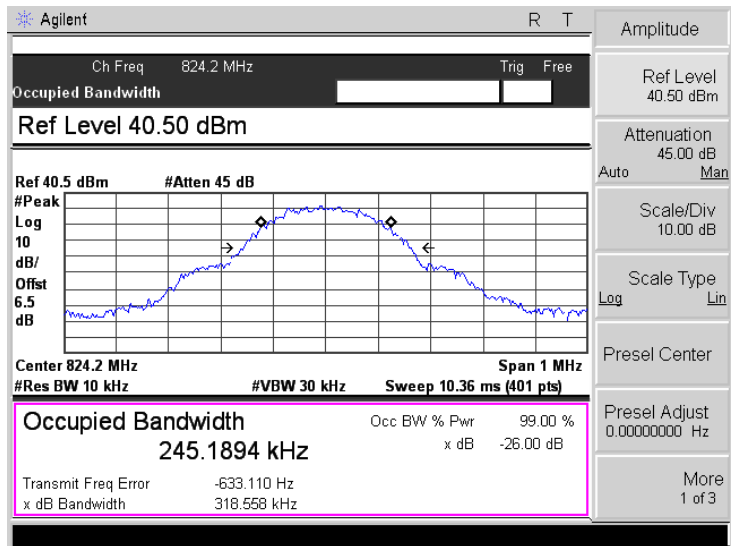

Middle Channel

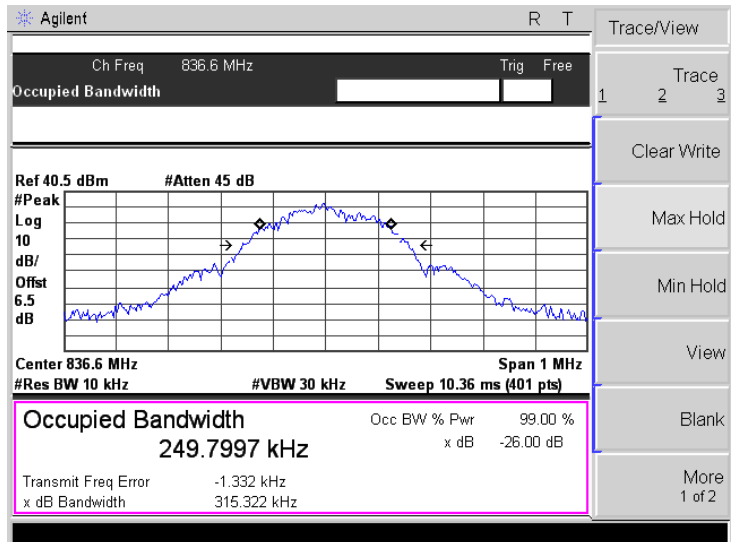


High Channel

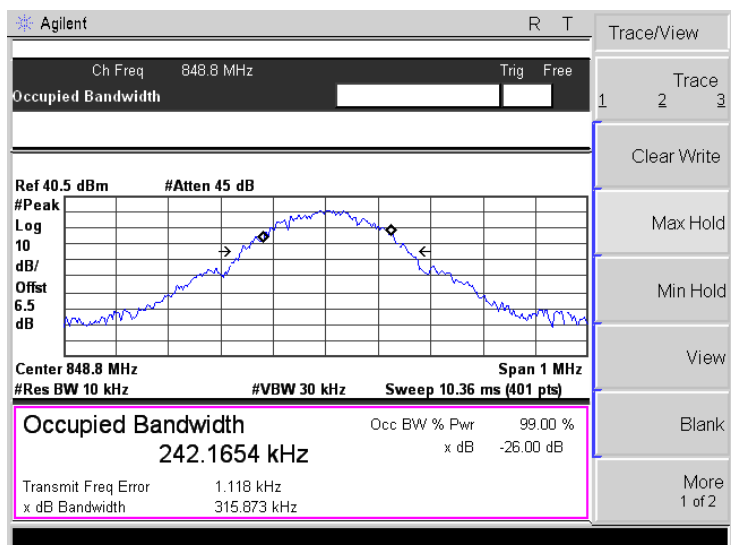


EGPRS850


Low Channel



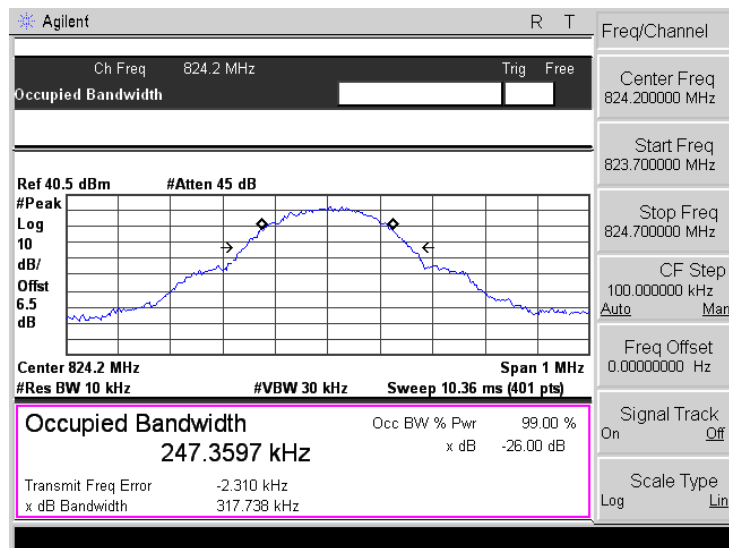


Middle Channel

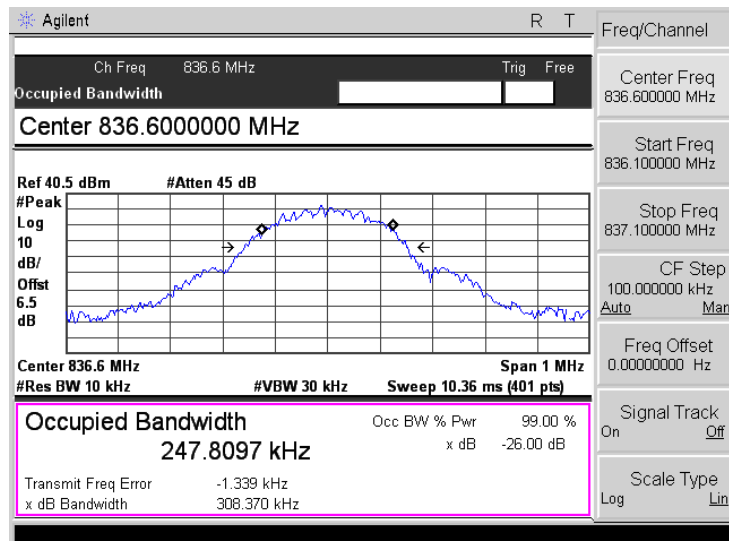


High Channel

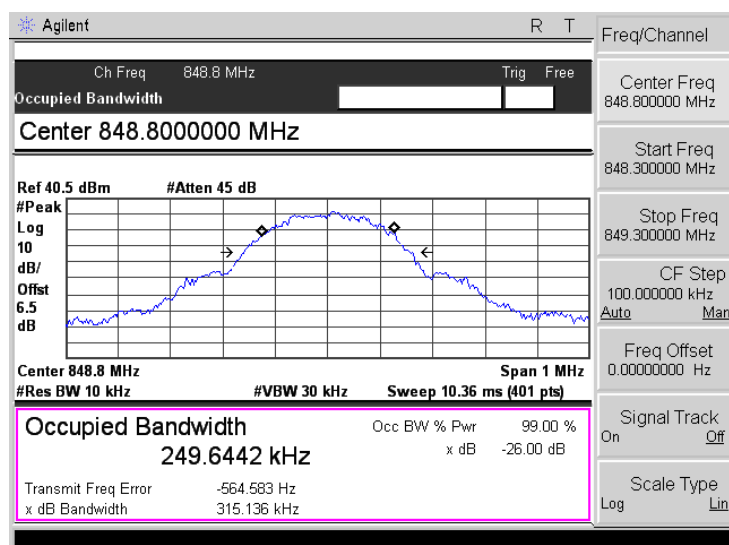

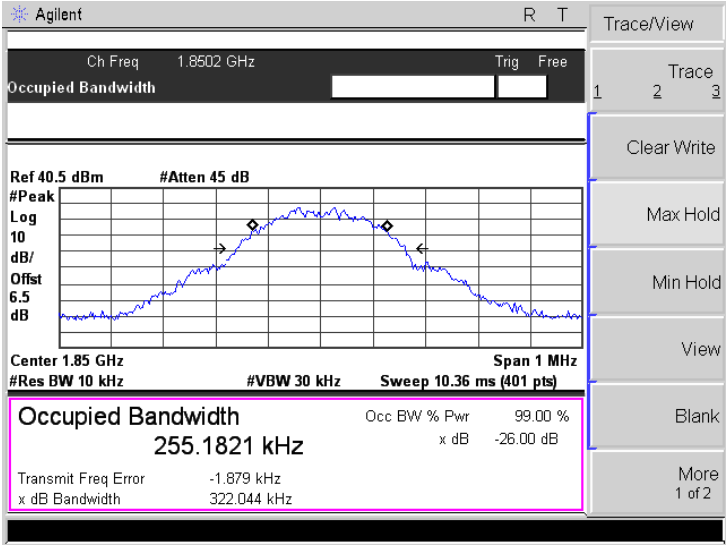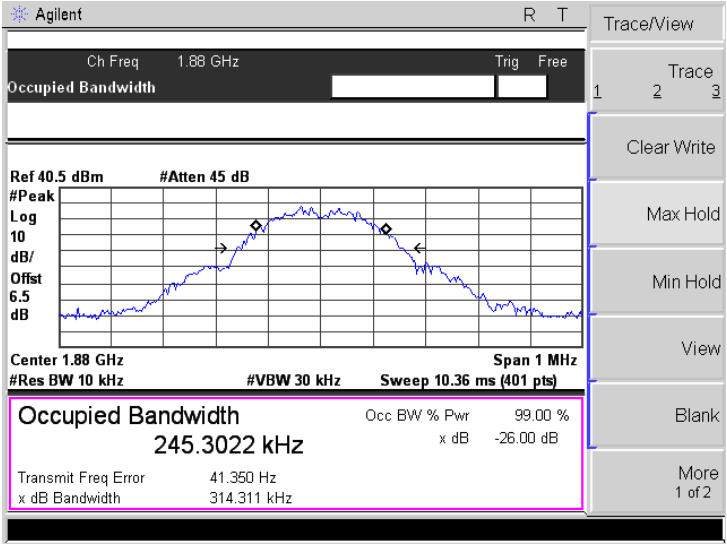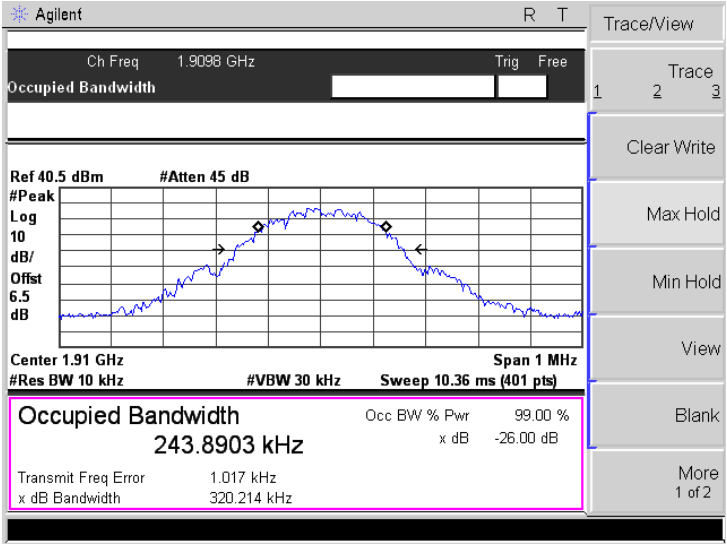
PCS1900	
Low Channel	
Middle Channel	
High Channel	

GPRS1900


Low Channel



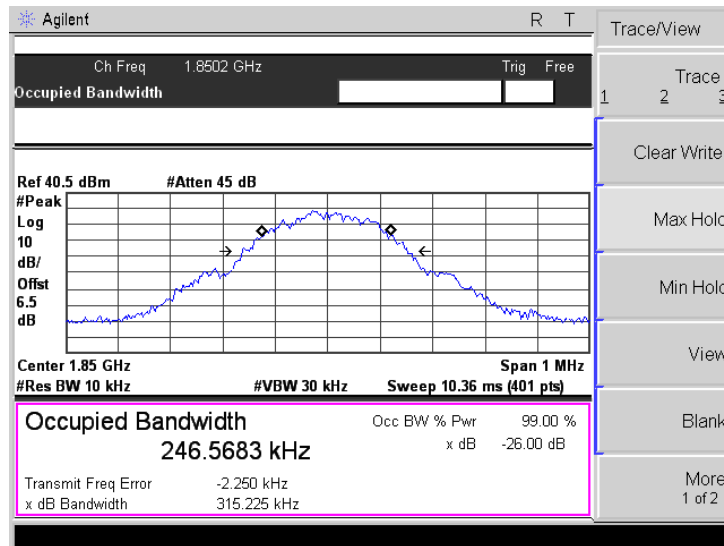





Middle Channel

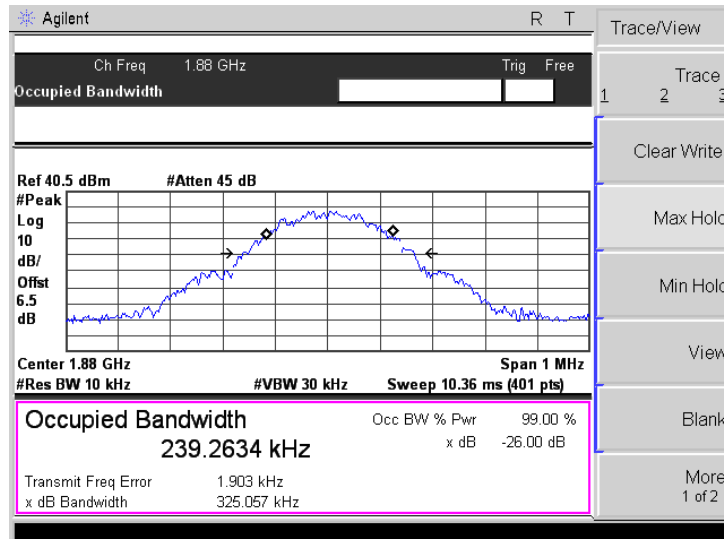

High Channel

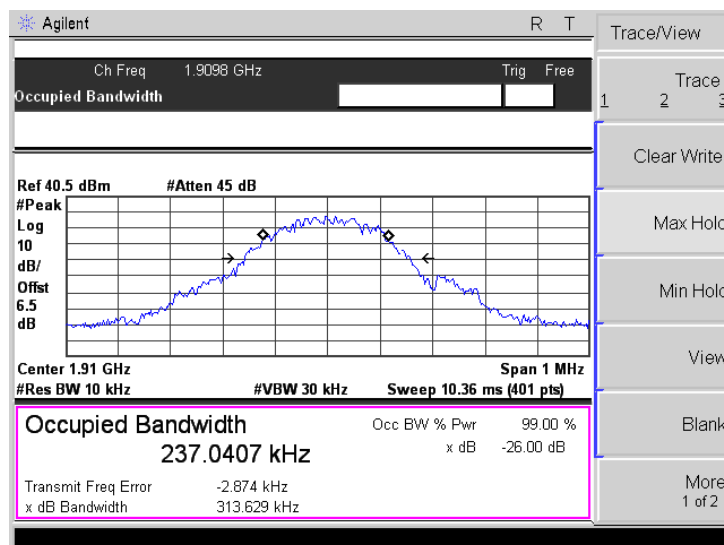


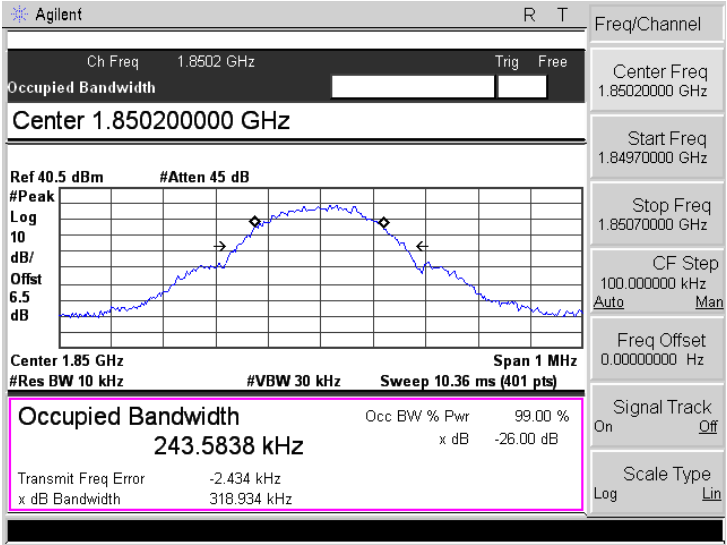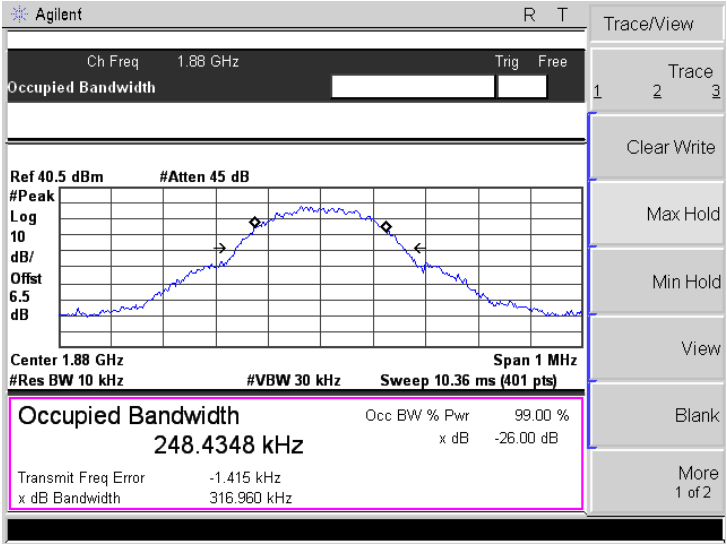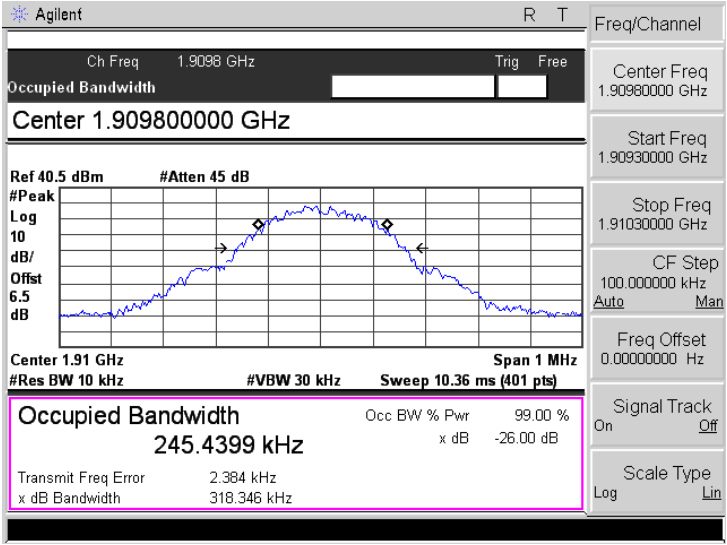EGPRS1900	
Low Channel	 Agilent R T Ch Freq 1.8502 GHz Trig Free Occupied Bandwidth Center 1.85020000 GHz Ref 40.5 dBm #Atten 45 dB #Peak Log 10 dB/Offset 6.5 dB Center 1.85 GHz Span 1 MHz #Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (401 pts) Occupied Bandwidth 243.5838 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -2.434 kHz x dB Bandwidth 318.934 kHz Freq/Channel Center Freq 1.85020000 GHz Start Freq 1.84970000 GHz Stop Freq 1.85070000 GHz CF Step 100.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
Middle Channel	 Agilent R T Ch Freq 1.88 GHz Trig Free Occupied Bandwidth Center 1.88 GHz Ref 40.5 dBm #Atten 45 dB #Peak Log 10 dB/Offset 6.5 dB Center 1.88 GHz Span 1 MHz #Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (401 pts) Occupied Bandwidth 248.4348 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -1.415 kHz x dB Bandwidth 316.960 kHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
High Channel	 Agilent R T Ch Freq 1.9098 GHz Trig Free Occupied Bandwidth Center 1.90980000 GHz Ref 40.5 dBm #Atten 45 dB #Peak Log 10 dB/Offset 6.5 dB Center 1.91 GHz Span 1 MHz #Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (401 pts) Occupied Bandwidth 245.4399 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 2.384 kHz x dB Bandwidth 318.346 kHz Freq/Channel Center Freq 1.90980000 GHz Start Freq 1.90930000 GHz Stop Freq 1.91030000 GHz CF Step 100.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

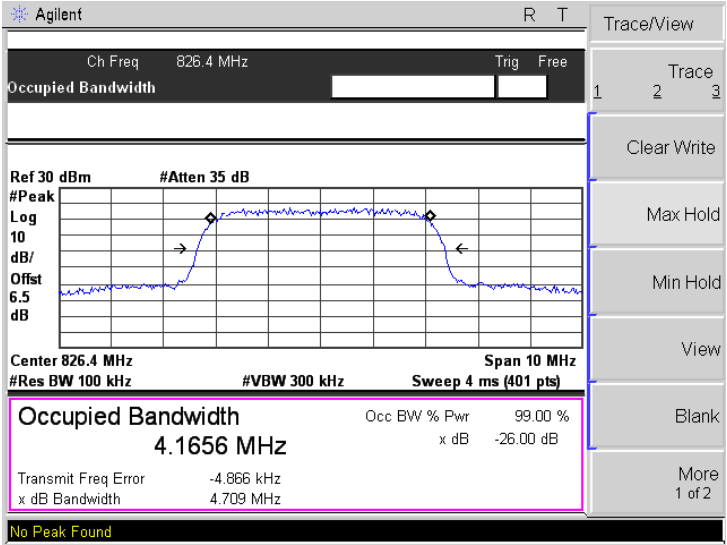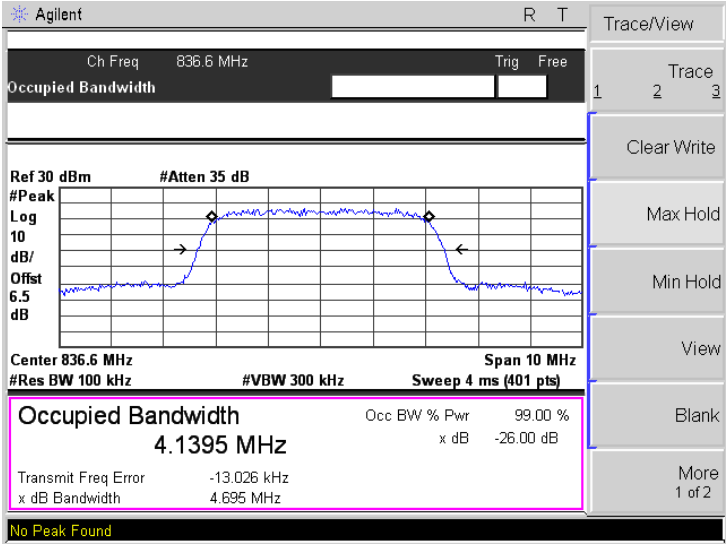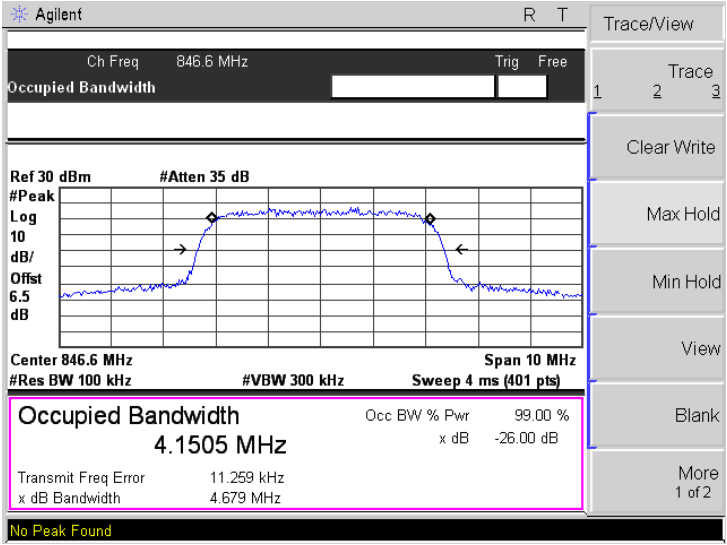
WCDMA Band V	
Low Channel	 Agilent R T Ch Freq 826.4 MHz Trig Free Occupied Bandwidth Ref 30 dBm #Atten 35 dB #Peak Log 10 dB/Offset 6.5 dB Center 826.4 MHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts) Occupied Bandwidth 4.1656 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -4.866 kHz x dB Bandwidth 4.709 MHz No Peak Found Trace/View: 1 Trace 2 3, Clear Write, Max Hold, Min Hold, View, Blank, More 1 of 2
Middle Channel	 Agilent R T Ch Freq 836.6 MHz Trig Free Occupied Bandwidth Ref 30 dBm #Atten 35 dB #Peak Log 10 dB/Offset 6.5 dB Center 836.6 MHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts) Occupied Bandwidth 4.1395 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -13.026 kHz x dB Bandwidth 4.695 MHz No Peak Found Trace/View: 1 Trace 2 3, Clear Write, Max Hold, Min Hold, View, Blank, More 1 of 2
High Channel	 Agilent R T Ch Freq 846.6 MHz Trig Free Occupied Bandwidth Ref 30 dBm #Atten 35 dB #Peak Log 10 dB/Offset 6.5 dB Center 846.6 MHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts) Occupied Bandwidth 4.1505 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 11.259 kHz x dB Bandwidth 4.679 MHz No Peak Found Trace/View: 1 Trace 2 3, Clear Write, Max Hold, Min Hold, View, Blank, More 1 of 2

WCDMA Band V- HSDPA


Low Channel

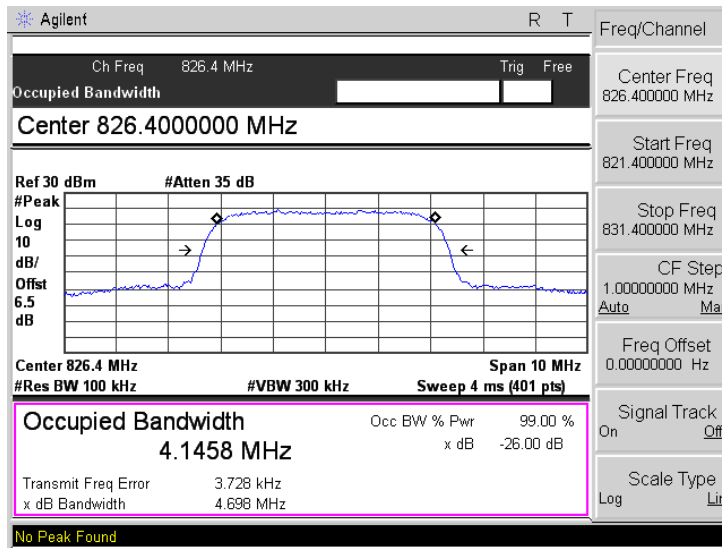

Middle Channel

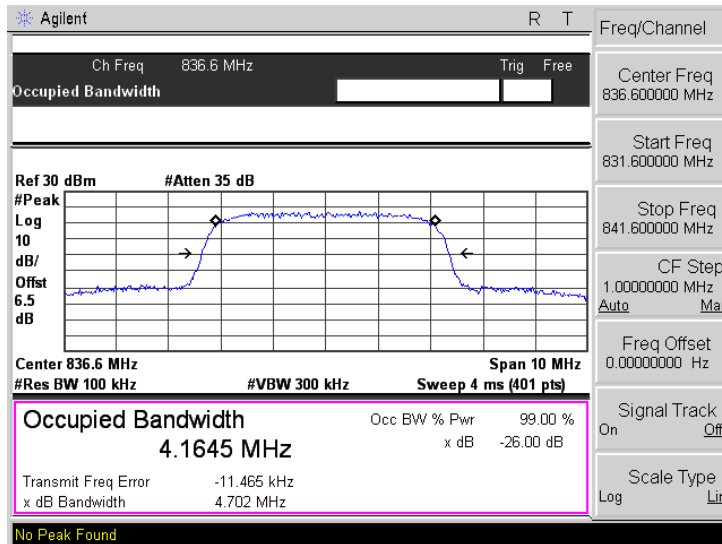


High Channel

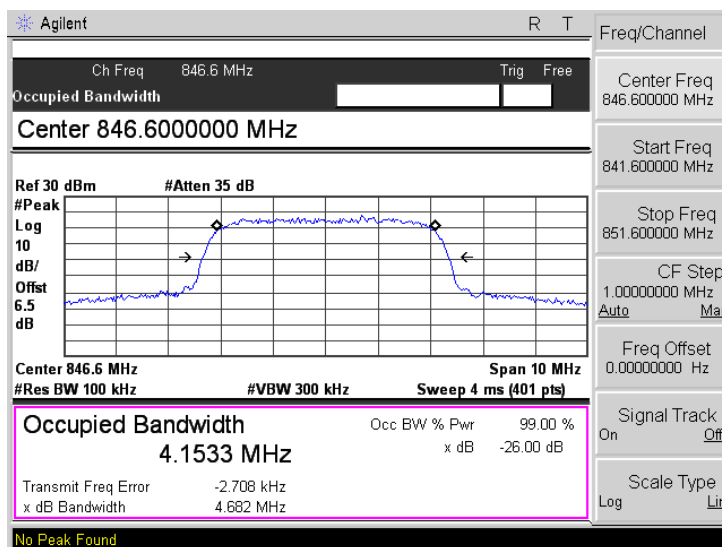


WCDMA Band V- HSUPA


Low Channel

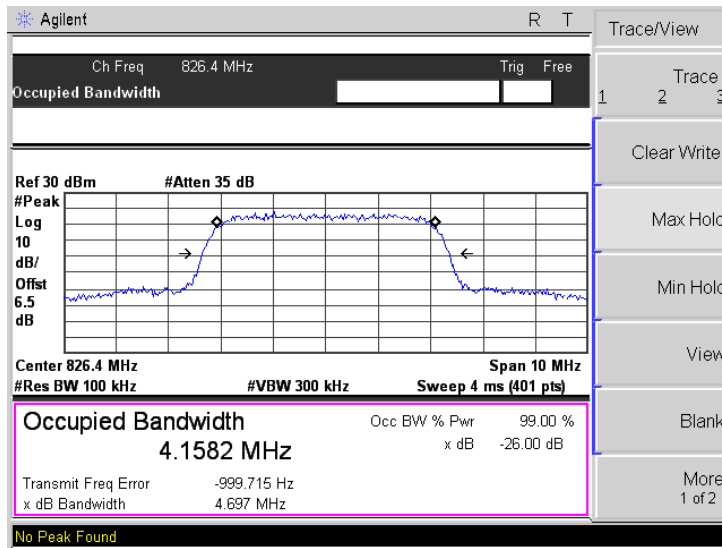

Middle Channel

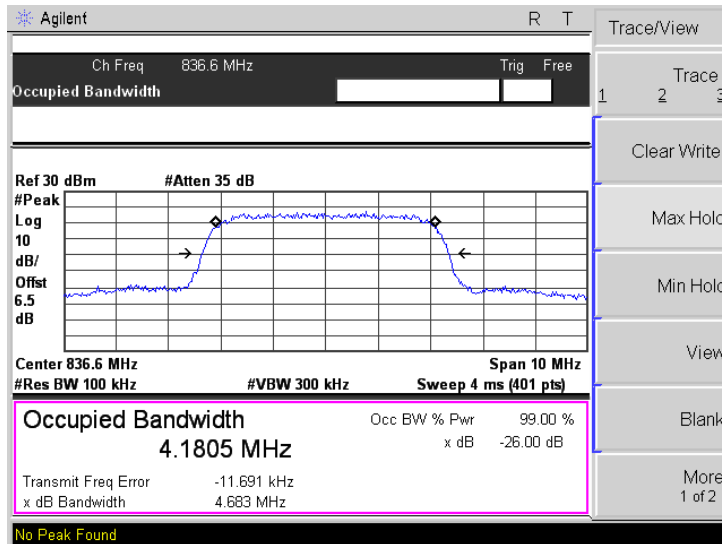


High Channel

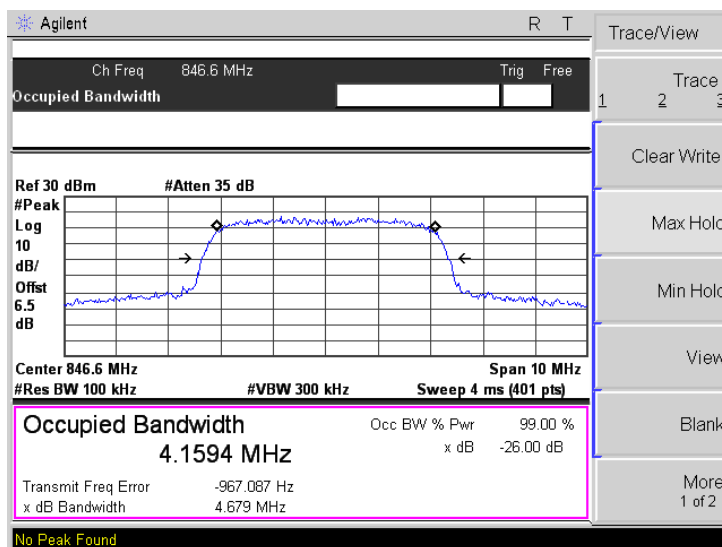


WCDMA Band II


Low Channel

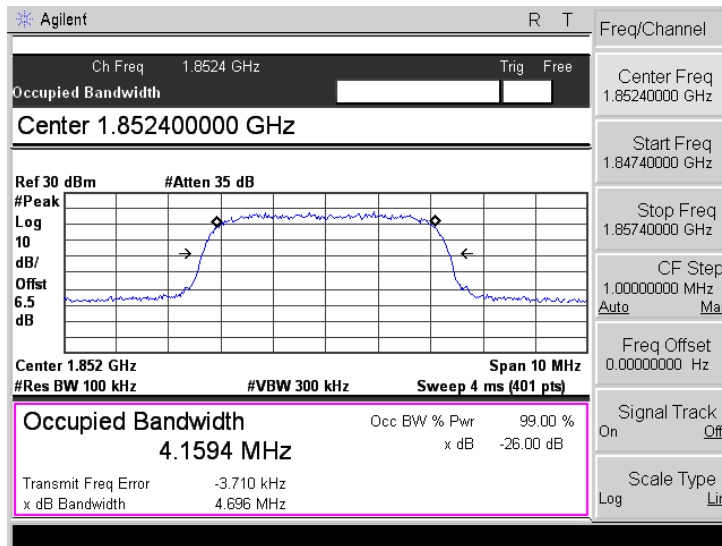

Middle Channel

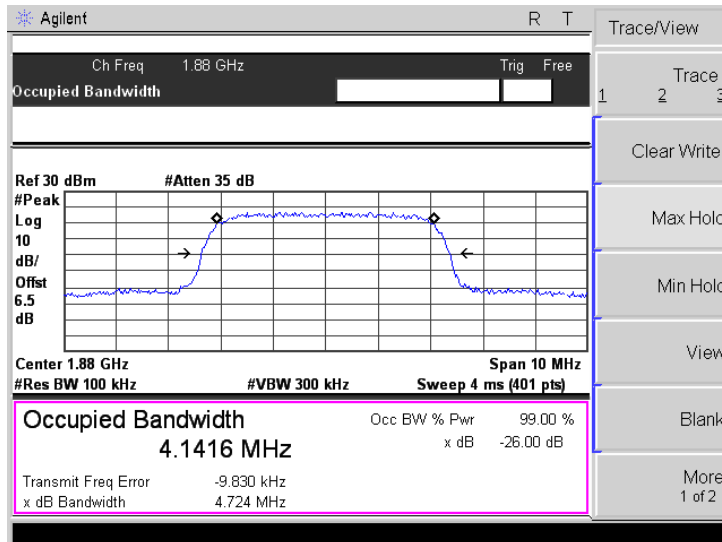


High Channel

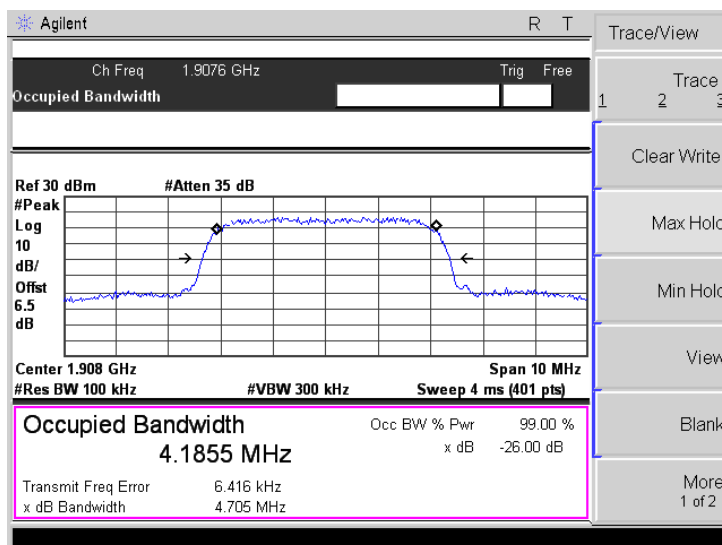


WCDMA Band II- HSDPA


Low Channel

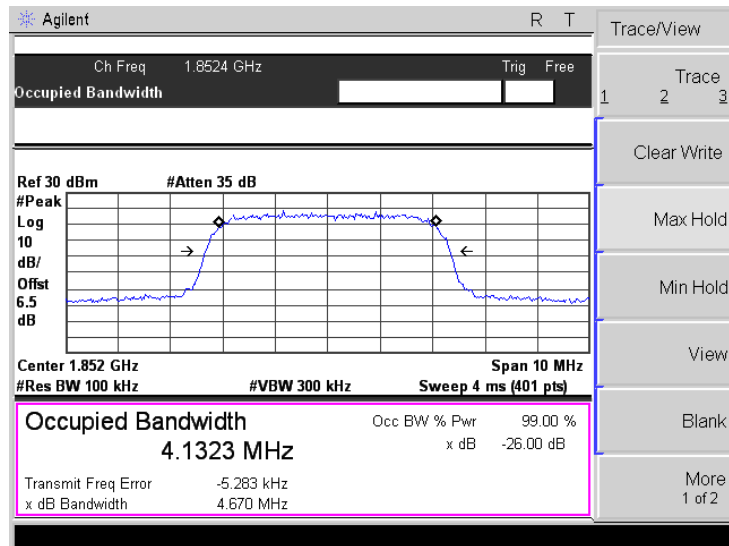

Middle Channel

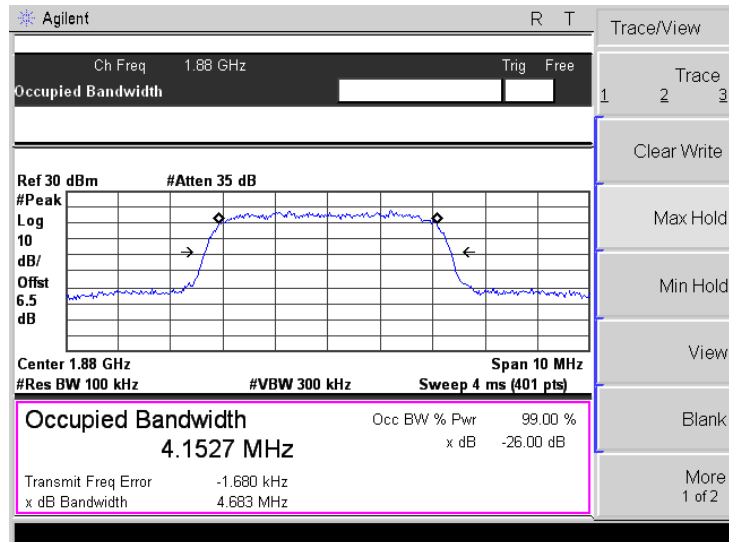


High Channel

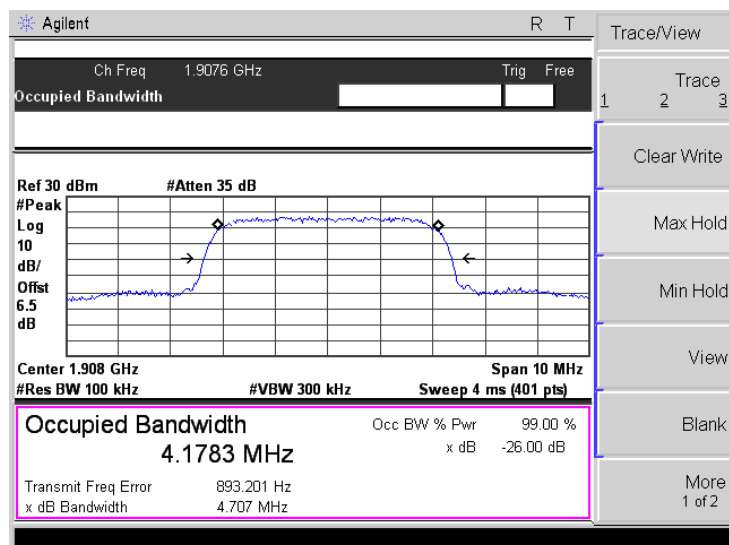


WCDMA Band II- HSUPA


Low Channel

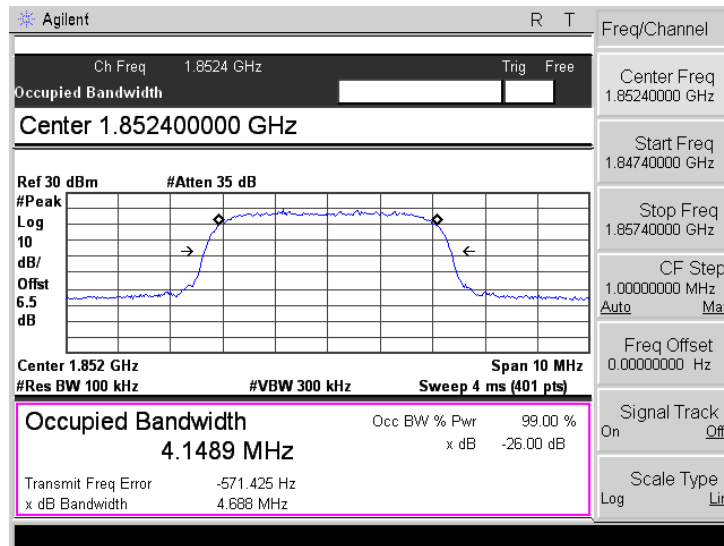

Middle Channel

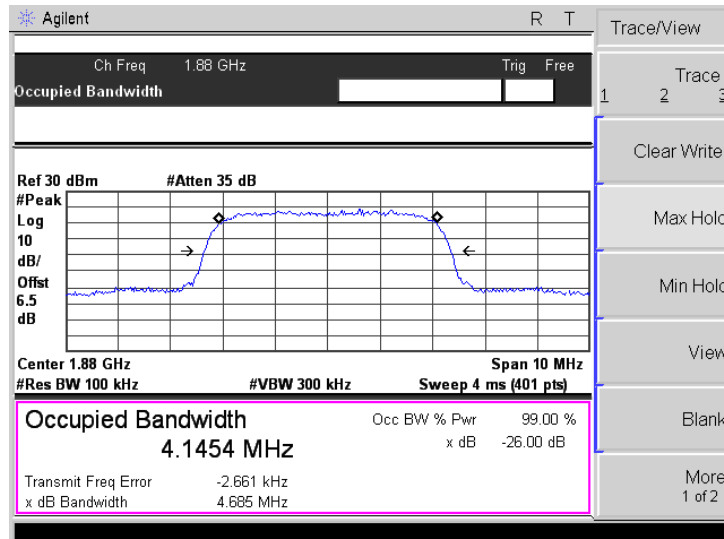

High Channel

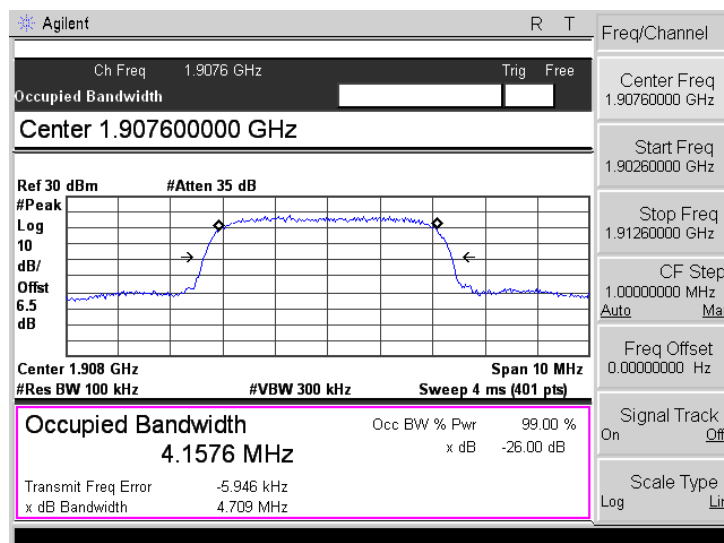

7. Out of Band Emissions at Antenna Terminal

7.1 Standard Applicable


According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

7.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10th harmonic.

Test Configuration for the out of band emissions testing:

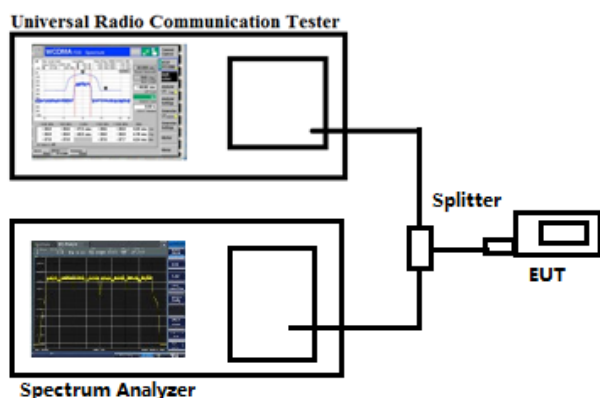



7.3 Summary of Test Results/Plots

Note: Pre-scan mode WCDMA/HSDPA/HSUPA find the worst case at WCDMA mode and recorded in the test report.

Please refer to the following test plots



GSM850

Low Channel

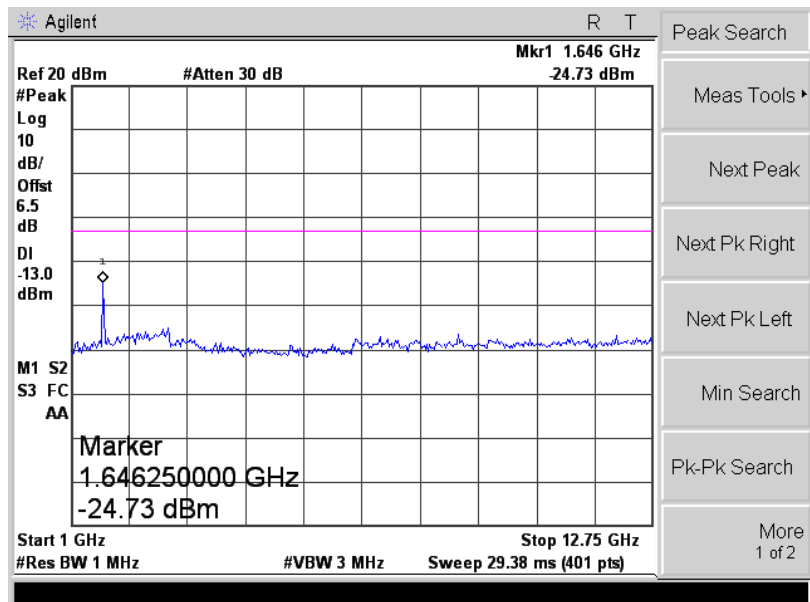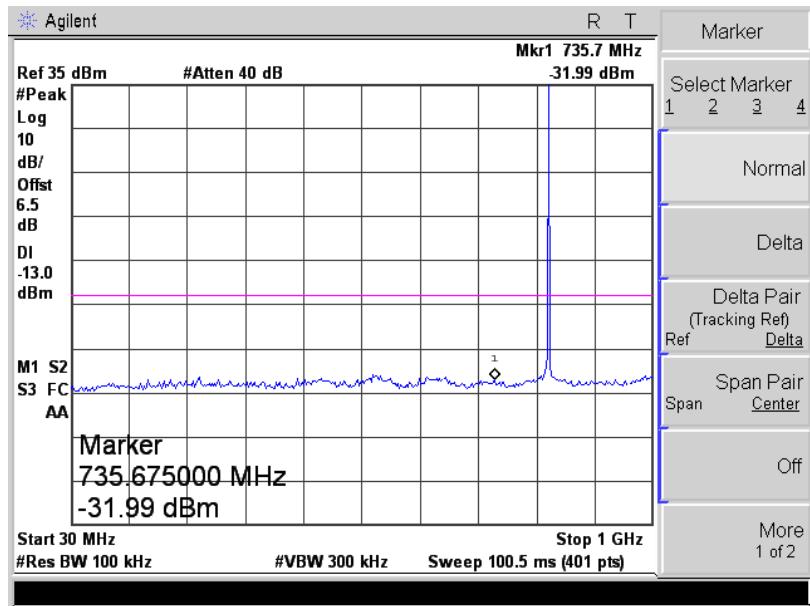



GSM850

Middle Channel

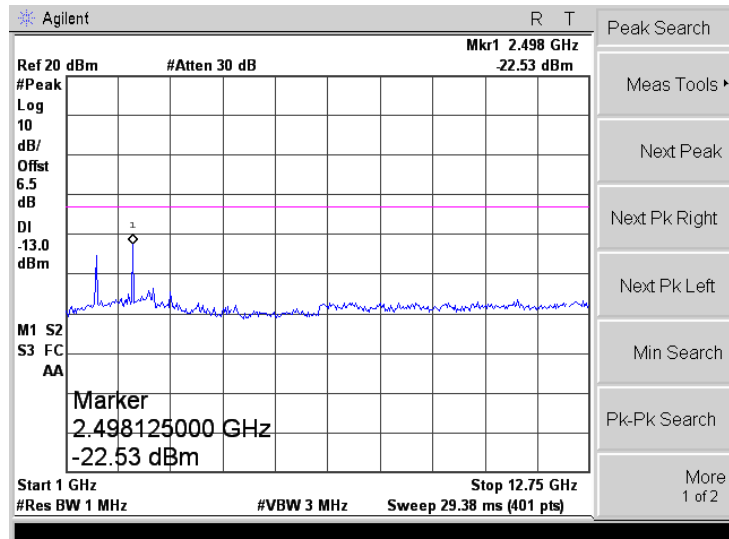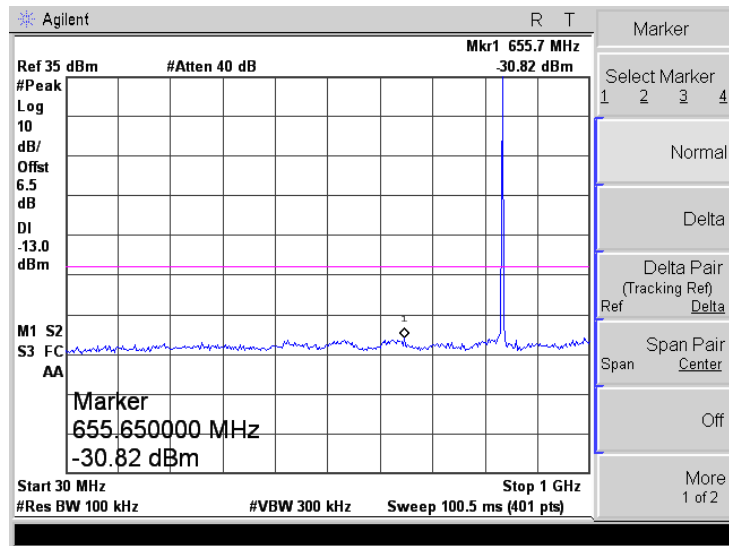


GSM850

High Channel

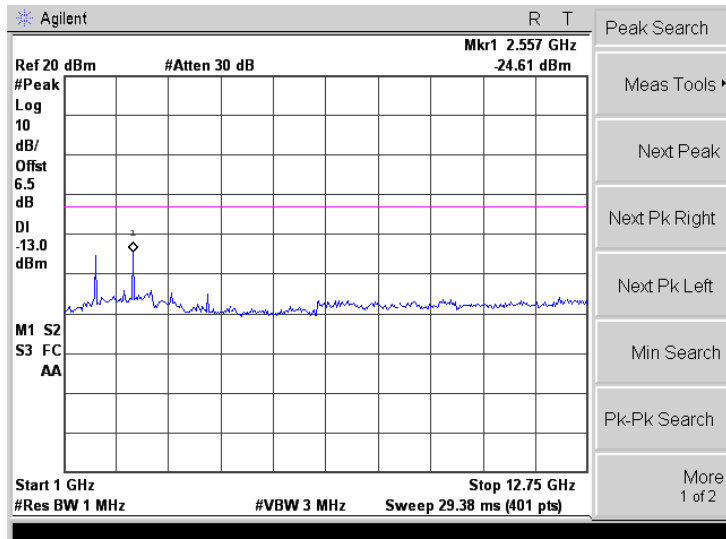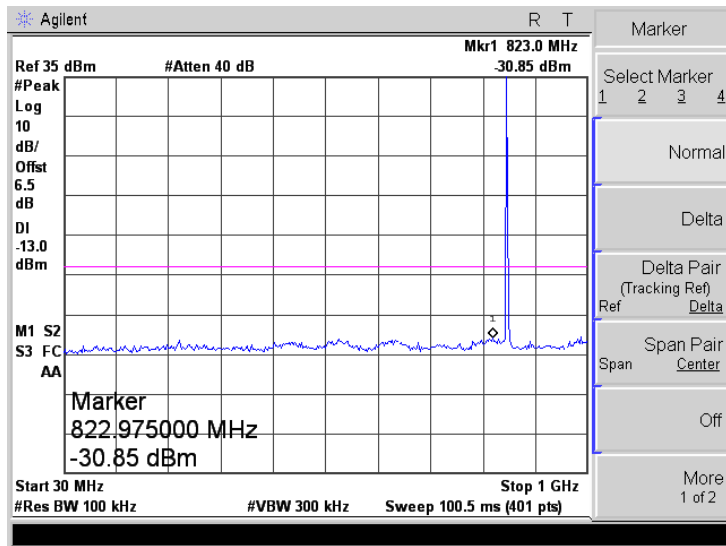


GSM850

Low Band Emission


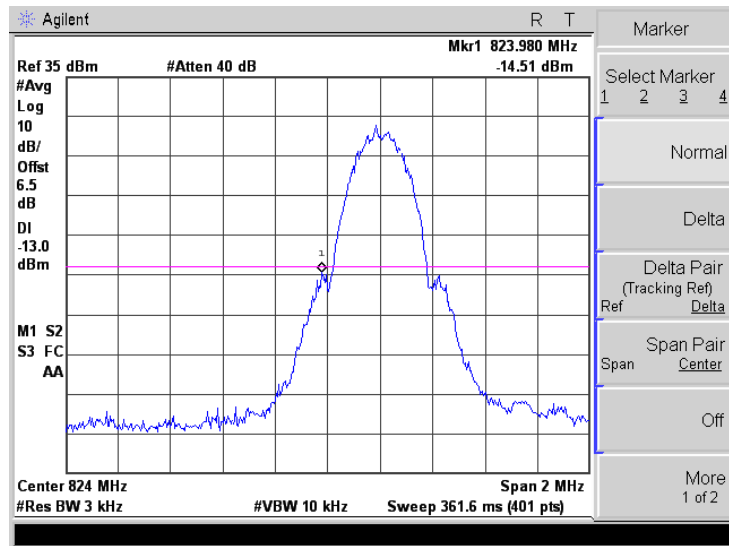


High Band Emission

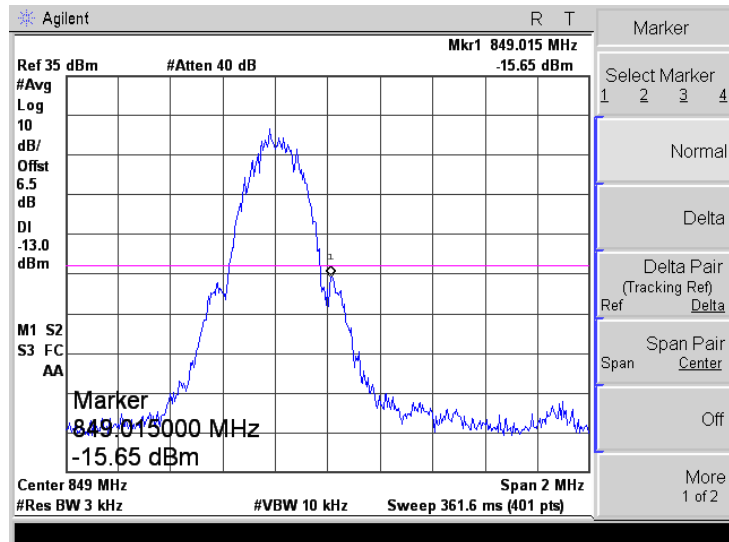



For Cellular Band

GPRS Low Channel

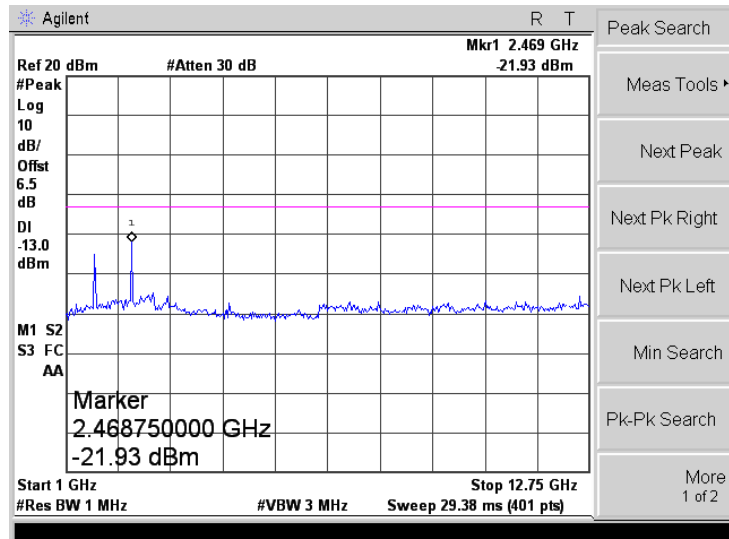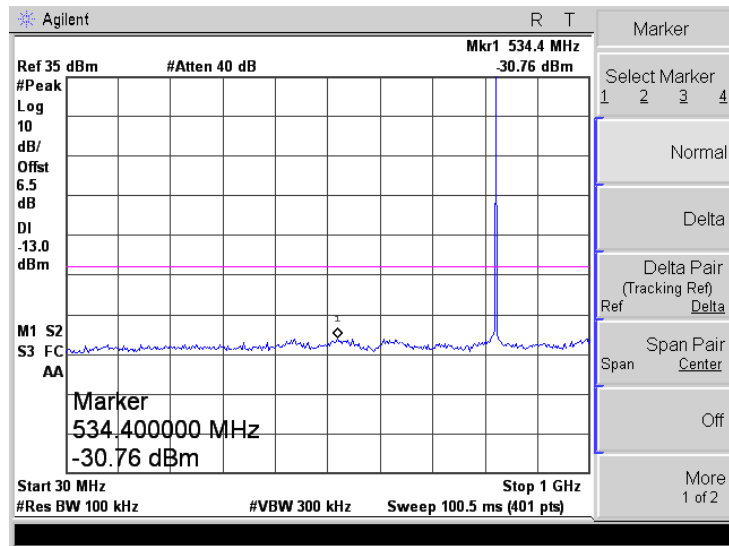



GPRS850

Middle Channel

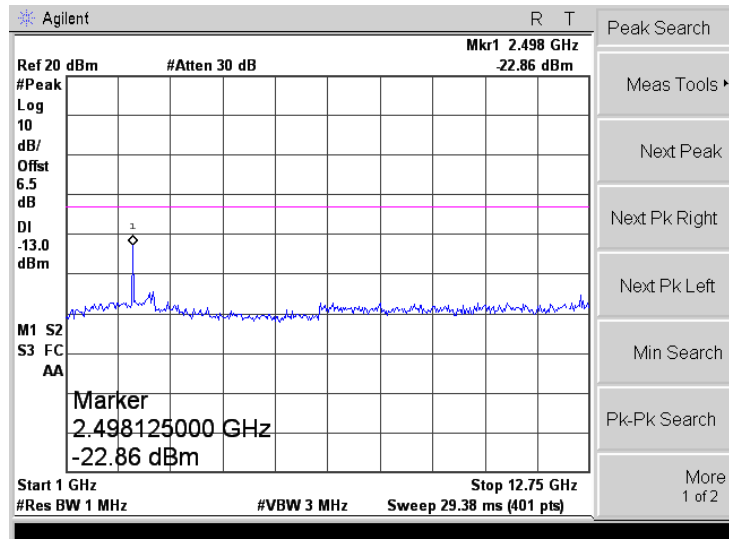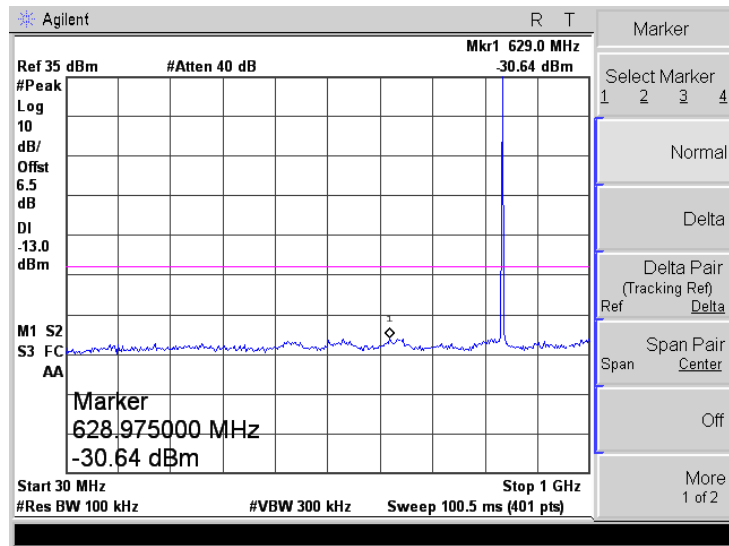


GPRS850

High Channel

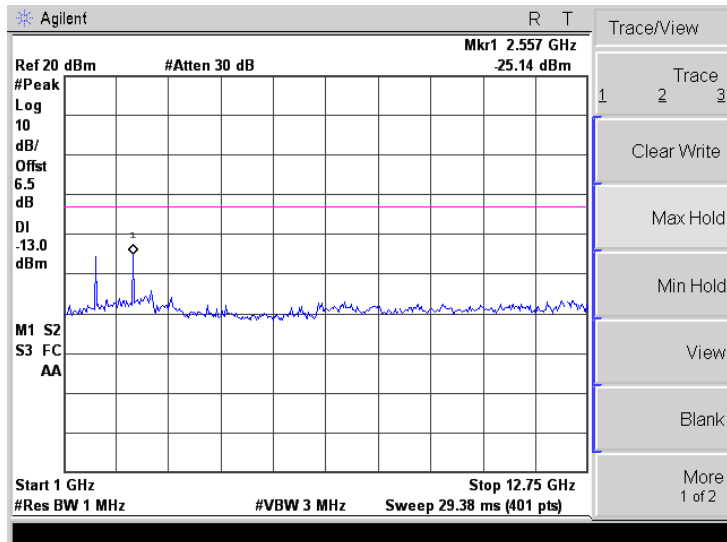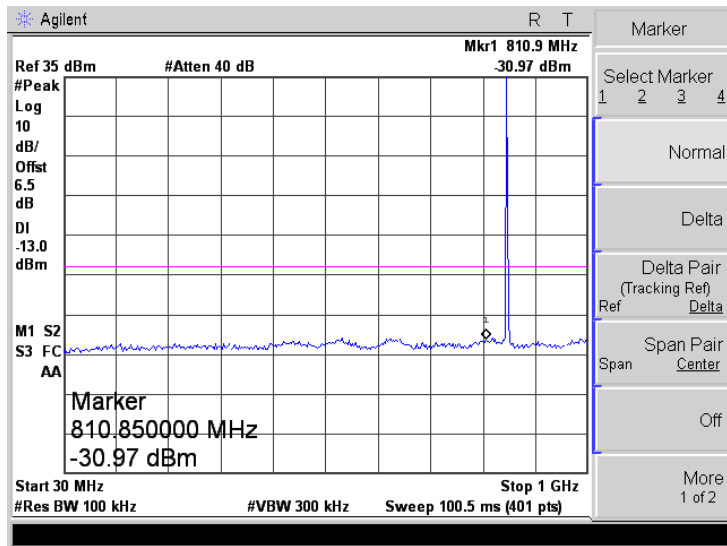


GPRS850

Low Band Emission


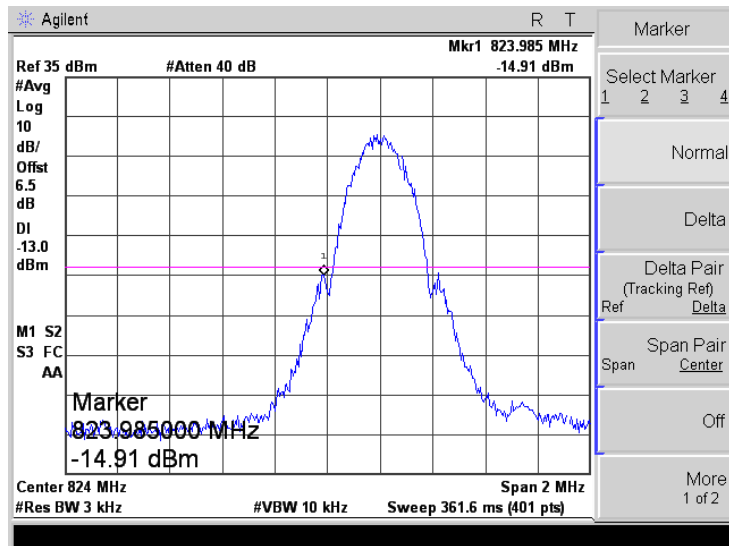


High Band Emission

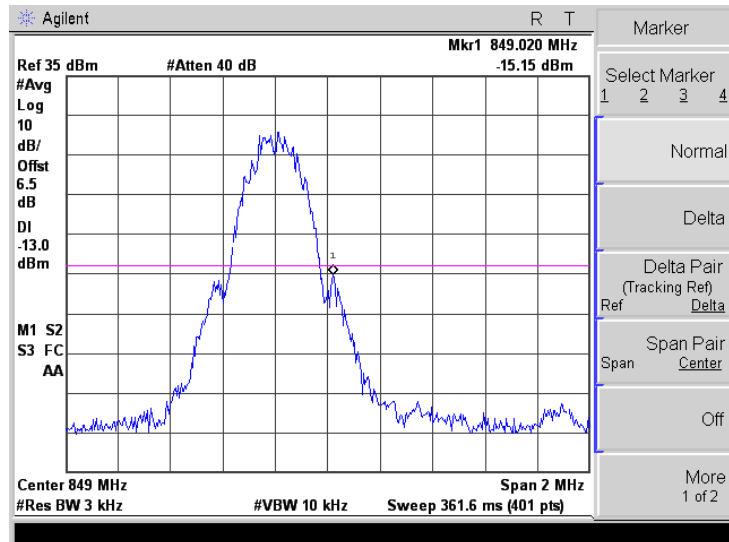



EGPRS850

Low Channel

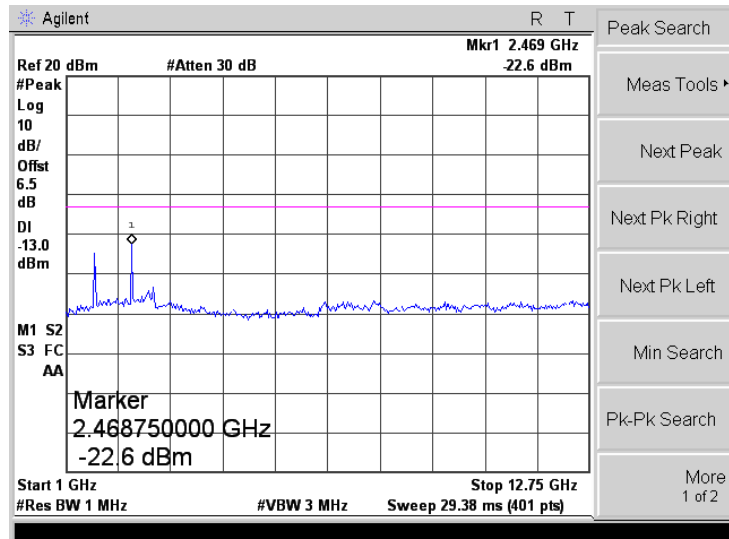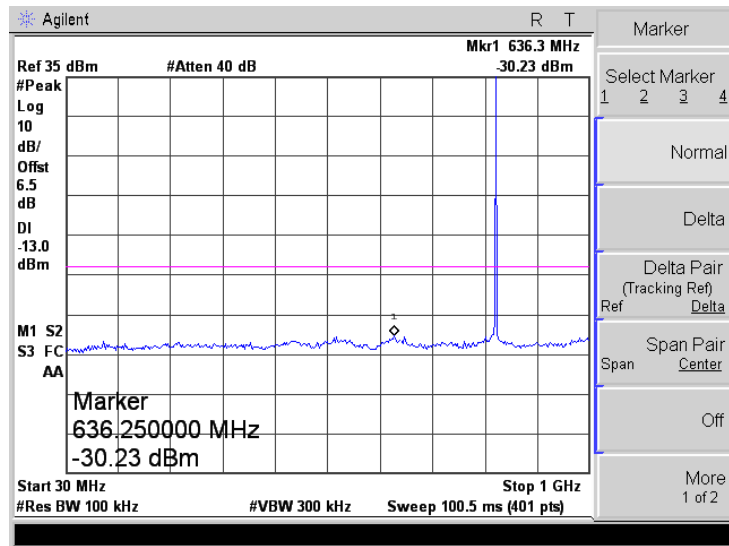



EGPRS850

Middle Channel

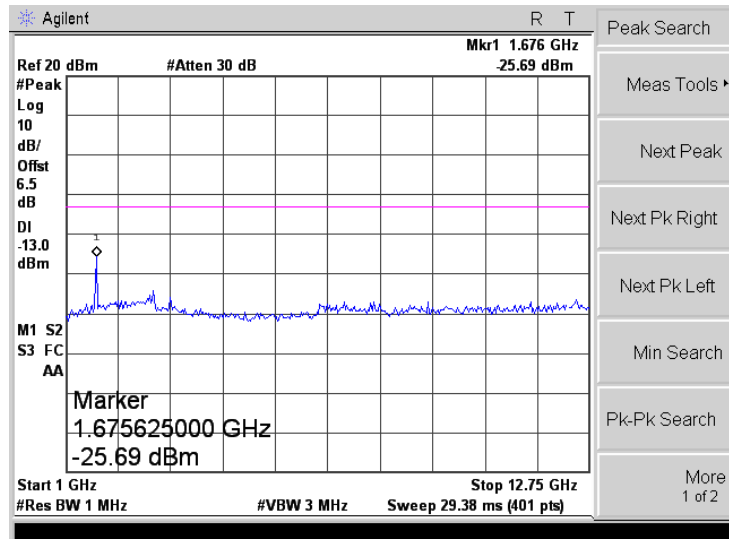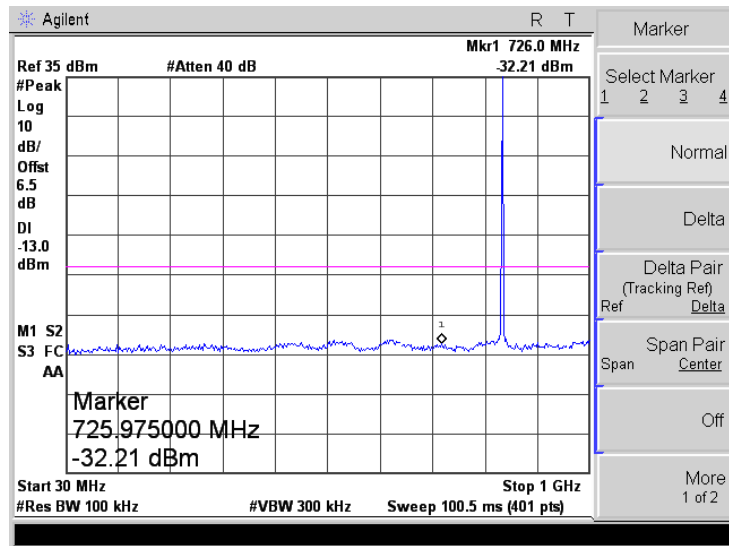

EGPRS850


High Channel

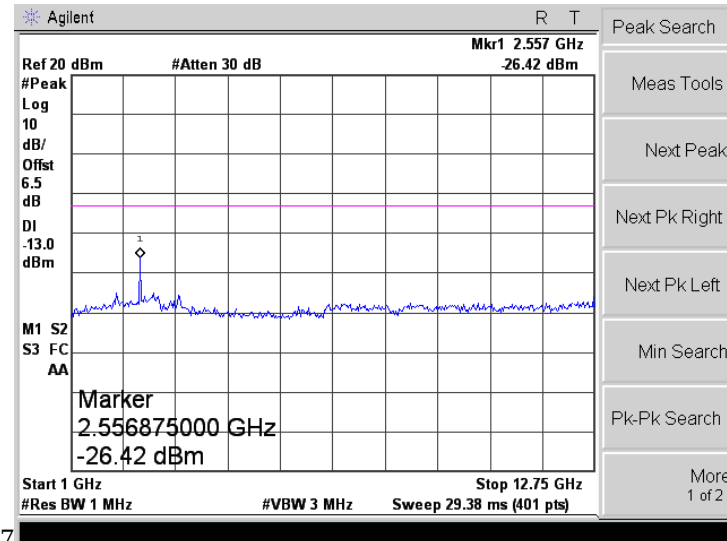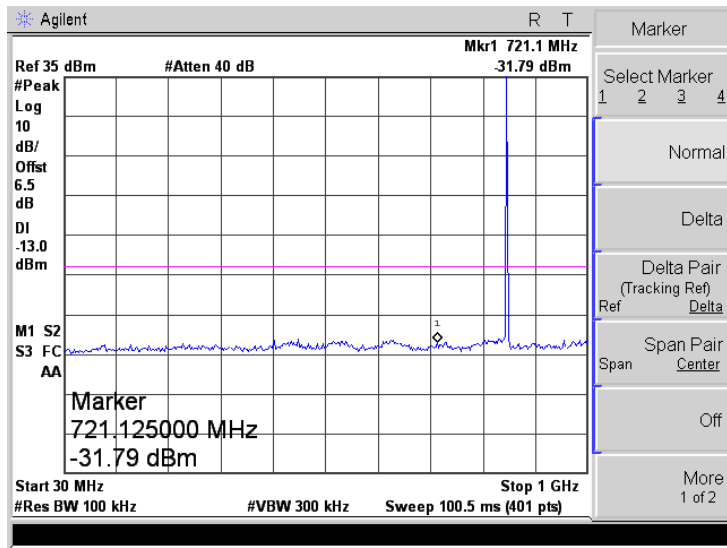


7

EGPRS850

Low Band Emission



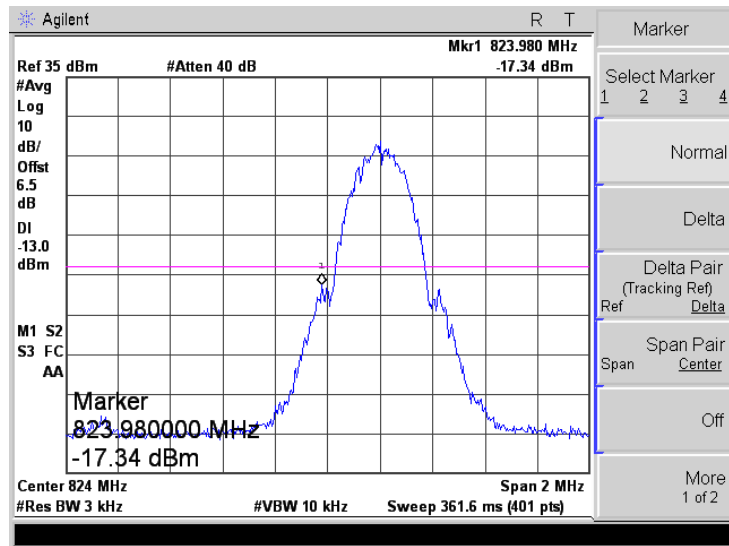


High Band Emission

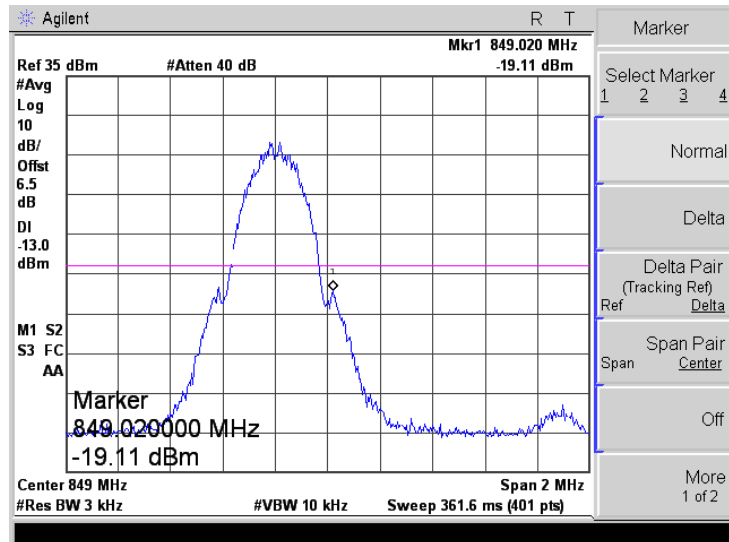




PCS1900

Low Channel

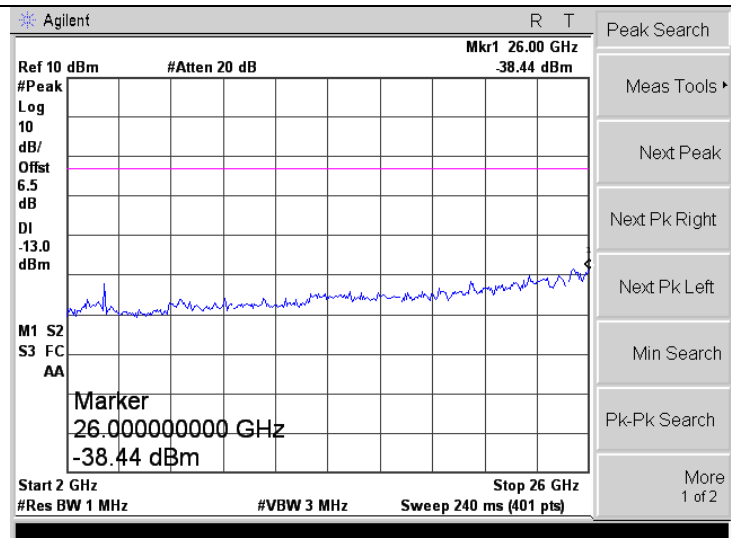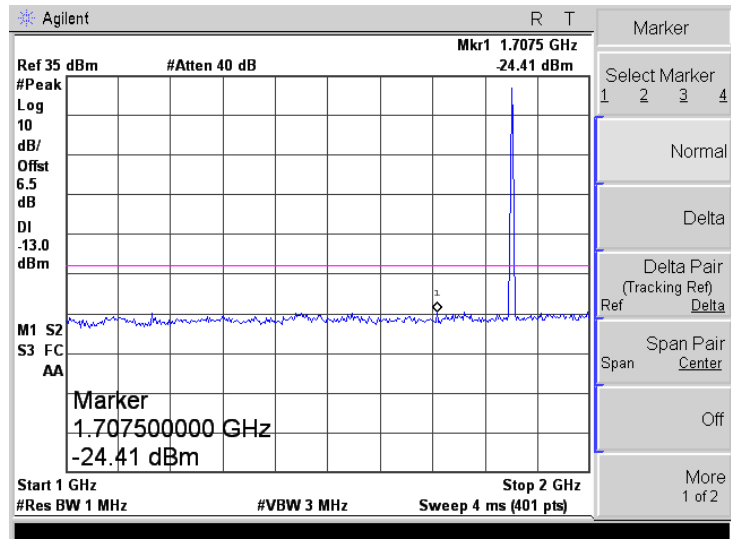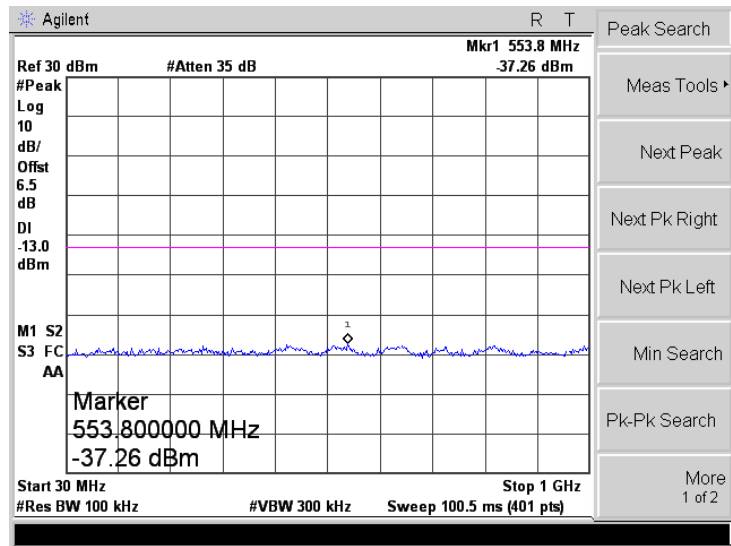




PCS1900

Middle Channel

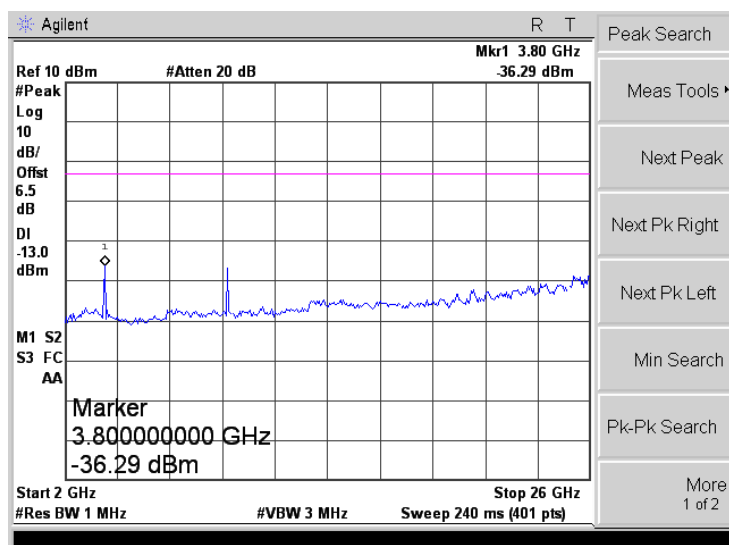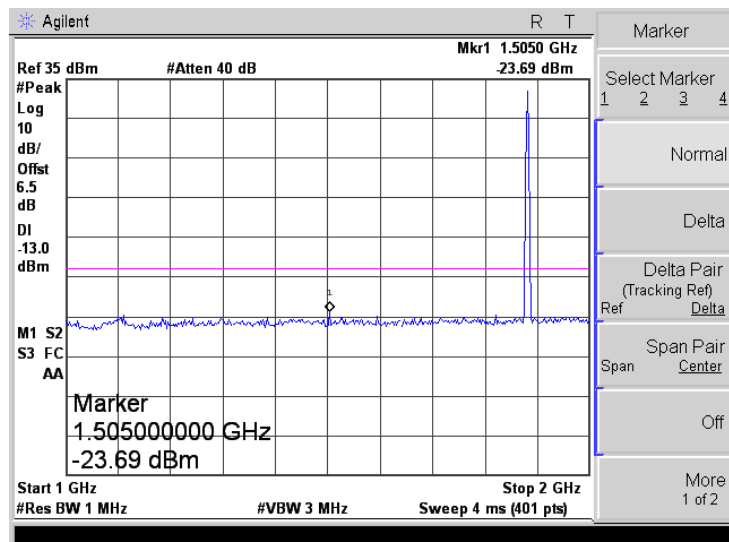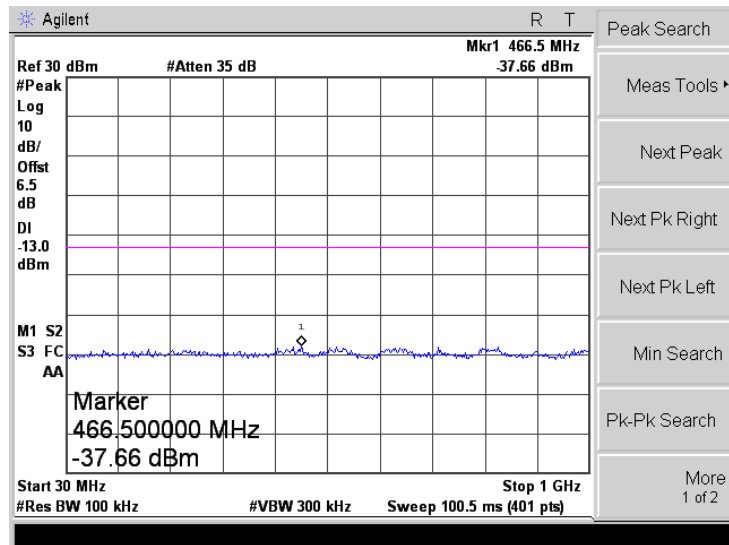


PCS1900

High Channel

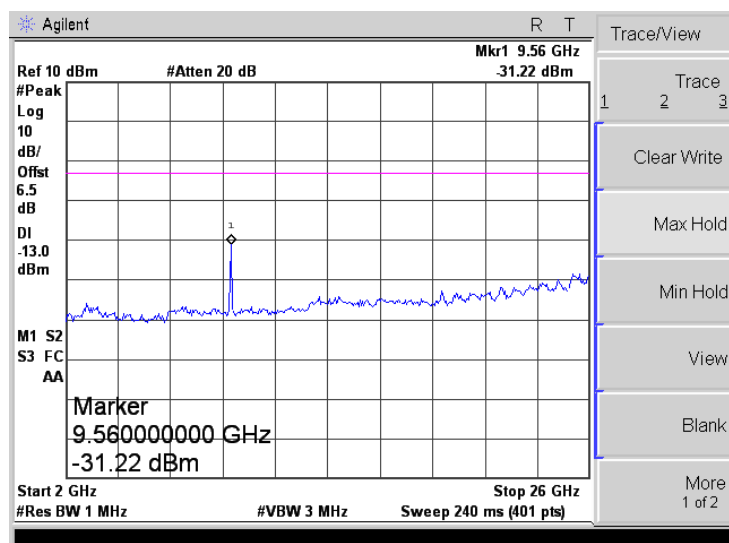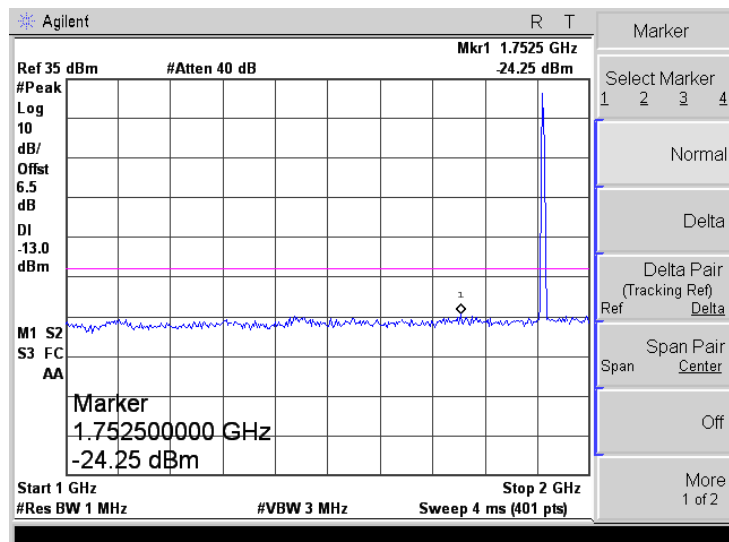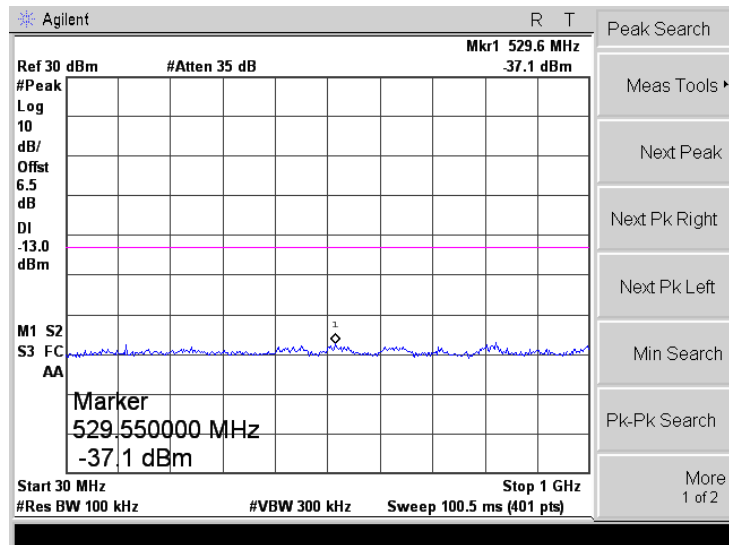


PCS1900

Low Band Emission



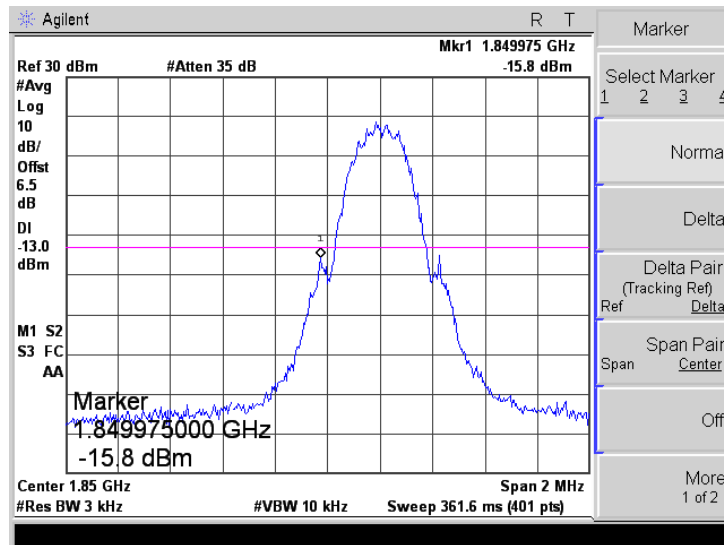


High Band Emission

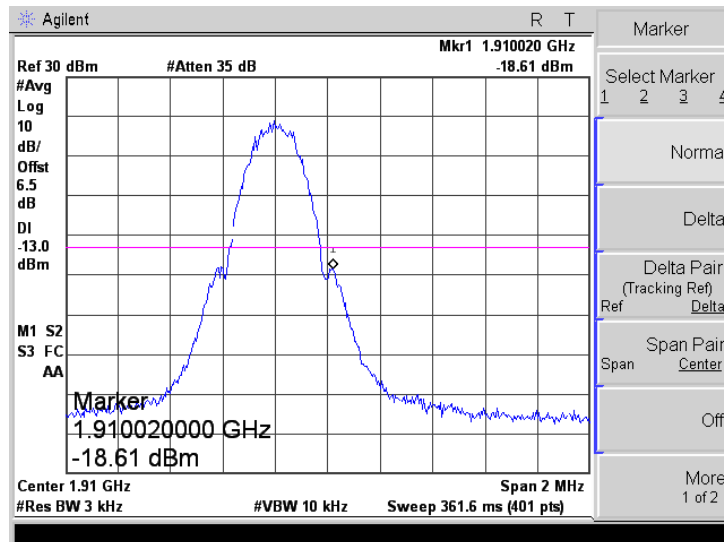




GPRS1900

Low Channel

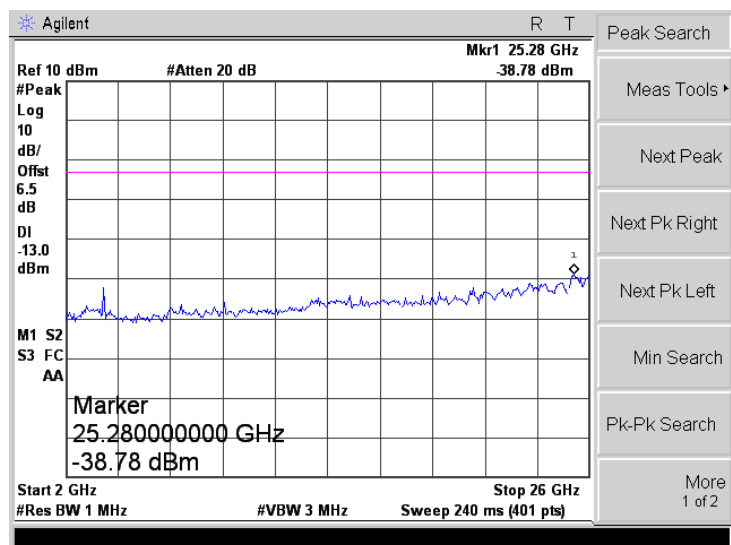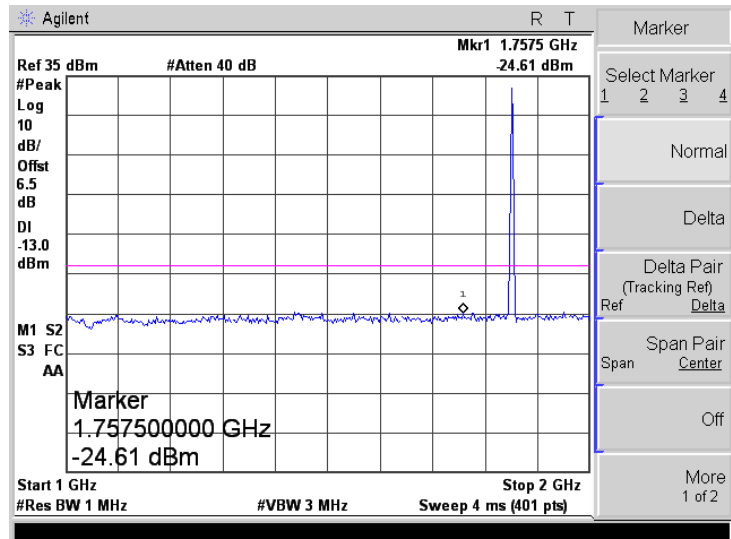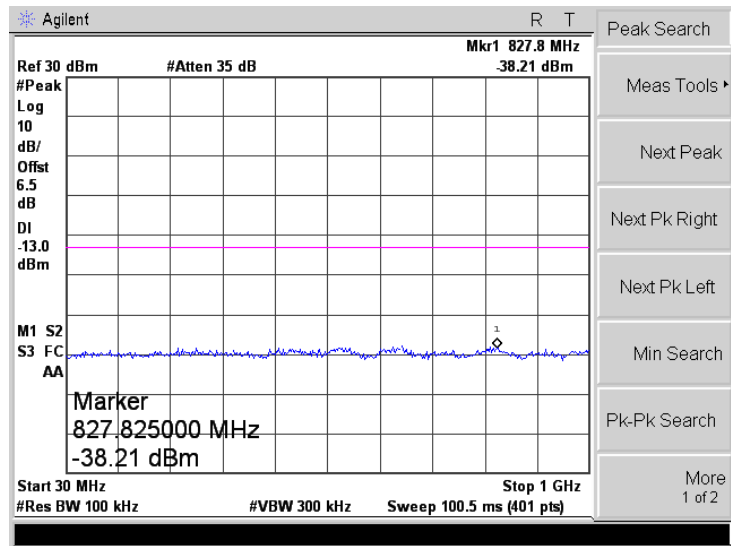




GPRS1900

Middle Channel

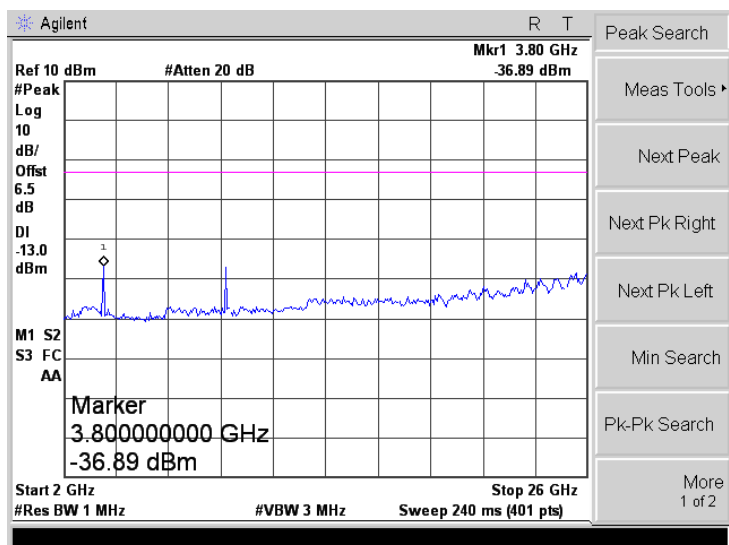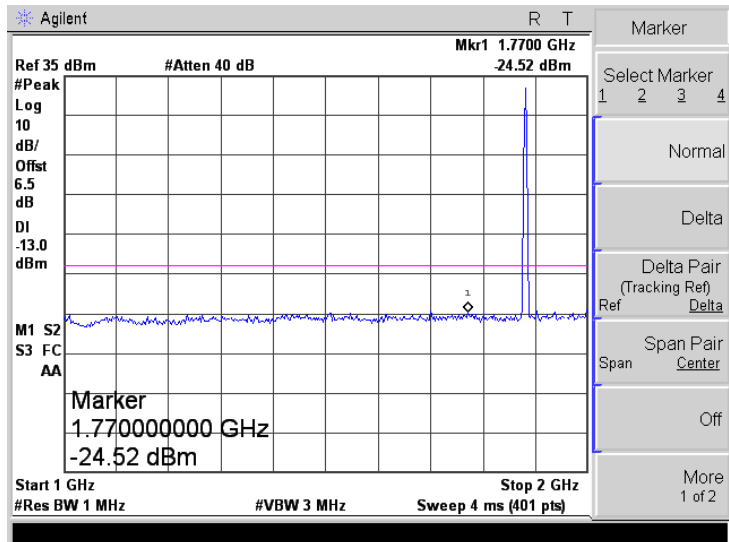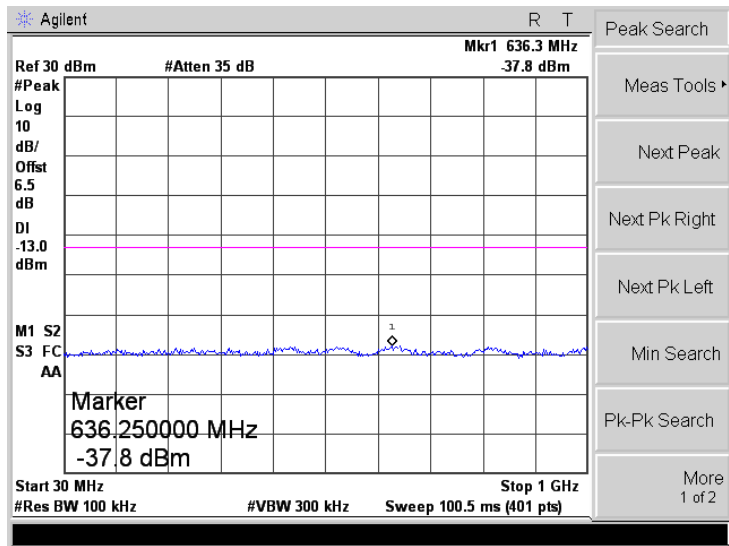


GPRS1900

High Channel

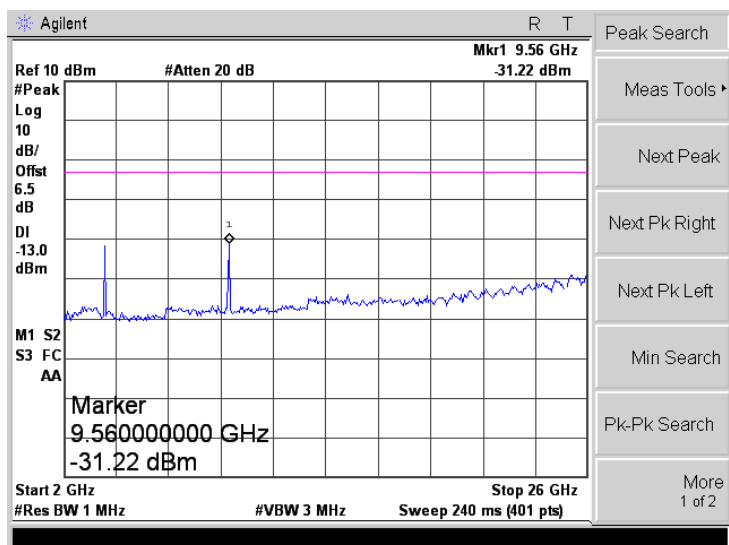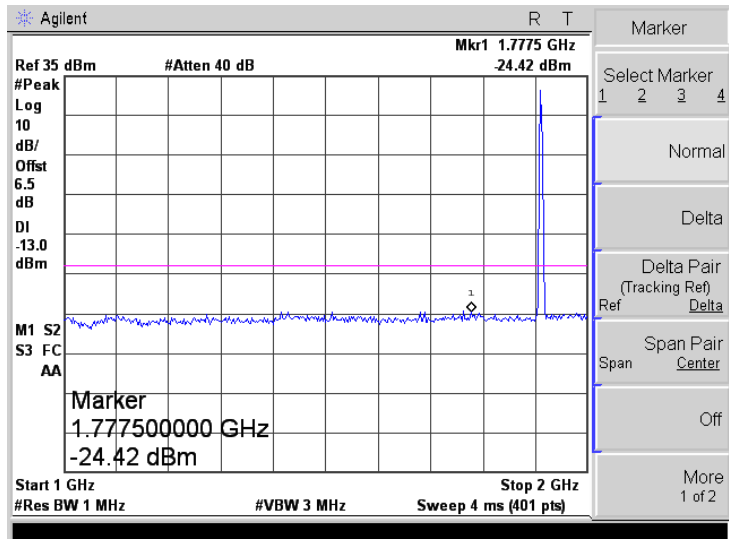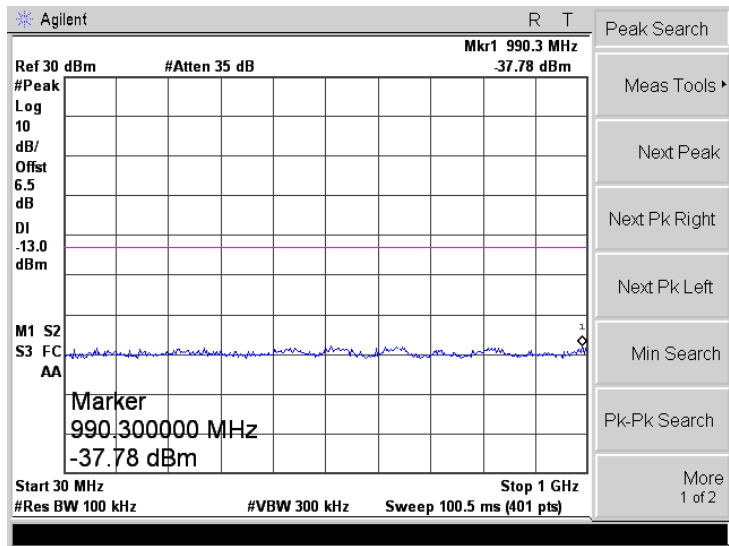


GPRS1900

Low Band Emission



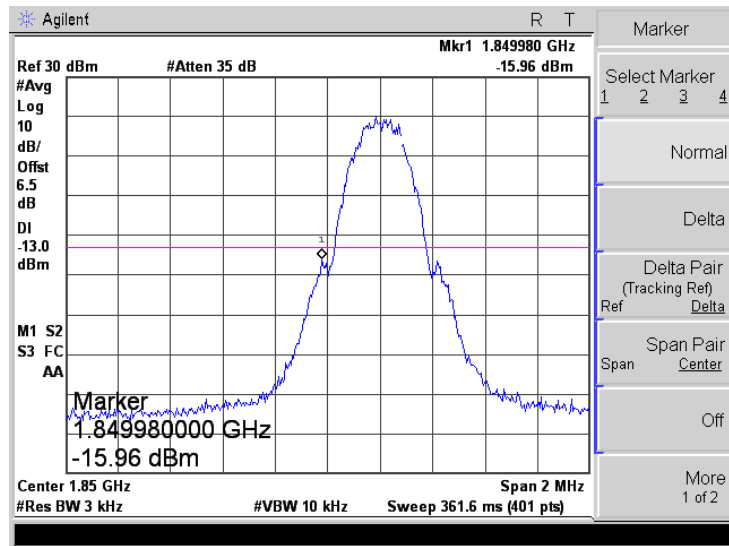


High Band Emission

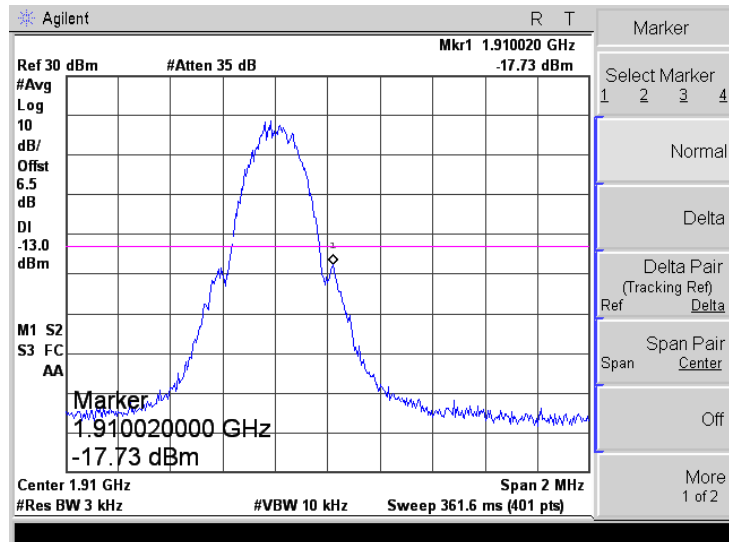




EGPRS1900

Low Channel

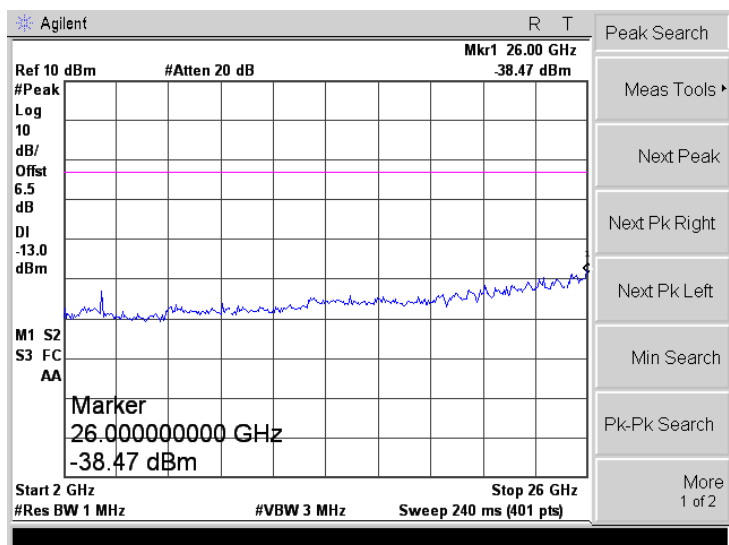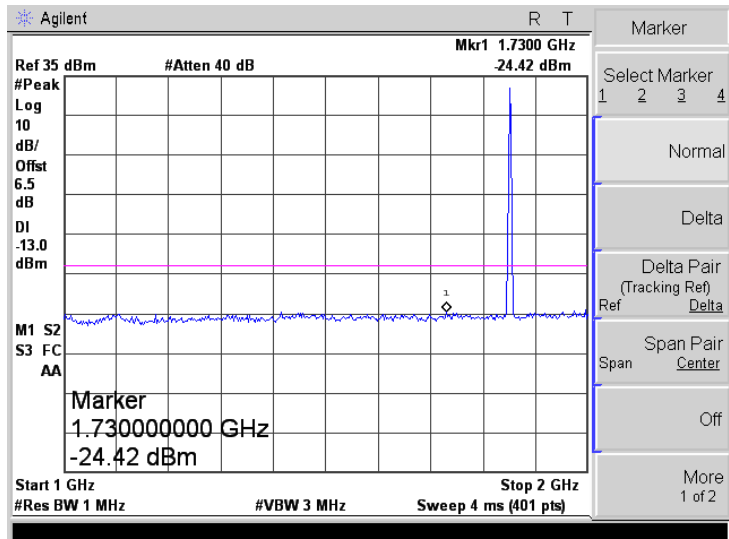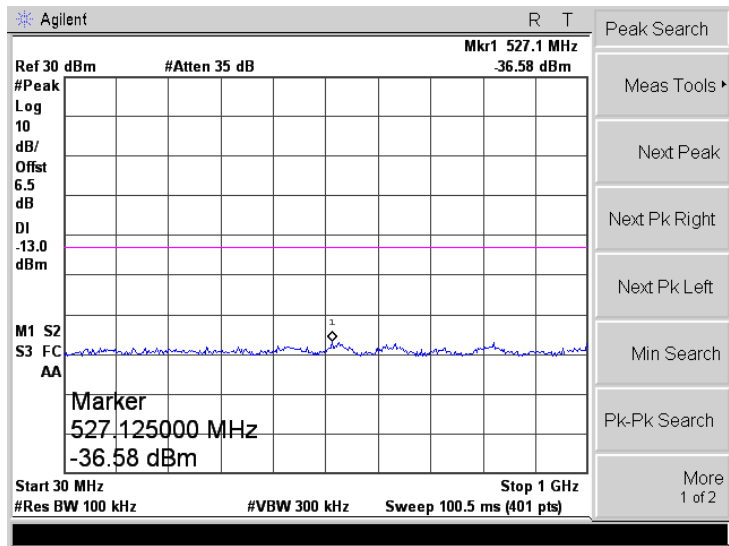




EGPRS1900

Middle Channel

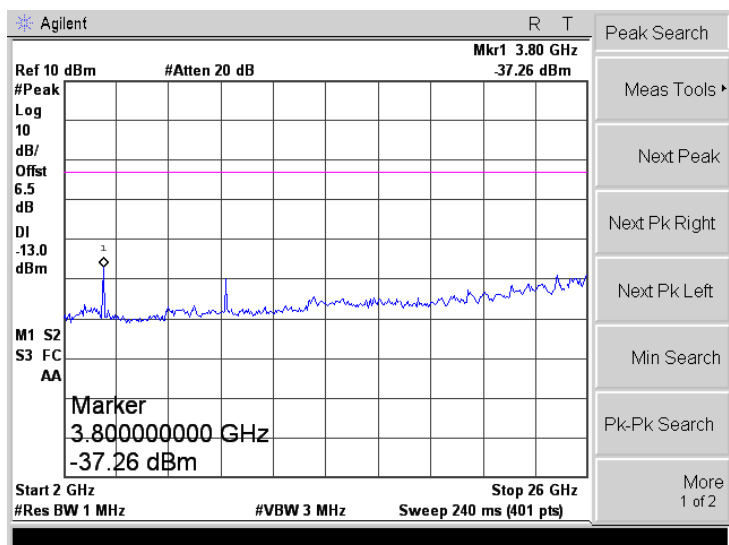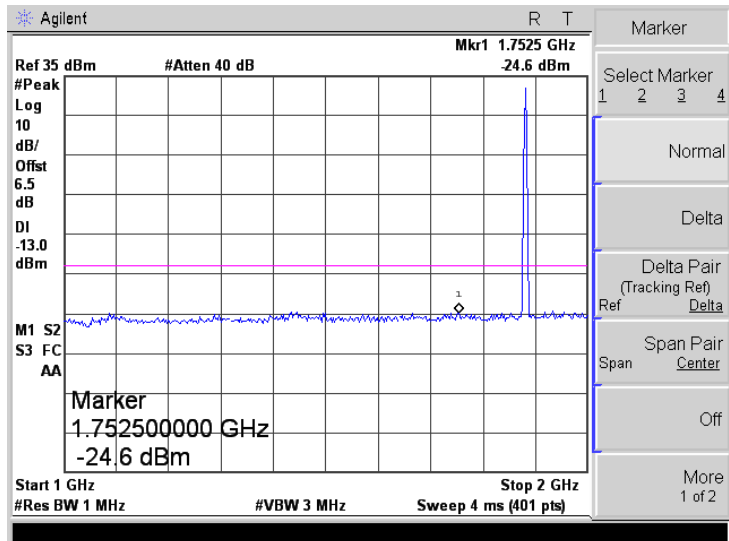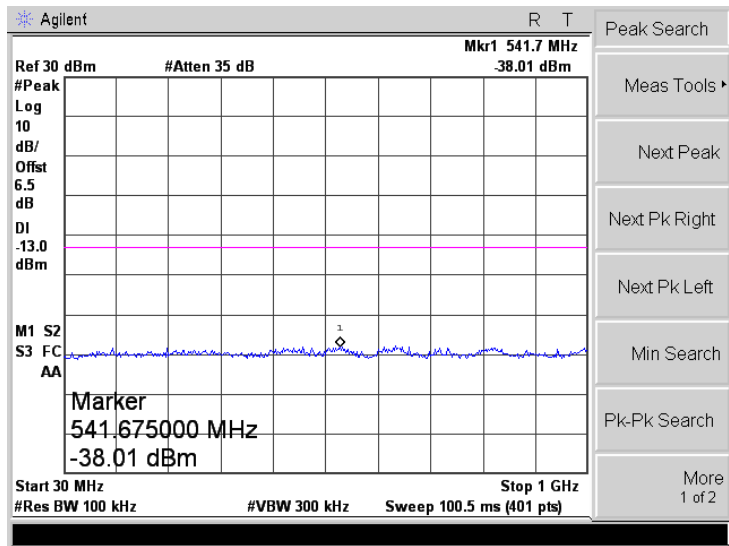


EGPRS1900

High Channel

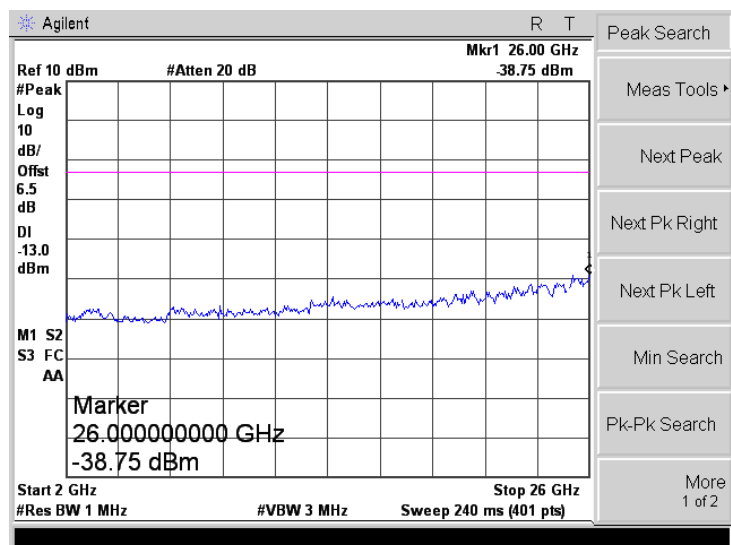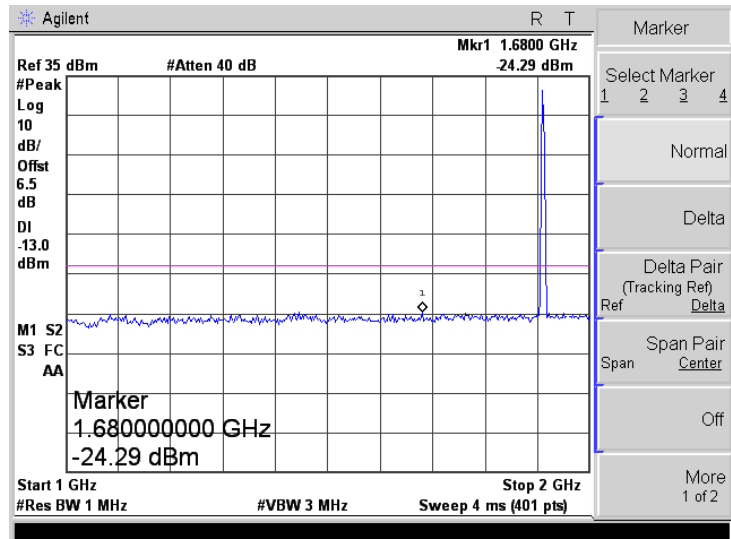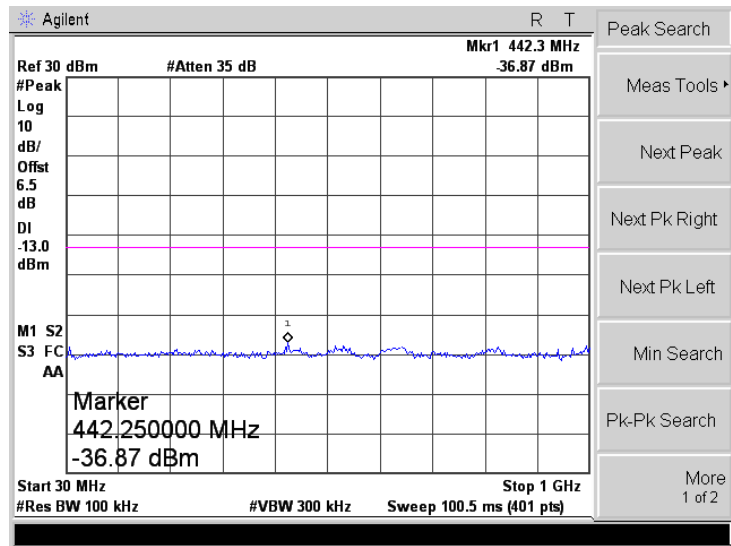


EGPRS1900

Low Band Emission


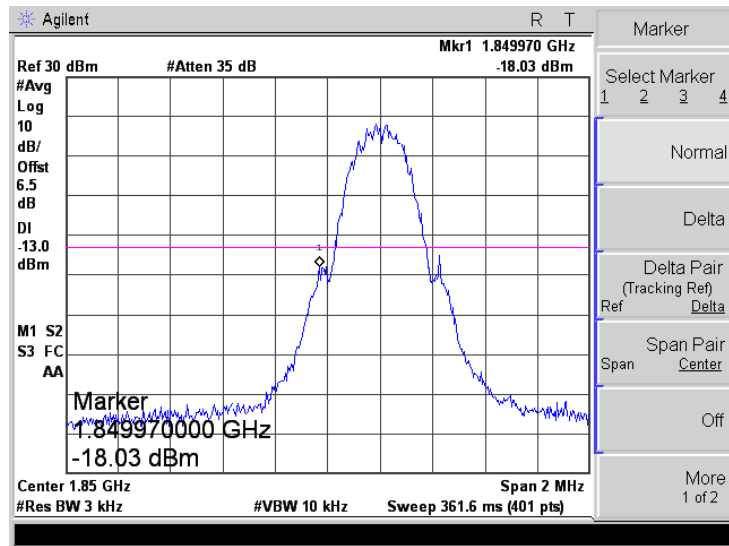


High Band Emission

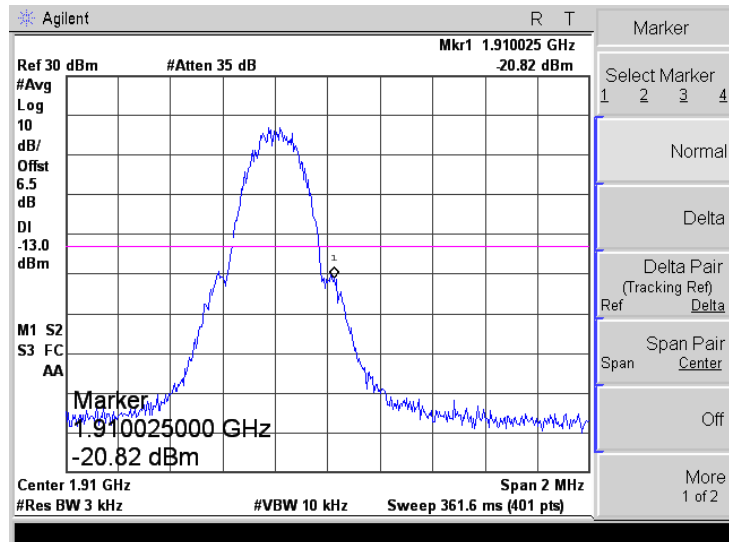



WCDMA Band V

Low Channel

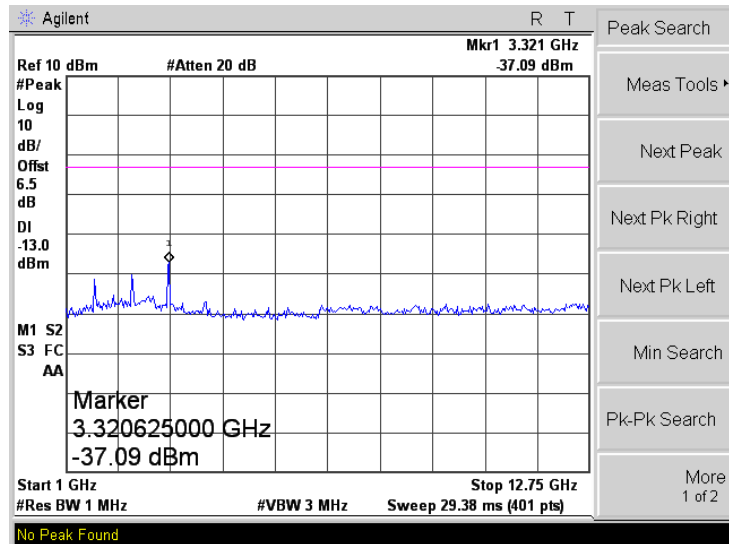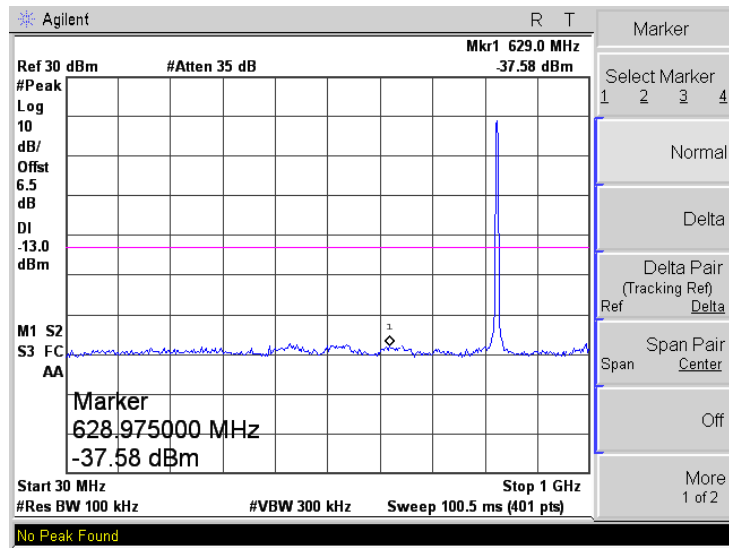



WCDMA Band V

Middle Channel

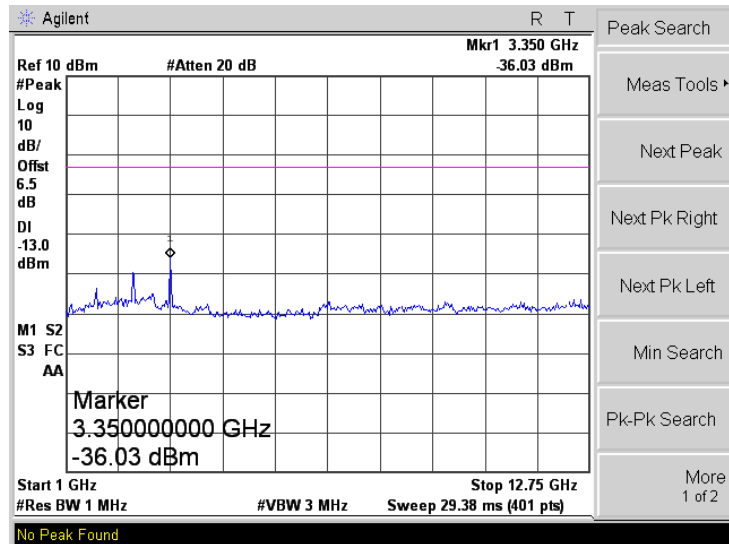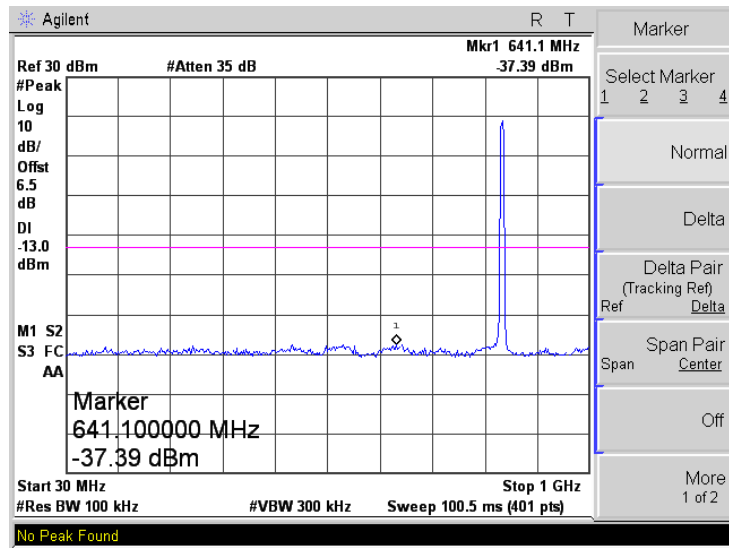


WCDMA Band V

High Channel

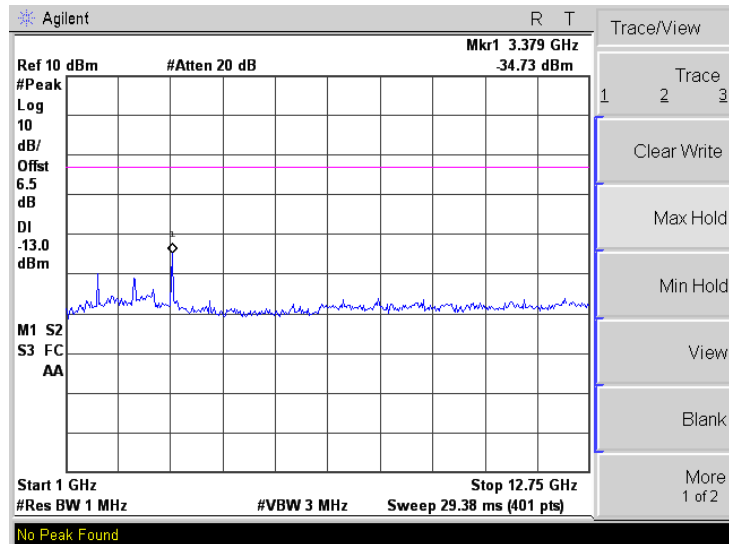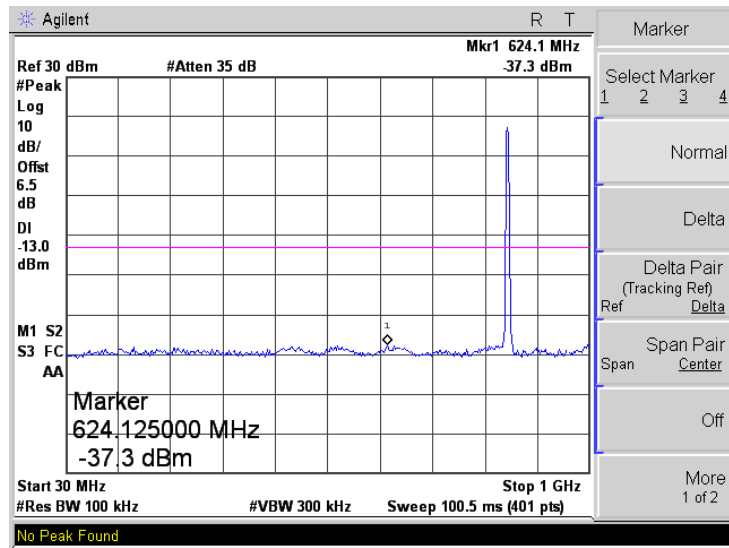


WCDMA Band V

Low Band Emission



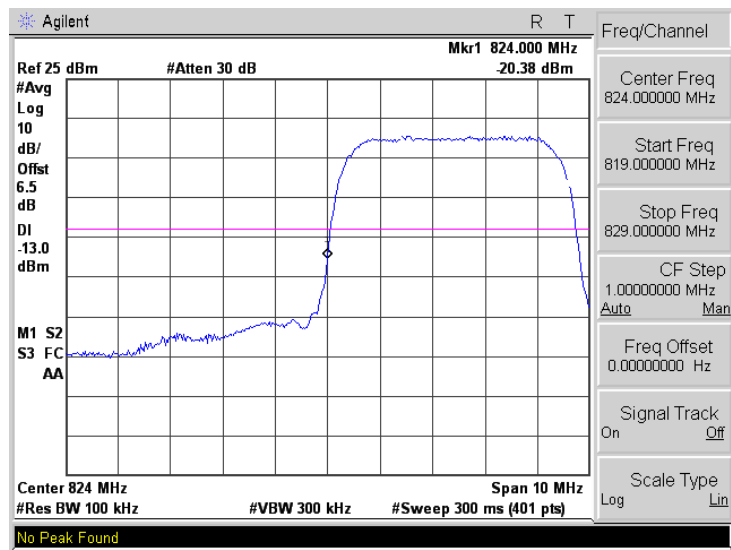


High Band Emission

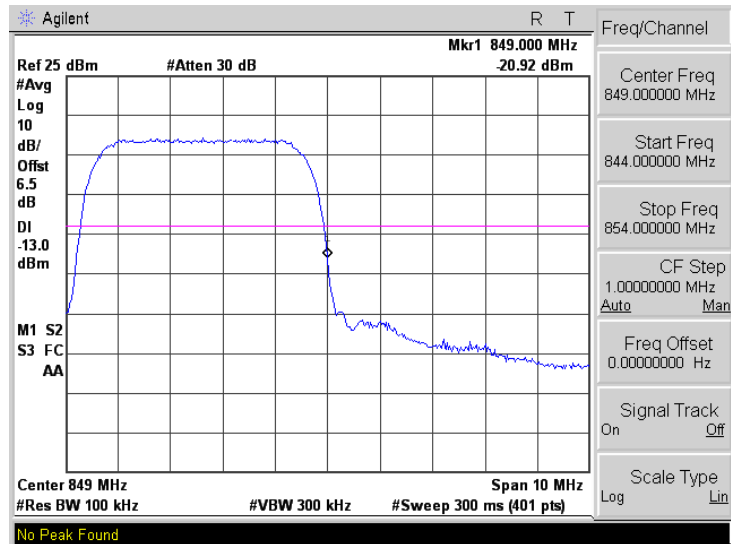




WCDMA Band II

Low Channel

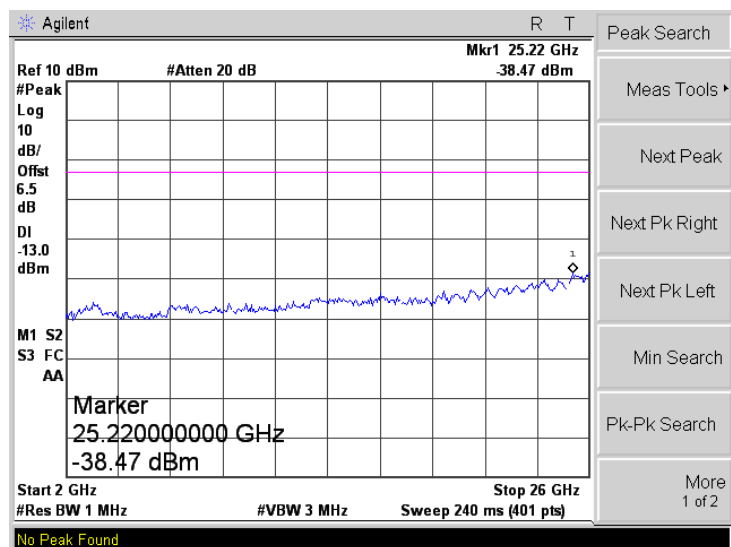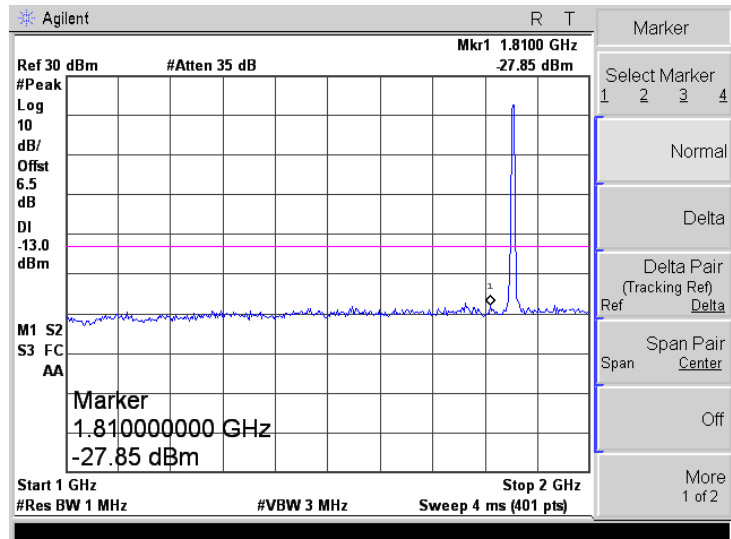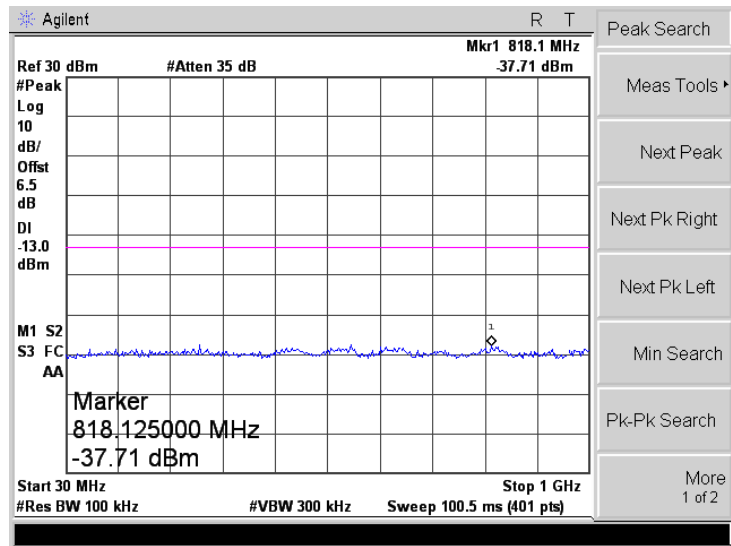




WCDMA Band II

Middle Channel

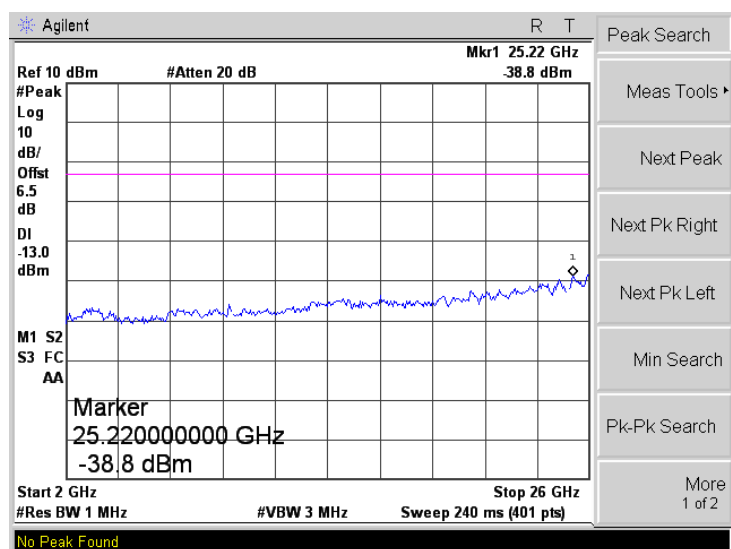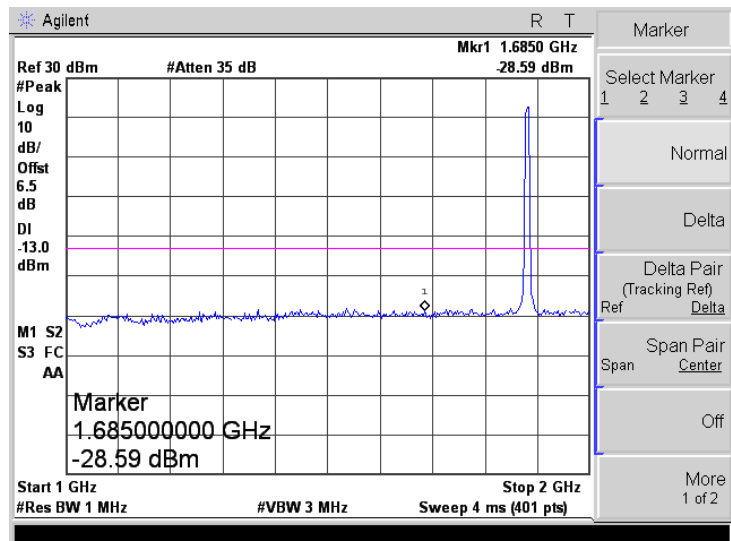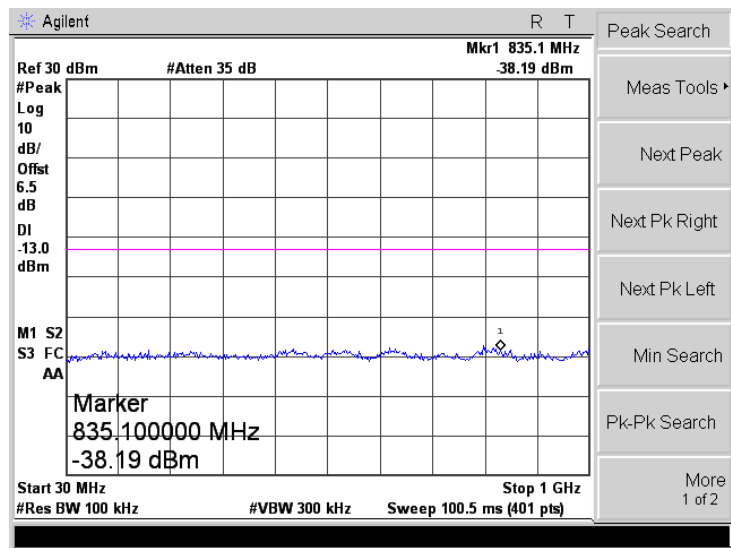


WCDMA Band II

High Channel

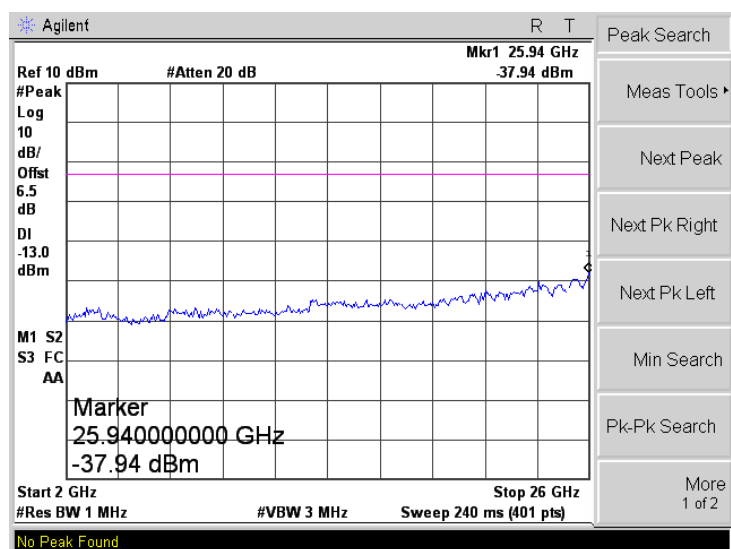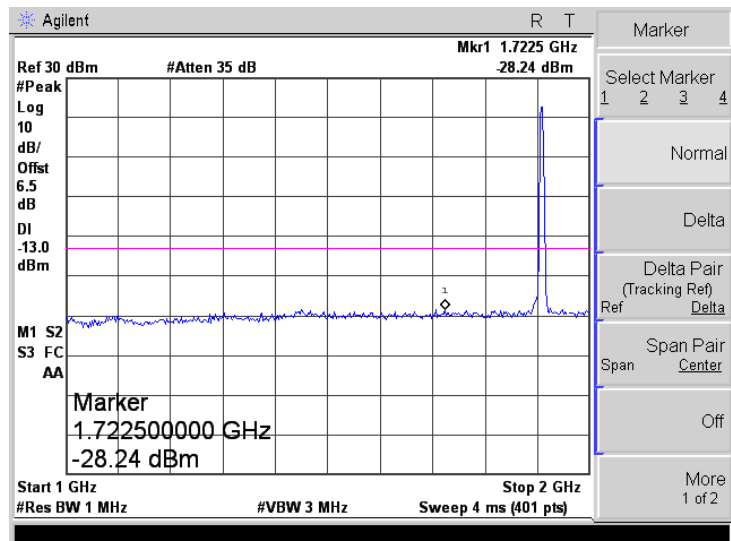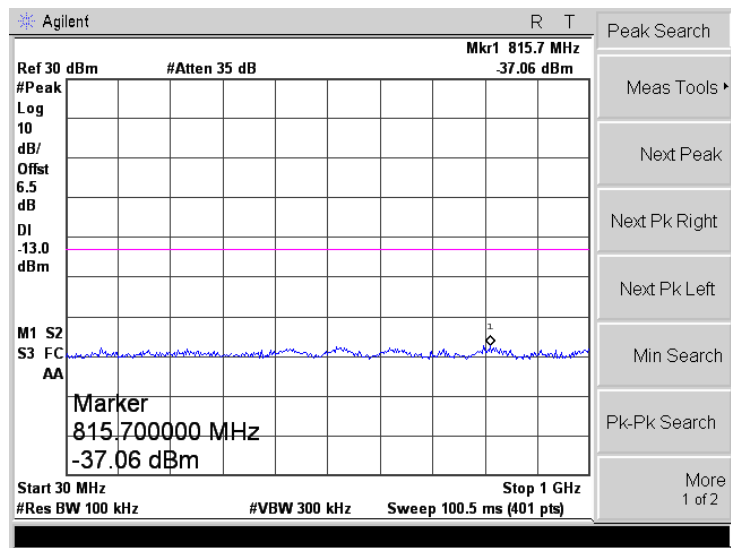


WCDMA Band II

Low Band Emission

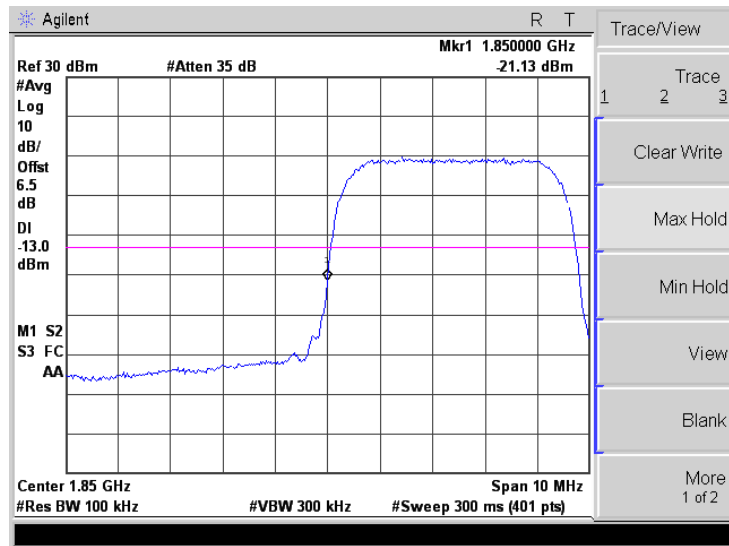

High Band Emission

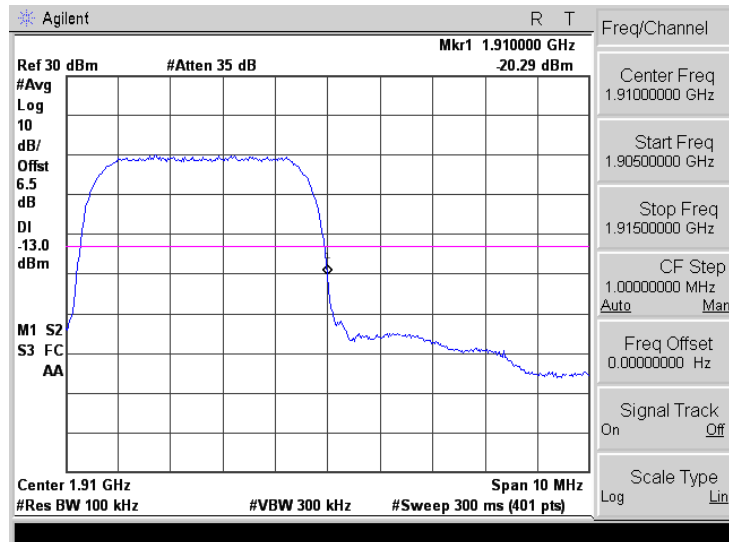

8. Spurious Radiated Emissions

8.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

8.2 Test Procedure

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.


Spurious attenuation limit in dB = $43 + 10 \log_{10}(\text{power out in Watts})$

8.3 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


➤ Spurious Emissions Below 1GHz

For Cellular Band			
Test Channel	GSM850	Polarity:	Horizontal

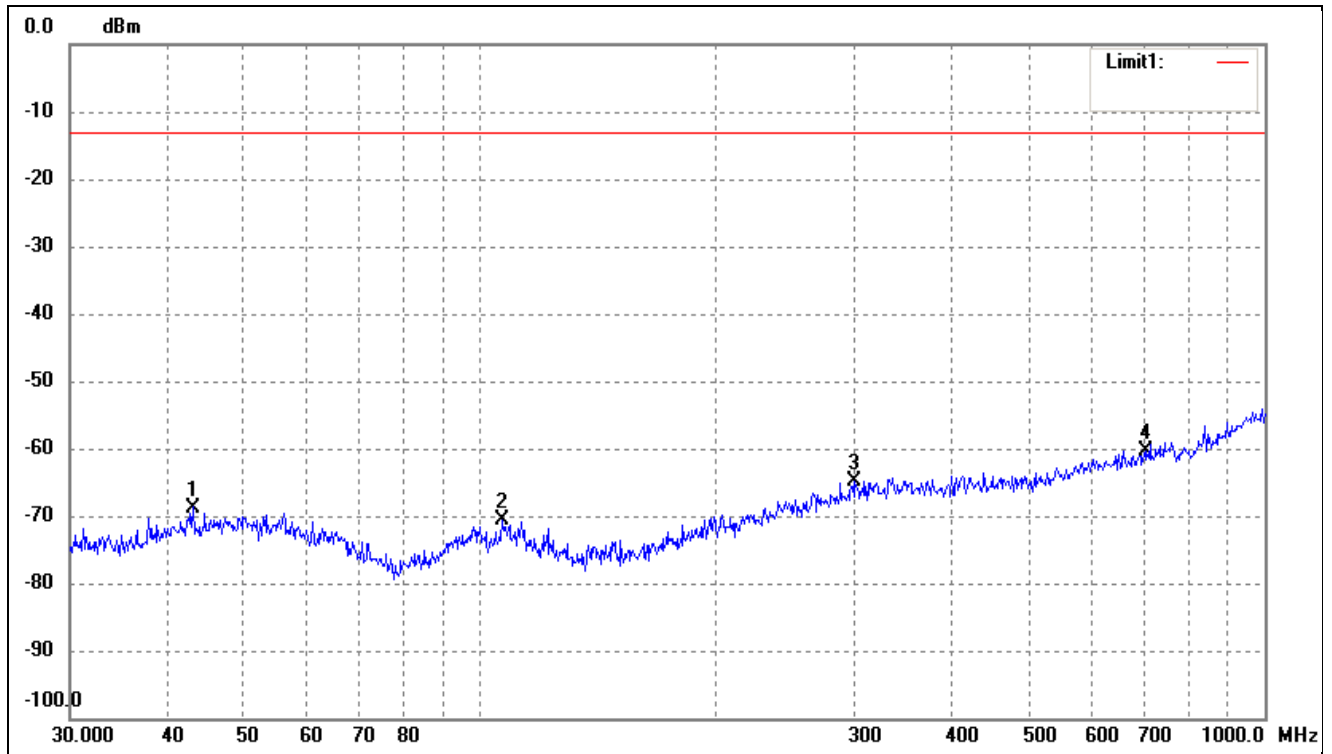


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ()	Height (cm)	Remark
1	43.0505	-67.39	-1.36	-68.75	-13.00	-55.75	325	100	peak
2	106.7587	-68.46	-2.20	-70.66	-13.00	-57.66	91	100	peak
3	300.3673	-69.34	4.36	-64.98	-13.00	-51.98	257	100	peak
4	706.6999	-69.74	9.29	-60.45	-13.00	-47.45	119	100	peak

For Cellular Band			
Test Channel	GSM850	Polarity:	Vertical

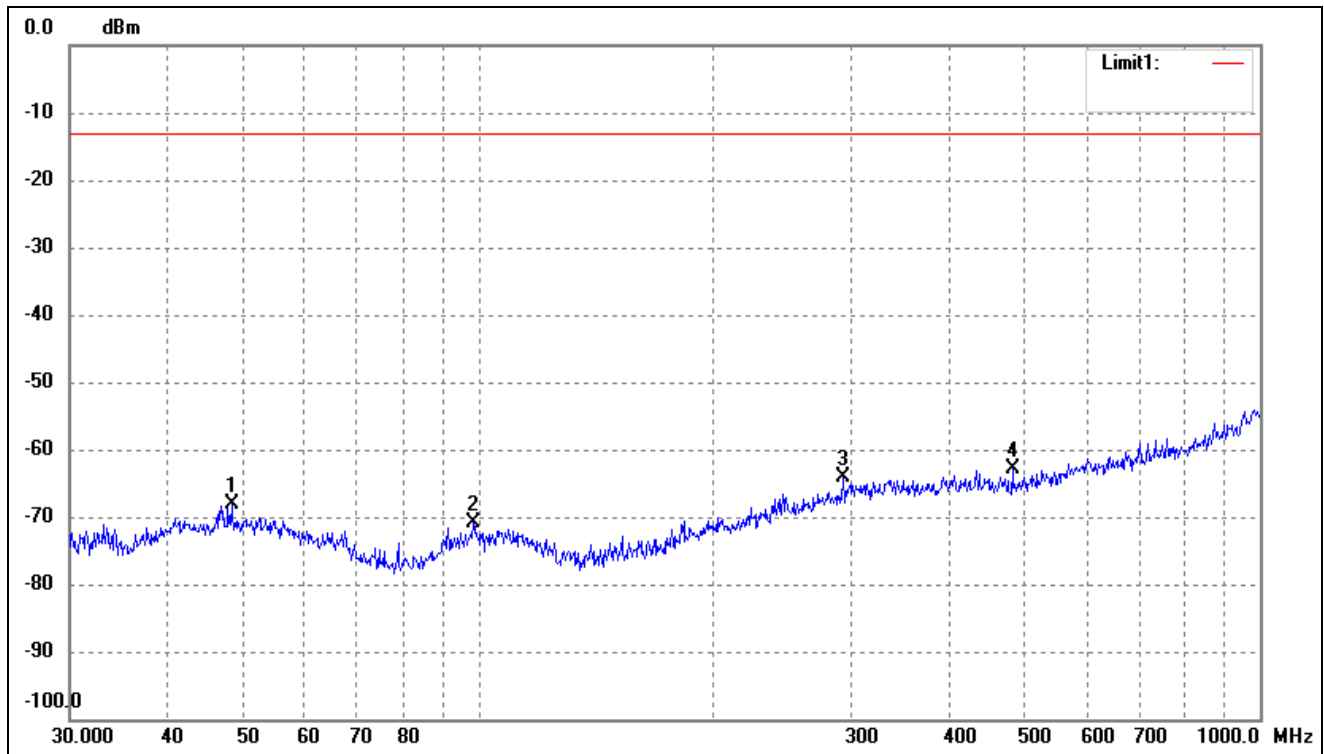


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ()	Height (cm)	Remark
1	48.3318	-67.15	-0.99	-68.14	-13.00	-55.14	217	100	peak
2	98.4866	-68.06	-2.88	-70.94	-13.00	-57.94	94	100	peak
3	293.0842	-68.24	4.12	-64.12	-13.00	-51.12	289	100	peak
4	482.2156	-68.65	5.69	-62.96	-13.00	-49.96	105	100	peak

For Cellular Band			
Test Channel	GSM1900	Polarity:	Horizontal

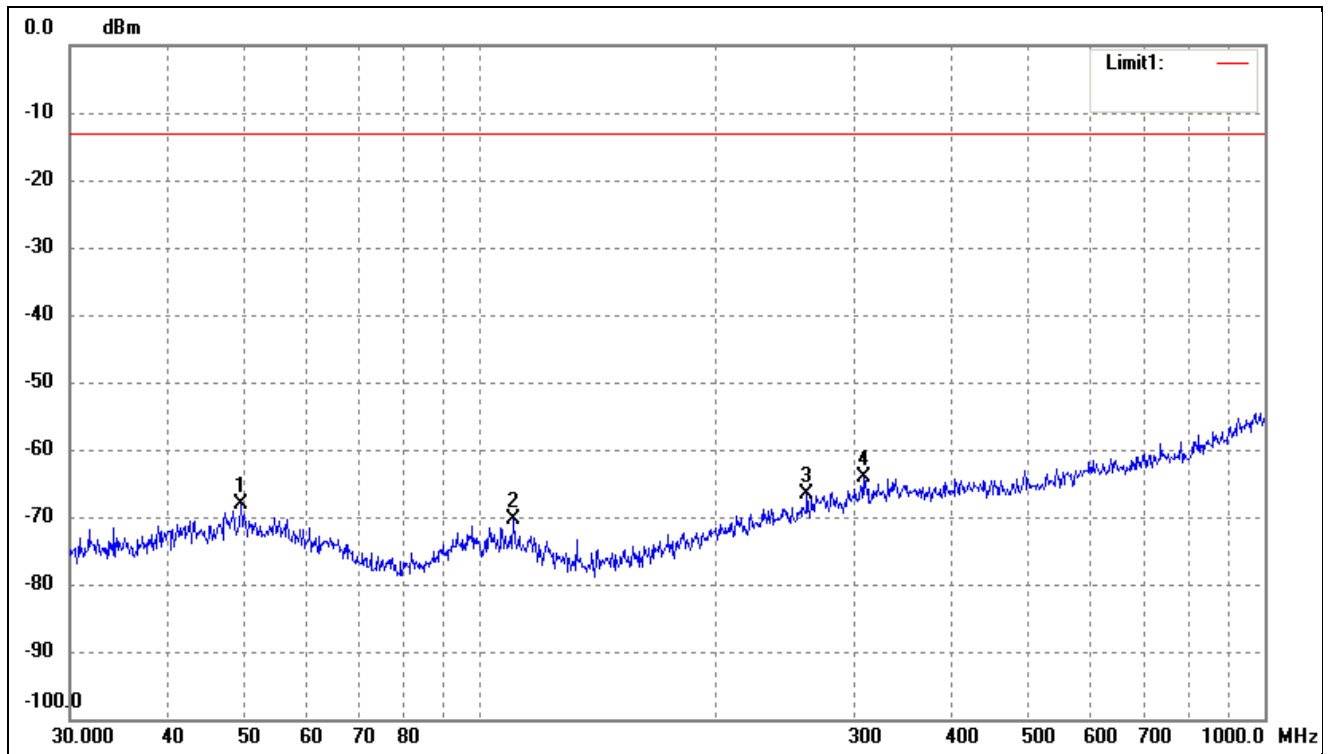

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ()	Height (cm)	Remark
1	49.5328	-67.15	-1.09	-68.24	-13.00	-55.24	320	100	peak
2	110.1816	-68.12	-2.14	-70.26	-13.00	-57.26	338	100	peak
3	261.0583	-69.28	2.57	-66.71	-13.00	-53.71	65	100	peak
4	307.8313	-68.76	4.56	-64.20	-13.00	-51.20	262	100	peak


For Cellular Band			
Test Channel	GSM1900	Polarity:	Vertical

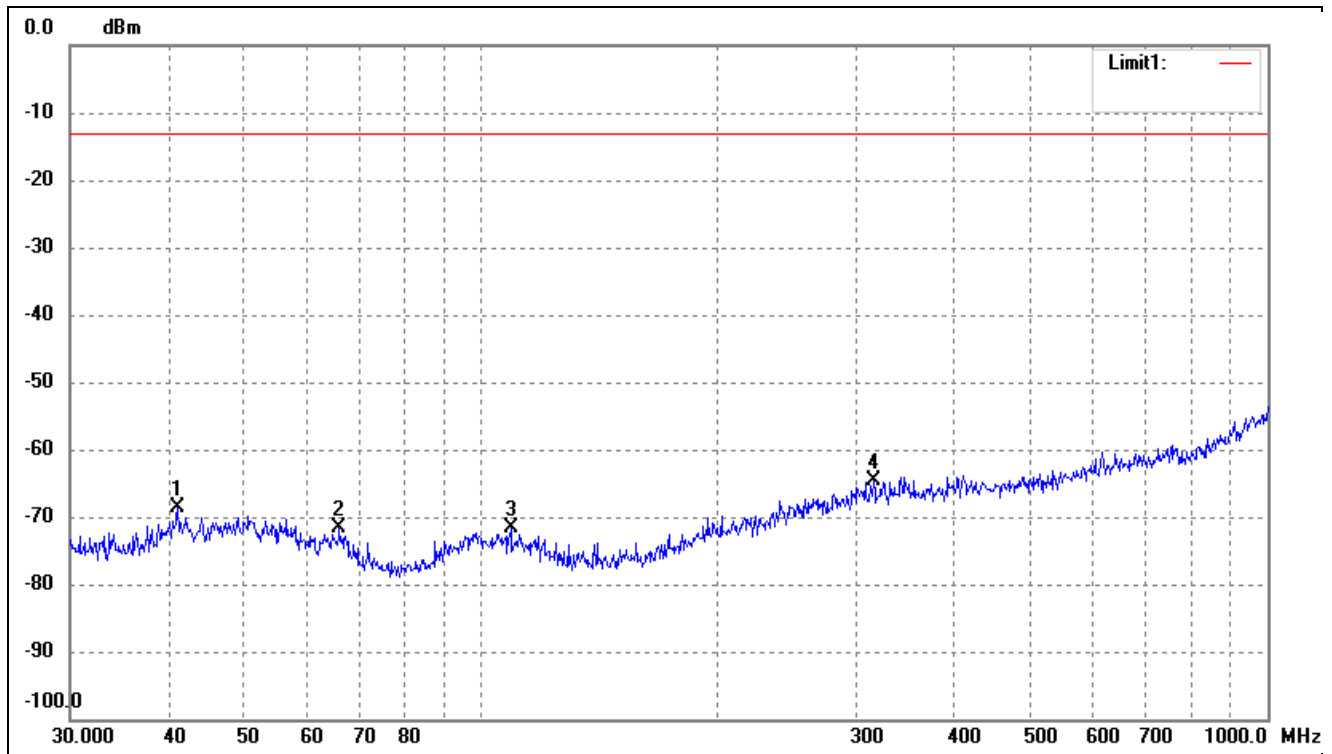

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ()	Height (cm)	Remark
1	41.1320	-66.79	-1.80	-68.59	-13.00	-55.59	350	100	peak
2	66.0342	-67.74	-3.83	-71.57	-13.00	-58.57	199	100	peak
3	109.0286	-69.50	-2.14	-71.64	-13.00	-58.64	78	100	peak
4	315.4808	-69.33	4.65	-64.68	-13.00	-51.68	278	100	peak


Note: Margin= (Reading+ Correct)- Limit

Test Channel	band 5	Polarity:	Horizontal
--------------	--------	-----------	------------

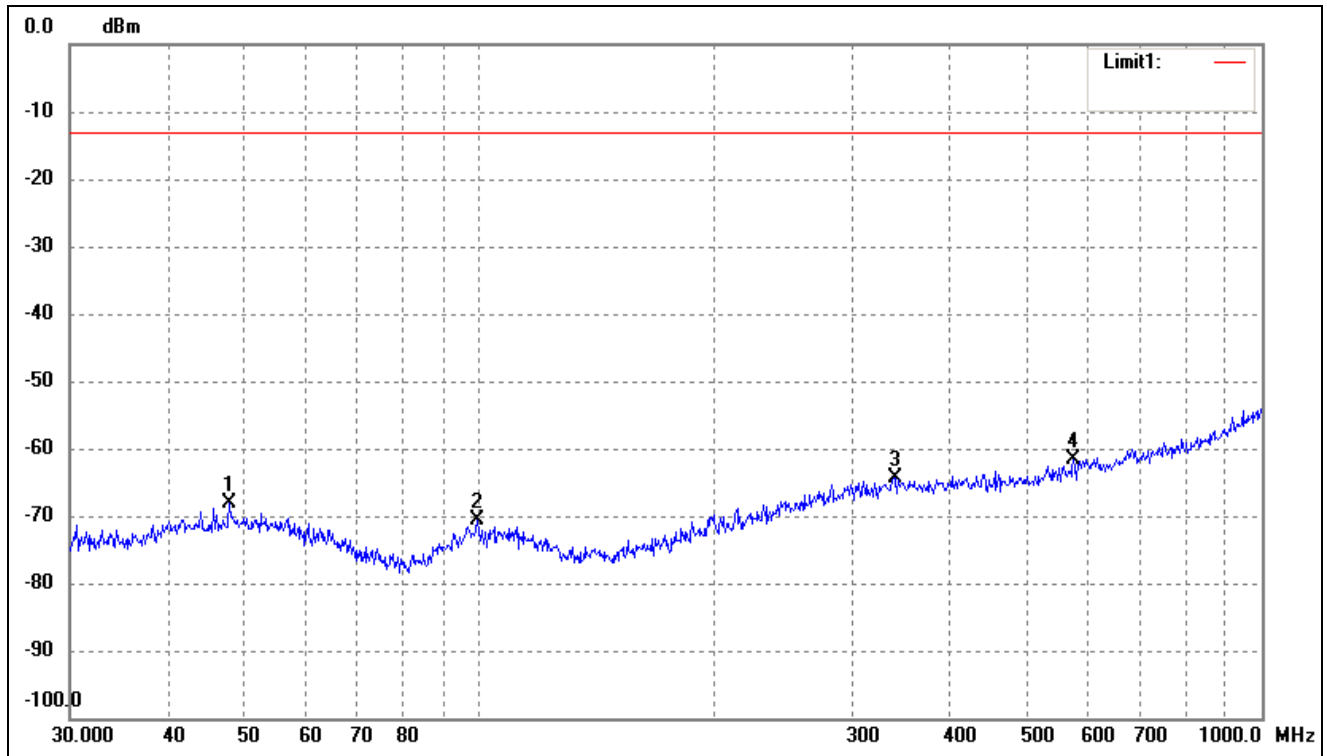


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ()	Height (cm)	Remark
1	47.9940	-67.13	-0.97	-68.10	-13.00	-55.10	116	100	peak
2	99.5281	-67.97	-2.73	-70.70	-13.00	-57.70	131	100	peak
3	339.5888	-69.54	5.27	-64.27	-13.00	-51.27	126	100	peak
4	574.6258	-68.82	7.23	-61.59	-13.00	-48.59	120	100	peak

Test Channel	band 5	Polarity:	Vertical
--------------	--------	-----------	----------

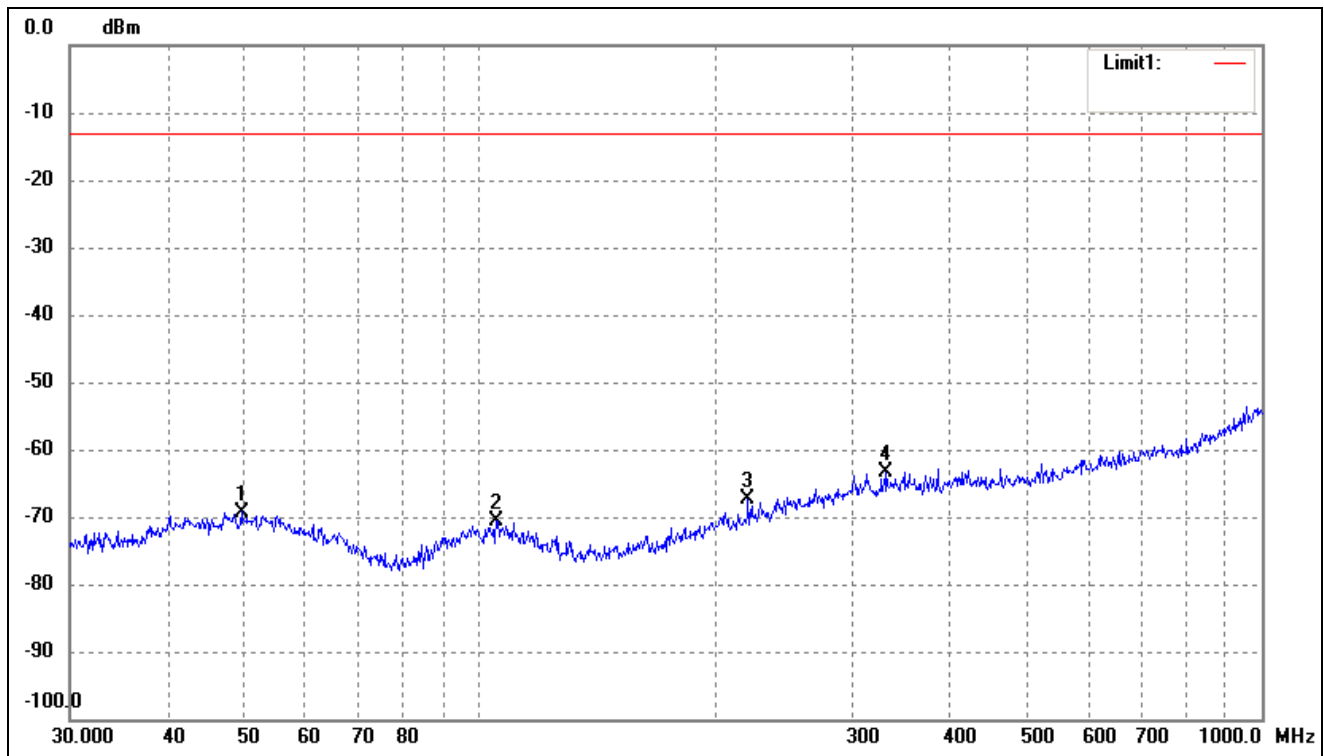


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ()	Height (cm)	Remark
1	49.7068	-68.15	-1.10	-69.25	-13.00	-56.25	91	100	peak
2	105.2718	-68.37	-2.23	-70.60	-13.00	-57.60	133	100	peak
3	220.6171	-67.82	0.50	-67.32	-13.00	-54.32	104	100	peak
4	331.3547	-68.49	5.06	-63.43	-13.00	-50.43	114	100	peak

Test Channel	band 2	Polarity:	Horizontal
--------------	--------	-----------	------------

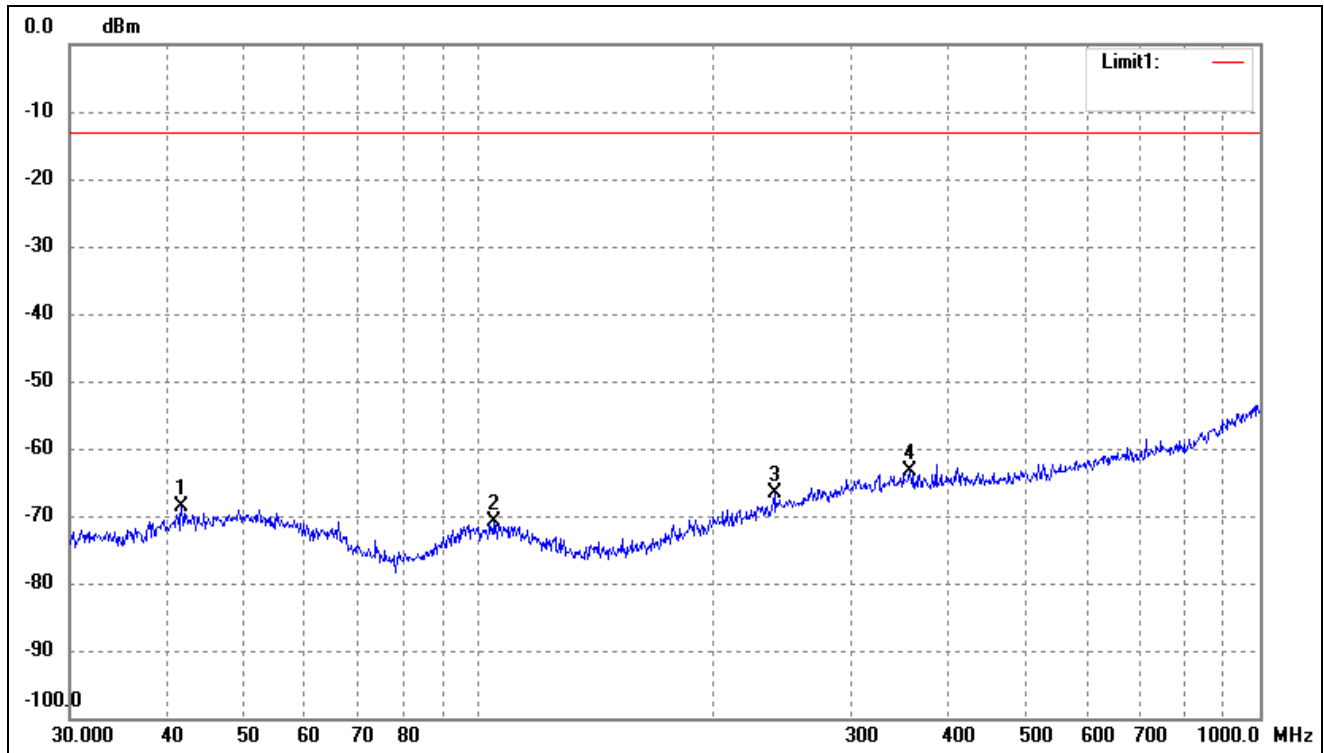

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ()	Height (cm)	Remark
1	41.7130	-67.13	-1.59	-68.72	-13.00	-55.72	123	100	peak
2	104.5361	-68.62	-2.29	-70.91	-13.00	-57.91	170	100	peak
3	239.1473	-68.41	1.67	-66.74	-13.00	-53.74	68	100	peak
4	356.6758	-68.52	5.11	-63.41	-13.00	-50.41	138	100	peak

Test Channel	band 2	Polarity:	Vertical
--------------	--------	-----------	----------

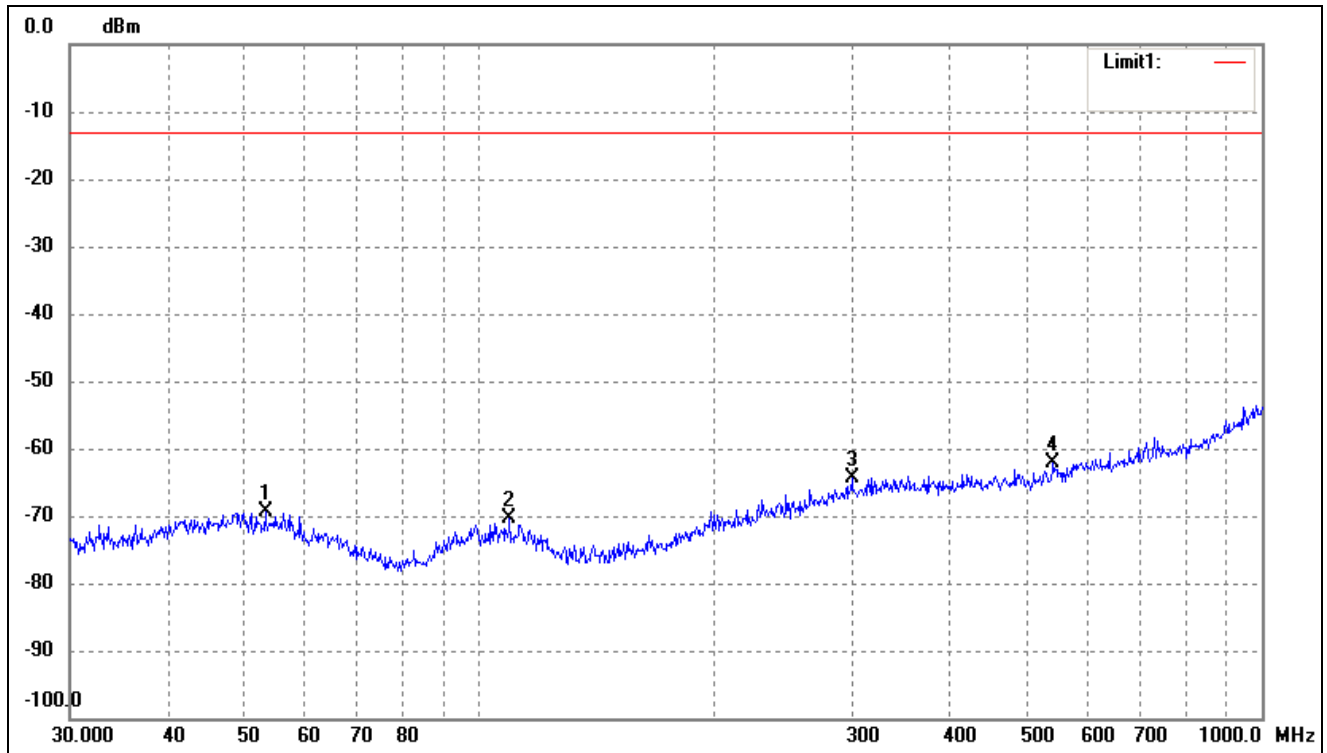

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ()	Height (cm)	Remark
1	53.3179	-68.35	-1.12	-69.47	-13.00	-56.47	73	100	peak
2	109.4116	-68.29	-2.13	-70.42	-13.00	-57.42	157	100	peak
3	299.3158	-68.63	4.35	-64.28	-13.00	-51.28	124	100	peak
4	541.3725	-68.52	6.34	-62.18	-13.00	-49.18	105	100	peak

Note: Margin= (Reading+ Correct)- Limit

- Spurious Emissions Above 1GHz
- For Cellular Band_GSM850 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (824.2MHz)						
1648.4	-35.22	4.94	-30.28	-13	-17.28	H
2472.6	-44.44	8.46	-35.98	-13	-22.98	H
1648.4	-36.31	4.94	-31.37	-13	-18.37	V
2472.6	-43.33	8.46	-34.87	-13	-21.87	V
Middle Channel (836.6MHz)						
1673.2	-36.1	5.11	-30.99	-13	-17.99	H
2509.8	-41.76	8.54	-33.22	-13	-20.22	H
1673.2	-34.65	5.11	-29.54	-13	-16.54	V
2509.8	-41.3	8.54	-32.76	-13	-19.76	V
High Channel (848.8MHz)						
1697.6	-37.82	5.25	-32.57	-13	-19.57	H
2546.4	-42.86	8.57	-34.29	-13	-21.29	H
1697.6	-35.42	5.25	-30.17	-13	-17.17	V
2546.4	-43.15	8.57	-34.58	-13	-21.58	V

- For PCS Band_GSM1900 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1850.2MHz)						
3700.4	-39.72	10.54	-29.18	-13	-16.18	H
5550.6	-47.85	13.37	-34.48	-13	-21.48	H
3700.4	-39.09	10.54	-28.55	-13	-15.55	V
5550.6	-49.96	13.37	-36.59	-13	-23.59	V
Middle Channel (1880MHz)						
3760.0	-40.68	10.64	-30.04	-13	-17.04	H
5640.0	-47.35	13.54	-33.81	-13	-20.81	H
3760.0	-39.49	10.64	-28.85	-13	-15.85	V
5640.0	-48.87	13.54	-35.33	-13	-22.33	V
High Channel (1909.8MHz)						
3819.6	-41.3	10.74	-30.56	-13	-17.56	H
5729.4	-49.83	13.71	-36.12	-13	-23.12	H
3819.6	-42.97	10.74	-32.23	-13	-19.23	V
5729.4	-46.61	13.71	-32.9	-13	-19.9	V

➤ For WCDMA Band V Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (826.4MHz)						
1652.8	-37.4	4.94	-32.46	-13	-19.46	H
2479.2	-43.59	8.46	-35.13	-13	-22.13	H
1652.8	-34.58	4.94	-29.64	-13	-16.64	V
2479.2	-42.21	8.46	-33.75	-13	-20.75	V
Middle Channel (836.6MHz)						
1672.8	-36.07	5.11	-30.96	-13	-17.96	H
2509.2	-43.68	8.54	-35.14	-13	-22.14	H
1672.8	-34.38	5.11	-29.27	-13	-16.27	V
2509.2	-43.35	8.54	-34.81	-13	-21.81	V
High Channel (846.6MHz)						
1693.2	-35.16	5.25	-29.91	-13	-16.91	H
2539.8	-43.95	8.57	-35.38	-13	-22.38	H
1693.2	-36.28	5.25	-31.03	-13	-18.03	V
2539.8	-41.99	8.57	-33.42	-13	-20.42	V

➤ For WCDMA Band II Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1852.4MHz)						
3704.8	-39.89	10.17	-29.72	-13	-16.72	H
5557.2	-46.78	14.69	-32.09	-13	-19.09	H
3704.8	-39.24	10.17	-29.07	-13	-16.07	V
5557.2	-49.89	14.69	-35.2	-13	-22.2	V
Middle Channel (1880MHz)						
3760.8	-41.49	10.26	-31.23	-13	-18.23	H
5640.0	-46.51	14.78	-31.73	-13	-18.73	H
3760.8	-41.89	10.26	-31.63	-13	-18.63	V
5640.0	-49.15	14.78	-34.37	-13	-21.37	V
High Channel (1907.6MHz)						
3815.2	-40.05	10.59	-29.46	-13	-16.46	H
5722.8	-49.71	15.03	-34.68	-13	-21.68	H
3815.2	-41.78	10.59	-31.19	-13	-18.19	V
5722.8	-47.92	15.03	-32.89	-13	-19.89	H

Note: Result=Reading+ Correct, Margin= Result- Limit

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Frequency Stability

9.1 Standard Applicable

According to §22.355, §24.235 the limit is 2.5ppm.

9.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode

9.3 Summary of Test Results/Plots

Note: 1. Worst case at GSM850/PCS1900/WCDMA B2/B5 middle channel

2. Normal Voltage NV=DC3.7V; Low Voltage LV=DC3.5V; High Voltage HV=DC4.35V

➤ Frequency stability V.S. Temperature measurement

Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	125	0.1494	2.50	Pass
	-20	121	0.1446		
	-10	145	0.1733		
	0	139	0.1661		
	10	144	0.1721		
	20	105	0.1255		
	30	121	0.1446		
	40	132	0.1578		
	50	154	0.1841		
Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	147	0.0782	2.50	Pass
	-20	132	0.0702		
	-10	128	0.0681		
	0	103	0.0548		
	10	125	0.0665		
	20	118	0.0628		
	30	108	0.0574		
	40	106	0.0564		
	50	135	0.0718		

Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	174	0.2080	2.50	Pass
	-20	182	0.2175		
	-10	135	0.1614		
	0	157	0.1877		
	10	181	0.2164		
	20	174	0.2080		
	30	162	0.1936		
	40	158	0.1889		
	50	163	0.1948		
Reference Frequency: WCDMA Band II Middle channel=9400 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	125	0.0665	2.50	Pass
	-20	142	0.0755		
	-10	108	0.0574		
	0	126	0.0670		
	10	117	0.0622		
	20	136	0.0723		
	30	120	0.0638		
	40	141	0.0750		
	50	132	0.0702		

➤ Frequency stability V.S. Voltage measurement

Reference Frequency: GSM850 (GSM link) Middle channel=190 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	155	0.1853	2.50	Pass
	NV	149	0.1781		
	LV	138	0.1650		
Reference Frequency: PCS1900 (GSM link) Middle channel=661 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	174	0.0926	2.50	Pass
	NV	176	0.0936		
	LV	163	0.0867		
Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	
		Hz	ppm	Result	
25	HV	187	0.2235	2.50	Pass
	NV	171	0.2044		
	LV	168	0.2008		
Reference Frequency: WCDMA Band II Middle channel=9400 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	154	0.0819	2.50	Pass
	NV	145	0.0771		
	LV	158	0.0840		

***** END OF REPORT *****