



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 1MHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 15, 2007

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set RBW spectrum analyzer to 1 MHz and set VBW spectrum analyzer to 10 Hz with suitable frequency span including 1 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW=VBW=100kHz ; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

4.6.4 EUT OPERATING CONDITION

Same as Item 4.3.5



4.6.5 TEST RESULTS – DSSS

The spectrum plots are attached on the following page. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (Peak):

The band edge emission plot of DSSS technique on the following first page show 53.93dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 114.8dBuV/m, so the maximum field strength in restrict band is $114.8 - 53.93 = 60.87$ dBuV/m which is under 74 dBuV/m limit.

The band edge emission plot of DSSS technique on the following second page shows 53.85dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 116.1dBuV/m, so the maximum field strength in restrict band is $116.1 - 53.85 = 62.25$ dBuV/m which is under 74 dBuV/m limit.


NOTE (Average):

The band edge emission plot on the following third page shows 58.74dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 107.5dBuV/m, so the maximum field strength in restrict band is $107.5 - 58.74 = 48.76$ dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot on the following fourth page shows 59.18dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2. is 108.80dBuV/m, so the maximum field strength in restrict band is $108.80 - 59.18 = 49.62$ dBuV/m which is under 54 dBuV/m limit.




CH1

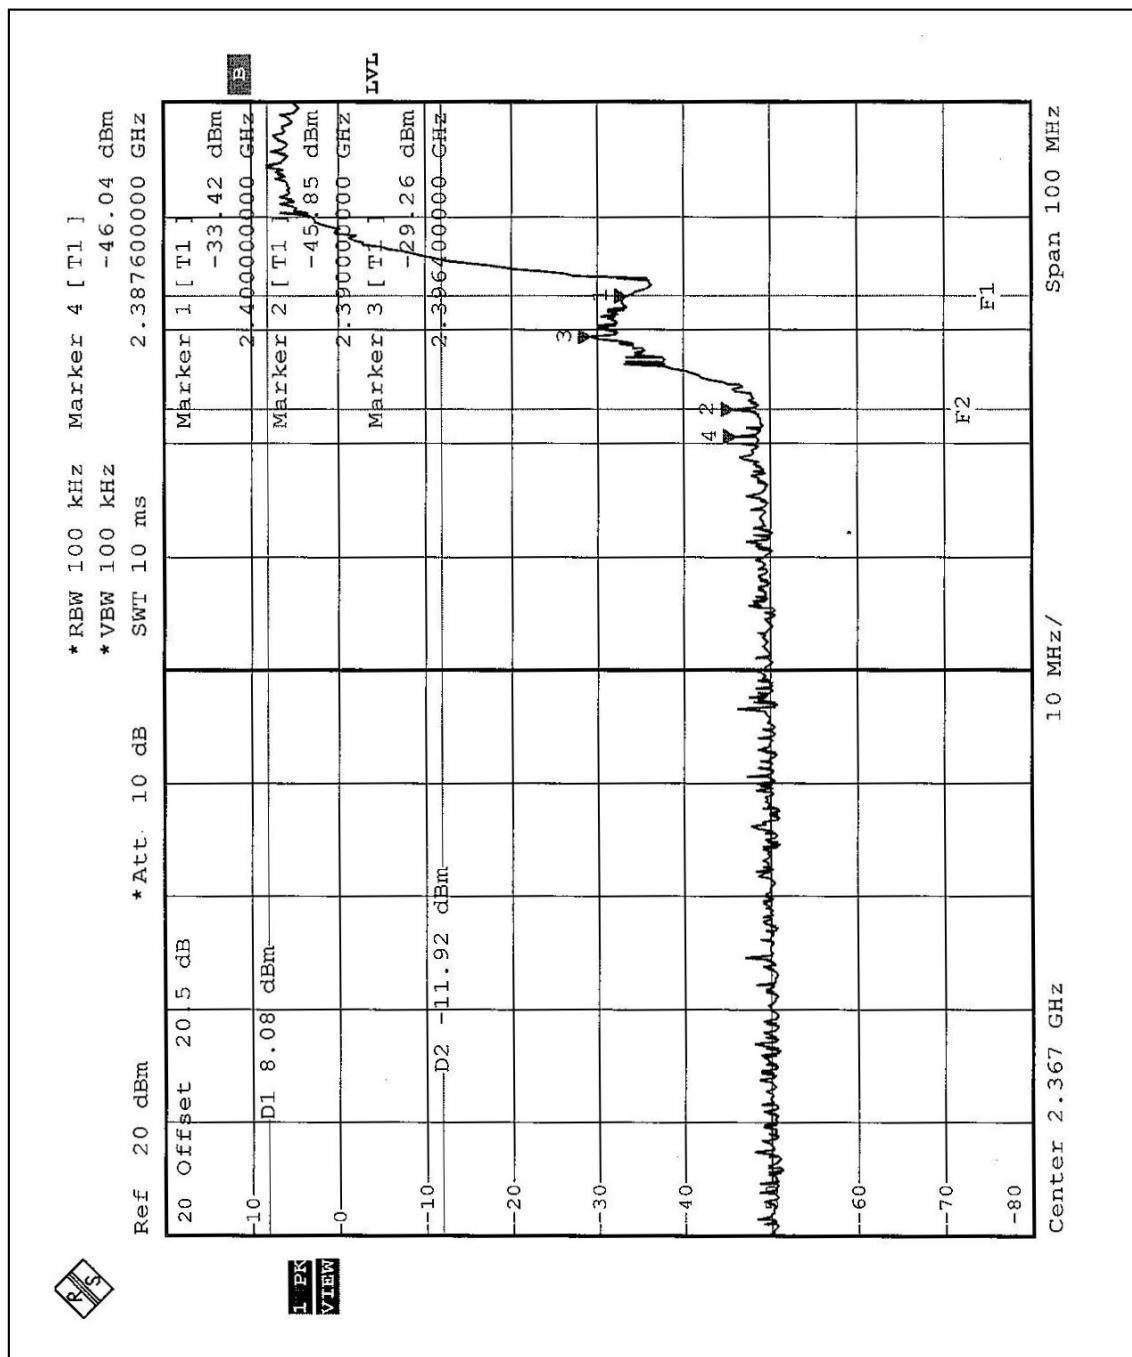




CH11

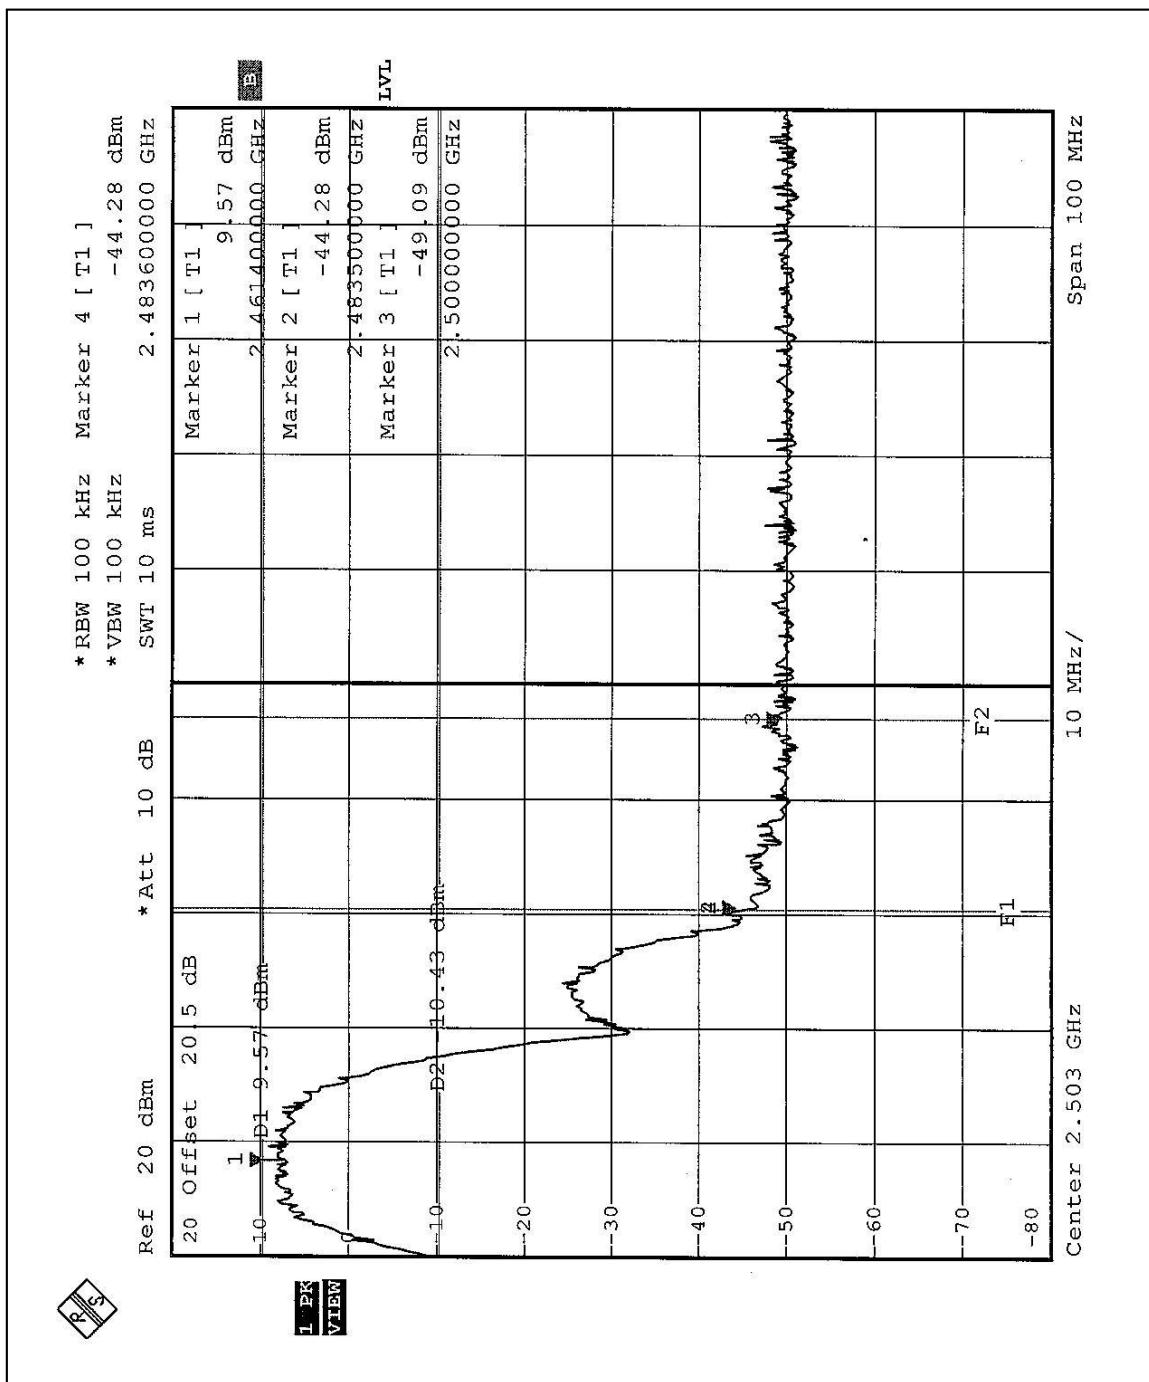


CH1

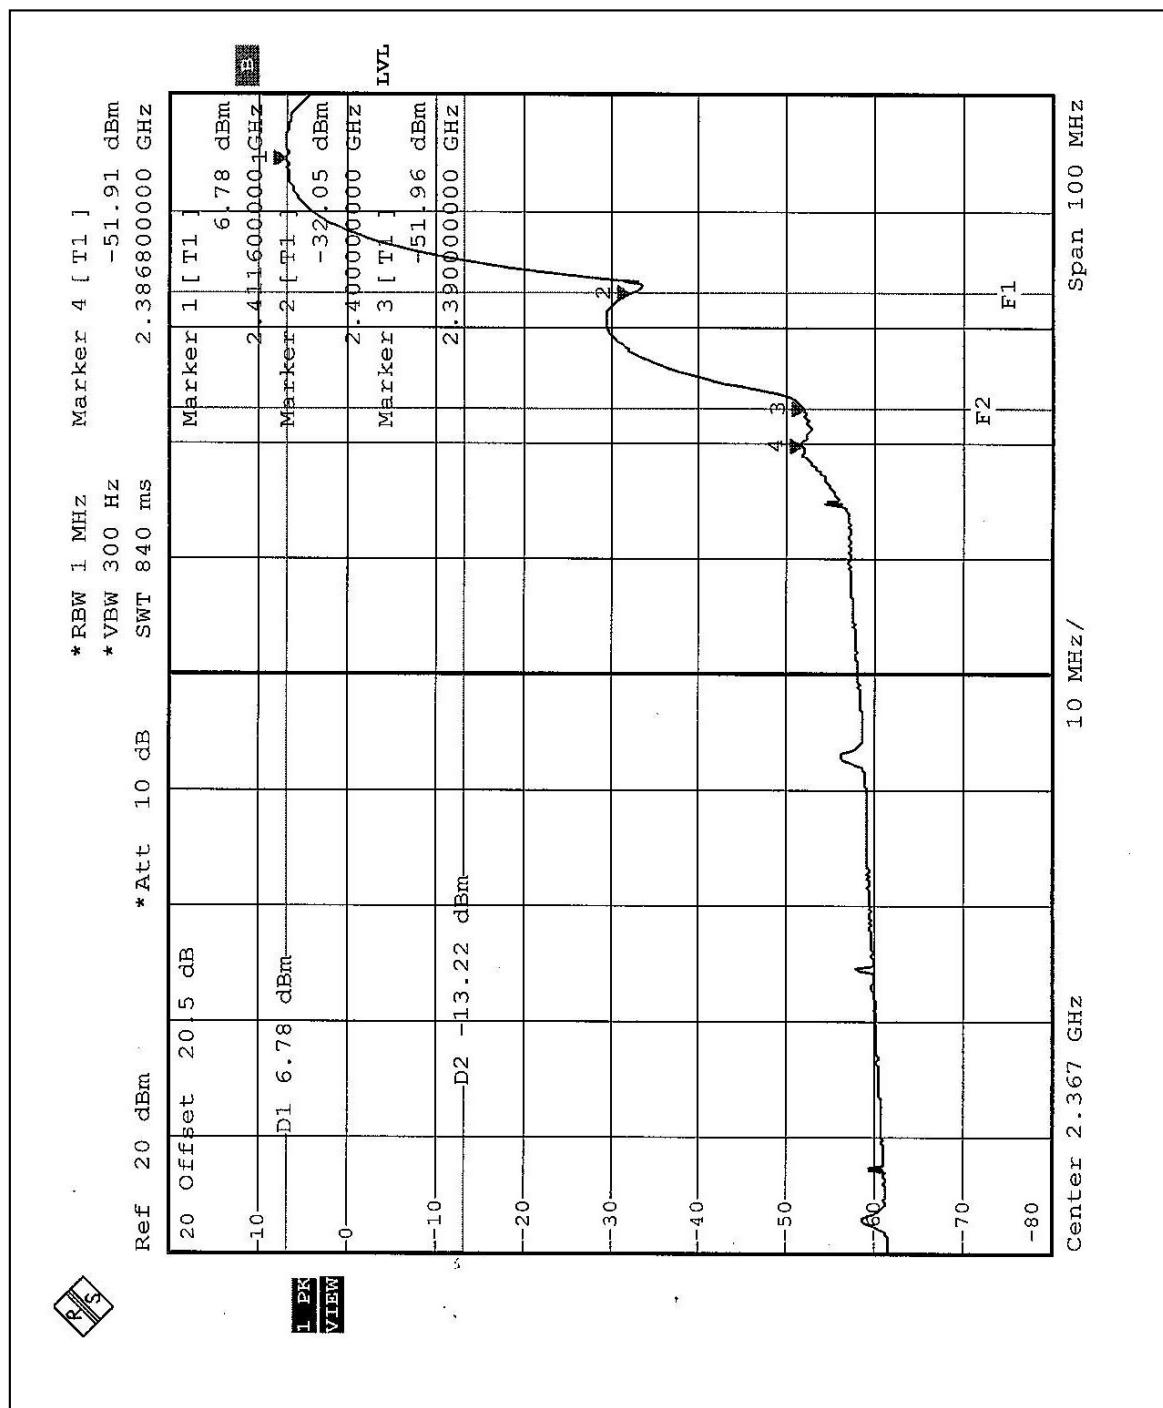




CH11

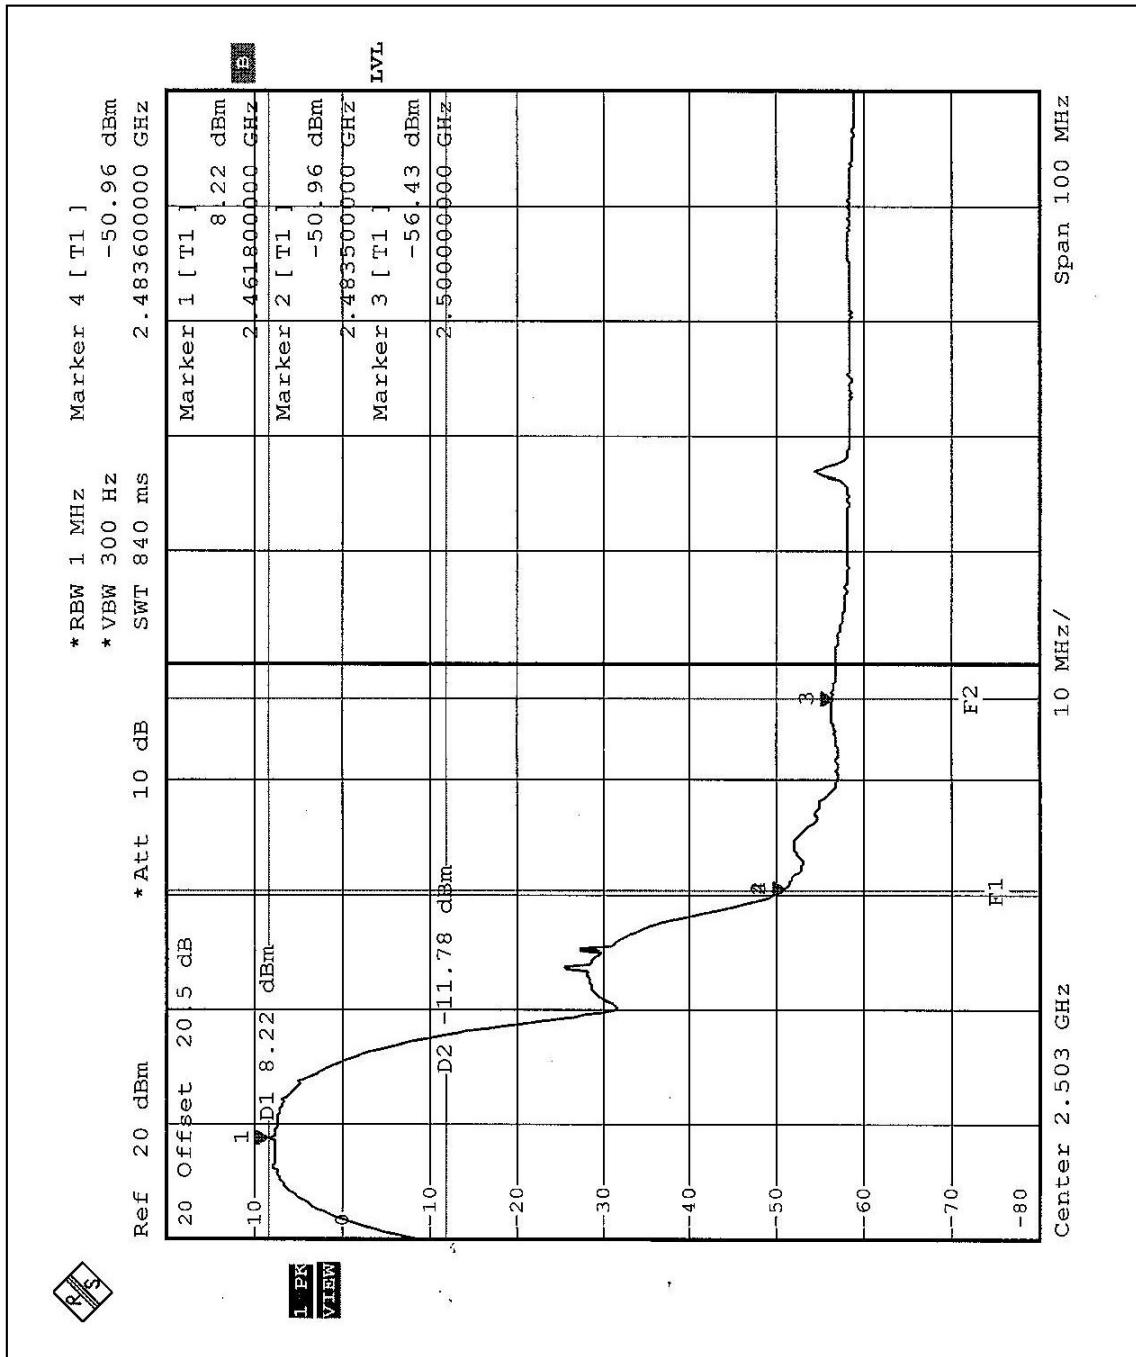




CH1

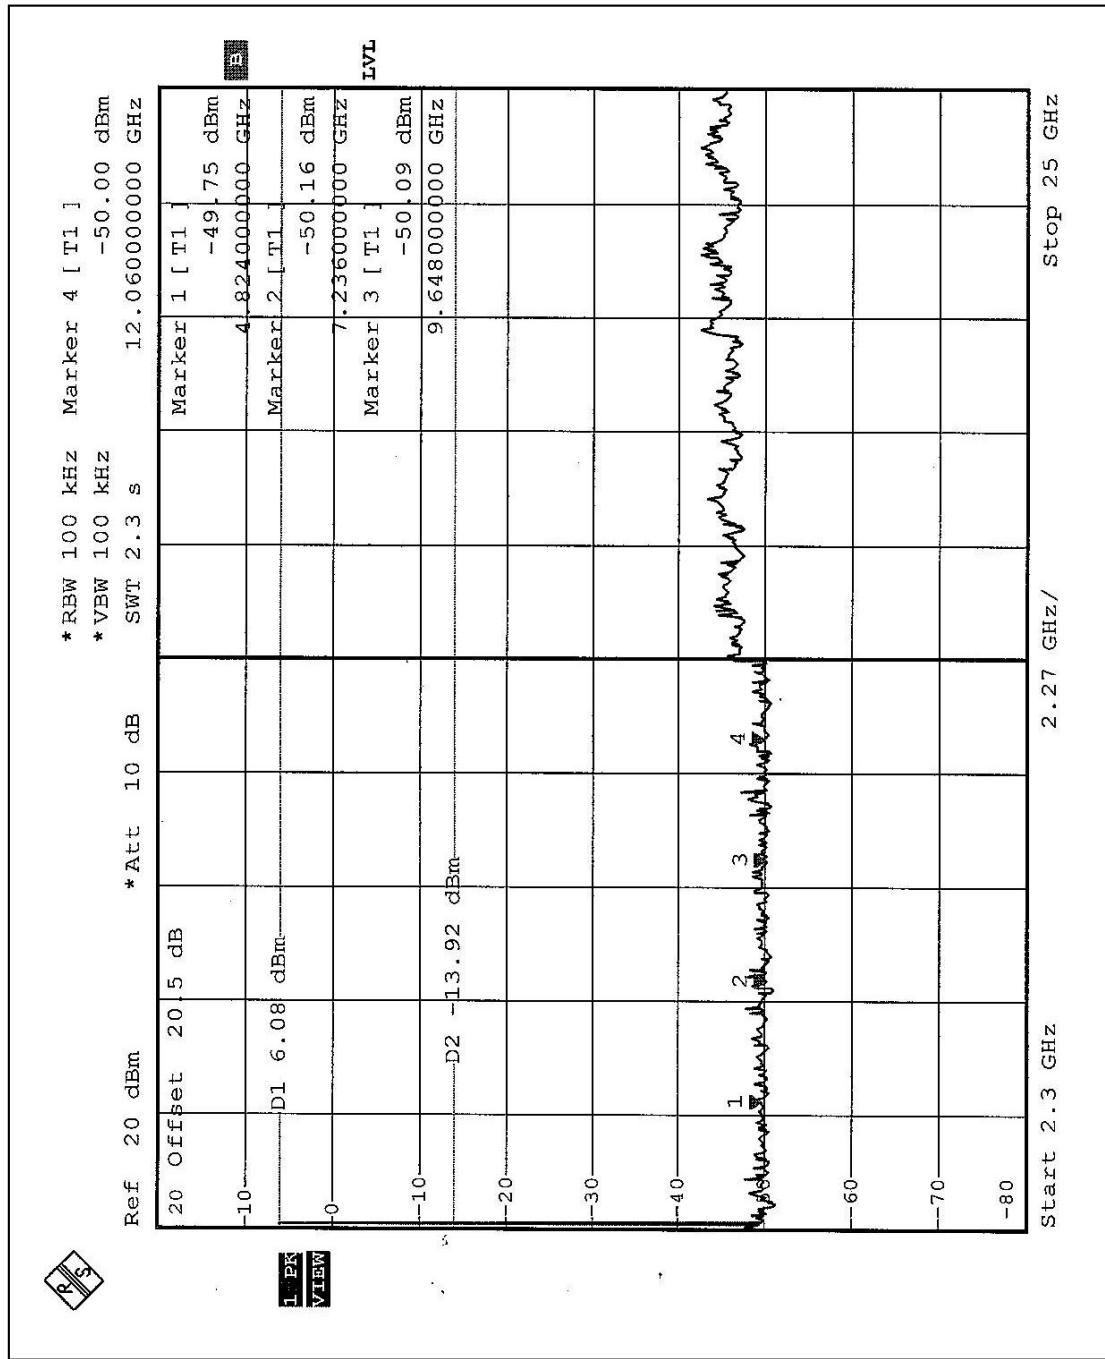

CH11

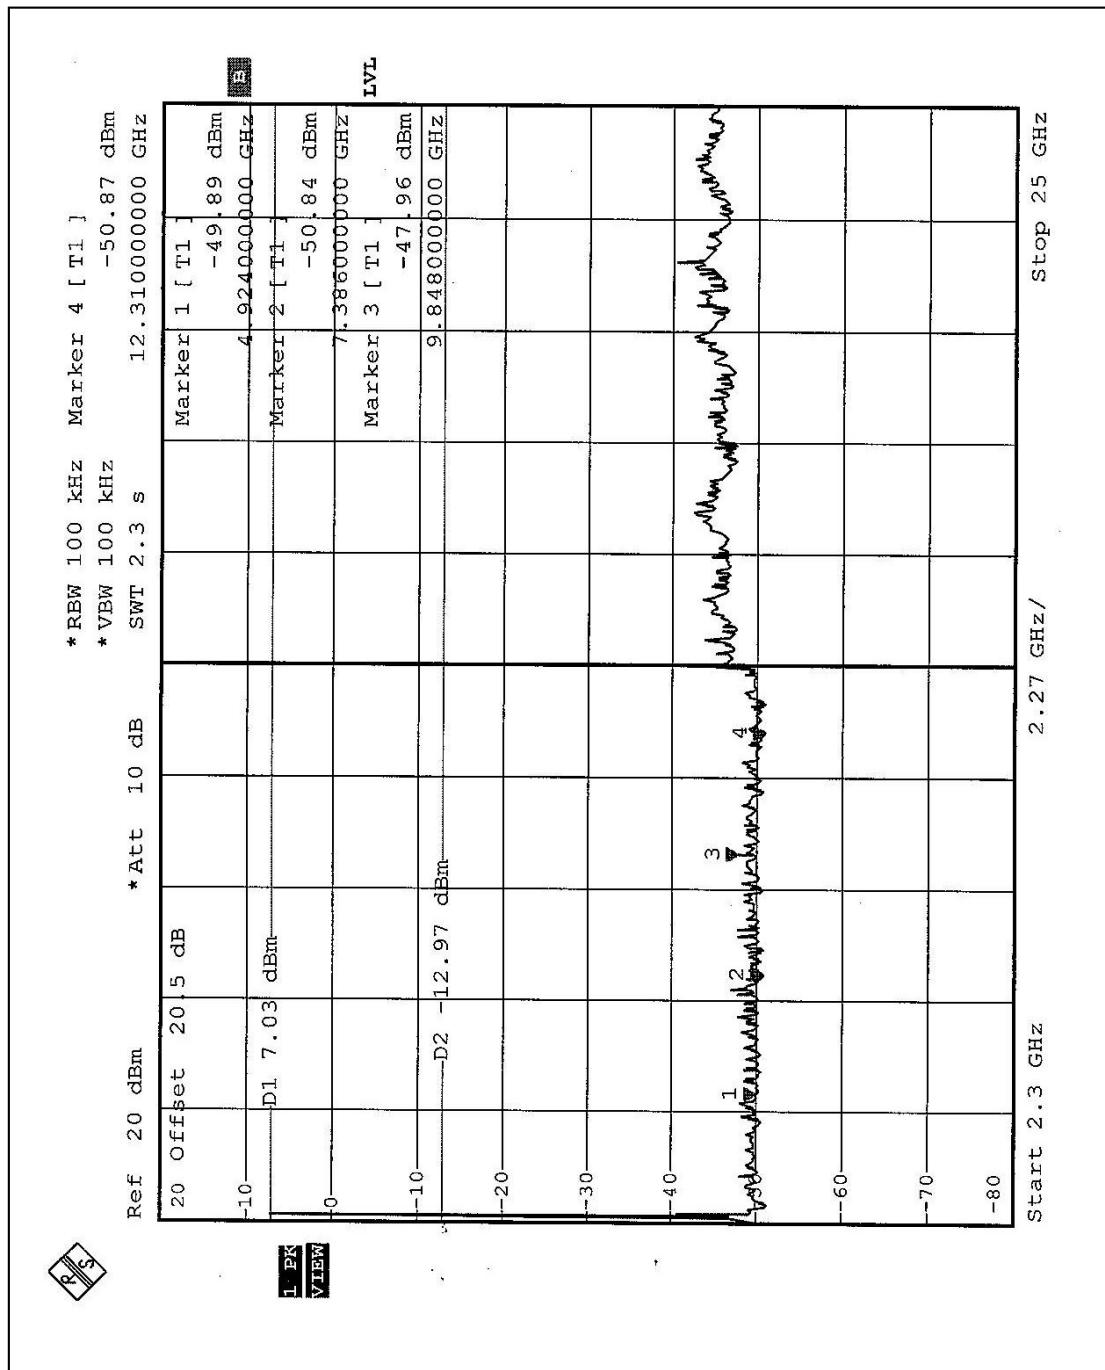



4.6.6 TEST RESULTS – OFDM

The spectrum plots are attached on the following page. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (Peak):

The band edge emission plot of OFDM technique on the following first page show 46.58dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 110.7dBuV/m, so the maximum field strength in restrict band is $110.7 - 46.58 = 64.12$ dBuV/m which is under 74 dBuV/m limit.

The band edge emission plot of OFDM technique on the following second page shows 46.94dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 110.8dBuV/m, so the maximum field strength in restrict band is $110.8 - 46.94 = 63.86$ dBuV/m which is under 74 dBuV/m limit.


NOTE (Average):

The band edge emission plot on the following third page shows 49.85dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2. is 102.6dBuV/m, so the maximum field strength in restrict band is $102.6 - 49.85 = 52.75$ dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot on the following fourth page shows 50.67dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2. is 102.8dBuV/m, so the maximum field strength in restrict band is $102.8 - 50.67 = 52.13$ dBuV/m which is under 54 dBuV/m limit.




CH1

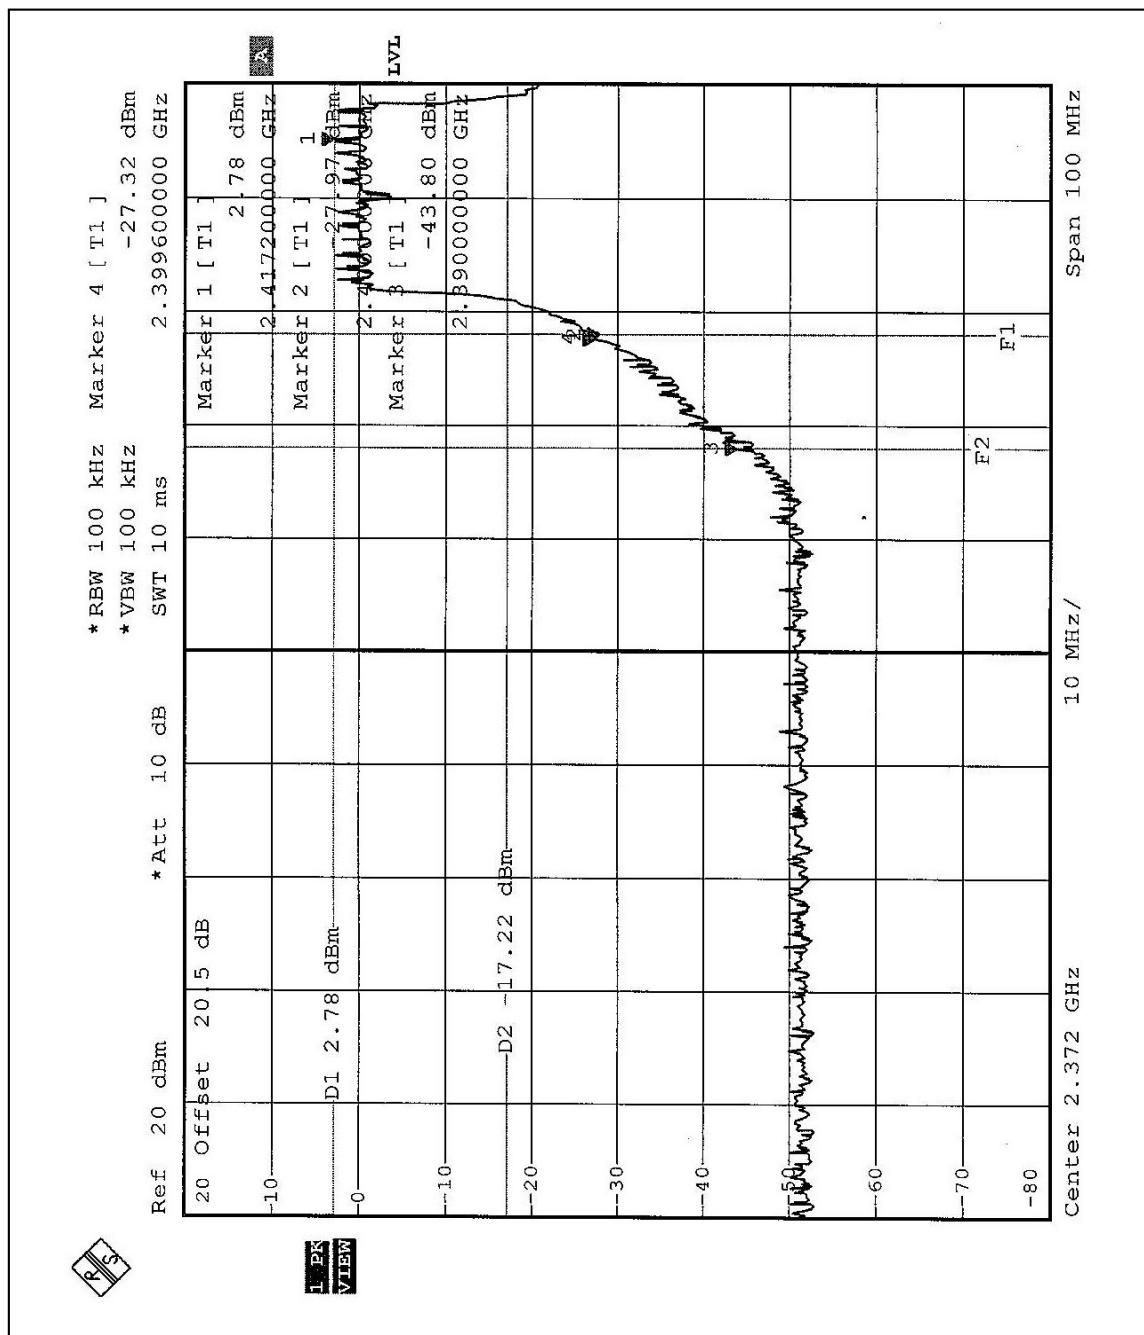




CH11

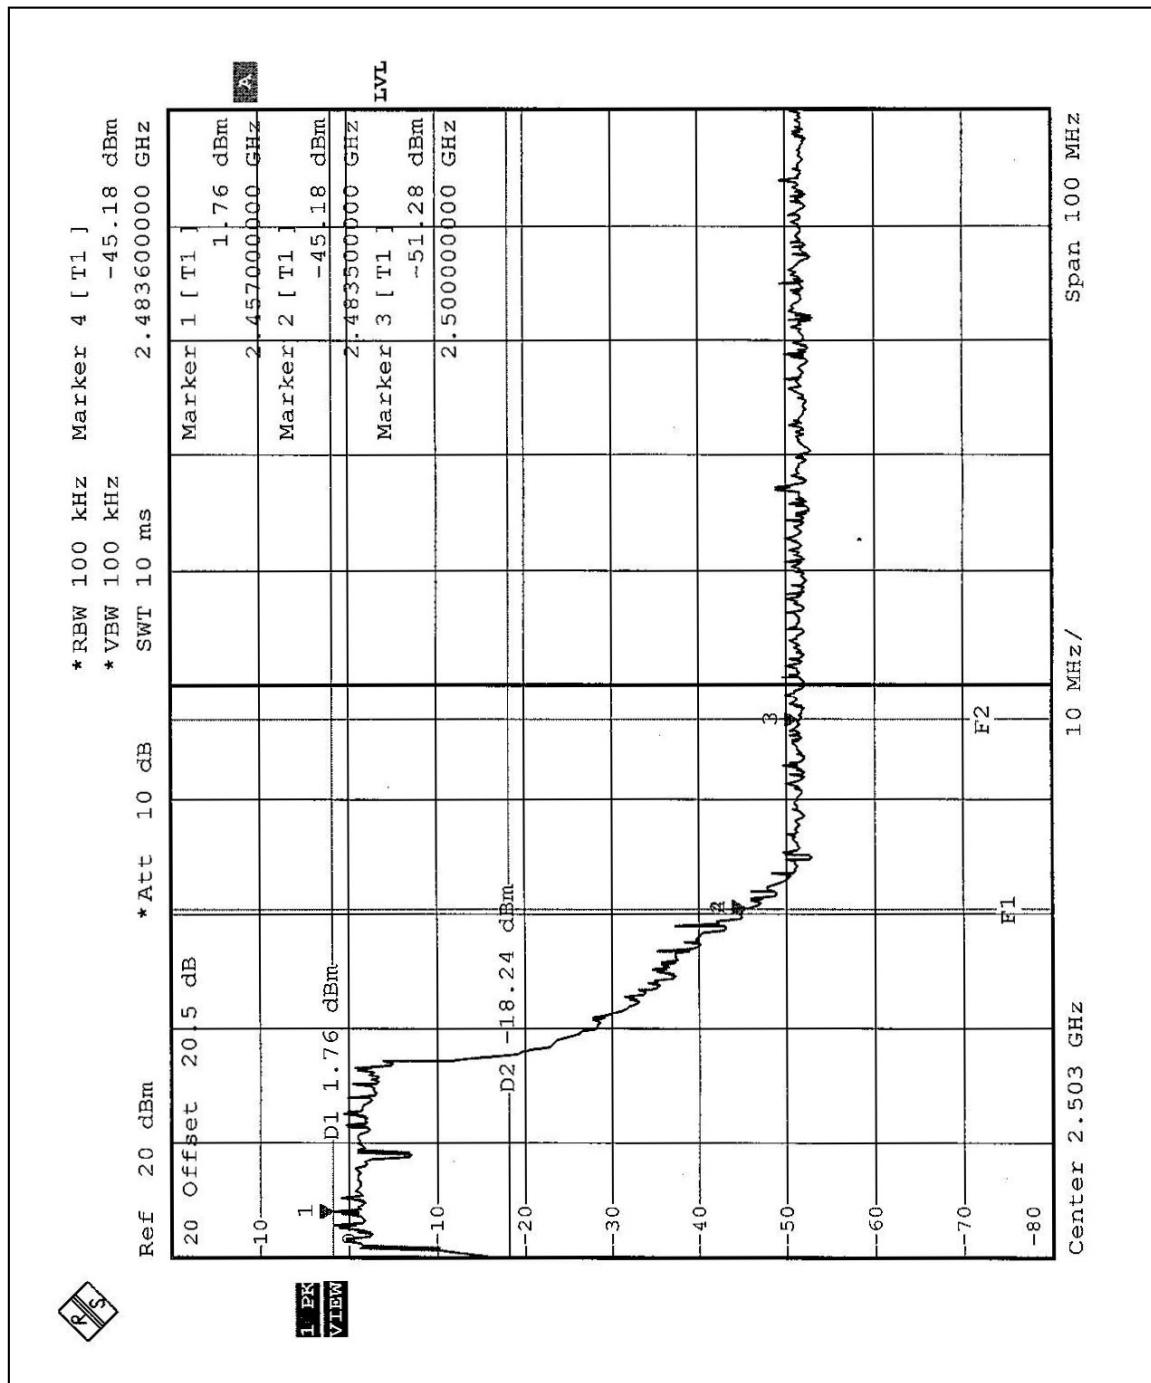




CH1

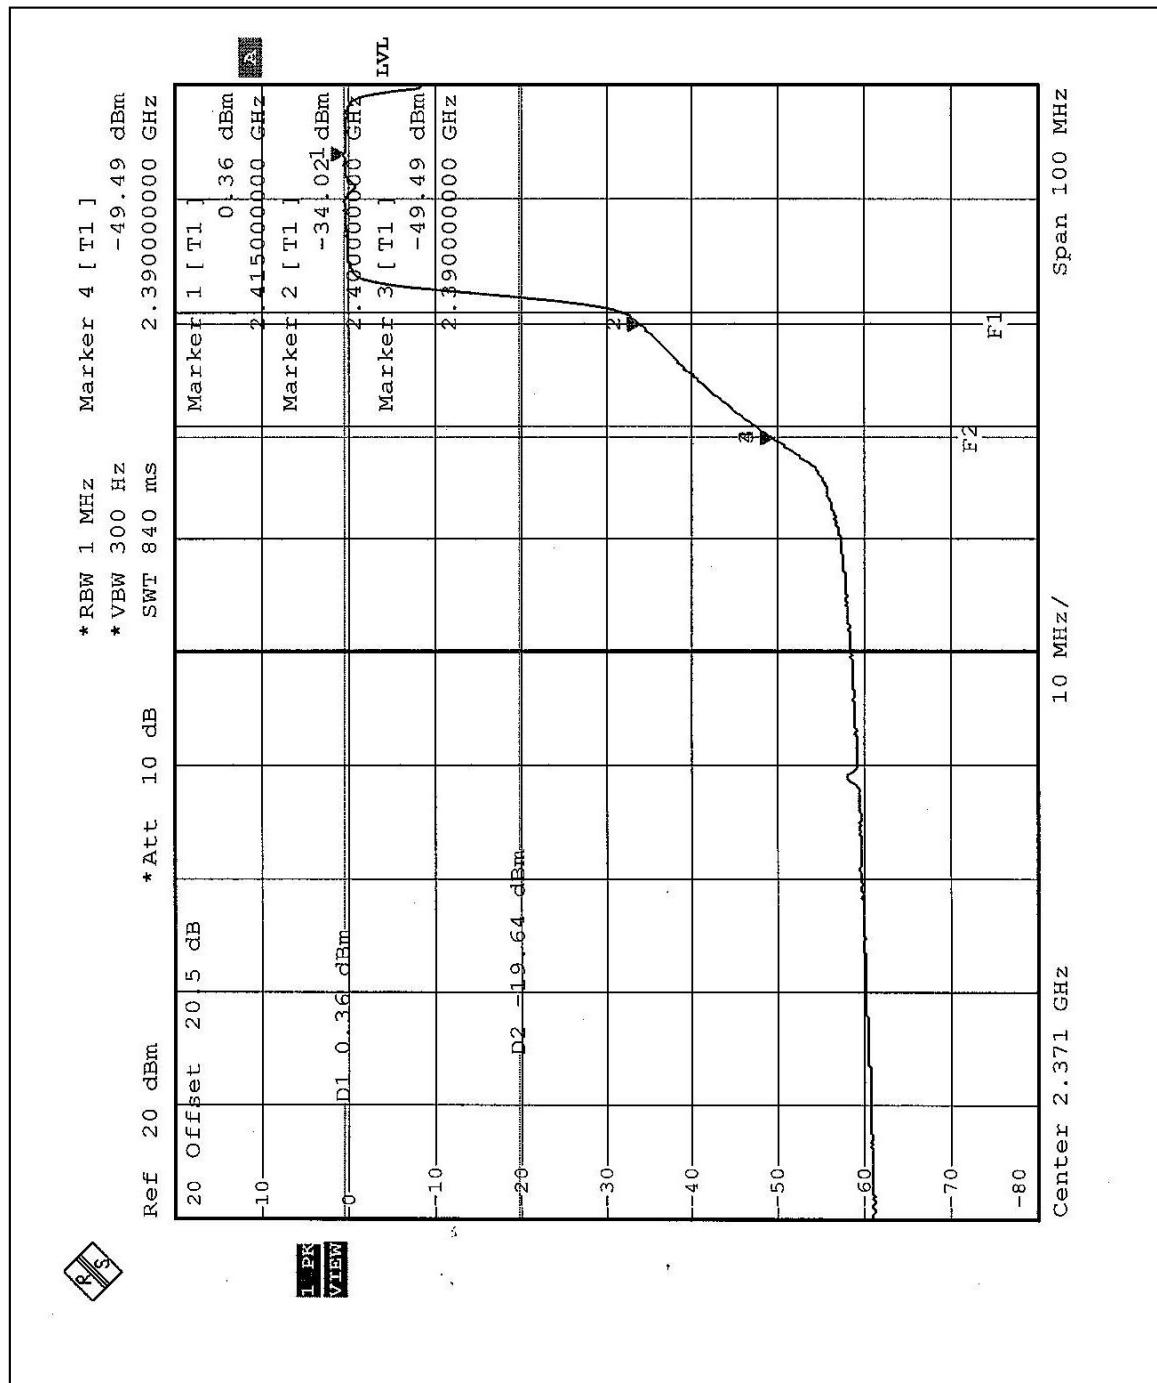




CH11

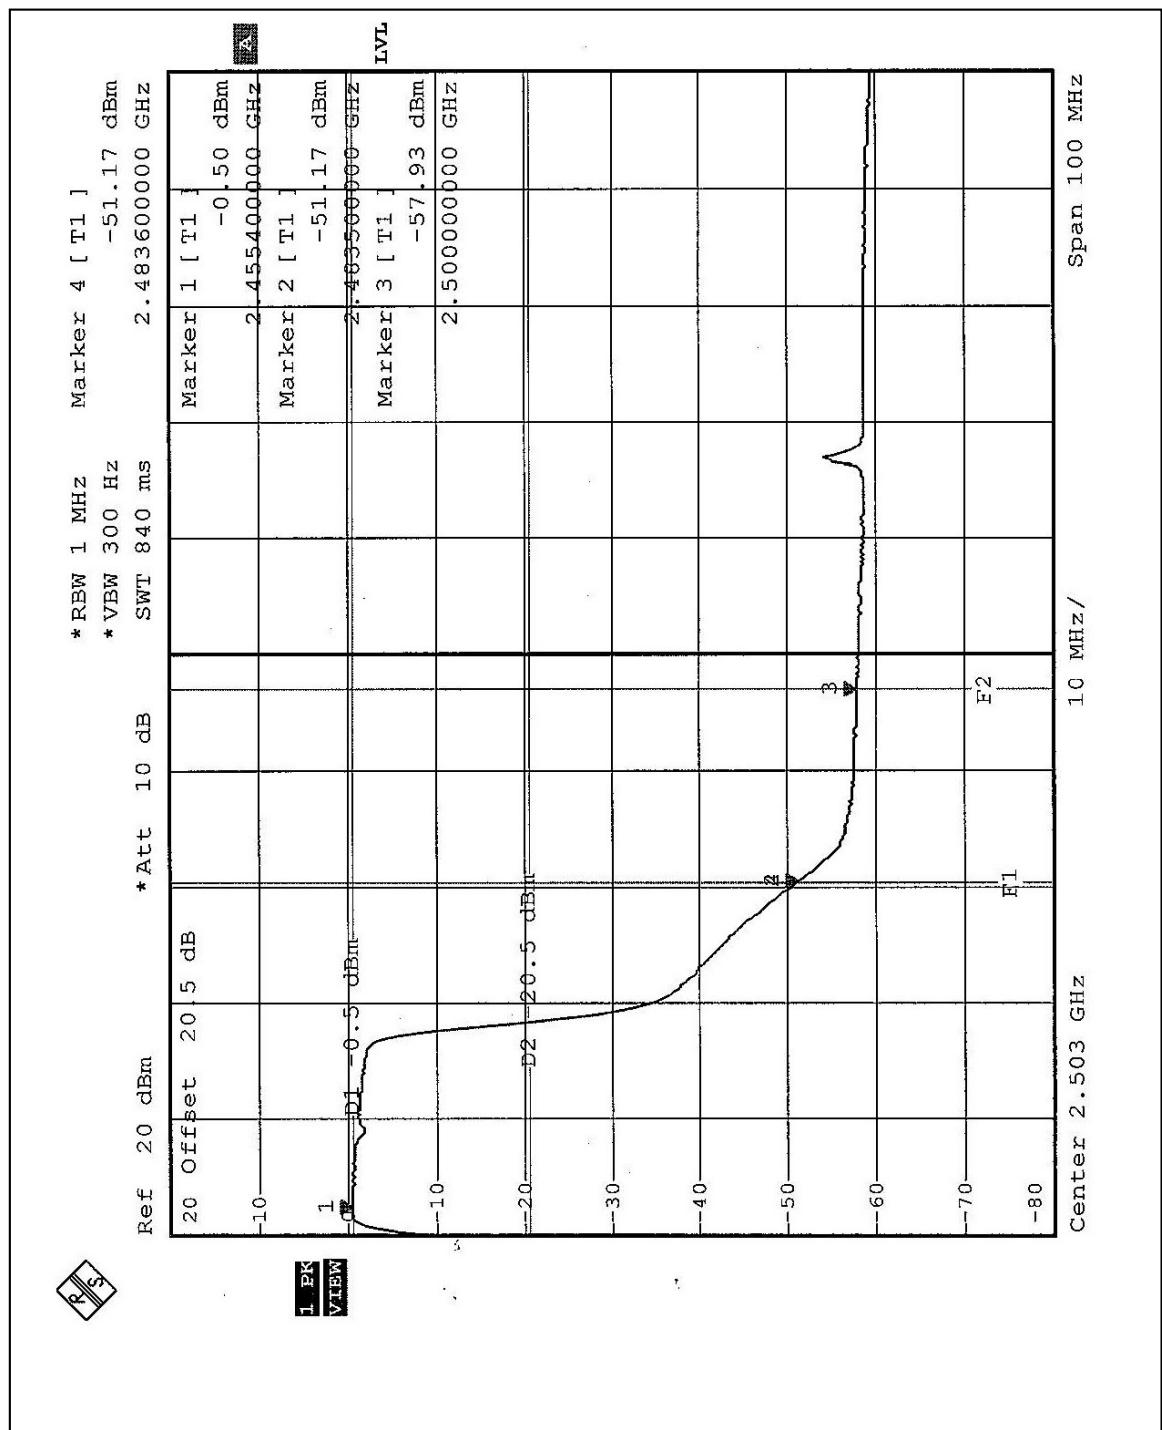




CH1

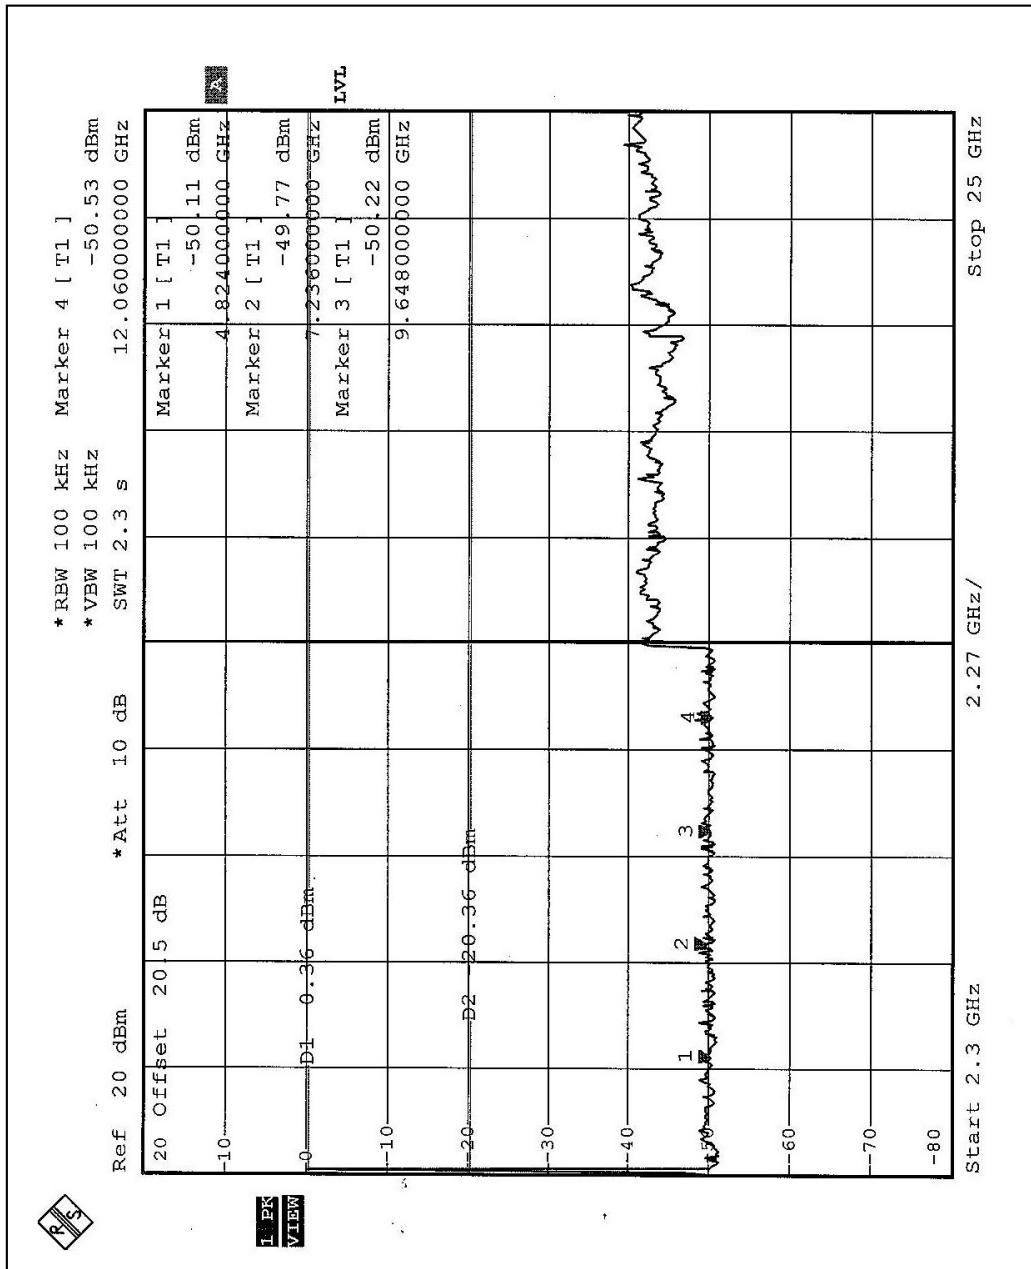



CH11

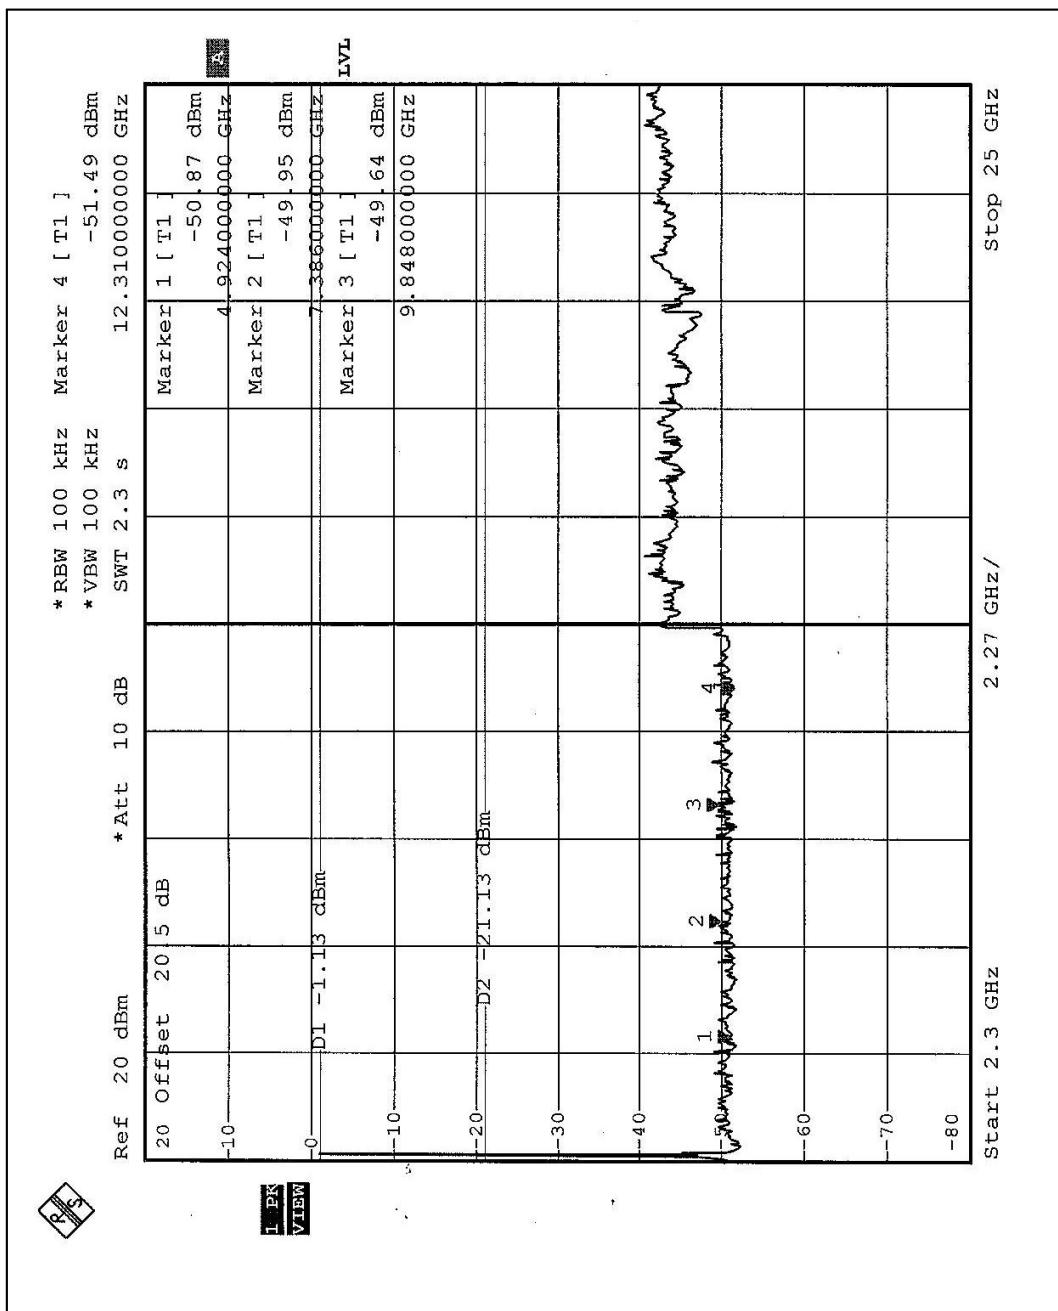



802.11g Turbo OFDM modulation

The spectrum plots are attached on the following page. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (Peak):

The band edge emission plot of OFDM technique on the following first page show 43.17dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2 is 110.0dB_{UV}/m, so the maximum field strength in restrict band is $110.0 - 43.17 = 66.83$ dB_{UV}/m which is under 74 dB_{UV}/m limit.


The band edge emission plot of OFDM technique on the following first page shows 47.11dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2 is 110.0dB_{UV}/m, so the maximum field strength in restrict band is $110.0 - 47.11 = 62.89$ dB_{UV}/m which is under 74 dB_{UV}/m limit.

NOTE (Average):


The band edge emission plot of OFDM technique on the following second page shows 47.66dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2 is 101.2dB_{UV}/m, so the maximum field strength in restrict band is $101.2 - 47.66 = 53.54$ dB_{UV}/m which is under 54 dB_{UV}/m limit.

The band edge emission plot of OFDM technique on the following second page shows 50.45dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2 is 101.2dB_{UV}/m, so the maximum field strength in restrict band is $101.2 - 50.45 = 50.75$ dB_{UV}/m which is under 54 dB_{UV}/m limit.


CH6

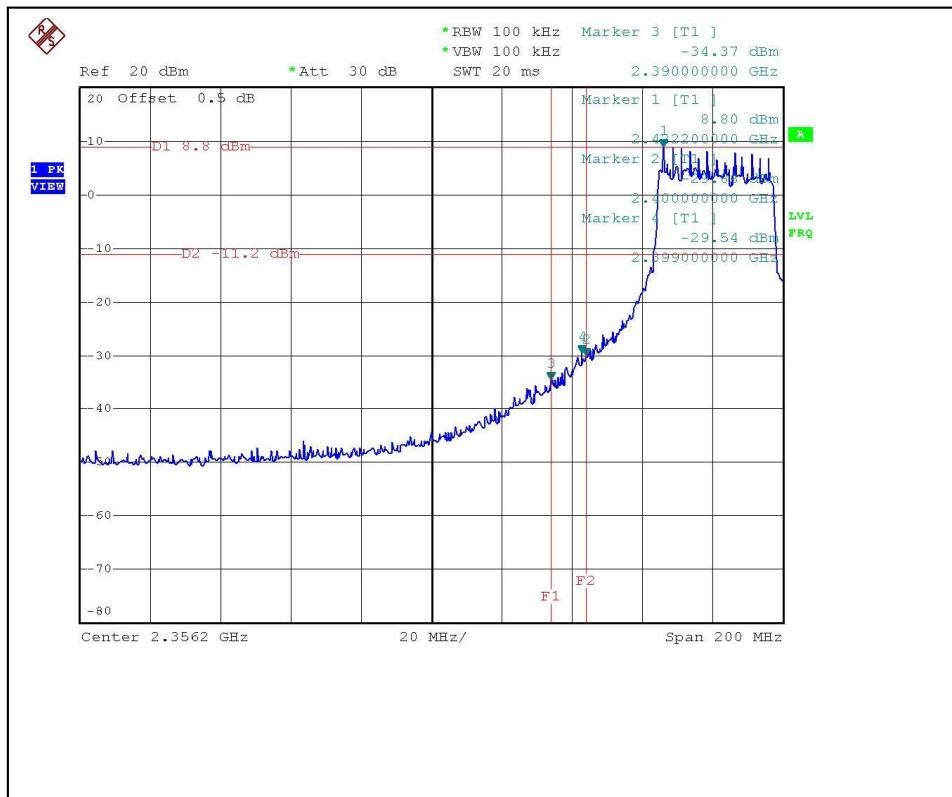


CH6

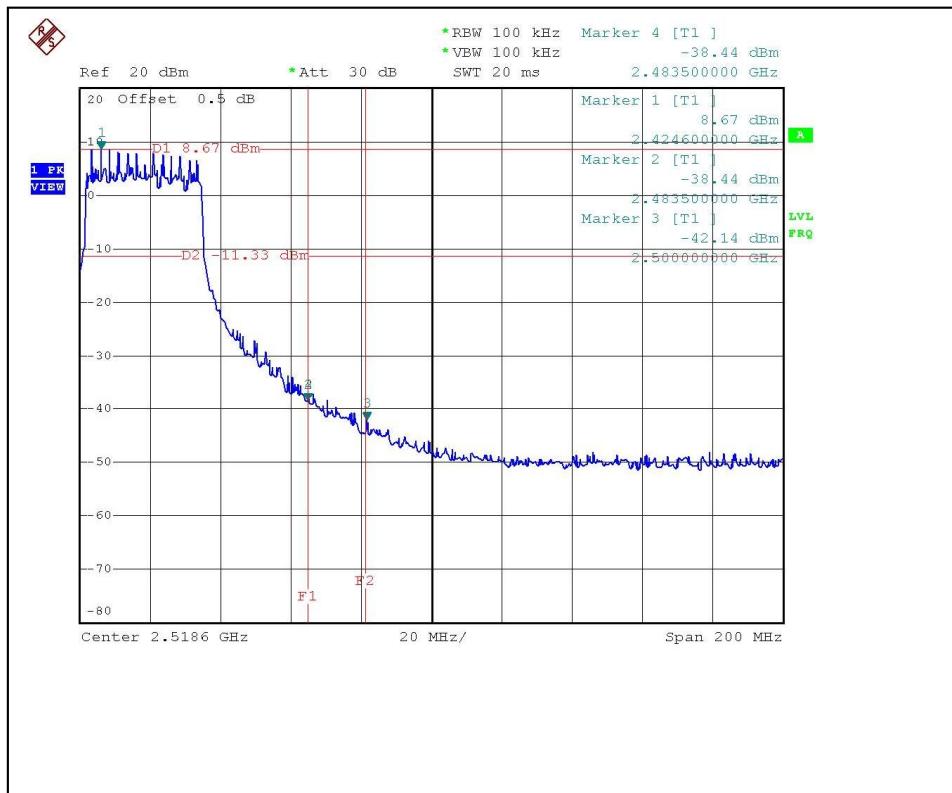

CH6

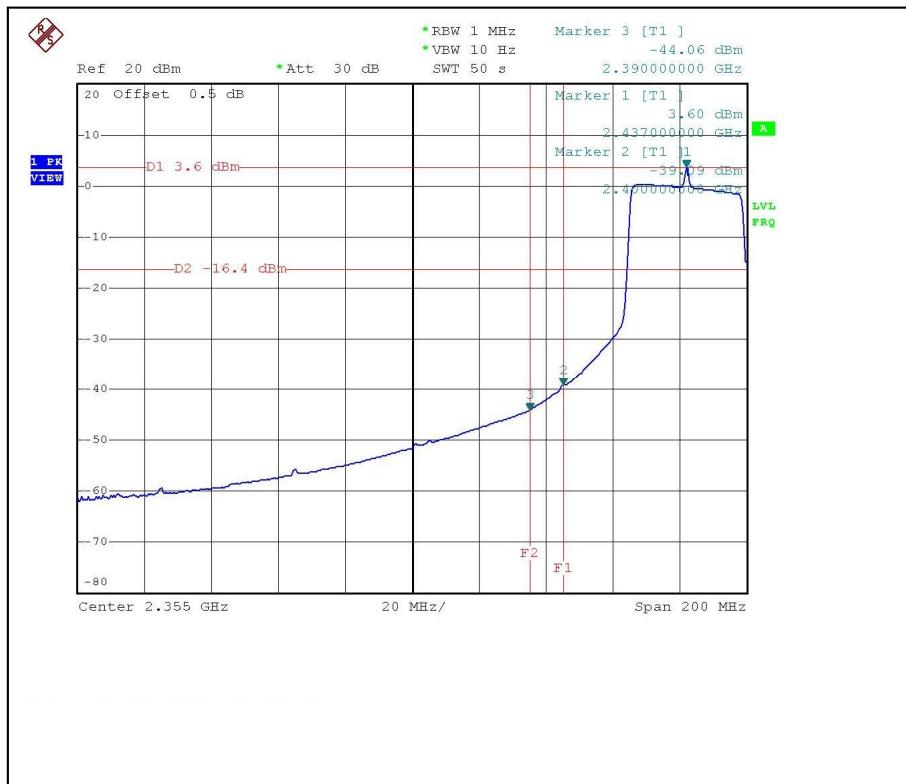


CH6

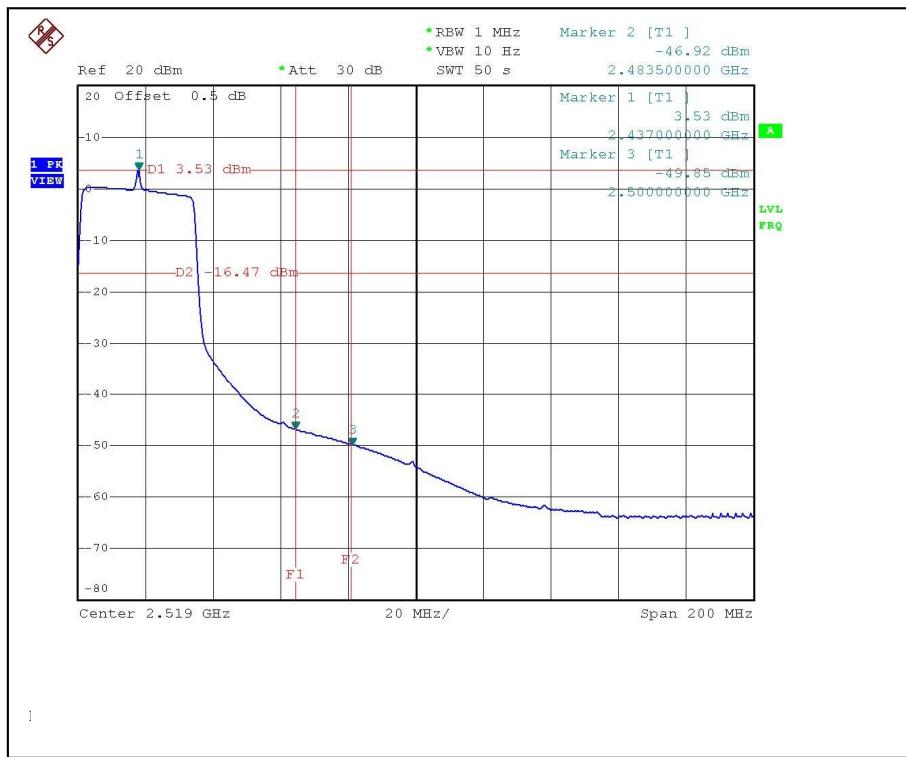



CH6

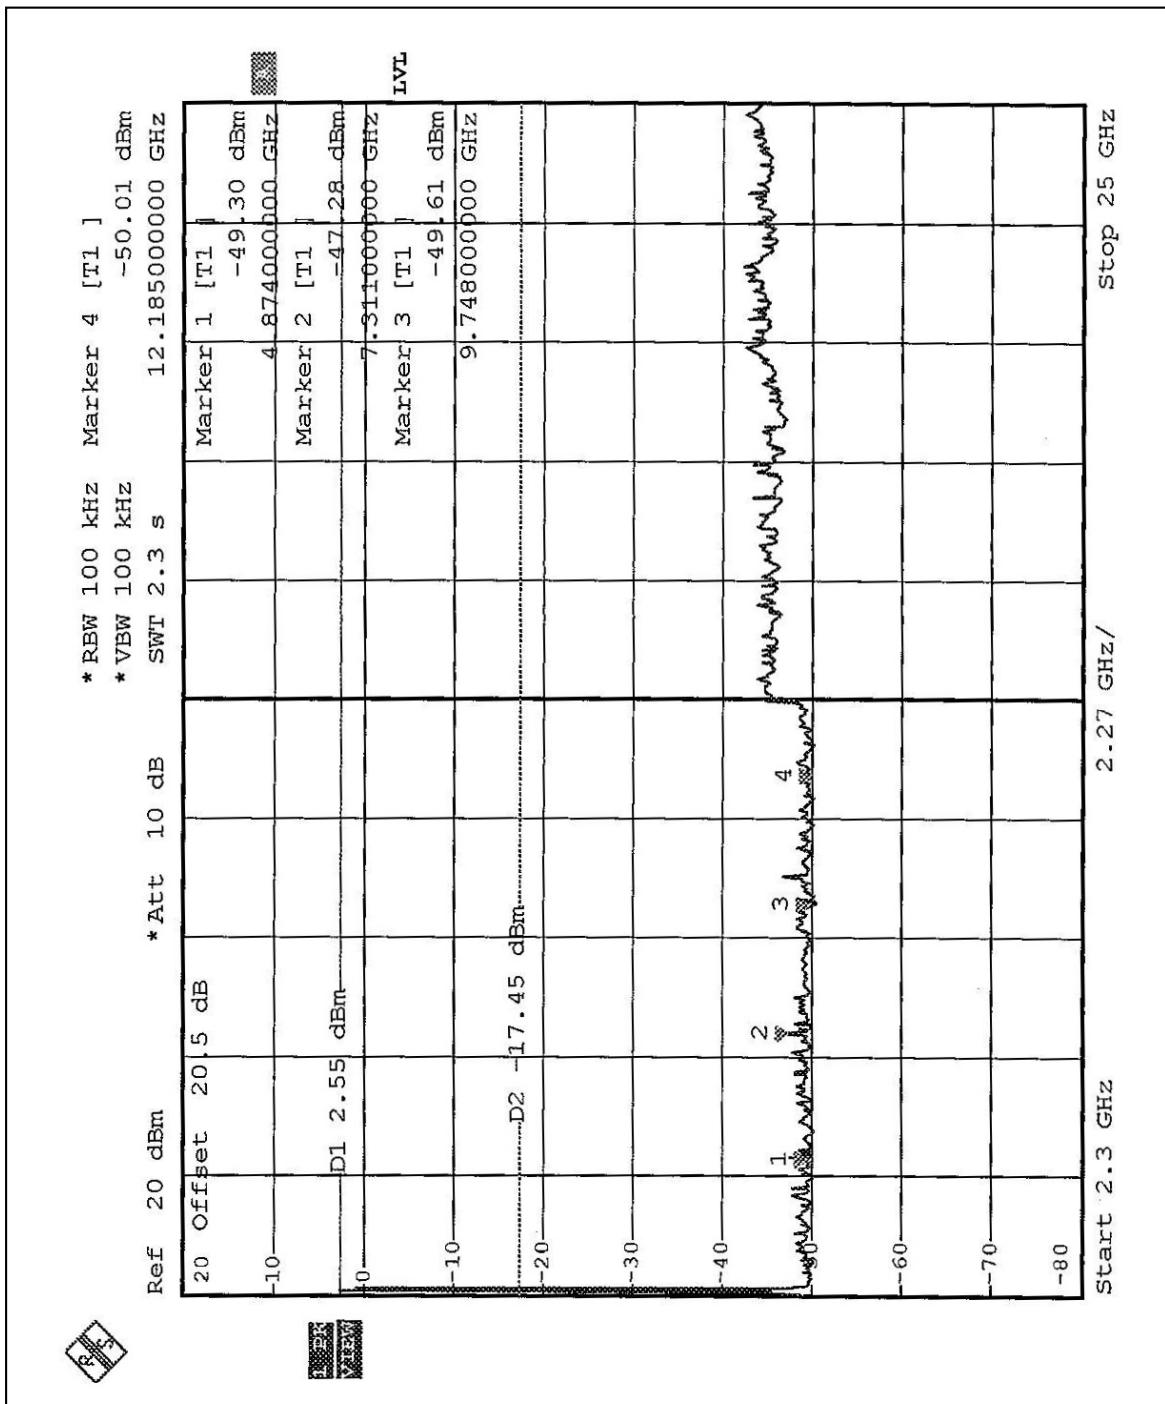



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antennas used in this product are Dipole Antenna with R-SMA connector and printed antenna without connector. The maximum Gain of the antenna is 2.0dBi.



5 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	CNLA, BSMI, NCC
Netherlands	Telefication
Singapore	PSB, GOST-ASIA (MOU)
Russia	CERTIS (MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232
Fax: 886-3-3185050

Email: service@adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.