



FCC RADIO TEST REPORT

Applicant : Allied Telesis K.K.

Address : 2nd. TOC Bldg. 721-11 Nishi-Gotanda,
Shinagawa-ku, Tokyo Japan, 141-0031

Equipment : 802.11ax 4x4+4x4 dual-radio 2.4G/5G wireless AP

Model No. : AT-TQ6602

Trade Name : Allied Telesis

FCC ID. : RSL-TQ6602

I HEREBY CERTIFY THAT :

The sample was received on Dec. 01, 2020 and the testing was completed on May. 04, 2021 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Mark Liao / Supervisor

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory





Contents

1. Summary of Test Procedure and Test Results.....	4
1.1 Applicable Standards	4
2. Test Configuration of Equipment under Test.....	5
2.1 Feature of Equipment under Test.....	5
2.2 Test Mode and Test Software	6
2.3 Description of Test System.....	7
2.4 General Information of Test	8
2.5 Measurement Uncertainty	8
3. Test Equipment and Ancillaries Used for Tests	9
4. Test of AC Power Line Conducted Emission	11
4.1 Test Result and Data	11
4.2 Test Photographs (30MHz ~ 1GHz)	13
5. Test of Spurious Emission (Radiated)	14
5.1 Test Limit	14
5.2 Test Procedures	15
5.3 Typical Test Setup	16
5.4 Test Result and Data (9kHz ~ 30MHz).....	18
5.5 Test Result and Data (30MHz ~ 1GHz).....	18
5.6 Test Result and Data (1GHz ~ 25GHz).....	22
5.7 Restricted Bands of Operation	26
5.8 Test Photographs (30MHz ~ 1GHz)	27
5.9 Test Photographs (1GHz ~ 40GHz)	29



History of this test report

Report No.	Issue Date	Description
TEFU2007311	Nov. 30, 2020	Original
TEFU2007315	May. 10, 2021	1.Add UNII band 2a and UNII band 2c. 2.Support TPC.



1. Summary of Test Procedure and Test Results

1.1 Applicable Standards

ANSI C63.10:2013

Description of Test	Result
CO-LOCATION	PASS

*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement.



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Frequency Range	802.11a/n/ac/ax: 5260-5320MHz, 5500-5720MHz
Modulation Type	802.11n/a: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM 802.11ax: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM
Modulation Technology	OFDM, OFDMA
Data Rate	802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS31, HT20/40 802.11ac: MCS0 – MCS9, VHT20/40/80/80+80 802.11ax: MCS0 – MCS11, HE20/40/80/80+80
Antenna Type	PIFA Antenna
Antenna Gain	5260-5320MHz: ANT A / B / C / D:4.68dBi 5500-5720MHz: ANT A / B / C / D:4.74dBi
Adapter	Brand: Asian Power Devices Inc. Model No: DA-48Z12

Note:

- 1.The EUT support AP Mode(Master).
- 2..The EUT support STBC.
- 3..The EUT support TPC.
4. The EUT not support CDD.
5. WLAN 2.4G and WLAN 5G can simultaneously transmission.
6. WLAN 5GHz 802.11n and 802.11ac and 802.11ax support beamforming Function.
7. For more details, please refer to the User's manual of the EUT.



2.2 Test Mode and Test Software

- During testing, the interface cables and equipment positions were varied according to ANSI C63.4.
- The complete test system included Notebook and EUT for RF test.
- An executive program, "Dut labtool ver.0.0.1.39" under Windows OS system was executed to transmit and receive data via WLAN.
- The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
1	2.4G 11b CH06 + 5G 11ax 40 CH142 , Power from PoE
2	2.4G 11b CH06 + 5G 11ax 40 CH142 , Power from Adapter
caused "Test Mode 1" generated the worst case, it was reported as the final data.	
Radiation Emissions (30MHz ~ 1GHz)	
Test Mode	Operating Description
1	2.4G 11b CH06 + 5G 11ax 40 CH142 , Power from PoE
2	2.4G 11b CH06 + 5G 11ax 40 CH142 , Power from Adapter
caused "Test Mode 2" generated the worst case, it was reported as the final data.	
Radiation Emissions (1GHz ~40GHz)	
Test Mode	Operating Description
1	2.4G 11b CH06 + 5G 11ax 40 CH142 , Power from PoE
2	2.4G 11b CH06 + 5G 11ax 40 CH142 , Power from Adapter
caused "Test Mode 2" generated the worst case, it was reported as the final data.	



2.3 Description of Test System

RF Conducted				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
RJ45 Cable	TE CONNECTIVITY	CAT5E	1.2m / NS	N/A
Radiated Emissions				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
RJ45 Cable	TE CONNECTIVITY	CAT5E	15m / NS	N/A
AC Power Line Conducted Emission				
Equipment	Brand	Model	Length/Type	Power cord/Length/Type
Notebook	ASUS	P2430U	N/A	Adapter / 1.8m / NS
RJ45 Cable	TE CONNECTIVITY	CAT5E	1.2m / NS	N/A
RJ45 Cable	TE CONNECTIVITY	CAT5E	15m / NS	N/A
POE	CERIO	POE-S53VG	N/A	N/A



2.4 General Information of Test

Test Site	Cerpass Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881	
	FCC	TW1439, TW1079
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication test C-4663 for Conducted emission test R-4218 for Radiated emission test G-10812, G-10813 for radiated disturbance above 1GHz
Frequency Range Investigated:	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 40,000MHz	
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.	

Test Item	Test Site	Test period	Environmental Conditions	Tested By
Radiated Emissions	3M02-NK	2021/05/03	22°C / 45%	Nick Guan
AC Power Line Conducted Emission	CON01-NK	2021/05/04	23°C / 42%	Nick Guan

2.5 Measurement Uncertainty

Measurement Item	Uncertainty
AC Power Line Conduction(150K~30MHz)	±3.63dB
Radiated Spurious Emission(9KHz~30MHz)	±3.4dB
Radiated Spurious Emission(30MHz~1GHz)	±5.6dB
Radiated Spurious Emission(1GHz~40GHz)	±6.6dB



3. Test Equipment and Ancillaries Used for Tests

Test Item	Radiated Emissions				
Test Site	Semi Anechoic Room(3M02-NK)				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Bilog Antenna	Schwarzbeck	VULB9168	275	2020/10/07	2021/10/06
Active Loop Antenna	EMCO	6507	40855	2020/05/21	2021/05/20
Horn Antenna	EMCO	3115	31601	2020/10/16	2021/10/15
Horn Antenna	EMCO	3116	31974	2020/09/24	2021/09/23
EMI Receiver	ROHDE & SCHWARZ	ESCI	101423	2020/06/23	2021/06/22
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	102151	2020/08/03	2021/08/02
Preamplifier	EM Electronics corp.	EM330	60658	2020/10/20	2021/10/19
Preamplifier	EM Electronics corp.	EM330	60660	2021/03/18	2022/03/17
Preamplifier	Agilent	8449B	3008A01954	2021/03/22	2022/03/21
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2020/11/06	2021/11/05
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1315	2020/04/09	2021/04/08
Cable-3in1(30M-1G)	HARBOUR INDUSTRIES	LL142	CCE1315	2021/04/08	2022/04/07
Cable-0.5m(1G-18G)	HUBER SUHNER	SUCOFLEX 104	805443/4	2020/05/27	2021/05/26
Cable-3m(1G-18G)	HUBER SUHNER	SUCOFLEX 104	805796/4	2020/05/27	2021/05/26
Cable-8m(1G-18G)	HUBER SUHNER	SUCOFLEX 104	805795/4	2020/05/27	2021/05/26
Cable-0.5m(30M-40G)	HUBER SUHNER	SUCOFLEX 102	28420/2	2020/04/01	2021/03/31
Cable-0.5m(30M-40G)	HUBER SUHNER	SUCOFLEX 102	28420/2	2021/04/03	2022/04/02
Cable-3m(30M-40G)	HUBER SUHNER	SUCOFLEX 102	MY2608/2	2020/04/01	2021/03/31
Cable-3m(30M-40G)	HUBER SUHNER	SUCOFLEX 102	MY2608/2	2021/04/09	2022/04/08
Cable-0.5m(1G-40G)	Rapidtek	40GHZ 50CM	38MS-38MS50314	2020/04/09	2021/04/08
Cable-0.5m(1G-40G)	Rapidtek	40GHZ 50CM	38MS-38MS50314	2021/04/08	2022/04/07
Cable-6m(9k~300M)	NA	EMC5D-BM-BM-6	130605	2020/09/18	2021/09/17
E3	AUDIX	v8.2014-8-6	RK-000529	NA	NA

Test Item	RF Conducted				
Test Site	RFCON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
Spectrum Analyzer	ROHDE & SCHWARZ	FSV 40-N	101329	2020/07/07	2021/07/06
CAX Signal Analyzer	KEYSIGHT	N9000B	MY57100339	2020/12/25	2021/12/24
Attenuator	KEYSIGHT	8491B	MY39250705	2020/09/28	2021/09/27
TEMP & HUMI CHAMBER	T-MACHINE	TMJ-9712	T-12-040111	2020/08/25	2021/08/24
Power Meter	Anritsu	ML2495A	2034001	2020/09/25	2021/09/24
Power Sensor	Anritsu	MA2411B	1911175	2020/09/25	2021/09/24




Test Item	AC Power Line Conducted Emission				
Test Site	CON01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	ROHDE & SCHWARZ	ESCI	100443	2020/05/25	2021/05/24
Line Impedance Stabilization Network	Schwarzbeck	NSLK 8127	8127-516	2020/09/26	2021/09/25
Pulse Limiter	ROHDE & SCHWARZ	ESH3-Z2	101933	2020/09/17	2021/09/16
Cable-6m(9k~300M)	NA	EMC5D-BM-BM-6	130605	2020/09/18	2021/09/17
E3	AUDIX	v8.2014-8-6	RK-000531	NA	NA



4. Test of AC Power Line Conducted Emission

4.1 Test Result and Data

Power	: AC 120V / 60Hz	Pol/Phase	: LINE
Test Mode	: Mode 1		:

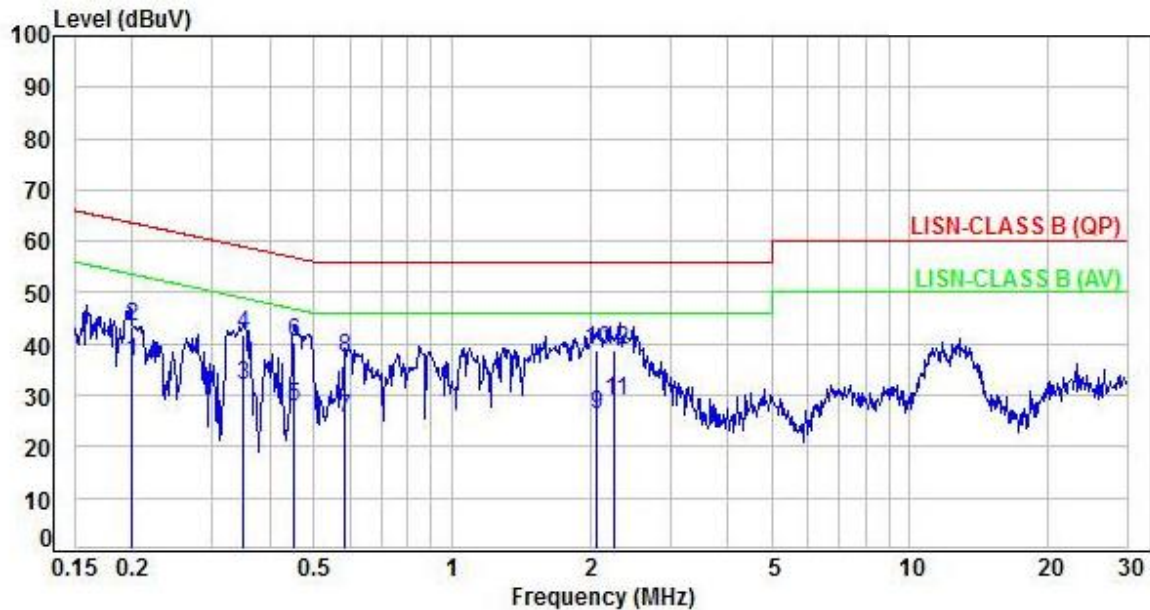

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV)	Limit (dBUV)	Margin (dB)	Detector	P/F
1	0.20	9.96	26.68	36.64	53.63	-16.99	Average	P
2	0.20	9.96	33.29	43.25	63.63	-20.38	QP	P
3	0.35	9.97	21.93	31.90	48.97	-17.07	Average	P
4	0.35	9.97	31.78	41.75	58.97	-17.22	QP	P
5	0.45	9.97	17.77	27.74	46.86	-19.12	Average	P
6	0.45	9.97	30.30	40.27	56.86	-16.59	QP	P
7	0.58	9.99	15.36	25.35	46.00	-20.65	Average	P
8	0.58	9.99	27.30	37.29	56.00	-18.71	QP	P
9	2.06	10.10	16.07	26.17	46.00	-19.83	Average	P
10	2.06	10.10	28.55	38.65	56.00	-17.35	QP	P
11	2.27	10.12	18.71	28.83	46.00	-17.17	Average	P
12	2.27	10.12	28.79	38.91	56.00	-17.09	QP	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Power	: AC 120V / 60Hz	Pol/Phase	: NEUTRAL
Test Mode	: Mode 1		:

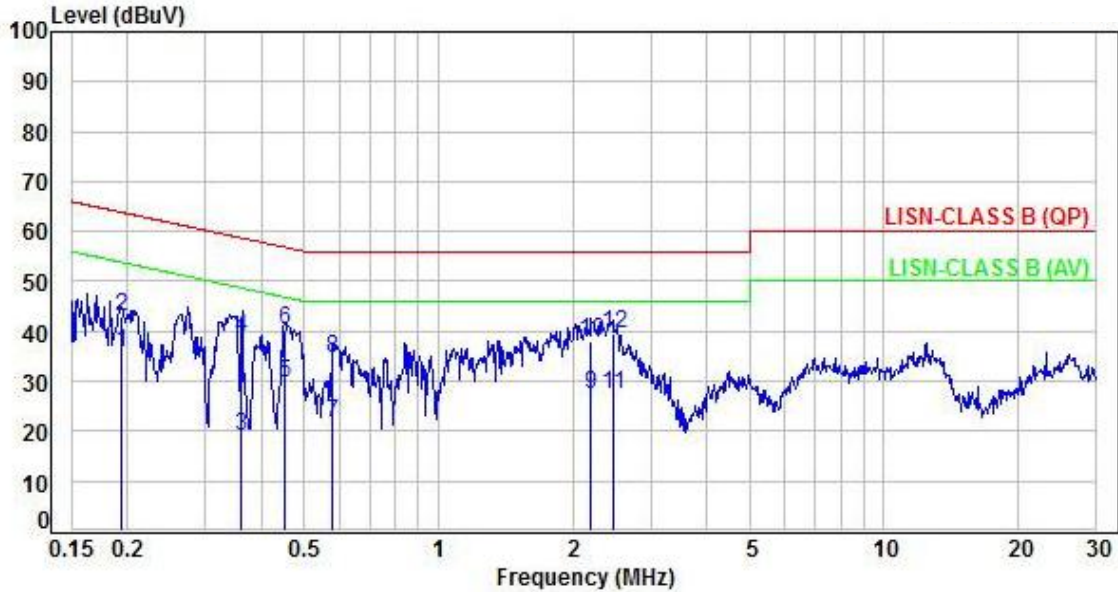

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.19	9.97	25.62	35.59	53.83	-18.24	Average	P
2	0.19	9.97	33.06	43.03	63.83	-20.80	QP	P
3	0.36	9.98	9.13	19.11	48.73	-29.62	Average	P
4	0.36	9.98	28.91	38.89	58.73	-19.84	QP	P
5	0.45	9.98	19.78	29.76	46.85	-17.09	Average	P
6	0.45	9.98	30.22	40.20	56.85	-16.65	QP	P
7	0.58	10.00	11.57	21.57	46.00	-24.43	Average	P
8	0.58	10.00	24.56	34.56	56.00	-21.44	QP	P
9	2.19	10.10	17.40	27.50	46.00	-18.50	Average	P
10	2.19	10.10	27.93	38.03	56.00	-17.97	QP	P
11	2.46	10.11	17.08	27.19	46.00	-18.81	Average	P
12	2.46	10.11	29.25	39.36	56.00	-16.64	QP	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



5. Test of Spurious Emission (Radiated)

5.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3



5.2 Test Procedures


- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB bandwidth of the measurement antenna.

Note: The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.
(2.4GHz Y/ 5GHz Z-AXIS is the worst.)




5.3 Typical Test Setup

Below 30MHz test setup

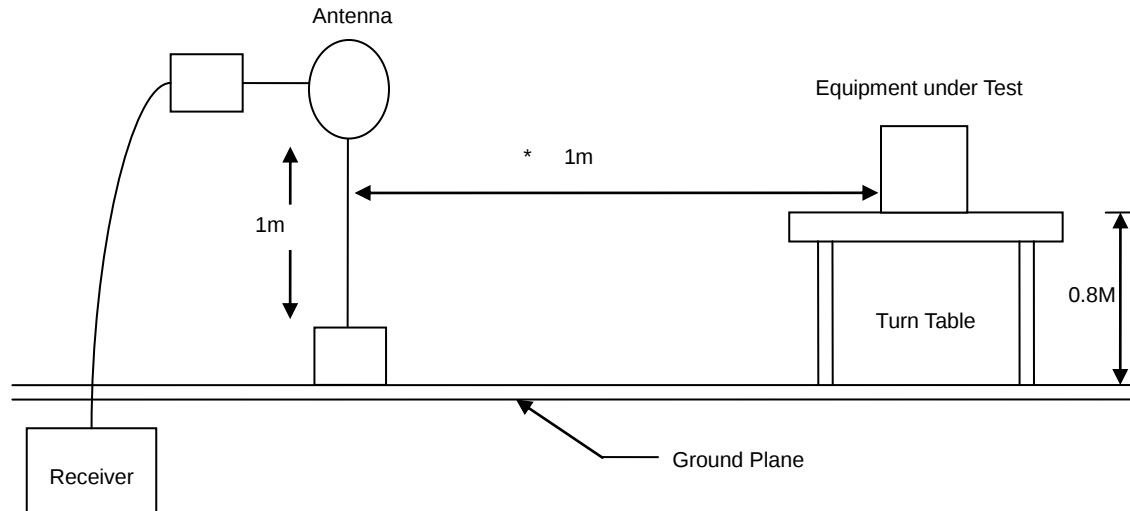


30MHz- 1GHz Test Setup

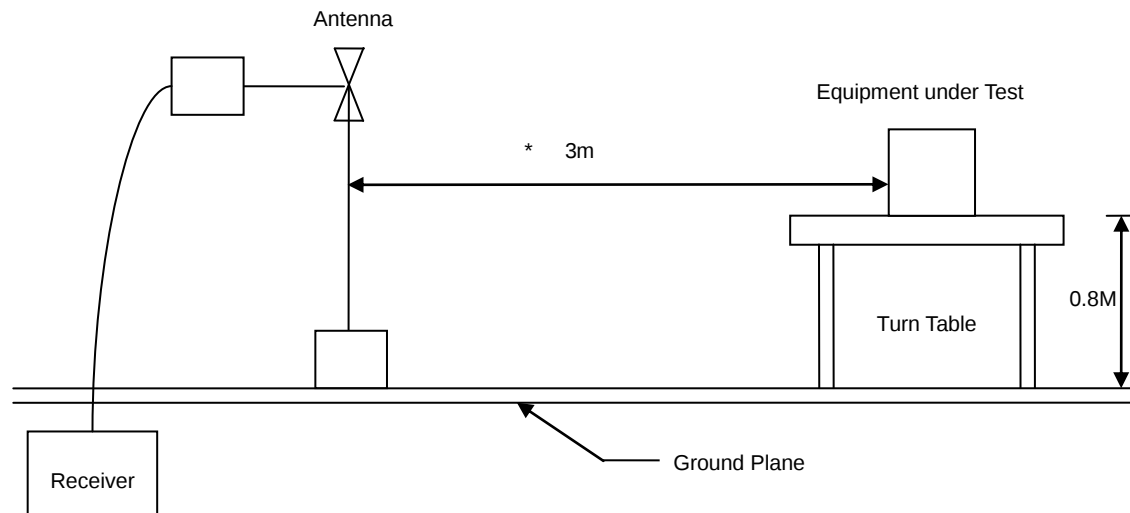



Above 1GHz Test Setup

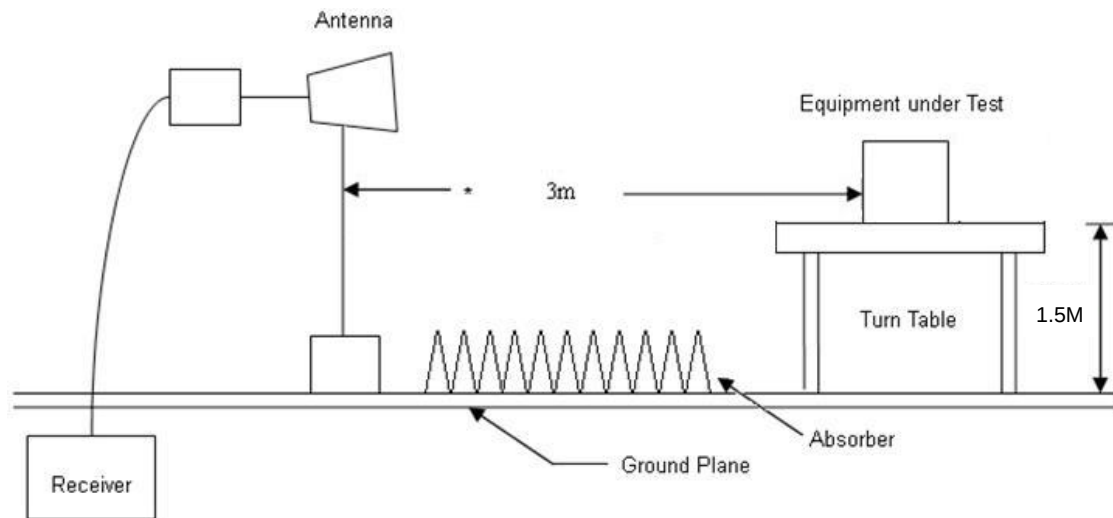




5.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.

5.5 Test Result and Data (30MHz ~ 1GHz)

Power	:	AC 120V / 60Hz	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 2, Axis: Y		:	

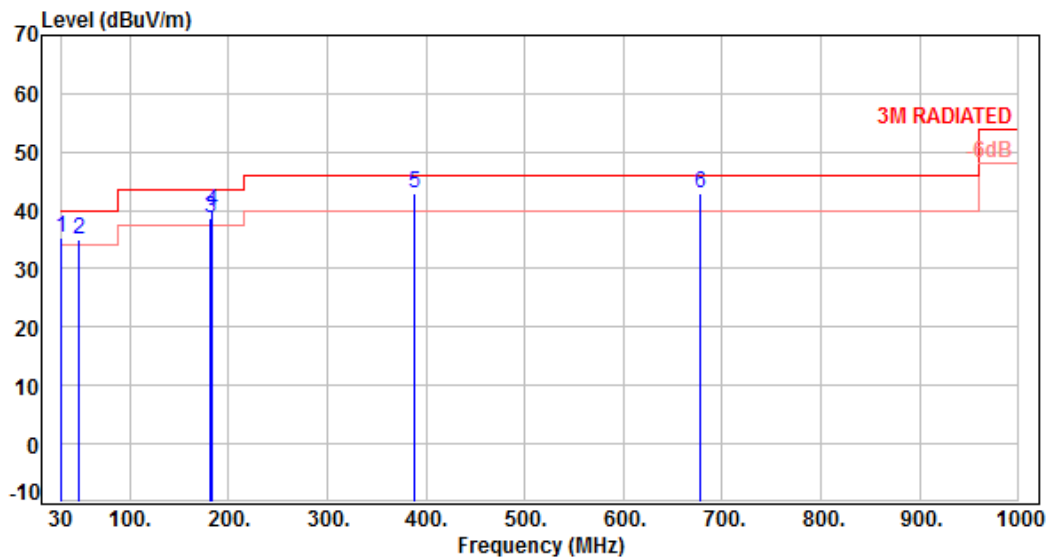

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	30.00	-11.62	46.94	35.32	40.00	-4.68	Peak	400	0	P
2	48.62	-10.62	45.79	35.17	40.00	-4.83	Peak	400	0	P
3	180.62	-12.19	50.96	38.77	43.50	-4.73	QP	100	241	P
4	183.35	-12.48	52.33	39.85	43.50	-3.65	QP	100	228	P
5	388.78	-7.40	50.33	42.93	46.00	-3.07	Peak	400	0	P
6	676.92	-1.48	44.36	42.88	46.00	-3.12	Peak	400	0	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, Axis: Y		:

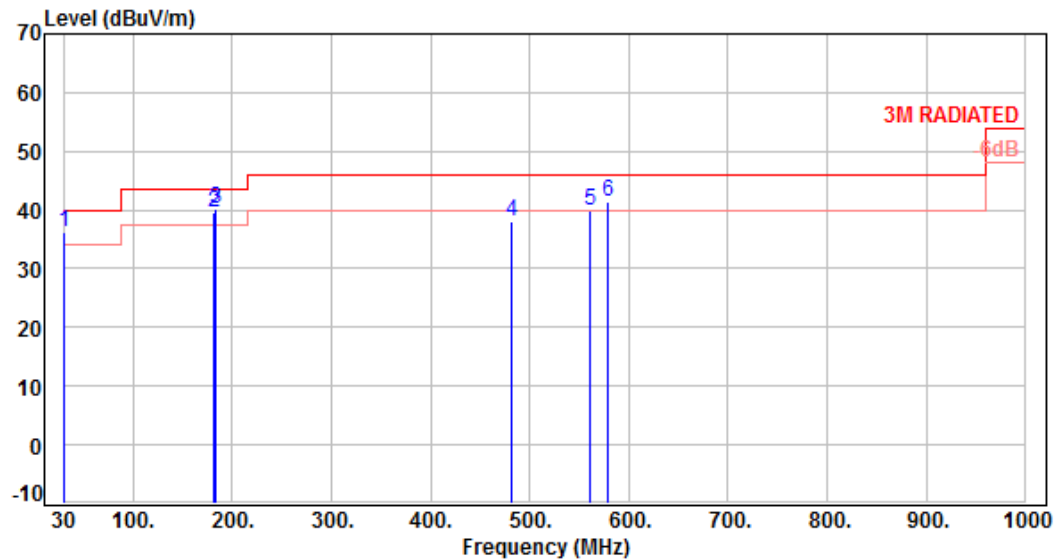

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	30.00	-11.62	47.92	36.30	40.00	-3.70	Peak	400	0	P
2	180.66	-12.20	51.72	39.52	43.50	-3.98	QP	147	347	P
3	183.44	-12.48	52.53	40.05	43.50	-3.45	QP	147	347	P
4	481.38	-5.23	43.18	37.95	46.00	-8.05	QP	100	98	P
5	561.62	-3.63	43.65	40.02	46.00	-5.98	QP	100	101	P
6	578.23	-3.16	44.61	41.45	46.00	-4.55	QP	100	86	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	:	AC 120V / 60Hz	Pol/Phase	:	VERTICAL
Test Mode	:	Mode 2, Axis: Z		:	

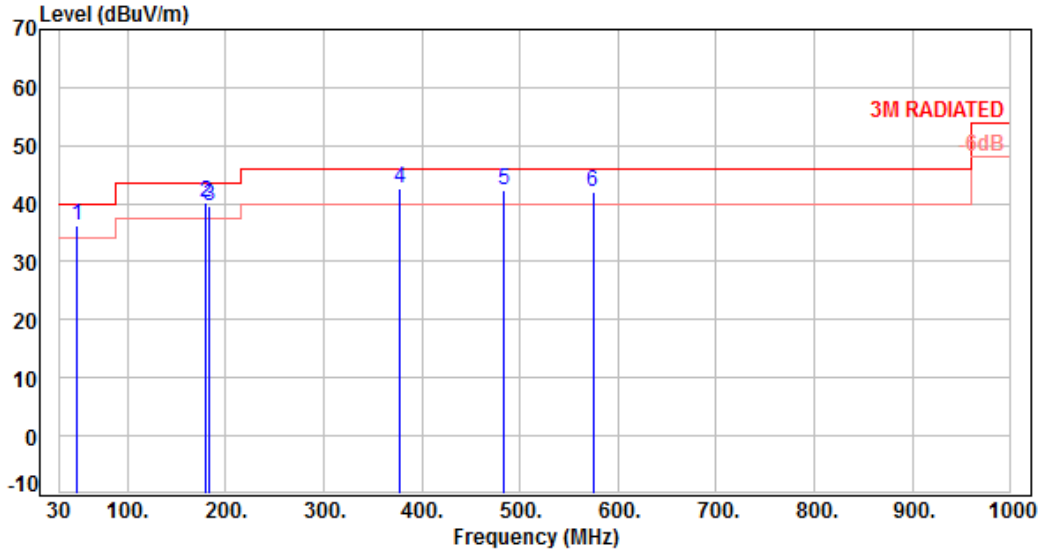

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	48.15	-10.58	46.72	36.14	40.00	-3.86	Peak	100	0	P
2	180.48	-12.17	52.46	40.29	43.50	-3.21	Peak	100	0	P
3	183.43	-12.48	52.20	39.72	43.50	-3.78	QP	100	351	P
4	376.93	-7.69	50.26	42.57	46.00	-3.43	Peak	100	0	P
5	484.17	-5.16	47.51	42.35	46.00	-3.65	Peak	100	0	P
6	574.37	-3.32	45.36	42.04	46.00	-3.96	Peak	100	0	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, Axis: Z		:

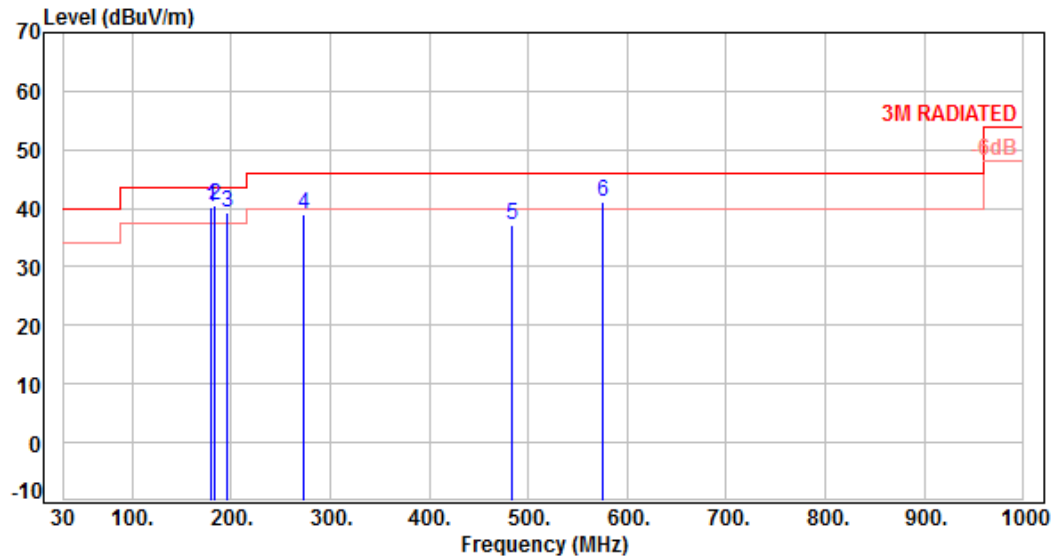

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	180.42	-12.15	52.34	40.19	43.50	-3.31	QP	154	35	P
2	183.47	-12.49	52.86	40.37	43.50	-3.13	QP	154	35	P
3	195.87	-13.26	52.45	39.19	43.50	-4.31	QP	100	43	P
4	273.67	-10.41	49.38	38.97	46.00	-7.03	Peak	400	0	P
5	483.86	-5.16	42.45	37.29	46.00	-8.71	QP	165	258	P
6	574.44	-3.32	44.34	41.02	46.00	-4.98	QP	162	131	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



5.6 Test Result and Data (1GHz ~ 25GHz)

Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, Axis: Y		:

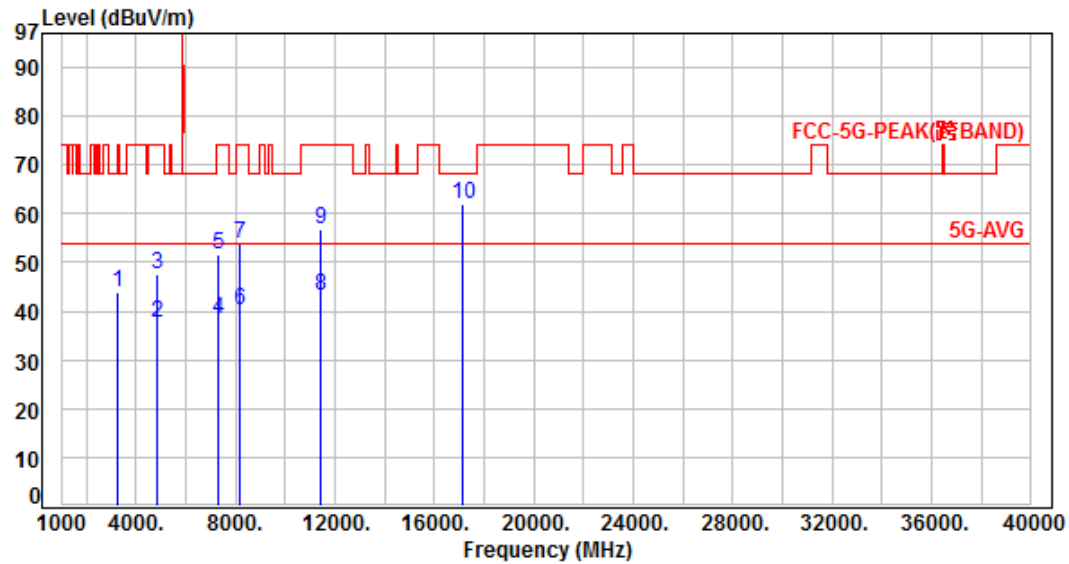

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	3273.00	0.70	43.33	44.03	68.20	-24.17	Peak	100	157	P
2	4874.00	4.79	32.88	37.67	54.00	-16.33	Average	100	14	P
3	4874.00	4.79	42.73	47.52	74.00	-26.48	Peak	100	14	P
4	7311.00	9.68	28.58	38.26	54.00	-15.74	Average	100	293	P
5	7311.00	9.68	41.84	51.52	74.00	-22.48	Peak	100	293	P
6	8147.00	10.50	29.64	40.14	54.00	-13.86	Average	100	136	P
7	8147.00	10.50	43.48	53.98	74.00	-20.02	Peak	100	136	P
8	11420.00	14.22	29.04	43.26	54.00	-10.74	Average	100	358	P
9	11420.00	14.22	42.62	56.84	74.00	-17.16	Peak	100	358	P
10	17130.00	19.47	42.55	62.02	68.20	-6.18	Peak	100	167	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, Axis: Y		:

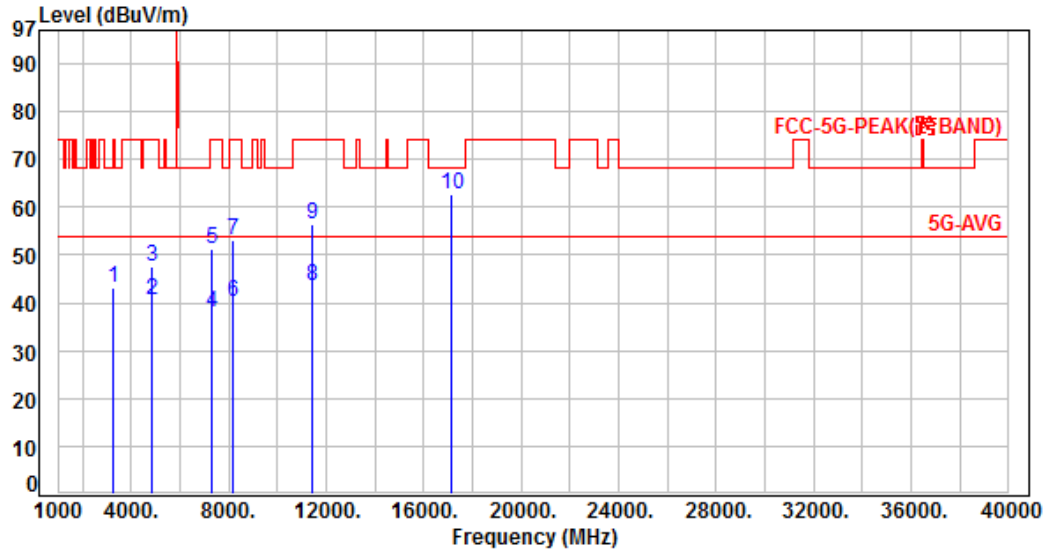

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	3273.00	0.70	42.33	43.03	68.20	-25.17	Peak	100	255	P
2	4874.00	4.79	35.88	40.67	54.00	-13.33	Average	100	269	P
3	4874.00	4.79	42.66	47.45	74.00	-26.55	Peak	100	269	P
4	7311.00	9.68	28.14	37.82	54.00	-16.18	Average	100	193	P
5	7311.00	9.68	41.72	51.40	74.00	-22.60	Peak	100	193	P
6	8147.00	10.50	29.66	40.16	54.00	-13.84	Average	100	132	P
7	8147.00	10.50	42.54	53.04	74.00	-20.96	Peak	100	132	P
8	11420.00	14.22	29.14	43.36	54.00	-10.64	Average	100	148	P
9	11420.00	14.22	42.21	56.43	74.00	-17.57	Peak	100	148	P
10	17130.00	19.47	43.07	62.54	68.20	-5.66	Peak	100	168	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: VERTICAL
Test Mode	: Mode 2, Axis: Z		:

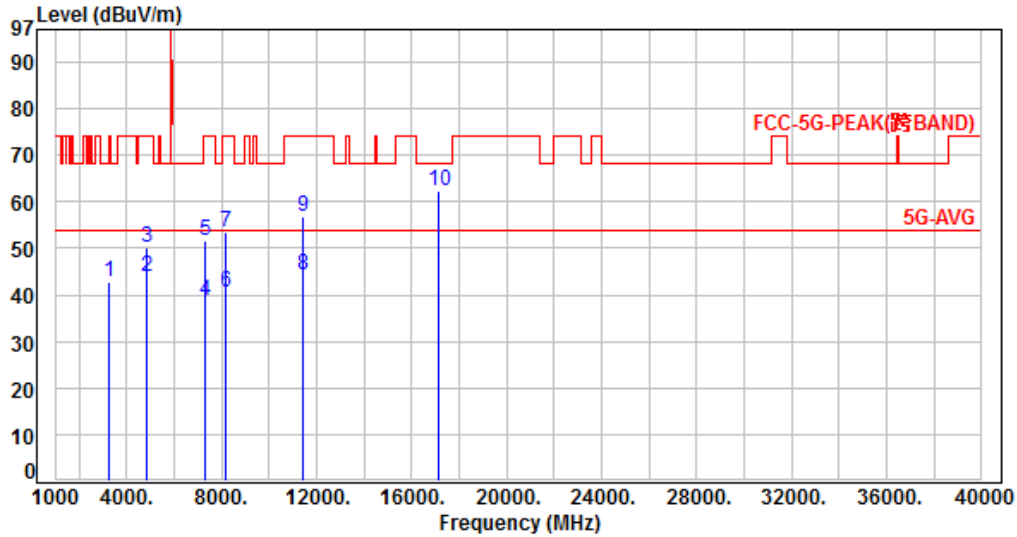

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	3273.00	0.70	42.00	42.70	68.20	-25.50	Peak	100	142	P
2	4874.00	4.79	39.18	43.97	54.00	-10.03	Average	100	360	P
3	4874.00	4.79	45.22	50.01	74.00	-23.99	Peak	100	360	P
4	7311.00	9.68	28.99	38.67	54.00	-15.33	Average	112	286	P
5	7311.00	9.68	41.95	51.63	74.00	-22.37	Peak	112	286	P
6	8147.00	10.50	30.19	40.69	54.00	-13.31	Average	100	174	P
7	8147.00	10.50	42.81	53.31	74.00	-20.69	Peak	100	174	P
8	11420.00	14.22	29.97	44.19	54.00	-9.81	Average	124	292	P
9	11420.00	14.22	42.53	56.75	74.00	-17.25	Peak	124	292	P
10	17130.00	19.47	42.73	62.20	68.20	-6.00	Peak	100	221	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Power	: AC 120V / 60Hz	Pol/Phase	: HORIZONTAL
Test Mode	: Mode 2, Axis: Z		:

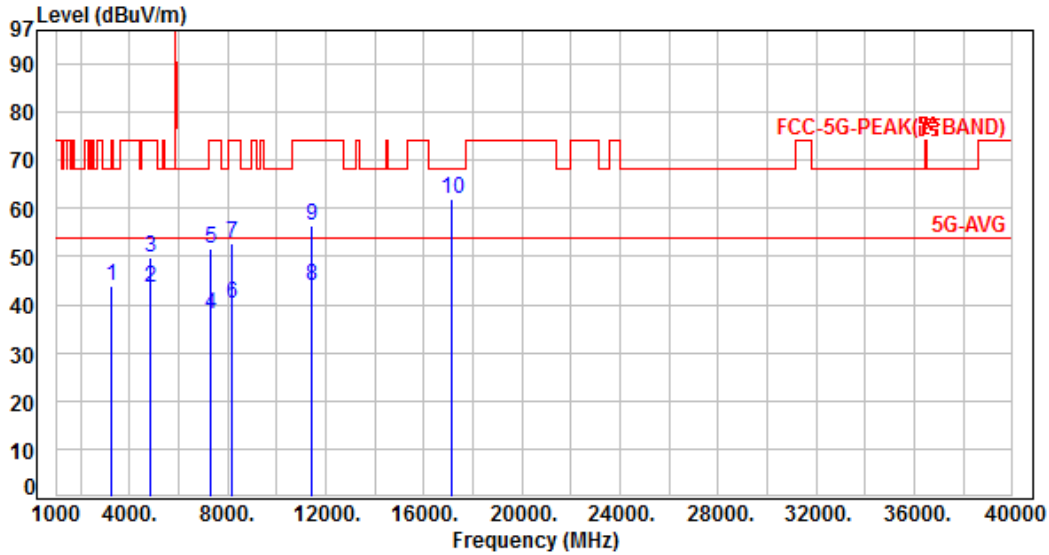

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	3273.00	0.70	43.07	43.77	68.20	-24.43	Peak	100	214	P
2	4874.00	4.79	38.79	43.58	54.00	-10.42	Average	296	31	P
3	4874.00	4.79	44.89	49.68	74.00	-24.32	Peak	296	31	P
4	7311.00	9.68	28.46	38.14	54.00	-15.86	Average	100	158	P
5	7311.00	9.68	42.07	51.75	74.00	-22.25	Peak	100	158	P
6	8147.00	10.50	29.85	40.35	54.00	-13.65	Average	100	48	P
7	8147.00	10.50	42.42	52.92	74.00	-21.08	Peak	100	48	P
8	11420.00	14.22	29.63	43.85	54.00	-10.15	Average	100	331	P
9	11420.00	14.22	42.18	56.40	74.00	-17.60	Peak	100	331	P
10	17130.00	19.47	42.66	62.13	68.20	-6.07	Peak	100	325	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



5.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz