

Cellphone-Mate, Inc.

TEST REPORT FOR

Consumer Booster with WiFi Model: Fusion 7

Tested To The Following Standard:

FCC Part 2 / 22

Report No.: 97491-19

Date of issue: November 11, 2015



This test report bears the accreditation symbol indicating that the testing performed herein meets the test and reporting requirements of ISO/IEC 17025 under the applicable scope of EMC testing for CKC Laboratories, Inc.

We strive to create long-term, trust based relationships by providing sound, adaptive, customer first testing services. We embrace each of our customers' unique EMC challenges, not as an interruption to set processes, but rather as the reason we are in business.

TABLE OF CONTENTS

| | |
|--|----|
| Administrative Information | 3 |
| Test Report Information | 3 |
| Report Authorization | 3 |
| Test Facility Information | 4 |
| Software Versions..... | 4 |
| Site Registration & Accreditation Information | 4 |
| Summary of Results | 5 |
| Modifications During Testing..... | 6 |
| Conditions During Testing..... | 6 |
| Equipment Under Test..... | 7 |
| FCC Part(s) 2 / 22 | 8 |
| 2.1049 Occupied Bandwidth..... | 8 |
| Summary of Results | 9 |
| 2.1051 Spurious Emissions at Antenna Terminals | 17 |
| Summary of Results | 18 |
| 2.1053 Field Strength of Spurious Radiation | 25 |
| Summary of Results | 26 |
| Supplemental Information..... | 30 |
| Measurement Uncertainty | 30 |
| Emissions Test Details..... | 30 |

ADMINISTRATIVE INFORMATION

Test Report Information

REPORT PREPARED FOR:

Cellphone-Mate, Inc.
48346 Milmont Drive
Fremont, CA 94538

REPORT PREPARED BY:

Terri Rayle
CKC Laboratories, Inc.
5046 Sierra Pines Drive
Mariposa, CA 95338

REPRESENTATIVE: Dennis Findley
Customer Reference Number: SC20150828

Project Number: 97491

DATE OF EQUIPMENT RECEIPT:

October 15, 2015

DATE(S) OF TESTING:

October 15-21, 2015

Report Authorization

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the sample equipment tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.



Steve Behm
Director of Quality Assurance & Engineering Services
CKC Laboratories, Inc.

Test Facility Information



Our laboratories are configured to effectively test a wide variety of product types. CKC utilizes first class test equipment, anechoic chambers, data acquisition and information services to create accurate, repeatable and affordable test results.

TEST LOCATION(S):
CKC Laboratories, Inc.
1120 Fulton Place
Fremont, CA 94539

Software Versions

| CKC Laboratories Proprietary Software | Version |
|---------------------------------------|---------|
| EMITest Emissions | 5.02.00 |
| EMITest Immunity | 5.02.00 |

Site Registration & Accreditation Information

| Location | CB # | TAIWAN | CANADA | FCC | JAPAN |
|----------|--------|----------------|---------|--------|--------|
| Fremont | US0082 | SL2-IN-E-1148R | 3082B-1 | 958979 | A-0149 |

SUMMARY OF RESULTS

Standard / Specification: FCC Part 2 / 22

| KDB 935210 D03 Wideband Consumer Signal Booster Measurement Guidance v03, June 5, 2015 | | FCC Part Section Correlation | | Mods | Results |
|--|--|--|---|------|-----------------|
| Guidance Sec # | Guidance Description | FCC Sec # | FCC Rule Description | | |
| 7.1 a) - k) | Authorized Frequency Band Verification Test | 20.21(e)(3) | Frequency Bands | NA | NA ¹ |
| 7.2.2 a) - k) | Maximum Power Measurement Procedure | 2.1046/20.21(e)(8)(i)(D) | Power Limit | NA | NA ¹ |
| 7.3 a) - d) | Maximum Booster Gain Computation | 20.21(e)(8)(i)(B) | Bidirectional Capabilities | NA | NA ¹ |
| 7.4 a) - n) | Intermodulation Product | 20.21(e)(8)(i)(F) | Intermodulation Limit | NA | NA ¹ |
| 7.5 a) - n) | Out of Band Emissions | 20.21(e)(8)(i)(E) | Out of Band Emission | NA | NA ¹ |
| 7.6 a) - e) | Conducted Spurious Emission | 2.1051/22/24/27 | Spurious emission | NA | Pass |
| 7.7.1 a) - g) 7.7.1 h) - n) 7.7.2 a) - g) | Noise Limit Procedure Variable Noise Variable Noise Timing | 20.21(e)(8)(i)(A)(2)(i) 20.21(e)(8)(i)(A)(1) 20.21(e)(8)(i)(H) | Noise Limits Transmit Power Off Mode | NA | NA ¹ |
| 7.8 a) - l) | Uplink inactivity | 20.21(e)(8)(i)(I) | Uplink Inactivity | NA | NA ¹ |

Standard / Specification: FCC Part 2 / 22 continued

| KDB 935210 D03 Wideband Consumer Signal Booster Measurement Guidance v03, June 5, 2015 | | FCC Part Section Correlation | | Mods | Results |
|--|------------------------------------|-------------------------------|-------------------------|------|-----------------|
| Guidance Sec # | Guidance Description | FCC Sec # | FCC Rule Description | | |
| 7.9.1 a) - l) | Variable Booster Gain | 20.21(e)(8)(i)(C) (1), (2)(i) | Booster Gain | | |
| 7.9.2 a) - f) | Variable Uplink Gain Timing | 20.21(e)(8)(i)(H) | Transmit Power Off Mode | NA | NA ¹ |
| 7.10.a) - j) | Occupied Band Width | 2.1049/22/24/27 | Occupied Band Width | NA | Pass |
| 7.11.2 a) - r) 7.11.3 a) - h) 7.11.4 a) - h) (alternate to 7.11.3) | Anti-Oscillation | 20.21(e)(8)(ii)(A) | Anti-Oscillation | NA | NA ¹ |
| 7.12a) - f) | Radiated Spurious Emission | 2.1053/ 22/24/27 | Spurious Emission | NA | Pass |
| 7.13 a) - c) | Spectrum Block Filter ² | NA ¹ | NA ¹ | NA | NA ¹ |

NA¹ = A different standard applies; see applicable test report.

Modifications During Testing

This list is a summary of the modifications made to the equipment during testing.

Summary of Conditions

No modifications were made during testing.

Modifications listed above must be incorporated into all production units.

Conditions During Testing

This list is a summary of the conditions noted to the equipment during testing.

Summary of Conditions

None

EQUIPMENT UNDER TEST (EUT)

During testing numerous configurations may have been utilized. The configurations listed below support compliance to the standard(s) listed in the Summary of Results section.

Configuration 4

Equipment Tested:

| Device | Manufacturer | Model # | S/N |
|----------------------------|----------------------|------------|------------------|
| Consumer Booster with WiFi | Cellphone-Mate, Inc. | Fusion 7 | 01 |
| AC/DC Adapter | Sony | PCGA-AC16V | 1477749530023127 |
| HDTV Antenna | Cellphone-Mate, Inc. | SC305H | NA |

Support Equipment:

| Device | Manufacturer | Model # | S/N |
|---------------------|----------------------|-----------------|-------------------|
| Laptop | Sony | PCG-6C2L | CXSM507BRD01-D480 |
| AC/DC Power Adapter | Cellphone-Mate, Inc. | GFP451DA-1238-1 | 1411-0000920 |
| Signal Generator | Agilent | E4433B | US40052164 |
| Signal Generator | Agilent | E4438C | MY42082260 |

Configuration 5

Equipment Tested:

| Device | Manufacturer | Model # | S/N |
|----------------------------|----------------------|-----------------|--------------|
| Consumer Booster with WiFi | Cellphone-Mate, Inc. | Fusion 7 | 01 |
| AC/DC Power Adapter | Cellphone-Mate, Inc. | GFP451DA-1238-1 | 1411-0000920 |
| HDTV Antenna | Cellphone-Mate, Inc. | SC305H | NA |

Support Equipment:

| Device | Manufacturer | Model # | S/N |
|------------------|--------------|------------|-------------------|
| Laptop | Sony | PCG-6C2L | CXSM507BRD01-D480 |
| AC/DC Adapter | Sony | PCGA-AC16V | 1477749530023127 |
| Signal Generator | Agilent | E4433B | US40052164 |
| Signal Generator | Agilent | E4438C | MY42082260 |
| Signal Generator | Marconi | 2022D | 1191941005 |
| Signal Generator | Marconi | 2026 | 112247/015 |

FCC PART(S) 2 / 22

2.1049 Occupied Bandwidth

Test Conditions / Setup

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170
 Customer: Cellphone-Mate, Inc.
 Specification: **7.10 Occupied Band Width**
 Work Order #: **97491** Date: 10/15/2015
 Test Type: **Conducted Emissions** Time: 10:38:21
 Tested By: Daniel Bertran Sequence#: 1
 Software: EMITest 5.02.00

Equipment Tested:

| Device | Manufacturer | Model # | S/N |
|-----------------|--------------|---------|-----|
| Configuration 4 | | | |

Support Equipment:

| Device | Manufacturer | Model # | S/N |
|-----------------|--------------|---------|-----|
| Configuration 4 | | | |

Test Conditions / Notes:

The equipment under test (EUT) is a Fixed CMRS Wideband Consumer Booster with a Wi-Fi Router and TV amplifier installed. The CMRS DL signal and the Wi-Fi Signal are combined at the diplexer and transmit via the indoor antenna.

The Consumer booster UL and DL power and gain parameters are initially measured with Wi-Fi transmitting at mid channel using sequentially 802.11b, g, n20 and n40 signal. Since no significant change in measured power was observed, all other parameters are obtained with Wi-Fi transmitting at Mid channel, 802.11b.

Part 22

UL: 824-849MHz

DL: 869-894MHz

All adjustable settings on the test sample are set at max gain.

Test environment conditions:

Temperature: 20.6°C

Relative Humidity: 42%

Pressure: 101.5kPa

Test procedure: The test was performed in accordance with section 7.10 of the FCC document: 935210 D03 Wideband Consumer Signal Booster Measurement Guidance v03 Dated June 5, 2015. Firmware: V2.0

Test Equipment:


| ID | Asset # | Description | Model | Calibration Date | Cal Due Date |
|----|----------|-------------------|--------------------------|------------------|--------------|
| | ANP06709 | Cable | 32026-29094K-29094K-72TC | 9/18/2014 | 9/18/2016 |
| | ANP06710 | Cable | 32026-29094K-29094K-72TC | 9/18/2014 | 9/18/2016 |
| | AN03470 | Spectrum Analyzer | E4440A | 12/2/2013 | 12/2/2015 |
| | ANP06467 | Attenuator | PE7014-10 | 5/13/2015 | 5/13/2017 |
| | ANP06239 | Attenuator | 54A-10 | 7/9/2014 | 7/9/2016 |

Summary of Results


Pass: As summarized in plots below, the uniformity of the output signal relative to the input signal are practically identical. Therefore, the comparison is within limits.

Plots


INPUT - CDMA

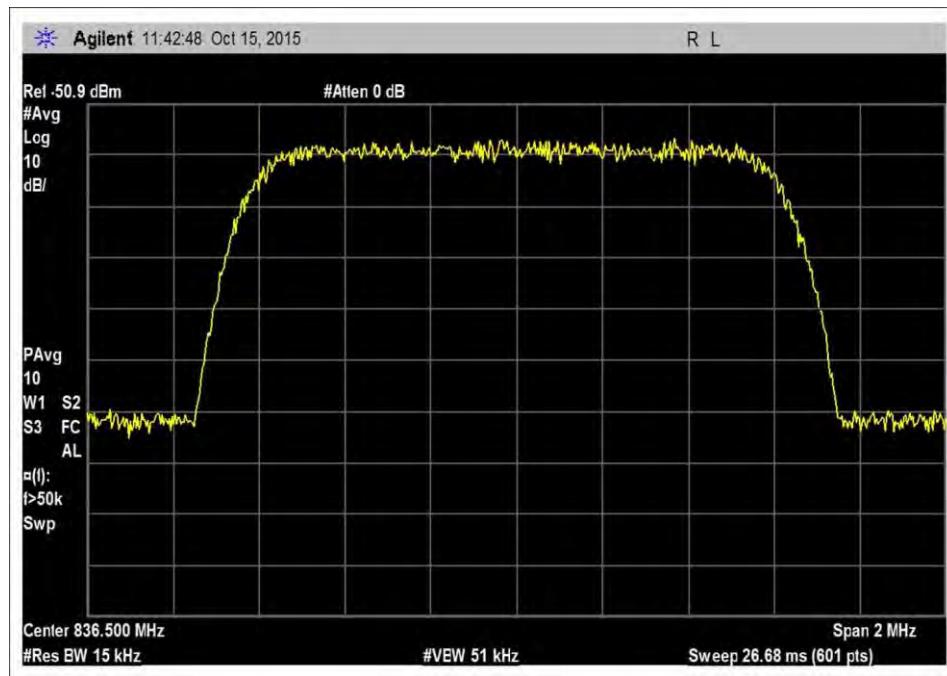


7.10_OBW_UL_824-849MHz_CDMA

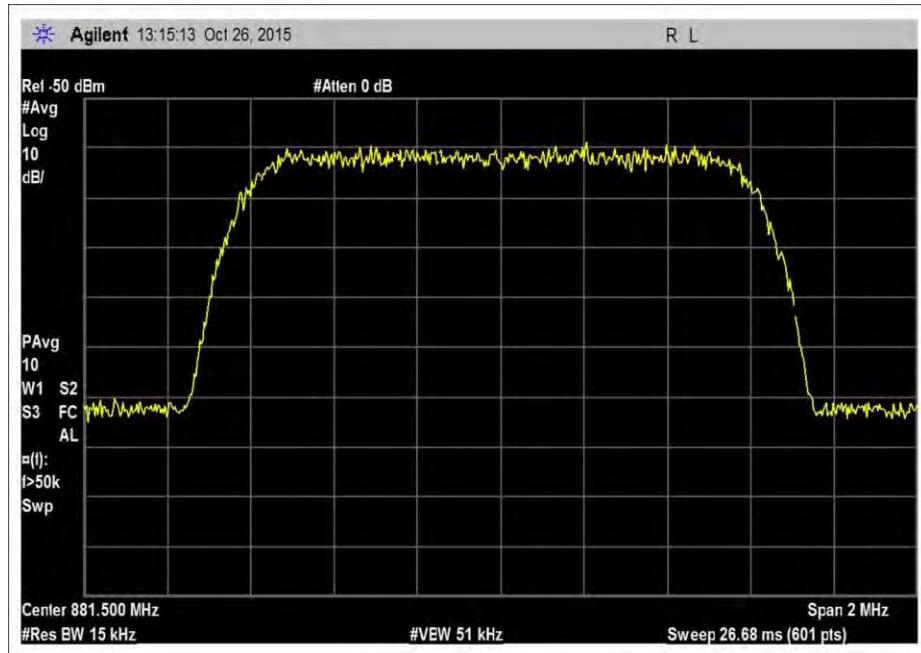


7.10_OBW_DL_869-894MHz_CDMA

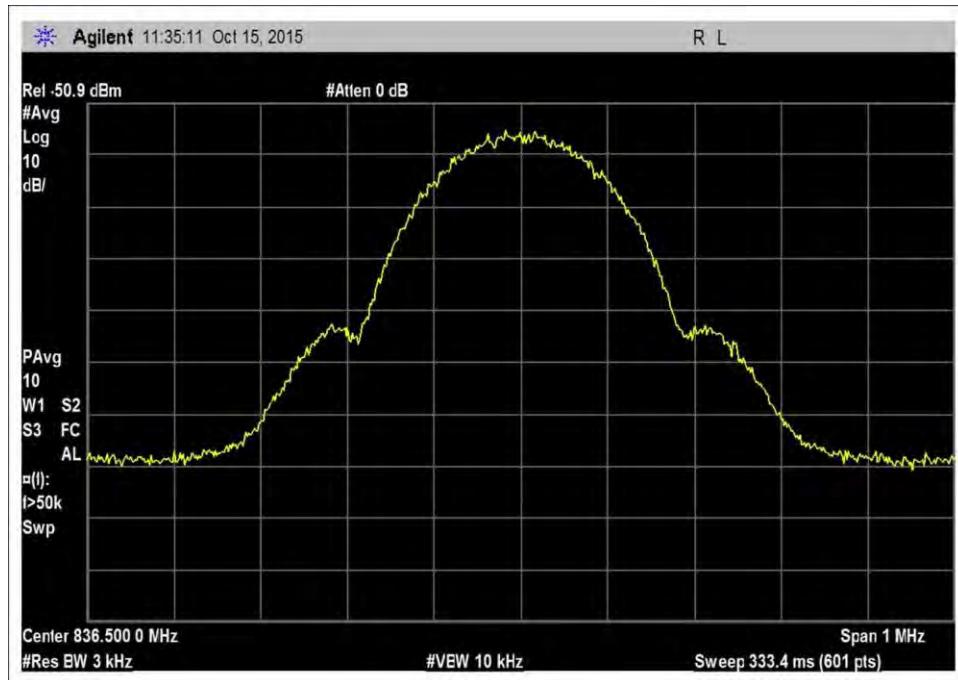INPUT - GSM


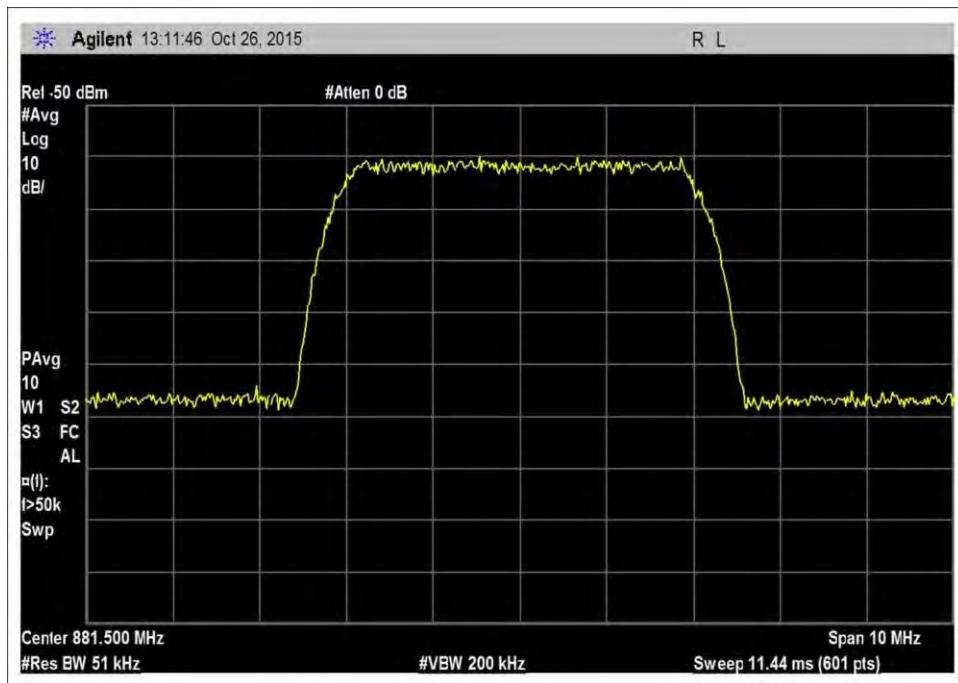
7.10_OBW_UL_824-849MHz_GSM

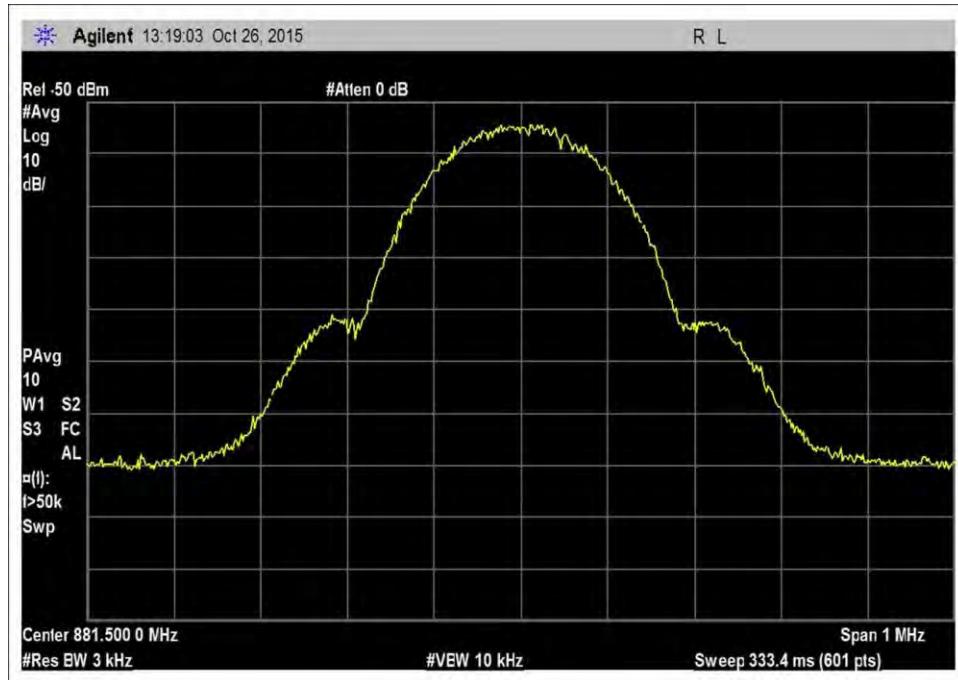

7.10_OBW_DL_869-894MHz_GSM

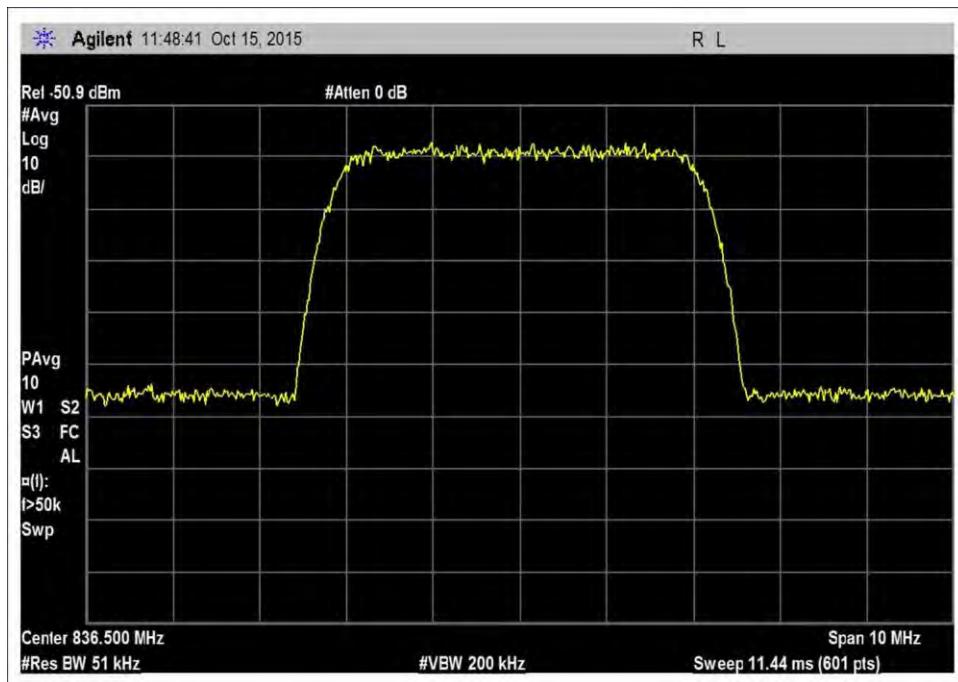
INPUT - WCDMA


7.10_OBW_UL_824-849MHz_WCDMA




7.10_OBW_DL_869-894MHz_WCDMA

OUTPUT - CDMA

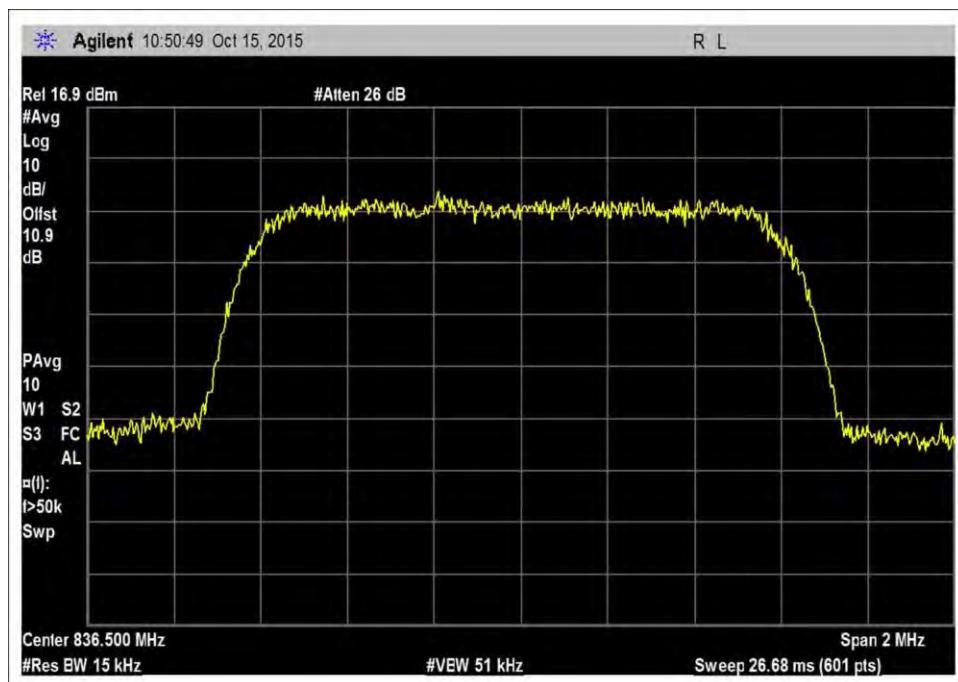


7.10_OBW_UL_824-849MHz_CDMA

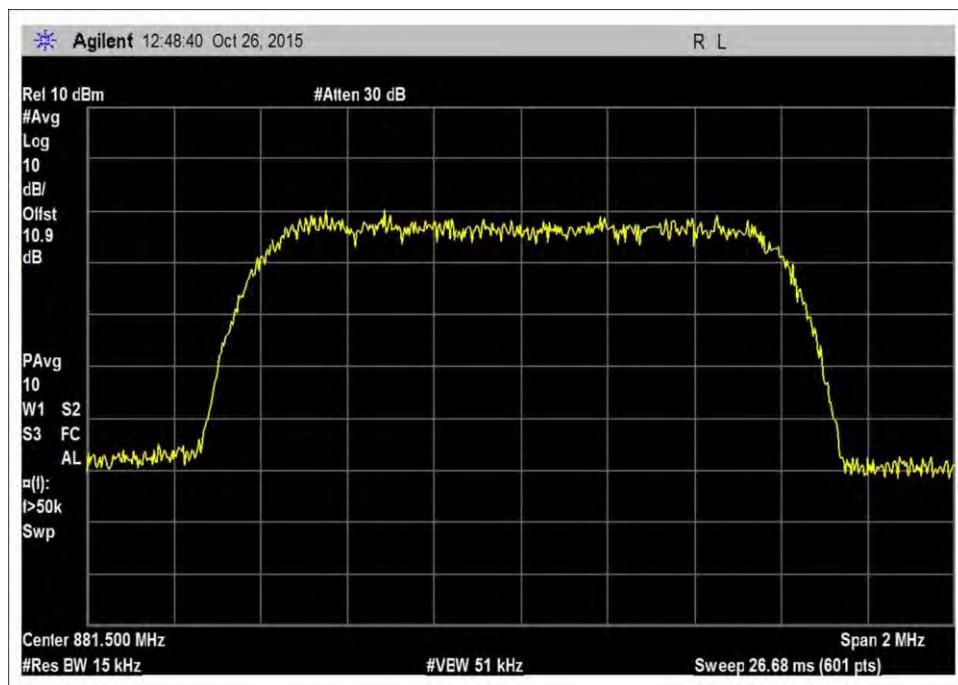


7.10_OBW_DL_869-894MHz_CDMA

OUTPUT – GSM

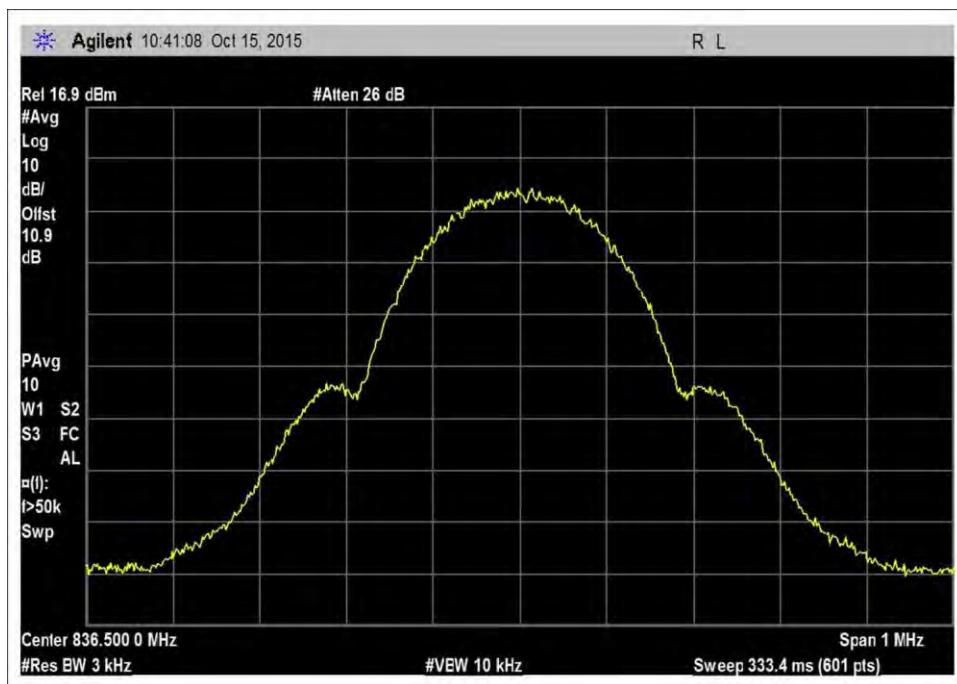


7.10_OBW_UL_824-849MHz_GSM

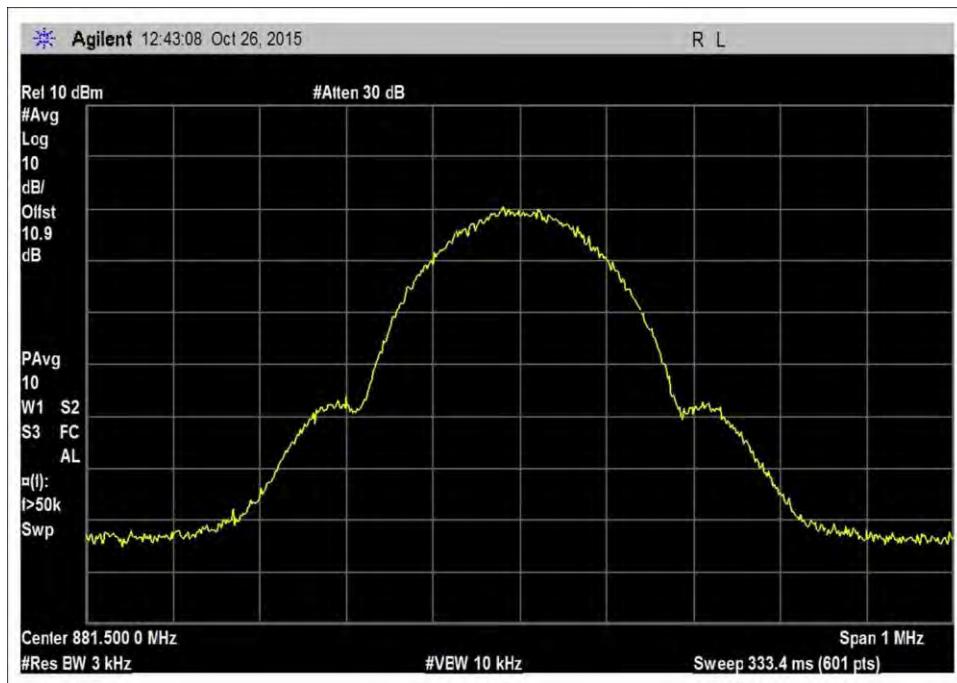


7.10_OBW_DL_869-894MHz_GSM

OUTPUT – WCDMA

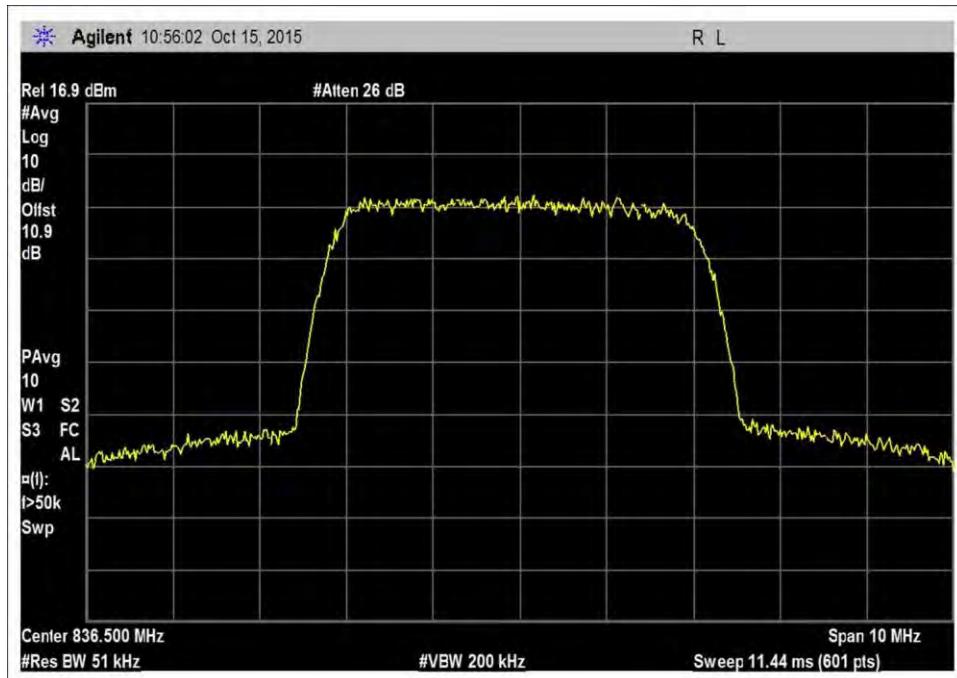

7.10_OBW_UL_824-849MHz_WCDMA

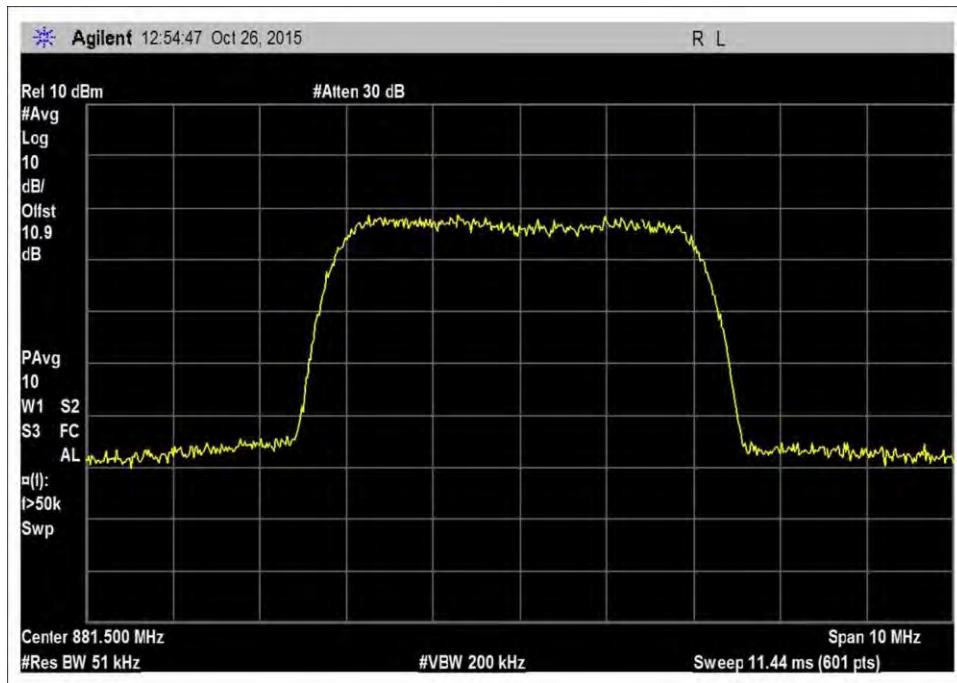

7.10_OBW_DL_869-894MHz_WCDMA

Test Setup Photo



2.1051 Spurious Emissions at Antenna Terminals

Test Conditions / Setup

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170
 Customer: Cellphone-Mate, Inc.
 Specification: **7.6 Conducted Spurious Emissions / 47 CFR §2.1051 Spurious Emissions at Antenna Terminals**
 Work Order #: **97491** Date: 10/19/2015
 Test Type: **Conducted Emissions** Time: 09:16:19
 Tested By: Daniel Bertran Sequence#: 1
 Software: EMITest 5.02.00

Equipment Tested:

| Device | Manufacturer | Model # | S/N |
|-----------------|--------------|---------|-----|
| Configuration 4 | | | |

Support Equipment:

| Device | Manufacturer | Model # | S/N |
|-----------------|--------------|---------|-----|
| Configuration 4 | | | |

Test Conditions / Notes:

The equipment under test (EUT) is a Fixed CMRS Wideband Consumer Booster with a Wi-Fi Router and TV amplifier installed. The CMRS DL signal and the Wi-Fi Signal are combined at the diplexer and transmit via the indoor antenna.

The Consumer booster UL and DL power and gain parameters are initially measured with Wi-Fi transmitting at mid channel using sequentially 802.11b, g, n20 and n40 signal. Since no significant change in measured power was observed, all other parameters are obtained with Wi-Fi transmitting at Mid channel, 802.11b.

Part 22

UL: 824-849MHz

DL: 869-894MHz

Frequency range of measurement = 9 kHz- 9GHz.

9 kHz - 150 kHz - RBW= 200Hz VBW= 200Hz

150 kHz - 30 MHz - RBW= 9kHz VBW= 9kHz

30 MHz - 1000MHz - RBW*= 1MHz VBW= 3MHz

1000 MHz - 22000MHz - RBW= 1MHz VBW= 3MHz

*Note: As specified on 7.6 Conducted spurious emissions test procedure of 935210 D03 Signal Booster Measurements v03, for frequencies below 1 GHz, an RBW of 1 MHz may be used in a preliminary measurement. If non-compliant emissions are detected, a final measurement shall be made with a 100 kHz RBW. Additionally, a peak detector may also be used for the preliminary measurement. If non-compliant emissions are detected then a final measurement of these emissions shall be made with the power averaging (RMS) detector.

All adjustable settings on the test sample are set at max gain.

Test environment conditions: Temperature: 20.6°C, Relative Humidity: 42%, Pressure: 101.5kPa

Test procedure: The test was performed in accordance with section 7.6 of the FCC document: 935210 D03 Wideband Consumer Signal Booster Measurement Guidance v03 Dated June 5, 2015. Firmware: V2.0

Test Equipment:

| ID | Asset # | Description | Model | Calibration Date | Cal Due Date |
|-----------|----------------|--------------------|--------------------------|-------------------------|---------------------|
| | ANP06709 | Cable | 32026-29094K-29094K-72TC | 9/18/2014 | 9/18/2016 |
| | ANP06710 | Cable | 32026-29094K-29094K-72TC | 9/18/2014 | 9/18/2016 |
| | AN03470 | Spectrum Analyzer | E4440A | 12/2/2013 | 12/2/2015 |
| | ANP06467 | Attenuator | PE7014-10 | 5/13/2015 | 5/13/2017 |
| | ANP06239 | Attenuator | 54A-10 | 7/9/2014 | 7/9/2016 |

Summary of Results

Pass: As summarized in plots below, the conducted spurious emissions are within limits.

9 KHz-30 MHz

No Conducted Spurious Emissions were found within 20dB of the limit.

LIMIT LINE FOR SPURIOUS CONDUCTED EMISSION

REQUIRED ATTENUATION = **43+10 LOG P DB**


Limit line (dBuV) = V_{dBuV} - Attenuation

$$\begin{aligned}
 V_{\text{dBuV}} &= 20 \log \frac{V}{1 \times 10^{-6}} \\
 &= 20(\log V - \log 1 \times 10^{-6}) \\
 &= 20 \log V - 20 \log 1 \times 10^{-6} \\
 &= 20 \log V - 20(-6) \\
 &= 20 \log V + 120
 \end{aligned}$$


$$\begin{aligned}
 \text{Attenuation} &= 43 + 10 \log P \\
 &= 43 + 10 \log \frac{V^2}{R} \\
 &= 43 + 10(\log V^2 - \log R) \\
 &= 43 + 10(2 \log V - \log R) \\
 &= 43 + 20 \log V - 10 \log R
 \end{aligned}$$

$$\begin{aligned}
 \text{Limit line} &= V_{\text{dBuV}} - \text{Attenuation} \\
 &= 20 \log V + 120 - (43 + 20 \log V - 10 \log R) \\
 &= 20 \log V + 120 - 43 - 20 \log V + 10 \log R \\
 &= 20 \log V + 120 - 43 - 20 \log V + 10 \log R \\
 &= 120 - 43 + 10 \log 50 \quad \text{Note : } R = 50 \Omega \\
 &= 120 - 43 + 16.897 \\
 &= 94 \text{ dBuV} \quad \text{at any power level}
 \end{aligned}$$


Plots

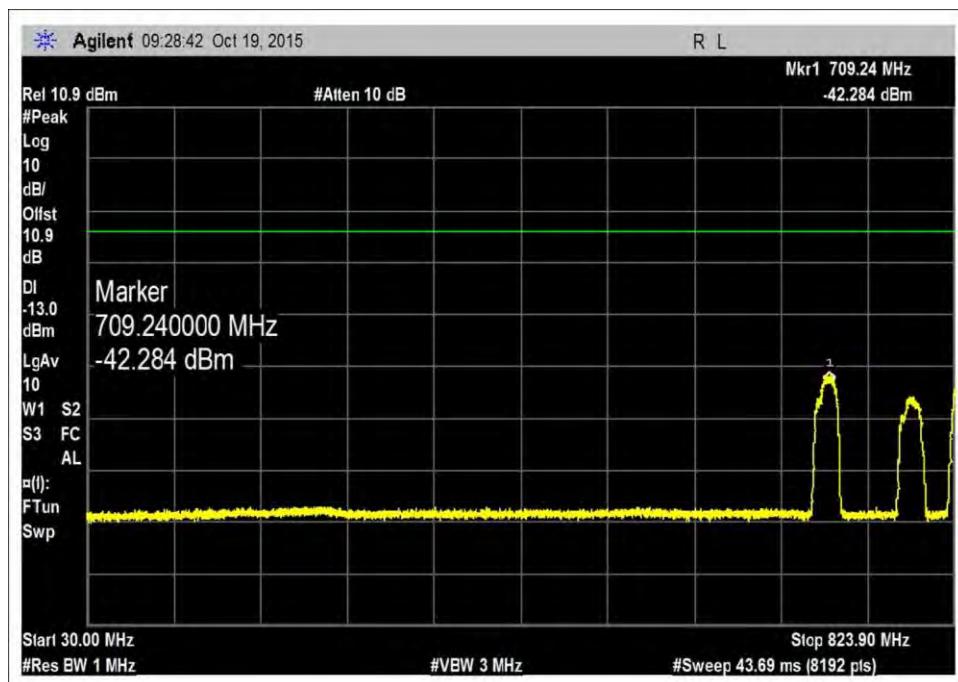


UL_824-849L

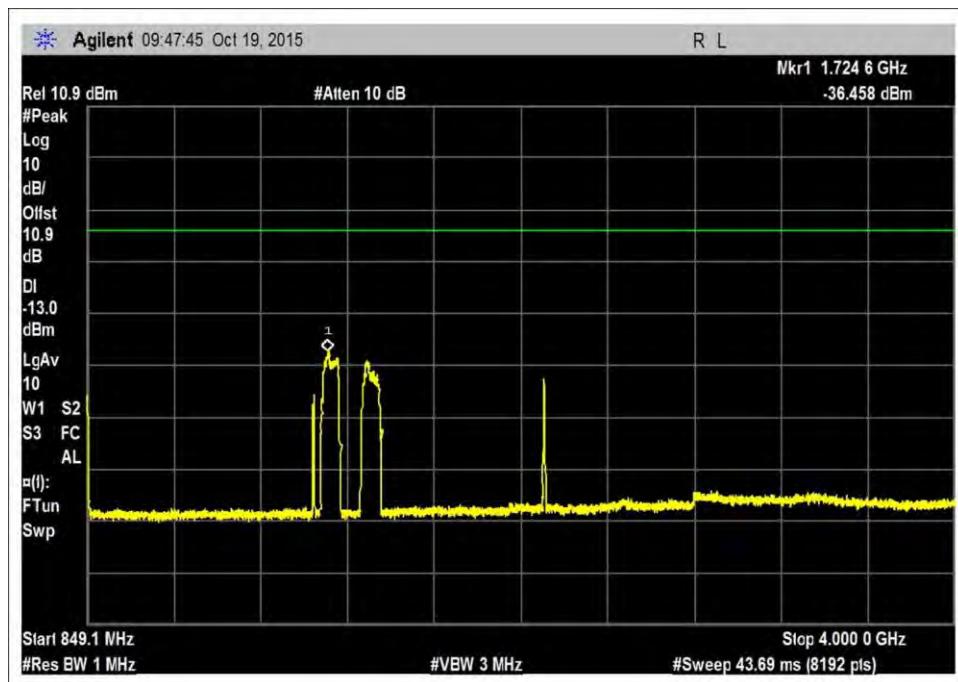


UL_824-849R1

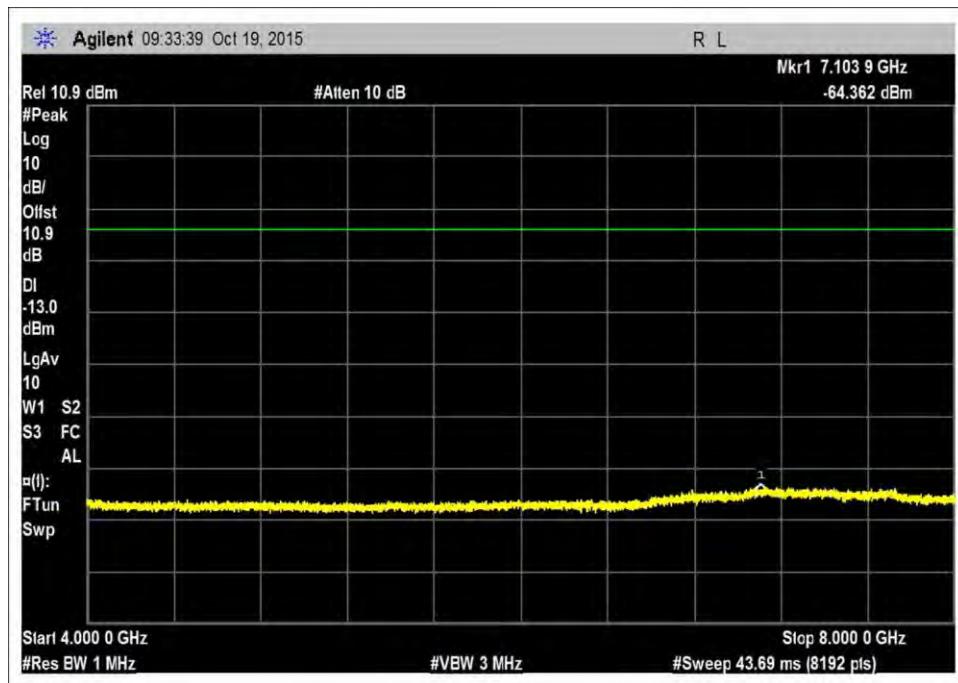


UL_824-849R2

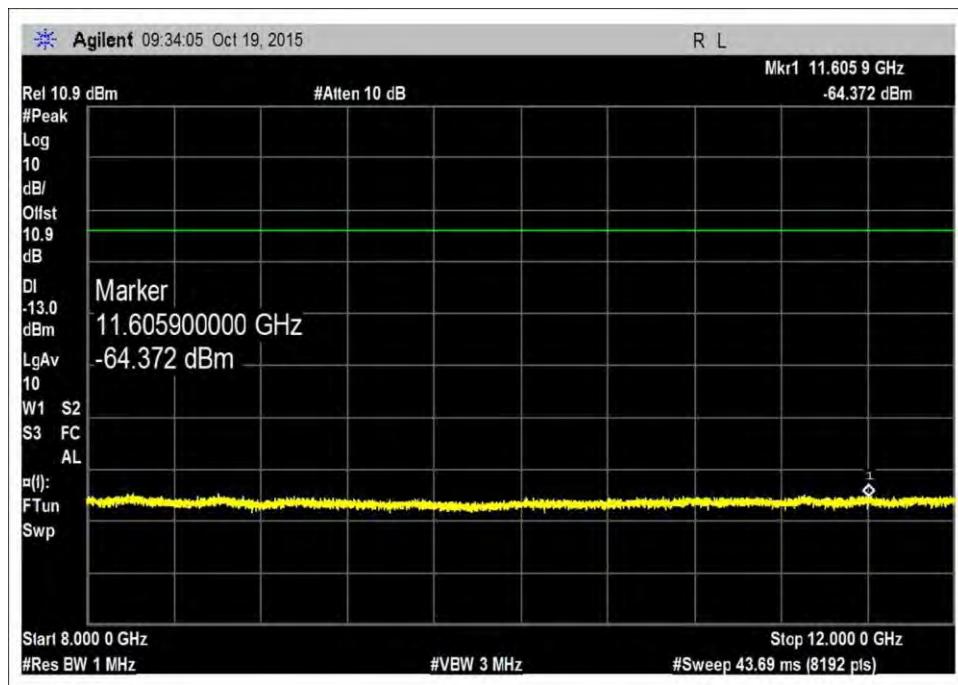


UL_824-849R3

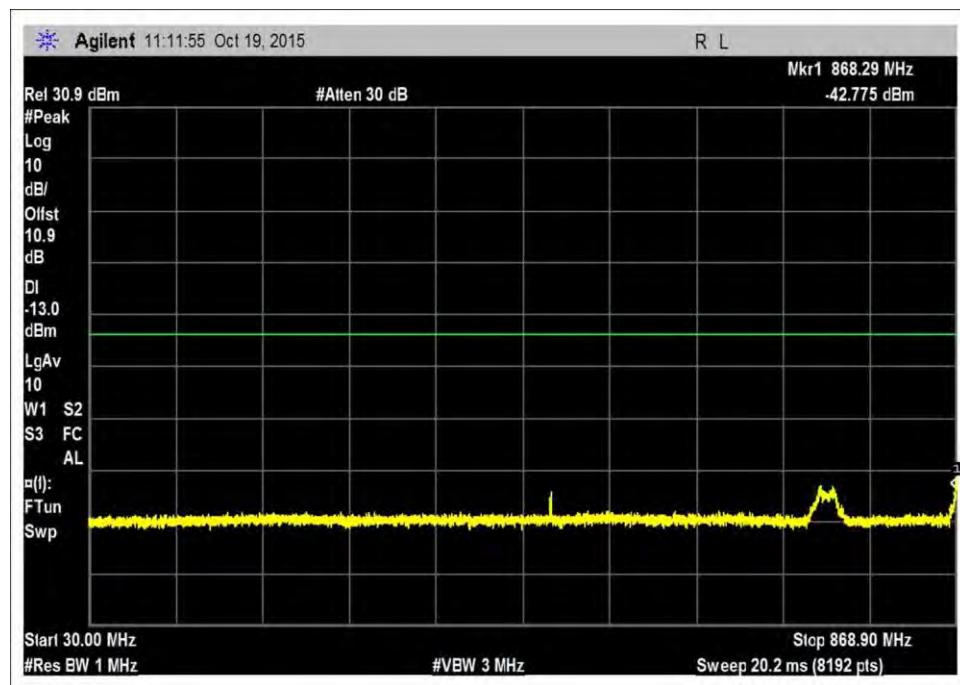


DL_869-894L

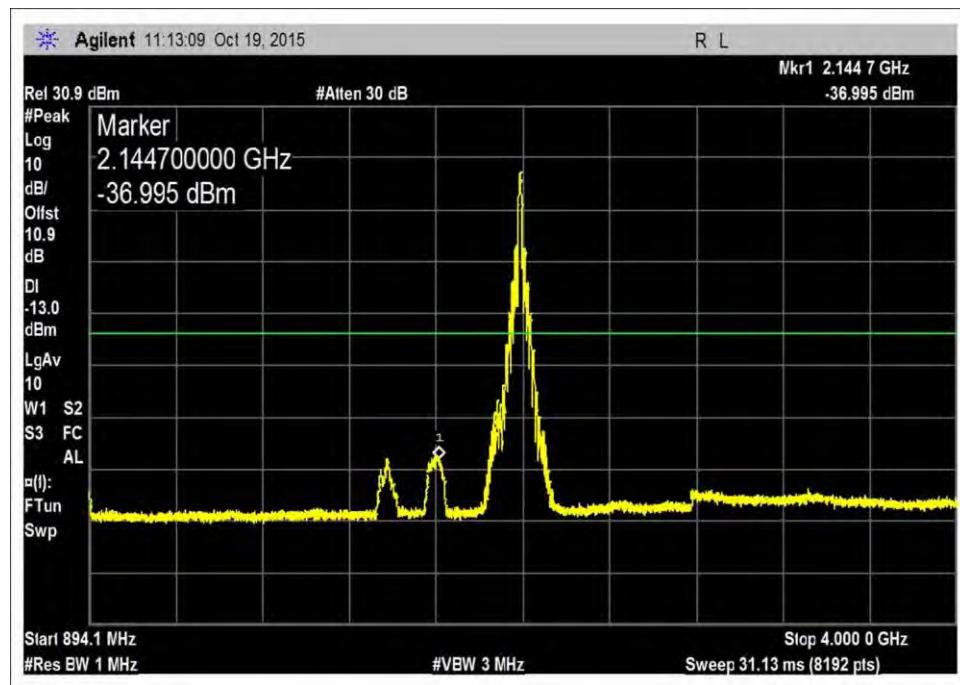

DL_869-894R1

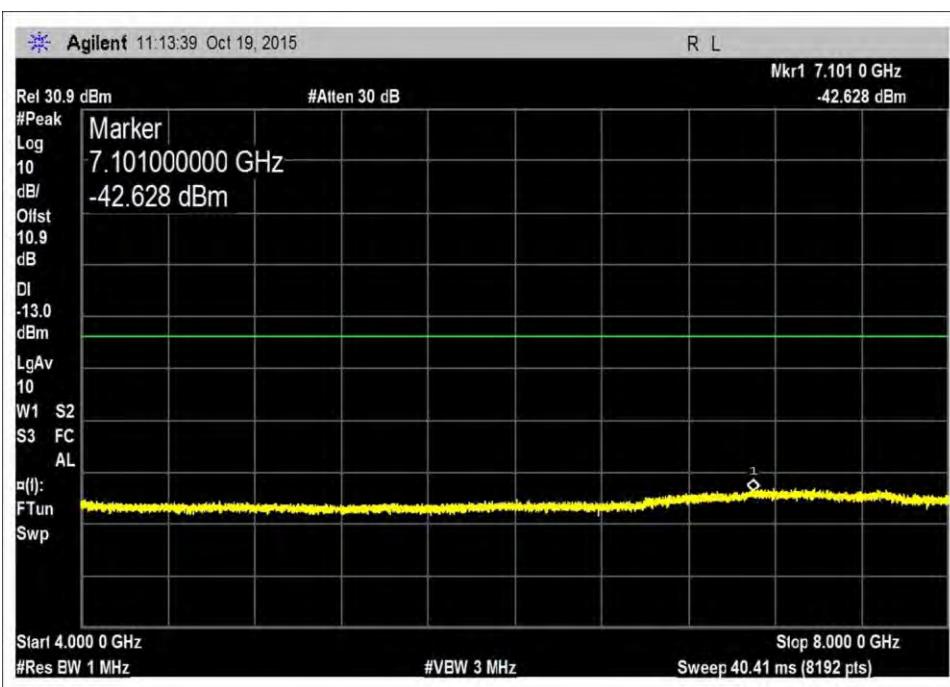

DL_869-894R2

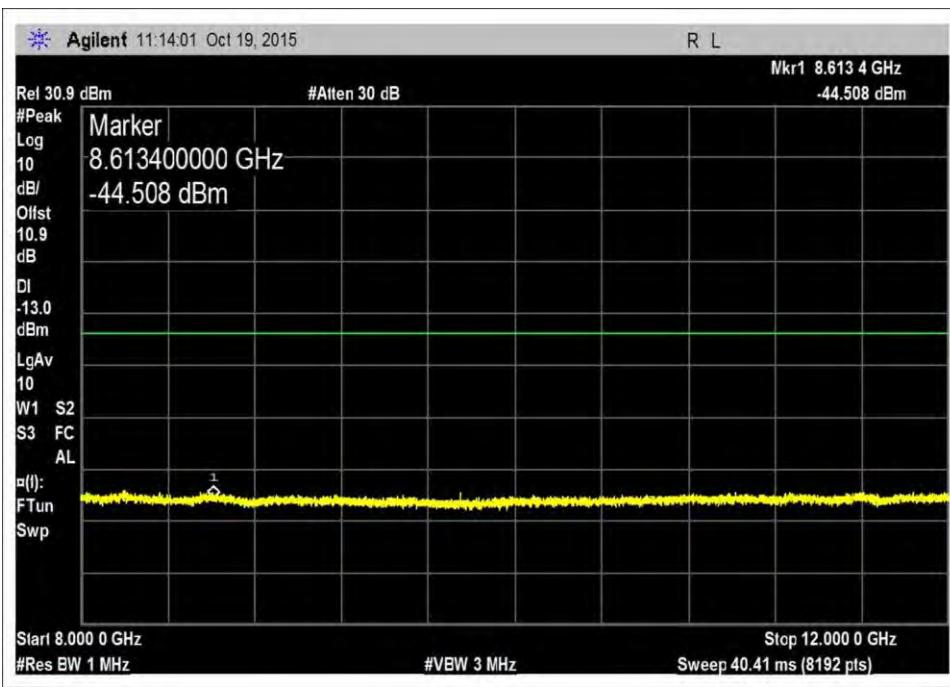

DL_869-894R3

Test Setup Photo



2.1053 Field Strength of Spurious Radiation

Test Conditions / Setup

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170

Customer: Cellphone-Mate, Inc.

Specification: **47 CFR §22.917(a) Radiated Spurious Emissions**

Work Order #: **97491**

Date: 10/21/2015

Test Type: **Radiated Emissions**

Time: 11:58:15 AM

Tested By: Daniel Bertran

Sequence#: 1

Software: EMITest 5.02.00

Equipment Tested:

| Device | Manufacturer | Model # | S/N |
|-----------------|--------------|---------|-----|
| Configuration 5 | | | |

Support Equipment:

| Device | Manufacturer | Model # | S/N |
|-----------------|--------------|---------|-----|
| Configuration 5 | | | |

Test Conditions / Notes:

The equipment under test (EUT) is a Fixed CMRS Wideband Consumer Booster with a Wi-Fi Router and TV amplifier installed. The CMRS DL signal and the Wi-Fi Signal are combined at the diplexer and transmit via the indoor antenna.

The Consumer booster UL and DL power and gain parameters are initially measured with Wi-Fi transmitting at mid channel using sequentially 802.11b, g, n20 and n40 signal. Since no significant change in measured power was observed, all other parameters are obtained with Wi-Fi transmitting at Mid channel, 802.11b.

During testing, the (EUT) is placed on the Styrofoam table top. Four signal generators are used to inject 5 signals simultaneously to the input port of EUT using a signal combiner. Each signal generator is set to produce a CW signal with the frequency set to the center of each operational band under test and the power level is set at Pin (obtained for report 97491-18) as determined from 7.2 section of the test procedure indicated further below.

Evaluation of DL path was performed with signals fed into the Outside antenna port while Inside antenna port was terminated with 50 Ohm Weinschel load (MN:1424-4 and SN:21874).

Evaluation of UL path was performed with signal fed into the Inside antenna port while Outside antenna port was terminated with the same above 50 Ohm load.

Part 22

UL: 824-849MHz

DL: 869-894MHz

TX Freq => Center frequency of above listed bands.

Modulation=> CW

Frequency range of measurement = 9 kHz- 9GHz.

9 kHz - 150 kHz - RBW=200 Hz VBW=200 Hz

150 kHz - 30 MHz - RBW=9 kHz VBW=9kHz

30 MHz - 1000MHz - RBW=120 kHz VBW=120 kHz

1000 MHz - 22000MHz - RBW=1 MHz VBW=1 MHz

All adjustable settings on the test sample are set at max gain.

Test environment conditions: Temperature: 22.3°C, Relative Humidity: 45%, Pressure:101.2kPa

Test procedure: The test was performed in accordance with section 7.12 of the FCC document: 935210 D03 Wideband Consumer Signal Booster Measurement Guidance v03 Dated June 5, 2015. Firmware: V2.0

No emissions were found within 20dB of the limit line.

Test Equipment:

| ID | Asset # | Description | Model | Calibration Date | Cal Due Date |
|----|----------|--|-------------------------------|------------------|--------------|
| T1 | AN02157 | Horn Antenna- ANSI C63.5 Calibration | 3115 | 12/2/2014 | 12/2/2016 |
| T2 | ANP06712 | Cable | 32022-29094K- 29094K-48TC | 9/18/2014 | 9/18/2016 |
| T3 | AN03114 | Preamp | AMF-7D- 00101800-30-10P | 4/22/2015 | 4/22/2017 |
| T4 | ANP06126 | Cable | 32022-29094K- 29094K-168TC | 3/18/2015 | 3/18/2017 |
| T5 | AN03302 | Cable | 32026-29094K- 29094K-72TC | 3/24/2014 | 3/24/2016 |
| | AN03471 | RF Characteristics Analyzer | E4440A | 12/19/2013 | 12/19/2015 |
| | ANP00880 | Cable | RG214U | 6/13/2014 | 6/13/2016 |
| | ANP06691 | Cable | PE3062-180 | 8/8/2014 | 8/8/2016 |
| | ANP01187 | Cable | CNT-195 | 12/30/2014 | 12/30/2016 |
| | AN00567 | Preamp | 8447D | 1/2/2015 | 1/2/2017 |
| | AN00852 | Biconilog Antenna | CBL 6111C | 11/24/2014 | 11/24/2016 |
| | ANP00929 | Cable | various | 1/23/2014 | 1/23/2016 |
| | AN00432 | Loop Antenna | 6502 | 5/8/2015 | 5/8/2017 |
| | AN02694 | Active Horn Antenna | AMFW-5F- 18002650-20-10P | 5/7/2015 | 5/7/2017 |
| | ANP05389 | Attenuator | 766-10 | 2/27/2014 | 2/27/2016 |
| | ANC00087 | Combiner | 44000 | 01/09/2014 | 01/9/2016 |
| | ANP06709 | Cable | 32026-29094K- 29094K-72TC | 9/18/2014 | 9/18/2016 |
| | ANP06710 | Cable | 32026-29094K- 29094K-72TC | 9/18/2014 | 9/18/2016 |
| | ANP06711 | Cable | 32022-29094K- 29094K-132TC | 11/21/2014 | 11/21/2016 |
| | ANP01183 | Cable | CNT-195 | 9/1/2015 | 9/1/2017 |
| | ANP01184 | Cable | CNT-195 | 12/30/2014 | 12/30/2016 |

Summary of Results

Pass: No data provided since all emissions were found more than 20dB below the limit.

LIMIT LINE FOR SPURIOUS RADIATED EMISSION

$$\text{Required Attenuation} = 43 + 10 \log P \text{ (dB)}$$

For radiated spurious emission measured at 3 meter test distance,

$$\begin{aligned}\text{Required attenuation} &= 43 + 10 \log P_t \text{ at 3 meter dB} \\ \text{Limit line (dBuV)} &= E_{\text{dBuV}} - \text{Attenuation}\end{aligned}$$

E_{dBuV} = Measured field strength at 3 meter in dBuV/m

Power Density (Isotropic)

$$P_D = \frac{P_t}{4\pi r^2}$$

P_D = Power Density in Watts /m²

P_t = Average Transmit Power

r = Test distance

Field Intensity E (V/m)

$$E = \sqrt{P_D \times 377}$$

$$E = \frac{\sqrt{P_t \times 377}}{4\pi r^2}$$

$$E = \sqrt{\frac{P_t \times 30}{r^2}}$$

$$P_t = \left(\frac{E^2 \times r^2}{30} \right)$$

$$10 \log P_t = 10 \log E^2 \text{ (V/m)} + 10 \log r^2 - 10 \log 30$$

$$10 \log P_t = 20 \log E \text{ (V/m)} + 20 \log r - 10 \log 30$$

At 3 meter, $r = 3 \text{ m}$

$$10 \log P_t = 20 \log E \text{ (V/m)} + 20 \log 3 - 10 \log 30$$

$$10 \log P_t = 20 \log E \text{ (V/m)} + 9.54 - 14.77$$

$$10 \log P_t = 20 \log E \text{ (V/m)} - 5.23$$

Since $20 \log E (V/m) = 20 \log E (\mu V/m) - 120$

$$10 \log P_t = 20 \log E (\mu V/m) - 120 - 5.23$$

$$10 \log P_t = 20 \log E (\mu V/m) - 125.23$$

$$\text{Limit line (dBuV) at 3 meter} = E_{\text{dBuV}} - \text{Attenuation}$$

$$= E_{\text{dBuV}} - (43 + 10 \log P_t \text{ at 3 meter})$$

$$= E_{\text{dBuV}} - 43 - 10 \log P_t \text{ at 3 meter}$$

$$= E_{\text{dBuV}} - 43 - (20 \log E (\mu V/m) - 125.23)$$

$$= E_{\text{dBuV}} - 43 - 20 \log E (\mu V/m) + 125.23$$


$$= E_{\text{dBuV}} - 20 \log E (\mu V/m) + 82.23$$

Since $20 \log E (\mu V/m) = E \text{ in dBuV}/m$

$$= E_{\text{dBuV}} - E_{\text{dBuV}} + 82.23$$

$$\text{Radiated Emission limit 3 meter} = 82.23 \text{ dBuV at any power level measured in dBuV}$$

Test Setup Photos

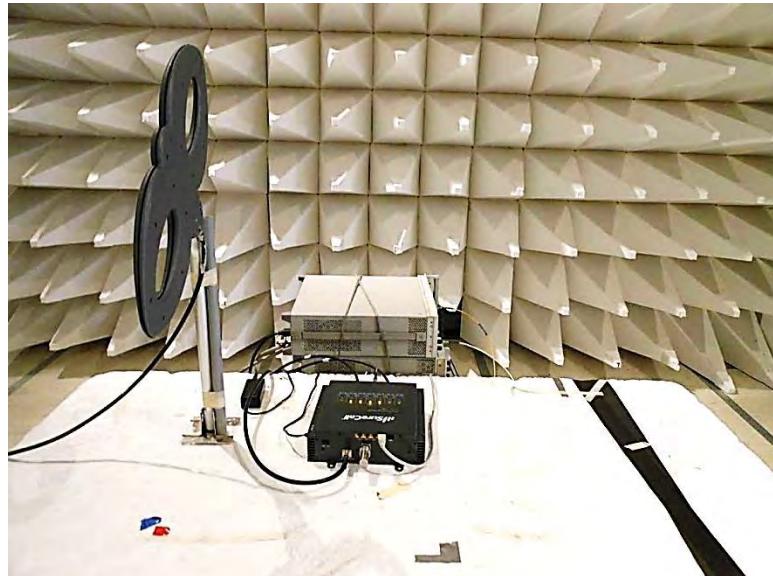

SUPPLEMENTAL INFORMATION

Measurement Uncertainty

| Uncertainty Value | Parameter |
|-------------------|---------------------------|
| 4.73 dB | Radiated Emissions |
| 3.34 dB | Mains Conducted Emissions |
| 3.30 dB | Disturbance Power |

Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k=2.

Emissions Test Details

TESTING PARAMETERS

Unless otherwise indicated, the following configuration parameters are used for equipment setup: The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

CORRECTION FACTORS

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in dB μ V/m, the spectrum analyzer reading in dB μ V was corrected by using the following formula. This reading was then compared to the applicable specification limit. Individual measurements were compared with the displayed limit value in the margin column. The margin was calculated based on the limit value subtracting the corrected measured value; a negative margin represents a measurement exceeding the limit while a positive margin represents a measurement less than the limit.

| SAMPLE CALCULATIONS | |
|-----------------------|----------------|
| Meter reading | (dB μ V) |
| + Antenna Factor | (dB/m) |
| + Cable Loss | (dB) |
| - Distance Correction | (dB) |
| - Preamplifier Gain | (dB) |
| = Corrected Reading | (dB μ V/m) |

TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. Unless otherwise specified, the following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used.

| MEASURING EQUIPMENT BANDWIDTH SETTINGS PER FREQUENCY RANGE | | | |
|--|---------------------|------------------|-------------------|
| TEST | BEGINNING FREQUENCY | ENDING FREQUENCY | BANDWIDTH SETTING |
| CONDUCTED EMISSIONS | 150 kHz | 30 MHz | 9 kHz |
| RADIATED EMISSIONS | 9 kHz | 150 kHz | 200 Hz |
| RADIATED EMISSIONS | 150 kHz | 30 MHz | 9 kHz |
| RADIATED EMISSIONS | 30 MHz | 1000 MHz | 120 kHz |
| RADIATED EMISSIONS | 1000 MHz | >1 GHz | 1 MHz |

SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "positive peak" detector mode. Whenever a "quasi-peak" or "average" reading was recorded, the measurement was annotated with a "QP" or an "Ave" on the appropriate rows of the data sheets. In cases where quasi-peak or average limits were employed and data exists for multiple measurement types for the same frequency then the peak measurement was retained in the report for reference, however the numbering for the affected row was removed and an arrow or carrot ("^") was placed in the far left-hand column indicating that the row above takes precedence for comparison to the limit. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

Peak

In this mode, the spectrum analyzer or receiver recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature called "peak hold," the measurement device had the ability to measure intermittent or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

Quasi-Peak

Quasi-peak measurements were taken using the quasi-peak detector when the true peak values exceeded or were within 2 dB of a quasi-peak specification limit. Additional QP measurements may have been taken at the discretion of the operator.

Average

Average measurements were taken using the average detector when the true peak values exceeded or were within 2 dB of an average specification limit. Additional average measurements may have been taken at the discretion of the operator. If the specification or test procedure requires trace averaging, then the averaging was performed using 100 samples or as required by the specification. All other average measurements are performed using video bandwidth averaging. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point the measuring device is set into the linear mode and the scan time is reduced.