



BUREAU
VERITAS

Test Report No.: RF130306N003

TEST REPORT

Applicant	Blip LLC
Address	15245 minnetonka blvd ,minnetonka , Minnesota , United States

Manufacturer or Supplier	Dong Guan XinChuang Toys Co., Ltd.
Address	BUILDING A&B NO.2 GUANGCHANG ROAD ,QIAOTOU TOWN,DONGGUAN CITY,GUANGDONG PROVINCE,CHINA
Product	Botti Asst / Botti - Bitzy-Bot / Botti - Bopsy-Bot / Botti - Bitzy-Bot – BIL / Botti - Bopsy-Bot – BIL / Botti Asst – BIL / Botti / Botti Assortment - Flat Top / Botti - Bitsy Bot - Flat Top / Botti - Bopsy Bot - Flat Top
Brand Name	Botti
Model	23296
Additional Model & Model Difference:	23297, 23298, 23598, 23599, 23678, 24112, 24331, 24332, 24333 See item 3.1
Date of tests	Mar. 06 ~ Mar. 11, 2013

the tests have been carried out according to the requirements of the following standard:

FCC Part 15, Subpart C (Section 15.235)

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Glyn He Project Engineer / EMC Department	Approved by Sam Tung Manager / EMC Department
	 Date: Mar. 11, 2013

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



BUREAU
VERITAS

Test Report No.: RF130306N003

TABLE OF CONTENTS

RELEASE CONTROL RECORD	3
1 SUMMARY OF TEST RESULTS	4
2 MEASUREMENT UNCERTAINTY	4
3 GENERAL INFORMATION	5
3.1 GENERAL DESCRIPTION OF EUT	5
3.2 DESCRIPTION OF TEST MODES	5
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	6
3.4 DESCRIPTION OF SUPPORT UNITS	6
4. TEST TYPES AND RESULTS	7
4.1 RADIATED EMISSION MEASUREMENT	7
4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT	7
4.1.2 TEST INSTRUMENTS.....	8
4.1.3 TEST PROCEDURES	9
4.1.4 DEVIATION FROM TEST STANDARD	9
4.1.5 TEST SETUP.....	10
4.1.6 EUT OPERATING CONDITIONS	10
4.1.7 TEST RESULTS	11
4.2 BANDWIDTH MEASUREMENT.....	16
4.2.1 LIMITS OF BANDWIDTH MEASUREMENT	16
4.2.2 TEST INSTRUMENTS.....	16
4.2.3 TEST PROCEDURE.....	16
4.2.4 DEVIATION FROM TEST STANDARD	16
4.2.5 TEST SETUP.....	17
4.2.6 EUT OPERATING CONDITIONS	17
4.2.7 TEST RESULTS	18
5 PHOTOGRAPHS OF THE TEST CONFIGURATION.....	19
6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	20



BUREAU
VERITAS

Test Report No.: RF130306N003

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF130306N003	Original release	Mar. 11, 2013



BUREAU
VERITAS

Test Report No.: RF130306N003

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.235)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
§15.203	Antenna Requirement	PASS	Compliant
§15.207 (a)	Conducted Emission	N/A	N/A
§15.209 §15.235(a)	Radiated Emission	PASS	Compliant
§15.235(b)	Measured Bandwidth	PASS	Compliant

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Radiated emissions	30MHz ~ 1GHz	3.64dB
	1GHz ~ 18GHz	2.20dB
	18GHz ~ 40GHz	1.94dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



BUREAU
VERITAS

Test Report No.: RF130306N003

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Botti Asst / Botti - Bitzy-Bot / Botti - Bopsy-Bot / Botti - Bitzy-Bot – BIL / Botti - Bopsy-Bot – BIL / Botti Asst – BIL / Botti / Botti Assortment - Flat Top / Botti - Bitsy Bot - Flat Top / Botti - Bopsy Bot - Flat Top
MODEL NO.	23296
FCC ID	RTL23296-49
NOMINAL VOLTAGE	DC 3V by Battery
MODULATION TYPE	ASK
OPERATING FREQUENCY	49.86MHz
NUMBER OF CHANNEL	1
ANTENNA TYPE	Fixed External Antenna
I/O PORTS	N/A
CABLE SUPPLIED	N/A

NOTE:

1. Additional models 23297, 23298, 23598, 23599, 23678, 24112, 24331, 24332, 24333 are identical with the test model 23296 in circuitry and electrical, mechanical and physical construction; the only differences are the appearance , trade name and model no. for trading purpose.
2. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

3.2 DESCRIPTION OF TEST MODES

The EUT was tested under the following mode.

FREQUENCY	TEST MODE
49.86MHz	Transmitting



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.235)

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit without any other necessary accessories or support units.



BUREAU
VERITAS

Test Report No.: RF130306N003

4 TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

According to §15.235(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [Peak] [μ V/m]	Field Strength of Fundamental Emission [Average] [μ V/m]
49.82 – 49.90	100,000 (100 dB μ V/m)	10,000 (80 dB μ V/m)

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB μ V/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



BUREAU
VERITAS

Test Report No.: RF130306N003

4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Spectrum Analyzer	Agilent	E4446A	MY46180622	May 02,12	May 01,13
EMI Test Receiver	Rohde&Schwarz	ESVD	847398/003	May 15,12	May 14,13
Bilog Antenna (25MHz-2GHz)	Teseq	CBL 6111D	27089	Jul. 16,12	Jul. 15,13
Horn Antenna (1GHz -18GHz)	EMCO	3117	00062558	Oct.18,12	Oct.17,13
Pre-Amplifier (20MHz-3GHz)	EMCI	EMC 330	980095	Nov. 02,12	Nov.01,13
Pre-Amplifier (100MHz-26.5GHz)	Agilent	8449B	3008A00409	May 31,12	May 30,13
10m Semi-anechoic Chamber	CHANGLING	21.4m*12.1m*8 .8m	NSEMC006	Mar. 24,12	Mar. 23,13
Digital Multimeter	FLUKE	15B	A1220010D G	Oct. 31,12	Oct. 30,13
Test Software	ADT	ADT_Radiated V7.6.15	N/A	N/A	N/A

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA and NIM/CHINA.

2. The test was performed in 10m Chamber.



BUREAU
VERITAS

Test Report No.: RF130306N003

4.1.3 TEST PROCEDURES

The basic test procedure was in accordance with ANSI C63.4 (section 12).

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meters Semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using new battery. The turntable was rotated to maximize the emission level.

NOTE:

1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
3. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
4. Margin value = Emission level – Limit value.
5. Fundamental AV value =PK Emission +AV factor.

4.1.4 DEVIATION FROM TEST STANDARD


No deviation



BUREAU
VERITAS

Test Report No.: RF130306N003

4.1.5 TEST SETUP

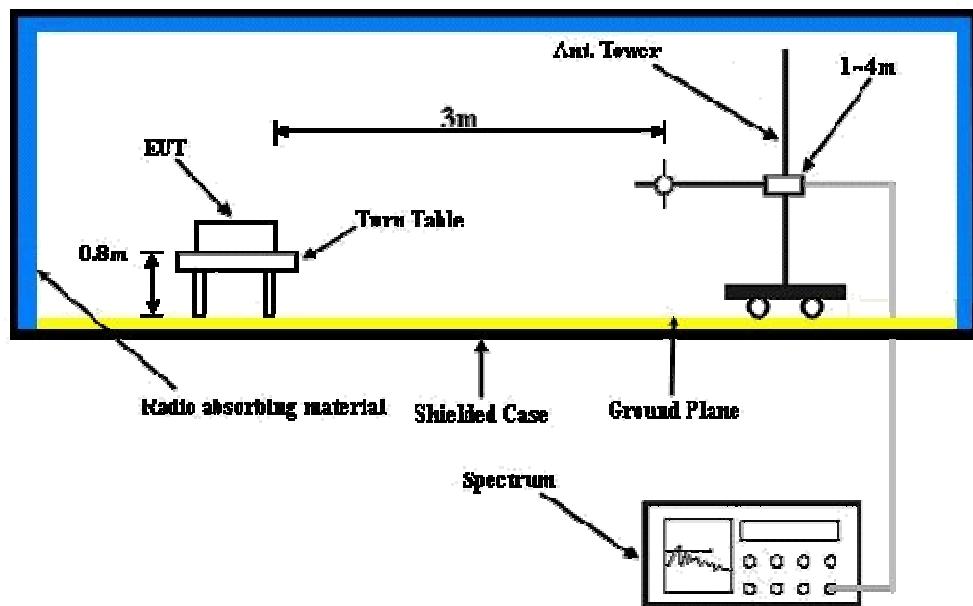

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- Turn on the EUT
- Enable the EUT under transmission condition continuously at specific frequency.



BUREAU
VERITAS

Test Report No.: RF130306N003

4.1.7 TEST RESULTS

FIELD STRENGTH OF FUNDAMENTAL

VERTICAL

No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*	49.86(PK)	10.47	61.04	74.51	100	-25.49
*	49.86AV)	-	-	58.94	80	-21.06

HORIZONTAL

No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
*	49.86(PK)	10.47	44.18	54.65	100	-45.35
*	49.86AV)	-	-	42.08	80	-37.92

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.
6. The average value of fundamental frequency is: Average value = Peak value +AV factor, where the AV factor is calculated from following formula: AV factor=20 log (Duty cycle) = 20 log (23.52%) = -12.57dB, Please see page 14~15 for plotted duty.



BUREAU
VERITAS


Test Report No.: RF130306N003

FREQUENCY RANGE	30MHz ~ 1GHz	DETECTOR FUNCTION	Quasi-Peak (QP)
-----------------	--------------	-------------------	-----------------

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	110.75	19.5 QP	43.5	-24.0	1.00 H	291	7.35	12.11
2	199.69	11.8 QP	43.5	-31.7	1.00 H	182	1.44	10.40
3	249.81	13.8 QP	46.0	-32.2	1.00 H	242	-0.02	13.86
4	348.45	16.2 QP	46.0	-29.8	1.00 H	222	-0.11	16.35
5	392.11	19.0 QP	46.0	-27.1	1.00 H	268	1.42	17.53
6	456.79	19.2 QP	46.0	-26.8	1.00 H	201	-0.07	19.27

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

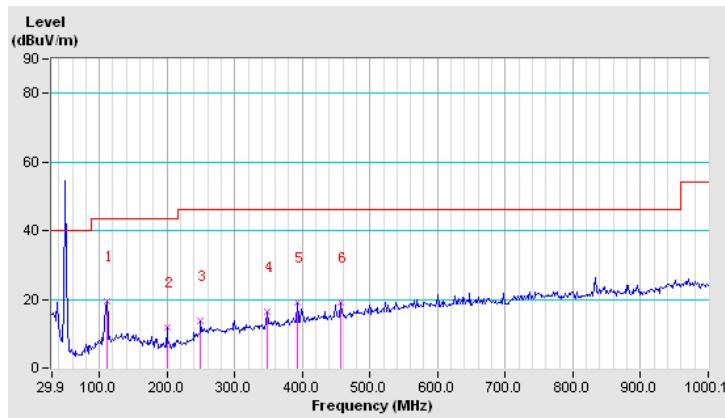



BUREAU
VERITAS


Test Report No.: RF130306N003

FREQUENCY RANGE	30MHz ~ 1GHz	DETECTOR FUNCTION	Quasi-Peak (QP)
-----------------	--------------	-------------------	-----------------

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	99.43	25.0 QP	43.5	-18.5	1.00 V	138	13.93	11.05
2	110.75	23.3 QP	43.5	-20.2	1.00 V	0	11.23	12.11
3	149.56	17.4 QP	43.5	-26.1	1.00 V	178	5.12	12.28
4	199.69	18.6 QP	43.5	-24.9	1.00 V	196	8.22	10.40
5	249.81	19.2 QP	46.0	-26.8	1.00 V	240	5.30	13.86
6	448.70	25.4 QP	46.0	-20.6	1.00 V	216	6.35	19.01

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

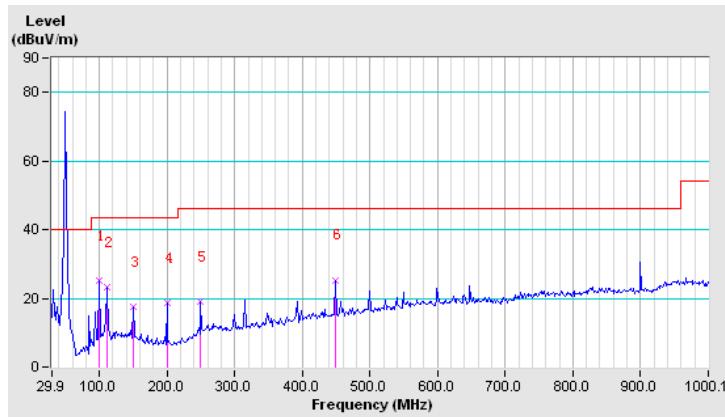




BUREAU
VERITAS

Test Report No.: RF130306N003

Duty Cycle:

Duty Cycle = $T_{on} / T_p * 100\% = (T_{on1} * \text{Number} + T_{on2} * \text{Number}) / T_p * 100\% =$
 $(1.942\text{ms} * 6 + 0.913\text{ms} * 13) / 100\text{ms} * 100\% = 23.52\%$

$T_p = 100\text{ms}$

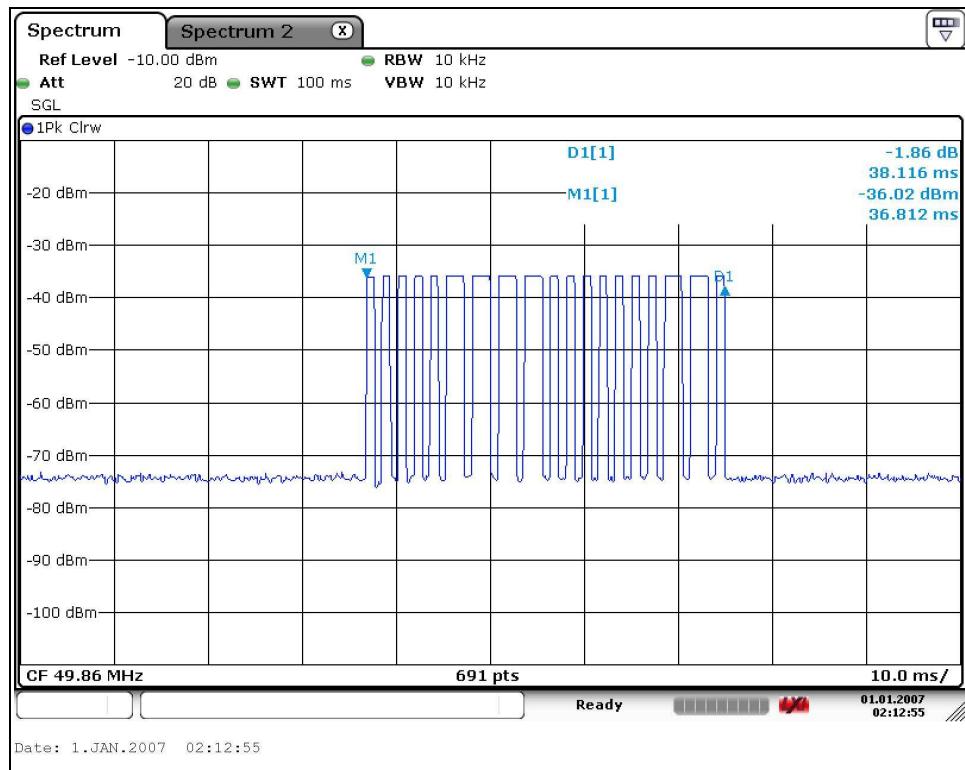





BUREAU
VERITAS

Test Report No.: RF130306N003

$T_{on1}=1.942\text{ms}$

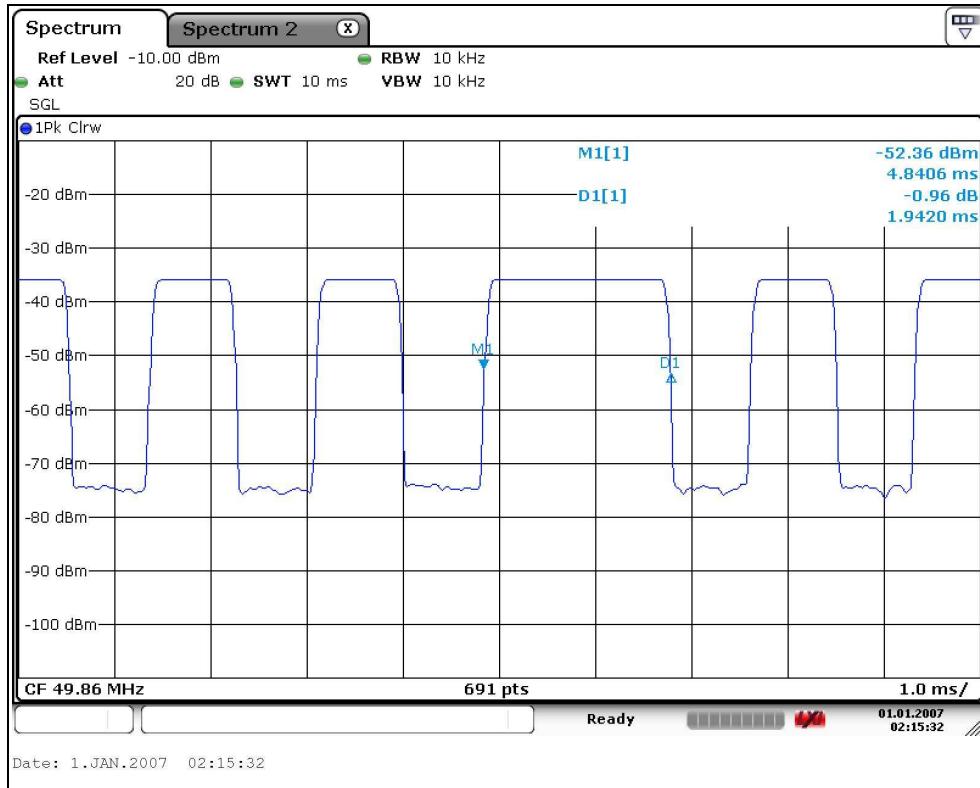

$T_{on2}=0.913\text{ms}$

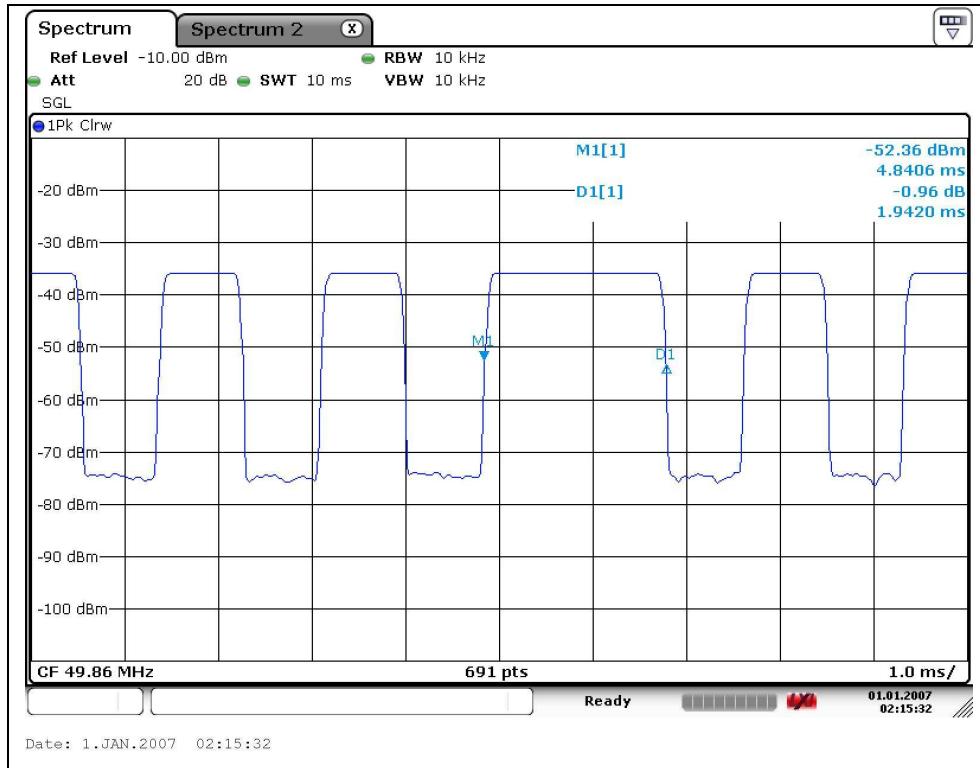



BUREAU
VERITAS

Test Report No.: RF130306N003

4.2 BANDWIDTH MEASUREMENT

4.2.1 LIMITS OF BANDWIDTH MEASUREMENT

The field strength of any emissions appearing between the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 26 dB below the level of the unmodulated carrier or to the general limits in Section 15.209.

FREQUENCY (MHz)	Limits
	[MHz]
49.86	within 49.81~49.91

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Spectrum Analyzer Agilent	E7405A	MY45118807	May 15,12	May 14,13

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA and NIM/CHINA
2. The test was performed in Dongguan Chamber RF

4.2.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 1kHz RBW. The 26dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 26dB.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation.



BUREAU
VERITAS

Test Report No.: RF130306N003

4.2.5 TEST SETUP

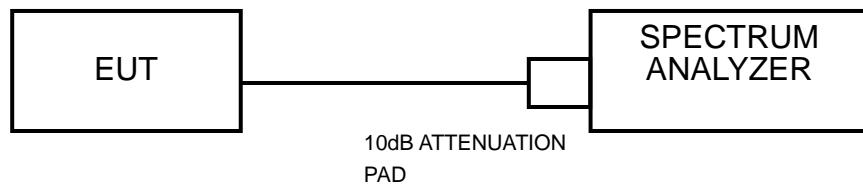

4.2.6 EUT OPERATING CONDITIONS

- a. Turn on the EUT
- b. Enable the EUT under transmission condition continuously at specific frequency.




BUREAU
VERITAS

Test Report No.: RF130306N003

4.2.7 TEST RESULTS

Lower & Upper Test Frequency Point (MHz)	Test Frequency (MHz)	P/F
Lower	49.8141	PASS
Upper	49.9079	PASS

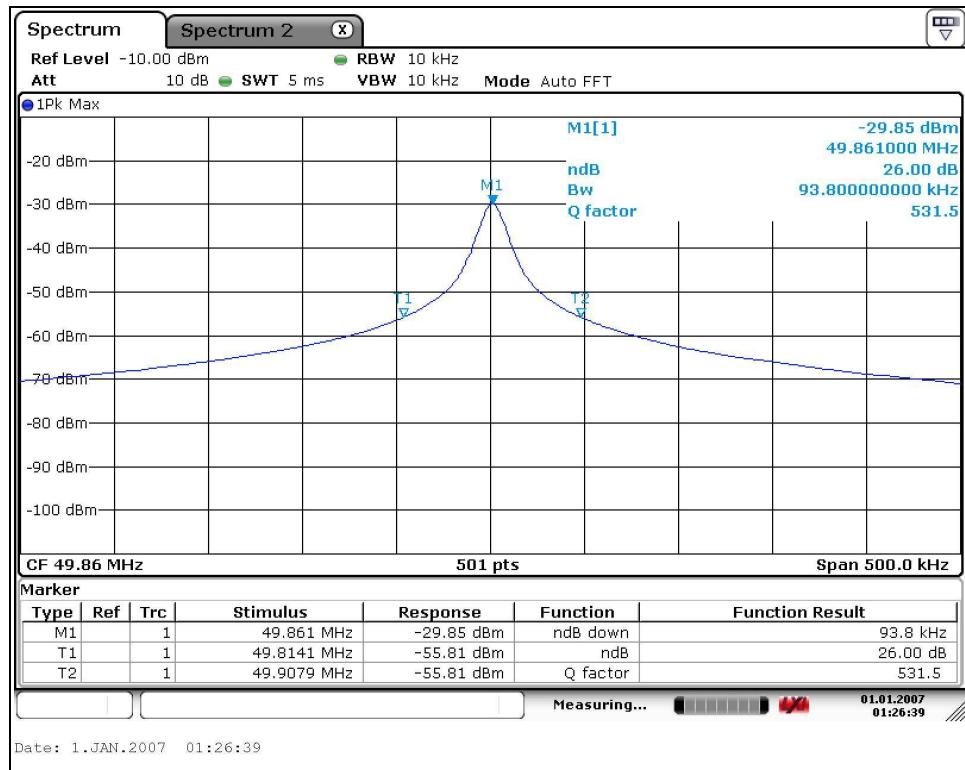



Test Report No.: RF130306N003

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



**BUREAU
VERITAS** Test Report No.: RF130306N003

6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---