

TEST REPORT

REPORT NUMBER: I08GE4046-FCC-SAR

ON

Type of Equipment: GSM/GPRS Mobile phone
Type of Designation: MEGA3
Manufacturer: Ezze Mobile Tech

ACCORDING TO

**FCC Part 2.1093: Radiofrequency radiation exposure evaluation:
portable devices, e-CFR March 23, 2006**


**FCC OET Bulletin 65 Supplement C (Edition 01-01): Additional
Information for Evaluating Compliance of Mobile and Portable
Devices with FCC Limits for Human Exposure to Radiofrequency
Emissions**

**IEEE Std 1528™-2003: IEEE Recommended Practice for
Determining the Peak Spatial-Average Specific Absorption Rate
(SAR) in the Human Head from Wireless Communications
Devices: Measurement Techniques**

China Telecommunication Technology Labs.

Month date, year
Feb 19, 2008

Signature



He Guili
Director

FCC ID: RV2MEGA3
Report Date: Feb 19,2008

Test Firm Name: China Telecommunication Technology Labs
Registration Number: 840587

Statement

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported tests were carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Part 2.1093. The sample tested was found to comply with the requirements defined in the applied rules.

Table of Contents

1. General Information	4
1.1 NOTES.....	4
1.2 TESTERS	5
1.3 TESTING LABORATORY INFORMATION	6
1.4 DETAILS OF APPLICANT OR MANUFACTURER	7
2 Test Item	8
2.1 GENERAL INFORMATION	8
2.2 OUTLINE OF EUT	8
2.3 MODIFICATIONS INCORPORATED IN EUT.....	8
2.4 EQUIPMENT CONFIGURATION	8
2.5 OTHER INFORMATION.....	8
2.6 EUT PHOTOGRAPHS	9
3 Measurement Systems	11
3.1 SAR MEASUREMENT SYSTEMS SETUP	11
3.2 E-FIELD PROBE.....	12
3.3 PHANTOM	13
3.4 DEVICE HOLDER	14
4 Test Results	15
4.1 OPERATIONAL CONDITION	15
4.2 TEST EQUIPMENT USED	15
4.3 APPLICABLE LIMIT REGULATIONS.....	16
4.4 TEST RESULTS.....	16
4.5 TEST SETUP AND PROCEDURES.....	16
4.6 TISSUE EQUIVALENT LIQUIDS USED AND ITS PROPERTIES	17
4.7 SYSTEM VALIDATION CHECK.....	18
4.8 MAXIMUM OUTPUT POWER MEASUREMENT METHODS	21
4.9 TEST DATA.....	21
4.10 MEASUREMENT UNCERTAINTY	27
Annex A Photographs.....	28
Annex B Graphical Results	34
ANNEX C Probes Calibration Certificates	48
ANNEX D Deviations from Prescribed Test Methods	58

1. General Information

1.1 Notes

All reported tests were carried out on a sample equipment to demonstrate limited compliance with the requirements of FCC CFR 47 Part 2.1093.

The test results of this test report relate exclusively to the item(s) tested as specified in section 2.

The following deviations from, additions to, or exclusions from the test specifications have been made. See Annex D.

China Telecommunication Technology Labs.(CTTL) authorizes the applicant or manufacturer (see section 1.4) to reproduce this report provided, and the test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTTL Mr. He Guili.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. CTTL accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

1.2 Testers

Name: Li Guoqing
Position: Engineer
Department: Department of EMC test
Signature: 李国庆

Editor of this test report:

Name: Li Guoqing
Position: Engineer
Department: Department of EMC test
Date: 2008.2.19
Signature: 李国庆

Technical responsibility for testing:

Name: Zou Dongyi
Position: Manager
Department: Department of EMC test
Date: 2008.2.19
Signature: 邹东屹

1.3 Testing Laboratory information

1.3.1 Location

Name: China Telecommunication Technology Labs.
Address: No. 52, Huanyuan Road, Haidian District
BEIJING
P. R. CHINA, 100083
Tel: +86 10 68094053
Fax: +86 10 68011404
Email: emc@chinattl.com

1.3.2 Details of accreditation status

Accredited by: China National Accreditation Service for Conformity
Assessment (CNAS)
Registration number: CNAS Registration No. CNAS L0570
Standard: ISO/IEC 17025

1.3.3 Test location, where different from section 1.3.1

Name: -----
Street: -----
City: -----
Country: -----
Telephone: -----
Fax: -----
Postcode: -----

1.4 Details of applicant or manufacturer

1.4.1 Applicant

Name: Ezze Mobile Tech
Address: 1F, Bubmusa Bldg., 151-31, Nonhyun-dong,
Kangnam-ku, Seoul
Country: Korea
Telephone: 82-2-519-7807
Fax: 82-2-519-7882
Contact: Han shin, Lee
Telephone: 82-19-543-3776
Email: leehs@ezzemobile.com

1.4.2 Manufacturer (if different from applicant in section 1.4.1)

Name: --
Address: --
City: --
Country: --

1.4.3 Manufactory (if different from applicant in section 1.4.1)

Name: Ezze Mobile Tech
Address: Rm. 204, Anyang Megavalley, 799,
Guanyang-dong, Dongan-gu, Anyang-city,
Gyunggi-do, Korea, 431-767

2 Test Item

2.1 General Information

Manufacturer: Ezze Mobile Tech

Name: GSM/GPRS Mobile phone

Model Number: MEGA3

Serial Number: --

Production Status: Production

Receipt date of test item: 2008-1-7

2.2 Outline of EUT

E.U.T. is a GSM/GPRS Mobile phone.

2.3 Modifications Incorporated in EUT

The EUT has not been modified from what is described by the brand name and unique type identification stated above.

2.4 Equipment Configuration

Equipment configuration list:

Item	Generic Description	Manufacturer	Type	Serial No.	Remarks
A	handset	Ezze Mobile Tech	MEGA3	--	None
B	adapter	Yu Feng	YF-0510228	--	None
C	battery	ZHIYIN	MEGA3	--	None
D	Earphone	Rich star	Wire Type(stereo)	--	None

Cables:

Item	Cable Type	Manufacturer	Length	Shield	Quantity	Remarks
1	DC cable on Adapter	Unknown	1.0m	No	1	None

2.5 Other Information

Version of hardware and software

HW Version: V 0.1

SW Version: V 0.1

2.6 EUT Photographs



Figure 1 Front view



Figure 2 front view with slip open



Figure 3 back view




Figure 4 back view

3 Measurement Systems

3.1 SAR Measurement Systems Setup

All measurements were performed using the automated near-field scanning system, DASY4, from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision industrial robot which positions the probes with a positional repeatability of better than 0.02mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines (length = 300mm) to the data acquisition unit.

A cell controller system containing the power supply, robot controller, teach pendant (Joystick) and remote control, is used to drive the robot motors. The PC consists of the Micron Pentium III 800 MHz computer with Windows 2000 system and SAR Measurement Software DASY4, A/D interface card, monitor, mouse, and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc., which is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical signal to digital electric signal of the DAE and transfers data to the PC plug-in card.

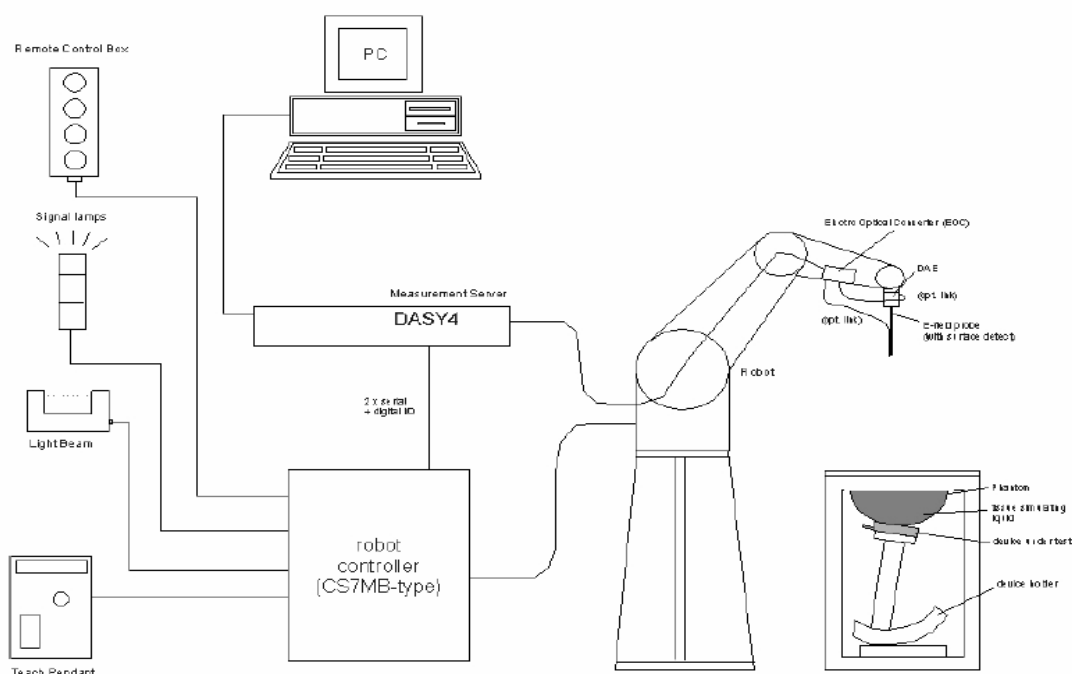

Demonstration of measurement system setup

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is

accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built-in VME-bus computer.

3.2 E-field Probe

3.2.1 E-field Probe Description

The SAR measurements were conducted with the dosimetric probe ES3DV3 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the standard procedure with an accuracy of better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$.

Items	Specification
Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection System(ET3DV6 only) Built-in shielding against static charges PEEK enclosure material(resistant to organic solvents, e.g., glycol)
Calibration	In air from 10 MHz to 2.5 GHz In brain and muscle simulating tissue at frequencies of 450MHz, 900MHz and 1.8GHz (accuracy $\pm 8\%$) Calibration for other liquids and frequencies upon request
Frequency	10 MHz to > 6 GHz; Linearity: $\pm 0.2\text{ dB}$ (30 MHz to 3 GHz)
Directivity	$\pm 0.2\text{ dB}$ in brain tissue (rotation around probe axis) $\pm 0.4\text{ dB}$ in brain tissue (rotation normal probe axis)
Dynamic Range	5 $\mu\text{W/g}$ to > 100mW/g; Linearity: $\pm 0.2\text{dB}$
Surface Detection	$\pm 0.2\text{ mm}$ repeatability in air and clear liquids over diffuse reflecting surface(ET3DV6 only)
Dimensions	Overall length: 330mm Tip length: 16mm Body diameter: 12mm Tip diameter: 6.8mm Distance from probe tip to dipole centers: 2.7mm
Application	General dosimetry up to 3GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

3.2.2 E-field Probe Calibration

The Annex C is the copy of the calibration certificate of the used probes.

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The free-space E-field measured in the medium correlates to temperature increase in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where: Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

ΔT = Temperature increase due to RF exposure.

Or

$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:

σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m^3).

3.3 Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Specifications:

Shell Thickness: $2 \pm 0.1\text{mm}$

Filling Volume: Approx. 20 liters

Dimensions: 810 x 1000 x 500 mm (H x L x W)

Liquid depth when testing: at least 150 mm

3.4 Device Holder

In combination with the Generic Twin Phantom V3.0, the Mounting Device (POM) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeat ably positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom etc).

China Test Report

4 Test Results

4.1 Operational Condition

Specifications FCC OET 65C (01-01), IEEE Std 1528™-2003

Date of Tests 2008.1.17 – 2008.1.18

Test conditions Ambient Temperature: 22.0~24.0℃
Relative Humidity: 39.5~50.7%

Operation Mode TX at the highest output peak power level

Method of measurement: FCC OET 65C (01-01), IEEE Std 1528™-2003

4.2 Test Equipment Used

TYPE	ITEM	S / N	CALIBRATION DATE	DUE DATE
CMU200	Wireless Communication Test Set	109172	2007-03-12	2008-03-12
ES3DV3	probe	3109	2007-11-12	2008-11-11
SD000D04 BC	DAE4	685	2007-11-08	2008-11-07
D835V2	dipole	4d038	2007-11-07	2008-11-06
D1900V2	dipole	5d072	2007-11-07	2008-11-06
NRVD	Power Meter	101438	2007-03-05	2008-03-04
HP E4432B	Signal Generator	GB38450525	2007-03-14	2008-03-13
NRV-Z4	Power Sensor	100381	2007-09-27	2008-09-27
NRV-Z2	Power Sensor	100211	2007-09-27	2008-09-27
8491B	Attenuator	MY39262528	NA	NA
8491B	Attenuator	MY39262663	NA	NA
8491B	Attenuator	MY39262640	NA	NA
8491B	Attenuator	MY39262638	NA	NA
778D	Dual directional coupler	20040	NA	NA
E3640A	DC Power Supply	MY40008487	2007-08-14	2008-08-13
85070E	Probe kit	MY44300214	N.A.	N.A.
E5071B	Network Analyzer	MY42404001	2007-06-18	2008-06-17

4.3 Applicable Limit Regulations

Item	Limit Level
Local Specific Absorption Rate (SAR) (1g)	1.6W/kg

4.4 Test Results

The EUT complies.

Note:

All measurements are traceable to national standards.

4.5 Test Setup and Procedures

The test setup is showed as picture 1 in the annex A.

The evaluation was performed according to the following procedure:

Step 1: The SAR value at a fixed location above the ear point was measured and was used as a reference value for assessing the power drift.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 10 mm x 10 mm. Based on these data, the area of the maximum absorption was determined by interpolation.

Step 3: Around this point, a volume of 30 mm x 30 mm x 25 mm was assessed by measuring 7 x 7 x 6 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

a. The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2 mm. The extrapolation was based on the least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.

b. The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x ~ y and z-directions). The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.

c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation should be repeated.

4.6 Tissue Equivalent Liquids Used and its Properties

4.6.1 Liquids for 835MHz

4.6.1.1 Head Tissue-Equivalent Liquids

Head Recipes of the liquids for 835MHz	
Ingredient	Percentage by weight
Sucrose	57.00
Water	40.45
NaCl	1.45
HEC	1.00
Preventol	0.10

Dielectric properties of the Head liquids at 835MHz					
Property	Reference value	Tolerance limit	Measured value	Error	Result
ϵ_r	41.5	5%	40.4	-2.7%	Complies
σ	0.90 S/m	5%	0.89 S/m	-1.1%	Complies

4.6.1.2 Body Tissue-Equivalent Liquids

Body Recipes of the liquids for 835MHz	
Ingredient	Percentage by weight
Sucrose	45.00
Water	52.40
NaCl	1.40
HEC	1.00
Preventol	0.10

Dielectric properties of the Body liquids at 835MHz					
Property	Reference value	Tolerance limit	Measured value	Error	Result
ϵ_r	55.2	5%	54.7	-0.9%	Complies
σ	0.97 S/m	5%	0.998 S/m	2.9%	Complies

4.6.2 Liquids for 1900MHz

4.6.2.1 Head Tissue-Equivalent Liquids

Head Recipes of the liquids for 1900MHz	
Ingredient	Percentage by weight
2-(2-butoxyethoxy) ethanol	44.92
De-ionised water	54.90
NaCl salt	0.18

Dielectric properties of the Head liquids at 1900MHz

Property	Reference value	Tolerance limit	Measured value	Error	Result
ϵ_r	40	5%	39.8	-0.5%	Complies
σ	1.4 S/m	5%	1.39 S/m	-0.07%	Complies

4.6.2.2 Body Tissue-Equivalent Liquids**Body Recipes of the liquids for 1900MHz**

Ingredient	Percentage by weight
Sucrose	58.00
De-ionised water	40.40
NaCl salt	0.50
HEC	1.00
Preventol	0.10

Dielectric properties of the Body liquids at 1900MHz

Property	Reference value	Tolerance limit	Measured value	Error	Result
ϵ_r	53.3	5%	54.2	1.7%	Complies
σ	1.52 S/m	5%	1.52 S/m	0%	Complies

4.7 System Validation Check**Validation Method:**

The setup of system validation check is demonstrated as figure 5. The amplifier, low pass filter and attenuators are optional. The dipole shall be positioned and centered below the phantom, paralleling to the longest side of the phantom. A low loss and low dielectric constant spacer on the dipole may be used to guarantee the correct distance between the dipole top surface and the phantom bottom surface.

The separation d , which is defined as the distance from the liquid bottom surface to the dipole's central axis at location of the feed-point, should be as following: for 835 MHz dipole, $d = 15$ mm, and for 1900 MHz dipole, $d = 10$ mm, and this can be obtained using two different size spacer. The dipole arms shall be parallel to the flat phantom surface.

First the power meter PM1 is connected to the cable and it measures the forward power at the location of the dipole connector (X). The signal generator is adjusted for the desired forward power at the dipole connector (taking into account the (Att1) value) and the power meter PM2 is read at that level. Then after connecting the cable to the dipole, the signal generator is readjusted for the same reading at the power meter PM2.

The system validation check procedures are the same as all measurement

procedures used for compliance tests. A complete 1 g averaged SAR measurement is performed using the flat part of the phantom. The reference dipole input power is adjusted to produce a 1 g averaged SAR value falling in the range of 0.4 – 10 mW/g. The 1 g averaged SAR is measured at 835 MHz and 1900 MHz using corresponding dipole respectively. Then the results are normalized to 1 W forward input power and compared with the reference SAR values.

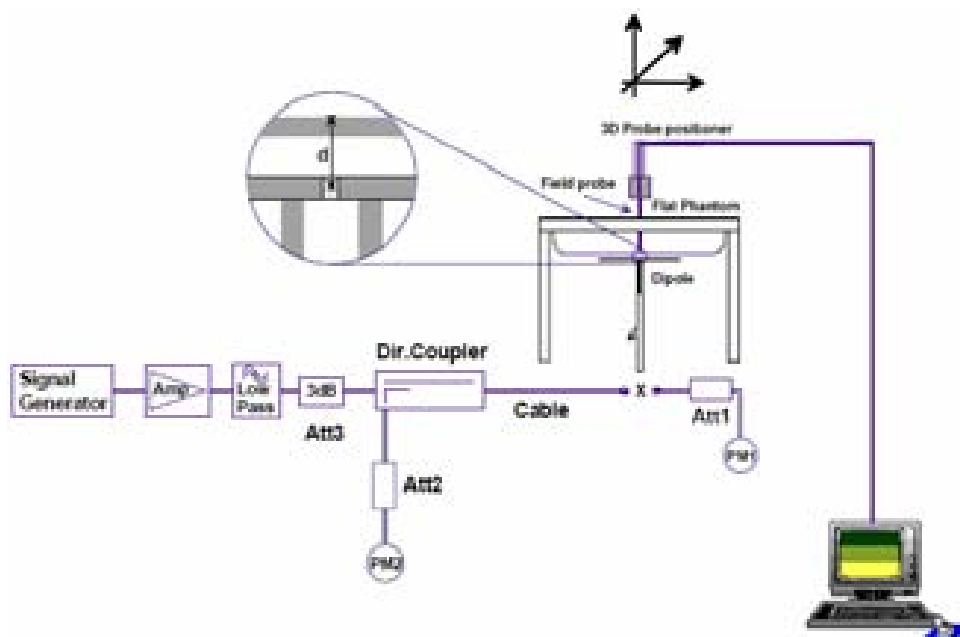


Figure 5 Illustration of system validation test setup

Validation Results

(a) Head simulating liquid at 835MHz

Test date: 2008-1-18

Liquid parameters: $\epsilon_r=40.4$, $\sigma=0.89\text{S/m}$

Ambient temperature: 24°C, liquid temperature: 23°C

Item	Target value	Tolerance limit	Verification source power	Measured value	Normalized Measured value	Error	Result
SAR (1 g)	9.52 mW/g	$\pm 10\%$	250mW	2.4 mW/g	9.6 mW/g	0.8%	complies

(b) Head simulating liquid at 1900MHz

Test date: 2008-1-18

Liquid parameters: $\epsilon_r=39.8$, $\sigma=1.39\text{S/m}$

Ambient temperature: 24°C, liquid temperature: 23°C

Item	Target value	Tolerance limit	Verification source power	Measured value	Normalized Measured value	Error	Result
SAR (1 g)	39.4 mW/g	$\pm 10\%$	250mW	10.6 mW/g	42.4 mW/g	7.6%	complies

(c) body simulating liquid at 835MHz

Test date: 2008-1-17

Liquid parameters: $\epsilon_r=54.7$, $\sigma=0.998\text{S/m}$

Ambient temperature: 24°C, liquid temperature: 21.5°C

Item	Target value	Tolerance limit	Verification source power	Measured value	Normalized Measured value	Error	Result
SAR (1 g)	9.56 mW/g	$\pm 10\%$	250mW	2.3 mW/g	9.2 mW/g	-3.8%	complies

(d) Head simulating liquid at 1900MHz

Test date: 2008-1-17

Liquid parameters: $\epsilon_r=54.2$, $\sigma=1.52\text{S/m}$

Ambient temperature: 24°C, liquid temperature: 21.5°C

Item	Target value	Tolerance limit	Verification source power	Measured value	Normalized Measured value	Error	Result
SAR (1 g)	37.6 mW/g	$\pm 10\%$	250mW	9.99 mW/g	39.96 mW/g	6.3%	complies

4.8 Maximum Output Power Measurement Methods

According to FCC OET 65c, maximum output power shall be measured before and after each SAR test. The test setup and method are described as following.

Test setup

The output power measurement test setup is demonstrated as figure 6.

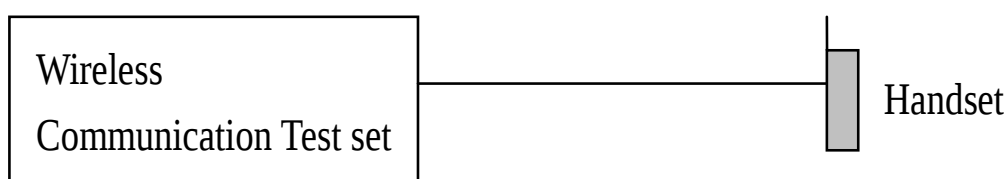


Figure 6 Demonstration of power measurement

The power control level settings are as following table.

mode	PCL setting	Permissible max.values	Channel[low]	Channel[mid]	Channel[high]
GSM/GPRS 850	5	33dBm	32.3dBm	32.4 dBm	31.9 dBm
			824.20MHz	836.60 MHz	848.80 MHz
PCS/GPRS 1900	0	30dBm	29.7dBm	29.7dBm	29.9dBm
			1850.2 MHz	1880.0 MHz	1909.8 MHz

4.9 Test Data

4.9.1 Test Specifications

(a) Duty Factor and Crest Factor

For GSM mode, the duty factor is 1:8.3 and the crest factor is 8.3; and for GPRS mode the duty factor is 1:4 and the crest factor is 4.

(b) Liquid Parameters

Conditions	Frequency	ϵ_r	σ [S/m]	Note
Head Liquid for GSM 850 MHz band				
128	824.2	40.3	0.886	--
190	836.6	40.3	0.892	--
251	848.8	40.2	0.905	--
Head Liquid for PCS 1900 MHz band				
512	1850.2	39.8	1.338	--
661	1880.0	39.8	1.39	--
810	1909.8	39.8	1.40	--
Body Liquid for GSM/GPRS 850 MHz band				
128	824.2	54.7	0.998	--
190	836.6	54.7	0.999	--
251	848.8	54.5	1.01	--
Body Liquid for PCS/GPRS 1900 MHz band				
512	1850.2	54.2	1.52	--
661	1880.0	54.2	1.52	--
810	1909.8	54.2	1.53	--

(c) Test configurations pictures:

Configurations	pictures no. in Annex A
Right Cheek – slip open	2
Right Cheek – slip close	3
Right Tilt – slip open	4
Right Tilt – slip close	5
Left Cheek – slip open	6
Left Cheek - slip close	7
Left Tilt – slip open	8
Left Tilt - slip close	9
Front side – slip open	10
Front side – slip close	11
Back side – slip open	12
Back side – slip close	13
Back side –slip open with earphone	14
Back side –slip close with earphone	15
Liquid depth for 835 band	16
Liquid depth for 1900 band	17

(d) Test description for body-worn mode

The distance between the handset and the bottom of the flat section is 15 mm.

(e) Test procedure for body-worn mode

Step 1: GSM850 band, test the middle channel of each of the front side and back side mode with the 15 mm distance between the handset and the bottom of the phantom, including slip open and close. Find out the worst case.

Step 2: For the worst case of step 1, test the low and high channel.

Step 3: Find out the worst case of step 1 and 2, and for this case, test the mode with Bluetooth on, and then with earphone using voice traffic mode.

Step 4: Repeat all the above steps for PCS 1900 band.

4.9.2 Test Data for Head mode**GSM850 – slip open**

Test configuration	Test position	SAR _{1g} [W/kg] / Power Drift [dB]		
		Channel 128 [low] 824.20 MHz	Channel 190 [Mid] 836.60 MHz	Channel 251 [high] 848.80 MHz
Left side of Head	Cheek	- / -	0.663 / 0.166	- / -
	Tilted	- / -	0.311 / -0.077	- / -
Right side of Head	Cheek	0.565 / -0.0213	0.73 / 0.129	0.835 / 0.157
	Tilted	- / -	0.337 / 0.0324	- / -
Right side of Head with BT on	Cheek	- / -	/	0.829 / 0.049

GSM850 – slip close

Test configuration	Test position	SAR _{1g} [W/kg] / Power Drift [dB]		
		Channel 128 [low] 824.20 MHz	Channel 190 [Mid] 836.60 MHz	Channel 251 [high] 848.80 MHz
Left side of Head	Cheek	0.628 / -0.034	0.800 / 0.046	0.779 / 0.0268
	Tilted	- / -	0.418 / -0.089	- / -
Right side of Head	Cheek	- / -	0.722 / 0	- / -
	Tilted	- / -	0.415 / 0.14	- / -

In GSM850 – slip open mode, the high channel of Right Cheek configuration gives the maximum SAR value, and the graphical result is showed as Annex B.1.

In GSM850 – slip close mode, the middle channel of Left Cheek configuration gives the maximum SAR value, and the graphical result is showed as Annex B.2.

In GSM850 mode (including slip open and close), the high channel of Right Cheek configuration with slip open gives the maximum SAR value, and when the Bluetooth is on, the graphical result is showed as Annex B.3.

PCS1900 – slip open

Test configuration	Test position	SAR _{1g} [W/kg] / Power Drift [dB]		
		Channel 512 [low] 1850.2 MHz	Channel 661 [Mid] 1880.0 MHz	Channel 810 [high] 1909.8 MHz
Left side of Head	Cheek	- / -	0.19 / -0.154	- / -
	Tilted	- / -	0.196 / -0.054	- / -
Right side of Head	Cheek	0.267 / -0.050	0.295 / -0.026	0.365 / -0.027
	Tilted	- / -	0.165 / -0.039	- / -

PCS1900 – slip close

Test configuration	Test position	SAR _{1g} [W/kg] / Power Drift [dB]		
		Channel 512 [low] 1850.2 MHz	Channel 661 [Mid] 1880.0 MHz	Channel 810 [high] 1909.8 MHz
Left side of Head	Cheek	0.583 / 0.135	0.729 / -0.056	0.890 / -0.103
	Tilted	- / -	0.286 / -0.008	- / -
Right side of Head	Cheek	- / -	0.599 / -0.044	- / -
	Tilted	- / -	0.256 / -0.097	- / -
left side of Head with BT on	Cheek	/	/	0.949 / -0.039

In PCS1900 – slip open mode, the high channel of Right Cheek configuration gives the maximum SAR value, and the graphical result is showed as Annex B.4.

In PCS1900 – slip close mode, the high channel of Left Cheek configuration gives the

maximum SAR value, and the graphical result is showed as Annex B.5.

In PCS1900 mode (including slip open and close), the high channel of Left Cheek configuration with slip close gives the maximum SAR value, and when the Bluetooth is on, the graphical result is showed as Annex B.6.

4.9.3 Test Data for Body-Worn mode

GPRS850 – slip open

Test configuration	Test position	SAR _{1g} [W/kg] / Power Drift [dB]								
		Channel 128 [low] 824.20 MHz			Channel 190 [Mid] 836.60 MHz			Channel 251 [high] 848.80 MHz		
Front side	15 mm	0.469	/	0.0147	0.564	/	-0.0343	0.547	/	0.0159
Back side	15 mm	-	/	-	0.510	/	0.0063	-	/	-
Front side with BT on	15 mm		/		0.487	/	0.0231		/	
GSM-Front side with earphone	15 mm		/		0.421	/	-0.0638		/	

GPRS850 – slip close

Test configuration	Test position	SAR _{1g} [W/kg] / Power Drift [dB]								
		Channel 128 [low] 824.20 MHz			Channel 190 [Mid] 836.60 MHz			Channel 251 [high] 848.80 MHz		
Front side	15 mm	-	/	-	0.389	/	0.0606	-	/	-
Back side	15 mm	0.426	/	-0.001	0.505	/	-0.014	0.525	/	-0.0118

In GPRS850 – slip open mode, the middle channel of front side configuration gives the maximum SAR value, and the graphical result is showed as Annex B.7.

In GPRS850 – slip close mode, the high channel of back side configuration gives the maximum SAR value, and the graphical result is showed as Annex B.8.

In GPRS850 mode (including slip open and close), the middle channel of front side configuration with slip open gives the maximum SAR value. In this case, when the Bluetooth is on, the graphical result is showed as Annex B.9, and when in voice traffic mode with earphone, the graphical result is showed as Annex B.10.

GPRS1900 – slip open

Test configuration	Test position	SAR _{1g} [W/kg] / Power Drift [dB]		
		Channel 512 [low] 1850.2 MHz	Channel 661 [Mid] 1880.0 MHz	Channel 810 [high] 1909.8 MHz
Front side	15 mm	/	0.136 / 0.0137	/
Back side	15 mm	0.256 / 0.023	0.296 / -0.024	0.341 / -0.037
Front side with BT on	15 mm	/	/	0.242 / -0.020
GSM-Back side with earphone	15 mm	/	/	0.265 / -0.006

GPRS1900 – slip close

Test configuration	Test position	SAR _{10g} [W/kg] / Power Drift [dB]		
		Channel 512 [low] 1850.2 MHz	Channel 661 [Mid] 1880.0 MHz	Channel 810 [high] 1909.8 MHz
Front side	15 mm	- / -	0.233 / -0.049	- / -
Back side	15 mm	0.206 / 0.004	0.267 / -0.063	0.307 / -0.031

In GPRS1900 – slip open mode, the high channel of back side configuration gives the maximum SAR value, and the graphical result is showed as Annex B.11.

In GPRS1900 – slip close mode, the high channel of back side configuration gives the maximum SAR value, and the graphical result is showed as Annex B.12.

In GPRS1900 mode (including slip open and close), the high channel of back side configuration with slip open gives the maximum SAR value. In this case, when the Bluetooth is on, the graphical result is showed as Annex B.13, and when in voice traffic mode with earphone, the graphical result is showed as Annex B.14.

4.10 Measurement uncertainty

ERROR SOURCE	Uncertainty value (%)	Probability distribution	Divisor	C_i (1g)	Standard Uncertainty (%)
Measurement equipment					
Probe calibration	5.9	Normal	1	1	5.9
Probe axial isotropy	4.7	Rectangular	$\sqrt{3}$	0.7	1.9
Probe hemispherical isotropy	9.6	Rectangular	$\sqrt{3}$	0.7	3.9
Probe linearity	4.7	Rectangular	$\sqrt{3}$	1	2.7
Detection limits	0.25	Rectangular	$\sqrt{3}$	1	0.6
Boundary effect	0.8	Rectangular	$\sqrt{3}$	1	0.6
Measurement device	0.3	Normal	1	1	0.3
Response time	0.0	Normal	1	1	0
Noise	0.0	Normal	1	1	0
Integration time	1.7	Normal	1	1	2.6
Mechanical constraints					
Scanning system	1.5	Rectangular	$\sqrt{3}$	1	0.2
Positioning of the probe	2.9	Normal	1	1	2.9
Phantom shell	4.0	Rectangular	$\sqrt{3}$	1	2.3
Positioning of the dipole	2.0	Normal	1	1	2.0
Positioning of the phone	2.9	Normal	1	1	2.9
Device holder disturbance	3.6	Normal	1	1	3.6
Physical parameters					
Liquid conductivity (deviation from target)	5.0	Rectangular	$\sqrt{3}$	0.5	1.4
Liquid conductivity (measurement error)	4.3	Rectangular	$\sqrt{3}$	0.5	1.2
Liquid permittivity (deviation from target)	5.0	Rectangular	$\sqrt{3}$	0.5	1.4
Liquid permittivity (measurement error)	4.3	Rectangular	$\sqrt{3}$	0.5	1.2
Drifts in output power of the phone, probe, temperature and humidity	5.0	Rectangular	$\sqrt{3}$	1	2.9
Environment disturbance	3.0	Rectangular	$\sqrt{3}$	1	1.7
Post-processing					
SAR interpolation and extrapolation	0.6	Rectangular	$\sqrt{3}$	1	0.6
Maximum SAR evaluation	1.0	Rectangular	$\sqrt{3}$		0.6
Combined standard uncertainty	$u_c = \sqrt{\sum_{i=1}^m C_i^2 \cdot u_i^2} = 11.08\%$				
Expanded uncertainty (confidence interval of 95%)	Normal $u_e = 1.96u_c = 21.7\%$				

Annex A Photographs



Picture 1 test setup



Picture 2 Right Cheek – slip open



Picture 3 Right Cheek – slip close



Picture 4 Right Tilt – slip open



Picture 5 Right Tilt – slip close



Picture 6 Left Cheek – slip open



Picture 7 Left Cheek - slip close



Picture 8 Left Tilt – slip open



Picture 9 Left Tilt - slip close



Picture 10 Front side – slip open



Picture 11 Front side – slip close



Picture 12 Back side – slip open



Picture 13 Back side – slip close



Picture 14 Back side –slip open with earphone



Picture 15 Back side –slip close with earphone



Picture 16 Liquid Depth at Ear Reference Point for 835MHz Head Liquid



Picture 17 Liquid Depth at Ear Reference Point for 1900MHz Head Liquid

Annex B Graphical Results

B.1 GSM850, slip open, high channel of Right Cheek configuration

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.905$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³;

Medium Notes: Ambient humidity:44; Ambient temperature: 24; Liquid temperature: 20.4;

Phantom section: Right Section ;Phantom: SAM with Right;Type: QD 000 P40 CA

DASY4 Configuration:

- Probe: ES3DV3 - SN3109; ConvF(6.02, 6.02, 6.02); Calibrated: 2007-11-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2007-11-8
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 161

high/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.7 V/m; Power Drift = 0.157 dB


Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.835 mW/g; SAR(10 g) = 0.609 mW/g

Maximum value of SAR (measured) = 0.893 mW/g

high/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.887 mW/g

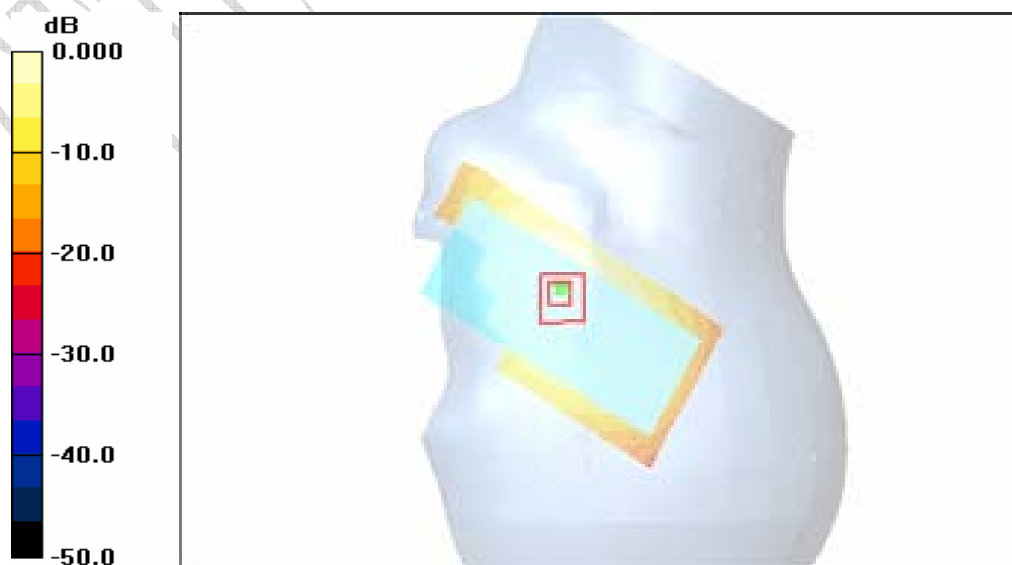

0 dB = 0.887mW/g

B.2 GSM850, slip close, middle channel of Left Cheek configuration

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.892$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³;

Medium Notes: Ambient humidity:44; Ambient temperature: 24; Liquid temperature: 20.4;

Phantom section: Left Section ;Phantom: SAM with Right;Type: QD 000 P40 CA

DASY4 Configuration:

- Probe: ES3DV3 - SN3109; ConvF(6.02, 6.02, 6.02); Calibrated: 2007-11-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2007-11-8
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 161

mid / Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.841 mW/g


mid / Zoom Scan (5x5x7) / Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.6 V/m; Power Drift = 0.046 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.800 mW /g; SAR(10 g) = 0.591 mW /g

Maximum value of SAR (measured) = 0.848 mW/g

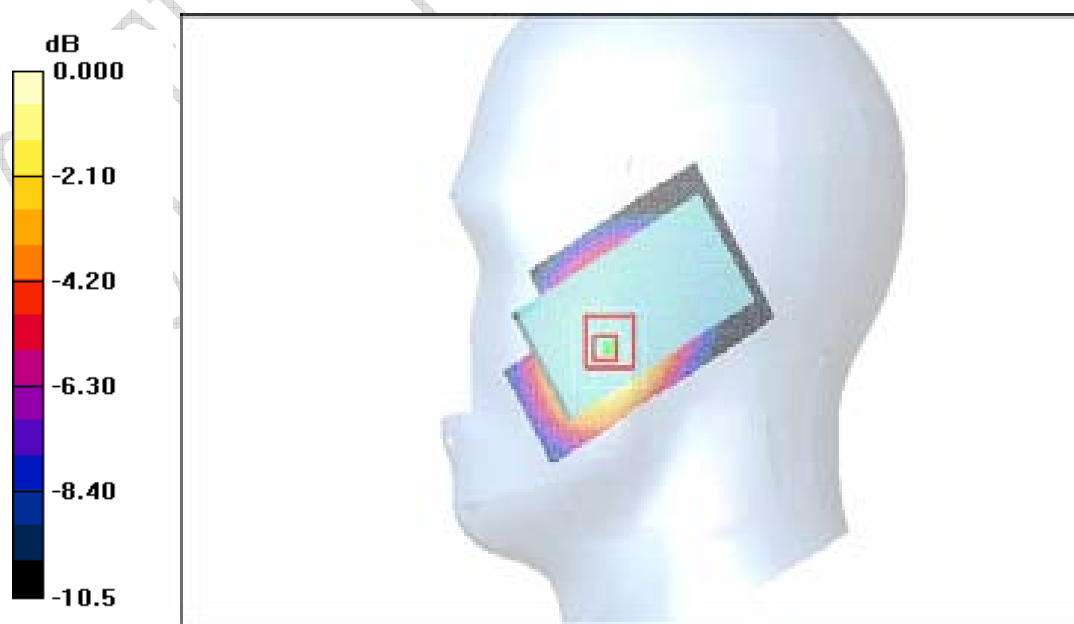

0 dB = 0.848mW/g

B.3 GSM850, slip open, high channel of Right Cheek configuration, with Bluetooth on

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.905$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³;

Medium Notes: Ambient humidity:44; Ambient temperature: 24; Liquid temperature: 20.4;

Phantom section: Right Section ;Phantom: SAM with Right;Type: QD 000 P40 CA

DASY4 Configuration:

- Probe: ES3DV3 - SN3109; ConvF(6.02, 6.02, 6.02); Calibrated: 2007-11-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2007-11-8
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 161

high/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.0 V/m; Power Drift = 0.049 dB


Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.829 mW/g; SAR(10 g) = 0.606 mW/g

Maximum value of SAR (measured) = 0.887 mW/g

high/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.882 mW/g

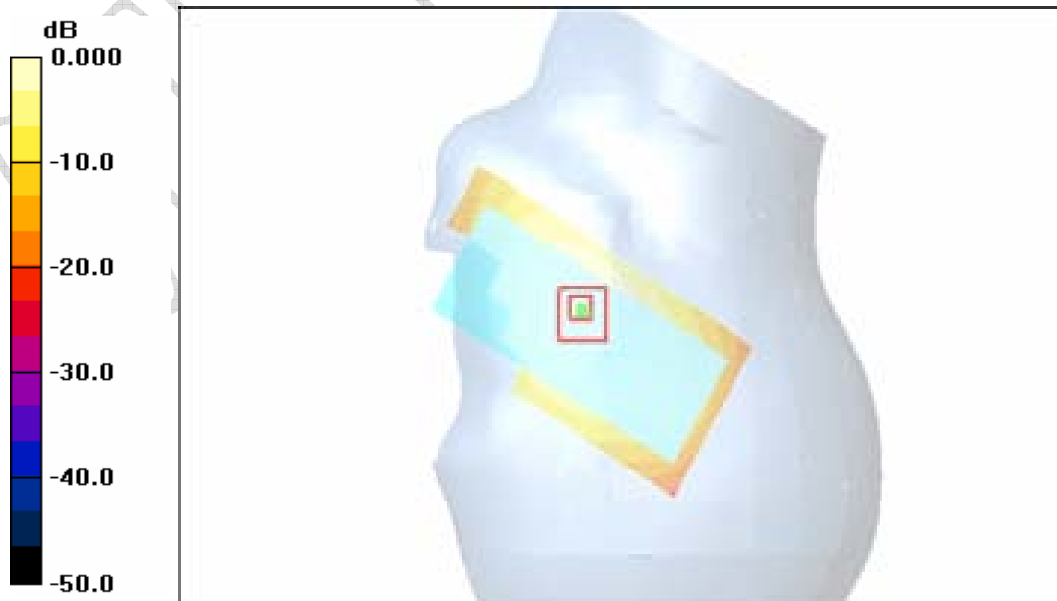

0 dB = 0.882mW/g

B.4 PCS1900, slip open, high channel of Right Cheek configuration

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.8$;
 $\rho = 1000$ kg/m³ ;
Medium Notes: Ambient humidity:41; Ambient temperature: 24; Liquid
temperature: 23;
Phantom section: Right Section ;Phantom: SAM with Front;Type: QD 000 P40 CA

DASY4 Configuration:

- Probe: ES3DV3 - SN3109; ConvF(4.63, 4.63, 4.63); Calibrated: 2007-11-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2007-11-8
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 161

high/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.59 V/m; Power Drift = -0.027 dB


Peak SAR (extrapolated) = 0.573 W/kg

SAR(1 g) = 0.365 mW/g; SAR(10 g) = 0.213 mW/g

Maximum value of SAR (measured) = 0.405 mW/g

high/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.405 mW/g

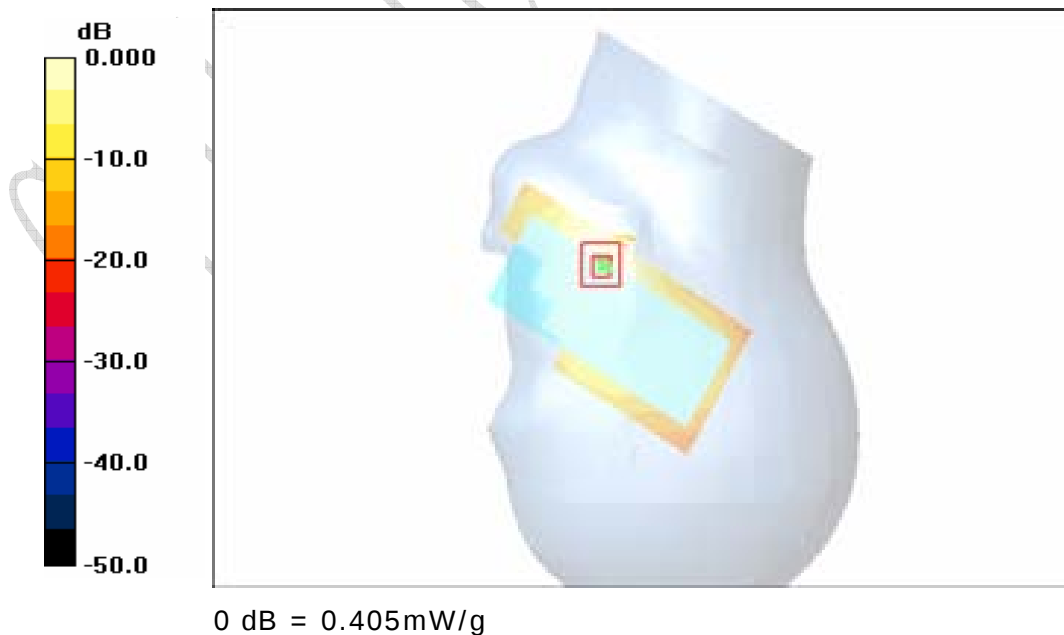

B.5 PCS1900, slip close, high channel of Left Cheek configuration

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.8$;
 $\rho = 1000$ kg/m³ ;
Medium Notes: Ambient humidity:41; Ambient temperature: 24; Liquid
temperature: 23;
Phantom section: Left Section ;Phantom: SAM with Front;Type: QD 000 P40 CA

DASY4 Configuration:

- Probe: ES3DV3 - SN3109; ConvF(4.63, 4.63, 4.63); Calibrated: 2007-11-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2007-11-8
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 161

high/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.4 V/m; Power Drift = -0.103 dB


Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.890 mW/g; SAR(10 g) = 0.501 mW/g

Maximum value of SAR (measured) = 0.970 mW/g

high/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.02 mW/g

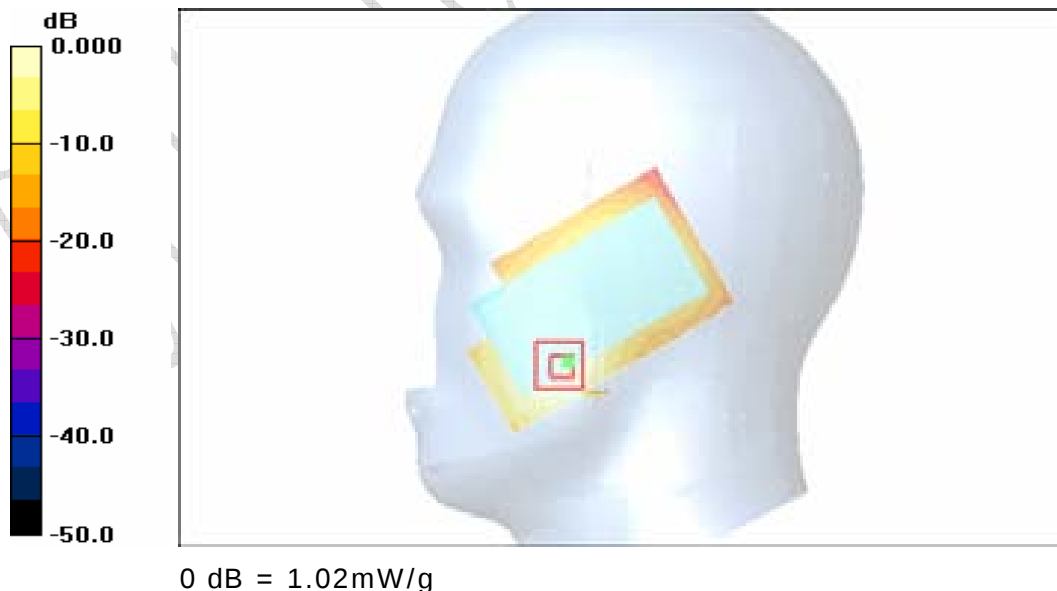

B.6 PCS1900, slip close, high channel of Left Cheek configuration, with Bluetooth on

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.8$;
 $\rho = 1000$ kg/m³ ;
Medium Notes: Ambient humidity:41; Ambient temperature: 24; Liquid
temperature: 23;
Phantom section: Left Section ;Phantom: SAM with Front;Type: QD 000 P40 CA

DASY4 Configuration:

- Probe: ES3DV3 - SN3109; ConvF(4.63, 4.63, 4.63); Calibrated: 2007-11-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2007-11-8
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 161

high/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.84 V/m; Power Drift = -0.039 dB


Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 0.949 mW/g; SAR(10 g) = 0.528 mW/g

Maximum value of SAR (measured) = 1.04 mW/g

high/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.06 mW/g

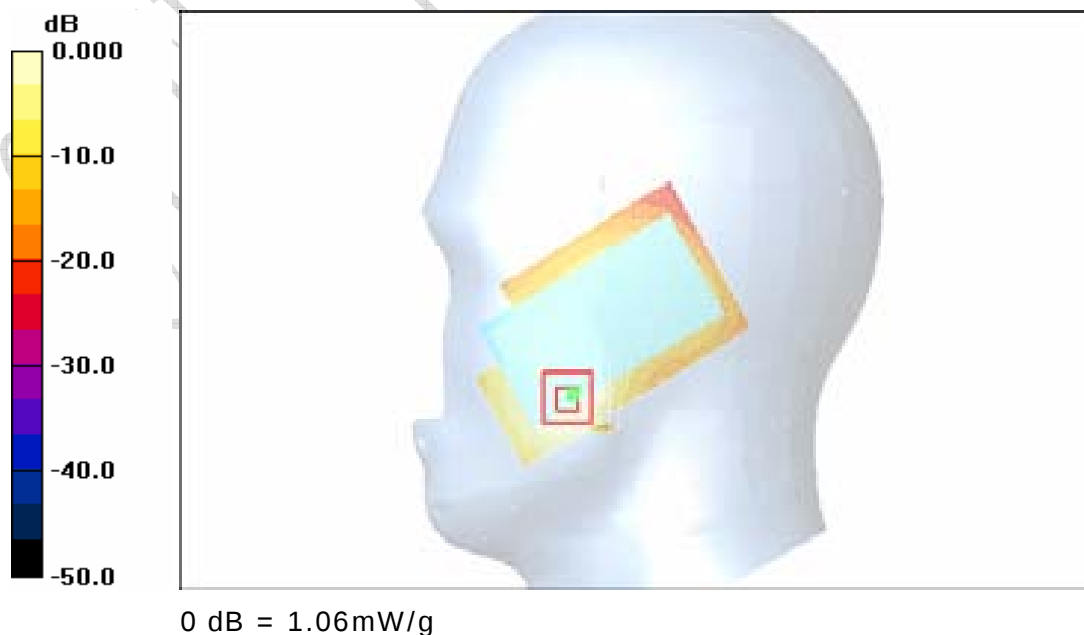

B.7 GPRS850, slip open, middle channel of Front side configuration

Communication System: GPRS850 class 8; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.999$ mho/m; $\epsilon_r = 54.7$; $\rho = 1000$ kg/m³ ;

Medium Notes: Ambient humidity:48; Ambient temperature: 24; Liquid temperature: 21.5;

Phantom section: Flat Section ;Phantom: Flat Phantom ELI4.0;Type: QDOVA001B

DASY4 Configuration:

- Probe: ES3DV3 - SN3109; ConvF(5.82, 5.82, 5.82); Calibrated: 2007-11-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2007-11-8
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 161

mid / Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.591 mW/g



mid / Zoom Scan (5x5x7) / Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.3 V/m; Power Drift = -0.034 dB

Peak SAR (extrapolated) = 0.711 W/kg

SAR(1 g) = 0.564 mW / g; SAR(10 g) = 0.417 mW / g

Maximum value of SAR (measured) = 0.596 mW/g

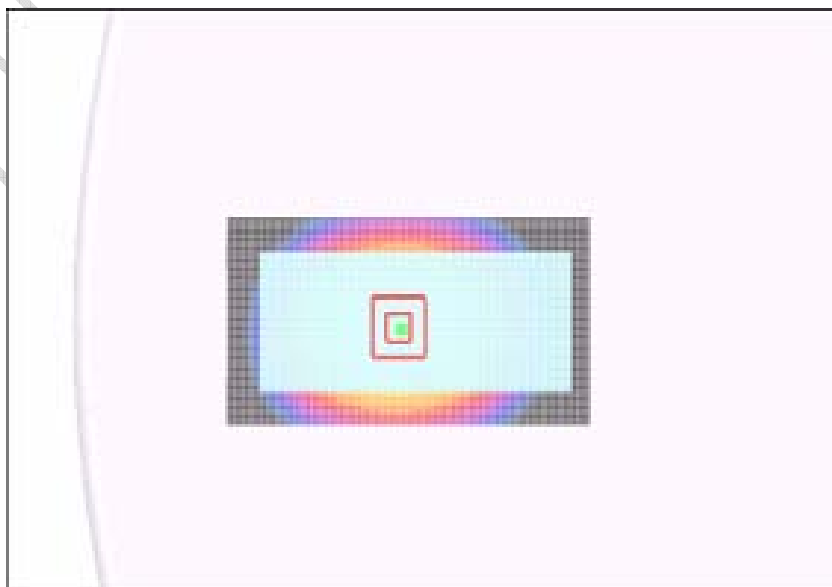

0 dB = 0.596mW/g

B.8 GPRS850, slip close, high channel of back side configuration

Communication System: GPRS850 class 8; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³;

Medium Notes: Ambient humidity:48; Ambient temperature: 24; Liquid temperature: 21.5;

Phantom section: Flat Section ;Phantom: Flat Phantom ELI4.0;Type: QDOVA001B

DASY4 Configuration:

- Probe: ES3DV3 - SN3109; ConvF(5.82, 5.82, 5.82); Calibrated: 2007-11-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2007-11-8
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 161

high/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.2 V/m; Power Drift = -0.012 dB


Peak SAR (extrapolated) = 0.693 W/kg

SAR(1 g) = 0.525 mW/g; SAR(10 g) = 0.374 mW/g

Maximum value of SAR (measured) = 0.562 mW/g

high/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.552 mW/g

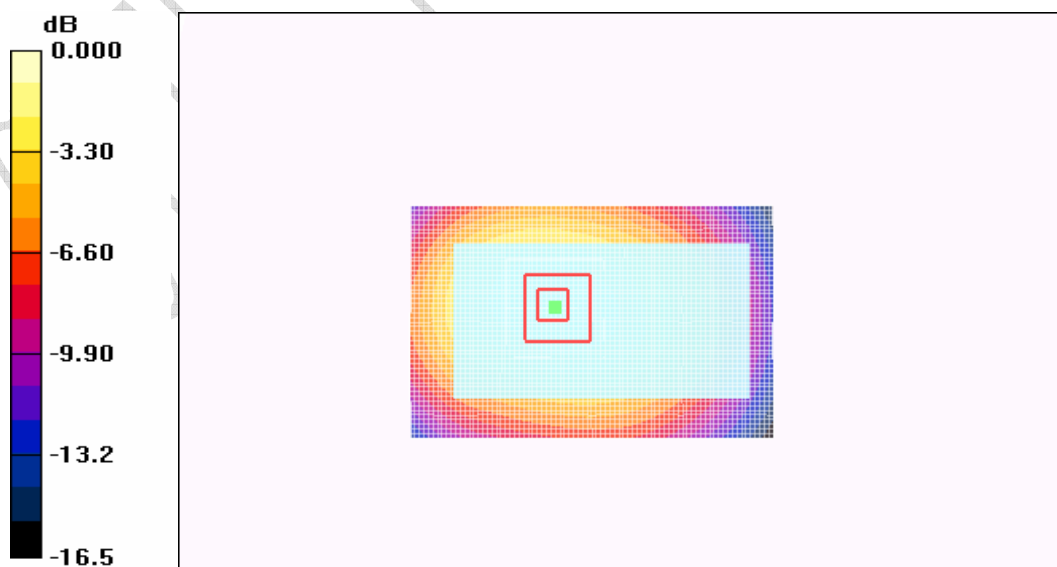

0 dB = 0.552mW/g

B.9 GPRS850, slip open, middle channel of Front side configuration, with Bluetooth on

Communication System: GPRS850 class 8; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.999$ mho/m; $\epsilon_r = 54.7$; $\rho = 1000$ kg/m³ ;

Medium Notes: Ambient humidity:48; Ambient temperature: 24; Liquid temperature: 21.5;

Phantom section: Flat Section ;Phantom: Flat Phantom ELI4.0;Type: QDOVA001B

DASY4 Configuration:

- Probe: ES3DV3 - SN3109; ConvF(5.82, 5.82, 5.82); Calibrated: 2007-11-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2007-11-8
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 161

mid / Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.517 mW/g


mid / Zoom Scan (5x5x7) / Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.4 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 0.615 W/kg

SAR(1 g) = 0.487 mW / g; SAR(10 g) = 0.363 mW / g

Maximum value of SAR (measured) = 0.513 mW/g

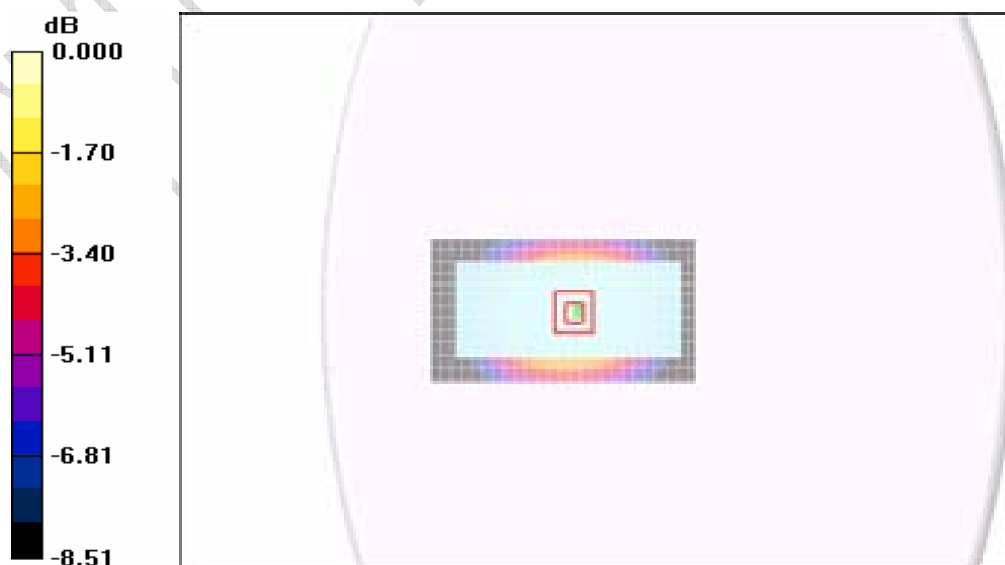

0 dB = 0.513mW/g

B.10 GSM850, slip open, middle channel of Front side configuration, voice traffic with earphone

Communication System: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.999$ mho/m; $\epsilon_r = 54.7$; $\rho = 1000$ kg/m³;

Medium Notes: Ambient humidity:48; Ambient temperature: 24; Liquid temperature: 21.5;

Phantom section: Flat Section ;Phantom: Flat Phantom ELI4.0;Type: QDOVA001B

DASY4 Configuration:

- Probe: ES3DV3 - SN3109; ConvF(5.82, 5.82, 5.82); Calibrated: 2007-11-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2007-11-8
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 161

mid / Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.448 mW/g


mid / Zoom Scan (5x5x7) / Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.4 V/m; Power Drift = -0.064 dB

Peak SAR (extrapolated) = 0.528 W/kg

SAR(1 g) = 0.421 mW / g; SAR(10 g) = 0.312 mW / g

Maximum value of SAR (measured) = 0.446 mW/g

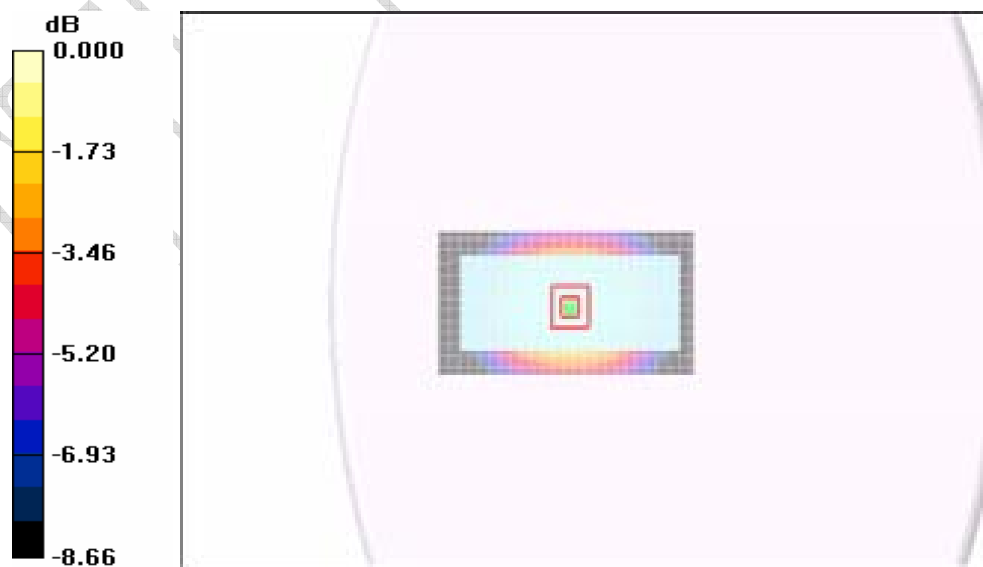

0 dB = 0.446mW/g

B.11 GPRS1900, slip open, high channel of Back side configuration

Communication System: GPRS 1900 class 8; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 54.2$; $\rho = 1000$ kg/m³ ;

Medium Notes: Ambient humidity:48; Ambient temperature: 24; Liquid temperature: 21.5;

Phantom section: Flat Section ;Phantom: Flat Phantom ELI4.0;Type: QDOVA001BA

DASY4 Configuration:

- Probe: ES3DV3 - SN3109; ConvF(4.41, 4.41, 4.41); Calibrated: 2007-11-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2007-11-8
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 161

high/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.47 V/m; Power Drift = -0.037 dB


Peak SAR (extrapolated) = 0.518 W/kg

SAR(1 g) = 0.341 mW/g; SAR(10 g) = 0.220 mW/g

Maximum value of SAR (measured) = 0.365 mW/g

high/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.383 mW/g

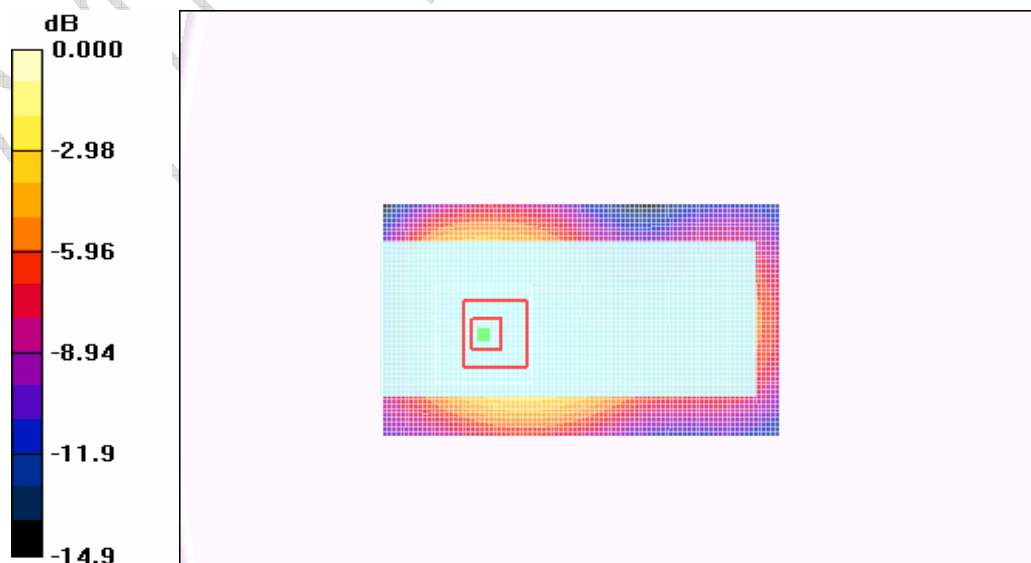

0 dB = 0.383mW/g

B.12 GPRS1900, slip close, high channel of back side configuration

Communication System: GPRS 1900 class 8; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 54.2$; $\rho = 1000$ kg/m³;

Medium Notes: Ambient humidity:48; Ambient temperature: 24; Liquid temperature: 21.5;

Phantom section: Flat Section ;Phantom: Flat Phantom ELI4.0;Type: QDOVA001BA

DASY4 Configuration:

- Probe: ES3DV3 - SN3109; ConvF(4.41, 4.41, 4.41); Calibrated: 2007-11-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2007-11-8
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 161

high/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.7 V/m; Power Drift = -0.031 dB


Peak SAR (extrapolated) = 0.506 W/kg

SAR(1 g) = 0.307 mW/g; SAR(10 g) = 0.177 mW/g

Maximum value of SAR (measured) = 0.335 mW/g

high/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.348 mW/g

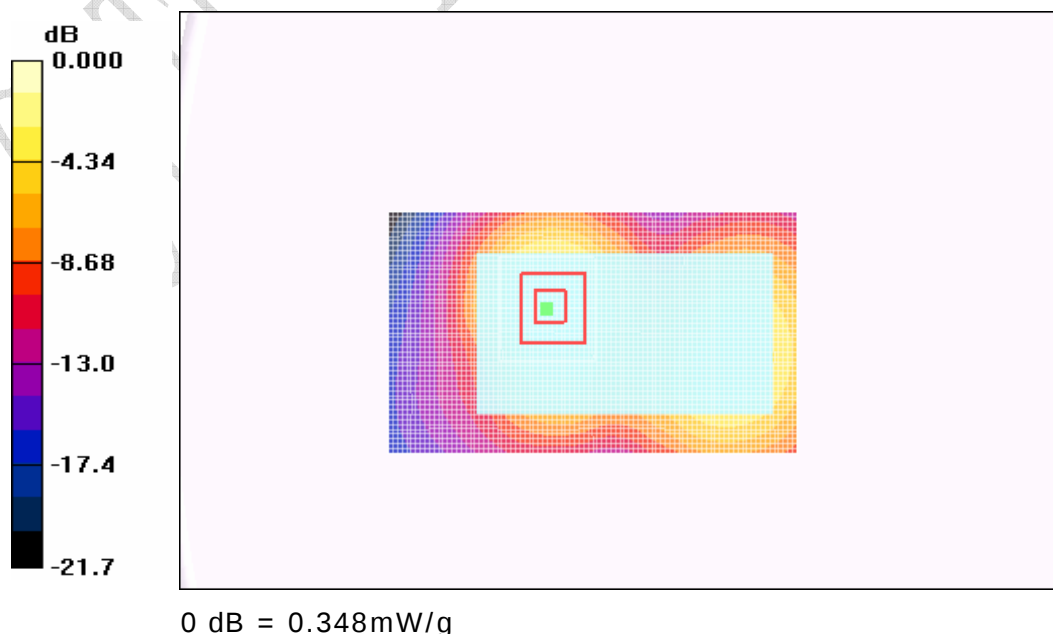

B.13 GPRS1900, slip open, high channel of Back side configuration, with Bluetooth on

Communication System: GPRS 1900 class 8; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 54.2$; $\rho = 1000$ kg/m³ ;

Medium Notes: Ambient humidity:48; Ambient temperature: 24; Liquid temperature: 21.5;

Phantom section: Flat Section ;Phantom: Flat Phantom ELI4.0;Type: QDOVA001BA

DASY4 Configuration:

- Probe: ES3DV3 - SN3109; ConvF(4.41, 4.41, 4.41); Calibrated: 2007-11-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2007-11-8
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 161

high/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.12 V/m; Power Drift = -0.020 dB


Peak SAR (extrapolated) = 0.362 W/kg

SAR(1 g) = 0.242 mW/g; SAR(10 g) = 0.159 mW/g

Maximum value of SAR (measured) = 0.257 mW/g

high/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.260 mW/g

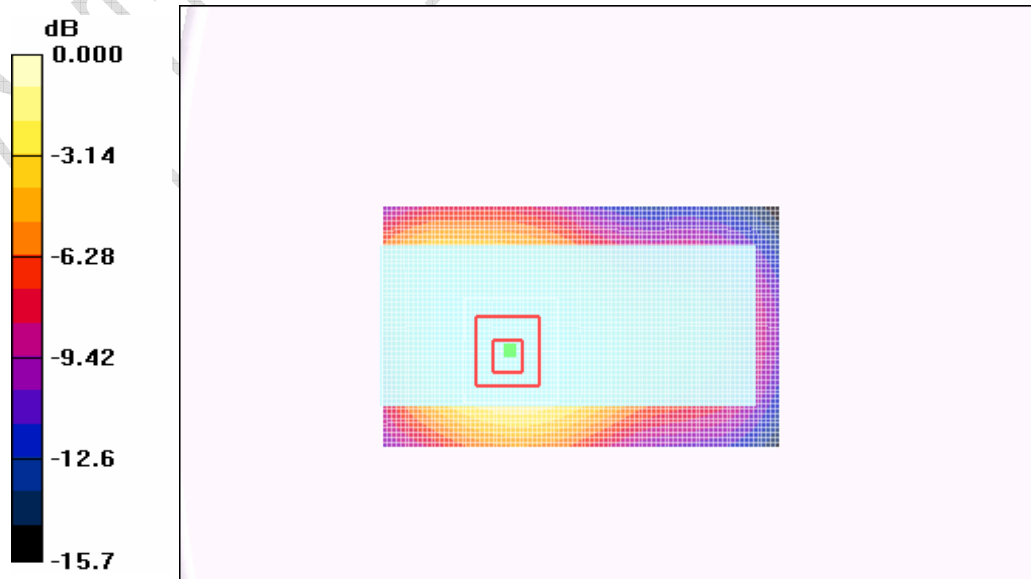

0 dB = 0.260mW/g

B.14 PCS1900, slip open, high channel of Back side configuration, voice traffic with earphone

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 54.2$; $\rho = 1000$ kg/m³;

Medium Notes: Ambient humidity:48; Ambient temperature: 24; Liquid temperature: 21.5;

Phantom section: Flat Section ;Phantom: Flat Phantom ELI4.0;Type: QDOVA001BA

DASY4 Configuration:

- Probe: ES3DV3 - SN3109; ConvF(4.41, 4.41, 4.41); Calibrated: 2007-11-12
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2007-11-8
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 161

high/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.65 V/m; Power Drift = -0.006 dB



Peak SAR (extrapolated) = 0.402 W/kg

SAR(1 g) = 0.265 mW/g; SAR(10 g) = 0.172 mW/g

Maximum value of SAR (measured) = 0.280 mW/g

high/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.277 mW/g

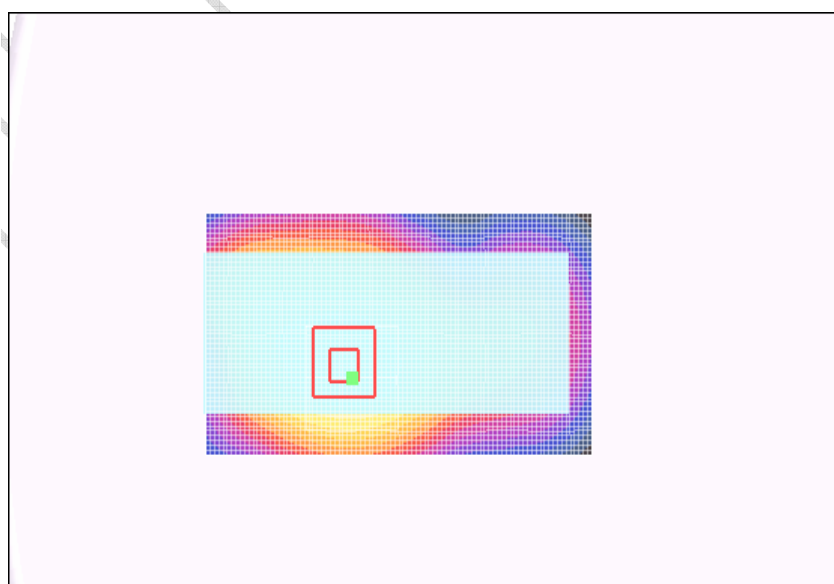

0 dB = 0.277mW/g

ANNEX C Probes Calibration Certificates

The System Validation was conducted following the requirements of standard
IEEE 1528: 2003 Clause 8.3.

The scanned copy of the calibration certificate of the probe used is as following.

Test Report

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **Flextronics (Auden)**Certificate No: **ES3-3109_Nov07****CALIBRATION CERTIFICATE**Object **ES3DV3 - SN:3109**Calibration procedure(s) **QA CAL-01.v6
Calibration procedure for dosimetric E-field probes**Calibration date: **November 12, 2007**Condition of the calibrated item **In Tolerance**


This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&E critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41495277	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41498087	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Reference 3 dB Attenuator	SN: S5054 (3c)	8-Aug-07 (METAS, No. 217-00719)	Aug-08
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-07 (METAS, No. 217-00671)	Mar-08
Reference 30 dB Attenuator	SN: S5129 (30b)	8-Aug-07 (METAS, No. 217-00720)	Aug-08
Reference Probe ES3DV2	SN: 3013	4-Jan-07 (SPEAG, No. ES3-3013_Jan07)	Jan-08
DAE4	SN: 654	20-Apr-07 (SPEAG, No. DAE4-654_Apr07)	Apr-08

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585	16-Oct-01 (SPEAG, in house check Oct-07)	In house check: Oct-08

Calibrated by:	Name Katja Pokovic	Function Technical Manager	Signature 
Approved by:	Name Nils Kuster	Function Quality Manager	Signature 

Issued: November 12, 2007

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: ES3-3109_Nov07

Page 1 of 9

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization ϕ	ϕ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: In a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

ES3DV3 SN:3109

November 12, 2007

Probe ES3DV3

SN:3109

Manufactured:	September 20, 2005
Last calibrated:	May 24, 2006
Recalibrated:	November 12, 2007

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

ES3DV3 SN:3109

November 12, 2007

DASY - Parameters of Probe: ES3DV3 SN:3109

Sensitivity in Free Space^A

NormX	1.22 ± 10.1%	$\mu V/(V/m)^2$
NormY	1.30 ± 10.1%	$\mu V/(V/m)^2$
NormZ	1.28 ± 10.1%	$\mu V/(V/m)^2$

Diode Compression^B

DCP X	94 mV
DCP Y	96 mV
DCP Z	93 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL 900 MHz Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance	3.0 mm	4.0 mm
SAR _{ice} [%] Without Correction Algorithm	6.3	2.9
SAR _{ice} [%] With Correction Algorithm	1.7	0.5

TSL 1750 MHz Typical SAR gradient: 10 % per mm

Sensor Center to Phantom Surface Distance	3.0 mm	4.0 mm
SAR _{ice} [%] Without Correction Algorithm	7.8	4.7
SAR _{ice} [%] With Correction Algorithm	0.0	1.4

Sensor Offset

Probe Tip to Sensor Center 2.0 mm

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the P^2 -field uncertainty inside TSL (see Page 8).


^B Numerical linearization parameter: uncertainty not required.

ES3DV3 SN:3109

November 12, 2007

Frequency Response of E-Field

(TEM-Cell:ifl110 EXX, Waveguide: R22)



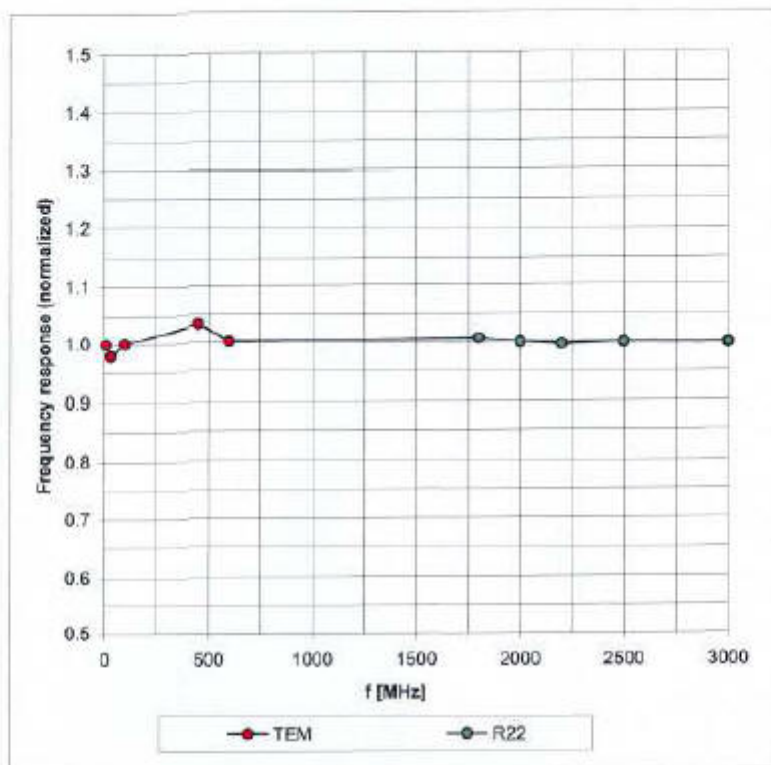


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

ES3DV3 SN:3109

November 12, 2007

Receiving Pattern (ϕ), $\theta = 0^\circ$

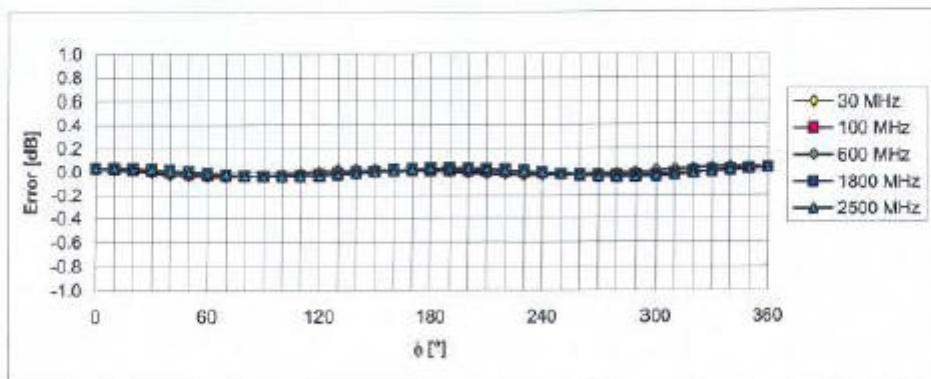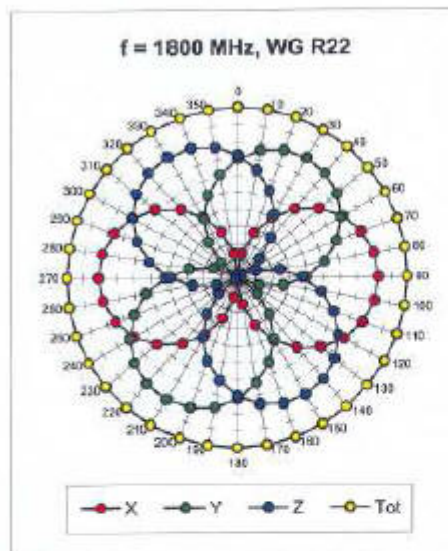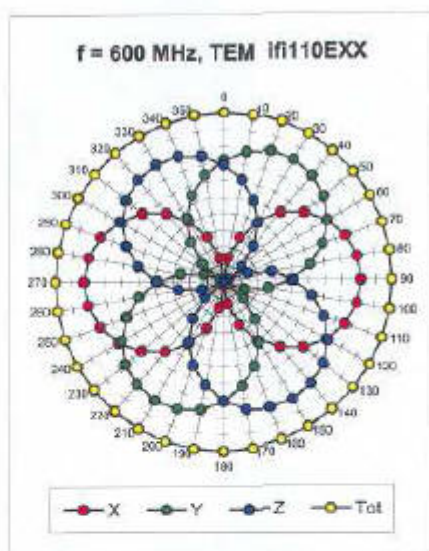

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)


Certificate No: ES3-3109_Nov07

Page 8 of 9

ES3DV3 SN:3109

November 12, 2007

Dynamic Range $f(\text{SAR}_{\text{head}})$ (Waveguide R22, $f = 1800 \text{ MHz}$)

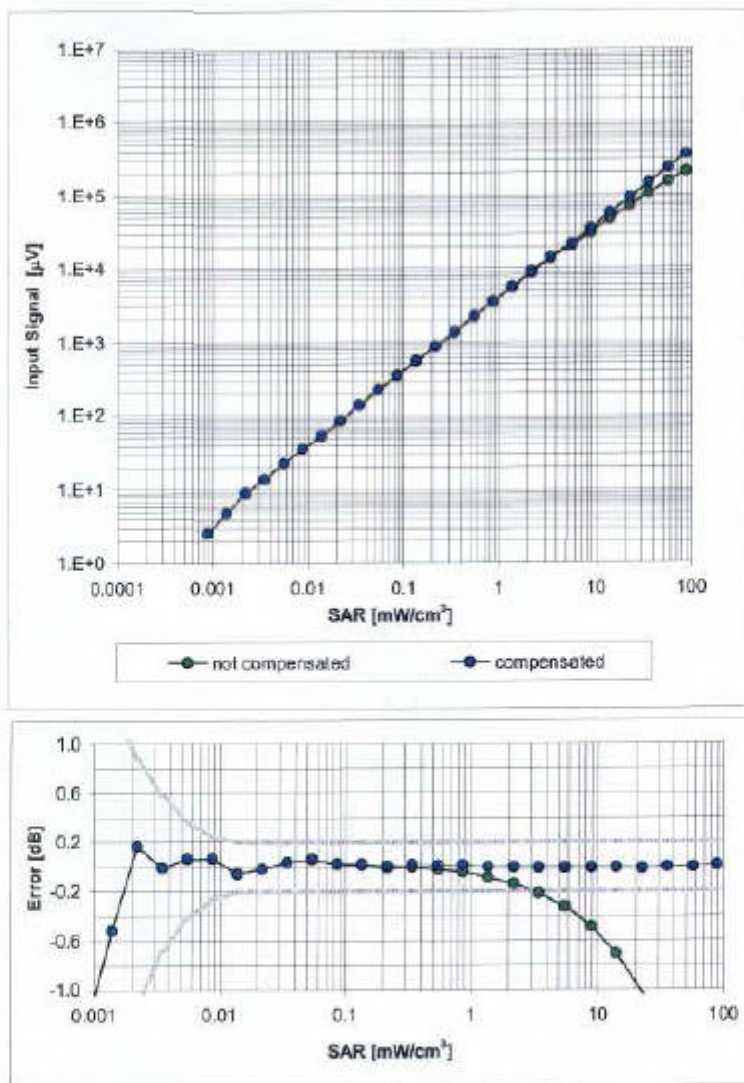

Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Certificate No: ES3-3109_Nov07



Page 7 of 9



ES3DV3 SN:3109

November 12, 2007

Conversion Factor Assessment

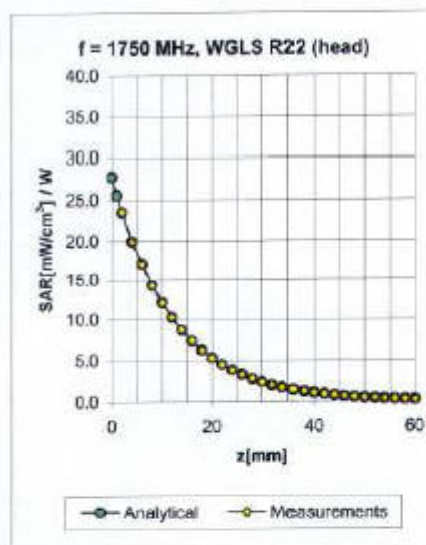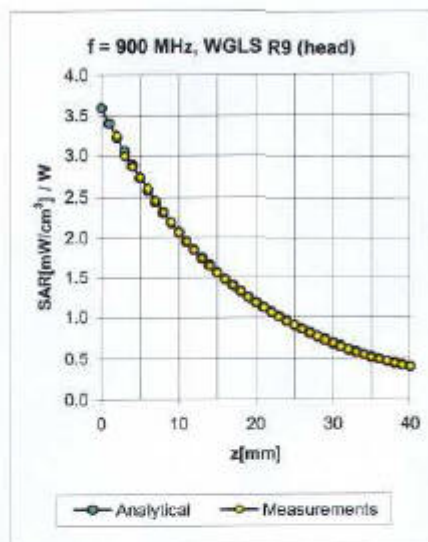

f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
835	± 50 / ± 100	Head	41.5 ± 5%	0.90 ± 5%	0.87	1.22	6.02 ± 11.0% (k=2)
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.85	1.23	5.98 ± 11.0% (k=2)
1750	± 50 / ± 100	Head	40.1 ± 5%	1.37 ± 5%	0.92	1.18	4.84 ± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.85	1.26	4.63 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.96	1.13	4.33 ± 11.8% (k=2)
835	± 50 / ± 100	Body	55.2 ± 5%	0.97 ± 5%	0.90	1.26	5.82 ± 11.0% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.85	1.32	5.55 ± 11.0% (k=2)
1750	± 50 / ± 100	Body	53.4 ± 5%	1.49 ± 5%	0.76	1.40	4.68 ± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.75	1.40	4.41 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.80	1.08	3.97 ± 11.8% (k=2)


^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

ES3DV3 SN:3109

November 12, 2007

Deviation from Isotropy in HSL

Error (ϕ , θ), $f = 900$ MHz

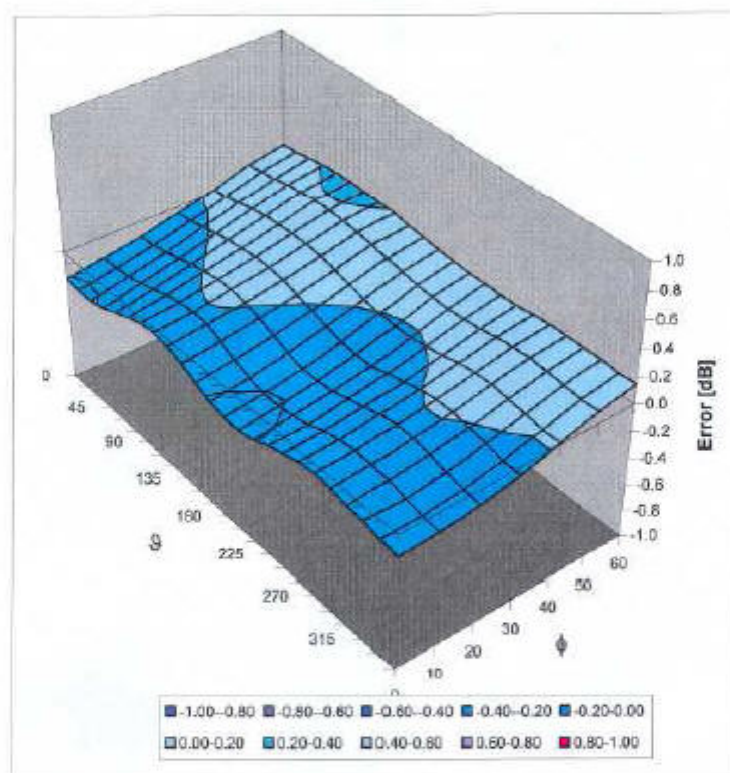

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

ANNEX D Deviations from Prescribed Test Methods

No deviation from Prescribed Test Methods.

———— The End of this Report ————

CTL Test Report