

# FCC Radio Test Report


**FCC ID: RWO-RZ150129**

This report concerns (check one): Original Grant Class II Change

**Project No.** : 1411C110  
**Equipment** : Wireless SmartBand  
**Model Name** : RZ15-0129  
**Applicant** : Razer Inc.  
**Address** : 2035 Corte Del Nogal, Suite 101. Carlsbad California 92011. USA

**Date of Receipt** : Nov. 12, 2014  
**Date of Test** : Nov. 12, 2014~ Nov. 21, 2014  
**Issued Date** : Nov. 24, 2014  
**Tested by** : BTL Inc.

**Testing Engineer** :   
(David Mao)

**Technical Manager** :   
(Leo Hung)

**Authorized Signatory** :   
(Steven Lu)

**B T L I N C .**

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

## **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C**, or National Institute of Standards and Technology (**NIST**) of **U.S.A**.

**BTL**'s reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL**'s reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

**BTL**'s laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

## **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

| Table of Contents   | Page      |
|---|-----------|
| <b>1 . CERTIFICATION</b>  | <b>6</b>  |
| <b>2 . SUMMARY OF TEST RESULTS</b>                                  | <b>7</b>  |
| <b>2.1 TEST FACILITY</b>  | <b>8</b>  |
| <b>2.2 MEASUREMENT UNCERTAINTY</b>                                  | <b>8</b>  |
| <b>3 . GENERAL INFORMATION</b>                                      | <b>9</b>  |
| <b>3.1 GENERAL DESCRIPTION OF EUT</b>                               | <b>9</b>  |
| <b>3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED</b> | <b>11</b> |
| <b>3.5 DESCRIPTION OF SUPPORT UNITS</b>                             | <b>11</b> |
| <b>4 . EMC EMISSION TEST</b>  | <b>12</b> |
| <b>4.1 CONDUCTED EMISSION MEASUREMENT</b>                           | <b>12</b> |
| <b>4.1.1 POWER LINE CONDUCTED EMISSION LIMITS</b>                   | <b>12</b> |
| <b>4.1.2 TEST PROCEDURE</b>   | <b>12</b> |
| <b>4.1.3 DEVIATION FROM TEST STANDARD</b>                           | <b>12</b> |
| <b>4.1.4 TEST SETUP</b>   | <b>13</b> |
| <b>4.1.5 EUT OPERATING CONDITIONS</b>                               | <b>13</b> |
| <b>4.1.6 EUT TEST CONDITIONS</b>                                    | <b>13</b> |
| <b>4.1.7 TEST RESULTS</b>   | <b>13</b> |
| <b>4.2 RADIATED EMISSION MEASUREMENT</b>                            | <b>14</b> |
| <b>4.2.1 RADIATED EMISSION LIMITS</b>                               | <b>14</b> |
| <b>4.2.2 TEST PROCEDURE</b>   | <b>15</b> |
| <b>4.2.3 DEVIATION FROM TEST STANDARD</b>                           | <b>15</b> |
| <b>4.2.4 TEST SETUP</b>   | <b>16</b> |
| <b>4.2.5 EUT OPERATING CONDITIONS</b>                               | <b>17</b> |
| <b>4.2.6 EUT TEST CONDITIONS</b>                                    | <b>17</b> |
| <b>4.2.7 TEST RESULTS (9KHZ TO 30MHZ)</b>                           | <b>17</b> |
| <b>4.2.8 TEST RESULTS (BETWEEN 30MHZ TO 1000 MHZ)</b>               | <b>18</b> |
| <b>4.2.9 TEST RESULTS (ABOVE 1000 MHZ)</b>                          | <b>18</b> |
| <b>5 . BANDWIDTH TEST</b>   | <b>19</b> |
| <b>5.1 APPLIED PROCEDURES / LIMIT</b>                               | <b>19</b> |
| <b>5.1.1 TEST PROCEDURE</b>   | <b>19</b> |
| <b>5.1.2 DEVIATION FROM STANDARD</b>                                | <b>19</b> |
| <b>5.1.3 TEST SETUP</b>   | <b>19</b> |
| <b>5.1.4 EUT OPERATION CONDITIONS</b>                               | <b>19</b> |
| <b>5.1.5 EUT TEST CONDITIONS</b>                                    | <b>19</b> |
| <b>5.1.6 TEST RESULTS</b>   | <b>19</b> |
| <b>6 . MAXIMUM OUTPUT POWER TEST</b>                                | <b>20</b> |
| <b>6.1 APPLIED PROCEDURES / LIMIT</b>                               | <b>20</b> |

| Table of Contents  | Page      |
|--|-----------|
| 6.1.1 TEST PROCEDURE   | 20        |
| 6.1.2 DEVIATION FROM STANDARD                                      | 20        |
| 6.1.3 TEST SETUP   | 20        |
| 6.1.4 EUT OPERATION CONDITIONS                                     | 20        |
| 6.1.5 EUT TEST CONDITIONS  | 20        |
| 6.1.6 TEST RESULTS   | 20        |
| <b>7 . ANTENNA CONDUCTED SPURIOUS EMISSION</b>                     | <b>21</b> |
| 7.1 APPLIED PROCEDURES / LIMIT                                     | 21        |
| 7.1.1 TEST PROCEDURE   | 21        |
| 7.1.2 DEVIATION FROM STANDARD                                      | 21        |
| 7.1.3 TEST SETUP   | 21        |
| 7.1.4 EUT OPERATION CONDITIONS                                     | 21        |
| 7.1.5 EUT OPERATION CONDITIONS                                     | 21        |
| 7.1.6 TEST RESULTS   | 21        |
| <b>8 . POWER SPECTRAL DENSITY TEST</b>                             | <b>22</b> |
| 8.1 APPLIED PROCEDURES / LIMIT                                     | 22        |
| 8.1.1 TEST PROCEDURE   | 22        |
| 8.1.2 DEVIATION FROM STANDARD                                      | 22        |
| 8.1.3 TEST SETUP   | 22        |
| 8.1.4 EUT OPERATION CONDITIONS                                     | 22        |
| 8.1.5 EUT TEST CONDITIONS  | 22        |
| 8.1.6 TEST RESULTS   | 22        |
| <b>9 . MEASUREMENT INSTRUMENTS LIST</b>                            | <b>23</b> |
| <b>ATTACHMENT A - CONDUCTED EMISSION</b>                           | <b>25</b> |
| <b>ATTACHMENT B - RADIATED EMISSION (9KHZ-30MHZ)</b>               | <b>28</b> |
| <b>ATTACHMENT C - RADIATED EMISSION BETWEEN 30MHZ AND 1000MHZ)</b> | <b>30</b> |
| <b>ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)</b>            | <b>37</b> |
| <b>ATTACHMENT E - BANDWIDTH</b>                                    | <b>50</b> |
| <b>ATTACHMENT F - MAXIMUM OUTPUT POWER TEST</b>                    | <b>53</b> |
| <b>ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION</b>          | <b>55</b> |
| <b>ATTACHMENT H - POWER SPECTRAL DENSITY TEST</b>                  | <b>59</b> |

## REPORT ISSUED HISTORY

| Issued No.          | Description     | Issued Date   |
|---------------------|-----------------|---------------|
| BTL-FCCP-1-1411C110 | Original Issue. | Nov. 24, 2014 |

## 1. CERTIFICATION

Equipment : Wireless SmartBand  
Brand Name : RAZER  
Model Name : RZ15-0129  
Applicant : Razer Inc.  
Manufacturer : Razer (Asia-Pacific) Pte Ltd  
Address : 514 Chai Chee Lane #07-01 ~ 06 Singapore 469029  
Date of Test : Nov. 12, 2014~ Nov. 21, 2014  
Test Sample : ENGINEERING SAMPLE  
Standard(s) : FCC Part15, Subpart C :2013 (15.247) / ANSI C63.4-2009

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1411C110) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

| <b>Applied Standard(s): FCC Part15 (15.247) , Subpart C</b> |               |                                     |          |        |
|---|---------------|-------------------------------------|----------|--------|
| Standard(s)   | Section       | Test Item                           | Judgment | Remark |
|   | 15.207        | Conducted Emission                  | PASS     |        |
|   | 15.247(d)     | Antenna conducted Spurious Emission | PASS     |        |
|   | 15.247(a)(2)  | 6dB Bandwidth                       | PASS     |        |
|   | 15.247(b)(3)  | Peak Output Power                   | PASS     |        |
|   | 15.247(e)     | Power Spectral Density              | PASS     |        |
|   | 15.203        | Antenna Requirement                 | PASS     |        |
|   | 15.209/15.205 | Transmitter Radiated Emissions      | PASS     |        |

NOTE:

- (1)" N/A" denotes test is not applicable to this device.
- (2) The test follows FCC KDB Publication No. 558074 D01 DTS Meas Guidance v03r02 (Measurement Guidelines of DTS)

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **DG-C02/DG-CB03** at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.523792  
BTL's test firm number for FCC: 319330

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2**, providing a level of confidence of approximately **95 %**.

### A. Conducted Measurement :

| Test Site | Method | Measurement Frequency Range | U,(dB) | Note |
|-----------|--------|-----------------------------|--------|------|
| DG-C02    | CISPR  | 150 KHz ~ 30MHz             | 1.94   |      |

### B. Radiated Measurement :

| Test Site | Method | Measurement Frequency Range | Ant. H / V | U,(dB) | Note |
|-----------|--------|-----------------------------|------------|--------|------|
| DG-CB03   | CISPR  | 9KHz~30MHz                  | V          | 3.79   |      |
|           |        | 9KHz~30MHz                  | H          | 3.57   |      |
|           |        | 30MHz ~ 200MHz              | V          | 3.82   |      |
|           |        | 30MHz ~ 200MHz              | H          | 3.60   |      |
|           |        | 200MHz ~ 1,000MHz           | V          | 3.86   |      |
|           |        | 200MHz ~ 1,000MHz           | H          | 3.94   |      |
|           |        | 1GHz~18GHz                  | V          | 3.12   |      |
|           |        | 1GHz~18GHz                  | H          | 3.68   |      |
|           |        | 18GHz~40GHz                 | V          | 4.15   |      |
|           |        | 18GHz~40GHz                 | H          | 4.14   |      |

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|                     |   |                   |
|---------------------|---|-------------------|
| Equipment           | Wireless SmartBand  |                   |
| Brand Name          | RAZER   |                   |
| Model Name          | RZ15-0129   |                   |
| Model Difference    | N/A   |                   |
| Product Description | Operation Frequency   | 2402~2480 MHz     |
|                     | Modulation Technology   | GFSK(1Mbps)       |
|                     | Bit Rate of Transmitter   |                   |
|                     | Output Power (Max.)   | -0.09 dBm (1Mbps) |
| Power Source        | #1 Supplied from USB Port<br>#2 Battery Supplied.<br>Model: 36082 |                   |
| Power Rating        | #1 DC 5V<br>#2 DC 5V 40mA   |                   |

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.


2.

| Channel List |                 |         |                 |
|--------------|-----------------|---------|-----------------|
| Channel      | Frequency (MHz) | Channel | Frequency (MHz) |
| 00           | 2402            | 20      | 2442            |
| 01           | 2404            | 21      | 2444            |
| 02           | 2406            | 22      | 2446            |
| 03           | 2408            | 23      | 2448            |
| 04           | 2410            | 24      | 2450            |
| 05           | 2412            | 25      | 2452            |
| 06           | 2414            | 26      | 2454            |
| 07           | 2416            | 27      | 2456            |
| 08           | 2418            | 28      | 2458            |
| 09           | 2420            | 29      | 2460            |
| 10           | 2422            | 30      | 2462            |
| 11           | 2424            | 31      | 2464            |
| 12           | 2426            | 32      | 2466            |
| 13           | 2428            | 33      | 2468            |
| 14           | 2430            | 34      | 2470            |
| 15           | 2432            | 35      | 2472            |
| 16           | 2434            | 36      | 2474            |
| 17           | 2436            | 37      | 2476            |
| 18           | 2438            | 38      | 2478            |
| 19           | 2440            | 39      | 2480            |

3.

| Ant. | Brand | Model Name              | Antenna Type | Connector | Gain (dBi) |
|------|-------|-------------------------|--------------|-----------|------------|
| 1    | TDK   | ANT016008LCS2442<br>MA2 | Internal     | N/A       | 2.50       |

### 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

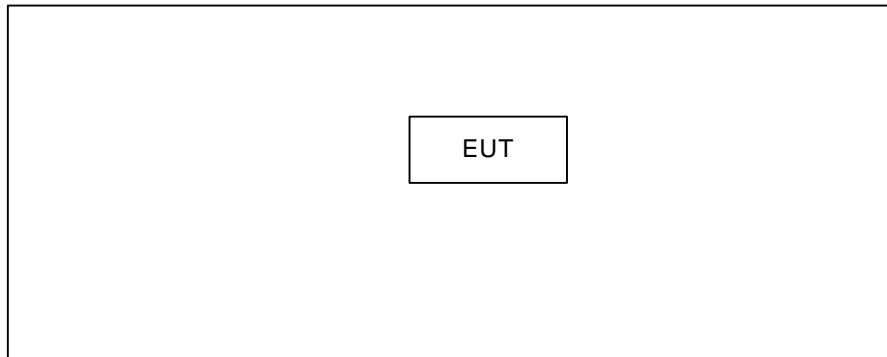

### 3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment | Mfr/Brand | Model/Type No. | FCC ID/IC | Series No. | Note |
|------|-----------|-----------|----------------|-----------|------------|------|
| -    | -         | -         | -              | -         | -          | -    |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|------|
| -    | -             | -            | -      | -    |

Note:

(1) For detachable type I/O cable should be specified the length in m in 『Length』 column.

## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

| Frequency of Emission (MHz) | Conducted Limit (dB $\mu$ V) |           |
|-----------------------------|------------------------------|-----------|
|                             | Quasi-peak                   | Average   |
| 0.15 -0.5                   | 66 to 56*                    | 56 to 46* |
| 0.50 -5.0                   | 56                           | 46        |
| 5.0 -30.0                   | 60                           | 50        |

Note:

(1) The limit of " \* " decreases with the logarithm of the frequency

The following table is the setting of the receiver

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |


#### 4.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.4 TEST SETUP

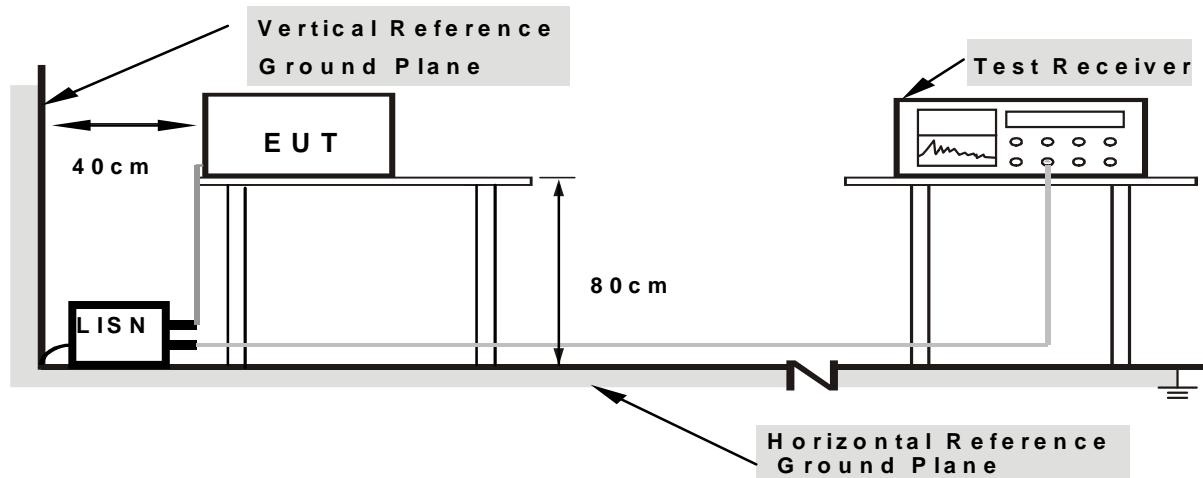

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

#### 4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

#### 4.1.6 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: DC 5V

#### 4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of <sup>†</sup>Note. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “\*” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.
- (3) “N/A” denotes test is not applicable to this device.

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9KHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009~0.490       | 2400/F(KHz)                       | 300                           |
| 0.490~1.705       | 24000/F(KHz)                      | 30                            |
| 1.705~30.0        | 30                                | 30                            |
| 30~88             | 100                               | 3                             |
| 88~216            | 150                               | 3                             |
| 216~960           | 200                               | 3                             |
| 960~1000          | 500                               | 3                             |

Section 15.33 Frequency range of radiated measurements.

Unless otherwise noted in the specific rule section under which the equipment operates for an intentional radiator the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

| Spectrum Parameter                         | Setting  |
|--|--|
| Attenuation                                | Auto   |
| Start Frequency                            | 1000 MHz                                       |
| Stop Frequency                             | 10th carrier harmonic                          |
| RBW / VBW<br>(Emission in restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter     | Setting                           |
|------------------------|-----------------------------------|
| Attenuation            | Auto                              |
| Start ~ Stop Frequency | 9kHz~90kHz for PK/AVG detector    |
| Start ~ Stop Frequency | 90kHz~110kHz for QP detector      |
| Start ~ Stop Frequency | 110kHz~490kHz for PK/AVG detector |
| Start ~ Stop Frequency | 490kHz~30MHz for QP detector      |
| Start ~ Stop Frequency | 30MHz~1000MHz for QP detector     |

#### 4.2.2 TEST PROCEDURE


- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.2.3 DEVIATION FROM TEST STANDARD


No deviation

#### 4.2.4 TEST SETUP


##### (A) Radiated Emission Test Set-Up Frequency Below 1 GHz

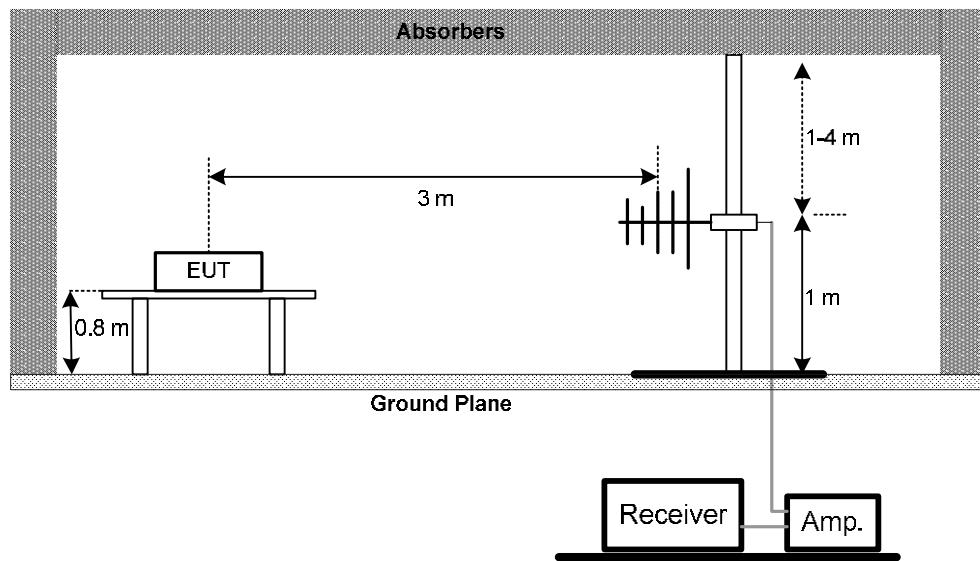

##### (B) Radiated Emission Test Set-Up Frequency Above 1 GHz

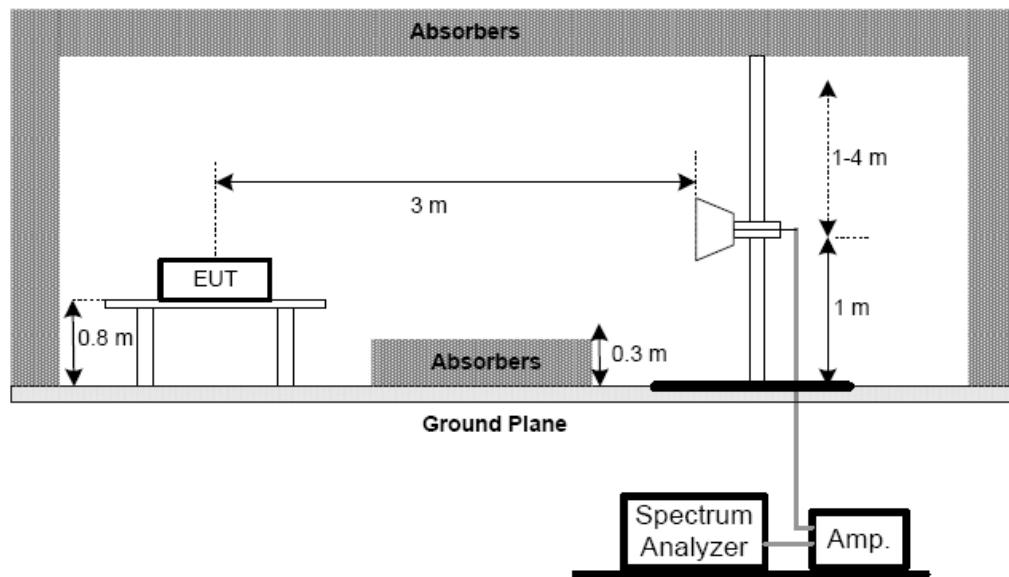

(C) For radiated emissions below 30MHz

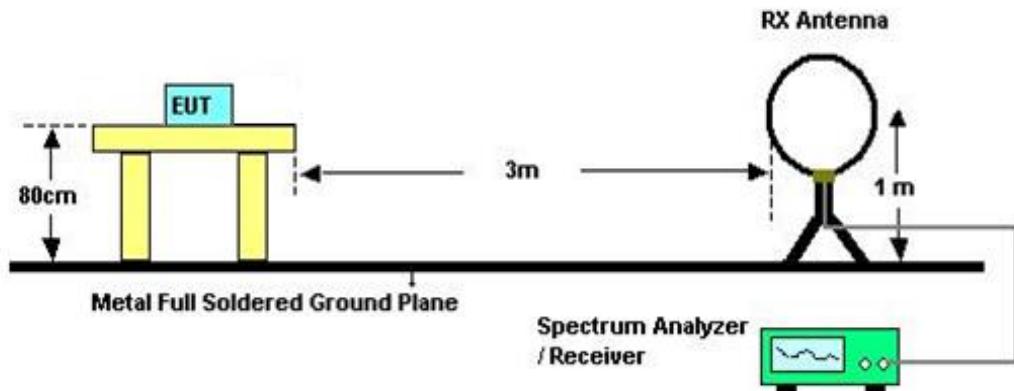

#### 4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **4.1.5 Unless** otherwise a special operating condition is specified in the follows during the testing.

#### 4.2.6 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

**Test Voltage:** DC 5V

#### 4.2.7 TEST RESULTS (9KHZ TO 30MHZ)

**Please refer to the Attachment B**

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

#### **4.2.8 TEST RESULTS (BETWEEN 30MHZ TO 1000 MHZ)**

**Please refer to the Attachment C.**

Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

#### **4.2.9 TEST RESULTS (ABOVE 1000 MHZ)**

**Please refer to the Attachment D.**

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission
- (3) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (4) EUT Orthogonal Axis:  
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (5) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (6) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

## 5. BANDWIDTH TEST

### 5.1 Applied procedures / limit

| FCC Part15 (15.247) , Subpart C |           |                              |                       |        |
|---------------------------------|-----------|------------------------------|-----------------------|--------|
| Section                         | Test Item | Limit                        | Frequency Range (MHz) | Result |
| 15.247(a)(2)                    | Bandwidth | >= 500KHz<br>(6dB bandwidth) | 2400-2483.5           | PASS   |


#### 5.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

#### 5.1.2 DEVIATION FROM STANDARD

No deviation.

#### 5.1.3 TEST SETUP

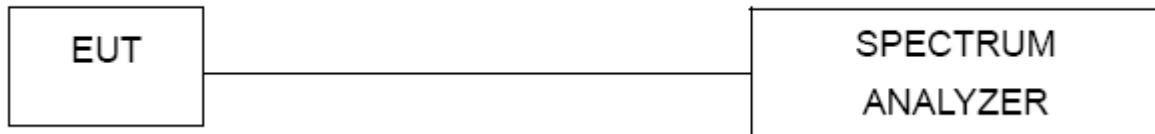

#### 5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 5.1.5 EUT TEST CONDITIONS

Temperature: 25°C  
 Relative Humidity: 55%  
 Test Voltage: DC 5V

#### 5.1.6 TEST RESULTS

Please refer to the Attachment E.

## 6. MAXIMUM OUTPUT POWER TEST

### 6.1 Applied procedures / limit

| FCC Part15 (15.247) , Subpart C |                      |                 |                       |        |
|---------------------------------|----------------------|-----------------|-----------------------|--------|
| Section                         | Test Item            | Limit           | Frequency Range (MHz) | Result |
| 15.247(b)(3)                    | Maximum Output Power | 1 watt or 30dBm | 2400-2483.5           | PASS   |


#### 6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- b. The maximum peak conducted output power was performed in accordance with method 9.1.2 of FCC KDB 558074 D01 DTS Meas Guidance v03r02.

#### 6.1.2 DEVIATION FROM STANDARD

No deviation.

#### 6.1.3 TEST SETUP

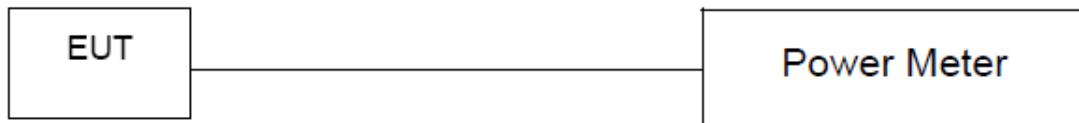

#### 6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

Transmit output power was measured while the host equipment supply voltage was varied from 85 % to 115 % of the nominal rated supply voltage. No change in transmit output power was observed.

#### 6.1.5 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: DC 5V

#### 6.1.6 TEST RESULTS

Please refer to the Attachment F.

## 7. ANTENNA CONDUCTED SPURIOUS EMISSION

### 7.1 Applied procedures / limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


#### 7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = 10 ms.

#### 7.1.2 DEVIATION FROM STANDARD

No deviation.

#### 7.1.3 TEST SETUP

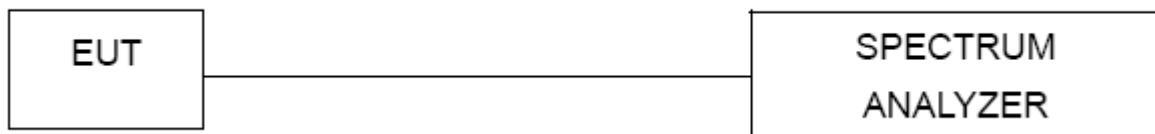

#### 7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 7.1.5 EUT OPERATION CONDITIONS

Temperature: 25°C  
Relative Humidity: 55%  
Test Voltage: DC 5V

#### 7.1.6 TEST RESULTS

Please refer to the Attachment G.

## 8. POWER SPECTRAL DENSITY TEST

### 8.1 Applied procedures / limit

| FCC Part15 (15.247) , Subpart C |                        |                        |                       |        |
|---------------------------------|------------------------|------------------------|-----------------------|--------|
| Section                         | Test Item              | Limit                  | Frequency Range (MHz) | Result |
| 15.247(e)                       | Power Spectral Density | 8 dBm<br>(in any 3KHz) | 2400-2483.5           | PASS   |

#### 8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW=3KHz, VBW=10 KHz, Sweep time = auto.

#### 8.1.2 DEVIATION FROM STANDARD

No deviation.

#### 8.1.3 TEST SETUP



#### 8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 8.1.5 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: DC 5V

#### 8.1.6 TEST RESULTS

Please refer to the Attachment H.

## 9. MEASUREMENT INSTRUMENTS LIST

### Conducted Emission Measurement

| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
|------|-------------------|--------------|----------|------------|------------------|
| 1    | LISN              | EMCO         | 3816/2   | 00052765   | Mar. 29, 2015    |
| 2    | LISN              | R&S          | ENV216   | 101447     | Mar. 29, 2015    |
| 3    | Test Cable        | N/A          | C_17     | N/A        | Mar. 14, 2015    |
| 4    | EMI TEST RECEIVER | R&S          | ESCS30   | 833364/017 | Mar. 29, 2015    |
| 5    | 50Ω Terminator    | SHX          | TF2-3G-A | 08122902   | Mar. 29, 2015    |

### Radiated Emission Measurement

| Item | Kind of Equipment       | Manufacturer | Type No.  | Serial No. | Calibrated until |
|------|-------------------------|--------------|-----------|------------|------------------|
| 1    | Antenna                 | Schwarbeck   | VULB9160  | 9160-3232  | Mar. 29, 2015    |
| 2    | Amplifier               | HP           | 8447D     | 2944A09673 | Mar. 29, 2015    |
| 3    | Test Receiver           | R&S          | ESCI      | 100382     | Mar. 29, 2015    |
| 4    | Test Cable              | N/A          | C-01_CB03 | N/A        | Jul. 01, 2015    |
| 5    | Antenna                 | ETS          | 3115      | 00075789   | Mar. 29, 2015    |
| 6    | Amplifier               | Agilent      | 8449B     | 3008A02274 | Mar. 29, 2015    |
| 7    | Spectrum                | Agilent      | E4408B    | US39240143 | Nov. 02, 2015    |
| 8    | Test Cable              | HUBER+SUHNER | C-45      | N/A        | Mar. 29, 2015    |
| 9    | Controller              | CT           | SC100     | N/A        | N/A              |
| 10   | Horn Antenna            | EMCO         | 3115      | 9605-4803  | Mar. 29, 2015    |
| 11   | Active Loop Antenna     | R&S          | HFH2-Z2   | 830749/020 | Mar. 29, 2015    |
| 12   | Broad-Band Horn Antenna | Schwarzbeck  | BBHA 9170 | 9170319    | Feb. 22, 2015    |

### 6dB Bandwidth Measurement

| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
|------|-------------------|--------------|----------|------------|------------------|
| 1    | Spectrum Analyzer | R&S          | FSP 40   | 100185     | Nov. 02, 2015    |

| <b>Peak Output Power Measurement</b> |                    |              |          |            |                  |
|--------------------------------------|--------------------|--------------|----------|------------|------------------|
| Item                                 | Kind of Equipment  | Manufacturer | Type No. | Serial No. | Calibrated until |
| 1                                    | power Meter        | ANRITSU      | ML2495A  | 1128009    | May. 29, 2015    |
| 2                                    | Pulse Power Sensor | ANRITSU      | MA 2411B | 1027500    | May. 29, 2015    |

| <b>Antenna Conducted Spurious Emission Measurement</b> |                   |              |          |            |                  |
|--|-------------------|--------------|----------|------------|------------------|
| Item   | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
| 1  | Spectrum Analyzer | R&S          | FSP 40   | 100185     | Nov. 02, 2015    |


| <b>Power Spectral Density Measurement</b> |                   |              |          |            |                  |
|---|-------------------|--------------|----------|------------|------------------|
| Item                                      | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
| 1   | Spectrum Analyzer | R&S          | FSP 40   | 100185     | Nov. 02, 2015    |

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.


## ATTACHMENT A - CONDUCTED EMISSION

Test Mode: TX Mode

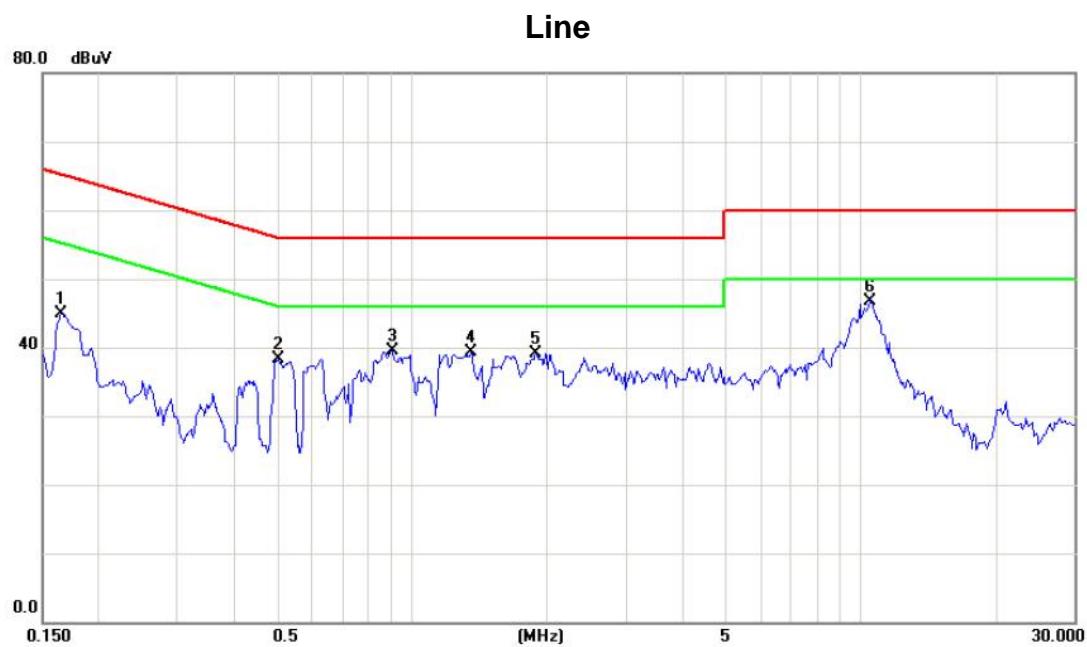

| No. | Mk. | Freq.   | Reading | Correct | Measure- | Limit | Over   | Detector | Comment |
|-----|-----|---------|---------|---------|----------|-------|--------|----------|---------|
|     |     |         | Level   | Factor  | ment     |       |        |          |         |
| 1   |     | 0.1655  | 35.37   | 9.63    | 45.00    | 65.18 | -20.18 | peak     |         |
| 2   |     | 0.5053  | 28.70   | 9.70    | 38.40    | 56.00 | -17.60 | peak     |         |
| 3   |     | 0.9040  | 29.85   | 9.74    | 39.59    | 56.00 | -16.41 | peak     |         |
| 4   |     | 1.3570  | 29.54   | 9.78    | 39.32    | 56.00 | -16.68 | peak     |         |
| 5   |     | 1.8882  | 29.29   | 9.83    | 39.12    | 56.00 | -16.88 | peak     |         |
| 6   | *   | 10.5625 | 36.51   | 10.10   | 46.61    | 60.00 | -13.39 | peak     |         |

Test Mode: TX Mode

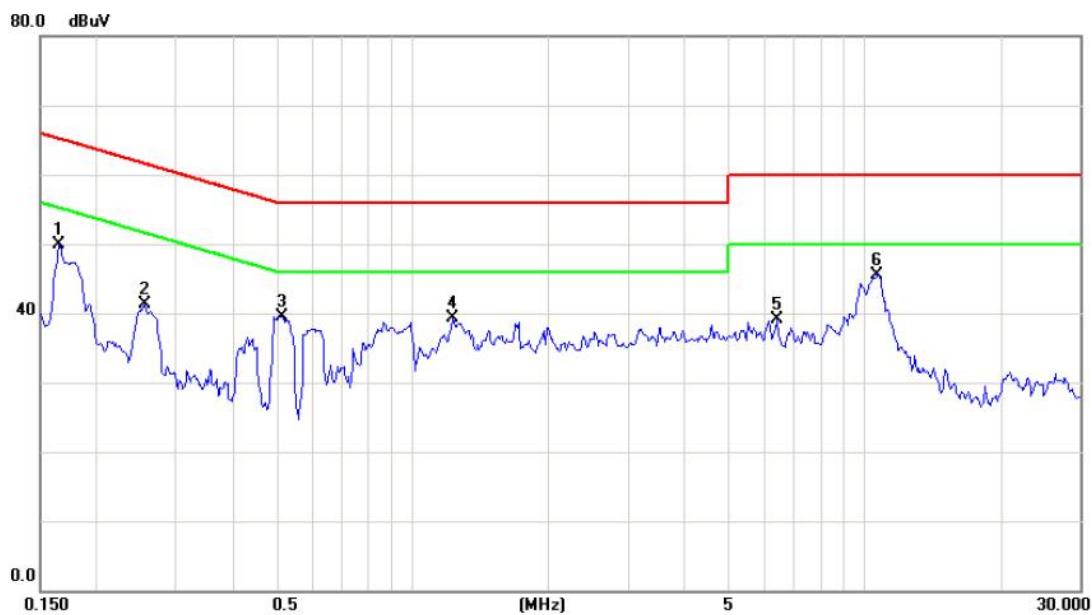**Neutral**

| No. | Mk. | Freq.   | Reading | Correct | Measure- | Limit | Over   |      |          |
|-----|-----|---------|---------|---------|----------|-------|--------|------|----------|
|     |     |         | Level   | Factor  | ment     |       | dB     | dBuV | Detector |
|     |     | MHz     | dBuV    |         |          |       |        |      |          |
| 1   |     | 0.1655  | 40.14   | 9.70    | 49.84    | 65.18 | -15.34 |      | peak     |
| 2   |     | 0.2553  | 31.52   | 9.72    | 41.24    | 61.58 | -20.34 |      | peak     |
| 3   |     | 0.5171  | 29.82   | 9.74    | 39.56    | 56.00 | -16.44 |      | peak     |
| 4   |     | 1.2280  | 29.58   | 9.79    | 39.37    | 56.00 | -16.63 |      | peak     |
| 5   |     | 6.4062  | 29.18   | 10.00   | 39.18    | 60.00 | -20.82 |      | peak     |
| 6   | *   | 10.6913 | 35.34   | 10.22   | 45.56    | 60.00 | -14.44 |      | peak     |

## ATTACHMENT B - RADIATED EMISSION (9KHZ-30MHZ)


|            |         |
|------------|---------|
| Test Mode: | TX Mode |
|------------|---------|

| Freq.<br>(MHz) | Ant.<br>0°/90° | Reading(RA)<br>(dBuV) | Corr.Factor(CF)<br>(dB) | Measured(FS)<br>(dBuV/m) | Limits(QP)<br>(dBuV/m) | Margin<br>(dB) | Note |
|----------------|----------------|-----------------------|-------------------------|--------------------------|------------------------|----------------|------|
| 0.0149         | 0°             | 13.42                 | 24.62                   | 38.04                    | 104.14                 | -66.10         | AVG  |
| 0.0149         | 0°             | 14.47                 | 24.62                   | 39.09                    | 124.14                 | -85.05         | PEAK |
| 0.0342         | 0°             | 6.75                  | 23.40                   | 30.15                    | 96.92                  | -66.77         | AVG  |
| 0.0342         | 0°             | 7.38                  | 23.40                   | 30.78                    | 116.92                 | -86.14         | PEAK |
| 0.0382         | 0°             | 3.49                  | 23.15                   | 26.64                    | 95.96                  | -69.33         | AVG  |
| 0.0382         | 0°             | 5.31                  | 23.15                   | 28.46                    | 115.96                 | -87.51         | PEAK |
| 0.0467         | 0°             | 0.86                  | 22.61                   | 23.47                    | 94.22                  | -70.75         | AVG  |
| 0.0467         | 0°             | 2.92                  | 22.61                   | 25.53                    | 114.22                 | -88.69         | PEAK |
| 2.0641         | 0°             | 30.85                 | 19.46                   | 50.31                    | 69.54                  | -19.23         | QP   |
| 3.3659         | 0°             | 21.61                 | 18.94                   | 40.55                    | 69.54                  | -28.99         | QP   |

| Freq.<br>(MHz) | Ant.<br>0°/90° | Reading(RA)<br>(dBuV) | Corr.Factor(CF)<br>(dB) | Measured(FS)<br>(dBuV/m) | Limits(QP)<br>(dBuV/m) | Margin<br>(dB) | Note |
|----------------|----------------|-----------------------|-------------------------|--------------------------|------------------------|----------------|------|
| 0.0146         | 90°            | 13.29                 | 24.30                   | 37.59                    | 124.32                 | -86.73         | AVG  |
| 0.0146         | 90°            | 14.41                 | 24.30                   | 38.71                    | 144.32                 | -105.61        | PEAK |
| 0.0339         | 90°            | 6.38                  | 23.42                   | 29.80                    | 117.00                 | -87.20         | AVG  |
| 0.0339         | 90°            | 8.61                  | 23.42                   | 32.03                    | 137.00                 | -104.97        | PEAK |
| 0.0371         | 90°            | 3.49                  | 23.22                   | 26.71                    | 116.22                 | -89.51         | AVG  |
| 0.0371         | 90°            | 5.33                  | 23.22                   | 28.55                    | 136.22                 | -107.67        | PEAK |
| 0.0687         | 90°            | 0.67                  | 22.03                   | 22.70                    | 110.87                 | -88.17         | AVG  |
| 0.0687         | 90°            | 2.92                  | 22.03                   | 24.95                    | 130.87                 | -105.92        | PEAK |
| 2.0562         | 90°            | 30.84                 | 19.47                   | 50.31                    | 69.54                  | -19.23         | QP   |

**ATTACHMENT C - RADIATED EMISSION BETWEEN 30MHZ AND  
1000MHZ)**

Test Mode: TX 2402MHz -CH00 -1Mbps

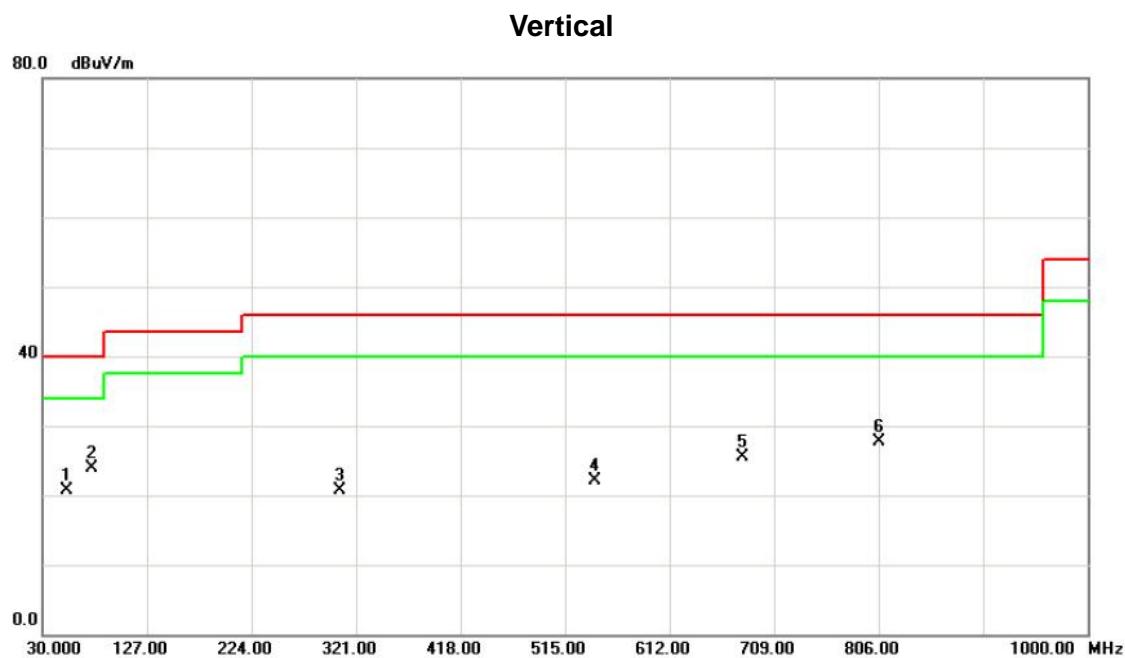

| No. | Mk. | Freq.    | Reading | Correct Factor | Measure- | Limit | Over   | Detector | Comment |
|-----|-----|----------|---------|----------------|----------|-------|--------|----------|---------|
|     |     |          | Level   |                | mHz      | dBuV  | dB     | dBuV/m   | dB      |
| 1   |     | 52.3100  | 34.77   | -14.05         | 20.72    | 40.00 | -19.28 | peak     |         |
| 2   | *   | 75.5900  | 40.48   | -16.67         | 23.81    | 40.00 | -16.19 | peak     |         |
| 3   |     | 306.4500 | 31.79   | -11.09         | 20.70    | 46.00 | -25.30 | peak     |         |
| 4   |     | 543.1300 | 30.32   | -8.29          | 22.03    | 46.00 | -23.97 | peak     |         |
| 5   |     | 679.9000 | 30.51   | -5.02          | 25.49    | 46.00 | -20.51 | peak     |         |
| 6   |     | 806.0000 | 30.72   | -2.92          | 27.80    | 46.00 | -18.20 | peak     |         |


Test Mode: TX 2402MHz -CH00 -1Mbps

### Horizontal




| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Over   | Detector | Comment |
|-----|-----|----------|---------|---------|----------|--------|--------|----------|---------|
|     |     |          | Level   | Factor  | ment     |        |        |          |         |
|     |     | MHz      | dBuV    | dB      | dBuV/m   | dBuV/m | dB     |          |         |
| 1   |     | 79.4700  | 35.20   | -17.09  | 18.11    | 40.00  | -21.89 | peak     |         |
| 2   |     | 297.7200 | 28.61   | -11.03  | 17.58    | 46.00  | -28.42 | peak     |         |
| 3   |     | 453.8900 | 29.24   | -8.76   | 20.48    | 46.00  | -25.52 | peak     |         |
| 4   |     | 567.3800 | 29.48   | -7.92   | 21.56    | 46.00  | -24.44 | peak     |         |
| 5   |     | 684.7500 | 29.92   | -5.00   | 24.92    | 46.00  | -21.08 | peak     |         |
| 6   | *   | 794.3600 | 30.79   | -3.08   | 27.71    | 46.00  | -18.29 | peak     |         |

Test Mode: TX 2440MHz -CH19 -1Mbps

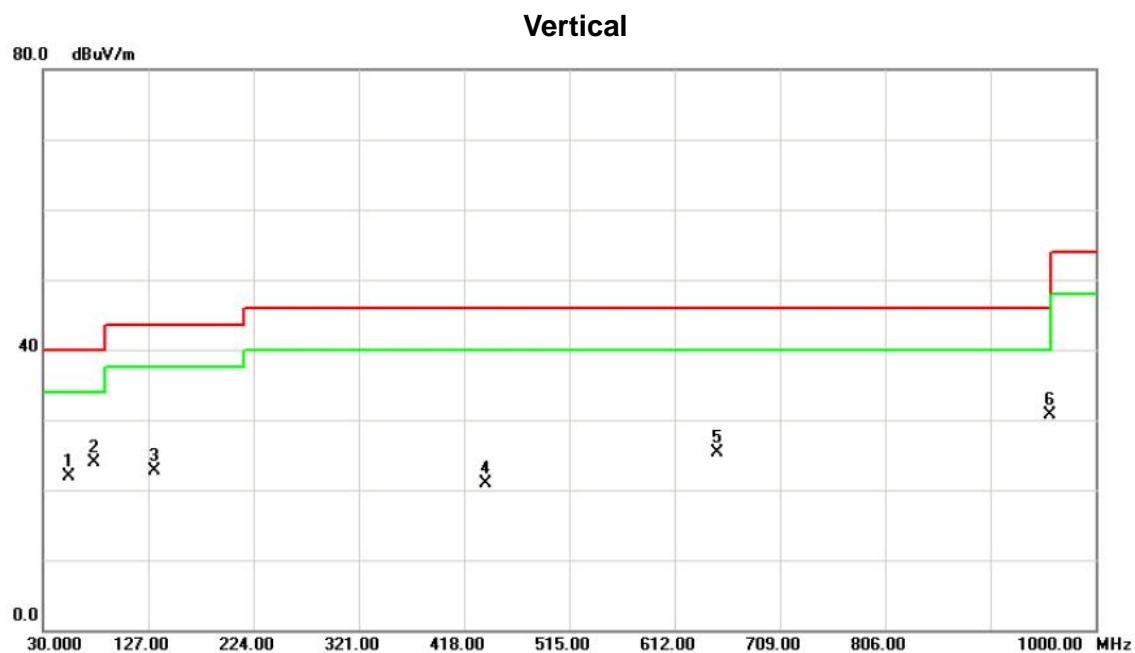

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|---------|
| 1   |     | 54.2500      | 36.29                    | -14.31                  | 21.98                      | 40.00           | -18.02     | peak     |         |
| 2   |     | 76.5600      | 40.78                    | -16.78                  | 24.00                      | 40.00           | -16.00     | peak     |         |
| 3   |     | 132.8200     | 35.79                    | -13.09                  | 22.70                      | 43.50           | -20.80     | peak     |         |
| 4   |     | 437.4000     | 29.82                    | -8.84                   | 20.98                      | 46.00           | -25.02     | peak     |         |
| 5   |     | 651.7700     | 30.41                    | -5.15                   | 25.26                      | 46.00           | -20.74     | peak     |         |
| 6   | *   | 957.3200     | 30.93                    | -0.24                   | 30.69                      | 46.00           | -15.31     | peak     |         |

Test Mode: TX 2440MHz -CH19 -1Mbps

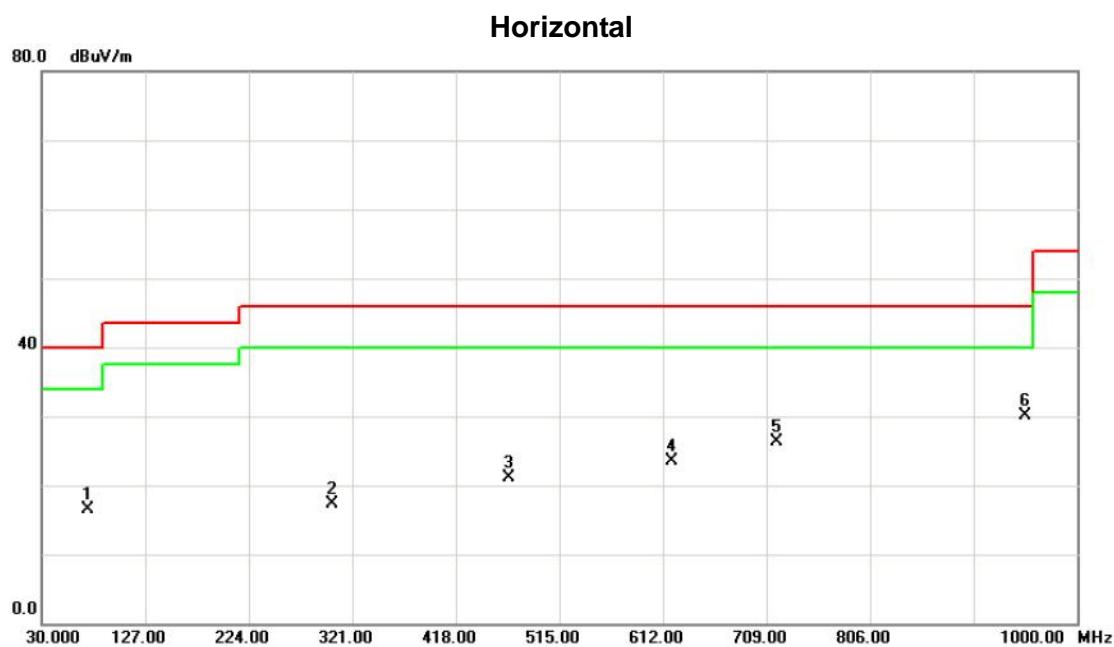

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Over   | Detector | Comment |
|-----|-----|----------|---------|---------|----------|--------|--------|----------|---------|
|     |     |          | Level   | Factor  | ment     |        |        |          |         |
|     |     |          | MHz     | dBuV    | dB       | dBuV/m | dBuV/m | dB       |         |
| 1   |     | 73.6500  | 32.93   | -16.50  | 16.43    | 40.00  | -23.57 | peak     |         |
| 2   |     | 302.5700 | 28.35   | -11.03  | 17.32    | 46.00  | -28.68 | peak     |         |
| 3   |     | 467.4700 | 30.45   | -9.28   | 21.17    | 46.00  | -24.83 | peak     |         |
| 4   |     | 619.7600 | 30.37   | -6.82   | 23.55    | 46.00  | -22.45 | peak     |         |
| 5   |     | 718.7000 | 31.06   | -4.81   | 26.25    | 46.00  | -19.75 | peak     |         |
| 6   | *   | 951.5000 | 30.40   | -0.21   | 30.19    | 46.00  | -15.81 | peak     |         |

Test Mode: TX 2480MHz -CH39 -1Mbps

## Vertical



| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit | Over     |         |
|-----|-----|----------|---------------|----------------|--------------|-------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dB    | Detector | Comment |
| 1   |     | 52.3100  | 35.96         | -14.05         | 21.91        | 40.00 | -18.09   | peak    |
| 2   |     | 75.5900  | 40.65         | -16.67         | 23.98        | 40.00 | -16.02   | peak    |
| 3   |     | 138.6400 | 31.66         | -13.15         | 18.51        | 43.50 | -24.99   | peak    |
| 4   |     | 404.4200 | 30.22         | -9.45          | 20.77        | 46.00 | -25.23   | peak    |
| 5   |     | 701.2400 | 30.16         | -4.93          | 25.23        | 46.00 | -20.77   | peak    |
| 6   | *   | 945.6800 | 30.94         | -0.33          | 30.61        | 46.00 | -15.39   | peak    |

Test Mode: TX 2480MHz -CH39 -1Mbps

### Horizontal




| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Over   | Detector | Comment |
|-----|-----|----------|---------|---------|----------|--------|--------|----------|---------|
|     |     |          | Level   | Factor  | ment     |        |        |          |         |
|     |     | MHz      | dBuV    | dB      | dBuV/m   | dBuV/m | dB     |          |         |
| 1   |     | 73.6500  | 32.34   | -16.50  | 15.84    | 40.00  | -24.16 | peak     |         |
| 2   |     | 138.6400 | 28.37   | -13.15  | 15.22    | 43.50  | -28.28 | peak     |         |
| 3   |     | 299.6600 | 29.24   | -10.99  | 18.25    | 46.00  | -27.75 | peak     |         |
| 4   |     | 446.1300 | 29.96   | -8.69   | 21.27    | 46.00  | -24.73 | peak     |         |
| 5   |     | 701.2400 | 30.23   | -4.93   | 25.30    | 46.00  | -20.70 | peak     |         |
| 6   | *   | 950.5300 | 30.99   | -0.21   | 30.78    | 46.00  | -15.22 | peak     |         |

## **ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)**

Orthogonal Axis : X

Test Mode : TX 2402MHz \_CH00\_1Mbps

## Vertical

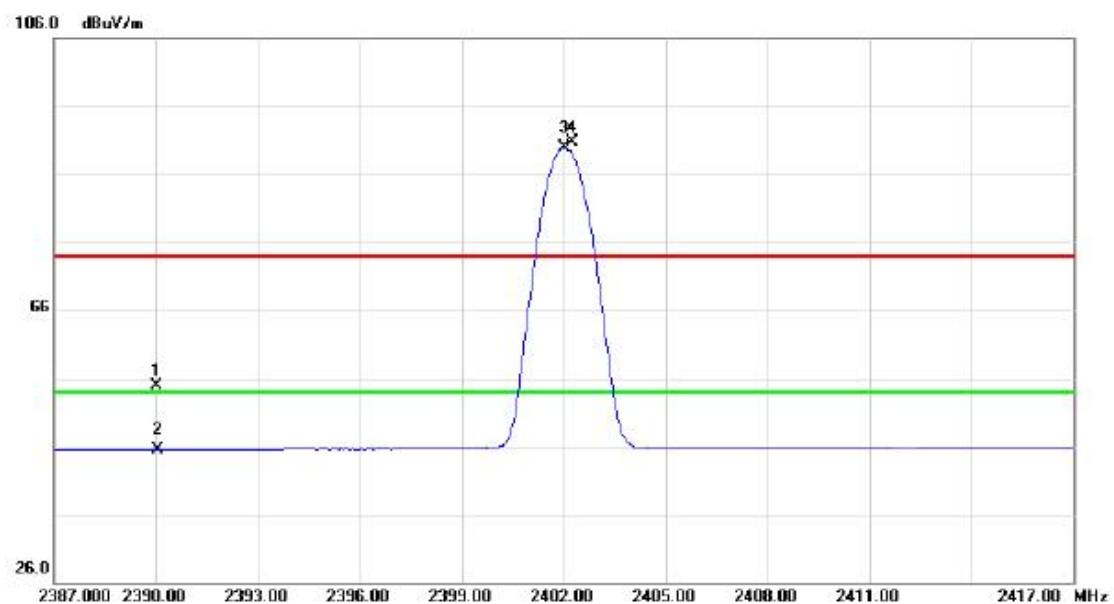

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Over   |          |         |
|-----|-----|----------|---------|---------|----------|--------|--------|----------|---------|
|     |     |          | Level   | Factor  | ment     |        |        |          |         |
|     |     | MHz      | dBuV    | dB      | dBuV/m   | dBuV/m | dB     | Detector | Comment |
| 1   |     | 2390.000 | 23.05   | 31.88   | 54.93    | 74.00  | -19.07 | peak     |         |
| 2   |     | 2390.000 | 13.65   | 31.88   | 45.53    | 54.00  | -8.47  | AVG      |         |
| 3   | *   | 2402.030 | 58.11   | 31.89   | 90.00    | 54.00  | 36.00  | AVG      |         |
| 4   | X   | 2402.240 | 58.83   | 31.89   | 90.72    | 74.00  | 16.72  | peak     |         |


|                   |                        |
|-------------------|------------------------|
| Orthogonal Axis : | X                      |
| Test Mode :       | TX 2402MHz _CH00_1Mbps |

**Vertical**

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit | Over   | Detector | Comment |
|-----|-----|----------|---------|---------|----------|-------|--------|----------|---------|
|     |     |          | Level   | Factor  | ment     |       |        |          |         |
| 1   |     | 4804.050 | 36.79   | 3.58    | 40.37    | 74.00 | -33.63 | peak     |         |
| 2   | *   | 4804.050 | 30.00   | 3.58    | 33.58    | 54.00 | -20.42 | AVG      |         |

|                   |                        |
|-------------------|------------------------|
| Orthogonal Axis : | X                      |
| Test Mode :       | TX 2402MHz _CH00_1Mbps |

### Horizontal

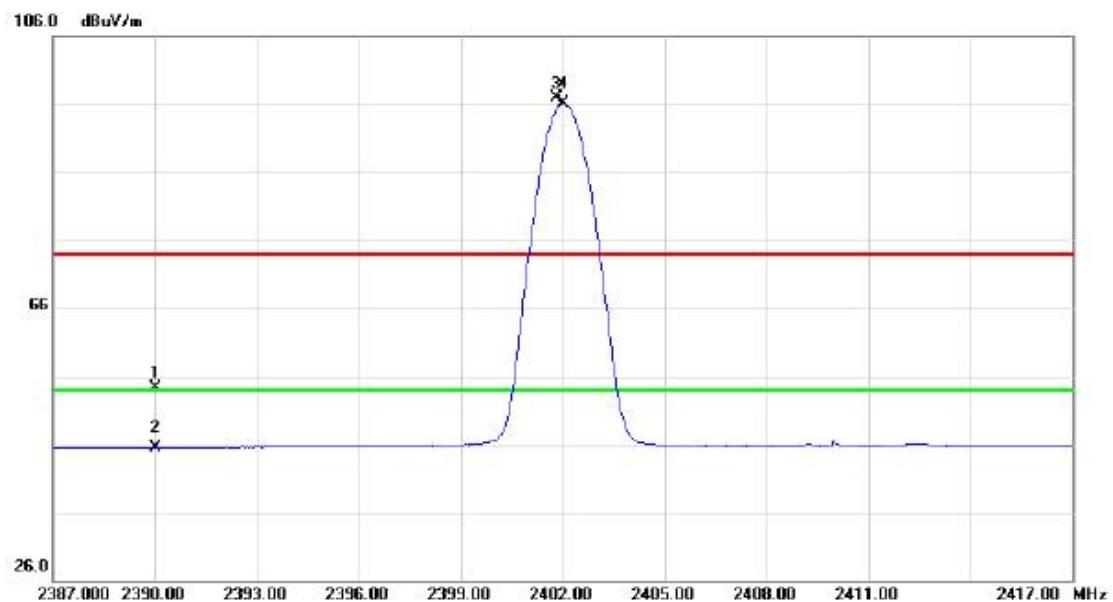

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Over   | Detector | Comment |
|-----|-----|----------|---------|---------|----------|--------|--------|----------|---------|
|     |     |          | Level   | Factor  | ment     |        |        |          |         |
|     |     | MHz      | dBuV    | dB      | dBuV/m   | dBuV/m | dB     |          |         |
| 1   |     | 2390.000 | 22.48   | 31.88   | 54.36    | 74.00  | -19.64 | peak     |         |
| 2   |     | 2390.000 | 13.67   | 31.88   | 45.55    | 54.00  | -8.45  | AVG      |         |
| 3   | X   | 2401.820 | 64.97   | 31.89   | 96.86    | 74.00  | 22.86  | peak     |         |
| 4   | *   | 2402.030 | 64.24   | 31.89   | 96.13    | 54.00  | 42.13  | AVG      |         |

|                   |                        |
|-------------------|------------------------|
| Orthogonal Axis : | X                      |
| Test Mode :       | TX 2402MHz _CH00_1Mbps |


**Horizontal**

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Over   | Detector | Comment |
|-----|-----|----------|---------|---------|----------|--------|--------|----------|---------|
|     |     |          | Level   | Factor  | ment     |        |        |          |         |
|     |     | MHz      | dBuV    | dB      | dBuV/m   | dBuV/m | dB     |          |         |
| 1   |     | 4804.050 | 37.88   | 3.58    | 41.46    | 74.00  | -32.54 | peak     |         |
| 2   | *   | 4804.050 | 29.20   | 3.58    | 32.78    | 54.00  | -21.22 | AVG      |         |

Orthogonal Axis : X

Test Mode : TX 2440MHz \_CH19\_1Mbps

## Vertical

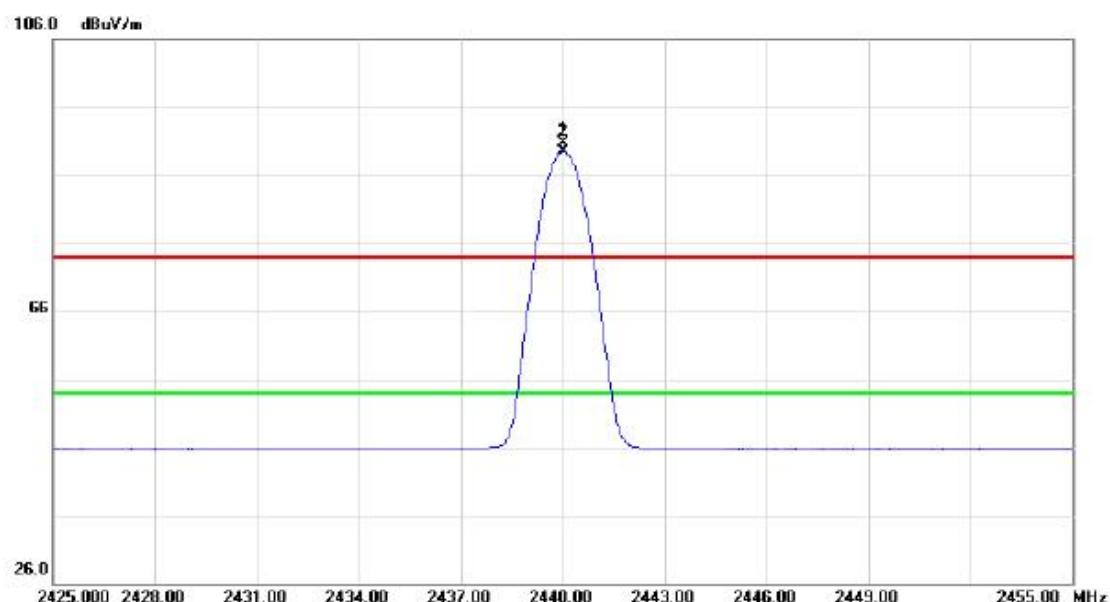


| No. | Mk. | Reading Level | Correct Factor | Measure-<br>ment | Limit  | Over  |          |         |
|-----|-----|---------------|----------------|------------------|--------|-------|----------|---------|
|     |     | MHz           | dBuV           | dB               | dBuV/m | dB    | Detector | Comment |
| 1   | X   | 2440.030      | 58.85          | 31.95            | 90.80  | 74.00 | 16.80    | peak    |
| 2   | *   | 2440.030      | 57.55          | 31.95            | 89.50  | 54.00 | 35.50    | AVG     |

|                   |                        |
|-------------------|------------------------|
| Orthogonal Axis : | X                      |
| Test Mode :       | TX 2440MHz _CH19_1Mbps |

**Vertical**

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Over   | Detector | Comment |
|-----|-----|----------|---------|---------|----------|--------|--------|----------|---------|
|     |     |          | Level   | Factor  | ment     |        |        |          |         |
|     |     | MHz      | dBuV    | dB      | dBuV/m   | dBuV/m | dB     |          |         |
| 1   |     | 4880.160 | 36.68   | 3.73    | 40.41    | 74.00  | -33.59 | peak     |         |
| 2   | *   | 4880.160 | 29.71   | 3.73    | 33.44    | 54.00  | -20.56 | AVG      |         |

|                   |                        |
|-------------------|------------------------|
| Orthogonal Axis : | X                      |
| Test Mode :       | TX 2440MHz _CH19_1Mbps |

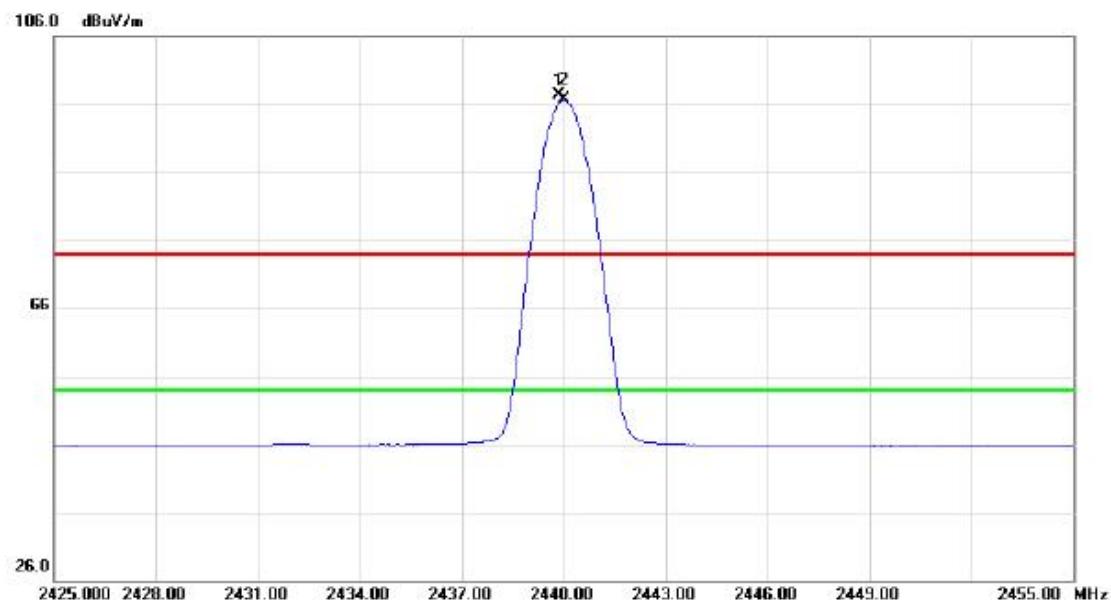**Horizontal**

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit | Over  | Detector | Comment |
|-----|-----|----------|---------|---------|----------|-------|-------|----------|---------|
|     |     |          | Level   | Factor  | ment     |       |       |          |         |
|     |     | MHz      | dBuV    | dB      | dBuV/m   | dB    |       |          |         |
| 1   | X   | 2439.850 | 65.38   | 31.95   | 97.33    | 74.00 | 23.33 | peak     |         |
| 2   | *   | 2440.000 | 64.66   | 31.95   | 96.61    | 54.00 | 42.61 | AVG      |         |

|                   |                        |
|-------------------|------------------------|
| Orthogonal Axis : | X                      |
| Test Mode :       | TX 2440MHz _CH19_1Mbps |


**Horizontal**

| No. | Mk.      | Reading Level | Correct Factor | Measure-<br>ment | Limit  | Over   |          |
|-----|----------|---------------|----------------|------------------|--------|--------|----------|
|     | MHz      | dBuV          | dB             | dBuV/m           | dBuV/m | dB     | Detector |
| 1   | 4880.600 | 37.65         | 3.73           | 41.38            | 74.00  | -32.62 | peak     |
| 2   | *        | 29.13         | 3.73           | 32.86            | 54.00  | -21.14 | AVG      |

Orthogonal Axis : X

Test Mode : TX 2480MHz \_CH39\_1Mbps

## Vertical

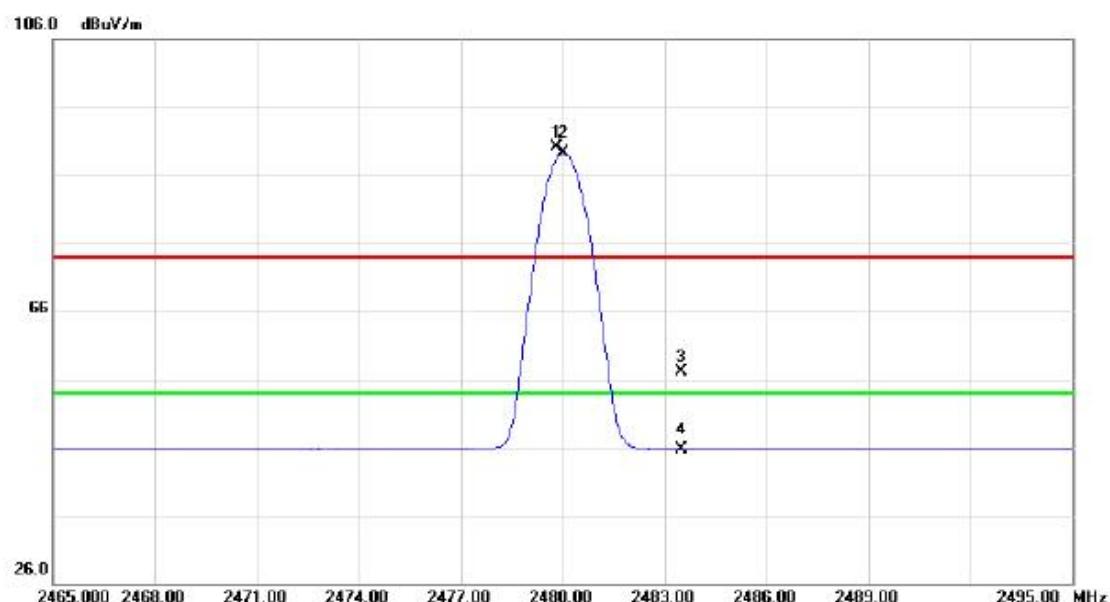

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit | Over   | Detector | Comment |
|-----|-----|----------|---------|---------|----------|-------|--------|----------|---------|
|     |     |          | Level   | Factor  | ment     |       |        |          |         |
|     |     | MHz      | dBuV    | dB      | dBuV/m   | dB    |        |          |         |
| 1   | X   | 2479.820 | 58.04   | 32.00   | 90.04    | 74.00 | 16.04  | peak     |         |
| 2   | *   | 2480.000 | 57.22   | 32.00   | 89.22    | 54.00 | 35.22  | AVG      |         |
| 3   |     | 2483.500 | 25.12   | 32.01   | 57.13    | 74.00 | -16.87 | peak     |         |
| 4   |     | 2483.500 | 13.72   | 32.01   | 45.73    | 54.00 | -8.27  | AVG      |         |


|                   |                        |
|-------------------|------------------------|
| Orthogonal Axis : | X                      |
| Test Mode :       | TX 2480MHz _CH39_1Mbps |

**Vertical**

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Over   | Detector | Comment |
|-----|-----|----------|---------|---------|----------|--------|--------|----------|---------|
|     |     |          | Level   | Factor  | ment     |        |        |          |         |
|     |     | MHz      | dBuV    | dB      | dBuV/m   | dBuV/m | dB     |          |         |
| 1   |     | 4960.200 | 36.56   | 3.88    | 40.44    | 74.00  | -33.56 | peak     |         |
| 2   | *   | 4960.200 | 29.62   | 3.88    | 33.50    | 54.00  | -20.50 | AVG      |         |

|                   |                        |
|-------------------|------------------------|
| Orthogonal Axis : | X                      |
| Test Mode :       | TX 2480MHz _CH39_1Mbps |

### Horizontal

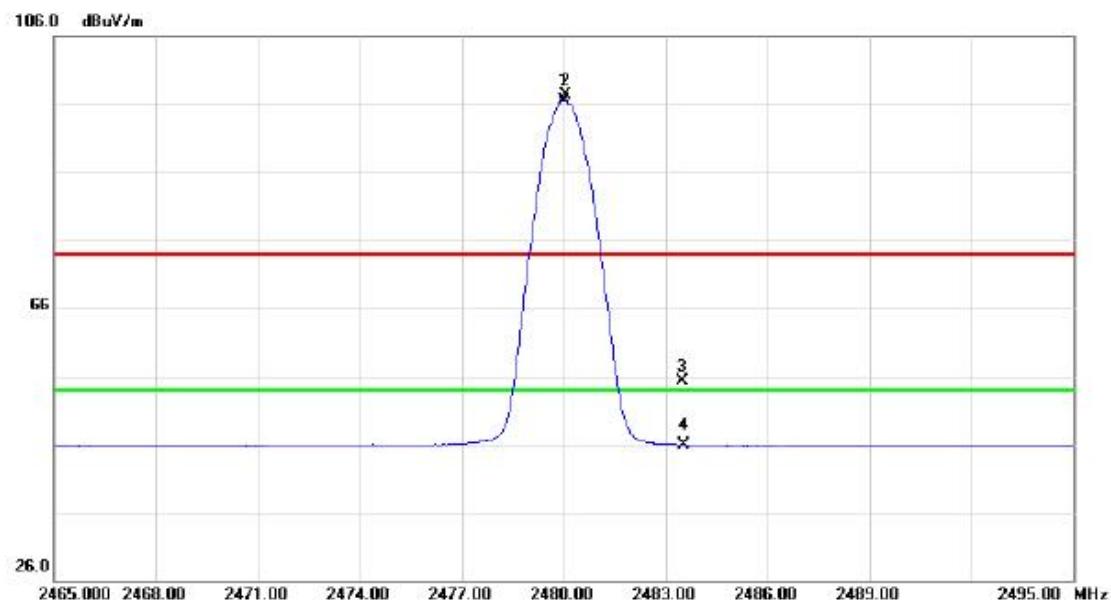

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit | Over   | Detector | Comment |
|-----|-----|----------|---------|---------|----------|-------|--------|----------|---------|
|     |     |          | Level   | Factor  | ment     |       |        |          |         |
|     |     | MHz      | dBuV    | dB      | dBuV/m   | dB    |        |          |         |
| 1   | *   | 2480.030 | 64.58   | 32.00   | 96.58    | 54.00 | 42.58  | AVG      |         |
| 2   | X   | 2480.060 | 65.32   | 32.00   | 97.32    | 74.00 | 23.32  | peak     |         |
| 3   |     | 2483.500 | 23.20   | 32.01   | 55.21    | 74.00 | -18.79 | peak     |         |
| 4   |     | 2483.500 | 13.98   | 32.01   | 45.99    | 54.00 | -8.01  | AVG      |         |

000

|                   |                        |
|-------------------|------------------------|
| Orthogonal Axis : | X                      |
| Test Mode :       | TX 2480MHz _CH39_1Mbps |


**Horizontal**

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Over   | Detector | Comment |
|-----|-----|----------|---------|---------|----------|--------|--------|----------|---------|
|     |     |          | Level   | Factor  | ment     |        |        |          |         |
|     |     | MHz      | dBuV    | dB      | dBuV/m   | dBuV/m | dB     |          |         |
| 1   |     | 4960.800 | 37.64   | 3.88    | 41.52    | 74.00  | -32.48 | peak     |         |
| 2   | *   | 4960.800 | 28.76   | 3.88    | 32.64    | 54.00  | -21.36 | AVG      |         |

## ATTACHMENT E - BANDWIDTH


| Frequency (MHz) | 6dB Bandwidth (MHz) | 99% Occupied BW (MHz) | Min. Limit (kHz) | Test Result |
|-----------------|---------------------|-----------------------|------------------|-------------|
| 2402            | 0.507               | 0.960                 | 500              | Complies    |
| 2440            | 0.520               | 0.956                 | 500              | Complies    |
| 2480            | 0.527               | 0.956                 | 500              | Complies    |

### TX CH00

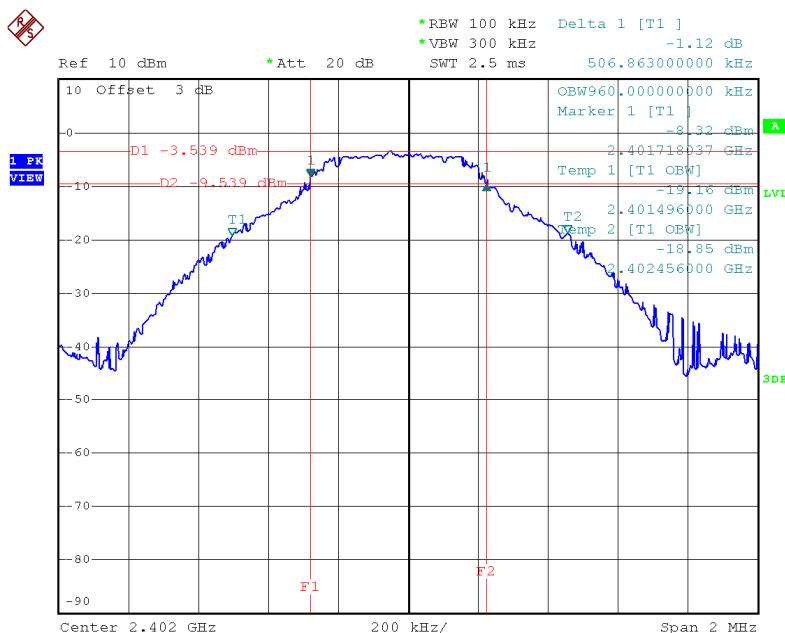


Date: 17.NOV.2014 16:38:35

## TX CH19

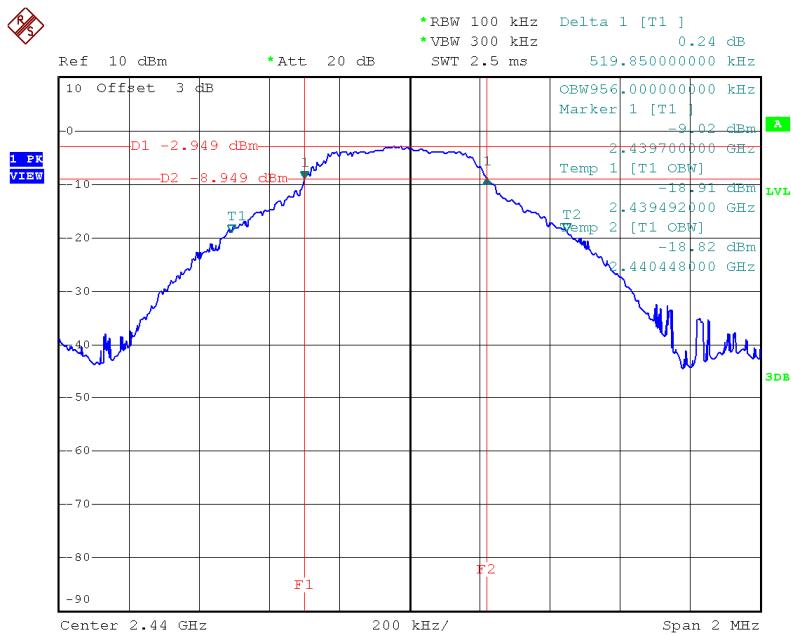

Date: 17.NOV.2014 16:41:25

## TX CH39

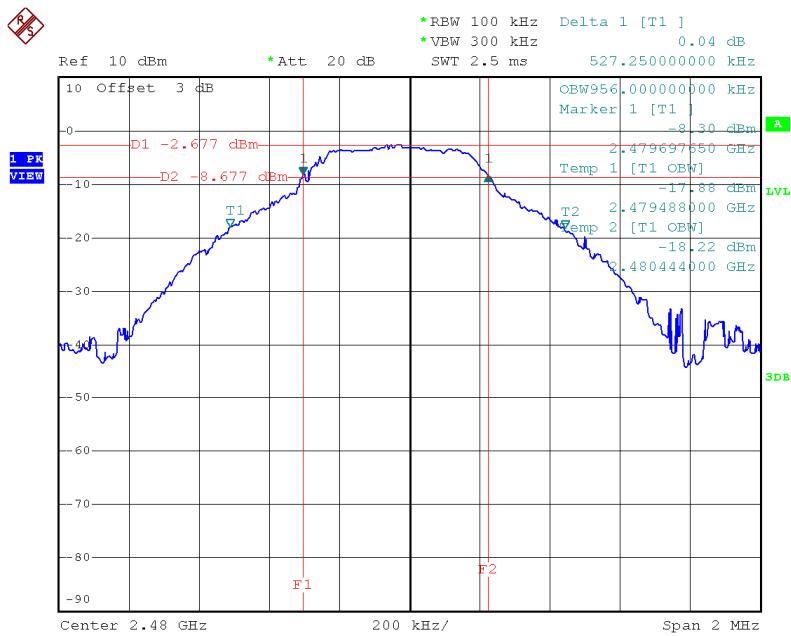

Date: 17.NOV.2014 16:42:12


## ATTACHMENT F - MAXIMUM OUTPUT POWER TEST

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (Watt) | Max. Limit (dBm) | Max. Limit (Watt) | Test Result |
|-----------------|-----------------------|------------------------|------------------|-------------------|-------------|
| 2402            | -0.09                 | 0.0010                 | 30.00            | 1.00              | Complies    |
| 2440            | -0.90                 | 0.0008                 | 30.00            | 1.00              | Complies    |
| 2480            | -1.15                 | 0.0008                 | 30.00            | 1.00              | Complies    |

**ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS  
EMISSION**


Test Mode : CH00, CH19 , CH39 - 1Mbps

### CH00 (Lower) - 1Mbps

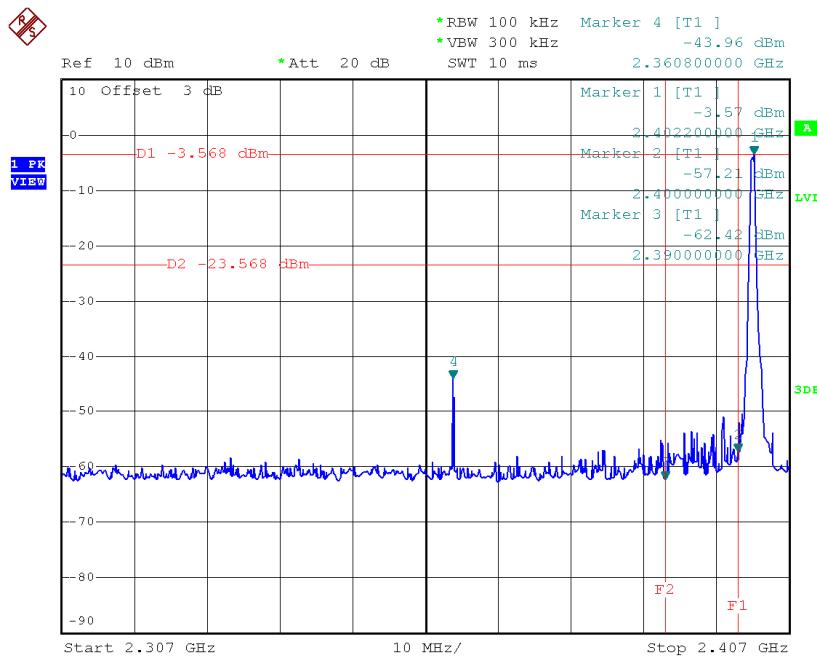


Date: 17.NOV.2014 16:38:53

### CH39 (upper) - 1Mbps

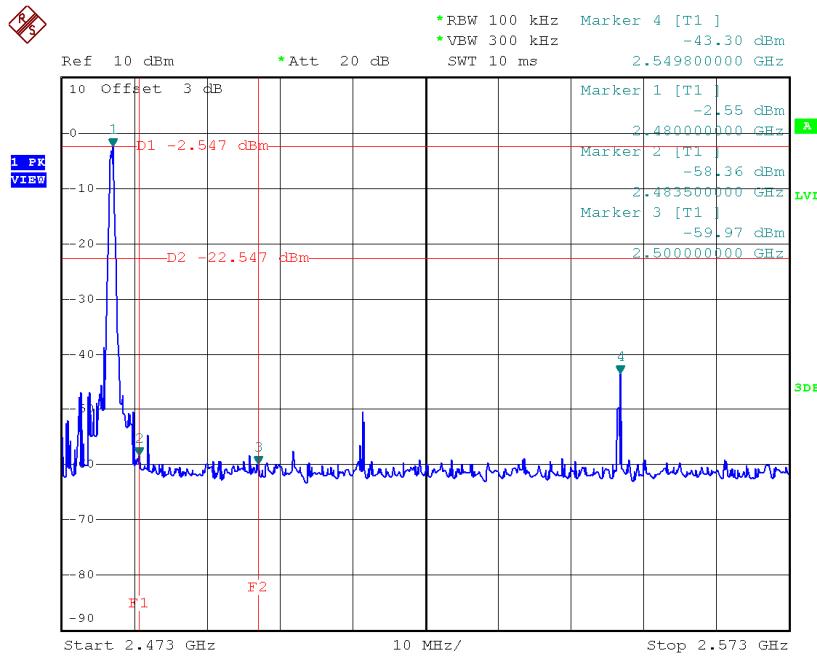


Date: 17.NOV.2014 16:42:30

## CH00 (10 Harmonic of the frequency)

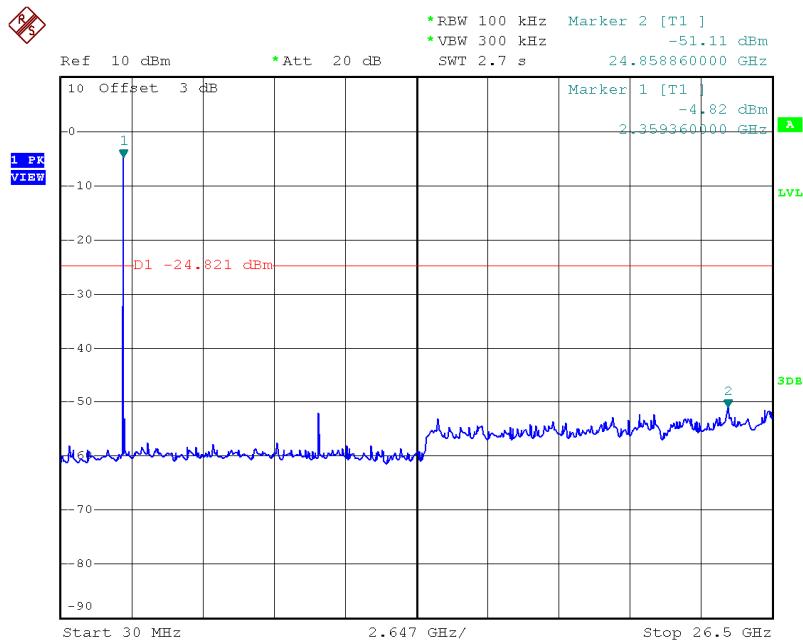


Date: 17.NOV.2014 16:38:45

## CH19 (10 Harmonic of the frequency)

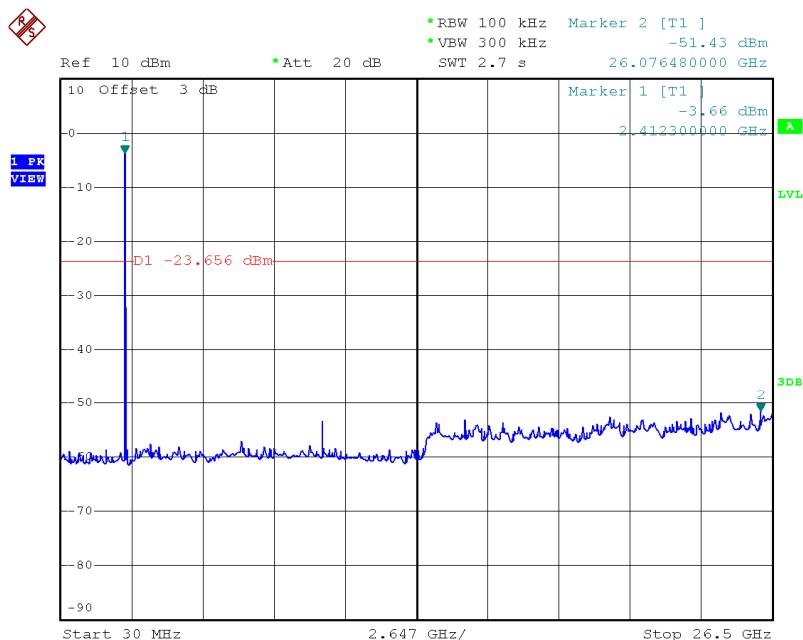

Date: 17.NOV.2014 16:41:36

## CH39 (10 Harmonic of the frequency)

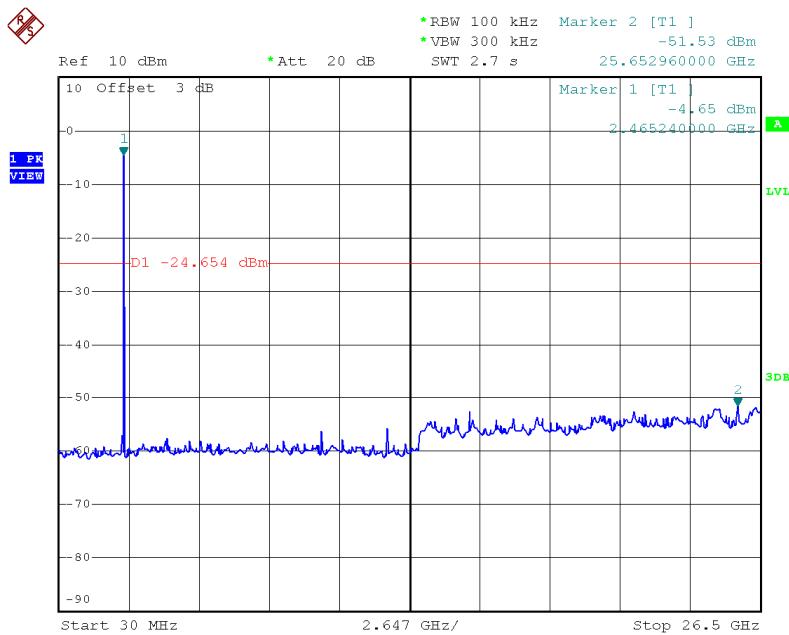


Date: 17.NOV.2014 16:42:22

## ATTACHMENT H - POWER SPECTRAL DENSITY TEST


| Frequency<br>(MHz) | Power Density<br>(dBm) | Max. Limit<br>(dBm) | Result   |
|--------------------|------------------------|---------------------|----------|
| 2402               | -16.74                 | 8                   | Complies |
| 2440               | -15.94                 | 8                   | Complies |
| 2480               | -14.70                 | 8                   | Complies |

### TX CH00

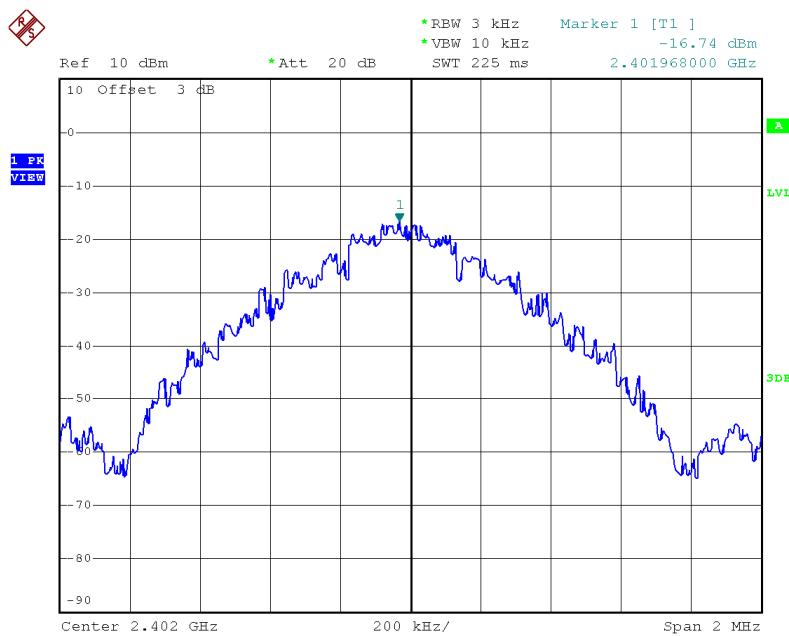


Date: 17.NOV.2014 16:38:59

## TX CH19

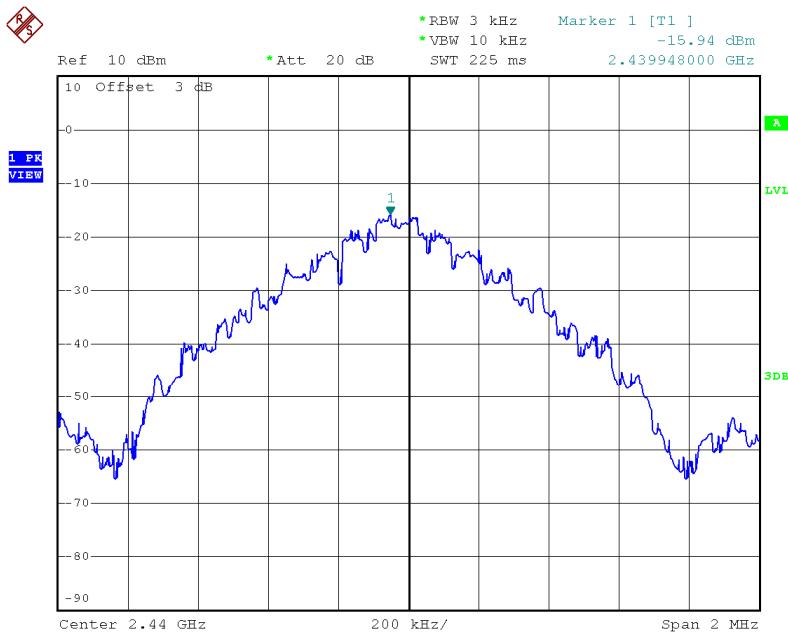

Date: 17.NOV.2014 16:41:42

## TX CH39

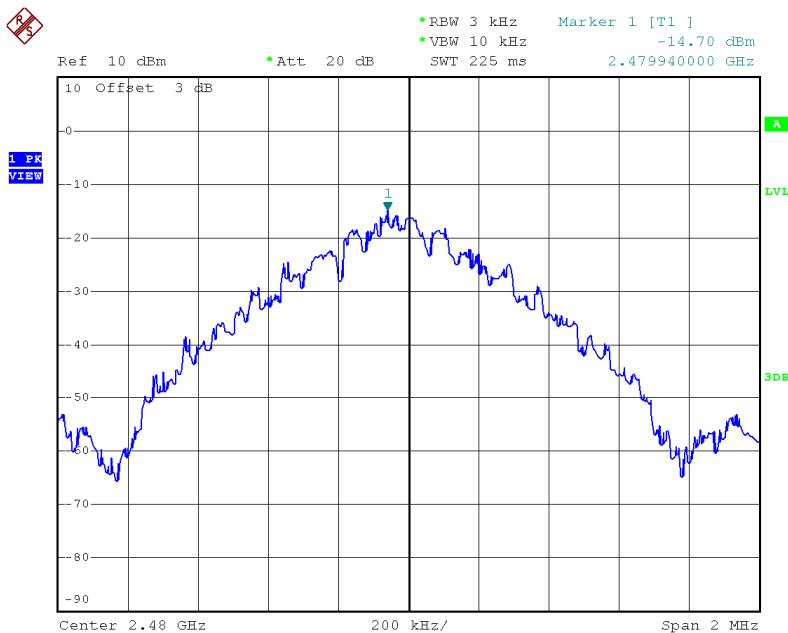

Date: 17.NOV.2014 16:42:35

# IC Radio Test Report


**IC: 8092D-RZ150129**

This report concerns (check one): Original Grant Class II Change

**Project No.** : 1411C110  
**Equipment** : Wireless SmartBand  
**Model Name** : RZ15-0129  
**Applicant** : Razer INC.  
**Address** : 2035 Corte Del Nogal, Suite 101. Carlsbad California 92011. USA

**Date of Receipt** : Nov. 12, 2014  
**Date of Test** : Nov. 12, 2014~ Nov. 21, 2014  
**Issued Date** : Nov. 24, 2014  
**Tested by** : BTL Inc.

**Testing Engineer** :   
(David Mao)

**Technical Manager** :   
(Leo Hung)

**Authorized Signatory** :   
(Steven Lu)

**B T L I N C .**

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

## **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C**, or National Institute of Standards and Technology (**NIST**) of **U.S.A**.

**BTL**'s reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL**'s reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

**BTL**'s laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

## **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

| Table of Contents   | Page      |
|---|-----------|
| <b>1 . CERTIFICATION</b>  | <b>6</b>  |
| <b>2 . SUMMARY OF TEST RESULTS</b>                                  | <b>7</b>  |
| <b>2.1 TEST FACILITY</b>  | <b>8</b>  |
| <b>2.2 MEASUREMENT UNCERTAINTY</b>                                  | <b>8</b>  |
| <b>3 . GENERAL INFORMATION</b>                                      | <b>9</b>  |
| <b>3.1 GENERAL DESCRIPTION OF EUT</b>                               | <b>9</b>  |
| <b>3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED</b> | <b>11</b> |
| <b>3.5 DESCRIPTION OF SUPPORT UNITS</b>                             | <b>11</b> |
| <b>4 . EMC EMISSION TEST</b>  | <b>12</b> |
| <b>4.1 CONDUCTED EMISSION MEASUREMENT</b>                           | <b>12</b> |
| <b>4.1.1 POWER LINE CONDUCTED EMISSION LIMITS</b>                   | <b>12</b> |
| <b>4.1.2 TEST PROCEDURE</b>   | <b>12</b> |
| <b>4.1.3 DEVIATION FROM TEST STANDARD</b>                           | <b>12</b> |
| <b>4.1.4 TEST SETUP</b>   | <b>13</b> |
| <b>4.1.5 EUT OPERATING CONDITIONS</b>                               | <b>13</b> |
| <b>4.1.6 EUT TEST CONDITIONS</b>                                    | <b>13</b> |
| <b>4.1.7 TEST RESULTS</b>   | <b>13</b> |
| <b>4.2 RADIATED EMISSION MEASUREMENT</b>                            | <b>14</b> |
| <b>4.2.1 RADIATED EMISSION LIMITS</b>                               | <b>14</b> |
| <b>4.2.2 TEST PROCEDURE</b>   | <b>15</b> |
| <b>4.2.3 DEVIATION FROM TEST STANDARD</b>                           | <b>15</b> |
| <b>4.2.4 TEST SETUP</b>   | <b>16</b> |
| <b>4.2.5 EUT OPERATING CONDITIONS</b>                               | <b>17</b> |
| <b>4.2.6 EUT TEST CONDITIONS</b>                                    | <b>17</b> |
| <b>4.2.7 TEST RESULTS (9KHZ TO 30MHZ)</b>                           | <b>17</b> |
| <b>4.2.8 TEST RESULTS (BETWEEN 30MHZ TO 1000 MHZ)</b>               | <b>18</b> |
| <b>4.2.9 TEST RESULTS (ABOVE 1000 MHZ)</b>                          | <b>18</b> |
| <b>5 . BANDWIDTH TEST</b>   | <b>19</b> |
| <b>5.1 APPLIED PROCEDURES / LIMIT</b>                               | <b>19</b> |
| <b>5.1.1 TEST PROCEDURE</b>   | <b>19</b> |
| <b>5.1.2 DEVIATION FROM STANDARD</b>                                | <b>19</b> |
| <b>5.1.3 TEST SETUP</b>   | <b>19</b> |
| <b>5.1.4 EUT OPERATION CONDITIONS</b>                               | <b>19</b> |
| <b>5.1.5 EUT TEST CONDITIONS</b>                                    | <b>19</b> |
| <b>5.1.6 TEST RESULTS</b>   | <b>19</b> |
| <b>6 . MAXIMUM OUTPUT POWER TEST</b>                                | <b>20</b> |
| <b>6.1 APPLIED PROCEDURES / LIMIT</b>                               | <b>20</b> |

| Table of Contents  | Page      |
|--|-----------|
| 6.1.1 TEST PROCEDURE   | 20        |
| 6.1.2 DEVIATION FROM STANDARD                                      | 20        |
| 6.1.3 TEST SETUP   | 20        |
| 6.1.4 EUT OPERATION CONDITIONS                                     | 20        |
| 6.1.5 EUT TEST CONDITIONS  | 20        |
| 6.1.6 TEST RESULTS   | 20        |
| <b>7 . ANTENNA CONDUCTED SPURIOUS EMISSION</b>                     | <b>21</b> |
| 7.1 APPLIED PROCEDURES / LIMIT                                     | 21        |
| 7.1.1 TEST PROCEDURE   | 21        |
| 7.1.2 DEVIATION FROM STANDARD                                      | 21        |
| 7.1.3 TEST SETUP   | 21        |
| 7.1.4 EUT OPERATION CONDITIONS                                     | 21        |
| 7.1.5 EUT OPERATION CONDITIONS                                     | 21        |
| 7.1.6 TEST RESULTS   | 21        |
| <b>8 . POWER SPECTRAL DENSITY TEST</b>                             | <b>22</b> |
| 8.1 APPLIED PROCEDURES / LIMIT                                     | 22        |
| 8.1.1 TEST PROCEDURE   | 22        |
| 8.1.2 DEVIATION FROM STANDARD                                      | 22        |
| 8.1.3 TEST SETUP   | 22        |
| 8.1.4 EUT OPERATION CONDITIONS                                     | 22        |
| 8.1.5 EUT TEST CONDITIONS  | 22        |
| 8.1.6 TEST RESULTS   | 22        |
| <b>9 . MEASUREMENT INSTRUMENTS LIST</b>                            | <b>23</b> |
| <b>ATTACHMENT A - CONDUCTED EMISSION</b>                           | <b>25</b> |
| <b>ATTACHMENT B - RADIATED EMISSION (9KHZ-30MHZ)</b>               | <b>28</b> |
| <b>ATTACHMENT C - RADIATED EMISSION BETWEEN 30MHZ AND 1000MHZ)</b> | <b>30</b> |
| <b>ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)</b>            | <b>37</b> |
| <b>ATTACHMENT E - BANDWIDTH</b>                                    | <b>50</b> |
| <b>ATTACHMENT F - MAXIMUM OUTPUT POWER TEST</b>                    | <b>53</b> |
| <b>ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION</b>          | <b>55</b> |
| <b>ATTACHMENT H - POWER SPECTRAL DENSITY TEST</b>                  | <b>59</b> |

## REPORT ISSUED HISTORY

| Issued No.         | Description     | Issued Date   |
|--------------------|-----------------|---------------|
| BTL-ICP-1-1411C110 | Original Issue. | Nov. 24, 2014 |

## 1. CERTIFICATION

Equipment : Wireless SmartBand  
Brand Name : RAZER  
Model Name : RZ15-0129  
Applicant : Razer INC.  
Manufacturer : Razer (Asia-Pacific) Pte Ltd  
Address : 514 Chai Chee Lane #07-01 ~ 06 Singapore 469029  
Date of Test : Nov. 12, 2014~ Nov. 21, 2014  
Test Sample : ENGINEERING SAMPLE  
Standard(s) : Canada RSS-210:2010  
RSS-GEN Issue 4, Nov 2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-ICP-1-1411C110) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

| <b>Canada RSS-210:2010; RSS-GEN Issue 4, Nov 2014</b> |         |                                     |          |        |
|---|---------|-------------------------------------|----------|--------|
| Standard(s)   | Section | Test Item                           | Judgment | Remark |
| RSS-GEN 7.2.2   |         | Conducted Emission                  | PASS     |        |
| RSS-210 Annex 8 (A8.5)                                |         | Antenna conducted Spurious Emission | PASS     |        |
| RSS-210 Annex 8 (A8.2(a))                             |         | 6dB Bandwidth                       | PASS     |        |
| RSS-210 Annex 8 (A8.4(4))                             |         | Peak Output Power                   | PASS     |        |
| RSS-210 Annex 8 (A8.2(b))                             |         | Power Spectral Density              | PASS     |        |
| -   |         | Antenna Requirement                 | PASS     |        |
| RSS-210 Annex 8 (A8.5)                                |         | Transmitter Radiated Emissions      | PASS     |        |

NOTE:

- (1)" N/A" denotes test is not applicable to this device.
- (2) The test follows FCC KDB Publication No. 558074 D01 DTS Meas Guidance v03r02 (Measurement Guidelines of DTS)

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **DG-C02/DG-CB03** at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.523792  
BTL's test firm number for IC: 4428B-1

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2**, providing a level of confidence of approximately **95 %**.

### A. Conducted Measurement :

| Test Site | Method | Measurement Frequency Range | U,(dB) | Note |
|-----------|--------|-----------------------------|--------|------|
| DG-C02    | CISPR  | 150 KHz ~ 30MHz             | 1.94   |      |

### B. Radiated Measurement :

| Test Site | Method | Measurement Frequency Range | Ant. H / V | U,(dB) | Note |
|-----------|--------|-----------------------------|------------|--------|------|
| DG-CB03   | CISPR  | 9KHz~30MHz                  | V          | 3.79   |      |
|           |        | 9KHz~30MHz                  | H          | 3.57   |      |
|           |        | 30MHz ~ 200MHz              | V          | 3.82   |      |
|           |        | 30MHz ~ 200MHz              | H          | 3.60   |      |
|           |        | 200MHz ~ 1,000MHz           | V          | 3.86   |      |
|           |        | 200MHz ~ 1,000MHz           | H          | 3.94   |      |
|           |        | 1GHz~18GHz                  | V          | 3.12   |      |
|           |        | 1GHz~18GHz                  | H          | 3.68   |      |
|           |        | 18GHz~40GHz                 | V          | 4.15   |      |
|           |        | 18GHz~40GHz                 | H          | 4.14   |      |

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|                     |   |                   |
|---------------------|---|-------------------|
| Equipment           | Wireless SmartBand  |                   |
| Brand Name          | RAZER   |                   |
| Model Name          | RZ15-0129   |                   |
| Model Difference    | N/A   |                   |
| Product Description | Operation Frequency   | 2402~2480 MHz     |
|                     | Modulation Technology   | GFSK(1Mbps)       |
|                     | Bit Rate of Transmitter   |                   |
|                     | Output Power (Max.)   | -0.09 dBm (1Mbps) |
| Power Source        | #1 Supplied from USB Port<br>#2 Battery Supplied.<br>Model: 36082 |                   |
| Power Rating        | #1 DC 5V<br>#2 DC 5V 40mA   |                   |

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

| Channel List |                 |         |                 |
|--------------|-----------------|---------|-----------------|
| Channel      | Frequency (MHz) | Channel | Frequency (MHz) |
| 00           | 2402            | 20      | 2442            |
| 01           | 2404            | 21      | 2444            |
| 02           | 2406            | 22      | 2446            |
| 03           | 2408            | 23      | 2448            |
| 04           | 2410            | 24      | 2450            |
| 05           | 2412            | 25      | 2452            |
| 06           | 2414            | 26      | 2454            |
| 07           | 2416            | 27      | 2456            |
| 08           | 2418            | 28      | 2458            |
| 09           | 2420            | 29      | 2460            |
| 10           | 2422            | 30      | 2462            |
| 11           | 2424            | 31      | 2464            |
| 12           | 2426            | 32      | 2466            |
| 13           | 2428            | 33      | 2468            |
| 14           | 2430            | 34      | 2470            |
| 15           | 2432            | 35      | 2472            |
| 16           | 2434            | 36      | 2474            |
| 17           | 2436            | 37      | 2476            |
| 18           | 2438            | 38      | 2478            |
| 19           | 2440            | 39      | 2480            |

3.

| Ant. | Brand | Model Name              | Antenna Type | Connector | Gain (dBi) |
|------|-------|-------------------------|--------------|-----------|------------|
| 1    | TDK   | ANT016008LCS2442<br>MA2 | Internal     | N/A       | 2.50       |

### 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED



### 3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment | Mfr/Brand | Model/Type No. | IC | Series No. | Note |
|------|-----------|-----------|----------------|----|------------|------|
| -    | -         | -         | -              | -  | -          | -    |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|------|
| -    | -             | -            | -      | -    |

Note:

(1) For detachable type I/O cable should be specified the length in m in 『Length』 column.

## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

| Frequency of Emission (MHz) | Conducted Limit (dB $\mu$ V) |           |
|-----------------------------|------------------------------|-----------|
|                             | Quasi-peak                   | Average   |
| 0.15 -0.5                   | 66 to 56*                    | 56 to 46* |
| 0.50 -5.0                   | 56                           | 46        |
| 5.0 -30.0                   | 60                           | 50        |

Note:

(1) The limit of " \* " decreases with the logarithm of the frequency

The following table is the setting of the receiver

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |


#### 4.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.4 TEST SETUP

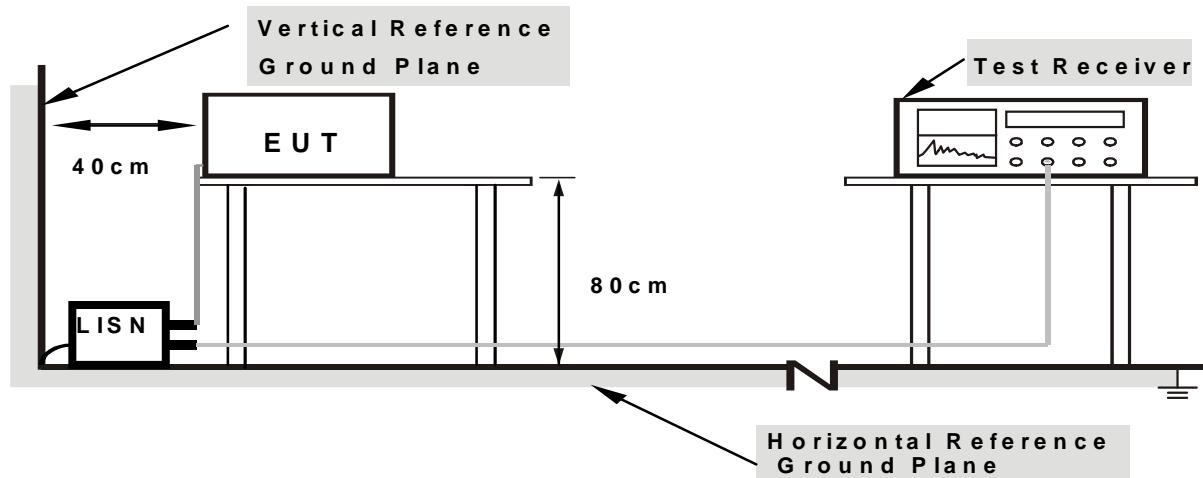

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

#### 4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

#### 4.1.6 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: DC 5V

#### 4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of **Note**. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “\*” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.
- (3) “N/A” denotes test is not applicable to this device.

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9KHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009~0.490       | 2400/F(KHz)                       | 300                           |
| 0.490~1.705       | 24000/F(KHz)                      | 30                            |
| 1.705~30.0        | 30                                | 30                            |
| 30~88             | 100                               | 3                             |
| 88~216            | 150                               | 3                             |
| 216~960           | 200                               | 3                             |
| 960~1000          | 500                               | 3                             |

Section 15.33 Frequency range of radiated measurements.

Unless otherwise noted in the specific rule section under which the equipment operates for an intentional radiator the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

| Spectrum Parameter                         | Setting  |
|--|--|
| Attenuation                                | Auto   |
| Start Frequency                            | 1000 MHz                                       |
| Stop Frequency                             | 10th carrier harmonic                          |
| RBW / VBW<br>(Emission in restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter     | Setting                           |
|------------------------|-----------------------------------|
| Attenuation            | Auto                              |
| Start ~ Stop Frequency | 9kHz~90kHz for PK/AVG detector    |
| Start ~ Stop Frequency | 90kHz~110kHz for QP detector      |
| Start ~ Stop Frequency | 110kHz~490kHz for PK/AVG detector |
| Start ~ Stop Frequency | 490kHz~30MHz for QP detector      |
| Start ~ Stop Frequency | 30MHz~1000MHz for QP detector     |

#### 4.2.2 TEST PROCEDURE


- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.2.3 DEVIATION FROM TEST STANDARD


No deviation

#### 4.2.4 TEST SETUP


##### (A) Radiated Emission Test Set-Up Frequency Below 1 GHz

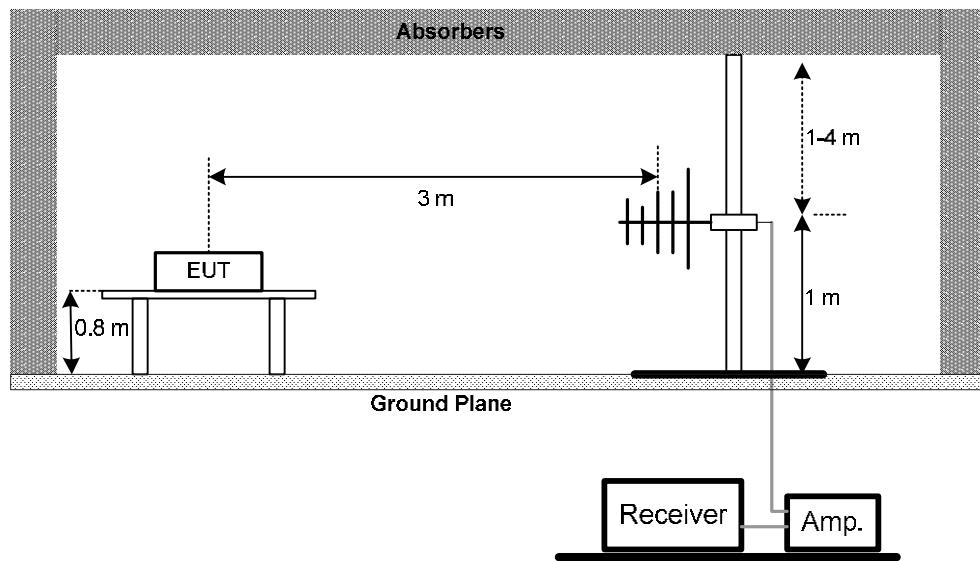

##### (B) Radiated Emission Test Set-Up Frequency Above 1 GHz

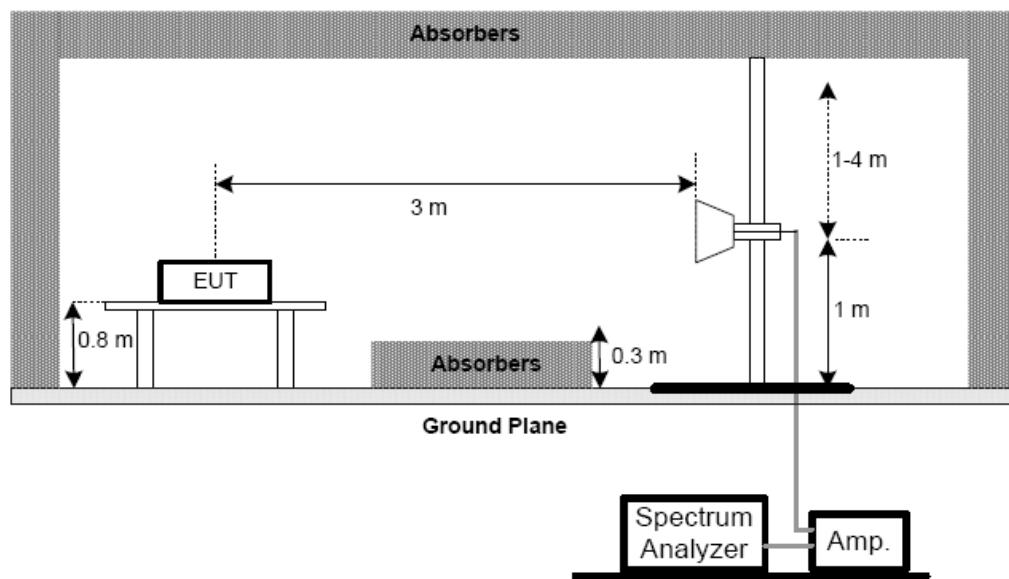

(C) For radiated emissions below 30MHz

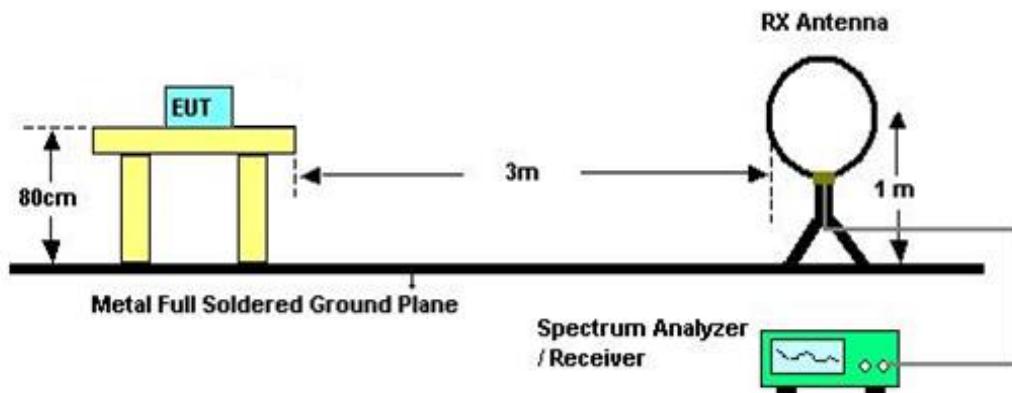

#### 4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **4.1.5 Unless** otherwise a special operating condition is specified in the follows during the testing.

#### 4.2.6 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

**Test Voltage:** DC 5V

#### 4.2.7 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

**4.2.8 TEST RESULTS (BETWEEN 30MHZ TO 1000 MHZ)**

**Please refer to the Attachment C.**

Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

**4.2.9 TEST RESULTS (ABOVE 1000 MHZ)**

**Please refer to the Attachment D.**

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission
- (3) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (4) EUT Orthogonal Axis:  
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (5) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (6) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

## 5. BANDWIDTH TEST

### 5.1 Applied procedures / limit

| RSS-GEN and RSS-210                                      |           |                              |                       |        |
|--|-----------|------------------------------|-----------------------|--------|
| Section  | Test Item | Limit                        | Frequency Range (MHz) | Result |
| RSS-GEN section<br>4.6.1<br>RSS-210 Annex 8<br>(A8.2(a)) | Bandwidth | >= 500KHz<br>(6dB bandwidth) | 2400-2483.5           | PASS   |

#### 5.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

#### 5.1.2 DEVIATION FROM STANDARD

No deviation.

#### 5.1.3 TEST SETUP



#### 5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 5.1.5 EUT TEST CONDITIONS

Temperature: 25°C  
Relative Humidity: 55%  
Test Voltage: DC 5V

#### 5.1.6 TEST RESULTS

Please refer to the Attachment E.

## 6. MAXIMUM OUTPUT POWER TEST

### 6.1 Applied procedures / limit

| RSS-210              |                      |                 |                       |        |
|----------------------|----------------------|-----------------|-----------------------|--------|
| Section              | Test Item            | Limit           | Frequency Range (MHz) | Result |
| RSS-210 Annex 8.4(4) | Maximum Output Power | 1 watt or 30dBm | 2400-2483.5           | PASS   |


#### 6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- b. The maximum peak conducted output power was performed in accordance with method 9.1.2 of FCC KDB 558074 D01 DTS Meas Guidance v03r02.

#### 6.1.2 DEVIATION FROM STANDARD

No deviation.

#### 6.1.3 TEST SETUP

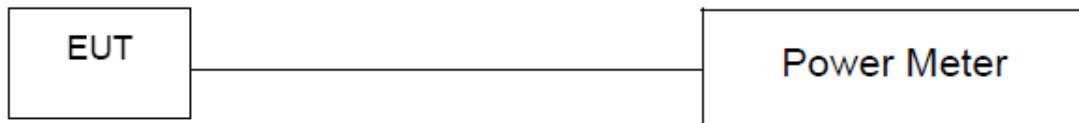

#### 6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

Transmit output power was measured while the host equipment supply voltage was varied from 85 % to 115 % of the nominal rated supply voltage. No change in transmit output power was observed.

#### 6.1.5 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: DC 5V

#### 6.1.6 TEST RESULTS

Please refer to the Attachment F.

## 7. ANTENNA CONDUCTED SPURIOUS EMISSION

### 7.1 Applied procedures / limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

#### 7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = 10 ms.

#### 7.1.2 DEVIATION FROM STANDARD

No deviation.

#### 7.1.3 TEST SETUP



#### 7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 7.1.5 EUT OPERATION CONDITIONS

Temperature: 25°C  
Relative Humidity: 55%  
Test Voltage: DC 5V

#### 7.1.6 TEST RESULTS

Please refer to the Attachment G.

## 8. POWER SPECTRAL DENSITY TEST

### 8.1 Applied procedures / limit

| RSS-210                   |                        |                     |                       |        |
|---------------------------|------------------------|---------------------|-----------------------|--------|
| Section                   | Test Item              | Limit               | Frequency Range (MHz) | Result |
| RSS-210 Annex 8( A8.2(b)) | Power Spectral Density | 8 dBm (in any 3KHz) | 2400-2483.5           | PASS   |

#### 8.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW=3KHz, VBW=10 KHz, Sweep time = auto.

#### 8.1.2 DEVIATION FROM STANDARD

No deviation.

#### 8.1.3 TEST SETUP



#### 8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 8.1.5 EUT TEST CONDITIONS

Temperature: 25°C  
 Relative Humidity: 55%  
 Test Voltage: DC 5V

#### 8.1.6 TEST RESULTS

Please refer to the Attachment H.

## 9. MEASUREMENT INSTRUMENTS LIST

| Conducted Emission Measurement |                   |              |          |            |                  |
|--------------------------------|-------------------|--------------|----------|------------|------------------|
| Item                           | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
| 1                              | LISN              | EMCO         | 3816/2   | 00052765   | Mar. 29, 2015    |
| 2                              | LISN              | R&S          | ENV216   | 101447     | Mar. 29, 2015    |
| 3                              | Test Cable        | N/A          | C_17     | N/A        | Mar. 14, 2015    |
| 4                              | EMI TEST RECEIVER | R&S          | ESCS30   | 833364/017 | Mar. 29, 2015    |
| 5                              | 50Ω Terminator    | SHX          | TF2-3G-A | 08122902   | Mar. 29, 2015    |

| Radiated Emission Measurement |                         |              |           |            |                  |
|-------------------------------|-------------------------|--------------|-----------|------------|------------------|
| Item                          | Kind of Equipment       | Manufacturer | Type No.  | Serial No. | Calibrated until |
| 1                             | Antenna                 | Schwarbeck   | VULB9160  | 9160-3232  | Mar. 29, 2015    |
| 2                             | Amplifier               | HP           | 8447D     | 2944A09673 | Mar. 29, 2015    |
| 3                             | Test Receiver           | R&S          | ESCI      | 100382     | Mar. 29, 2015    |
| 4                             | Test Cable              | N/A          | C-01_CB03 | N/A        | Jul. 01, 2015    |
| 5                             | Antenna                 | ETS          | 3115      | 00075789   | Mar. 29, 2015    |
| 6                             | Amplifier               | Agilent      | 8449B     | 3008A02274 | Mar. 29, 2015    |
| 7                             | Spectrum                | Agilent      | E4408B    | US39240143 | Nov. 02, 2015    |
| 8                             | Test Cable              | HUBER+SUHNER | C-45      | N/A        | Mar. 29, 2015    |
| 9                             | Controller              | CT           | SC100     | N/A        | N/A              |
| 10                            | Horn Antenna            | EMCO         | 3115      | 9605-4803  | Mar. 29, 2015    |
| 11                            | Active Loop Antenna     | R&S          | HFH2-Z2   | 830749/020 | Mar. 29, 2015    |
| 12                            | Broad-Band Horn Antenna | Schwarzbeck  | BBHA 9170 | 9170319    | Feb. 22, 2015    |

| 6dB Bandwidth Measurement |                   |              |          |            |                  |
|---------------------------|-------------------|--------------|----------|------------|------------------|
| Item                      | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
| 1                         | Spectrum Analyzer | R&S          | FSP 40   | 100185     | Nov. 02, 2015    |

| <b>Peak Output Power Measurement</b> |                    |              |          |            |                  |
|--------------------------------------|--------------------|--------------|----------|------------|------------------|
| Item                                 | Kind of Equipment  | Manufacturer | Type No. | Serial No. | Calibrated until |
| 1                                    | power Meter        | ANRITSU      | ML2495A  | 1128009    | May. 29, 2015    |
| 2                                    | Pulse Power Sensor | ANRITSU      | MA 2411B | 1027500    | May. 29, 2015    |

| <b>Antenna Conducted Spurious Emission Measurement</b> |                   |              |          |            |                  |
|--|-------------------|--------------|----------|------------|------------------|
| Item   | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
| 1  | Spectrum Analyzer | R&S          | FSP 40   | 100185     | Nov. 02, 2015    |


| <b>Power Spectral Density Measurement</b> |                   |              |          |            |                  |
|---|-------------------|--------------|----------|------------|------------------|
| Item                                      | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
| 1   | Spectrum Analyzer | R&S          | FSP 40   | 100185     | Nov. 02, 2015    |

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

## ATTACHMENT A - CONDUCTED EMISSION

Test Mode: TX Mode

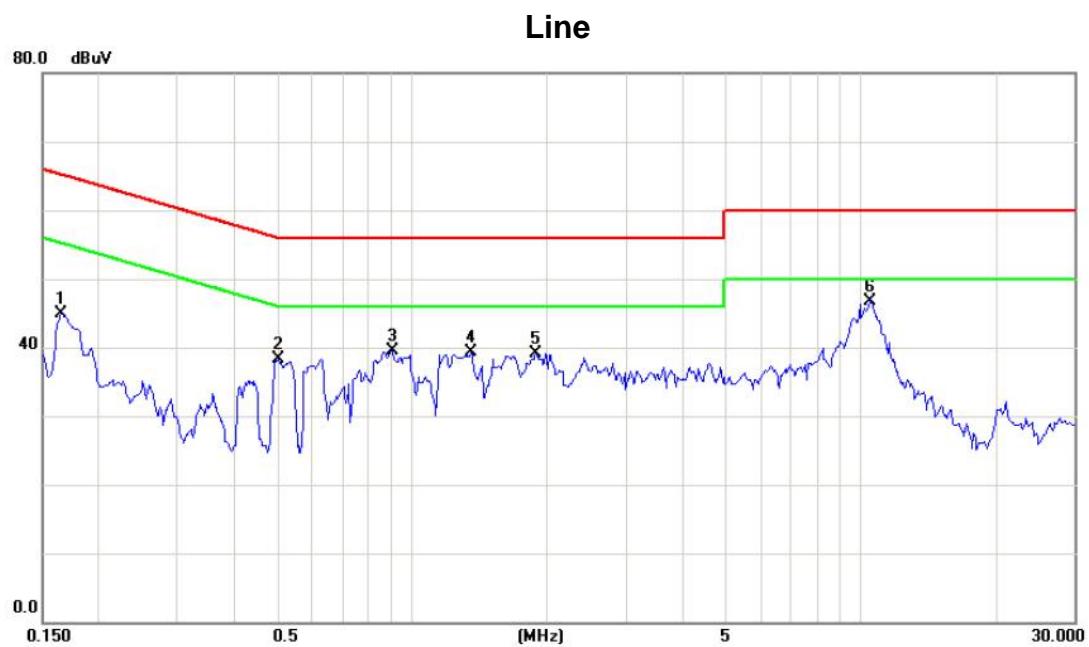

| No. | Mk. | Freq.   | Reading | Correct | Measure- | Limit | Over   | Detector | Comment |
|-----|-----|---------|---------|---------|----------|-------|--------|----------|---------|
|     |     |         | Level   | Factor  | ment     |       |        |          |         |
| 1   |     | 0.1655  | 35.37   | 9.63    | 45.00    | 65.18 | -20.18 | peak     |         |
| 2   |     | 0.5053  | 28.70   | 9.70    | 38.40    | 56.00 | -17.60 | peak     |         |
| 3   |     | 0.9040  | 29.85   | 9.74    | 39.59    | 56.00 | -16.41 | peak     |         |
| 4   |     | 1.3570  | 29.54   | 9.78    | 39.32    | 56.00 | -16.68 | peak     |         |
| 5   |     | 1.8882  | 29.29   | 9.83    | 39.12    | 56.00 | -16.88 | peak     |         |
| 6   | *   | 10.5625 | 36.51   | 10.10   | 46.61    | 60.00 | -13.39 | peak     |         |

Test Mode: TX Mode

**Neutral**

| No. | Mk. | Freq.   | Reading | Correct | Measure- | Limit | Over   | Detector | Comment |
|-----|-----|---------|---------|---------|----------|-------|--------|----------|---------|
|     |     |         | Level   | Factor  | ment     |       |        |          |         |
|     |     | MHz     | dBuV    | dB      | dBuV     | dBuV  | dB     |          |         |
| 1   |     | 0.1655  | 40.14   | 9.70    | 49.84    | 65.18 | -15.34 | peak     |         |
| 2   |     | 0.2553  | 31.52   | 9.72    | 41.24    | 61.58 | -20.34 | peak     |         |
| 3   |     | 0.5171  | 29.82   | 9.74    | 39.56    | 56.00 | -16.44 | peak     |         |
| 4   |     | 1.2280  | 29.58   | 9.79    | 39.37    | 56.00 | -16.63 | peak     |         |
| 5   |     | 6.4062  | 29.18   | 10.00   | 39.18    | 60.00 | -20.82 | peak     |         |
| 6   | *   | 10.6913 | 35.34   | 10.22   | 45.56    | 60.00 | -14.44 | peak     |         |

## ATTACHMENT B - RADIATED EMISSION (9KHZ-30MHZ)


|            |         |
|------------|---------|
| Test Mode: | TX Mode |
|------------|---------|

| Freq.<br>(MHz) | Ant.<br>0°/90° | Reading(RA)<br>(dBuV) | Corr.Factor(CF)<br>(dB) | Measured(FS)<br>(dBuV/m) | Limits(QP)<br>(dBuV/m) | Margin<br>(dB) | Note |
|----------------|----------------|-----------------------|-------------------------|--------------------------|------------------------|----------------|------|
| 0.0149         | 0°             | 13.42                 | 24.62                   | 38.04                    | 104.14                 | -66.10         | AVG  |
| 0.0149         | 0°             | 14.47                 | 24.62                   | 39.09                    | 124.14                 | -85.05         | PEAK |
| 0.0342         | 0°             | 6.75                  | 23.40                   | 30.15                    | 96.92                  | -66.77         | AVG  |
| 0.0342         | 0°             | 7.38                  | 23.40                   | 30.78                    | 116.92                 | -86.14         | PEAK |
| 0.0382         | 0°             | 3.49                  | 23.15                   | 26.64                    | 95.96                  | -69.33         | AVG  |
| 0.0382         | 0°             | 5.31                  | 23.15                   | 28.46                    | 115.96                 | -87.51         | PEAK |
| 0.0467         | 0°             | 0.86                  | 22.61                   | 23.47                    | 94.22                  | -70.75         | AVG  |
| 0.0467         | 0°             | 2.92                  | 22.61                   | 25.53                    | 114.22                 | -88.69         | PEAK |
| 2.0641         | 0°             | 30.85                 | 19.46                   | 50.31                    | 69.54                  | -19.23         | QP   |
| 3.3659         | 0°             | 21.61                 | 18.94                   | 40.55                    | 69.54                  | -28.99         | QP   |

| Freq.<br>(MHz) | Ant.<br>0°/90° | Reading(RA)<br>(dBuV) | Corr.Factor(CF)<br>(dB) | Measured(FS)<br>(dBuV/m) | Limits(QP)<br>(dBuV/m) | Margin<br>(dB) | Note |
|----------------|----------------|-----------------------|-------------------------|--------------------------|------------------------|----------------|------|
| 0.0146         | 90°            | 13.29                 | 24.30                   | 37.59                    | 124.32                 | -86.73         | AVG  |
| 0.0146         | 90°            | 14.41                 | 24.30                   | 38.71                    | 144.32                 | -105.61        | PEAK |
| 0.0339         | 90°            | 6.38                  | 23.42                   | 29.80                    | 117.00                 | -87.20         | AVG  |
| 0.0339         | 90°            | 8.61                  | 23.42                   | 32.03                    | 137.00                 | -104.97        | PEAK |
| 0.0371         | 90°            | 3.49                  | 23.22                   | 26.71                    | 116.22                 | -89.51         | AVG  |
| 0.0371         | 90°            | 5.33                  | 23.22                   | 28.55                    | 136.22                 | -107.67        | PEAK |
| 0.0687         | 90°            | 0.67                  | 22.03                   | 22.70                    | 110.87                 | -88.17         | AVG  |
| 0.0687         | 90°            | 2.92                  | 22.03                   | 24.95                    | 130.87                 | -105.92        | PEAK |
| 2.0562         | 90°            | 30.84                 | 19.47                   | 50.31                    | 69.54                  | -19.23         | QP   |

**ATTACHMENT C - RADIATED EMISSION BETWEEN 30MHZ AND  
1000MHZ)**

Test Mode: TX 2402MHz -CH00 -1Mbps

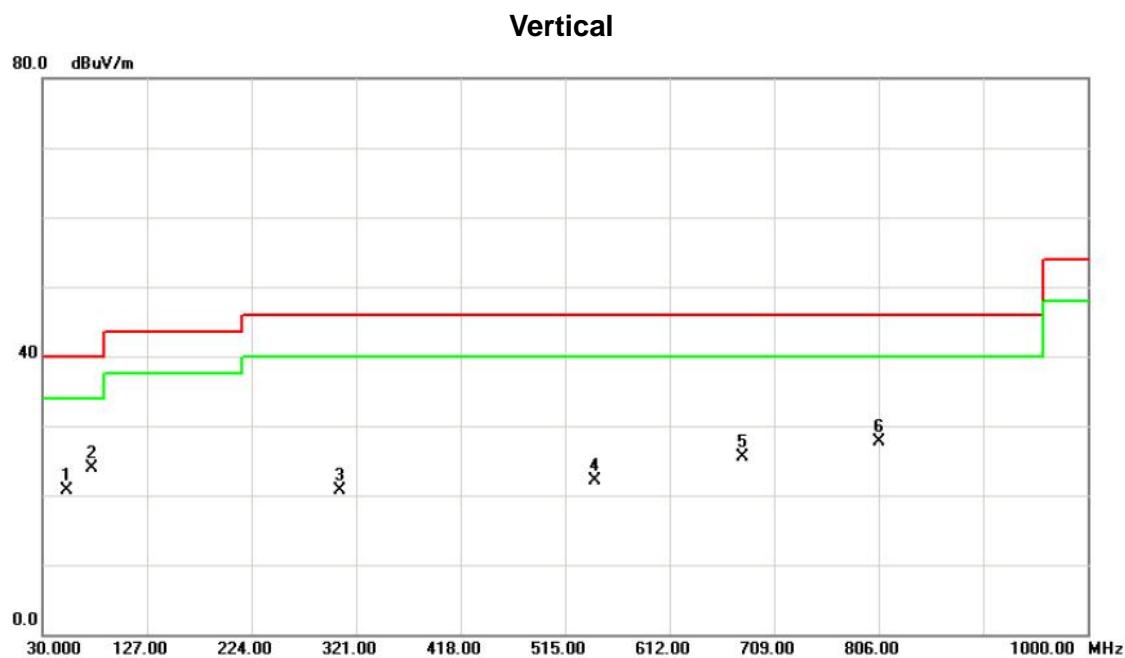

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Over   | Detector | Comment |
|-----|-----|----------|---------|---------|----------|--------|--------|----------|---------|
|     |     |          | Level   | Factor  | ment     |        |        |          |         |
|     |     |          | MHz     | dBuV    | dB       | dBuV/m | dB     |          |         |
| 1   |     | 52.3100  | 34.77   | -14.05  | 20.72    | 40.00  | -19.28 | peak     |         |
| 2   | *   | 75.5900  | 40.48   | -16.67  | 23.81    | 40.00  | -16.19 | peak     |         |
| 3   |     | 306.4500 | 31.79   | -11.09  | 20.70    | 46.00  | -25.30 | peak     |         |
| 4   |     | 543.1300 | 30.32   | -8.29   | 22.03    | 46.00  | -23.97 | peak     |         |
| 5   |     | 679.9000 | 30.51   | -5.02   | 25.49    | 46.00  | -20.51 | peak     |         |
| 6   |     | 806.0000 | 30.72   | -2.92   | 27.80    | 46.00  | -18.20 | peak     |         |


Test Mode: TX 2402MHz -CH00 -1Mbps

### Horizontal



| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Over   | Detector | Comment |
|-----|-----|----------|---------|---------|----------|--------|--------|----------|---------|
|     |     |          | Level   | Factor  | ment     |        |        |          |         |
|     |     | MHz      | dBuV    | dB      | dBuV/m   | dBuV/m | dB     |          |         |
| 1   |     | 79.4700  | 35.20   | -17.09  | 18.11    | 40.00  | -21.89 | peak     |         |
| 2   |     | 297.7200 | 28.61   | -11.03  | 17.58    | 46.00  | -28.42 | peak     |         |
| 3   |     | 453.8900 | 29.24   | -8.76   | 20.48    | 46.00  | -25.52 | peak     |         |
| 4   |     | 567.3800 | 29.48   | -7.92   | 21.56    | 46.00  | -24.44 | peak     |         |
| 5   |     | 684.7500 | 29.92   | -5.00   | 24.92    | 46.00  | -21.08 | peak     |         |
| 6   | *   | 794.3600 | 30.79   | -3.08   | 27.71    | 46.00  | -18.29 | peak     |         |

Test Mode: TX 2440MHz -CH19 -1Mbps

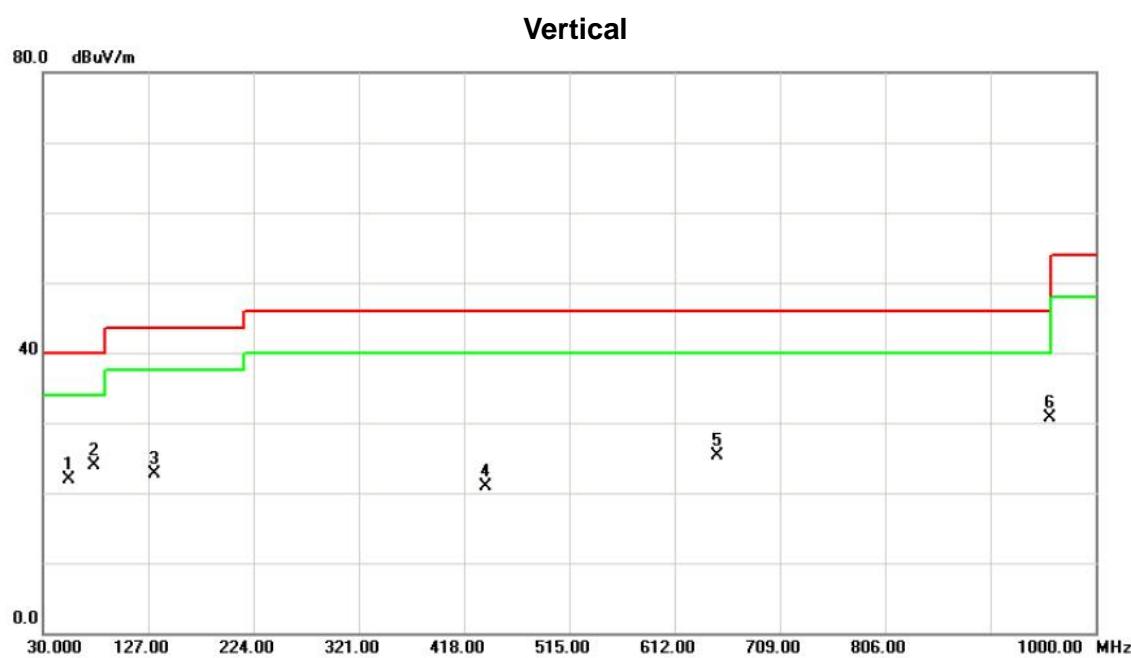

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-<br>ment | Limit | Over     |         |
|-----|-----|----------|---------------|----------------|------------------|-------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m           | dB    | Detector | Comment |
| 1   |     | 54.2500  | 36.29         | -14.31         | 21.98            | 40.00 | -18.02   | peak    |
| 2   |     | 76.5600  | 40.78         | -16.78         | 24.00            | 40.00 | -16.00   | peak    |
| 3   |     | 132.8200 | 35.79         | -13.09         | 22.70            | 43.50 | -20.80   | peak    |
| 4   |     | 437.4000 | 29.82         | -8.84          | 20.98            | 46.00 | -25.02   | peak    |
| 5   |     | 651.7700 | 30.41         | -5.15          | 25.26            | 46.00 | -20.74   | peak    |
| 6   | *   | 957.3200 | 30.93         | -0.24          | 30.69            | 46.00 | -15.31   | peak    |

Test Mode: TX 2440MHz -CH19 -1Mbps

### Horizontal



| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Over   | Detector | Comment |
|-----|-----|----------|---------|---------|----------|--------|--------|----------|---------|
|     |     |          | Level   | Factor  | ment     |        |        |          |         |
|     |     |          | MHz     | dBuV    | dB       | dBuV/m | dBuV/m | dB       |         |
| 1   |     | 73.6500  | 32.93   | -16.50  | 16.43    | 40.00  | -23.57 | peak     |         |
| 2   |     | 302.5700 | 28.35   | -11.03  | 17.32    | 46.00  | -28.68 | peak     |         |
| 3   |     | 467.4700 | 30.45   | -9.28   | 21.17    | 46.00  | -24.83 | peak     |         |
| 4   |     | 619.7600 | 30.37   | -6.82   | 23.55    | 46.00  | -22.45 | peak     |         |
| 5   |     | 718.7000 | 31.06   | -4.81   | 26.25    | 46.00  | -19.75 | peak     |         |
| 6   | *   | 951.5000 | 30.40   | -0.21   | 30.19    | 46.00  | -15.81 | peak     |         |

Test Mode: TX 2480MHz -CH39 -1Mbps

**Vertical**



| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-<br>ment | Limit | Over     |         |
|-----|-----|----------|---------------|----------------|------------------|-------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m           | dB    | Detector | Comment |
| 1   |     | 52.3100  | 35.96         | -14.05         | 21.91            | 40.00 | -18.09   | peak    |
| 2   |     | 75.5900  | 40.65         | -16.67         | 23.98            | 40.00 | -16.02   | peak    |
| 3   |     | 138.6400 | 31.66         | -13.15         | 18.51            | 43.50 | -24.99   | peak    |
| 4   |     | 404.4200 | 30.22         | -9.45          | 20.77            | 46.00 | -25.23   | peak    |
| 5   |     | 701.2400 | 30.16         | -4.93          | 25.23            | 46.00 | -20.77   | peak    |
| 6   | *   | 945.6800 | 30.94         | -0.33          | 30.61            | 46.00 | -15.39   | peak    |

Test Mode: TX 2480MHz -CH39 -1Mbps

### Horizontal




| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Over   | Detector | Comment |
|-----|-----|----------|---------|---------|----------|--------|--------|----------|---------|
|     |     |          | Level   | Factor  | ment     |        |        |          |         |
|     |     | MHz      | dBuV    | dB      | dBuV/m   | dBuV/m | dB     |          |         |
| 1   |     | 73.6500  | 32.34   | -16.50  | 15.84    | 40.00  | -24.16 | peak     |         |
| 2   |     | 138.6400 | 28.37   | -13.15  | 15.22    | 43.50  | -28.28 | peak     |         |
| 3   |     | 299.6600 | 29.24   | -10.99  | 18.25    | 46.00  | -27.75 | peak     |         |
| 4   |     | 446.1300 | 29.96   | -8.69   | 21.27    | 46.00  | -24.73 | peak     |         |
| 5   |     | 701.2400 | 30.23   | -4.93   | 25.30    | 46.00  | -20.70 | peak     |         |
| 6   | *   | 950.5300 | 30.99   | -0.21   | 30.78    | 46.00  | -15.22 | peak     |         |

**ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)**

Orthogonal Axis : X


Test Mode : TX 2402MHz \_CH00\_1Mbps

## Vertical

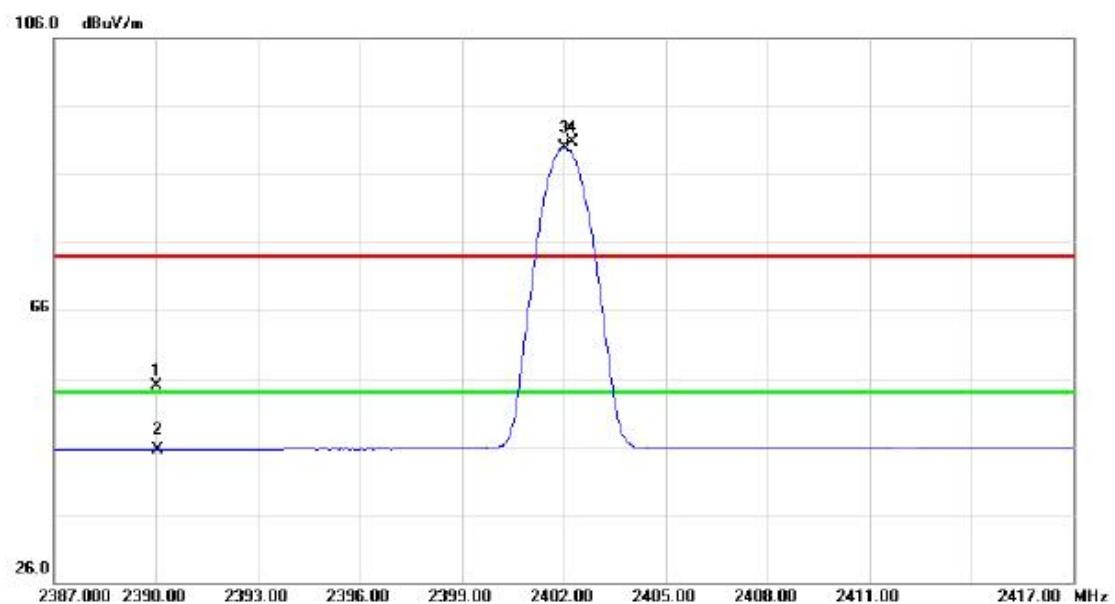

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Over   | Detector | Comment |
|-----|-----|----------|---------|---------|----------|--------|--------|----------|---------|
|     |     |          | Level   | Factor  | ment     |        |        |          |         |
|     |     | MHz      | dBuV    | dB      | dBuV/m   | dBuV/m | dB     |          |         |
| 1   |     | 2390.000 | 23.05   | 31.88   | 54.93    | 74.00  | -19.07 | peak     |         |
| 2   |     | 2390.000 | 13.65   | 31.88   | 45.53    | 54.00  | -8.47  | AVG      |         |
| 3   | *   | 2402.030 | 58.11   | 31.89   | 90.00    | 54.00  | 36.00  | AVG      |         |
| 4   | X   | 2402.240 | 58.83   | 31.89   | 90.72    | 74.00  | 16.72  | peak     |         |


|                   |                        |
|-------------------|------------------------|
| Orthogonal Axis : | X                      |
| Test Mode :       | TX 2402MHz _CH00_1Mbps |

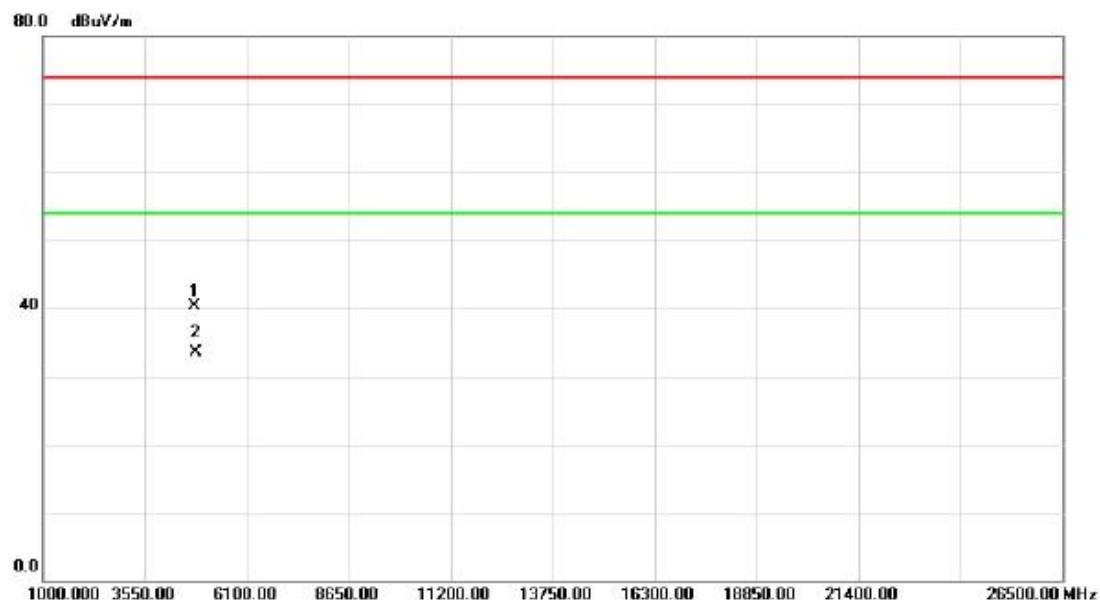**Vertical**

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Over   | Detector | Comment |
|-----|-----|----------|---------|---------|----------|--------|--------|----------|---------|
|     |     |          | Level   | Factor  | ment     |        |        |          |         |
|     |     | MHz      | dBuV    | dB      | dBuV/m   | dBuV/m | dB     |          |         |
| 1   |     | 4804.050 | 36.79   | 3.58    | 40.37    | 74.00  | -33.63 | peak     |         |
| 2   | *   | 4804.050 | 30.00   | 3.58    | 33.58    | 54.00  | -20.42 | AVG      |         |

|                   |                        |
|-------------------|------------------------|
| Orthogonal Axis : | X                      |
| Test Mode :       | TX 2402MHz _CH00_1Mbps |

### Horizontal

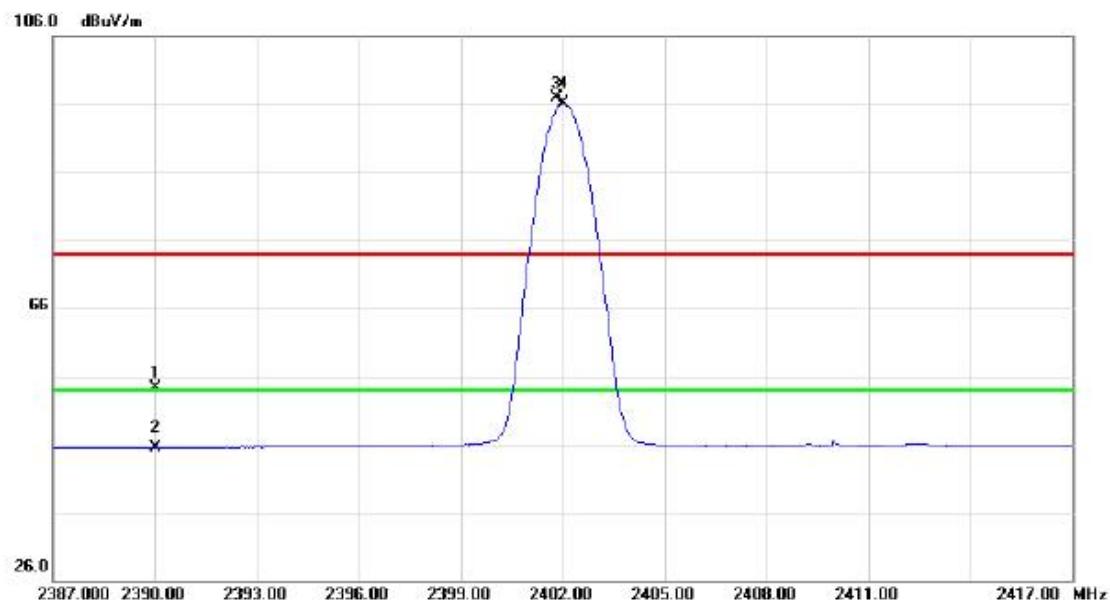

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Over   | Detector | Comment |
|-----|-----|----------|---------|---------|----------|--------|--------|----------|---------|
|     |     |          | Level   | Factor  | ment     |        |        |          |         |
|     |     | MHz      | dBuV    | dB      | dBuV/m   | dBuV/m | dB     |          |         |
| 1   |     | 2390.000 | 22.48   | 31.88   | 54.36    | 74.00  | -19.64 | peak     |         |
| 2   |     | 2390.000 | 13.67   | 31.88   | 45.55    | 54.00  | -8.45  | AVG      |         |
| 3   | X   | 2401.820 | 64.97   | 31.89   | 96.86    | 74.00  | 22.86  | peak     |         |
| 4   | *   | 2402.030 | 64.24   | 31.89   | 96.13    | 54.00  | 42.13  | AVG      |         |

|                   |                        |
|-------------------|------------------------|
| Orthogonal Axis : | X                      |
| Test Mode :       | TX 2402MHz _CH00_1Mbps |


**Horizontal**

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Over   | Detector | Comment |
|-----|-----|----------|---------|---------|----------|--------|--------|----------|---------|
|     |     |          | Level   | Factor  | ment     |        |        |          |         |
|     |     | MHz      | dBuV    | dB      | dBuV/m   | dBuV/m | dB     |          |         |
| 1   |     | 4804.050 | 37.88   | 3.58    | 41.46    | 74.00  | -32.54 | peak     |         |
| 2   | *   | 4804.050 | 29.20   | 3.58    | 32.78    | 54.00  | -21.22 | AVG      |         |

Orthogonal Axis : X

Test Mode : TX 2440MHz \_CH19\_1Mbps

## Vertical

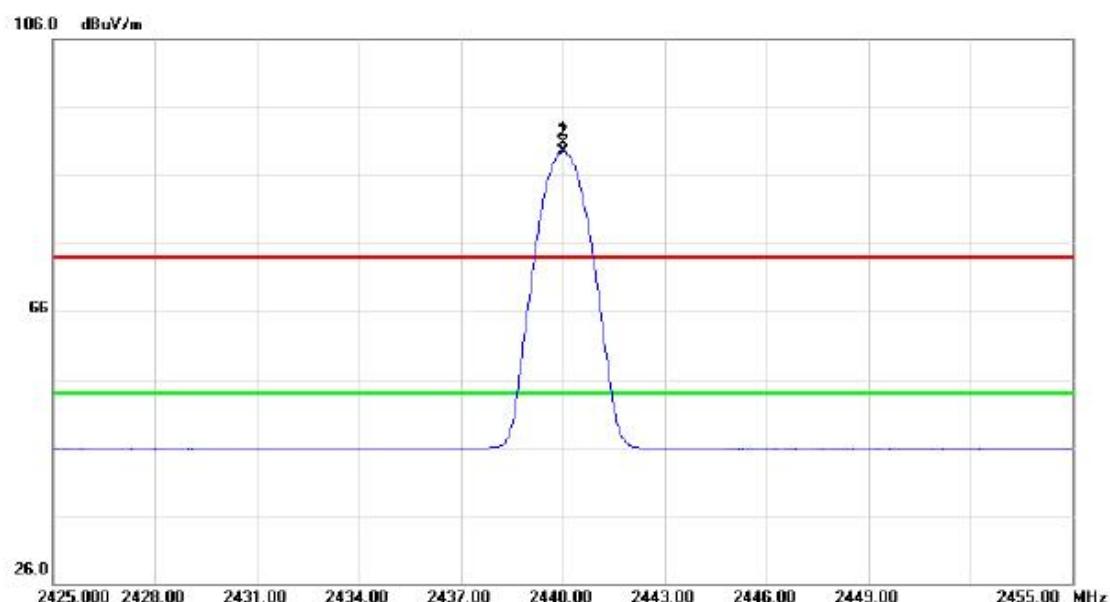


| No. | Mk. | Reading Level | Correct Factor | Measure-<br>ment | Limit  | Over  |          |         |
|-----|-----|---------------|----------------|------------------|--------|-------|----------|---------|
|     |     | MHz           | dBuV           | dB               | dBuV/m | dB    | Detector | Comment |
| 1   | X   | 2440.030      | 58.85          | 31.95            | 90.80  | 74.00 | 16.80    | peak    |
| 2   | *   | 2440.030      | 57.55          | 31.95            | 89.50  | 54.00 | 35.50    | AVG     |

|                   |                        |
|-------------------|------------------------|
| Orthogonal Axis : | X                      |
| Test Mode :       | TX 2440MHz _CH19_1Mbps |

**Vertical**

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit | Over   | Detector | Comment |
|-----|-----|----------|---------|---------|----------|-------|--------|----------|---------|
|     |     |          | Level   | Factor  | ment     |       |        |          |         |
| 1   |     | 4880.160 | 36.68   | 3.73    | 40.41    | 74.00 | -33.59 | peak     |         |
| 2   | *   | 4880.160 | 29.71   | 3.73    | 33.44    | 54.00 | -20.56 | AVG      |         |

|                   |                        |
|-------------------|------------------------|
| Orthogonal Axis : | X                      |
| Test Mode :       | TX 2440MHz _CH19_1Mbps |

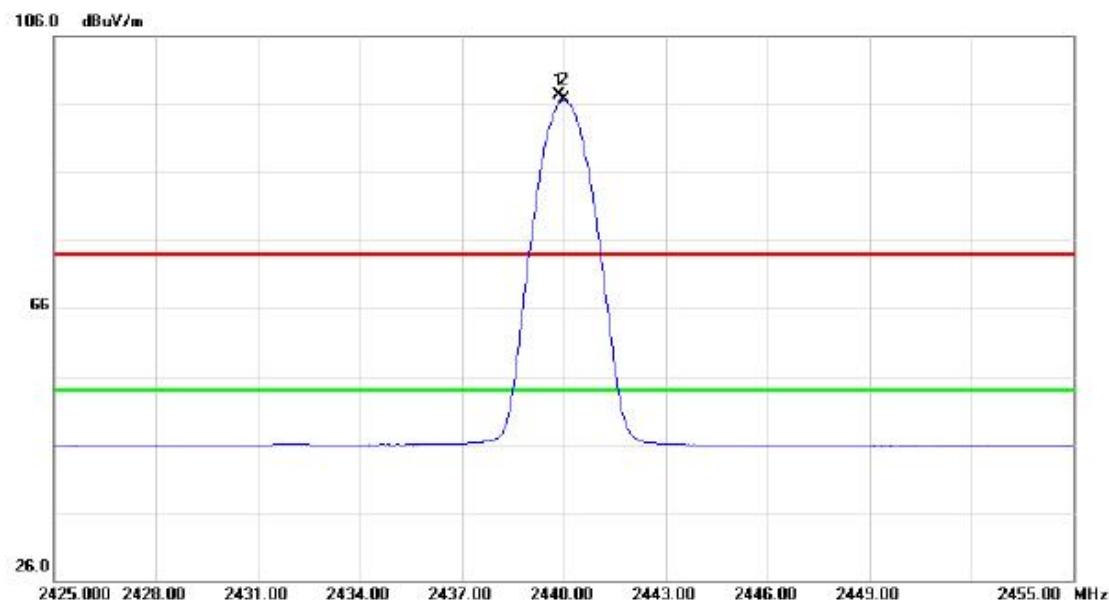**Horizontal**

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit | Over  | Detector | Comment |
|-----|-----|----------|---------|---------|----------|-------|-------|----------|---------|
|     |     |          | Level   | Factor  | ment     |       |       |          |         |
|     |     | MHz      | dBuV    | dB      | dBuV/m   | dB    |       |          |         |
| 1   | X   | 2439.850 | 65.38   | 31.95   | 97.33    | 74.00 | 23.33 | peak     |         |
| 2   | *   | 2440.000 | 64.66   | 31.95   | 96.61    | 54.00 | 42.61 | AVG      |         |

|                   |                        |
|-------------------|------------------------|
| Orthogonal Axis : | X                      |
| Test Mode :       | TX 2440MHz _CH19_1Mbps |


**Horizontal**

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-<br>ment | Limit  | Over   |                  |
|-----|-----|----------|---------------|----------------|------------------|--------|--------|------------------|
|     |     | MHz      | dBuV          | dB             | dBuV/m           | dBuV/m | dB     | Detector Comment |
| 1   |     | 4880.600 | 37.65         | 3.73           | 41.38            | 74.00  | -32.62 | peak             |
| 2   | *   | 4880.600 | 29.13         | 3.73           | 32.86            | 54.00  | -21.14 | AVG              |

Orthogonal Axis : X


Test Mode : TX 2480MHz \_CH39\_1Mbps

## Vertical

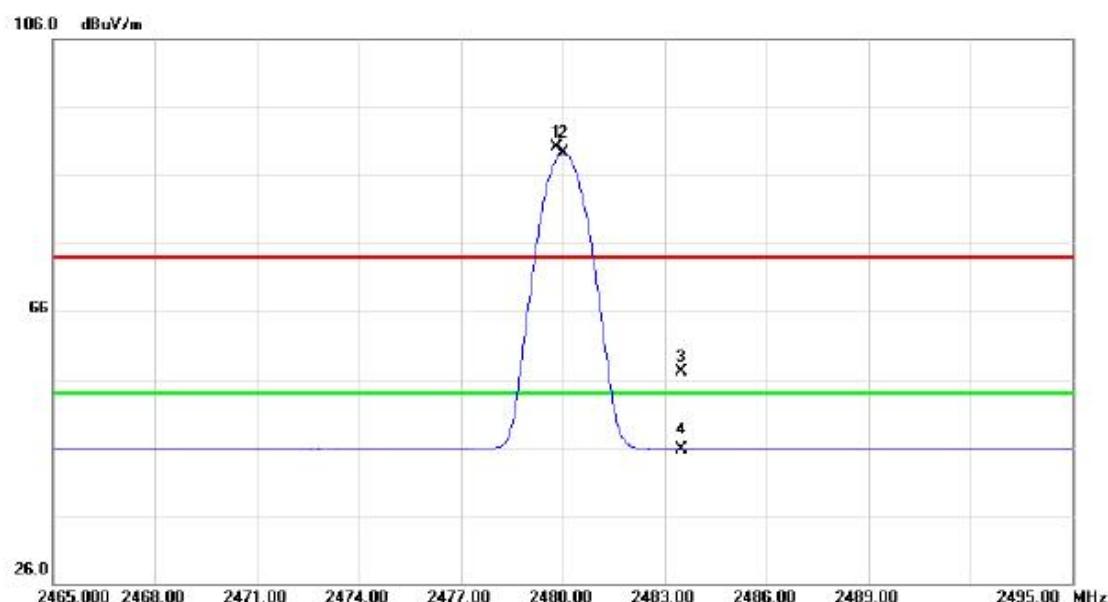

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit | Over   | Detector | Comment |
|-----|-----|----------|---------|---------|----------|-------|--------|----------|---------|
|     |     |          | Level   | Factor  | ment     |       |        |          |         |
|     |     | MHz      | dBuV    | dB      | dBuV/m   | dB    |        |          |         |
| 1   | X   | 2479.820 | 58.04   | 32.00   | 90.04    | 74.00 | 16.04  | peak     |         |
| 2   | *   | 2480.000 | 57.22   | 32.00   | 89.22    | 54.00 | 35.22  | AVG      |         |
| 3   |     | 2483.500 | 25.12   | 32.01   | 57.13    | 74.00 | -16.87 | peak     |         |
| 4   |     | 2483.500 | 13.72   | 32.01   | 45.73    | 54.00 | -8.27  | AVG      |         |


|                   |                        |
|-------------------|------------------------|
| Orthogonal Axis : | X                      |
| Test Mode :       | TX 2480MHz _CH39_1Mbps |

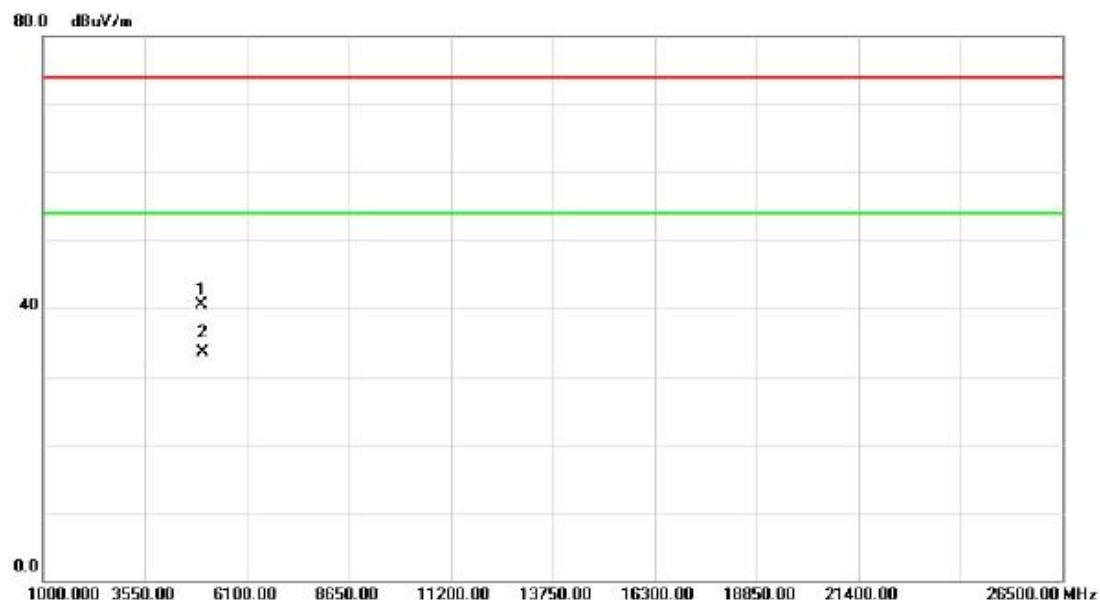**Vertical**

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Over   | Detector | Comment |
|-----|-----|----------|---------|---------|----------|--------|--------|----------|---------|
|     |     |          | Level   | Factor  | ment     |        |        |          |         |
|     |     | MHz      | dBuV    | dB      | dBuV/m   | dBuV/m | dB     |          |         |
| 1   |     | 4960.200 | 36.56   | 3.88    | 40.44    | 74.00  | -33.56 | peak     |         |
| 2   | *   | 4960.200 | 29.62   | 3.88    | 33.50    | 54.00  | -20.50 | AVG      |         |


|                   |                        |
|-------------------|------------------------|
| Orthogonal Axis : | X                      |
| Test Mode :       | TX 2480MHz _CH39_1Mbps |

### Horizontal

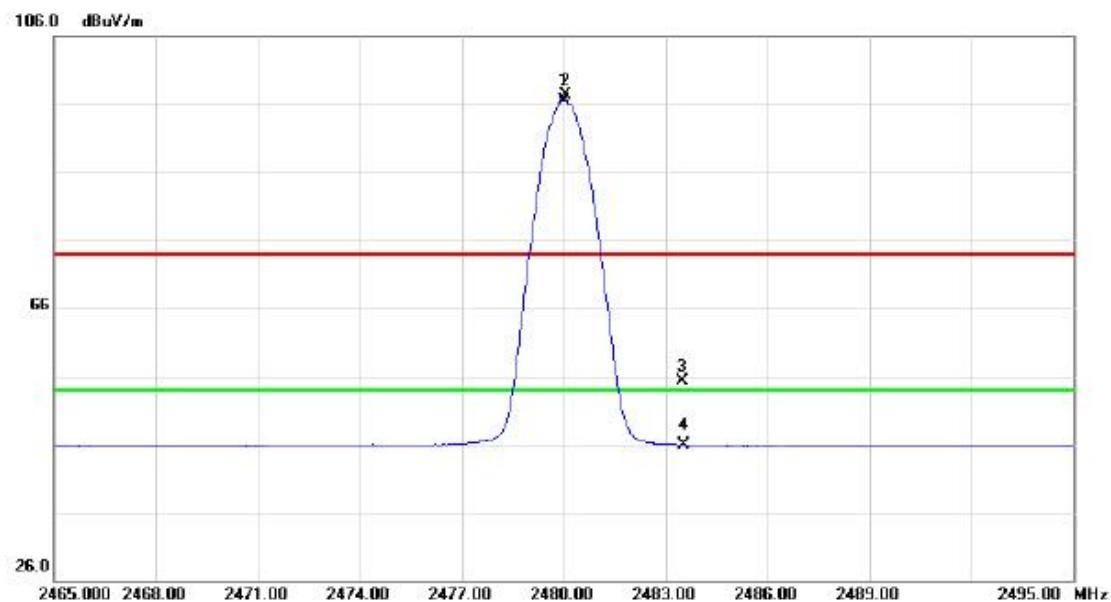

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit | Over   | Detector | Comment |
|-----|-----|----------|---------|---------|----------|-------|--------|----------|---------|
|     |     |          | Level   | Factor  | ment     |       |        |          |         |
|     |     | MHz      | dBuV    | dB      | dBuV/m   | dB    |        |          |         |
| 1   | *   | 2480.030 | 64.58   | 32.00   | 96.58    | 54.00 | 42.58  | AVG      |         |
| 2   | X   | 2480.060 | 65.32   | 32.00   | 97.32    | 74.00 | 23.32  | peak     |         |
| 3   |     | 2483.500 | 23.20   | 32.01   | 55.21    | 74.00 | -18.79 | peak     |         |
| 4   |     | 2483.500 | 13.98   | 32.01   | 45.99    | 54.00 | -8.01  | AVG      |         |

|                   |                        |
|-------------------|------------------------|
| Orthogonal Axis : | X                      |
| Test Mode :       | TX 2480MHz _CH39_1Mbps |

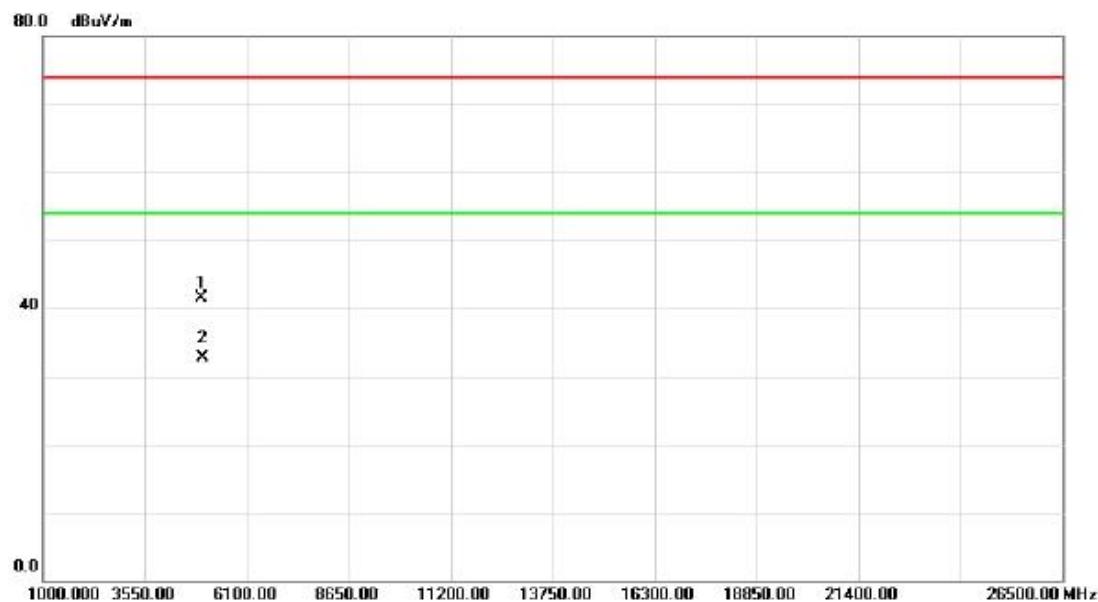
**Horizontal**

| No. | Mk. | Freq.        | Reading    | Correct | Measure-     | Limit        | Over      | Detector | Comment |
|-----|-----|--------------|------------|---------|--------------|--------------|-----------|----------|---------|
|     |     |              | Level      | Factor  | ment         |              |           |          |         |
| 1   |     | 4960.800 MHz | 37.64 dBuV | 3.88 dB | 41.52 dBuV/m | 74.00 dBuV/m | -32.48 dB | peak     |         |
| 2   | *   | 4960.800 MHz | 28.76 dBuV | 3.88 dB | 32.64 dBuV/m | 54.00 dBuV/m | -21.36 dB | AVG      |         |

## ATTACHMENT E - BANDWIDTH


| Frequency (MHz) | 6dB Bandwidth (MHz) | 99% Occupied BW (MHz) | Min. Limit (kHz) | Test Result |
|-----------------|---------------------|-----------------------|------------------|-------------|
| 2402            | 0.507               | 0.960                 | 500              | Complies    |
| 2440            | 0.520               | 0.956                 | 500              | Complies    |
| 2480            | 0.527               | 0.956                 | 500              | Complies    |

### TX CH00

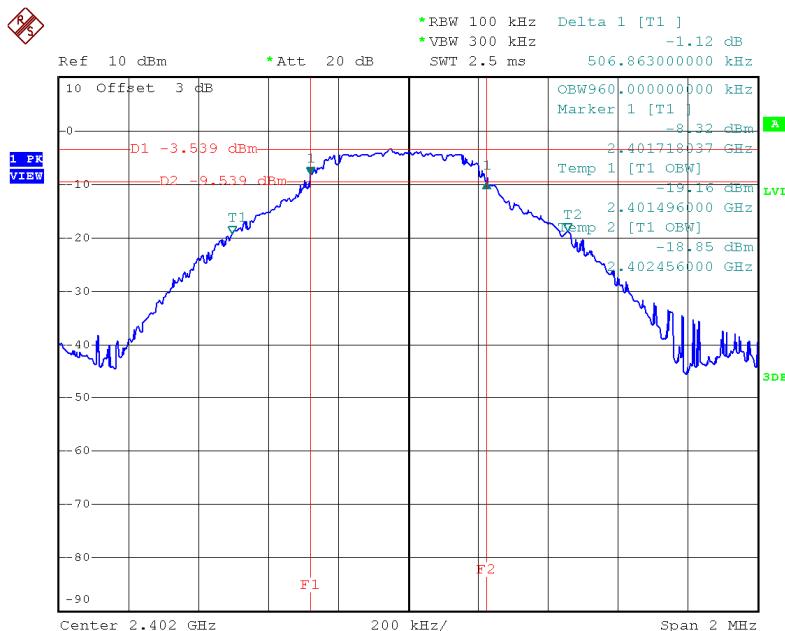


Date: 17.NOV.2014 16:38:35

## TX CH19

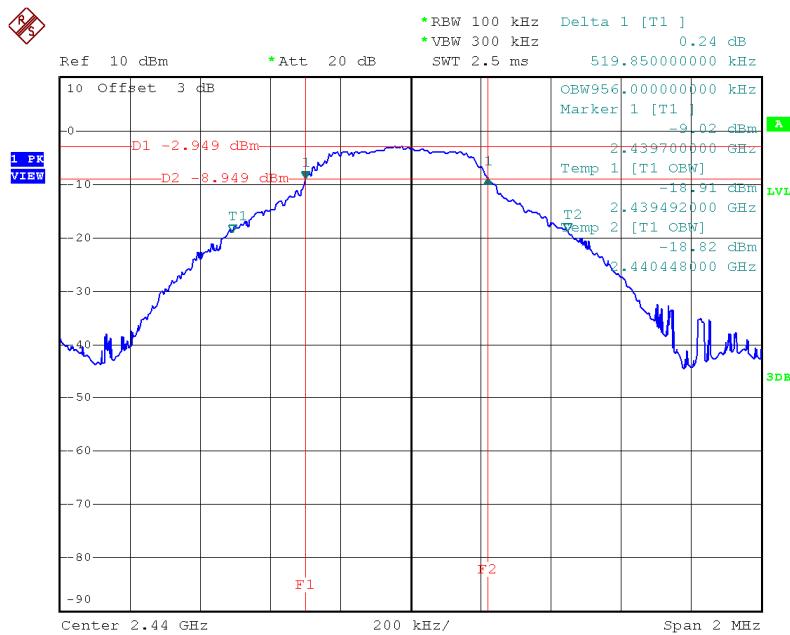

Date: 17.NOV.2014 16:41:25

## TX CH39

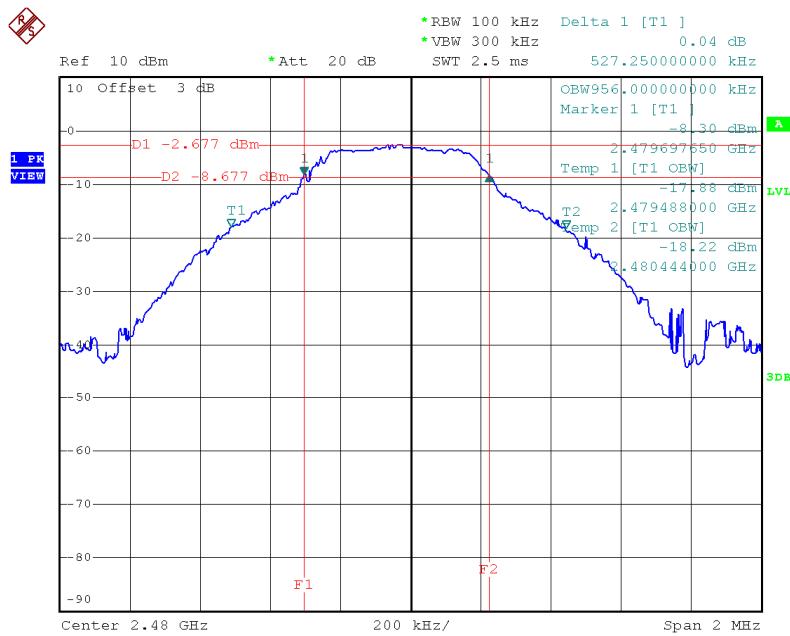

Date: 17.NOV.2014 16:42:12


## ATTACHMENT F - MAXIMUM OUTPUT POWER TEST

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (Watt) | Max. Limit (dBm) | Max. Limit (Watt) | Test Result |
|-----------------|-----------------------|------------------------|------------------|-------------------|-------------|
| 2402            | -0.09                 | 0.0010                 | 30.00            | 1.00              | Complies    |
| 2440            | -0.90                 | 0.0008                 | 30.00            | 1.00              | Complies    |
| 2480            | -1.15                 | 0.0008                 | 30.00            | 1.00              | Complies    |

**ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS  
EMISSION**


Test Mode : CH00, CH19 , CH39 - 1Mbps

### CH00 (Lower) - 1Mbps

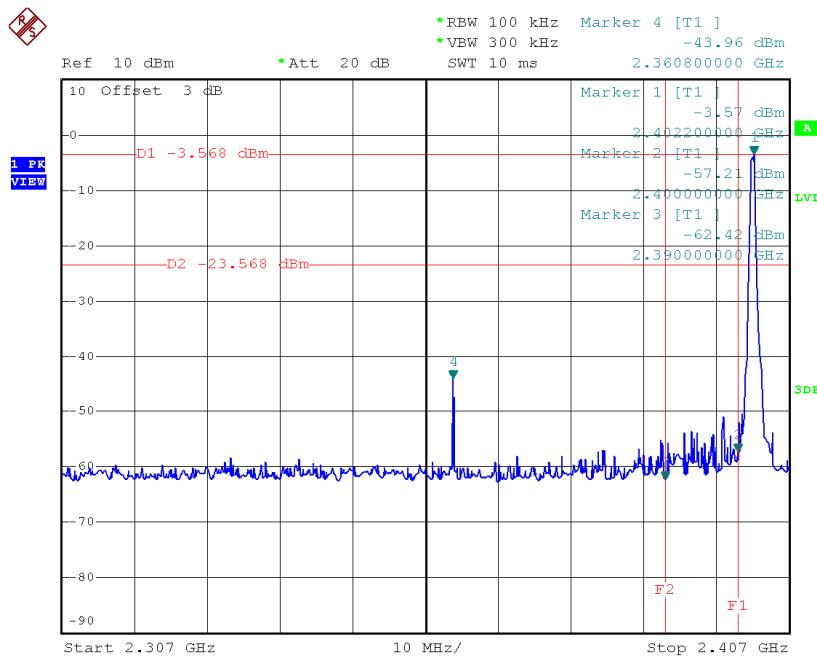


Date: 17.NOV.2014 16:38:53

### CH39 (upper) - 1Mbps

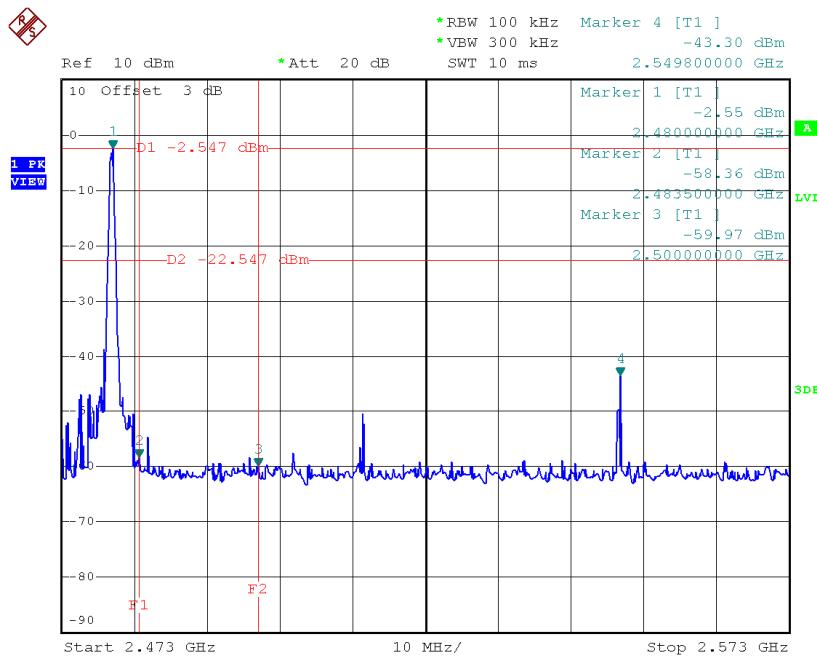


Date: 17.NOV.2014 16:42:30

## CH00 (10 Harmonic of the frequency)

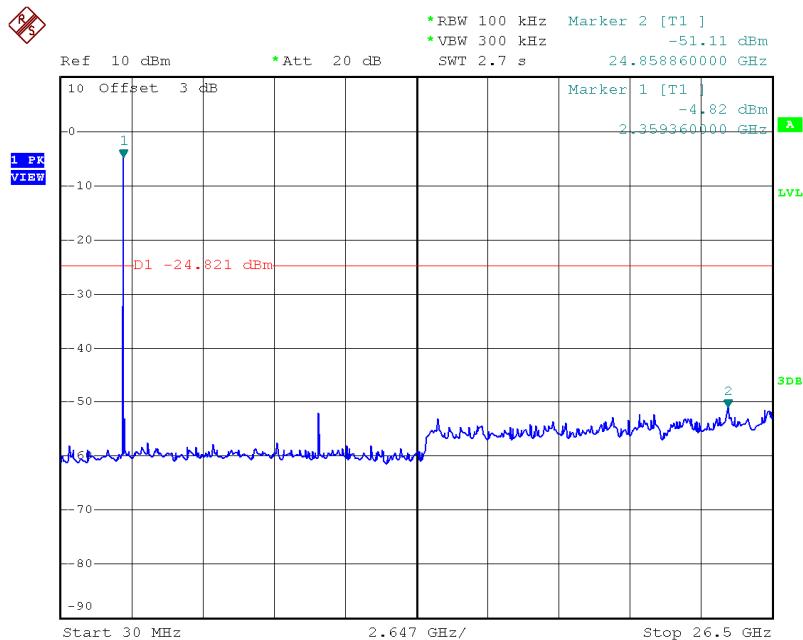


Date: 17.NOV.2014 16:38:45

## CH19 (10 Harmonic of the frequency)

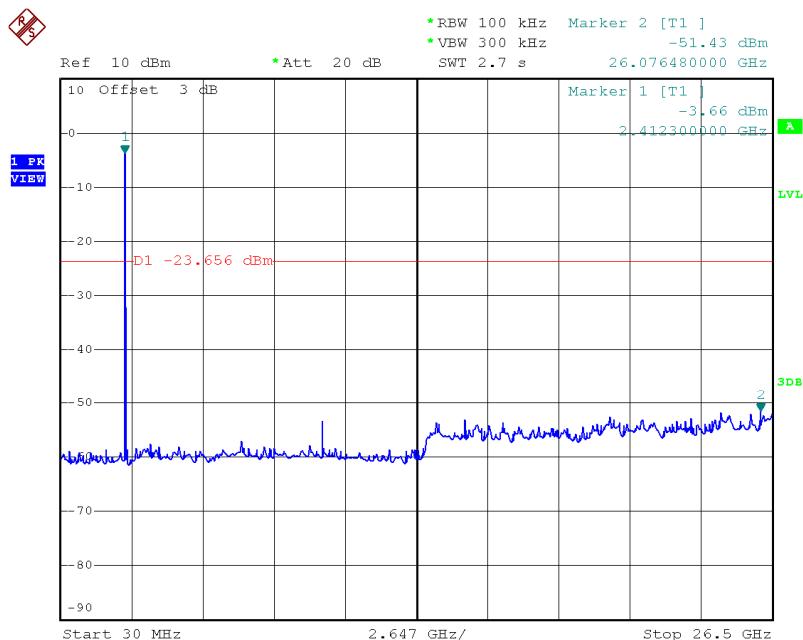

Date: 17.NOV.2014 16:41:36

## CH39 (10 Harmonic of the frequency)

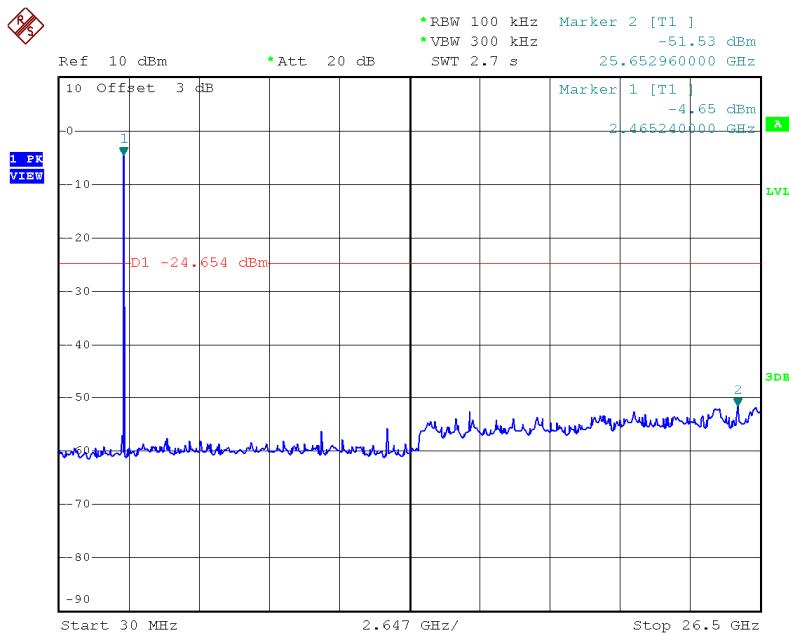


Date: 17.NOV.2014 16:42:22

## ATTACHMENT H - POWER SPECTRAL DENSITY TEST


| Frequency (MHz) | Power Density (dBm) | Max. Limit (dBm) | Result   |
|-----------------|---------------------|------------------|----------|
| 2402            | -16.74              | 8                | Complies |
| 2440            | -15.94              | 8                | Complies |
| 2480            | -14.70              | 8                | Complies |

### TX CH00

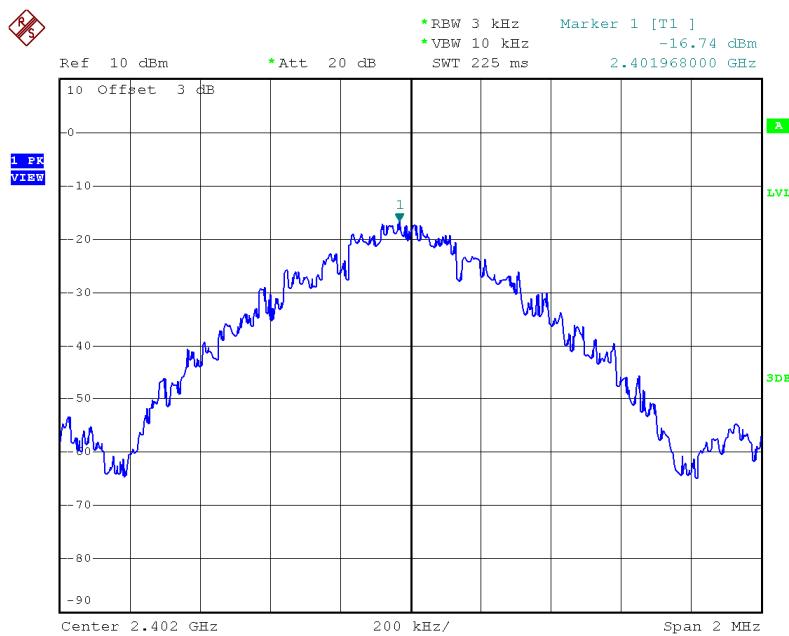


Date: 17.NOV.2014 16:38:59

## TX CH19

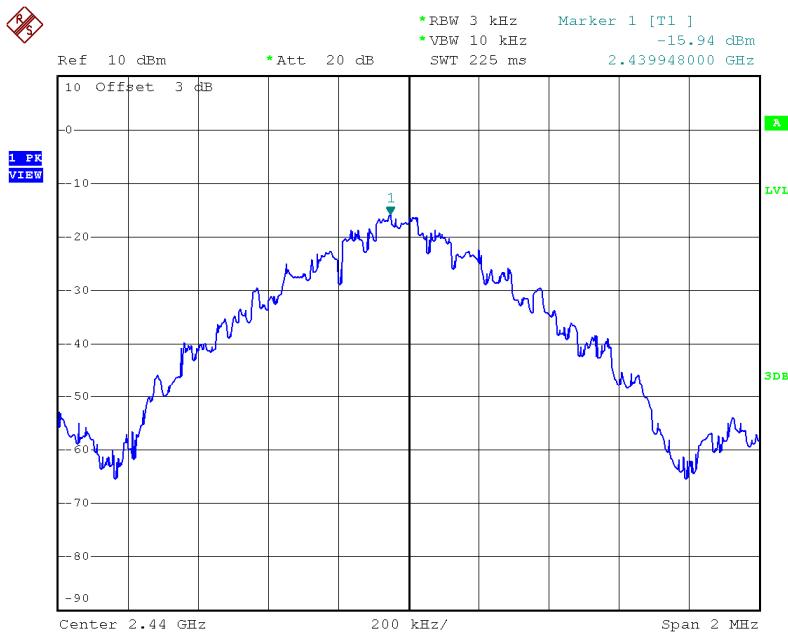

Date: 17.NOV.2014 16:41:42

## TX CH39

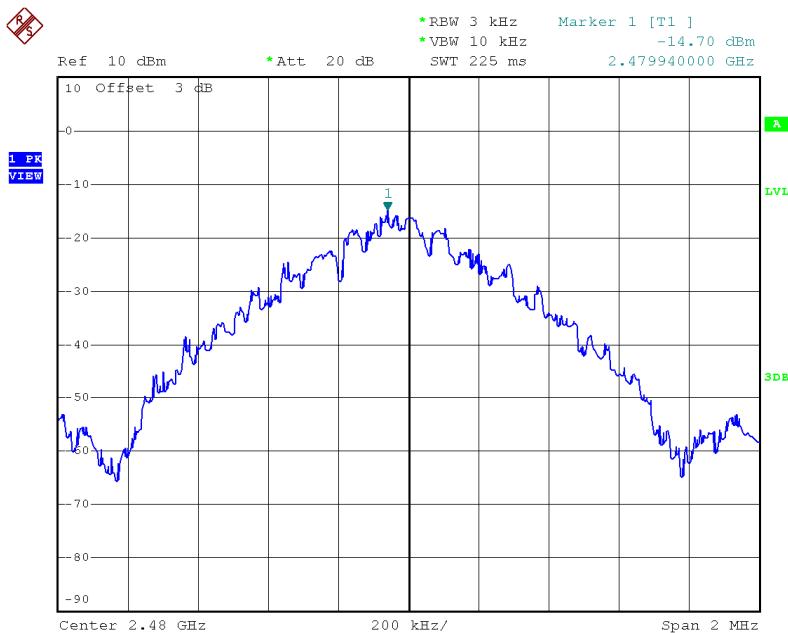

Date: 17.NOV.2014 16:42:35