



# TEST REPORT

No. FCC-PART24-2005005

<b>Test name</b>	FCC Test
<b>Product</b>	GSM Mobile Station
<b>Model</b>	Philips 968
<b>Client</b>	CEC Wireless R&D Ltd.

Telecommunication Metrology Center

of Ministry of Information Industry



## **Notice**

1. The test report is invalid if not marked with “exclusive stamp for the test report” or the stamp of the test center.
2. Any copy of the test report is invalid if not re-marked with the “exclusive stamp for the test report” or the stamp of the test center.
3. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
4. The test report is invalid if there is any evidence of erasure and/or falsification.
5. If there is any dissidence for the test report, please file objection to the test center within 15 days from the date of receiving the test report.
6. Normally, entrust test is only responsible for the samples that have undergone the test.
7. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the test center.

Address: No. 52, Huayuanbei Road, Beijing, P. R. China

Post code: 100083

Cable: 04282

Telephone: +86 10 62302041

Fax: +86 10 62304793

**Telecommunication Metrology Center  
of Ministry of Information Industry**

**No. FCC-PART-24-2005005**

**Page 3 of 38**

<b>Product</b>	GSM Mobile Station	<b>Model</b>	Philips 968
		<b>Trade mark</b>	
<b>Client</b>	CEC Wireless R&D Ltd.		
<b>Manufacturer</b>	Philips Consumer Communications and SED Company,Ltd	<b>Arrival Date of sample</b>	Mar 25, 2005
<b>Place of sampling</b>	(Blank)	<b>Carrier of the samples</b>	Xinglan Yu
<b>Quantity of the samples</b>	1	<b>Date of product</b>	/
<b>Base of the samples</b>	(Blank)	<b>Items of test</b>	8
<b>Series number</b>	355935006001521		
<b>Standard(s)</b>	FCC Part 24		
<b>Conclusion</b>	Final Judgment: Pass		
<b>Comment</b>	The test result only relates to the tested sample.		

Approved by 陆炳松 Revised by 张锐 Performed by 宋长文  
 (Lu Bingsong) (Zhang Rui) (Song Chongwen)



(Stamp)

Date of issue: Apr 05, 2005

**TABLE OF CONTENT**

<b>1 COMPETENCE AND WARRANTIES .....</b>	<b>5</b>
<b>2 GENERAL CONDITIONS .....</b>	<b>5</b>
<b>3 ABOUT EUT .....</b>	<b>5</b>
<b>4 LABORATORY ENVIRONMENT .....</b>	<b>6</b>
<b>5 SUMMARY OF TEST RESULTS .....</b>	<b>7</b>
<b>6 MAIN TEST INSTRUMENTS .....</b>	<b>8</b>
<b>7 TEST PERIOD .....</b>	<b>8</b>
<b>8 TEST LOCATION .....</b>	<b>8</b>
<b>ANNEX A MEASUREMENT RESULTS.....</b>	<b>9</b>
<b>ANNEX B EUT PHOTO .....</b>	<b>31</b>
<b>ANNEX C TEST LAYOUT .....</b>	<b>38</b>

## **1 COMPETENCE AND WARRANTIES**

**Telecommunication Metrology Center of Ministry of Information Industry** is a test laboratory accredited by DAR (DATech) – Deutschen Akkreditierungs Rat (Deutsche Akkreditierungsstelle Technik), for the tests indicated in the Certificate No. **DAT-P-114/01-10**.

**Telecommunication Metrology Center of Ministry of Information Industry** is a test laboratory accredited by CNAL – Accreditation Certificate of China National Accreditation Board for Laboratories, for the tests indicated in the Certificate No. **L0442**.

**Telecommunication Metrology Center of Ministry of Information Industry** has been accepted by the CETECOM Competent Body for the EMC test reports since April 2000.

Telecommunication Metrology Center of Ministry of Information Industry is a testing laboratory competent to carry out the tests described in this report.

**Telecommunication Metrology Center of Ministry of Information Industry** guarantees the reliability of the data presented in this report, which is the result of measurements and tests performed to the item under test on the date and under the conditions stated on the report and is based on the knowledge and technical facilities available at **Telecommunication Metrology Center of Ministry of Information Industry** at the time of execution of the test.

**Telecommunication Metrology Center of Ministry of Information Industry** is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the item under test and the results of the test.

## **2 GENERAL CONDITIONS**

- 2.1 This report only refers to the item that has undergone the test.
- 2.2 This report standalone does not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities.
- 2.3 This document is only valid if complete; no partial reproduction can be made without written approval of Telecommunication Metrology Center of Ministry of Information Industry.
- 2.4 This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of Telecommunication Metrology Center of Ministry of Information Industry and the Accreditation Bodies, if it applies.

## **3 ABOUT EUT**

### **3.1 Addressing Information Related to EUT**

**Table 1: Applicant's details (The Client)**

Name or Company	CEC Wireless R&D Ltd.
Address/Post	West M5 Building, No.1 East Road Jiuxianqiao Chao Yang District, Beijing
City	Beijing
Postal Code	100016
Country	China
Telephone	010-64349339-8534
Fax	010-84568718

**Telecommunication Metrology Center  
of Ministry of Information Industry**

**No. FCC-PART-24-2005005**

**Page 6 of 38**

**Table 2: Manufacturer's details**

Name or Company	Philips Consumer Communications and SED Company, Ltd
Address/Post	11 science and technology road,shenzhen hi-tech industrial park nanshan district,shenzhen
City	ShenZhen
Postal Code	518057
Country	China
Telephone	010-65172288
Fax	010-65181201

**3.2 Equipment under test (EUT)**

Model	Philips 968
FCC ID	RXSCT9688
Description	GSM tri-band(GPRS)digital mobile
IMEI	355935006001521
Hardware status	P5
Software status	2.14
Frequency	1850.2MHz -1909.8MHz for PCS 1900
Type of modulation	GMSK
Number of channels	299 for PCS 1900
Antenna	Tri-band
Power supply	Battery or Charger (AC Adaptor)
Output power	28.12dBm maximum EIRP measured for PCS 1900
Extreme vol. Limits	3.6VDC to 4.2VDC (nominal: 3.7 VDC)
Extreme temp. Tolerance	-30°C to +50°C

**3.3 Photographs of Equipment under test**

Photographs of MS Hand Telephone Set and Charger are respectively shown in annex B.

**4 LABORATORY ENVIRONMENT**

**Semi-anechoic chamber** (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 26 to 1000 MHz

**Telecommunication Metrology Center  
of Ministry of Information Industry**

**No. FCC-PART-24-2005005**

**Page 7 of 38**

**Control room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

**Conducted chamber** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

**Fully-anechoic chamber** (6.8 meters × 3.08 meters × 3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 26 to 1000 MHz

## 5 SUMMARY OF TEST RESULTS

Abbreviations used in this clause:	
—Pass	P
—Not applicable	NA
—Fail	F
—Not measured	NM

Clause	List	Clause in FCC rules	Verdict
1	POWER OUTPUT	24.232(b)	P
2	FREQUENCY STABILITY	2.1055/24.235	P
3	OCCUPIED BANDWIDTH	2.1049(h)(i)	P
4	EMISSION BANDWIDTH	24.238(b)	P
5	EMISSION LIMIT	24.238	P
6	BAND EDGE COMPLIANCE	24.238(b)	P
7	CONDUCTED SPURIOUS EMISSIONS	2.1057/24.238	P
8	CONDUCTED EMISSIONS	15.107/207	P

**Telecommunication Metrology Center  
of Ministry of Information Industry**

**No. FCC-PART-24-2005005**

**Page 8 of 38**

## **6 MAIN TEST INSTRUMENTS**

NO.	NAME	TYPE	SERIES NUMBER	PRODUCER
1	Test Receiver	ESS	847151/015	R&S
2	Test Receiver	ESI40	831564/002	R&S
3	BiLog Antenna	3142B	9908-1403	EMCO
4	BiLog Antenna	3142B	9908-1405	EMCO
5	Signal Generator	SMT06	831285/005	R&S
6	Signal Generator	SMP04	100070	R&S
7	LISN	ESH2-Z5	829991/012	R&S
8	Spectrum Analyzer	E4440A	MY41000262	Agilent
9	Universal Radio Communication Tester	CMU200	100680	R&S
10	Dual-Ridge Waveguide Horn Antenna	3115	9906-5827	EMCO
11	Dual-Ridge Waveguide Horn Antenna	3116	2663	EMCO
12	Dual-Ridge Waveguide Horn Antenna	3116	2661	EMCO
13	Climatic Chamber	PL-2G	343074	ESPEC

## **7 TEST PERIOD**

The performed test started on Mar 25, 2005 and finished on Apr 05, 2005.

## **8 TEST LOCATION**

Safety & EMC laboratory of Telecommunication Metrology Center of Ministry of Information Industry.

**ANNEX A MEASUREMENT RESULTS**

**A.1 OUTPUT POWER (§ 24.232(b))**

**A.1.1 Summary**

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure max power transmission and proper modulation.

This paragraph contains Burst Average conducted output power and EIRP measurements for the EUT.

In all cases, output power is within the specified limits.

**A.1.2 Conducted**

**A.1.2.1 Method of Measurements**

The EUT was set up for the max output power with pseudo random data modulation.

The power was measured with Agilent Spectrum Analyzer E4440A (peak)

These measurements were done at 3 frequencies, 1850.2 MHz, 1880.0 MHz and 1909.8 MHz (bottom, middle and top of operational frequency range).

**A.1.2.2 Limit**

Power step	Nominal Peak output power (dBm)	Tolerance (dB)
0	30dBm(1W)*	± 2

\*GSM Specification – ETSI EN 300 910 V8.5.1 (2000-11) Section 4.1

**A1.2.3 Measurement result**

EUT1: 355935006001521

Frequency(MHz)	Power Step	Peak output power(dBm)
1850.2	0	30.19
1880.0	0	28.61
1909.8	0	29.50

**A.1.3 Radiated**

**A.1.3.1 Description**

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

**A.1.3.2 Method of Measurement**

1. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power ( $P_{in}$ ) is applied to the input of the dipole, and the power received ( $P_r$ ) at the chamber's probe antenna is recorded.
2. A "reference path loss" is established as  $P_{in} + 2.15 - P_r$ .
3. The EUT is substituted for the dipole at the reference centre of the chamber and a scan is

- performed to obtain the radiation pattern.
4. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
  5. The EUT is then put into pulse mode at its maximum power level (Power Step 0).
  6. "Gated mode" power measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in FCC Rule 24.232 (b) and (c). The "reference path loss" from Step 1 is added to this result.
  7. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power ( $P_{in}$ ).
  8. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .

#### **A.1.3.3 Limits**


Power Step	Burst Peak EIRP (dBm)
0	$\leq 33\text{dBm}$ (2W)

#### **A.1.3.4 Measurement result**

Frequency(MHz)	Power Step	Peak EIRP(dBm)
1850.2	0	28.12
1880.0	0	26.91
1909.8	0	23.99

**ANALYZER SETTINGS: RBW = VBW = 3MHz**

#### **A.1.3.4.1 EIRP CHANNEL 512**

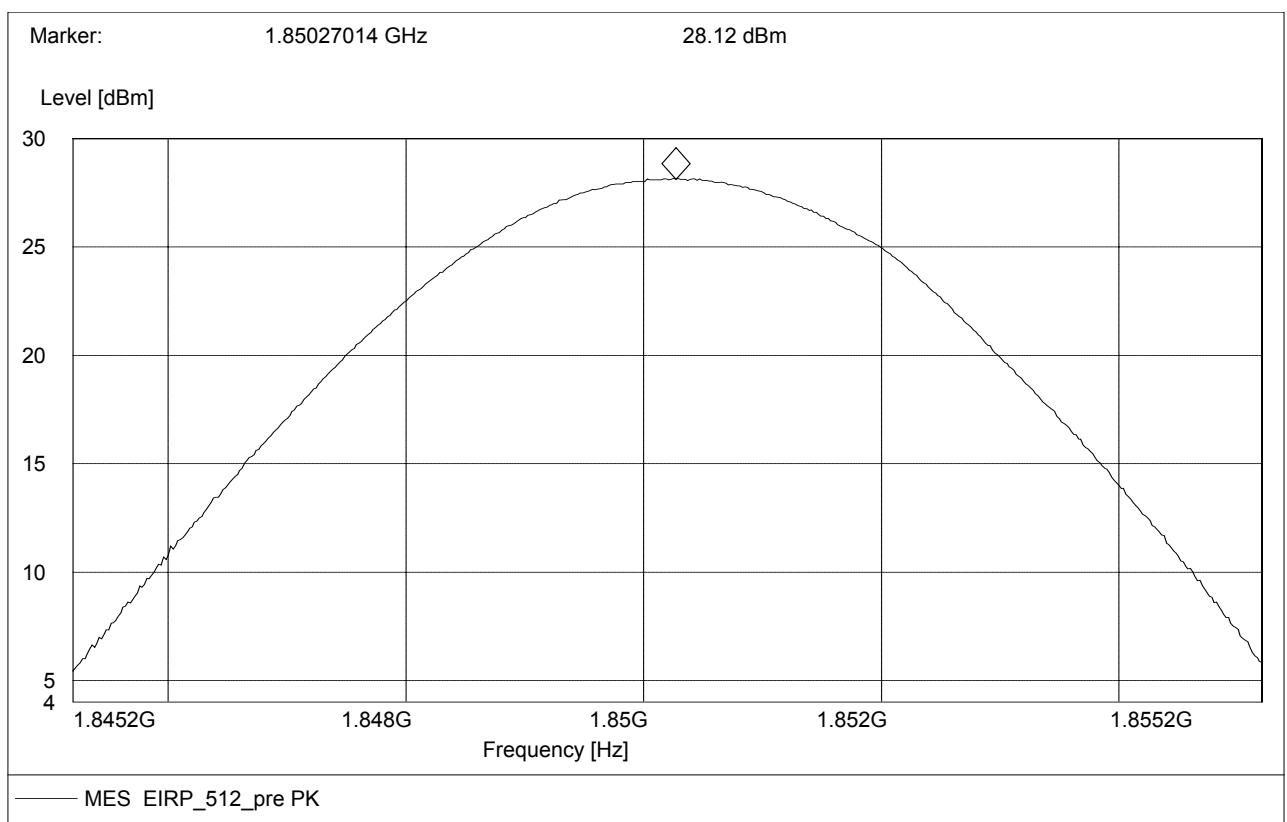


**Telecommunication Metrology Center  
of Ministry of Information Industry**


**No. FCC-PART-24-2005005**

**Page 11 of 38**

**A.1.3.4.2 EIRP CHANNEL 661**

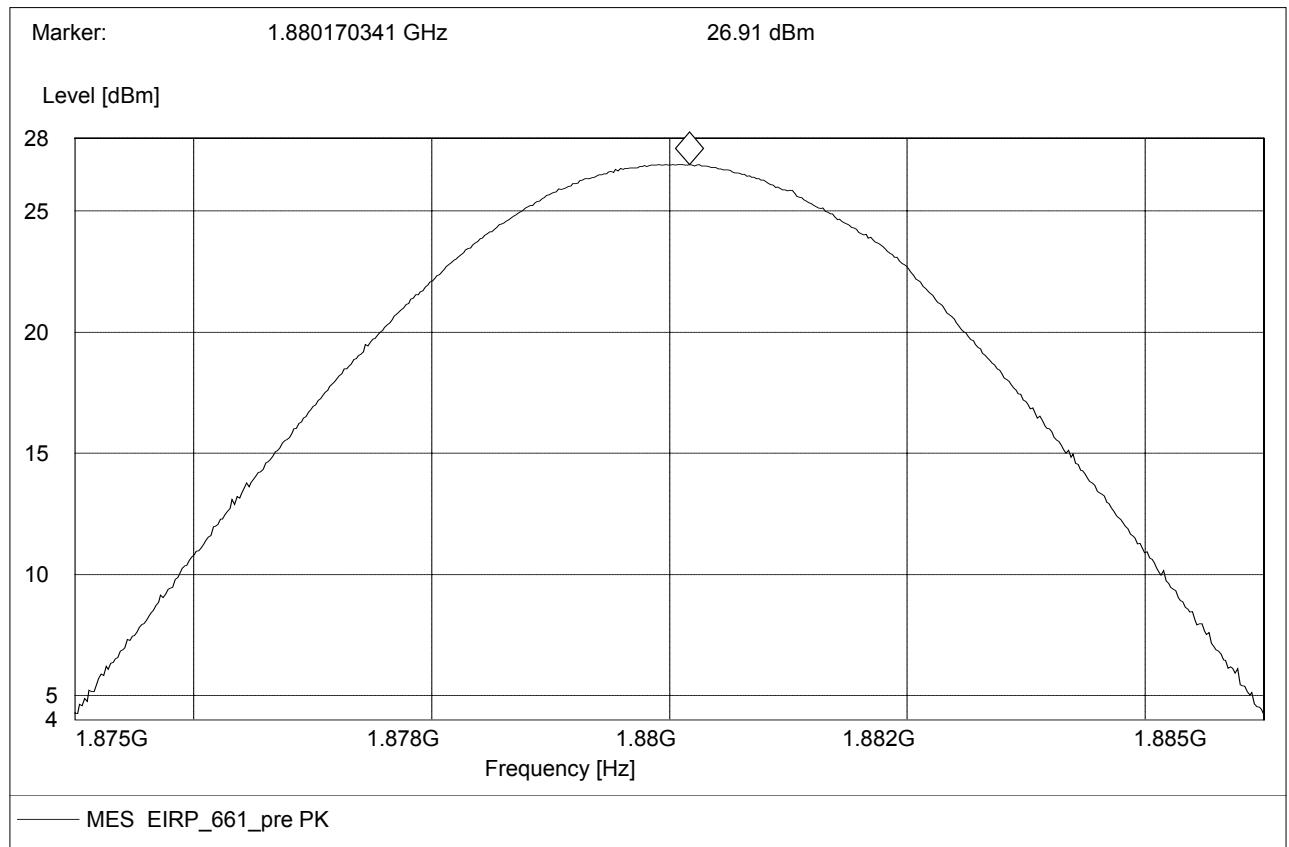

**A.1.3.4.3 EIRP CHANNEL 810**

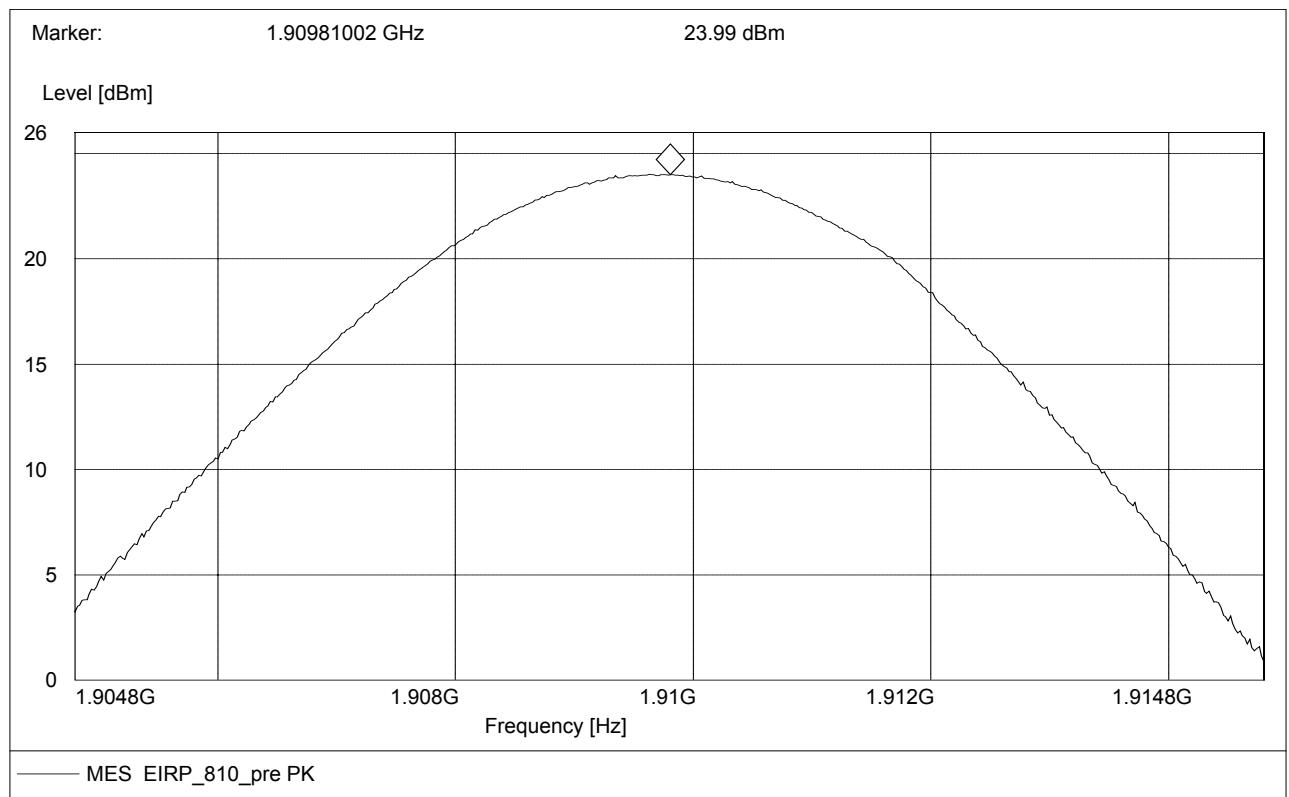

## **A.2 FREQUENCY STABILITY (§2.1055/§24.235)**

### **A.2.1 Method of Measurement**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 (centre channel), measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1 Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 (centre channel), measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10°C increments from +50°C to -30°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

### **A.2.2 Measurement Limit**

#### **A.2.2.1 For Hand carried battery powered equipment**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.4VDC and 4.2VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

#### **A.2.2.1 For equipment powered by primary supply voltage**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other

**Telecommunication Metrology Center  
of Ministry of Information Industry**

**No. FCC-PART-24-2005005**

**Page 13 of 38**

than hand carried battery equipment.

### **A.2.3 Measurement results**

#### **A.2.3.1 Frequency Error vs Voltage**

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.6	36	0.019
3.7	41	0.022
4.2	42	0.022

#### **A.2.3.2 Frequency Error vs Temperature**

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	55	0.029
-20	41	0.022
-10	32	0.017
0	47	0.025
10	39	0.021
20	50	0.027
30	44	0.023
40	41	0.022
50	47	0.025

### **A.3 OCCUPIED BANDWIDTH (§2.1049(h)(i))**

#### **A.3.1 Occupied Bandwidth Results**

Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. The table below lists the measured -20dBc BW (99%). Spectrum analyzer plots are included on the following pages.

EUT1: 355935006001521

Frequency(MHz)	Occupied Bandwidth (-20dBc BW)( kHz)
1850.2	282.379
1880.0	284.015
1909.8	280.644


**ANALYZER SETTINGS: RBW=VBW=3kHz**

**Telecommunication Metrology Center  
of Ministry of Information Industry**


**No. FCC-PART-24-2005005**

**Page 14 of 38**

**A.3.1.1 Channel 512-Occupied Bandwidth (-20dBc BW)**

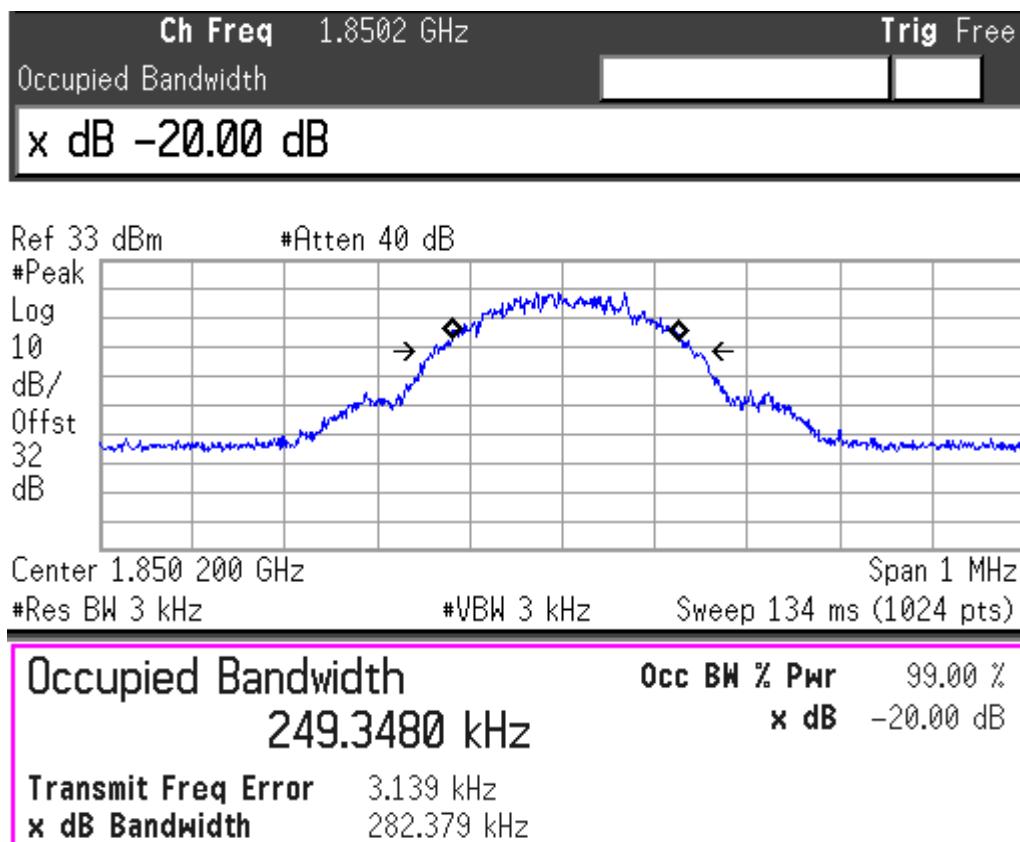

**A.3.1.2 Channel 661-Occupied Bandwidth (-20dBc BW)**

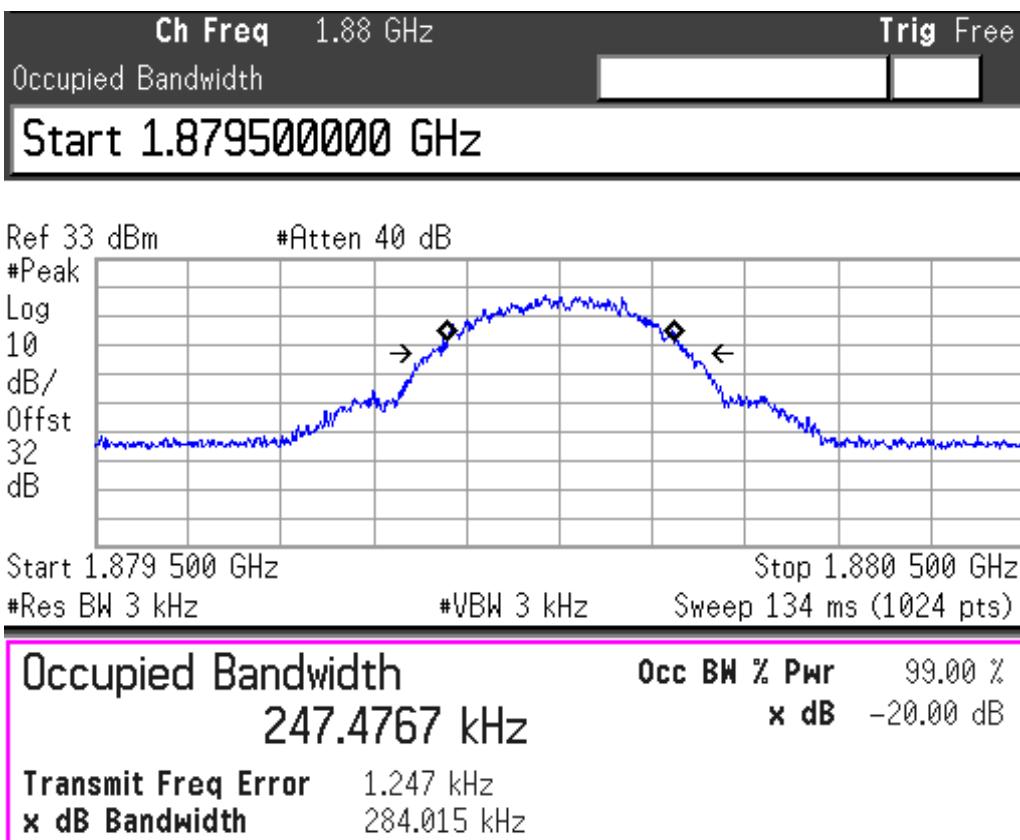


**Telecommunication Metrology Center  
of Ministry of Information Industry**

**No. FCC-PART-24-2005005**

**Page 15 of 38**

**A.3.1.3 Channel 810-Occupied Bandwidth (-20dBc BW)**

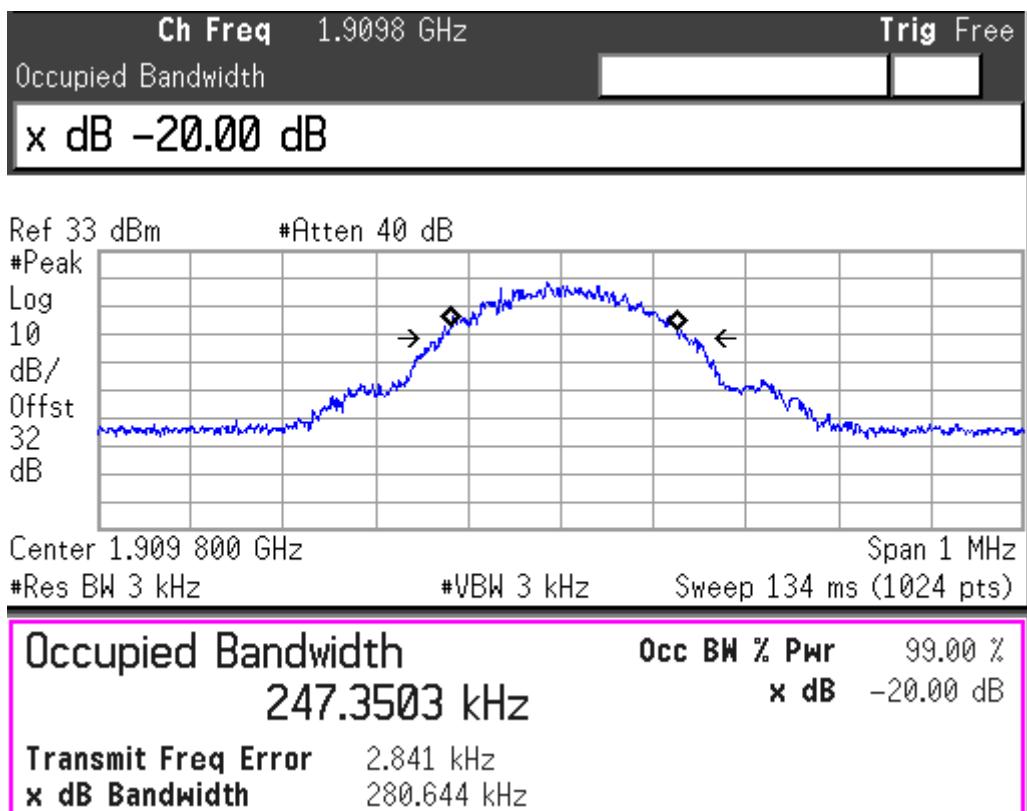

**A.4 EMISSION BANDWIDTH (§24.238(b))**

**A.4.1 Emission Bandwidth Results**

Similar to conducted emissions; Emission bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.

**PCS 1900(-26dBc)**

EUT1: 355935006001521

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)( kHz)
1850.2	314.994
1880.0	309.879
1909.8	316.858

**ANALYZER SETTINGS: RBW=VBW=3kHz;**


**Telecommunication Metrology Center  
of Ministry of Information Industry**

**No. FCC-PART-24-2005005**

**Page 16 of 38**

**PCS 1900**



**Channel 512-Occupied Bandwidth (-26dBc BW)**

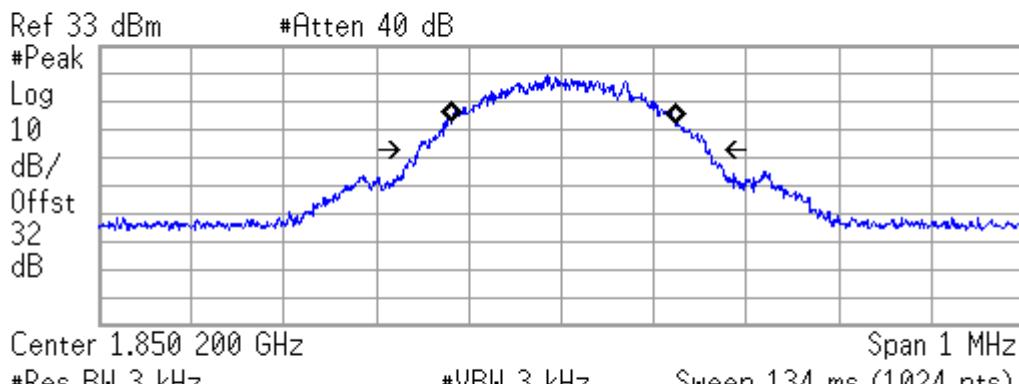

<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b>	<b>99.00 %</b>
<b>245.8722 kHz</b>	<b>x dB</b>	<b>-26.00 dB</b>

<b>Transmit Freq Error</b>	1.948 kHz
<b>x dB Bandwidth</b>	314.994 kHz

**Channel 661-Occupied Bandwidth (-26dBc BW)**

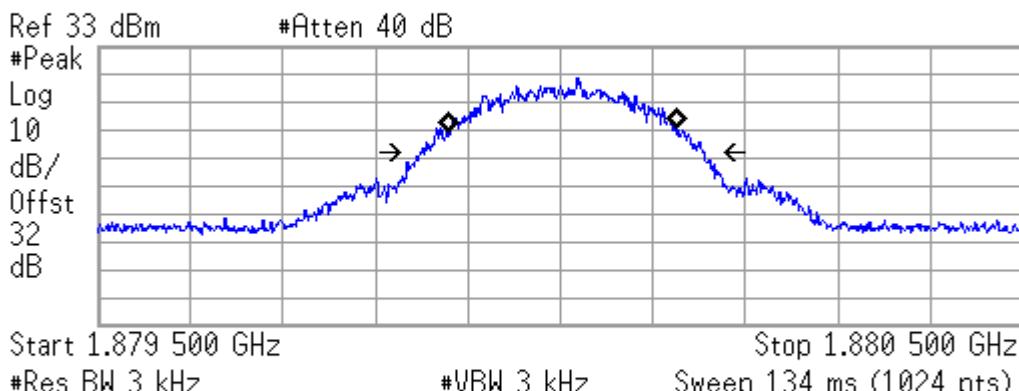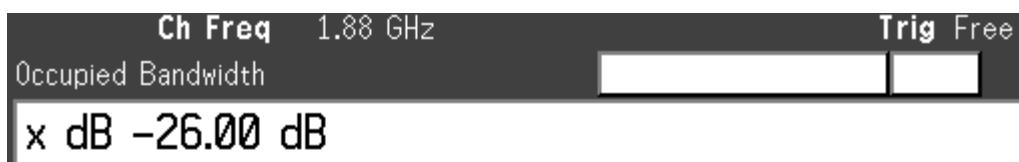

<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b>	<b>99.00 %</b>
<b>248.6994 kHz</b>	<b>x dB</b>	<b>-26.00 dB</b>


<b>Transmit Freq Error</b>	1.785 kHz
<b>x dB Bandwidth</b>	309.879 kHz

**Telecommunication Metrology Center  
of Ministry of Information Industry**

**No. FCC-PART-24-2005005**

**Page 17 of 38**

**Channel 810-Occupied Bandwidth (-26dBc BW)**

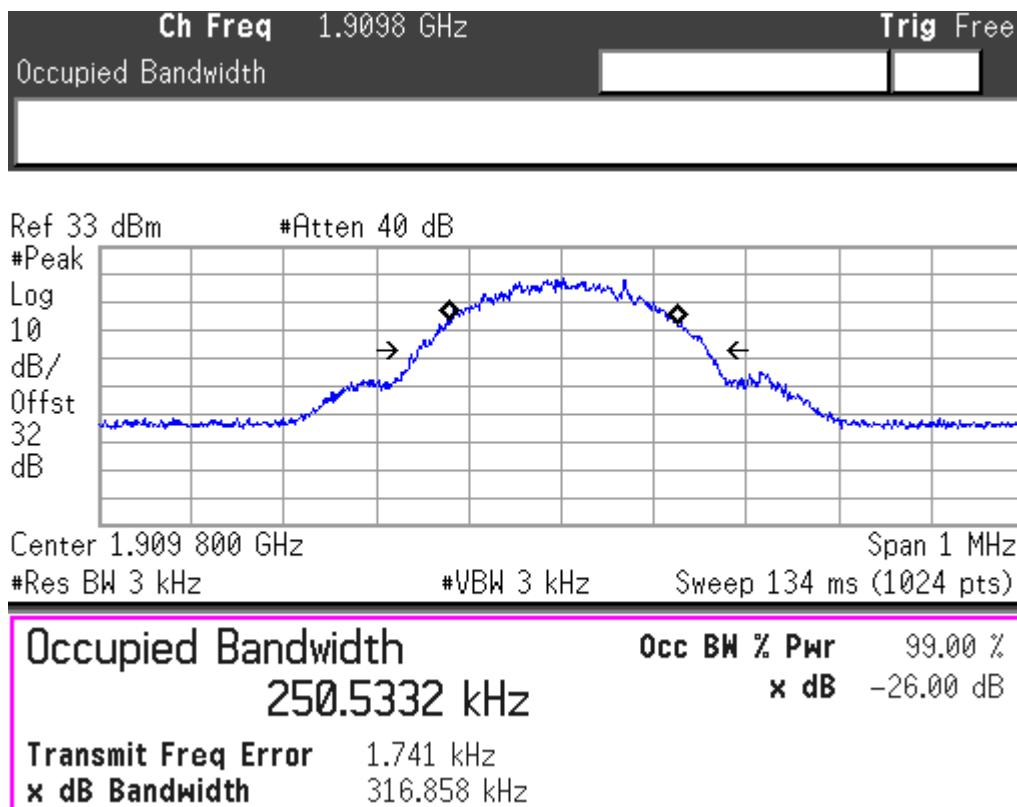

**A.5 EMISSION LIMIT (§24.238)**

**A.5.1 Measurement Method**

The site is constructed in accordance with ANSI C63.4 – 1992 requirements and is recognized by the FCC. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

**A.5.2 Measurement Limit**

Sec. 24.238 Emission Limits.

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power ( $P$ , in Watts) by at least  $43 + 10\log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power ( $P$ ) by at least  $43 + 10 \log (P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

**A.5.3 Measurement Results**


Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the USPCS band (1850.2 MHz, 1880 MHz and 1909.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

**NOTE: The spurious emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 18GHz and 20GHz very short cable connections to the antenna was used to minimize the noise level.**

**A.5.3.1 RADIATED SPURIOUS EMISSIONS-Channel 512: 30MHz – 2GHz**

**RBW=VBW=1MHz**


**NOTE: peak above the limit line is the Carrier frequency @ ch-512**

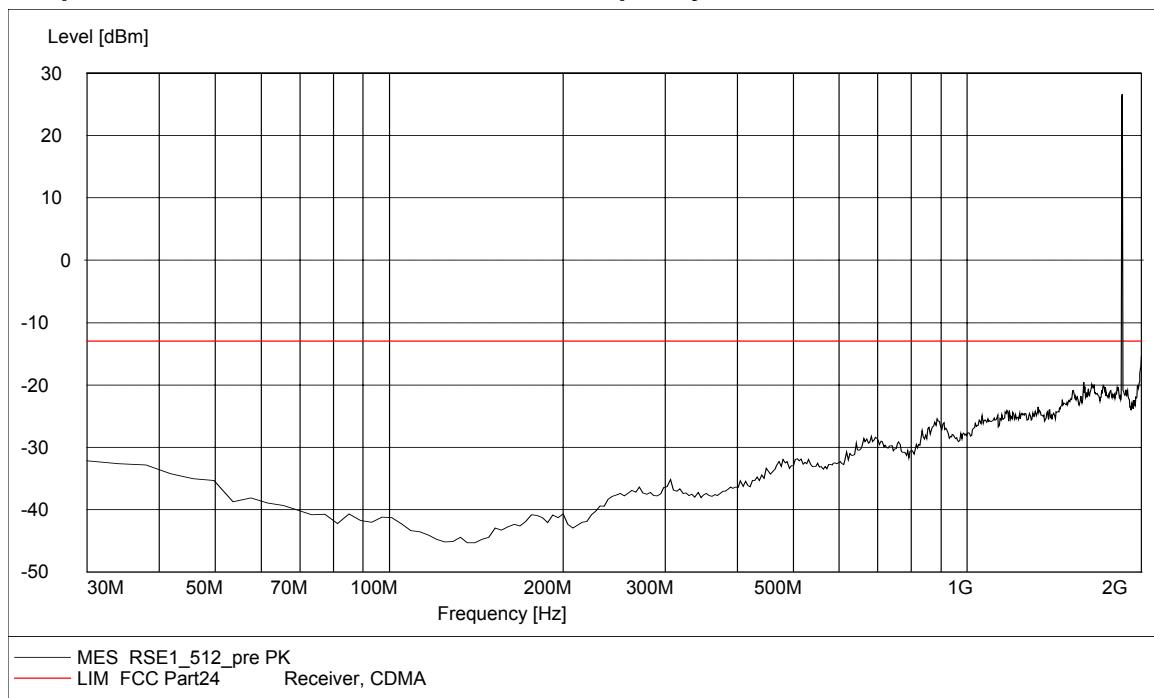

**A.5.3.2 RADIATED SPURIOUS EMISSIONS-Channel 661: 30MHz – 2GHz**

**RBW=VBW=1MHz**


**NOTE: peak above the limit line is the Carrier frequency @ ch-661**

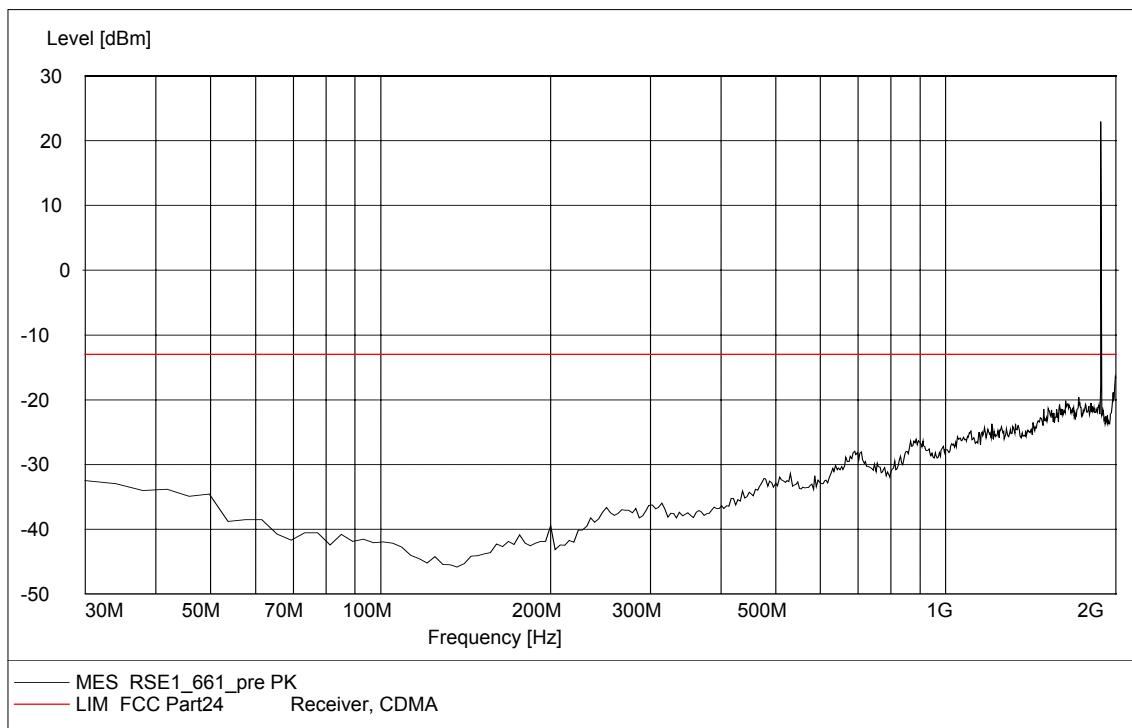

**A.5.3.3 RADIATED SPURIOUS EMISSIONS-Channel 810: 30MHz – 2GHz**


**RBW=VBW=1MHz**

**NOTE: peak above the limit line is the Carrier frequency @ ch-810**

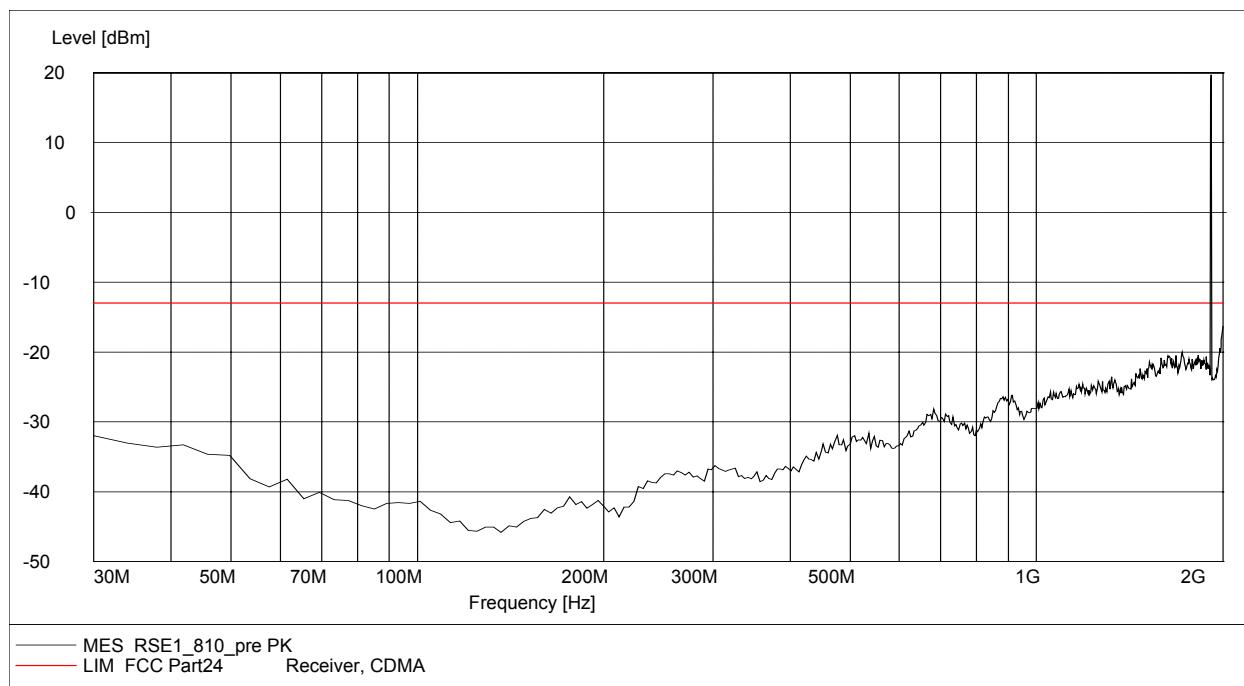


**A.5.3.4 RADIATED SPURIOUS EMISSIONS-Channel 512: 2GHz – 18GHz**

**RBW=VBW=1MHz**

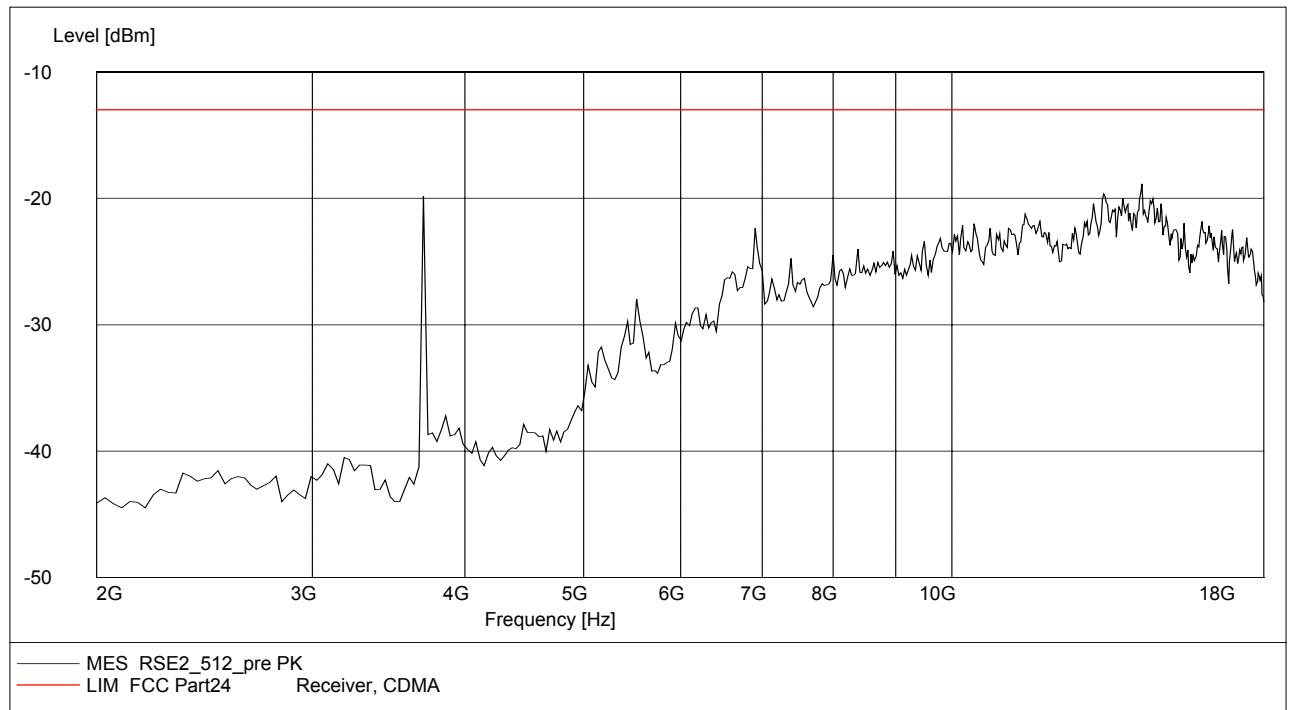


**A5.3.5 RADIATED SPURIOUS EMISSIONS-Channel 661: 2GHz – 18GHz**

**RBW=VBW=1MHz**

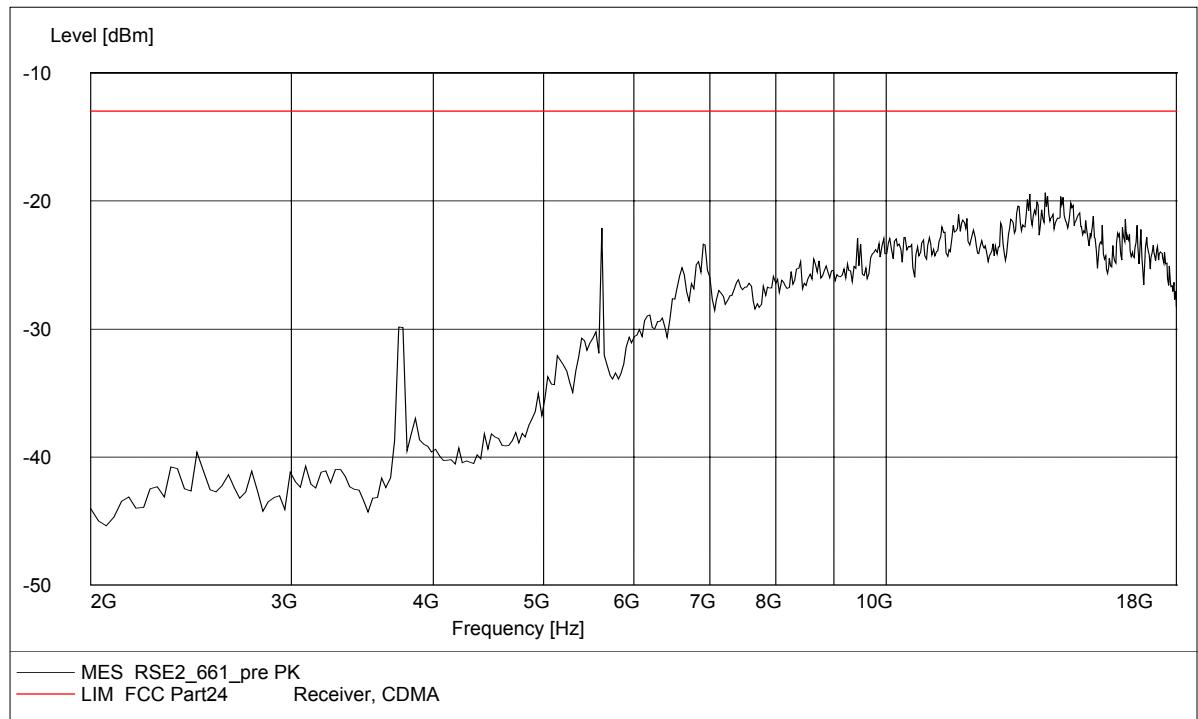

**A.5.3.6 RADIATED SPURIOUS EMISSIONS-Channel 810: 2GHz – 18GHz**


**RBW=VBW=1MHz**

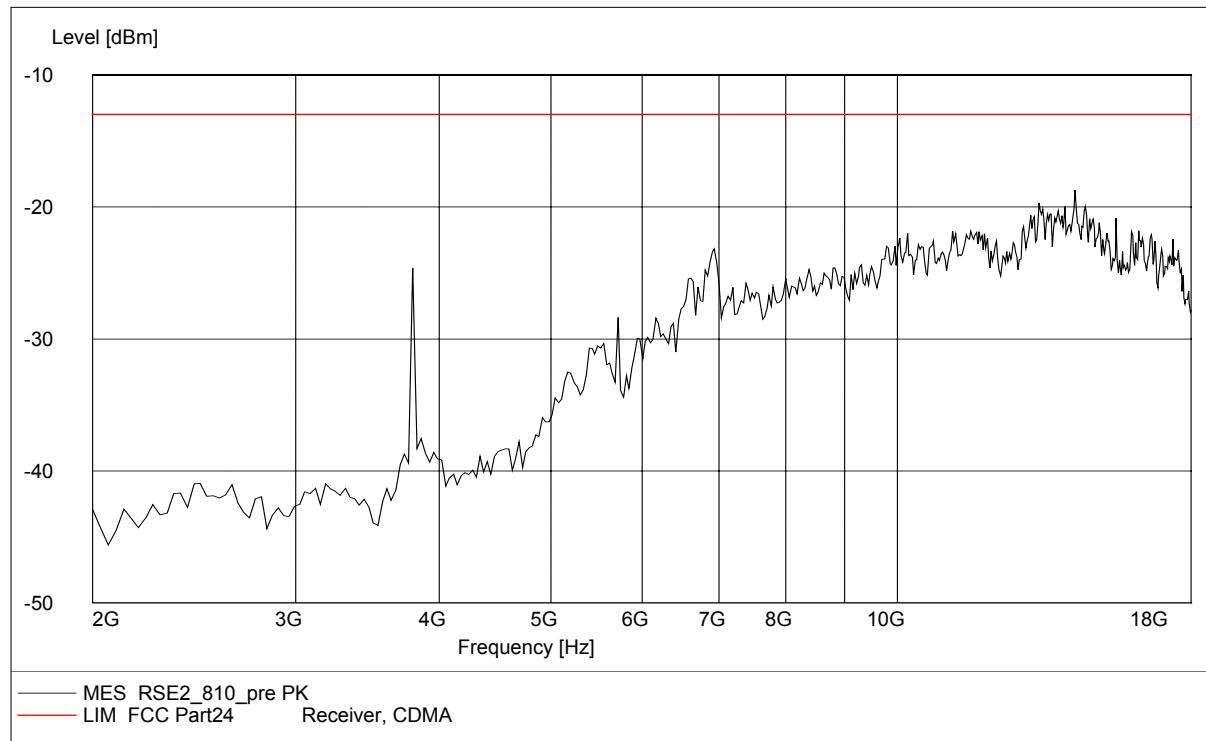

**A.5.3.7 Radiated spurious emission (18GHz-20GHz)**


**RBW=VBW=1MHz**

**Note: This plot is valid for low, mid & high channels (worst-case plot). It is same as the floor noise.**

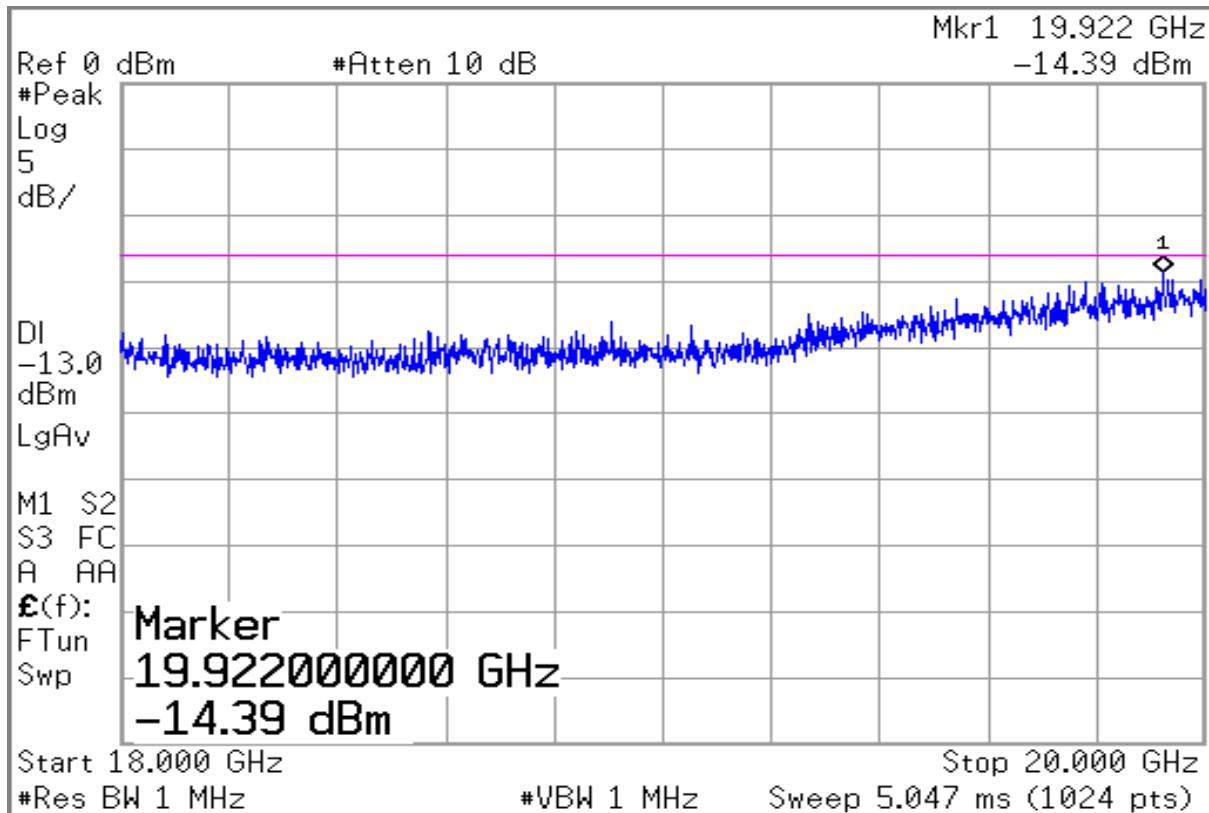


**A.5.3.8 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 30MHz – 2GHz**

**RBW=VBW=1MHz**

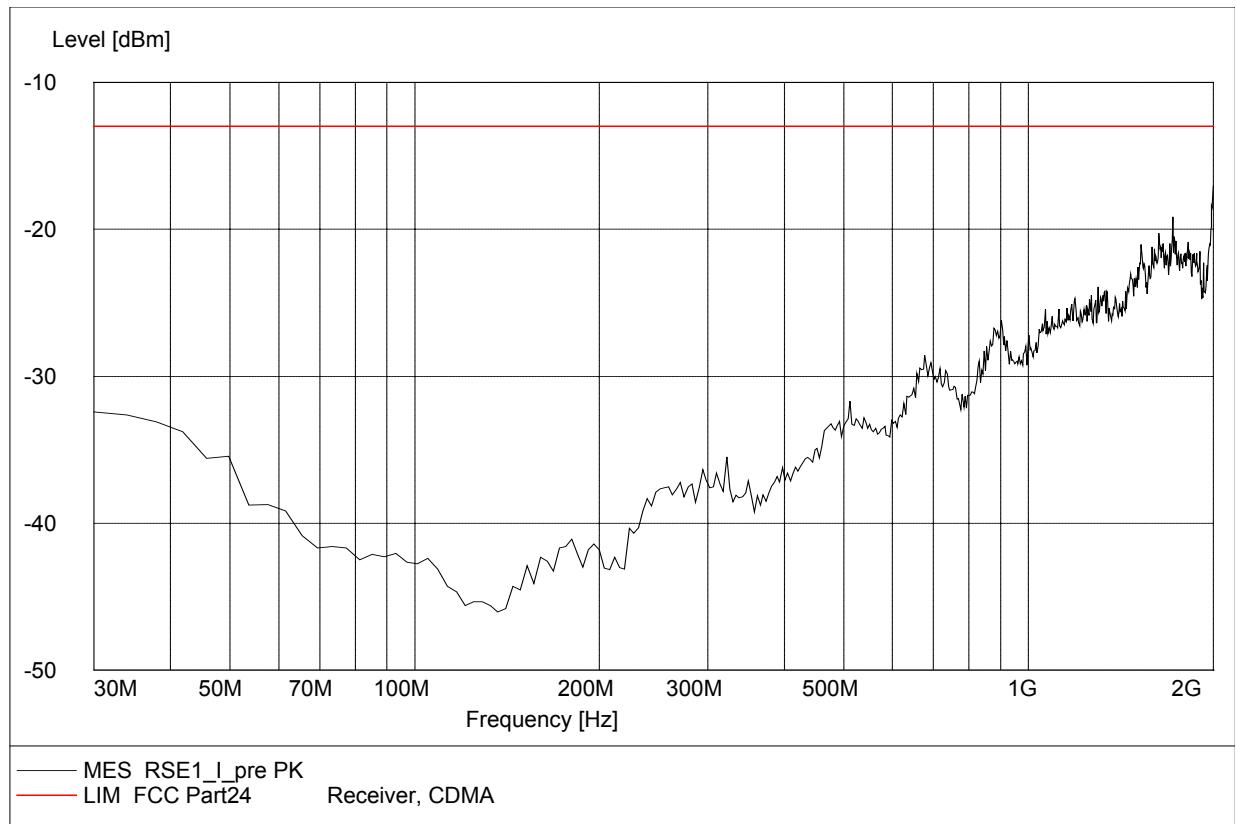

**A.5.3.9 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 2GHz – 18GHz**

**RBW=VBW=1MHz**

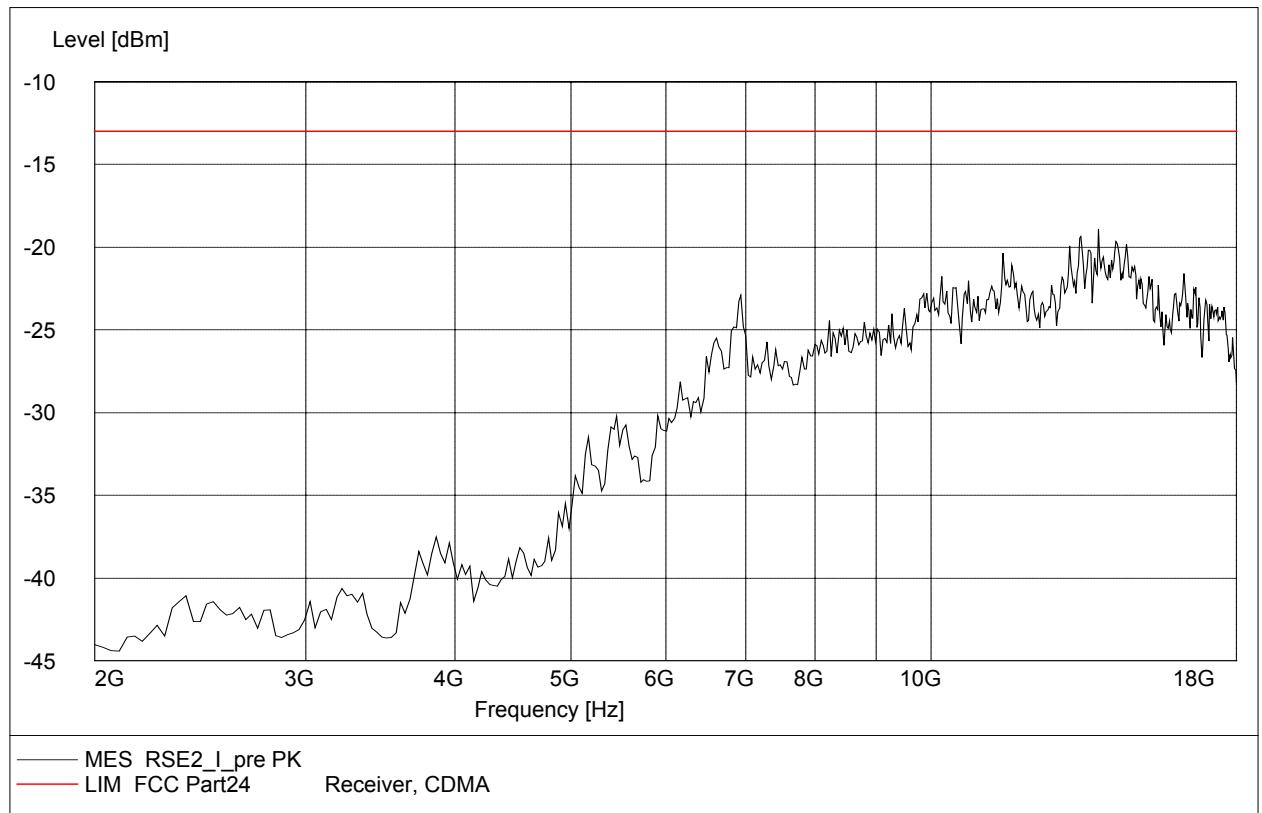

**Telecommunication Metrology Center  
of Ministry of Information Industry**


**No. FCC-PART-24-2005005**

**Page 23 of 38**

**A.5.3.10 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 18GHz – 20GHz**


**RBW=VBW=1MHz**

**Note: It is same as the floor noise.**

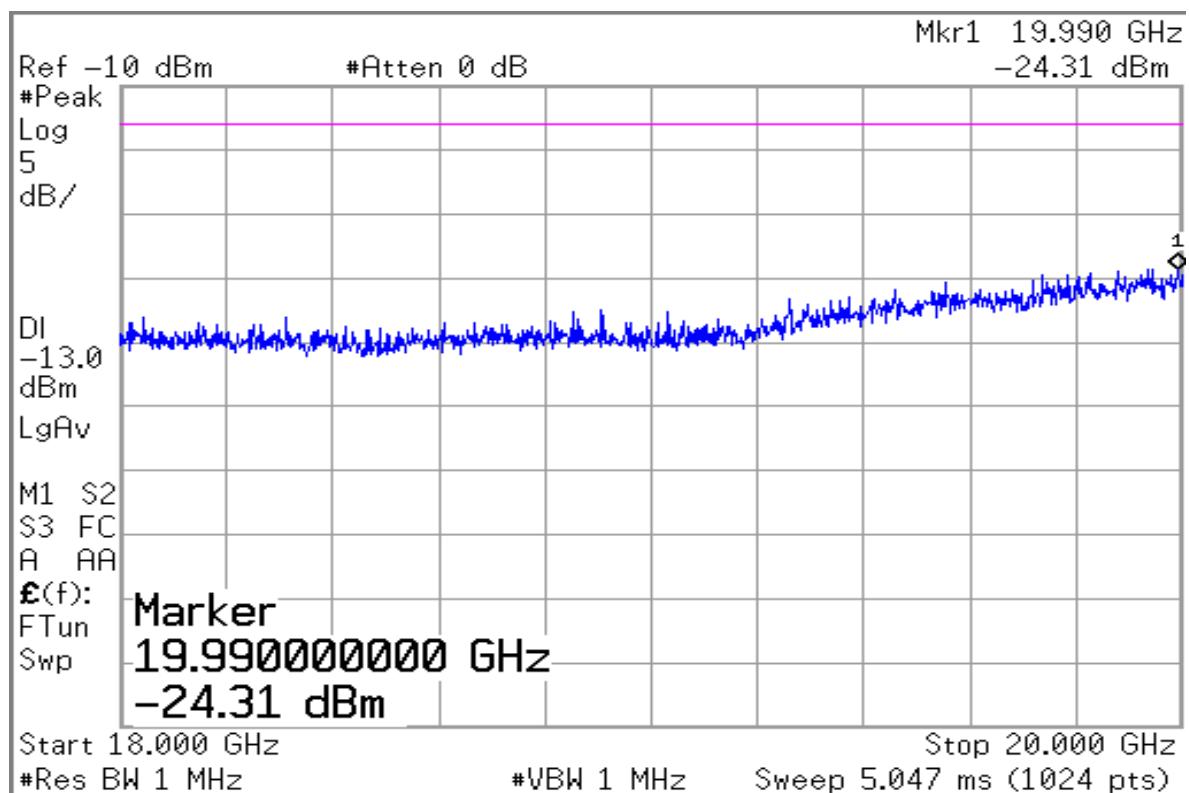


**A.6 BAND EDGE COMPLIANCE (§24.238(b))**

**A.6.1 LOW BAND EDGE BLOCK-A (PCS-1900)-Channel 512**

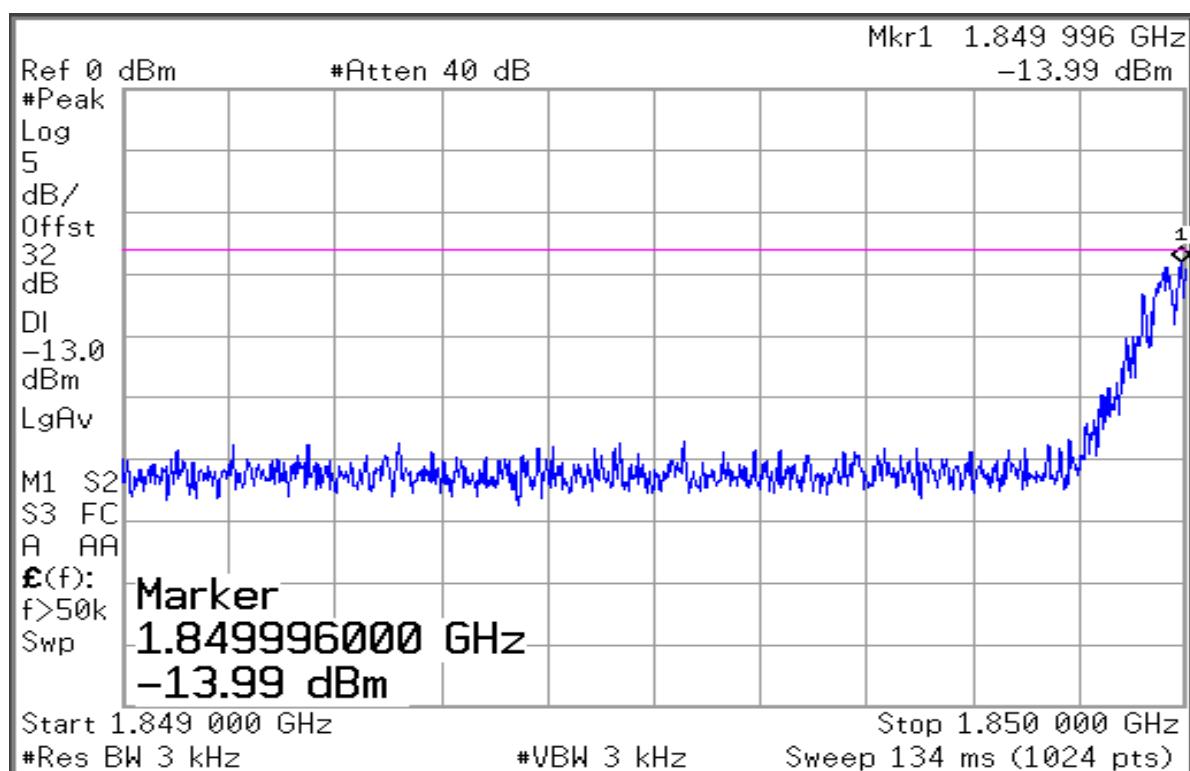

**A.6.2 HIGH BAND EDGE BLOCK-C (PCS-1900) –Channel 810**

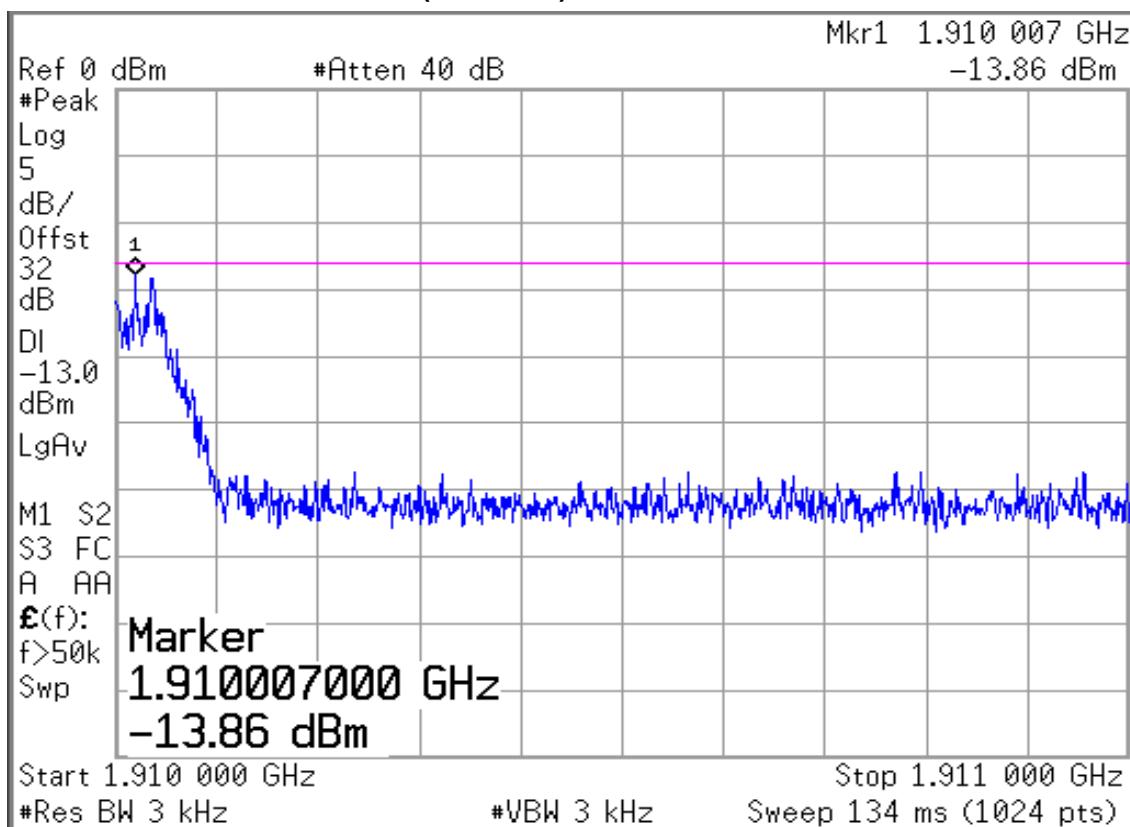

**A.7 CONDUCTED SPURIOUS EMISSION (§2.1057/§24.238)**

**A.7.1 Measurement Method**

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment under test, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

**USPCS Transmitter**

Channel	Frequency (MHz)
512	1850.2
661	1880.0
810	1909.8

**A.7.2 Measurement Limit**

Sec. 24.238 Emission Limits.

- (a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power ( $P$ , in Watts) by at least  $43+10\log(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

**Telecommunication Metrology Center  
of Ministry of Information Industry**

**No. FCC-PART-24-2005005**

**Page 25 of 38**

**A.7.3 Measurement result**


Harmonic	Tx ch. 512 Freq. (MHz)	Level (dBm)	Tx ch. 661 Freq. (MHz)	Level (dBm)	Tx ch. 810 Freq. (MHz)	Level (dBm)
2	3700.4	nf	3760	nf	3819.6	nf
3	5550.6	nf	5640	nf	5729.4	nf
4	7400.8	nf	7520	nf	7639.2	nf
5	9251.0	nf	9400	nf	9549.0	nf
6	11101.2	nf	11280	nf	11458.8	nf
7	12951.4	nf	13160	nf	13368.6	nf
8	14801.6	nf	15040	nf	15278.4	nf
9	16651.8	nf	16920	nf	17188.2	nf
10	18502.0	nf	18800	nf	19098.0	nf

nf: Noise floor

**A.7.3.1 Channel 512: 30MHz – 4GHz**

Spurious emission limit –13dBm.

**NOTE: peak above the limit line is the carrier frequency.**

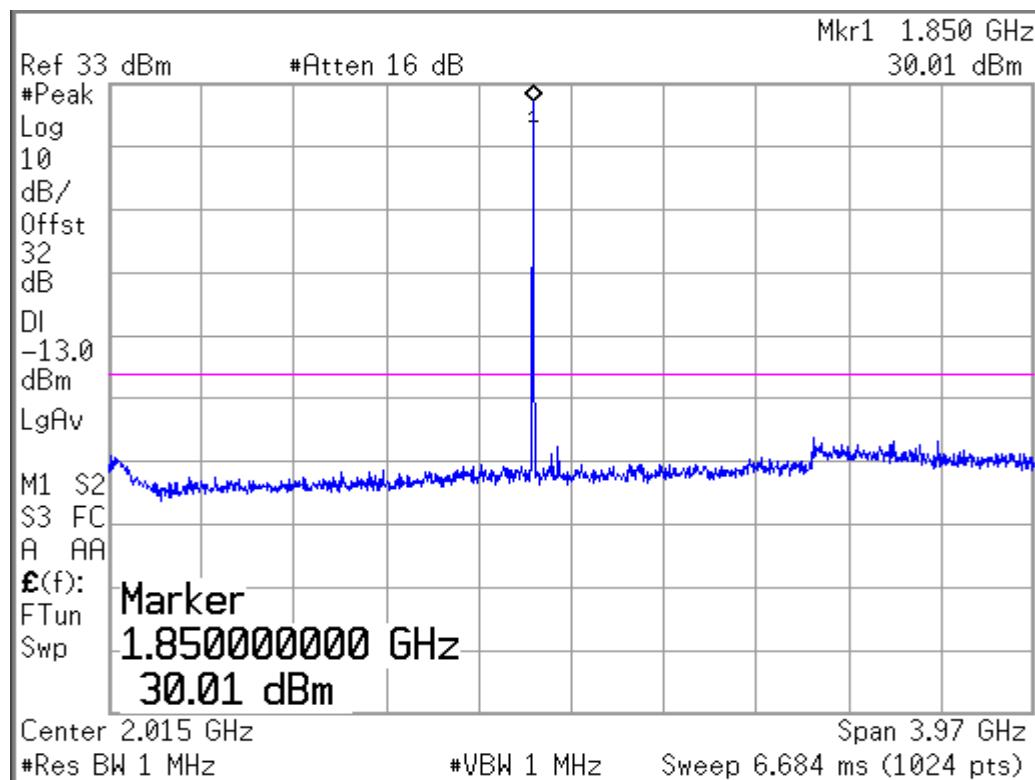


**Telecommunication Metrology Center  
of Ministry of Information Industry**

**No. FCC-PART-24-2005005**

**Page 26 of 38**

**A.7.3.2 Channel 512: 4GHz – 20GHz**


Spurious emission limit –13dBm.

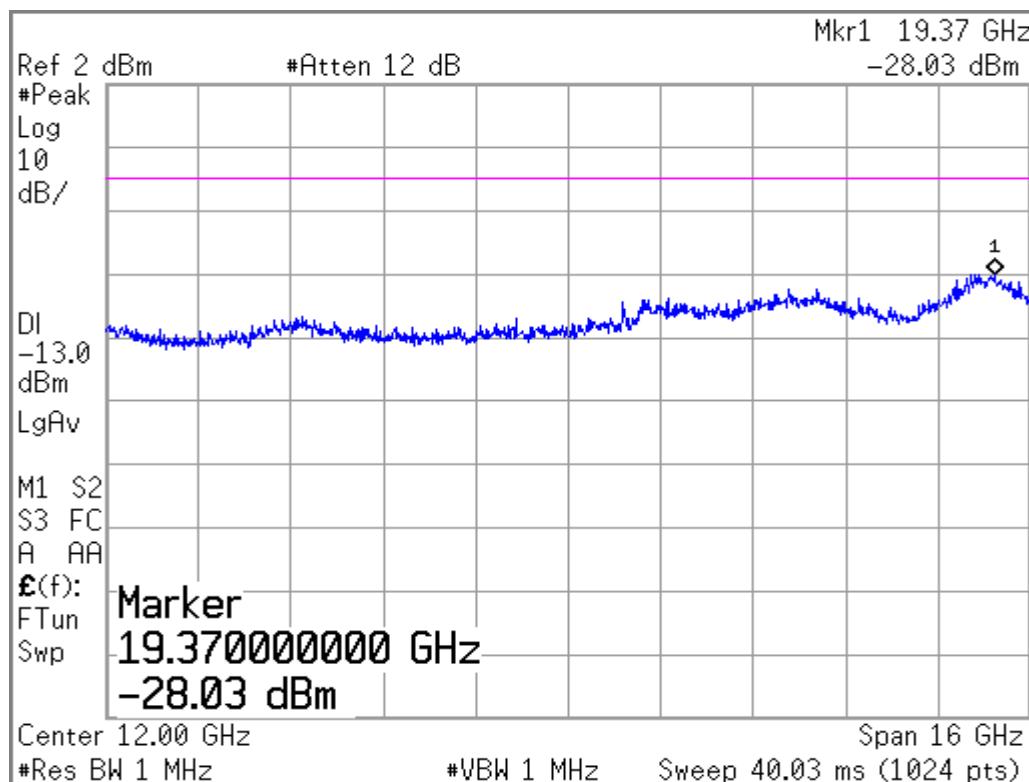

**A.7.3.3 Channel 661: 30MHz – 4GHz**

Spurious emission limit –13dBm

**NOTE: peak above the limit line is the carrier frequency.**

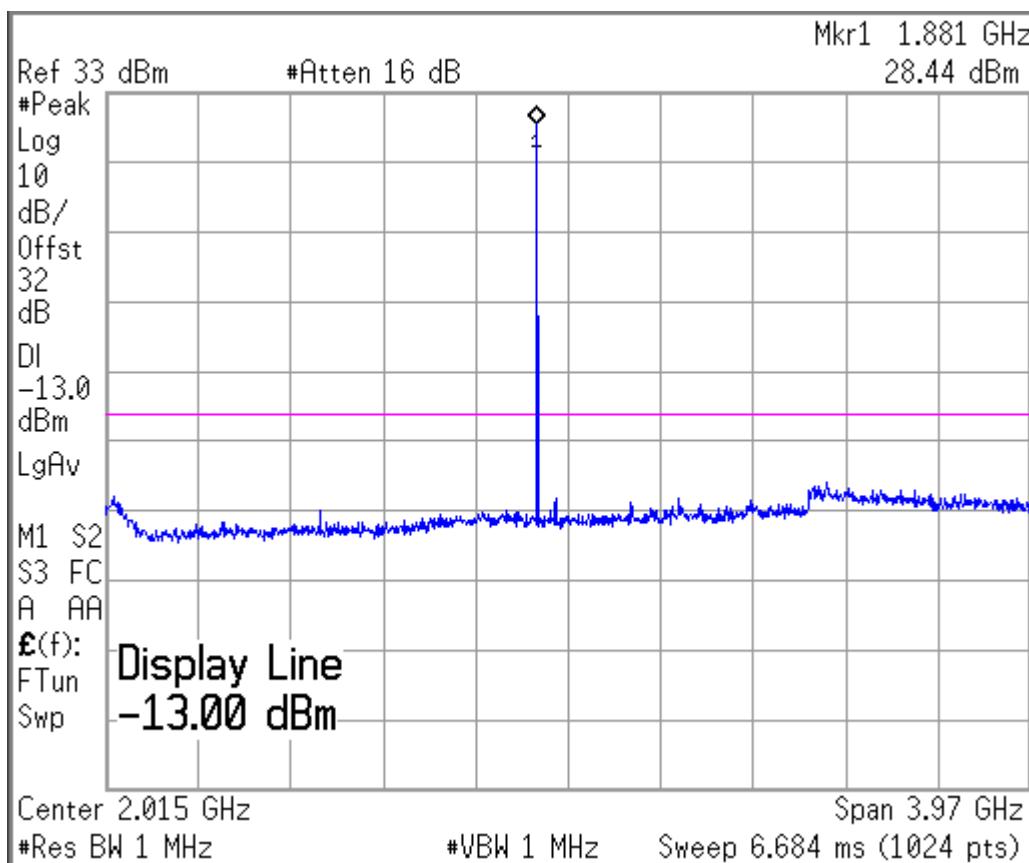

**Telecommunication Metrology Center  
of Ministry of Information Industry**

**No. FCC-PART-24-2005005**

**Page 27 of 38**

**A.7.3.4 Channel 661: 4GHz –20GHz**


Spurious emission limit –13dBm



**A.7.3.5 Channel 810: 30MHz – 4GHz**


Spurious emission limit –13dBm.

**NOTE: peak above the limit line is the carrier frequency.**

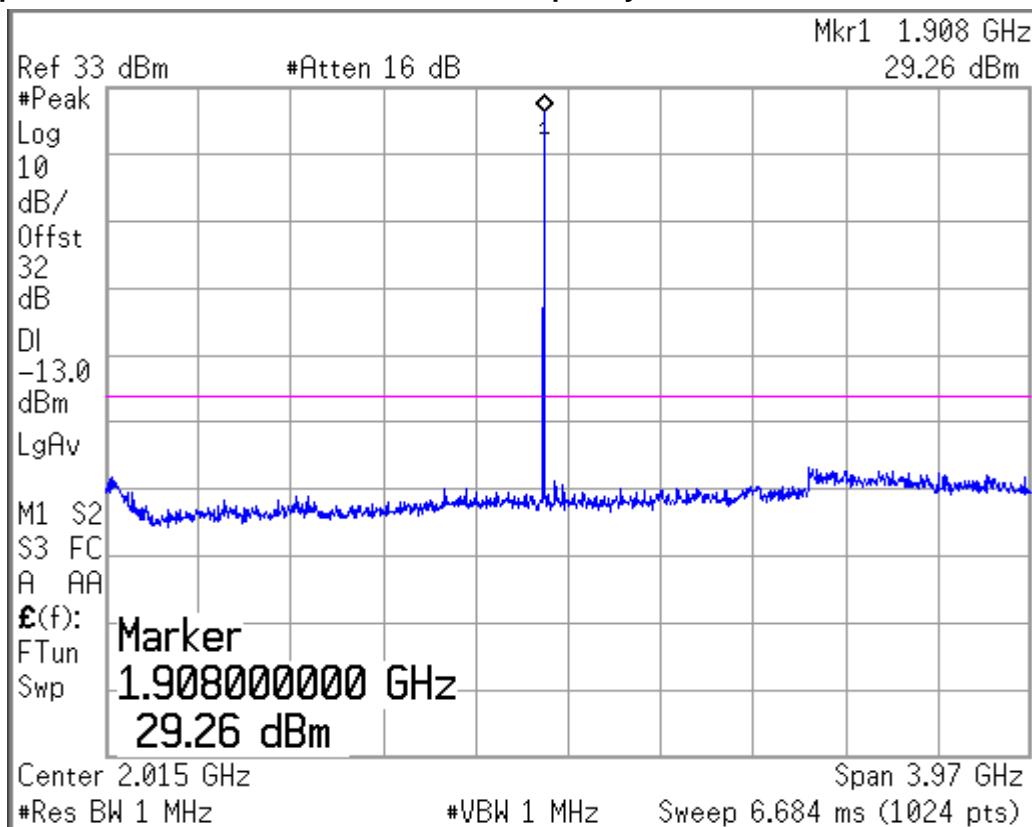


**A.7.3.6 Channel 810: 4GHz – 20GHz**

Spurious emission limit –13dBm.

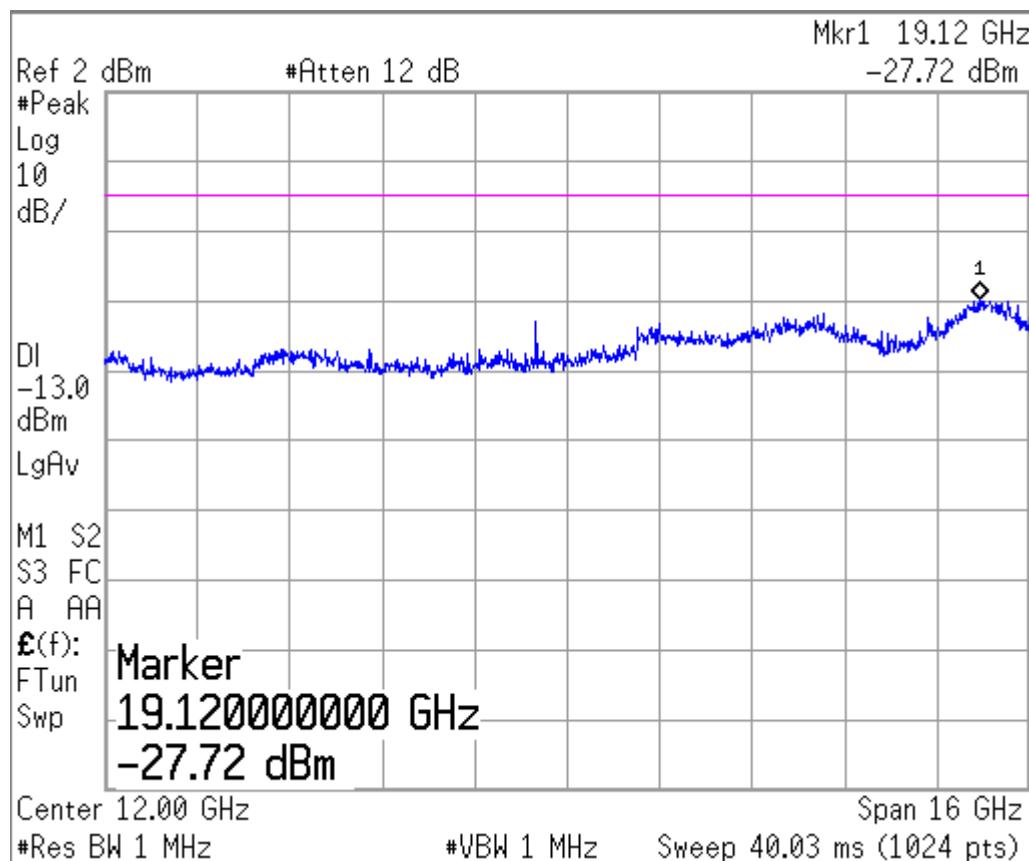


**A.7.3.7 Idle mode: 30MHz – 4GHz**

Spurious emission limit –13dBm.

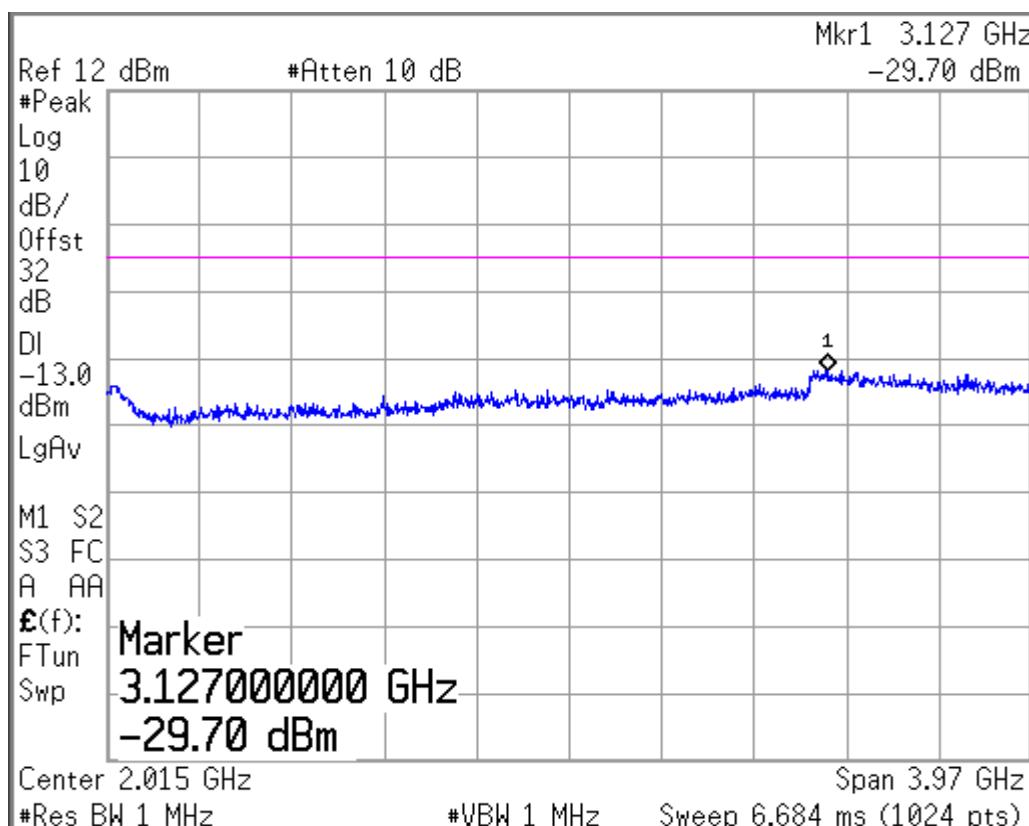

**A.7.3.8 Idle mode: 4GHz – 20GHz**

Spurious emission limit –13dBm.

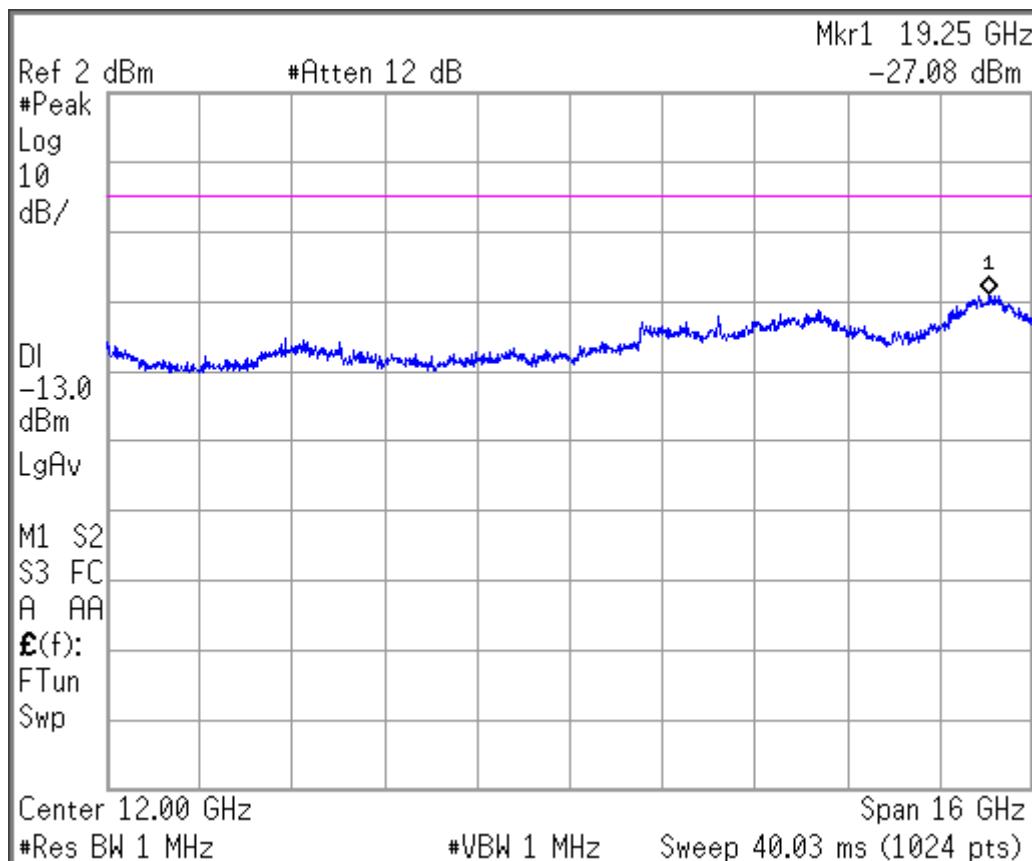

**A.8 CONDUCTED EMISSION (§15.107/207)**

**A.8.1 Limit**

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi -Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50


\* Decreases with logarithm of the frequency

# Telecommunication Metrology Center of Ministry of Information Industry

No. FCC-PART-24-2005005

Page 30 of 38

## A.8.2 Measurement result

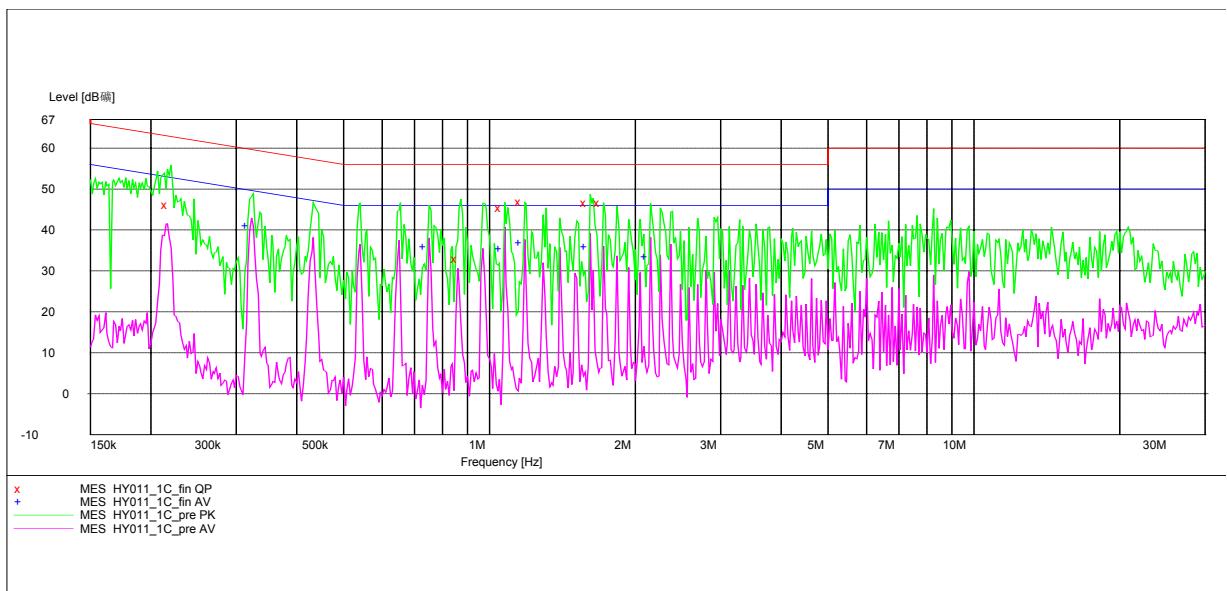

### MEASUREMENT RESULT: "HY011\_1C\_fin QP"

03/30/2005 23:06

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Line	PE
0.219886	46.10	10.1	63	16.7	L1	FLO
0.872708	32.90	10.1	56	23.1	N	FLO
1.073600	45.50	10.1	56	10.5	L1	GND
1.181324	46.90	10.1	56	9.1	L1	FLO
1.611869	46.60	10.1	56	9.4	L1	GND
1.717964	46.80	10.2	56	9.3	L1	FLO

### MEASUREMENT RESULT: "HY011\_1C\_fin AV"

03/30/2005 23:06

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Line	PE
0.322331	41.10	10.1	50	8.6	L1	GND
0.750099	35.90	10.1	46	10.1	L1	GND
1.073600	35.50	10.1	46	10.5	L1	FLO
1.181324	36.90	10.1	46	9.1	L1	FLO
1.611869	35.90	10.1	46	10.1	L1	FLO
2.148695	33.40	10.2	46	12.6	L1	FLO

## ANNEX B EUT PHOTO

### External photo



Front view



Front View

**Telecommunication Metrology Center  
of Ministry of Information Industry**

**No. FCC-PART-24-2005005**

**Page 32 of 38**



**Back View**



**Side View**

Telecommunication Metrology Center  
of Ministry of Information Industry

No. FCC-PART-24-2005005

Page 33 of 38



Back View(Battery removed)



Charger (AC/DC Adapter)

**Telecommunication Metrology Center  
of Ministry of Information Industry**

**No. FCC-PART-24-2005005**

**Page 34 of 38**




**Charger (AC/DC Adapter)**

**Internal Photo**



**Mobile phone Disassembly**

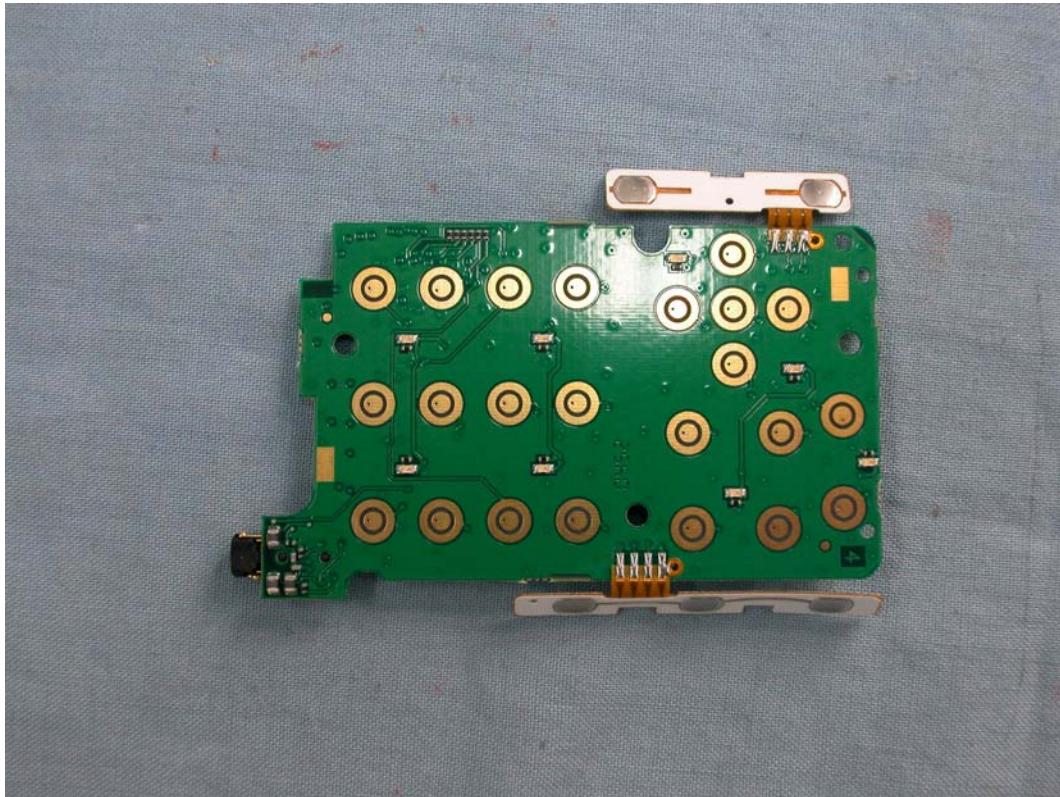


**PCB front view**


**Telecommunication Metrology Center  
of Ministry of Information Industry**

**No. FCC-PART-24-2005005**

**Page 36 of 38**

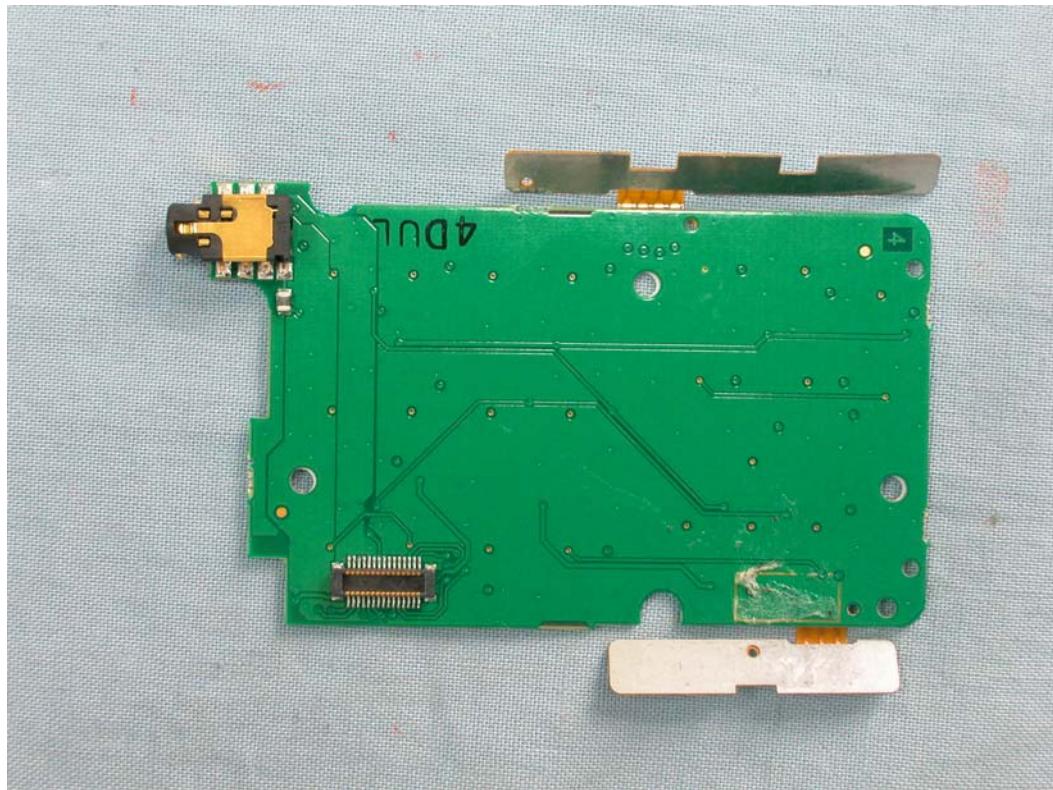

**PCB rear view**

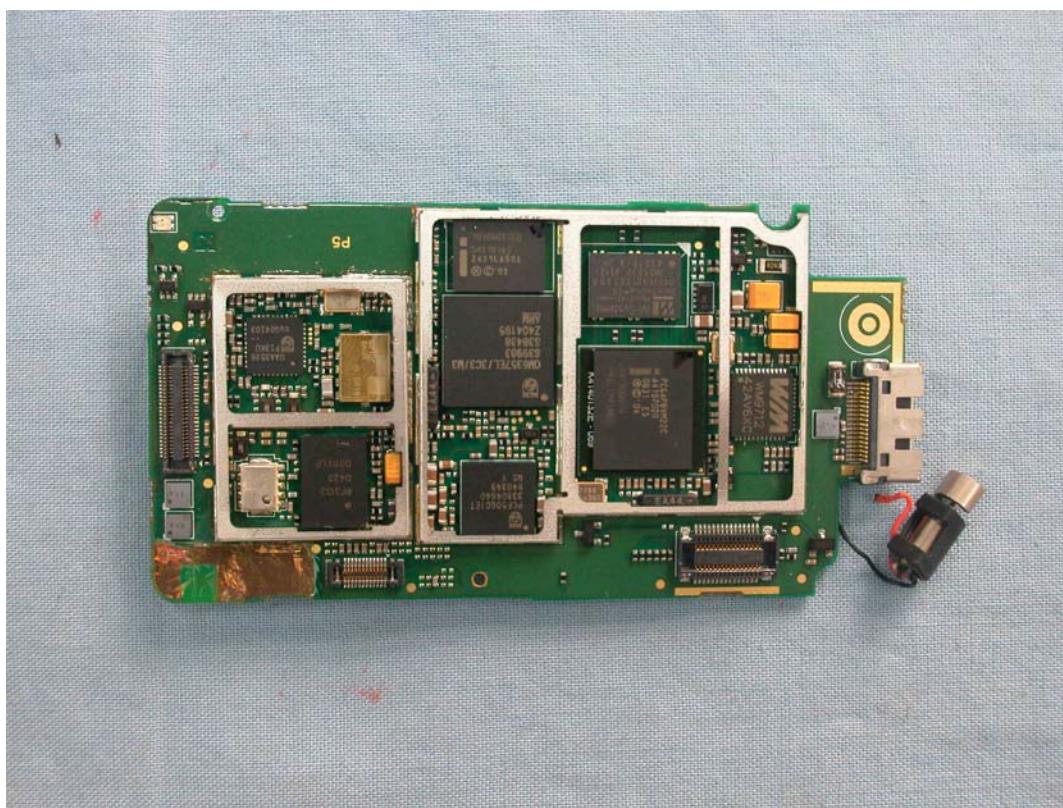


**PCB front view**

**Telecommunication Metrology Center  
of Ministry of Information Industry**

**No. FCC-PART-24-2005005**


**Page 37 of 38**

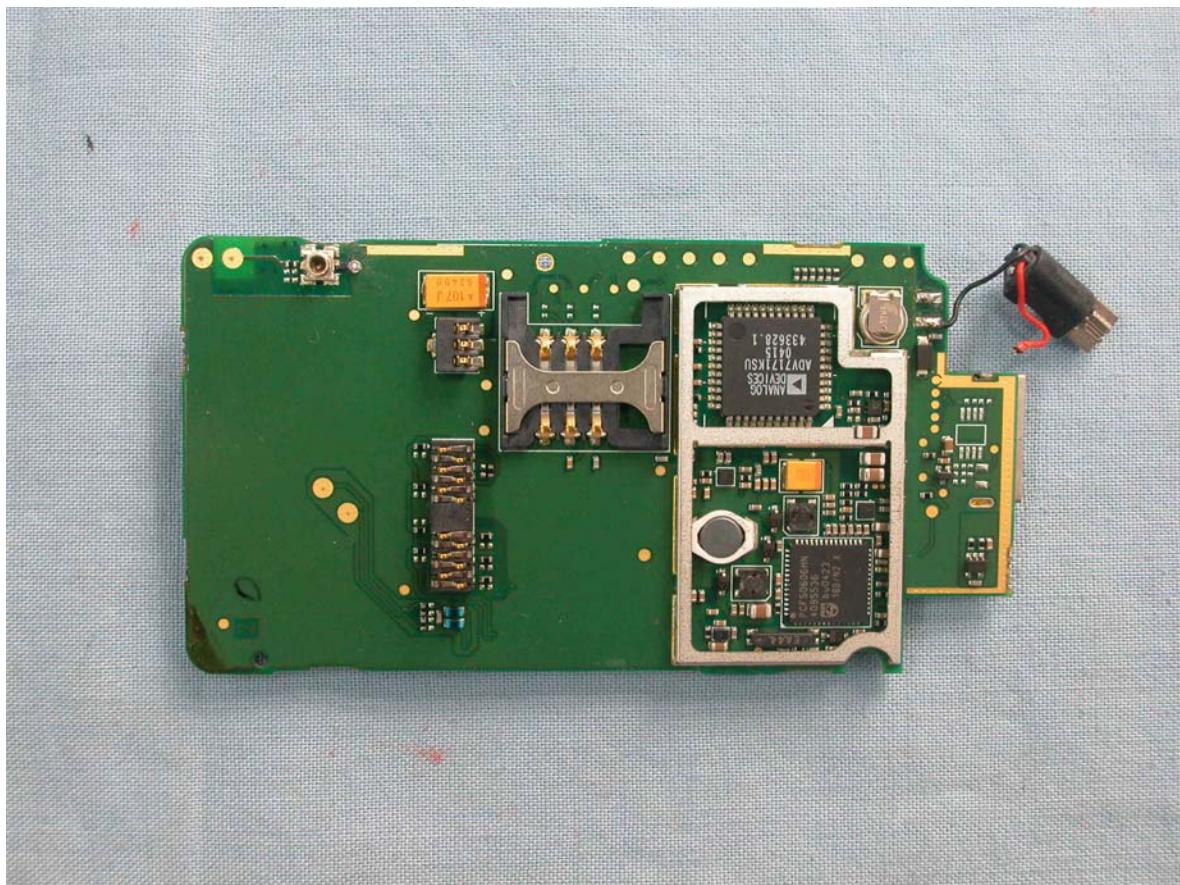

**PCB rear view**

## ANNEX C TEST LAYOUT

### TEST LAYOUT

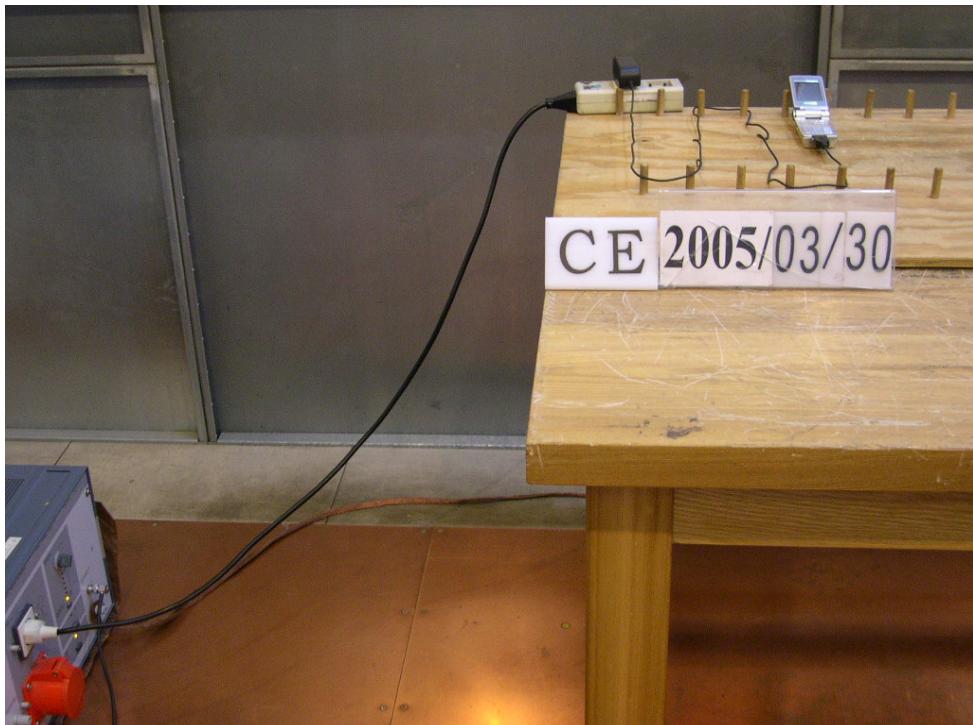

Pic1 Conducted Emission



Pic2 Radiated Spurious Emission

\*\*\*END OF REPORT BODY\*\*\*