

FCC Radio Test Report


FCC ID: RYK-WNFQ258ACNBT


This report concerns (check one): Original Grant Class I Change Class II Change

Project No. : 1708083
Equipment : 802.11ac/b/g/n WiFi + Bluetooth M.2 Card
Test Model : WNFQ-258ACN(BT)
Series Model : N/A
Applicant : SparkLAN Communications, Inc.
Address : 8F., No.257, Sec.2, Tiding-Blvd., Neihu District, Taipei City 11493, Taiwan (R.O.C.)

Date of Receipt : Aug. 21, 2017
Date of Test : Aug. 21, 2017 ~ Oct. 03, 2017
Issued Date : Oct. 11, 2017
Tested by : BTL Inc.

Testing Engineer : 
(Kay Wu)

Technical Manager : 
(James Chiu)

Authorized Signatory : 
(Andy Chiu)

B T L I N C .

No.18, Ln. 171, Sec. 2, Jiuzong Rd.,
Neihu Dist., Taipei City, Taiwan (R.O.C.)
TEL:+886-2-2657-3299 FAX: +886-2-2657-3331



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 DUTY CYCLE	10
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
3.5 DESCRIPTION OF SUPPORT UNITS	11
4 . EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 EUT TEST CONDITIONS	13
4.1.7 TEST RESULTS	13
4.2 RADIATED EMISSION MEASUREMENT	14
4.2.1 RADIATED EMISSION LIMITS	14
4.2.2 TEST PROCEDURE	15
4.2.3 DEVIATION FROM TEST STANDARD	15
4.2.4 TEST SETUP	16
4.2.5 EUT OPERATING CONDITIONS	17
4.2.6 EUT TEST CONDITIONS	17
4.2.7 TEST RESULTS (9KHZ TO 30MHZ)	17
4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)	17
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	17
5 . MEASUREMENT INSTRUMENTS LIST	18
6 . EUT TEST PHOTO	19
APPENDIX A – CONDUCTED EMISSION	22
APPENDIX B – RADIATED EMISSION (9KHZ TO 30MHZ)	25
APPENDIX C – RADIATED EMISSION (30MHZ TO 1000MHZ)	26
APPENDIX D – RADIATED EMISSION (ABOVE 1000MHZ)	29

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-2-1708083	Original Issue.	Oct. 11, 2017

1. CERTIFICATION

Equipment : 802.11ac/b/g/n WiFi + Bluetooth M.2 Card
Brand Name : Sparklan
Test Model : WNFQ-258ACN(BT)
Series Model : N/A
Applicant : SparkLAN Communications, Inc.
Manufacturer : SparkLAN Communications, Inc.
Address : 8F.,No.257,Sec.2,Tiding-Blvd.,Neihu District,Taipei City 11493,Taiwan
(R.O.C.)
Date of Test : Aug. 21, 2017 ~ Oct. 03, 2017
Test Sample : Engineering Sample
Standard(s) : FCC Part15, Subpart C (15.247)
ANSI C63.10-2013

The above equipment has been tested and found in compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-2-1708083) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test results included in this report is only for the Bluetooth LE part.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15, Subpart C (15.247)			
Standard(s) Section	Test Item	Judgment	Remark
15.207	Conducted Emissions	PASS	-----
15.247(d) 15.209	Radiated Emissions	PASS	-----
15.203	Antenna Requirement	PASS	-----

Note:

- (1)" N/A" denotes test is not applicable in this test report
- (2) Accord to the EUT((Report Number: RF150107E06Z-3 and model: WNFQ-258ACN(BT)) has been certificated, Conducted and Radiated emission were criticized and reconfirmed in this report.
- (3) Compared with the previous report (RF150107E06Z-3), Added two new different type (Dipole) antennas.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

Conducted emission Test:

C05: (VCCI RN: C-4742; FCC RN:965108; FCC DN:TW1082)

No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

Radiated emission Test (Below 1 GHz):

CB15: (FCC RN:674415; FCC DN:TW0659)

No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

Radiated emission Test (Above 1 GHz):

CB15: (FCC RN:674415; FCC DN:TW0659)

No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cisp} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted emission test:

Test Site	Method	Measurement Frequency Range	U ,(dB)
C05	CISPR	150 kHz ~ 30MHz	2.68

B. Radiated emission test:

Test Site	Method	Measurement Frequency Range	U ,(dB)
CB15 (3m)	CISPR	9kHz ~ 150kHz	2.82
		150kHz ~ 30MHz	2.58

Test Site	Method	Measurement Frequency Range	Ant. H / V	U ,(dB)
CB15 (3m)	CISPR	30MHz ~ 200MHz	V	4.20
		30MHz ~ 200MHz	H	3.64
		200MHz ~ 1,000MHz	V	4.56
		200MHz ~ 1,000MHz	H	3.90

Test Site	Method	Measurement Frequency Range	Ant. H / V	U ,(dB)
CB15 (3m)	CISPR	1GHz ~ 6GHz	V	4.46
		1GHz ~ 6GHz	H	4.40
		6GHz ~ 18GHz	V	3.88
		6GHz ~ 18GHz	H	4.00

Test Site	Method	Measurement Frequency Range	U ,(dB)
CB15 (1m)	CISPR	18 ~ 26.5 GHz	4.62
		26.5 ~ 40 GHz	5.12

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	802.11ac/b/g/n WiFi + Bluetooth M.2 Card				
Brand Name	Sparklan				
Test Model	WNFQ-258ACN(BT)				
Series Model	N/A				
Model Difference	N/A				
Product Description	Operation Frequency	2402~2480 MHz			
	Modulation Technology	GFSK(1Mbps)			
	Bit Rate of Transmitter				
EUT Power Rating	3.3Vdc form host equipment				
Products Covered	N/A				

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

3. Table for Filed Antenna:

Ant.	Brand	Model	Type	Connector	Gain (dBi)				
					2.4 GHz	Band 1	Band 2	Band 3	Band 4
1	Wanshin	R3410110203 WSS003	Dipole	RP-SMA	2.02	1.93	1.93	2.03	2.03
2	Long Cheng	FDE_ACBSMA-BGP	Dipole	RP-SMA	3.27	5.436	5.436	5.436	5.96

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Emissions	
Final Test Mode	Description
Mode 1	TX Mode


For Radiated Emissions	
Final Test Mode	Description
Mode 1	TX Mode

Note:

- (1) The measurements are performed at the high, middle, low available channels.

3.3 DUTY CYCLE


If duty cycle is $\geq 98\%$, duty factor is not required.
If duty cycle is $< 98\%$, duty factor shall be considered.

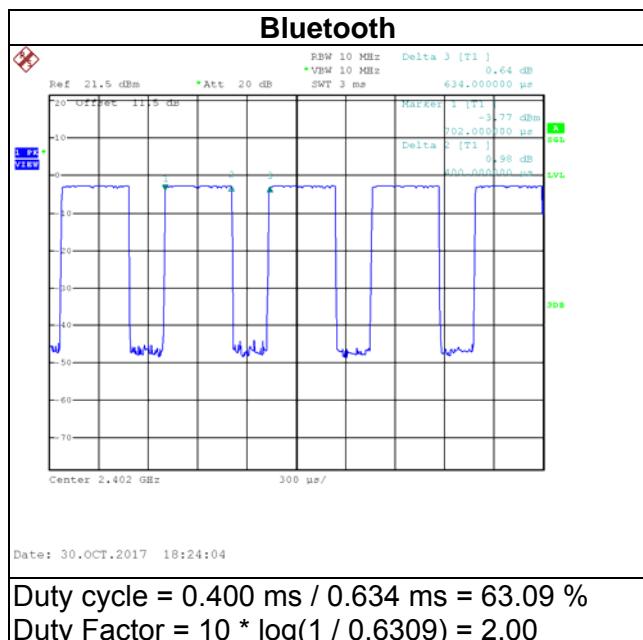

Note:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 kHz (Duty cycle $< 98\%$).

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

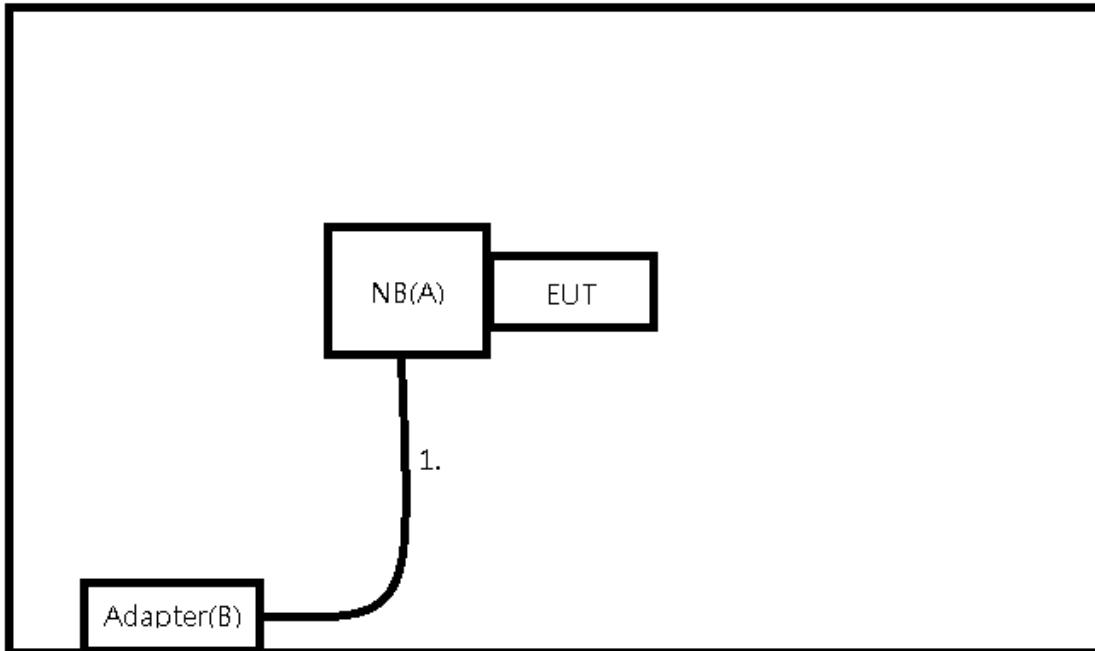

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	NB	Lenovo	P50	N/A	N/A
B	Adapter	Lenovo	ADL170NDC2A	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	YES	1.5m	Power Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 -0.50	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

Note:

(1) The limit of " * " decreases with the logarithm of the frequency

(2) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)

Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


4.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

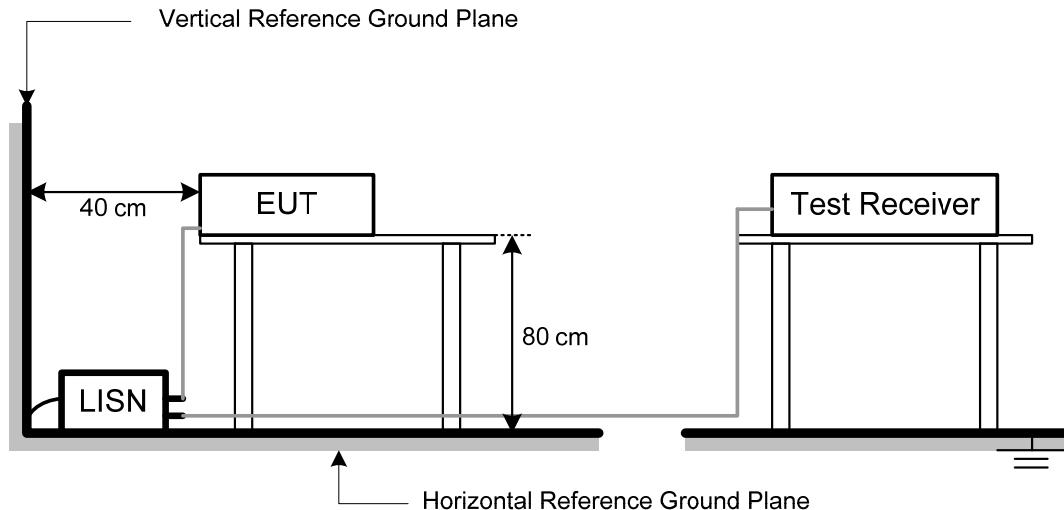

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical function (as a customer would normally use it), EUT was programmed to be in continuously transmitting/receiving data or hopping on mode.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Appendix A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of [†]Note. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “*” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.
- (3) “N/A” denotes test is not applicable to this device.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9KHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 m)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	RBW 1MHz VBW 3MHz peak detector for Pk value RMS detector for AV value

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 m above the ground at a 3 m semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 m above the ground at a 3 m semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

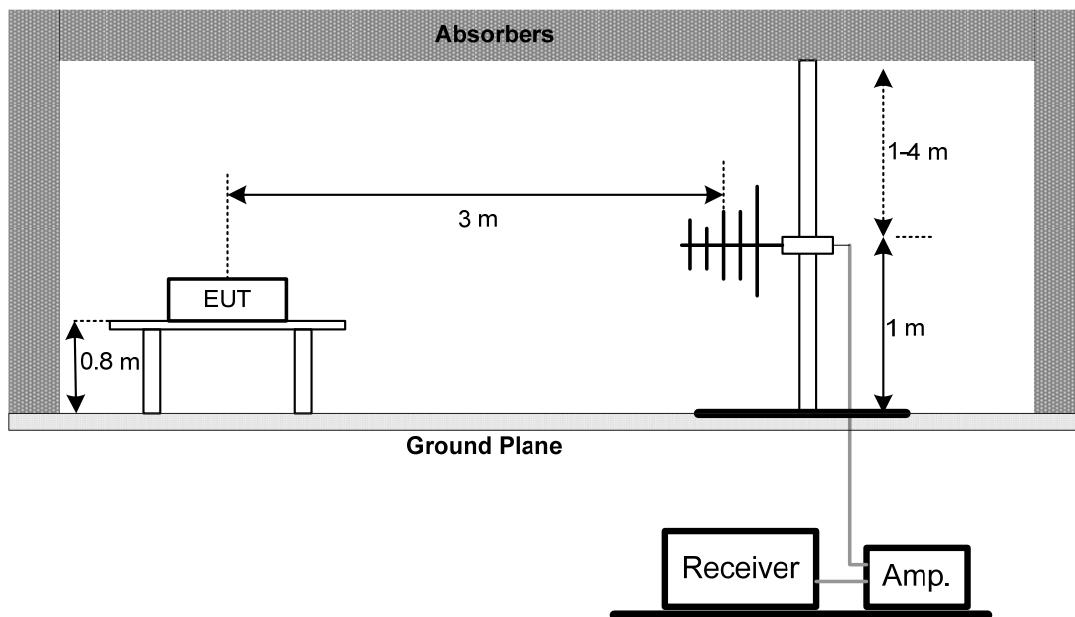

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

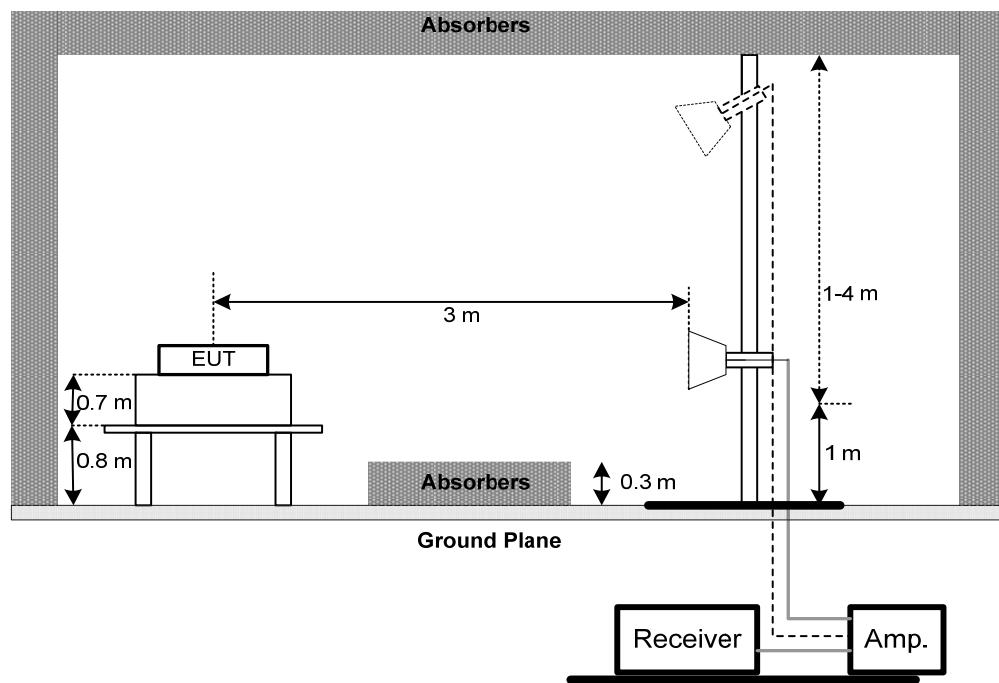

(C) For radiated emissions below 30MHz

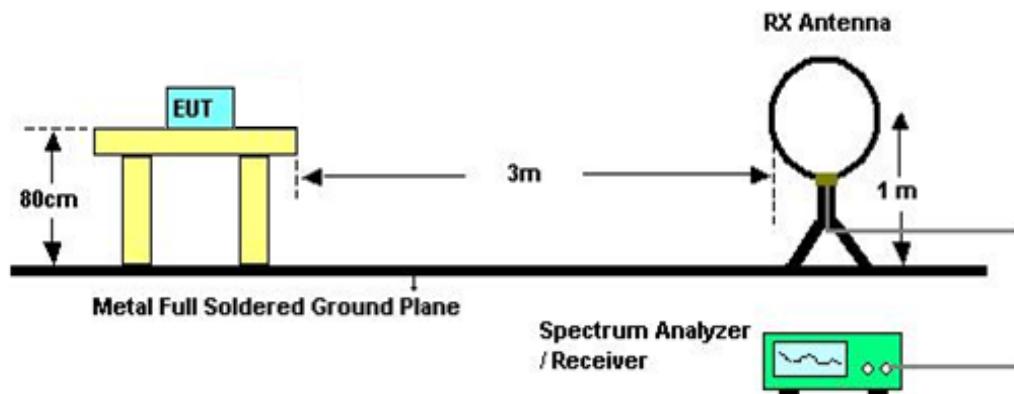

4.2.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.2.6 EUT TEST CONDITIONS

Temperature: 23°C/25°C Relative Humidity: 70%/45% Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Appendix B.

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)

Please refer to the Appendix C.

4.2.9 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Appendix D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	101050	Jan. 25, 2018
2	Test Cable	TIMES	CFD300-NL	C02	Jun. 14, 2018
3	EMI Test Receiver	R&S	ESR7	101433	Dec. 09, 2017
4	Measurement Software	EZ	EZ_EMC (Version NB-03A)	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Preamplifier	EMCI	012645B	980267	Feb. 28, 2018
2	Preamplifier	EMCI	EMC02325	980217	Dec. 29, 2017
3	Preamplifier	EMCI	EMC2654045	980030	Feb. 14, 2018
4	Test Cable	EMCI	EMC104-SM-S M-8000	8m	Jan. 04, 2018
5	Test Cable	EMCI	EMC104-SM-S M-800	150207	Jan. 04, 2018
6	Test Cable	EMCI	EEMC104-SM-S M-3000	151205	Jan. 04, 2018
7	MXE EMI Receiver	Agilent	N9038A	MY55420127	Jan. 09, 2018
8	Signal Analyzer	Agilent	N9010A	MY52220990	Feb. 22, 2018
9	Loop Ant	EMCO	6502	42960	Nov. 24, 2017
10	Horn Ant	SCHWARZBECK	BBHA 9120D	9120D-1342	Feb. 28, 2018
11	Horn Ant	Schwarzbeck	BBHA 9170	187	Dec. 07, 2017
12	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-548	Jan. 16, 2018
13	5dB Attenuator	EMCI	EMCI-N-6-05	AT-N0623	Jan. 16, 2018


Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

APPENDIX A – CONDUCTED EMISSION

Test Mode: TX Mode


Line

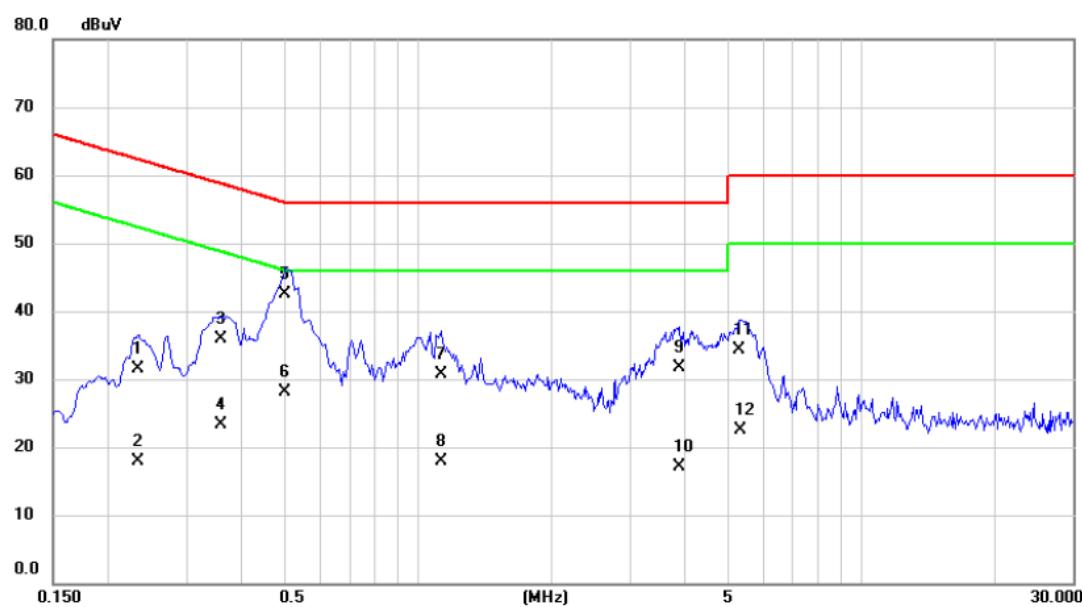

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dB	Detector	Comment
1		0.2340	21.80	9.72	31.52	62.31	-30.79	QP
2		0.2340	8.10	9.72	17.82	52.31	-34.49	AVG
3		0.3600	26.20	9.73	35.93	58.73	-22.80	QP
4		0.3600	13.60	9.73	23.33	48.73	-25.40	AVG
5	*	0.5000	32.80	9.74	42.54	56.00	-13.46	QP
6		0.5000	18.40	9.74	28.14	46.00	-17.86	AVG
7		1.1300	21.00	9.74	30.74	56.00	-25.26	QP
8		1.1300	8.20	9.74	17.94	46.00	-28.06	AVG
9		3.8750	21.90	9.80	31.70	56.00	-24.30	QP
10		3.8750	7.30	9.80	17.10	46.00	-28.90	AVG
11		5.3000	24.50	9.84	34.34	60.00	-25.66	QP
12		5.3500	12.60	9.84	22.44	50.00	-27.56	AVG

Test Mode:	TX Mode
------------	---------

Neutral

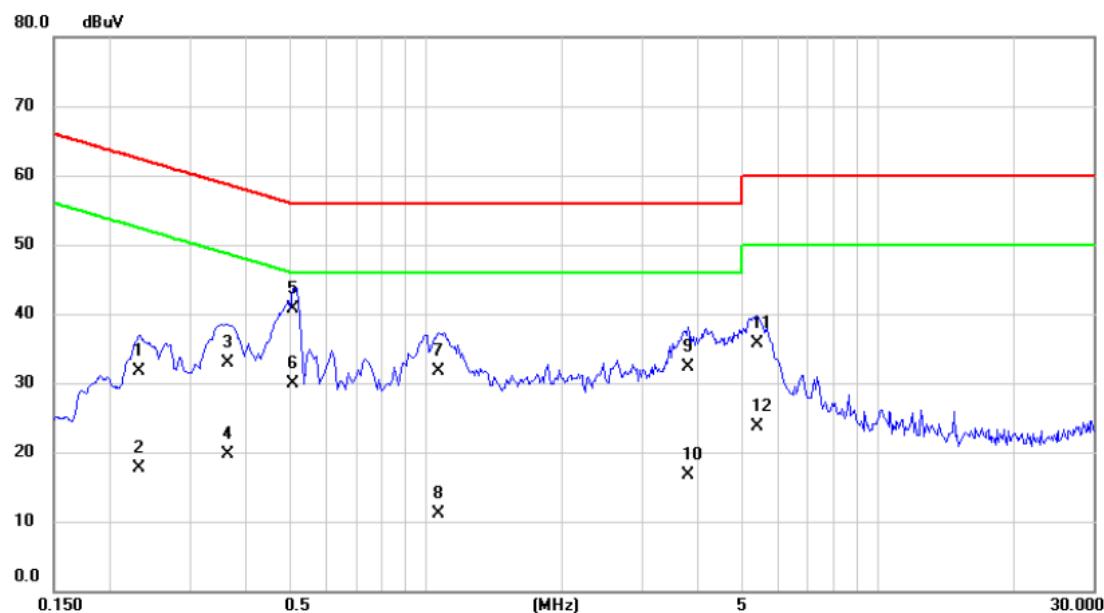

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2320	22.10	9.66	31.76	62.38	-30.62	QP	
2		0.2320	8.00	9.66	17.66	52.38	-34.72	AVG	
3		0.3650	23.30	9.67	32.97	58.61	-25.64	QP	
4		0.3650	10.10	9.67	19.77	48.61	-28.84	AVG	
5	*	0.5090	31.00	9.68	40.68	56.00	-15.32	QP	
6		0.5090	20.20	9.68	29.88	46.00	-16.12	AVG	
7		1.0670	22.00	9.69	31.69	56.00	-24.31	QP	
8		1.0670	1.50	9.69	11.19	46.00	-34.81	AVG	
9		3.8030	22.50	9.76	32.26	56.00	-23.74	QP	
10		3.8030	6.90	9.76	16.66	46.00	-29.34	AVG	
11		5.4000	25.90	9.80	35.70	60.00	-24.30	QP	
12		5.4000	14.00	9.80	23.80	50.00	-26.20	AVG	


APPENDIX B – RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode: N/A

Note: "N/A" denotes test is not applicable to this device.

APPENDIX C – RADIATED EMISSION (30MHZ TO 1000MHZ)


Test Mode: TX 2402MHz_CH00_1Mbps

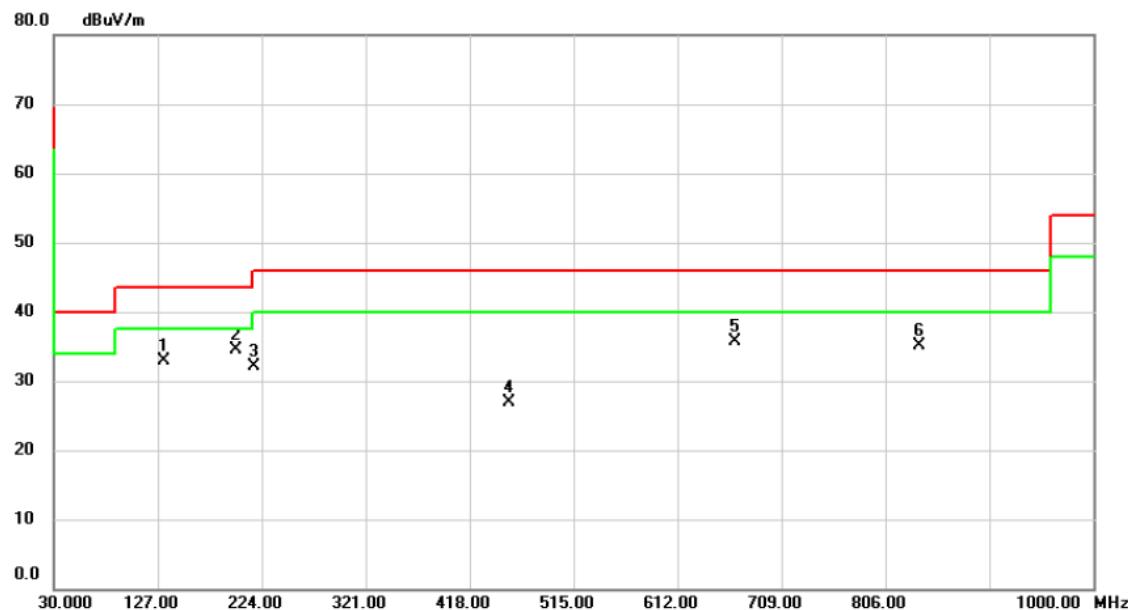Vertical

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		132.8200	42.39	-9.46	32.93	43.50	-10.57	peak
2	*	199.7500	45.06	-10.64	34.42	43.50	-9.08	peak
3		217.2100	43.02	-10.86	32.16	46.00	-13.84	peak
4		454.8600	30.30	-3.48	26.82	46.00	-19.18	peak
5		665.3500	35.38	0.24	35.62	46.00	-10.38	peak
6		838.0100	32.03	3.07	35.10	46.00	-10.90	peak

Test Mode: TX 2402MHz_CH00_1Mbps

Horizontal

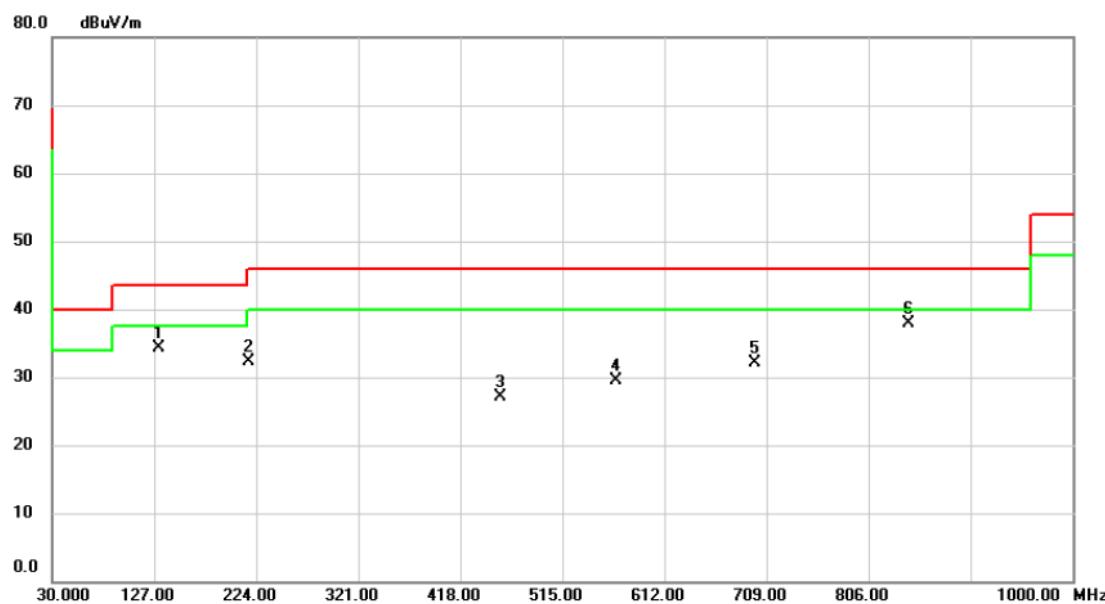


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dB			
1		131.8500	43.84	-9.50	34.34	43.50	-9.16	peak	
2		217.2100	43.21	-10.86	32.35	46.00	-13.65	peak	
3		455.8300	30.55	-3.46	27.09	46.00	-18.91	peak	
4		565.4400	30.82	-1.32	29.50	46.00	-16.50	peak	
5		698.3300	31.31	0.84	32.15	46.00	-13.85	peak	
6	*	843.8300	34.71	3.14	37.85	46.00	-8.15	peak	

APPENDIX D – RADIATED EMISSION (ABOVE 1000MHZ)

Test Mode : TX 2402MHz_CH00_1Mbps


Vertical

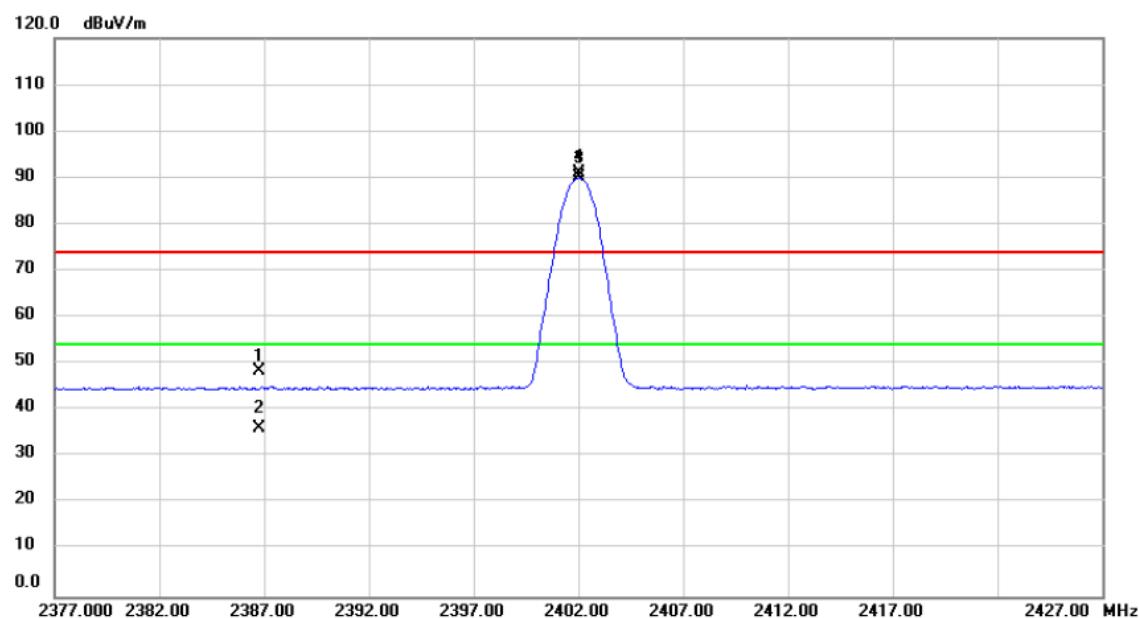

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	
1		2386.763	17.37	31.05	48.42	74.00	-25.58	peak
2		2386.763	5.14	31.05	36.19	54.00	-17.81	AVG
3	X	2402.000	60.02	31.11	91.13	74.00	17.13	peak No Limit
4	*	2402.000	58.91	31.11	90.02	54.00	36.02	AVG No Limit


Test Mode : TX 2402MHz _CH00_1Mbps

Vertical

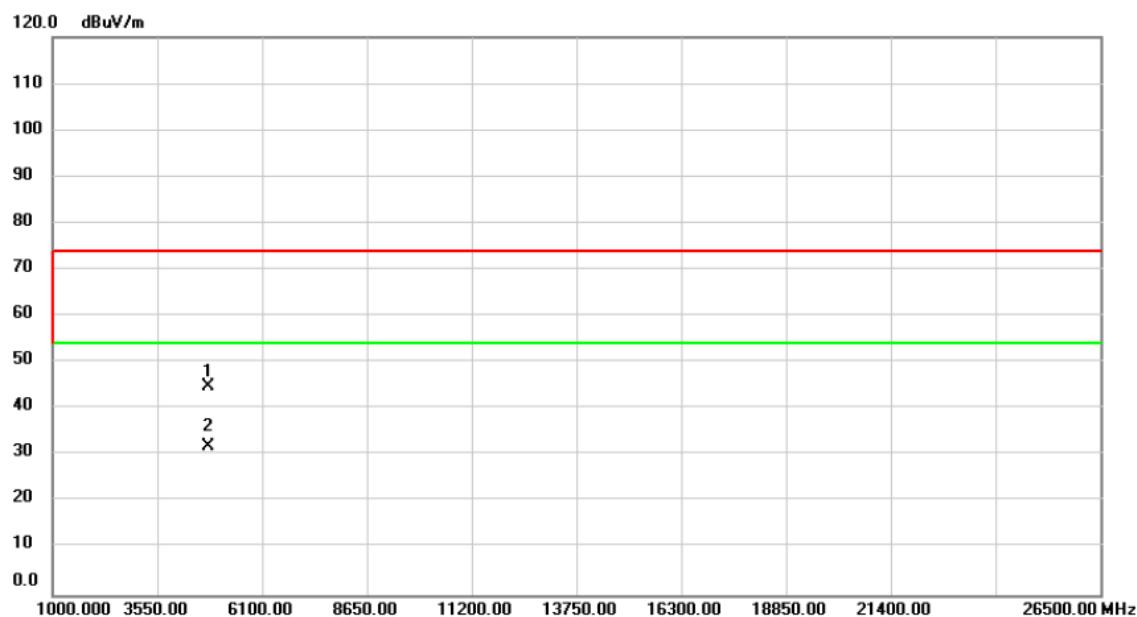

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4804.000	56.17	-11.40	44.77	74.00	-29.23	peak	
2	*	4804.000	43.48	-11.40	32.08	54.00	-21.92	Avg	


Test Mode : TX 2402MHz_CH00_1Mbps

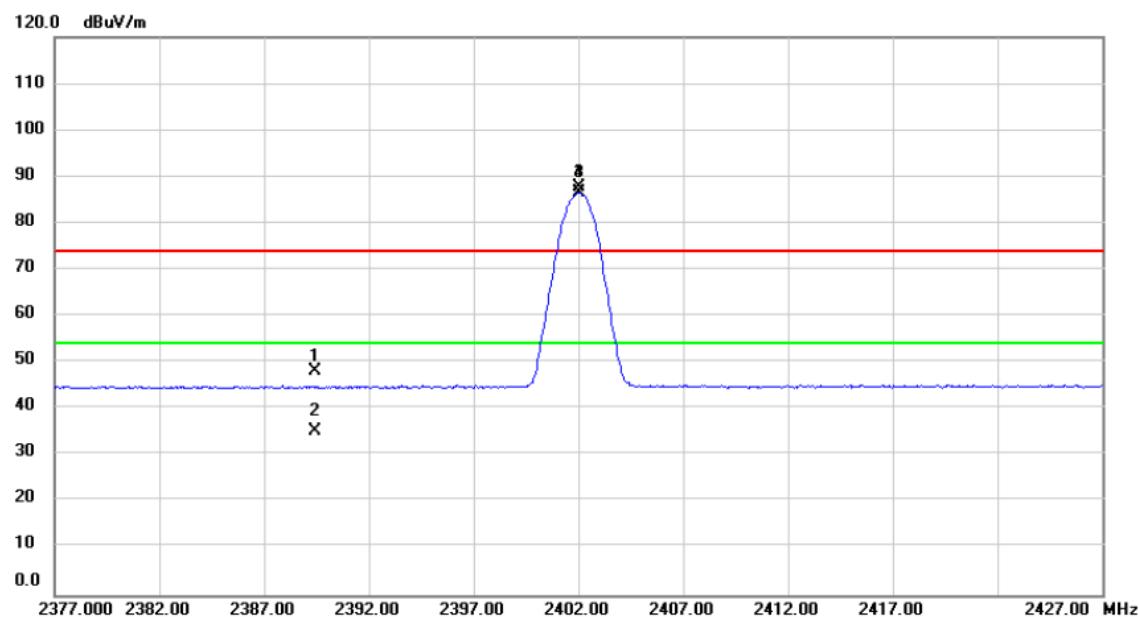Horizontal

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2389.402	17.11	31.06	48.17	74.00	-25.83	peak	
2		2389.402	4.17	31.06	35.23	54.00	-18.77	AVG	
3	X	2402.000	56.54	31.11	87.65	74.00	13.65	peak	No Limit
4	*	2402.000	55.40	31.11	86.51	54.00	32.51	AVG	No Limit

Test Mode : TX 2402MHz _CH00_1Mbps


Horizontal

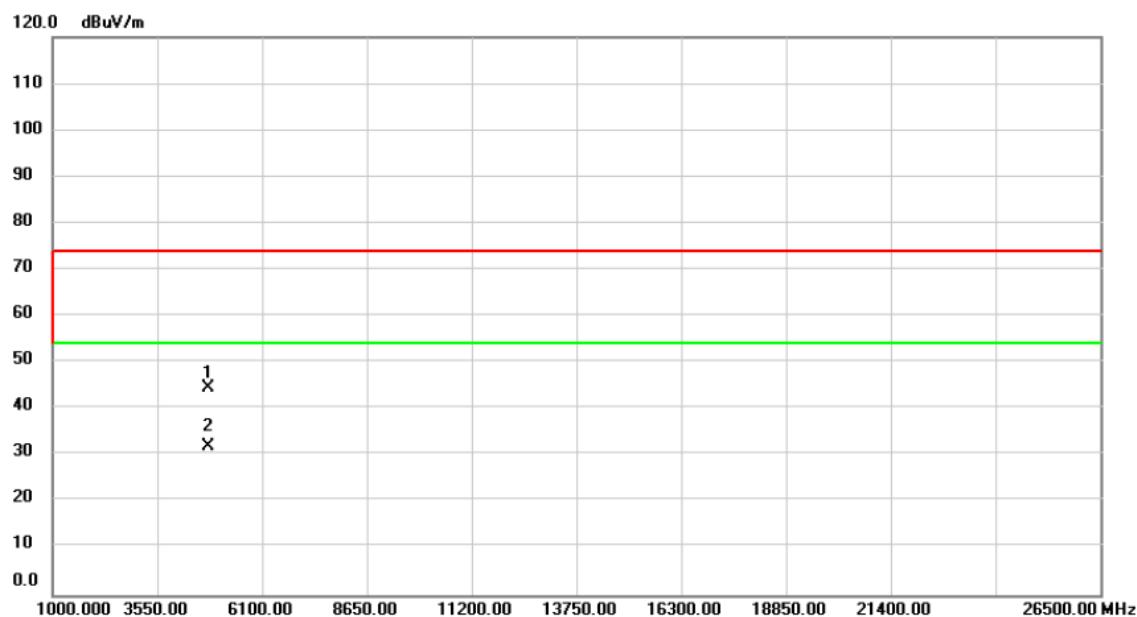

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4804.000	55.90	-11.40	44.50	74.00	-29.50	peak	
2	*	4804.000	43.40	-11.40	32.00	54.00	-22.00	Avg	

Test Mode : TX 2440MHz_CH19_1Mbps


Vertical

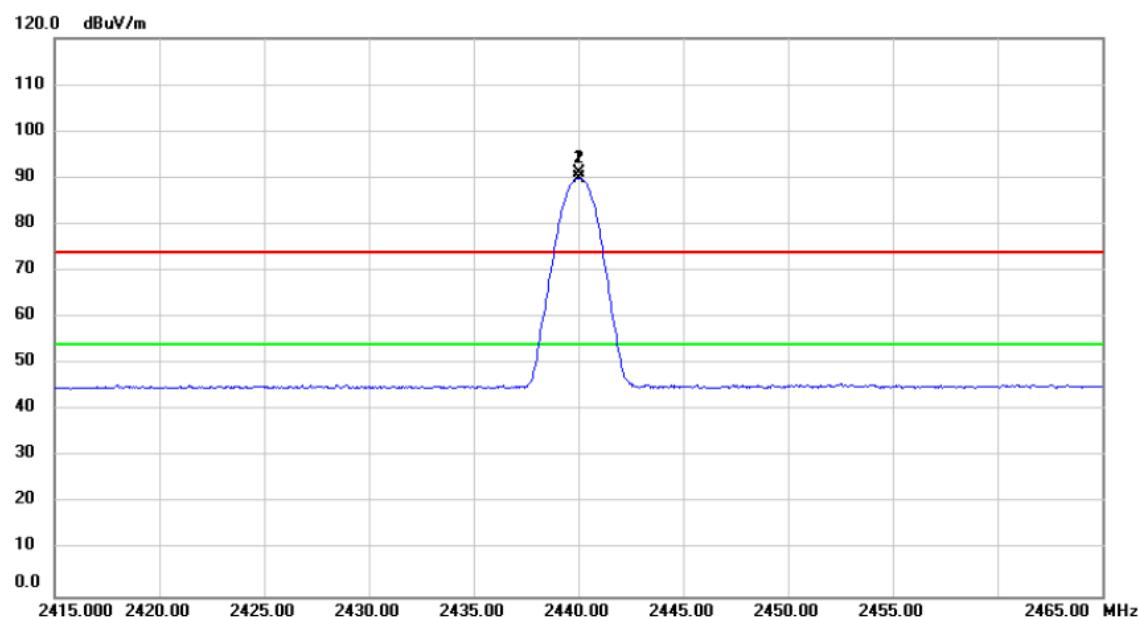

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	
1	X	2440.000	59.81	31.25	91.06	74.00	17.06	peak No Limit
2	*	2440.000	58.72	31.25	89.97	54.00	35.97	AVG No Limit


Test Mode : TX 2440MHz _CH19_1Mbps

Vertical

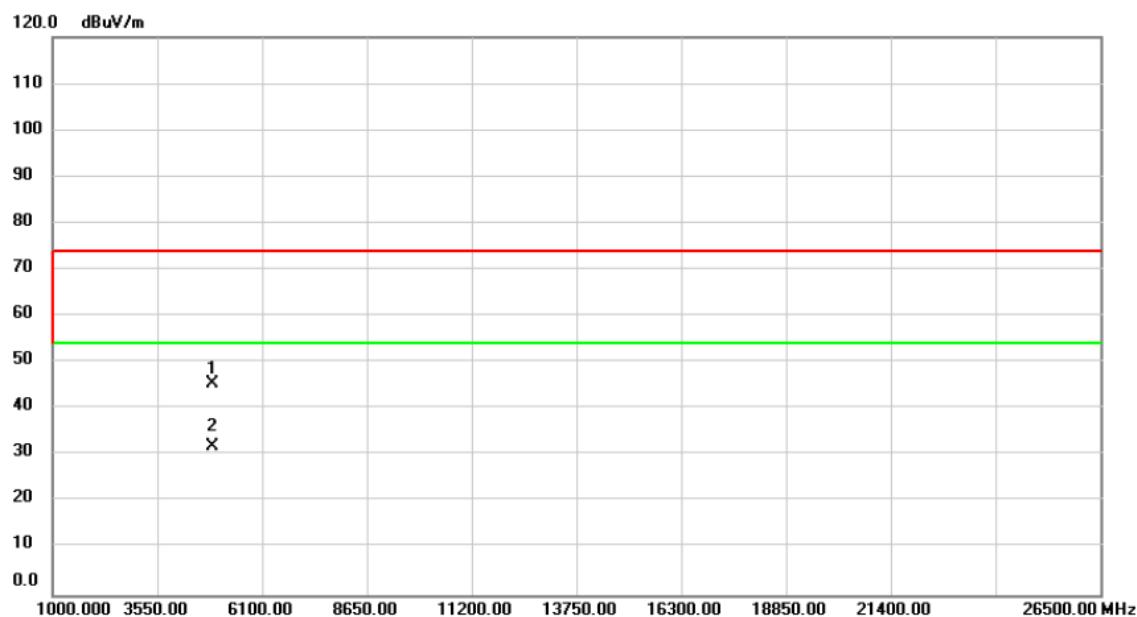

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4880.000	56.64	-11.28	45.36	74.00	-28.64	peak	
2	*	4880.000	43.29	-11.28	32.01	54.00	-21.99	Avg	


Test Mode : TX 2440MHz _CH19_1Mbps

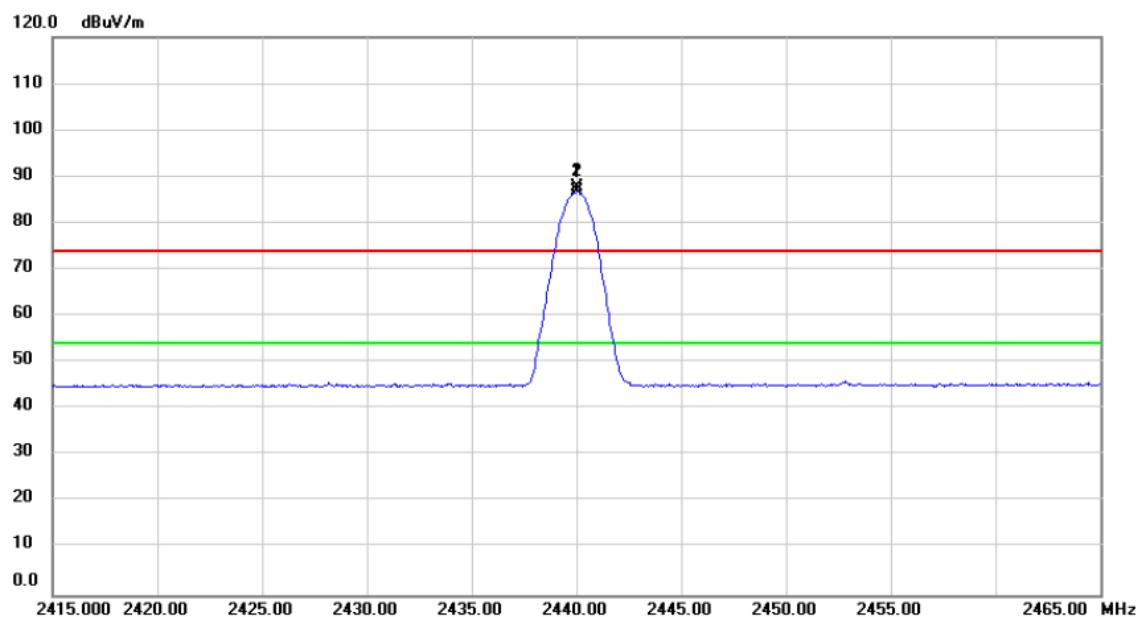Horizontal

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1	X	2440.000	56.63	31.25	87.88	74.00	13.88	peak No Limit
2	*	2440.000	55.47	31.25	86.72	54.00	32.72	AVG No Limit


Test Mode : TX 2440MHz _CH19_1Mbps

Horizontal

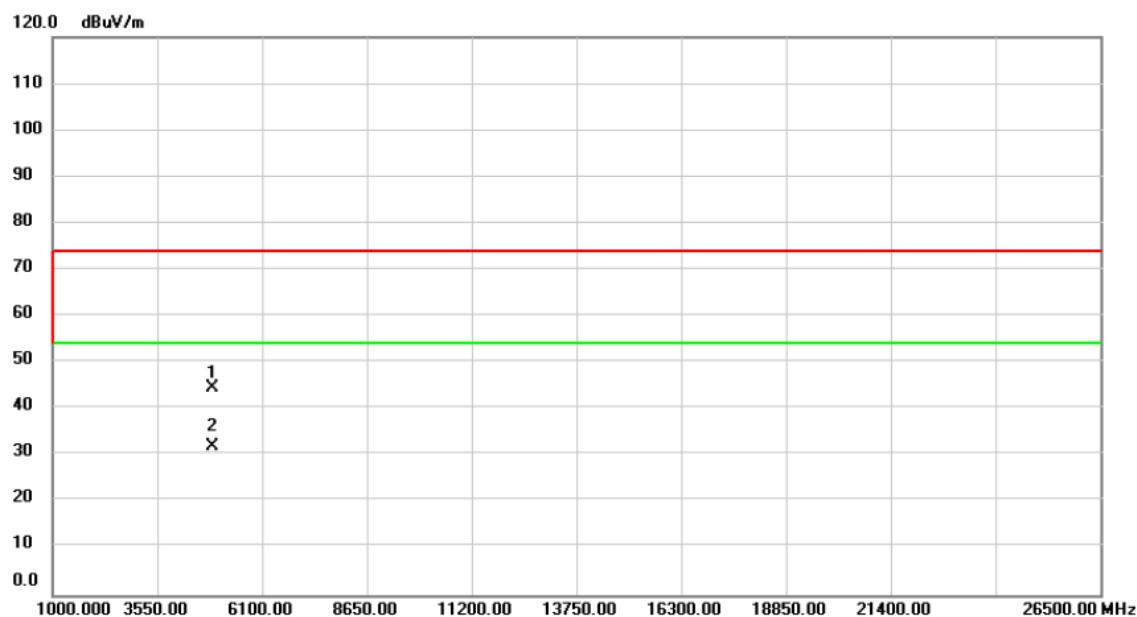

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4880.000	55.93	-11.28	44.65	74.00	-29.35	peak	
2	*	4880.000	43.25	-11.28	31.97	54.00	-22.03	Avg	


Test Mode : TX 2480MHz _CH39_1Mbps

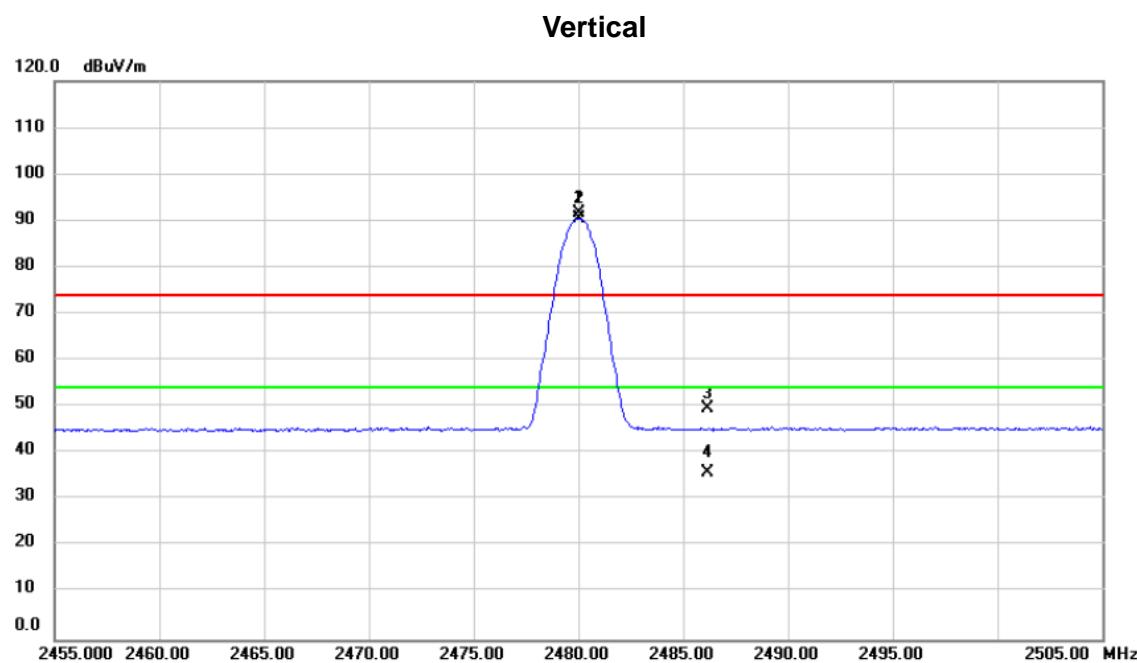

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	
1	X	2480.000	60.22	31.39	91.61	74.00	17.61	peak No Limit
2	*	2480.000	59.11	31.39	90.50	54.00	36.50	Avg No Limit
3		2486.173	18.12	31.42	49.54	74.00	-24.46	peak
4		2486.173	4.28	31.42	35.70	54.00	-18.30	Avg


Test Mode : TX 2480MHz _CH39_1Mbps

Vertical

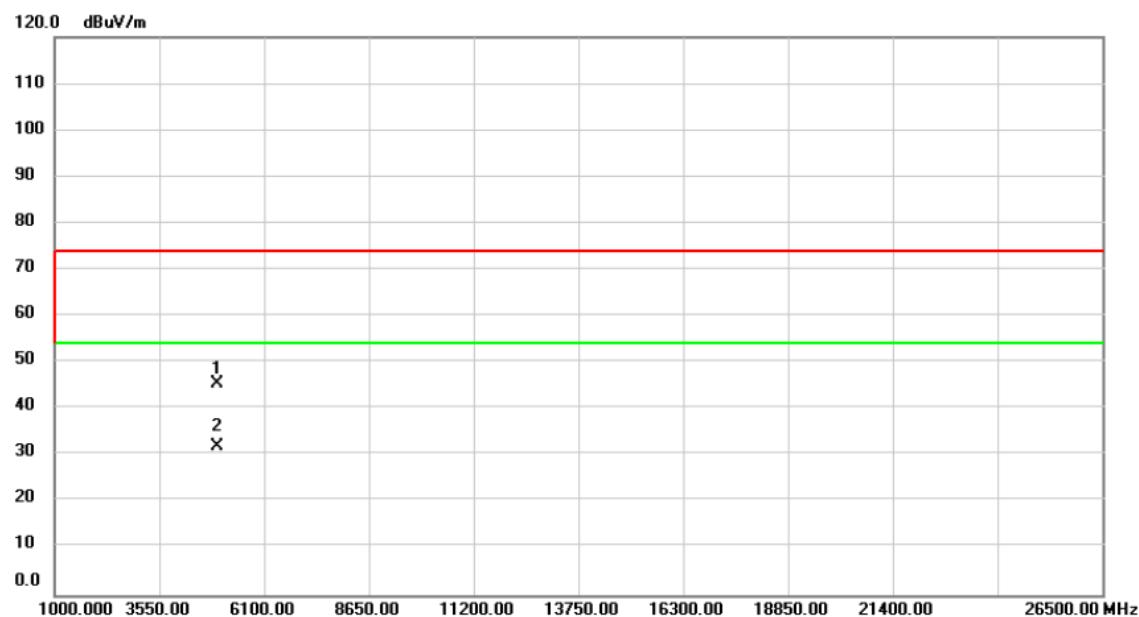

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4960.000	56.53	-11.15	45.38	74.00	-28.62	peak	
2	*	4960.000	43.21	-11.15	32.06	54.00	-21.94	Avg	


Test Mode : TX 2480MHz _CH39_1Mbps

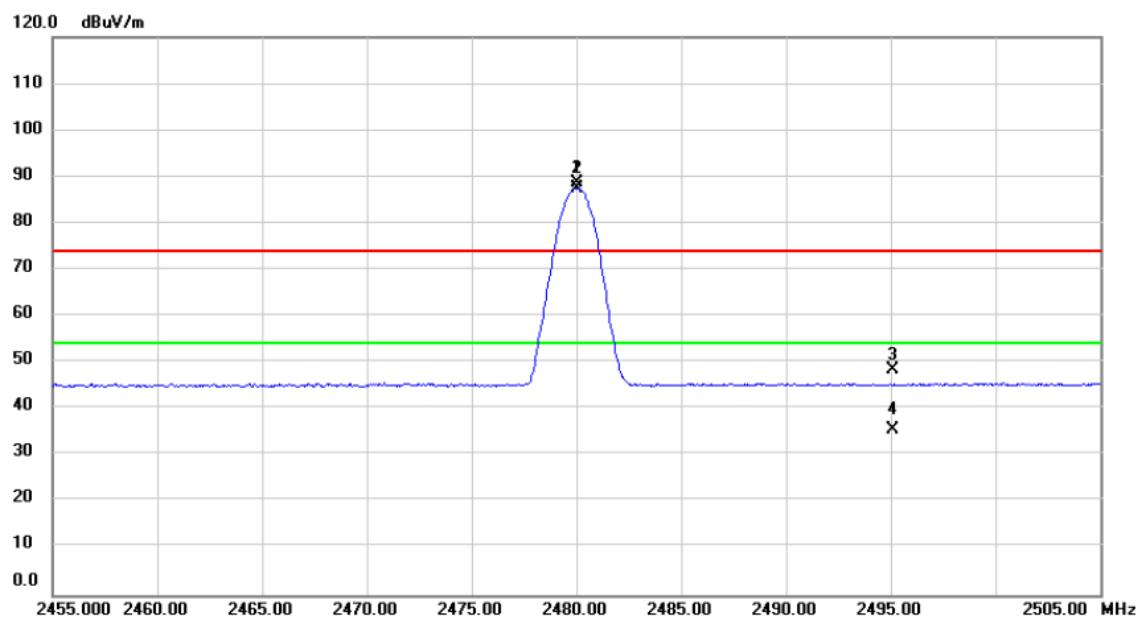Horizontal

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	
1	X	2480.000	57.21	31.39	88.60	74.00	14.60	peak No Limit
2	*	2480.000	56.12	31.39	87.51	54.00	33.51	AVG No Limit
3		2495.116	16.87	31.46	48.33	74.00	-25.67	peak
4		2495.116	4.21	31.46	35.67	54.00	-18.33	AVG

Test Mode : TX 2480MHz _CH39_1Mbps

Horizontal

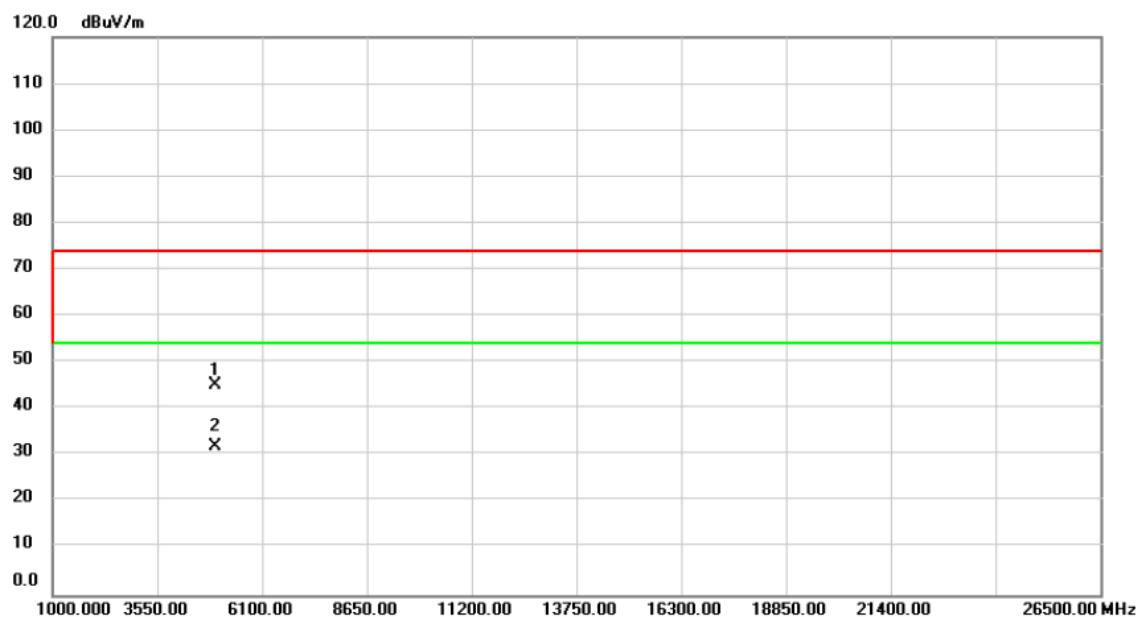

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4960.000	56.30	-11.15	45.15	74.00	-28.85	peak	
2	*	4960.000	43.11	-11.15	31.96	54.00	-22.04	Avg	