

FCC TEST REPORT (15.407)

REPORT NO.: RF130709C02-1

MODEL NO.: WPEA-252NI

FCC ID: RYK-WPEA252NI

RECEIVED: Jul. 09, 2013

TESTED: Jul. 11 ~ Jul. 12, 2013

ISSUED: Jul. 17, 2013

APPLICANT: SparkLAN Communications, Inc.

ADDRESS: 8F., No.257, Sec. 2, Tiding Blvd., Neihu District,
Taipei City 11493, Taiwan (R.O.C.)

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,
New Taipei City, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim
product certification, approval, or endorsement by
TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1. CERTIFICATION.....	5
2. SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	6
3. GENERAL INFORMATION.....	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES.....	8
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	9
3.3 DUTY CYCLE OF TEST SIGNAL.....	11
3.4 DESCRIPTION OF SUPPORT UNITS	12
3.4.1 CONFIGURATION OF SYSTEM UNDER TEST	12
3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS	12
4. TEST TYPES AND RESULTS	14
4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT	14
4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT.....	14
4.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS	14
4.1.3 TEST INSTRUMENTS.....	15
4.1.4 TEST PROCEDURES	16
4.1.5 DEVIATION FROM TEST STANDARD	16
4.1.6 TEST SETUP.....	17
4.1.7 EUT OPERATING CONDITION	17
4.1.8 TEST RESULTS	18
4.2 CONDUCTED EMISSION MEASUREMENT	45
4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	45
4.2.2 TEST INSTRUMENTS.....	45
4.2.3 TEST PROCEDURES	46
4.2.4 DEVIATION FROM TEST STANDARD	46
4.2.5 TEST SETUP.....	46
4.2.6 EUT OPERATING CONDITIONS	46
4.2.7 TEST RESULTS	47
4.3 PEAK TRANSMIT POWER MEASUREMENT	51
4.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT	51
4.3.2 TEST SETUP.....	51
4.3.3 TEST INSTRUMENTS.....	52
4.3.4 TEST PROCEDURE.....	52
4.3.5 DEVIATION FROM TEST STANDARD	52
4.3.6 EUT OPERATING CONDITIONS	52
4.3.7 TEST RESULTS	53
4.4 PEAK POWER SPECTRAL DENSITY MEASUREMENT	57
4.4.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT	57
4.4.2 TEST SETUP.....	57
4.4.3 TEST INSTRUMENTS.....	57
4.4.4 TEST PROCEDURES	57
4.4.5 DEVIATION FROM TEST STANDARD	57
4.4.6 EUT OPERATING CONDITIONS	58
4.4.7 TEST RESULTS	59
4.5 PEAK POWER EXCURSION MEASUREMENT	61



A D T

4.5.1	LIMITS OF PEAK POWER EXCURSION MEASUREMENT	61
4.5.2	TEST SETUP	61
4.5.3	TEST INSTRUMENTS	61
4.5.4	TEST PROCEDURE	61
4.5.5	DEVIATION FROM TEST STANDARD	61
4.5.6	EUT OPERATING CONDITIONS	61
4.5.7	TEST RESULTS	62
4.6	FREQUENCY STABILITY	65
4.6.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	65
4.6.2	TEST SETUP	65
4.6.3	TEST INSTRUMENTS	65
4.6.4	TEST PROCEDURE	66
4.6.5	DEVIATION FROM TEST STANDARD	66
4.6.6	EUT OPERATING CONDITION	66
4.6.7	TEST RESULTS	67
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	68
6.	INFORMATION ON THE TESTING LABORATORIES	69
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	70



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF130709C02-1	Original release	Jul. 17, 2013

1. CERTIFICATION

PRODUCT: 802.11abgn Mini PCIe module

MODEL: WPEA-252NI

BRAND: SparkLAN

APPLICANT: SparkLAN Communications, Inc.

TESTED: Jul. 11 ~ Jul. 12, 2013

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 15, Subpart E (Section 15.407)

ANSI C63.10-2009

The above equipment (model: WPEA-252NI) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Maggie Wu , **DATE :** Jul. 17, 2013
Maggie Wu / Specialist

APPROVED BY : Ken Liu , **DATE :** Jul. 17, 2013
Ken Liu / Senior Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.407(b)(6)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -18.50dB at 0.30625MHz.
15.407(b)(1/2/3) (b)(6)	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -1.5dB at 5350.00 & 5470.00MHz.
15.407(a)(1/2)	Max Average Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit.
15.407(a)(1/2)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is RP-SMA Plug not a standard connector.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.34 dB
	200MHz ~1000MHz	3.35 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	802.11abgn Mini PCIe module
MODEL NO.	WPEA-252NI
POWER SUPPLY	3Vdc from host equipment
MODULATION TYPE	64QAM, 16QAM, QPSK, BPSK
MODULATION TECHNOLOGY	OFDM
TRANSFER RATE	802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 300.0Mbps
OPERATING FREQUENCY	5180 ~ 5240MHz, 5260 ~ 5320MHz & 5500 ~ 5700MHz
NUMBER OF CHANNEL	5180 ~ 5240MHz: 4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz) 5260 ~ 5320MHz: 4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz) 5500 ~ 5700MHz: 8 for 802.11a, 802.11n (20MHz) 3 for 802.11n (40MHz)
OUTPUT POWER	30.660mW for 5180 ~ 5240MHz 30.876mW for 5260 ~ 5320MHz 30.045mW for 5500 ~ 5700MHz
ANTENNA TYPE	Dipole antenna with 5dBi gain
ANTENNA CONNECTOR	RP-SMA Plug
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	NA

NOTE:

- The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers. The EUT has diversity function for 802.11a/b/g. The chain 0 and chain 1 of 802.11a/b/g have been pre-tested, and the chain 0 was the worst for final test.

MODULATION MODE	TX FUNCTION
802.11b	1TX
802.11g	1TX
802.11a	1TX
802.11n (20MHz)	2TX
802.11n (40MHz)	2TX

- The EUT uses the following support unit.

PRODUCT	BRAND	MODEL	SPEC.
Dipole Antenna	LTC	GEC6200	2.4G & 5G (dual band)
RF cable	NA	NA	0.15m shielded cable without core

- The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES

FOR 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
38	5190 MHz	46	5230 MHz

FOR 5260 ~ 5320MHz

4 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
52	5260 MHz	60	5300 MHz
56	5280 MHz	64	5320 MHz

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
54	5270 MHz	62	5310 MHz

FOR 5500 ~ 5700MHz

8 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
100	5500 MHz	116	5580 MHz
104	5520 MHz	132	5660 MHz
108	5540 MHz	136	5680 MHz
112	5560 MHz	140	5700 MHz

3 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
102	5510 MHz	134	5670 MHz
110	5550 MHz		

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE:

The antenna of the EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.

RADIATED EMISSION TEST (ABOVE 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.0
-	802.11n (20MHz)		36 to 48	36, 40, 48	OFDM	BPSK	7.2
-	802.11n (40MHz)		38 to 46	38, 46	OFDM	BPSK	15.0
-	802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	BPSK	6.0
-	802.11n (20MHz)		52 to 64	52, 60, 64	OFDM	BPSK	7.2
-	802.11n (40MHz)		54 to 62	54, 62	OFDM	BPSK	15.0
-	802.11a	5500-5700	100 to 140	100, 116, 140	OFDM	BPSK	6.0
-	802.11n (20MHz)		100 to 140	100, 116, 140	OFDM	BPSK	7.2
-	802.11n (40MHz)		102 to 134	102, 110, 134	OFDM	BPSK	15.0

RADIATED EMISSION TEST (BELOW 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11n (20MHz)	5180-5320	36 to 64	60	OFDM	BPSK	7.2
-	802.11n (20MHz)	5500-5700	100 to 140	140	OFDM	BPSK	7.2

**POWER LINE CONDUCTED EMISSION TEST:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11n (20MHz)	5180-5320	36 to 64	60	OFDM	BPSK	7.2
-	802.11n (20MHz)	5500-5700	100 to 140	140	OFDM	BPSK	7.2

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.0
-	802.11n (20MHz)		36 to 48	36, 40, 48	OFDM	BPSK	7.2
-	802.11n (40MHz)		38 to 46	38, 46	OFDM	BPSK	15.0
-	802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	BPSK	6.0
-	802.11n (20MHz)		52 to 64	52, 60, 64	OFDM	BPSK	7.2
-	802.11n (40MHz)		54 to 62	54, 62	OFDM	BPSK	15.0
-	802.11a	5500-5700	100 to 140	100, 116, 140	OFDM	BPSK	6.0
-	802.11n (20MHz)		100 to 140	100, 116, 140	OFDM	BPSK	7.2
-	802.11n (40MHz)		102 to 134	102, 110, 134	OFDM	BPSK	15.0

TEST CONDITION:


APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
RE $\geq$ 1G	25deg. C, 65%RH	120Vac, 60Hz	Ted Chang
RE $<$ 1G	25deg. C, 65%RH	120Vac, 60Hz	Ted Chang
PLC	22deg. C, 65%RH	120Vac, 60Hz	Brad Tung
APCM	25deg. C, 65%RH	120Vac, 60Hz	Nick Chen



A D T

3.3 DUTY CYCLE OF TEST SIGNAL

Duty cycle of test signal is > 98 %, duty factor is not required.

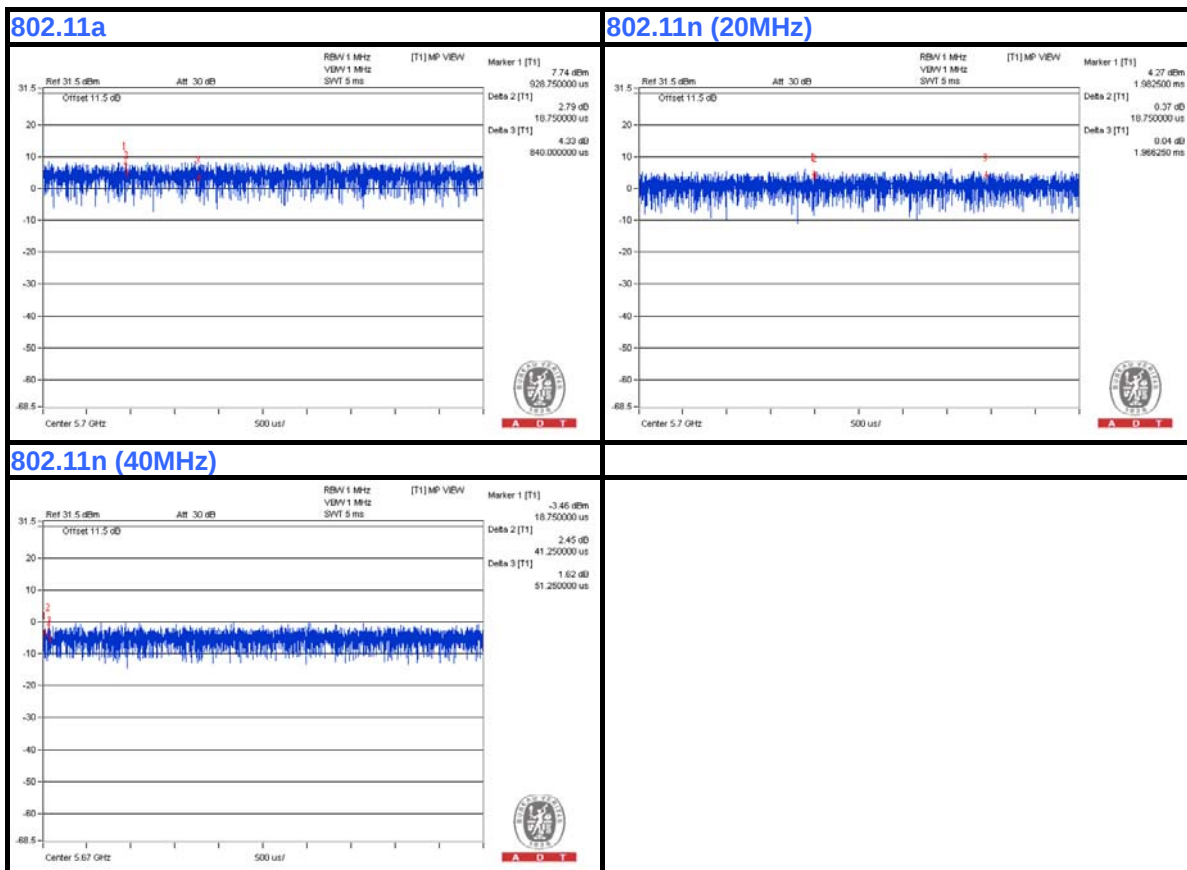

3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	D531	CN-0XM006-48643-8 1U-2610	QDS-BRCM1020
2	CONVERTIBLE BOARD	NA	NA	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA

NOTE: 1. All power cords of the above support units are non shielded (1.8m).
2. Item 1 acted as a communication partner to transfer data.
3. Item 2 was provided by the manufacturer.

3.4.1 CONFIGURATION OF SYSTEM UNDER TEST

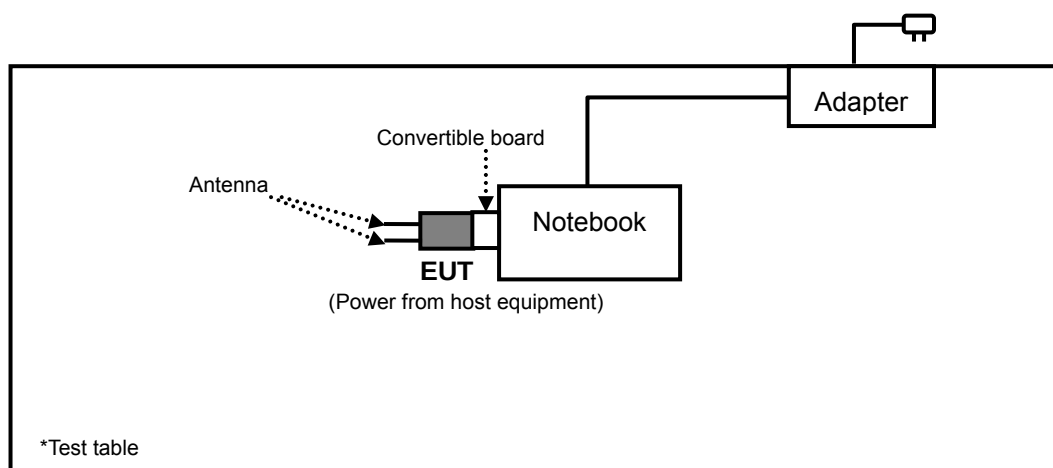

3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

789033 D01 General UNII Test Procedures v01 r03

662911 D01 Multiple Transmitter Output v02

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

APPLICABLE TO	LIMIT	
√	FIELD STRENGTH AT 3m (dBμV/m)	
	PK	AV
	74	54
	EIRP LIMIT (dBm)	EQUIVALENT FIELD STRENGTH AT 3m (dBμV/m)
	PK	PK
	-27	68.3

NOTE: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

4.1.3 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100212	Aug. 06, 2012	Aug. 05, 2013
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Jan. 31, 2013	Jan. 30, 2014
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Mar. 20, 2013	Mar. 19, 2014
HORN Antenna SCHWARZBECK	9120D	209	Sep. 03, 2012	Sep. 02, 2013
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-404	Dec. 22, 2012	Dec. 21, 2013
Preamplifier Agilent	8447D	2944A10633	Oct. 25, 2012	Oct. 24, 2013
Preamplifier Agilent	8449B	3008A01964	Oct. 25, 2012	Oct. 24, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250723/4	Aug. 28, 2012	Aug. 27, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 106	12738/6+309224/ 4	Aug. 28, 2012	Aug. 27, 2013
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA	NA
Turn Table BV ADT	TT100	TT93021703	NA	NA
Turn Table Controller BV ADT	SC100	SC93021703	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 25, 2012	Oct. 24, 2013
High Speed Peak Power Meter	ML2495A	0824012	Aug. 22, 2012	Aug. 21, 2013
Power Sensor	MA2411B	0738171	Jul. 30, 2012	Jul. 29, 2013
WIT Standard Temperature And Humidity Chamber	TH-4S-C	W981030	Jun. 10, 2013	Jun. 09, 2014

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 3.

3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.

4. The FCC Site Registration No. is 988962.

5. The IC Site Registration No. is IC 7450F-3.

4.1.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 1kHz(Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.5 DEVIATION FROM TEST STANDARD

No deviation.

4.1.6 TEST SETUP

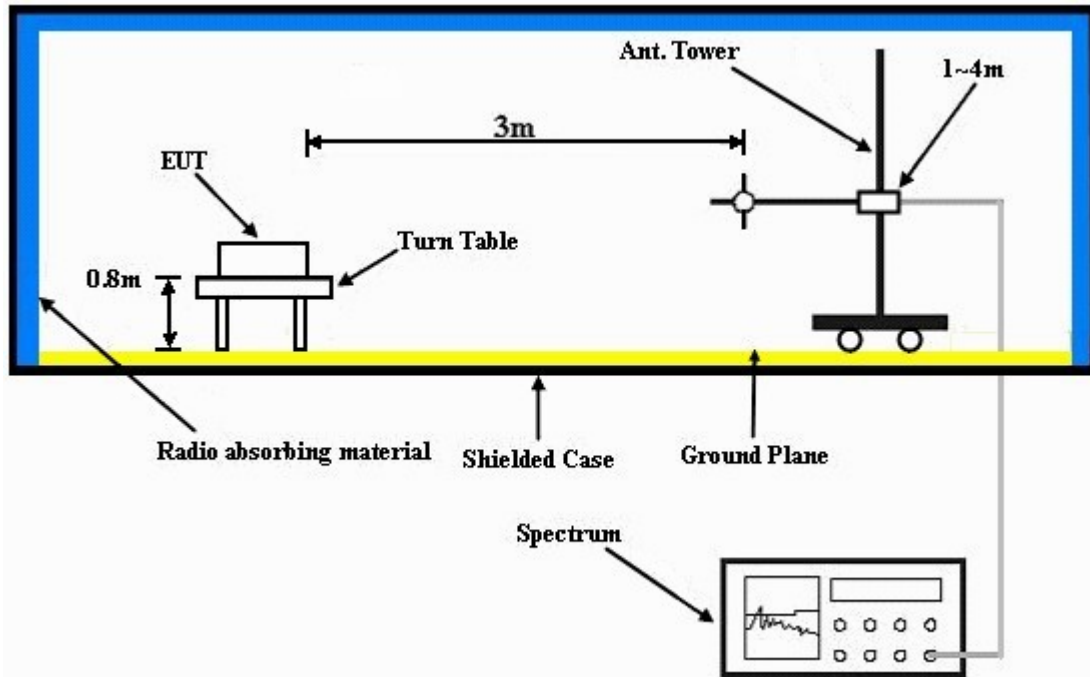

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.7 EUT OPERATING CONDITION

- Plugged the EUT into a notebook through a convertible board and placed on a test table.
- The notebook ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.

4.1.8 TEST RESULTS

ABOVE 1GHz DATA :

802.11a

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.0 PK	74.0	-15.0	1.27 H	190	55.20	3.80
2	5150.00	43.2 AV	54.0	-10.8	1.27 H	190	39.40	3.80
3	*5180.00	99.6 PK			1.21 H	192	61.80	37.80
4	*5180.00	89.0 AV			1.21 H	192	51.20	37.80
5	#10360.00	56.6 PK	74.0	-17.4	1.00 H	200	42.10	14.50
6	#10360.00	42.6 AV	54.0	-11.4	1.00 H	200	28.10	14.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	60.0 PK	74.0	-14.0	1.00 V	25	56.20	3.80
2	5150.00	44.8 AV	54.0	-9.2	1.00 V	25	41.00	3.80
3	*5180.00	110.9 PK			1.00 V	27	73.10	37.80
4	*5180.00	100.3 AV			1.00 V	27	62.50	37.80
5	#10360.00	57.9 PK	74.0	-16.1	1.00 V	50	43.40	14.50
6	#10360.00	44.2 AV	54.0	-9.8	1.00 V	50	29.70	14.50

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 40	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	99.0 PK			1.19 H	190	61.20	37.80
2	*5200.00	88.8 AV			1.19 H	190	51.00	37.80
3	#10400.00	57.0 PK	74.0	-17.0	1.00 H	205	42.30	14.70
4	#10400.00	43.2 AV	54.0	-10.8	1.00 H	205	28.50	14.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	110.9 PK			1.00 V	30	73.10	37.80
2	*5200.00	100.2 AV			1.00 V	30	62.40	37.80
3	#10400.00	58.2 PK	74.0	-15.8	1.00 V	58	43.50	14.70
4	#10400.00	44.8 AV	54.0	-9.2	1.00 V	58	30.10	14.70

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 48	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	100.0 PK			1.40 H	219	62.20	37.80
2	*5240.00	89.1 AV			1.40 H	219	51.30	37.80
3	5350.00	58.4 PK	74.0	-15.6	1.38 H	217	54.10	4.30
4	5350.00	42.8 AV	54.0	-11.2	1.38 H	217	38.50	4.30
5	#10480.00	56.6 PK	74.0	-17.4	1.00 H	201	41.60	15.00
6	#10480.00	42.8 AV	54.0	-11.2	1.00 H	201	27.80	15.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	111.2 PK			1.00 V	148	73.40	37.80
2	*5240.00	100.5 AV			1.00 V	148	62.70	37.80
3	5350.00	59.5 PK	74.0	-14.5	1.00 V	143	55.20	4.30
4	5350.00	43.5 AV	54.0	-10.5	1.00 V	143	39.20	4.30
5	#10480.00	58.1 PK	74.0	-15.9	1.00 V	56	43.10	15.00
6	#10480.00	44.0 AV	54.0	-10.0	1.00 V	56	29.00	15.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 52	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 71%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.3 PK	74.0	-15.7	1.26 H	219	54.50	3.80
2	5150.00	42.2 AV	54.0	-11.8	1.26 H	219	38.40	3.80
3	*5260.00	100.5 PK			1.24 H	211	62.60	37.90
4	*5260.00	89.6 AV			1.24 H	211	51.70	37.90
5	#10520.00	57.1 PK	74.0	-16.9	1.00 H	205	42.10	15.00
6	#10520.00	42.9 AV	54.0	-11.1	1.00 H	205	27.90	15.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.4 PK	74.0	-14.6	1.00 V	172	55.60	3.80
2	5150.00	43.9 AV	54.0	-10.1	1.00 V	172	40.10	3.80
3	*5260.00	111.7 PK			1.00 V	176	73.80	37.90
4	*5260.00	100.8 AV			1.00 V	176	62.90	37.90
5	#10520.00	58.3 PK	74.0	-15.7	1.00 V	52	43.30	15.00
6	#10520.00	44.5 AV	54.0	-9.5	1.00 V	52	29.50	15.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 60	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	101.0 PK			1.00 H	218	63.10	37.90
2	*5300.00	89.6 AV			1.00 H	218	51.70	37.90
3	10600.00	57.7 PK	74.0	-16.3	1.00 H	208	42.50	15.20
4	10600.00	43.5 AV	54.0	-10.5	1.00 H	208	28.30	15.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	111.7 PK			1.00 V	146	73.80	37.90
2	*5300.00	101.0 AV			1.00 V	146	63.10	37.90
3	10600.00	58.9 PK	74.0	-15.1	1.00 V	50	43.70	15.20
4	10600.00	45.0 AV	54.0	-9.0	1.00 V	50	29.80	15.20

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 64	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 71%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	101.3 PK			1.00 H	211	63.30	38.00
2	*5320.00	90.6 AV			1.00 H	211	52.60	38.00
3	5350.00	60.4 PK	74.0	-13.6	1.00 H	210	56.10	4.30
4	5350.00	44.5 AV	54.0	-9.5	1.00 H	210	40.20	4.30
5	10640.00	57.2 PK	74.0	-16.8	1.00 H	200	41.90	15.30
6	10640.00	43.2 AV	54.0	-10.8	1.00 H	200	27.90	15.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	110.9 PK			1.00 V	150	72.90	38.00
2	*5320.00	100.8 AV			1.00 V	150	62.80	38.00
3	5350.00	62.2 PK	74.0	-11.8	1.00 V	151	57.90	4.30
4	5350.00	46.0 AV	54.0	-8.0	1.00 V	151	41.70	4.30
5	10640.00	58.4 PK	74.0	-15.6	1.00 V	51	43.10	15.30
6	10640.00	44.8 AV	54.0	-9.2	1.00 V	51	29.50	15.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 100	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 71%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	57.5 PK	74.0	-16.5	1.02 H	176	53.00	4.50
2	5460.00	43.9 AV	54.0	-10.1	1.02 H	176	39.40	4.50
3	#5470.00	60.5 PK	74.0	-13.5	1.02 H	176	56.10	4.40
4	#5470.00	46.5 AV	54.0	-7.5	1.02 H	176	42.10	4.40
5	*5500.00	100.3 PK			1.02 H	178	62.00	38.30
6	*5500.00	89.1 AV			1.02 H	178	50.80	38.30
7	11000.00	57.6 PK	74.0	-16.4	1.00 H	208	41.60	16.00
8	11000.00	42.5 AV	54.0	-11.5	1.00 H	208	26.50	16.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	58.7 PK	74.0	-15.3	1.08 V	138	54.20	4.50
2	5460.00	45.4 AV	54.0	-8.6	1.08 V	138	40.90	4.50
3	#5470.00	61.4 PK	74.0	-12.6	1.08 V	138	57.00	4.40
4	#5470.00	47.0 AV	54.0	-7.0	1.08 V	138	42.60	4.40
5	*5500.00	111.8 PK			1.06 V	138	73.50	38.30
6	*5500.00	100.8 AV			1.06 V	138	62.50	38.30
7	11000.00	58.8 PK	74.0	-15.2	1.00 V	210	42.80	16.00
8	11000.00	44.1 AV	54.0	-9.9	1.00 V	210	28.10	16.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 116	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 71%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5580.00	100.8 PK			1.00 H	197	62.40	38.40
2	*5580.00	89.6 AV			1.00 H	197	51.20	38.40
3	11160.00	58.2 PK	74.0	-15.8	1.00 H	201	42.20	16.00
4	11160.00	43.1 AV	54.0	-10.9	1.00 H	201	27.10	16.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5580.00	111.8 PK			1.12 V	177	73.40	38.40
2	*5580.00	100.8 AV			1.12 V	177	62.40	38.40
3	11160.00	59.3 PK	74.0	-14.7	1.00 V	214	43.30	16.00
4	11160.00	44.7 AV	54.0	-9.3	1.00 V	214	28.70	16.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 140	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	102.9 PK			1.13 H	196	64.30	38.60
2	*5700.00	91.6 AV			1.13 H	196	53.00	38.60
3	#5725.00	57.0 PK	74.0	-17.0	1.10 H	186	52.20	4.80
4	#5725.00	46.0 AV	54.0	-8.0	1.10 H	186	41.20	4.80
5	11400.00	61.8 PK	74.0	-12.2	1.54 H	118	45.90	15.90
6	11400.00	46.7 AV	54.0	-7.3	1.54 H	118	30.80	15.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	110.9 PK			1.00 V	181	72.30	38.60
2	*5700.00	100.1 AV			1.00 V	181	61.50	38.60
3	#5725.00	64.8 PK	74.0	-9.2	1.00 V	181	60.00	4.80
4	#5725.00	50.0 AV	54.0	-4.0	1.00 V	181	45.20	4.80
5	11400.00	62.9 PK	74.0	-11.1	1.54 V	187	47.00	15.90
6	11400.00	48.7 AV	54.0	-5.3	1.54 V	187	32.80	15.90

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.4 PK	74.0	-14.6	1.02 H	147	55.60	3.80
2	5150.00	44.0 AV	54.0	-10.0	1.02 H	147	40.20	3.80
3	*5180.00	98.0 PK			1.00 H	160	60.20	37.80
4	*5180.00	87.7 AV			1.00 H	160	49.90	37.80
5	#10360.00	59.4 PK	74.0	-14.6	1.62 H	188	44.90	14.50
6	#10360.00	46.0 AV	54.0	-8.0	1.62 H	188	31.50	14.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.9 PK	74.0	-16.1	1.13 V	170	54.10	3.80
2	5150.00	43.2 AV	54.0	-10.8	1.13 V	170	39.40	3.80
3	*5180.00	111.5 PK			1.13 V	174	73.70	37.80
4	*5180.00	101.2 AV			1.13 V	174	63.40	37.80
5	#10360.00	63.4 PK	74.0	-10.6	1.04 V	184	48.90	14.50
6	#10360.00	47.4 AV	54.0	-6.6	1.04 V	184	32.90	14.50

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 40	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	99.6 PK			1.24 H	290	61.80	37.80
2	*5200.00	89.1 AV			1.24 H	290	51.30	37.80
3	#10400.00	59.3 PK	74.0	-14.7	1.62 H	307	44.60	14.70
4	#10400.00	45.6 AV	54.0	-8.4	1.62 H	307	30.90	14.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	111.9 PK			1.00 V	0	74.10	37.80
2	*5200.00	102.0 AV			1.00 V	0	64.20	37.80
3	#10400.00	63.5 PK	74.0	-10.5	1.49 V	301	48.80	14.70
4	#10400.00	47.6 AV	54.0	-6.4	1.49 V	301	32.90	14.70

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 48	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	98.4 PK			1.00 H	126	60.60	37.80
2	*5240.00	88.2 AV			1.00 H	126	50.40	37.80
3	5350.00	59.5 PK	74.0	-14.5	1.00 H	130	55.20	4.30
4	5350.00	47.0 AV	54.0	-7.0	1.00 H	130	42.70	4.30
5	#10480.00	60.8 PK	74.0	-13.2	1.59 H	354	45.80	15.00
6	#10480.00	46.5 AV	54.0	-7.5	1.59 H	354	31.50	15.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	111.7 PK			1.00 V	2	73.90	37.80
2	*5240.00	101.5 AV			1.00 V	2	63.70	37.80
3	5350.00	61.0 PK	74.0	-13.0	1.07 V	154	56.70	4.30
4	5350.00	47.9 AV	54.0	-6.1	1.07 V	154	43.60	4.30
5	#10480.00	63.2 PK	74.0	-10.8	1.95 V	182	48.20	15.00
6	#10480.00	47.7 AV	54.0	-6.3	1.95 V	182	32.70	15.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 52	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	58.6 PK	74.0	-15.4	1.06 H	320	54.80	3.80
2	5150.00	46.0 AV	54.0	-8.0	1.06 H	320	42.20	3.80
3	*5260.00	98.8 PK			1.00 H	217	60.90	37.90
4	*5260.00	88.1 AV			1.00 H	217	50.20	37.90
5	#10520.00	59.9 PK	74.0	-14.1	1.93 H	187	44.90	15.00
6	#10520.00	46.8 AV	54.0	-7.2	1.93 H	187	31.80	15.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	61.3 PK	74.0	-12.7	1.00 V	184	57.50	3.80
2	5150.00	47.4 AV	54.0	-6.6	1.00 V	184	43.60	3.80
3	*5260.00	112.6 PK			1.00 V	174	74.70	37.90
4	*5260.00	102.7 AV			1.00 V	174	64.80	37.90
5	#10520.00	64.8 PK	74.0	-9.2	1.84 V	269	49.80	15.00
6	#10520.00	48.0 AV	54.0	-6.0	1.84 V	269	33.00	15.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 60	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	98.6 PK			1.00 H	217	60.70	37.90
2	*5300.00	88.7 AV			1.00 H	217	50.80	37.90
3	10600.00	60.7 PK	74.0	-13.3	1.61 H	204	45.50	15.20
4	10600.00	46.7 AV	54.0	-7.3	1.61 H	204	31.50	15.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	111.9 PK			1.00 V	0	74.00	37.90
2	*5300.00	101.8 AV			1.00 V	0	63.90	37.90
3	10600.00	65.0 PK	74.0	-9.0	1.63 V	204	49.80	15.20
4	10600.00	49.1 AV	54.0	-4.9	1.63 V	204	33.90	15.20

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 64	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	98.1 PK			1.23 H	217	60.10	38.00
2	*5320.00	87.6 AV			1.23 H	217	49.60	38.00
3	5350.00	59.0 PK	74.0	-15.0	1.03 H	62	54.70	4.30
4	5350.00	45.9 AV	54.0	-8.1	1.03 H	62	41.60	4.30
5	10640.00	61.1 PK	74.0	-12.9	1.25 H	254	45.80	15.30
6	10640.00	46.8 AV	54.0	-7.2	1.25 H	254	31.50	15.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	112.5 PK			1.00 V	174	74.50	38.00
2	*5320.00	101.8 AV			1.00 V	174	63.80	38.00
3	5350.00	57.1 PK	74.0	-16.9	1.10 V	0	52.80	4.30
4	5350.00	48.1 AV	54.0	-5.9	1.10 V	0	43.80	4.30
5	10640.00	64.8 PK	74.0	-9.2	1.22 V	248	49.50	15.30
6	10640.00	48.3 AV	54.0	-5.7	1.22 V	248	33.00	15.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 100	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	55.7 PK	74.0	-18.3	1.24 H	221	51.20	4.50
2	5460.00	42.7 AV	54.0	-11.3	1.24 H	221	38.20	4.50
3	#5470.00	57.9 PK	74.0	-16.1	1.32 H	251	53.50	4.40
4	#5470.00	43.8 AV	54.0	-10.2	1.32 H	251	39.40	4.40
5	*5500.00	97.6 PK			1.00 H	215	59.30	38.30
6	*5500.00	87.3 AV			1.00 H	215	49.00	38.30
7	11000.00	60.8 PK	74.0	-13.2	1.24 H	259	44.80	16.00
8	11000.00	46.8 AV	54.0	-7.2	1.24 H	259	30.80	16.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	54.4 PK	74.0	-19.6	1.00 V	2	49.90	4.50
2	5460.00	42.7 AV	54.0	-11.3	1.00 V	2	38.20	4.50
3	#5470.00	59.8 PK	74.0	-14.2	1.00 V	8	55.40	4.40
4	#5470.00	46.4 AV	54.0	-7.6	1.00 V	8	42.00	4.40
5	*5500.00	112.0 PK			1.11 V	179	73.70	38.30
6	*5500.00	101.7 AV			1.11 V	179	63.40	38.30
7	11000.00	65.2 PK	74.0	-8.8	1.69 V	321	49.20	16.00
8	11000.00	49.7 AV	54.0	-4.3	1.69 V	321	33.70	16.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 116	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5580.00	98.7 PK			1.00 H	163	60.30	38.40
2	*5580.00	88.5 AV			1.00 H	163	50.10	38.40
3	11160.00	61.4 PK	74.0	-12.6	1.00 H	61	45.40	16.00
4	11160.00	47.5 AV	54.0	-6.5	1.00 H	61	31.50	16.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5580.00	112.3 PK			1.46 V	349	73.90	38.40
2	*5580.00	102.2 AV			1.46 V	349	63.80	38.40
3	11160.00	64.5 PK	74.0	-9.5	1.00 V	214	48.50	16.00
4	11160.00	48.9 AV	54.0	-5.1	1.00 V	214	32.90	16.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 140	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	98.1 PK			1.00 H	174	59.50	38.60
2	*5700.00	87.8 AV			1.00 H	174	49.20	38.60
3	#5725.00	59.6 PK	74.0	-14.4	1.54 H	255	54.80	4.80
4	#5725.00	47.4 AV	54.0	-6.6	1.54 H	255	42.60	4.80
5	11400.00	61.0 PK	74.0	-13.0	1.62 H	51	45.10	15.90
6	11400.00	47.4 AV	54.0	-6.6	1.62 H	51	31.50	15.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	112.1 PK			1.00 V	182	73.50	38.60
2	*5700.00	102.1 AV			1.00 V	182	63.50	38.60
3	#5725.00	67.1 PK	74.0	-6.9	1.24 V	158	62.30	4.80
4	#5725.00	51.1 AV	54.0	-2.9	1.24 V	158	46.30	4.80
5	11400.00	64.2 PK	74.0	-9.8	1.57 V	64	48.30	15.90
6	11400.00	49.7 AV	54.0	-4.3	1.57 V	64	33.80	15.90

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (40MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 38	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.0 PK	74.0	-8.0	1.32 H	158	62.20	3.80
2	5150.00	48.7 AV	54.0	-5.3	1.32 H	158	44.90	3.80
3	*5190.00	94.3 PK			1.00 H	127	56.50	37.80
4	*5190.00	83.9 AV			1.00 H	127	46.10	37.80
5	#10380.00	60.2 PK	74.0	-13.8	1.90 H	100	45.50	14.70
6	#10380.00	46.2 AV	54.0	-7.8	1.90 H	100	31.50	14.70
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	70.2 PK	74.0	-3.8	1.00 V	178	66.40	3.80
2	5150.00	51.2 AV	54.0	-2.8	1.00 V	178	47.40	3.80
3	*5190.00	96.8 PK			1.00 V	147	59.00	37.80
4	*5190.00	96.6 AV			1.00 V	147	58.80	37.80
5	#10380.00	62.3 PK	74.0	-11.7	1.54 V	187	47.60	14.70
6	#10380.00	47.9 AV	54.0	-6.1	1.54 V	187	33.20	14.70

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 46	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	59.3 PK			1.34 H	162	55.30	4.00
2	*5230.00	49.2 AV			1.34 H	162	45.20	4.00
3	5350.00	57.5 PK	74.0	-16.5	1.69 H	162	53.20	4.30
4	5350.00	45.0 AV	54.0	-9.0	1.69 H	162	40.70	4.30
5	#10460.00	60.7 PK	74.0	-13.3	1.08 H	210	45.80	14.90
6	#10460.00	45.8 AV	54.0	-8.2	1.08 H	210	30.90	14.90
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	107.4 PK			1.00 V	175	69.60	37.80
2	*5230.00	97.5 AV			1.00 V	175	59.70	37.80
3	5350.00	60.8 PK	74.0	-13.2	1.25 V	160	56.50	4.30
4	5350.00	47.0 AV	54.0	-7.0	1.25 V	160	42.70	4.30
5	#10460.00	62.5 PK	74.0	-11.5	1.00 V	247	47.60	14.90
6	#10460.00	48.1 AV	54.0	-5.9	1.00 V	247	33.20	14.90

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 54	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.5 PK	74.0	-16.5	1.00 H	214	53.70	3.80
2	5150.00	45.3 AV	54.0	-8.7	1.00 H	214	41.50	3.80
3	*5270.00	94.8 PK			1.64 H	221	56.90	37.90
4	*5270.00	84.5 AV			1.64 H	221	46.60	37.90
5	#10540.00	60.2 PK	74.0	-13.8	1.54 H	118	45.20	15.00
6	#10540.00	45.6 AV	54.0	-8.4	1.54 H	118	30.60	15.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.0 PK	74.0	-17.0	1.00 V	214	53.20	3.80
2	5150.00	46.5 AV	54.0	-7.5	1.00 V	214	42.70	3.80
3	*5270.00	108.4 PK			1.00 V	179	70.50	37.90
4	*5270.00	97.6 AV			1.00 V	179	59.70	37.90
5	#10540.00	63.5 PK	74.0	-10.5	1.35 V	184	48.50	15.00
6	#10540.00	47.5 AV	54.0	-6.5	1.35 V	184	32.50	15.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 62	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5310.00	95.0 PK			1.35 H	215	57.10	37.90
2	*5310.00	84.7 AV			1.35 H	215	46.80	37.90
3	5350.00	66.9 PK	74.0	-7.1	1.22 H	140	62.60	4.30
4	5350.00	51.9 AV	54.0	-2.1	1.22 H	140	47.60	4.30
5	10620.00	60.8 PK	74.0	-13.2	1.89 H	360	45.50	15.30
6	10620.00	45.8 AV	54.0	-8.2	1.89 H	360	30.50	15.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5310.00	105.5 PK			1.11 V	13	67.60	37.90
2	*5310.00	95.7 AV			1.11 V	13	57.80	37.90
3	5350.00	68.5 PK	74.0	-5.5	1.10 V	143	64.20	4.30
4	5350.00	52.5 AV	54.0	-1.5	1.10 V	143	48.20	4.30
5	10620.00	64.0 PK	74.0	-10.0	1.59 V	351	48.70	15.30
6	10620.00	48.9 AV	54.0	-5.1	1.59 V	351	33.60	15.30

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 102	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	55.7 PK	74.0	-18.3	1.00 H	154	51.20	4.50
2	5460.00	41.9 AV	54.0	-12.1	1.00 H	154	37.40	4.50
3	#5470.00	58.1 PK	74.0	-15.9	1.04 H	154	53.70	4.40
4	#5470.00	44.7 AV	54.0	-9.3	1.04 H	154	40.30	4.40
5	*5510.00	94.8 PK			1.00 H	221	56.50	38.30
6	*5510.00	84.1 AV			1.00 H	221	45.80	38.30
7	11020.00	61.6 PK	74.0	-12.4	1.04 H	184	45.60	16.00
8	11020.00	46.5 AV	54.0	-7.5	1.04 H	184	30.50	16.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	58.9 PK	74.0	-15.1	1.15 V	29	54.40	4.50
2	5460.00	42.5 AV	54.0	-11.5	1.15 V	29	38.00	4.50
3	#5470.00	69.9 PK	74.0	-4.1	1.15 V	29	65.50	4.40
4	#5470.00	52.5 AV	54.0	-1.5	1.15 V	29	48.10	4.40
5	*5510.00	108.7 PK			1.05 V	347	70.40	38.30
6	*5510.00	98.1 AV			1.05 V	347	59.80	38.30
7	11020.00	64.2 PK	74.0	-9.8	1.59 V	235	48.20	16.00
8	11020.00	48.7 AV	54.0	-5.3	1.59 V	235	32.70	16.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 110	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5550.00	94.7 PK			1.00 H	223	56.30	38.40
2	*5550.00	84.0 AV			1.00 H	223	45.60	38.40
3	11100.00	64.6 PK	74.0	-9.4	1.47 H	258	48.60	16.00
4	11100.00	46.5 AV	54.0	-7.5	1.47 H	258	30.50	16.00
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5550.00	108.1 PK			1.33 V	174	69.70	38.40
2	*5550.00	97.7 AV			1.33 V	174	59.30	38.40
3	11100.00	63.8 PK	74.0	-10.2	1.53 V	214	47.80	16.00
4	11100.00	49.6 AV	54.0	-4.4	1.53 V	214	33.60	16.00

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 134	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5670.00	93.9 PK			1.00 H	147	55.30	38.60
2	*5670.00	83.8 AV			1.00 H	147	45.20	38.60
3	#5725.00	57.3 PK	74.0	-16.7	1.04 H	154	18.60	38.70
4	#5725.00	44.3 AV	54.0	-9.7	1.04 H	154	5.60	38.70
5	11340.00	62.3 PK	74.0	-11.7	1.00 H	241	46.50	15.80
6	11340.00	47.3 AV	54.0	-6.7	1.00 H	241	31.50	15.80
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5670.00	107.7 PK			1.21 V	350	69.10	38.60
2	*5670.00	97.2 AV			1.21 V	350	58.60	38.60
3	#5725.00	60.1 PK	74.0	-13.9	1.09 V	309	55.30	4.80
4	#5725.00	46.4 AV	54.0	-7.6	1.09 V	309	41.60	4.80
5	11340.00	63.6 PK	74.0	-10.4	1.00 V	125	47.80	15.80
6	11340.00	49.2 AV	54.0	-4.8	1.00 V	125	33.40	15.80

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

BELOW 1GHz WORST-CASE DATA : 802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 60	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.12	26.1 QP	40.0	-13.9	1.24 H	305	40.70	-14.60
2	99.89	30.1 QP	43.5	-13.4	1.00 H	208	48.50	-18.40
3	199.05	38.0 QP	43.5	-5.5	1.24 H	29	54.60	-16.60
4	265.16	40.3 QP	46.0	-5.7	1.00 H	96	53.80	-13.50
5	500.42	26.9 QP	46.0	-19.1	1.50 H	231	35.20	-8.30
6	599.58	32.1 QP	46.0	-13.9	1.00 H	119	38.30	-6.20
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.12	28.0 QP	40.0	-12.0	1.00 V	352	42.60	-14.60
2	99.89	31.8 QP	43.5	-11.7	1.99 V	145	50.20	-18.40
3	199.05	28.6 QP	43.5	-14.9	1.00 V	318	45.20	-16.60
4	298.21	27.2 QP	46.0	-18.8	1.50 V	125	39.50	-12.30
5	498.47	36.8 QP	46.0	-9.2	1.00 V	127	45.10	-8.30
6	599.58	28.6 QP	46.0	-17.4	1.24 V	249	34.80	-6.20

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 140	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY	Ted Chang

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.12	26.7 QP	40.0	-13.3	1.00 H	18	41.30	-14.60
2	97.95	29.5 QP	43.5	-14.0	1.99 H	212	48.30	-18.80
3	166.00	35.4 QP	43.5	-8.1	1.00 H	54	49.70	-14.30
4	199.05	38.0 QP	43.5	-5.5	1.24 H	27	54.60	-16.60
5	265.16	40.7 QP	46.0	-5.3	1.50 H	96	54.20	-13.50
6	498.47	28.5 QP	46.0	-17.5	1.00 H	229	36.80	-8.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	99.89	31.5 QP	43.5	-12.0	1.99 V	174	49.90	-18.40
2	199.05	28.2 QP	43.5	-15.3	1.00 V	311	44.80	-16.60
3	265.16	27.4 QP	46.0	-18.6	1.24 V	6	40.90	-13.50
4	500.42	37.3 QP	46.0	-8.7	1.24 V	124	45.60	-8.30
5	599.58	28.5 QP	46.0	-17.5	1.00 V	126	34.70	-6.20
6	809.56	26.1 QP	46.0	-19.9	1.00 V	319	28.20	-2.10

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Nov. 09, 2012	Nov. 08, 2013
RF signal cable Woken	5D-FB	Cable-HYCO2-01	Dec. 28, 2012	Dec. 27, 2013
LISN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Dec. 21, 2012	Dec. 20, 2013
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Jul. 02, 2013	Jul. 01, 2014
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 2.
3. The VCCI Site Registration No. is C-2047.

4.2.3 TEST PROCEDURES


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

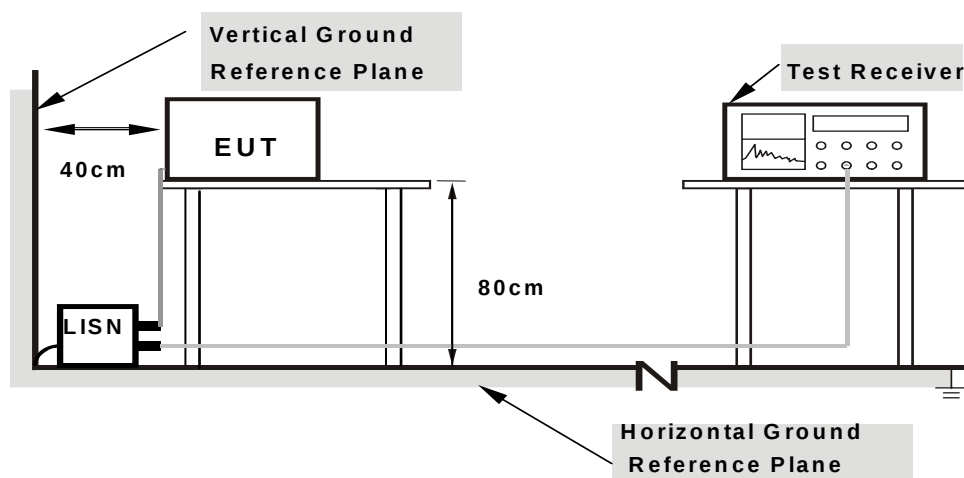

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

4.2.7 TEST RESULTS


CONDUCTED WORST-CASE DATA : 802.11n (20MHz)

PHASE	Line 1	6dB BANDWIDTH	9kHz
CHANNEL	Channel 60		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	0.17	36.01	19.26	36.18	19.43	65.38	55.38	-29.19	-35.94
2	0.29844	0.19	38.44	26.53	38.63	26.72	60.29	50.29	-21.66	-23.57
3	0.83750	0.25	30.94	26.26	31.19	26.51	56.00	46.00	-24.81	-19.49
4	3.41797	0.34	26.24	14.15	26.58	14.49	56.00	46.00	-29.42	-31.51
5	15.94141	0.55	25.62	20.38	26.17	20.93	60.00	50.00	-33.83	-29.07
6	23.23047	0.61	23.11	17.85	23.72	18.46	60.00	50.00	-36.28	-31.54

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

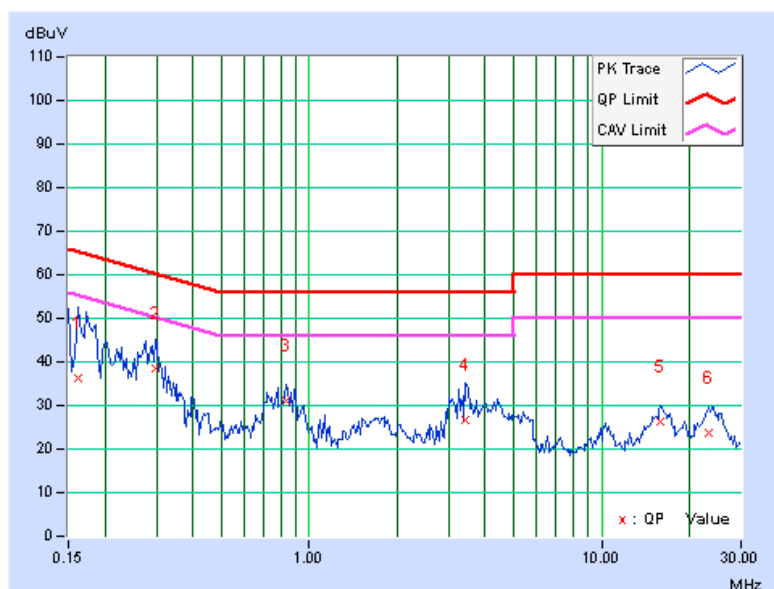


PHASE	Line 2	6dB BANDWIDTH	9kHz
CHANNEL	Channel 60		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	(dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18125	0.18	43.45	28.77	43.63	28.95	64.43	54.43	-20.80	-25.48
2	0.27500	0.21	35.35	24.53	35.56	24.74	60.97	50.97	-25.41	-26.23
3	0.30625	0.22	39.47	31.35	39.69	31.57	60.07	50.07	-20.38	-18.50
4	0.83359	0.24	29.44	23.84	29.68	24.08	56.00	46.00	-26.32	-21.92
5	3.45313	0.36	25.50	13.88	25.86	14.24	56.00	46.00	-30.14	-31.76
6	16.12500	0.63	25.84	20.68	26.47	21.31	60.00	50.00	-33.53	-28.69

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

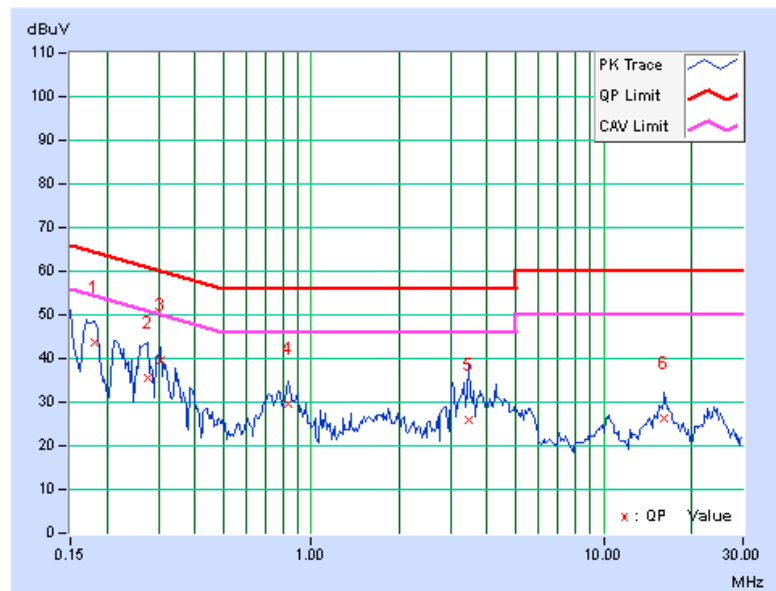


PHASE	Line 1	6dB BANDWIDTH	9kHz
CHANNEL	Channel 140		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18125	0.17	42.76	29.88	42.93	30.05	64.43	54.43	-21.50	-24.38
2	0.29844	0.19	40.98	30.90	41.17	31.09	60.29	50.29	-19.12	-19.20
3	0.83359	0.25	30.17	24.74	30.42	24.99	56.00	46.00	-25.58	-21.01
4	3.43359	0.34	24.01	11.79	24.35	12.13	56.00	46.00	-31.65	-33.87
5	4.47266	0.37	24.49	13.42	24.86	13.79	56.00	46.00	-31.14	-32.21
6	16.25391	0.56	25.03	19.44	25.59	20.00	60.00	50.00	-34.41	-30.00

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

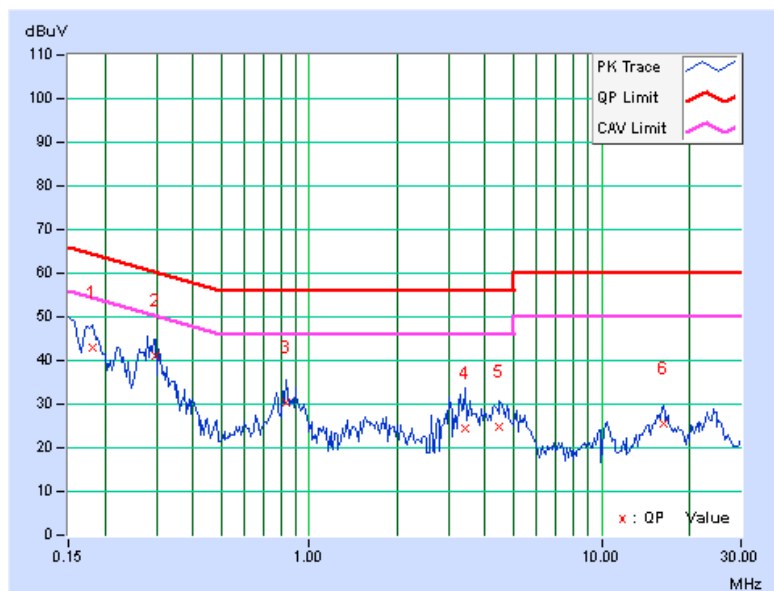


PHASE	Line 2	6dB BANDWIDTH	9kHz
CHANNEL	Channel 140		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	0.18	42.16	23.14	42.34	23.32	65.38	55.38	-23.03	-32.05
2	0.29844	0.21	40.18	31.05	40.39	31.26	60.29	50.29	-19.89	-19.02
3	0.83359	0.24	31.01	25.15	31.25	25.39	56.00	46.00	-24.75	-20.61
4	3.33984	0.35	24.51	12.26	24.86	12.61	56.00	46.00	-31.14	-33.39
5	4.40234	0.40	24.53	13.44	24.93	13.84	56.00	46.00	-31.07	-32.16
6	15.66406	0.62	25.31	20.36	25.93	20.98	60.00	50.00	-34.07	-29.02

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

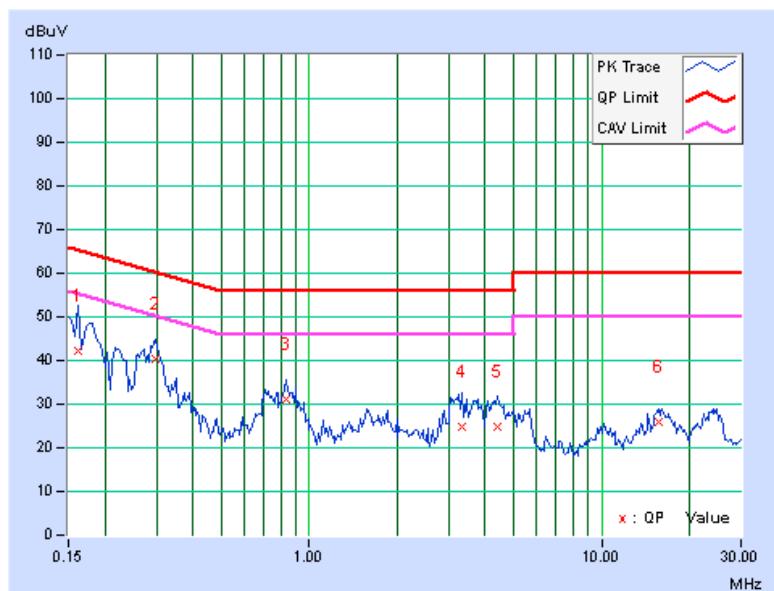

4.3 PEAK TRANSMIT POWER MEASUREMENT

4.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT

FREQUENCY BAND	LIMIT
5.150 ~ 5.250GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB
5.250 ~ 5.350GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.470 ~ 5.725GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB

NOTE: Where B is the 26dB emission bandwidth in MHz.

Per KDB 662911 D01 Multiple Transmitter Output v01r02 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4;


Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any NANT;

Array Gain = 5 log(NANT/NSS) dB or 3 dB, whichever is less for 20-MHz channel widths with NANT ≥ 5.


For power measurements on all other devices: Array Gain = 10 log(NANT/NSS) dB.

4.3.2 TEST SETUP

FOR POWER OUTPUT MEASUREMENT

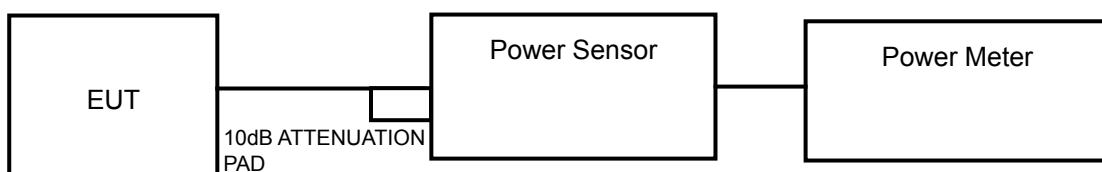

FOR 26dB BANDWIDTH



4.3.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.

4.3.4 TEST PROCEDURE

FOR AVERAGE POWER MEASUREMENT

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

FOR 26dB BANDWIDTH

- 1) Set RBW = approximately 1% of the emission bandwidth.
- 2) Set the VBW > RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.3.7 TEST RESULTS

POWER OUTPUT:

802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)	POWER LIMIT (dBm)	PASS/FAIL
36	5180	25.003	13.98	17	PASS
40	5200	22.131	13.45	17	PASS
48	5240	23.768	13.76	17	PASS
52	5260	23.227	13.66	24	PASS
60	5300	24.774	13.94	24	PASS
64	5320	24.266	13.85	24	PASS
100	5500	24.604	13.91	24	PASS
116	5580	22.387	13.50	24	PASS
140	5700	24.547	13.90	24	PASS

802.11n (20MHz)

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
36	5180	11.21	11.82	28.418	14.54	17	PASS
40	5200	11.80	11.91	30.660	14.87	17	PASS
48	5240	11.53	12.00	30.072	14.78	17	PASS
52	5260	11.77	11.74	29.959	14.77	24	PASS
60	5300	11.80	11.97	30.876	14.90	24	PASS
64	5320	11.83	11.88	30.658	14.87	24	PASS
100	5500	11.53	11.83	29.464	14.69	24	PASS
116	5580	11.47	11.94	29.659	14.72	24	PASS
140	5700	11.62	11.91	30.045	14.78	24	PASS

802.11n (40MHz)

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
38	5190	10.43	10.65	22.655	13.55	17	PASS
46	5230	10.64	10.82	23.666	13.74	17	PASS
54	5270	10.71	10.55	23.126	13.64	24	PASS
62	5310	10.69	10.59	23.177	13.65	24	PASS
102	5510	10.35	10.29	21.530	13.33	24	PASS
110	5550	10.46	11.00	23.706	13.75	24	PASS
134	5670	10.20	10.90	22.774	13.57	24	PASS

26dB BANDWIDTH:

802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)	PASS / FAIL
36	5180	21.67	PASS
40	5200	21.24	PASS
48	5240	21.52	PASS
52	5260	22.18	PASS
60	5300	21.81	PASS
64	5320	21.33	PASS
100	5500	21.69	PASS
116	5580	22.27	PASS
140	5700	20.76	PASS

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
36	5180	21.77	21.87	PASS
40	5200	21.84	21.36	PASS
48	5240	21.86	21.26	PASS
52	5260	21.88	21.99	PASS
60	5300	22.44	22.62	PASS
64	5320	21.84	21.48	PASS
100	5500	22.45	22.22	PASS
116	5580	21.62	21.54	PASS
140	5700	21.83	21.36	PASS

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
38	5190	47.83	47.97	PASS
46	5230	47.96	47.99	PASS
54	5270	49.84	47.29	PASS
62	5310	49.54	48.11	PASS
102	5510	49.10	47.38	PASS
110	5550	49.88	48.07	PASS
134	5670	48.21	48.07	PASS

EUT MAXIMUM CONDUCTED POWER

802.11a

FREQUENCY BAND (MHz)	MAX. POWER	
	OUTPUT POWER (mW)	OUTPUT POWER (dBm)
5250~5350	24.774	13.94
5470~5725	24.604	13.91

NOTE: Manufacturer provides Transmit Power Control description to meet this requirement.

802.11n (20MHz)

FREQUENCY BAND (MHz)	MAX. POWER	
	OUTPUT POWER (mW)	OUTPUT POWER (dBm)
5250~5350	30.876	14.90
5470~5725	30.045	14.78

NOTE: Manufacturer provides Transmit Power Control description to meet this requirement.

802.11n (40MHz)

FREQUENCY BAND (MHz)	MAX. POWER	
	OUTPUT POWER (mW)	OUTPUT POWER (dBm)
5250~5350	23.177	13.65
5470~5725	23.706	13.75


NOTE: Manufacturer provides Transmit Power Control description to meet this requirement.

4.4 PEAK POWER SPECTRAL DENSITY MEASUREMENT

4.4.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

FREQUENCY BAND	LIMIT
5.150 ~ 5.250GHz	4dBm
5.250 ~ 5.350GHz	11dBm
5.470 ~ 5.725GHz	11dBm

4.4.2 TEST SETUP



4.4.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.

4.4.4 TEST PROCEDURES

Using method SA-1

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 30 KHz, Set VBW $\geq$ 1 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to "free run".
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Record the max value

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

Same as 4.3.6.

4.4.7 TEST RESULTS

802.11a

CHANNEL	FREQUENCY (MHz)	PSD (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
36	5180	1.45	4	PASS
40	5200	0.93	4	PASS
48	5240	1.36	4	PASS
52	5260	1.14	11	PASS
60	5300	1.22	11	PASS
64	5320	0.96	11	PASS
100	5500	1.02	11	PASS
116	5580	0.65	11	PASS
140	5700	1.23	11	PASS

802.11n (20MHz)

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)		TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1			
36	5180	-1.79	-0.46	1.94	1.99	PASS
40	5200	-1.67	-0.64	1.89	1.99	PASS
48	5240	-1.28	-1.38	1.68	1.99	PASS
52	5260	-1.77	-1.61	1.32	8.99	PASS
60	5300	-1.63	-1.59	1.40	8.99	PASS
64	5320	-0.82	-1.02	2.09	8.99	PASS
100	5500	-1.15	-1.85	1.52	8.99	PASS
116	5580	-1.47	-1.32	1.62	8.99	PASS
140	5700	-1.03	-1.20	1.90	8.99	PASS

NOTE: 1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.

2. For 5180~5240MHz:

Directional gain = 5dBi + 10log(2) = 8.01dBi > 6dBi , so the power density limit shall be reduced to 4-(8.01-6) = 1.99dBm.

For 5260~5700MHz:

Directional gain = 5dBi + 10log(2) = 8.01dBi > 6dBi , so the power density limit shall be reduced to 11-(8.01-6) = 8.99dBm.

802.11n (40MHz)

CHAN.	CHAN. FREQ. (MHz)	PSD (dBm)		TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1			
38	5190	-5.68	-5.35	-2.50	1.99	PASS
46	5230	-4.52	-5.46	-1.95	1.99	PASS
54	5270	-4.38	-5.47	-1.88	8.99	PASS
62	5310	-5.71	-5.77	-2.73	8.99	PASS
102	5510	-5.85	-5.95	-2.89	8.99	PASS
110	5550	-5.71	-5.91	-2.80	8.99	PASS
134	5670	-5.93	-5.68	-2.79	8.99	PASS

NOTE: 1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.

2. For 5190~5230MHz:

Directional gain = $5\text{dBi} + 10\log(2) = 8.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $4-(8.01-6) = 1.99\text{dBm}$.

For 5270~5670MHz:


Directional gain = $5\text{dBi} + 10\log(2) = 8.01\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $11-(8.01-6) = 8.99\text{dBm}$.

4.5 PEAK POWER EXCURSION MEASUREMENT

4.5.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

Shall not exceed 13 dB.

4.5.2 TEST SETUP



4.5.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.

4.5.4 TEST PROCEDURE

- 1) Set RBW = 1 MHz, VBW $\geq$ 3 MHz, Detector = peak.
- 2) Trace mode = max-hold. Allow the sweeps to continue until the trace stabilizes.
- 3) Use the peak search function to find the peak of the spectrum.
- 4) Measure the PPSD.
- 5) Compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.


4.5.6 EUT OPERATING CONDITIONS

Same as 4.2.6

4.5.7 TEST RESULTS


802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK VALUE (dBm)	PPSD (dBm)	PEAK EXCURSION (dB)	LIMIT (dB)	PASS/FAIL
36	5180	11.74	1.45	10.29	13	PASS
40	5200	11.72	0.93	10.79	13	PASS
48	5240	12.02	1.36	10.66	13	PASS
52	5260	12.94	1.14	11.80	13	PASS
60	5300	11.83	1.22	10.61	13	PASS
64	5320	11.95	0.96	10.99	13	PASS
100	5500	12.01	1.02	10.99	13	PASS
116	5580	11.81	0.65	11.16	13	PASS
140	5700	12.16	1.23	10.93	13	PASS

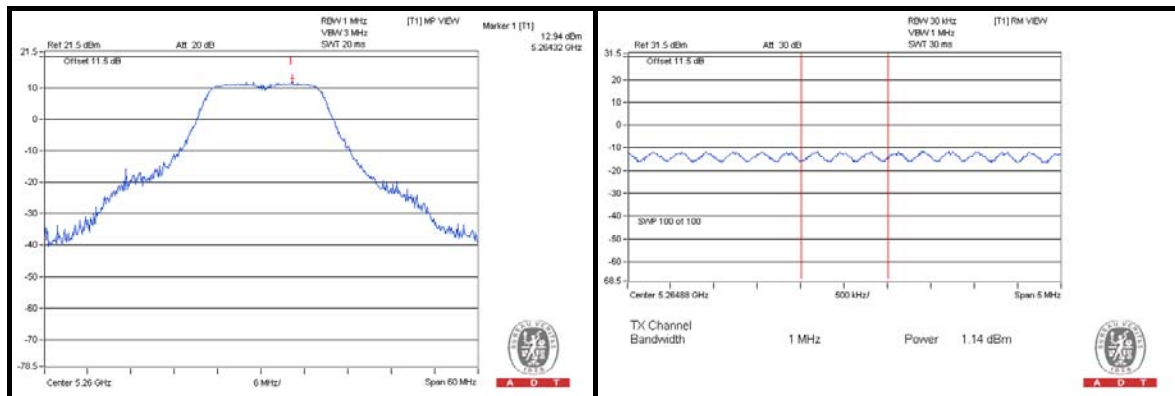


802.11n (20MHz)

CHAN.	CHAN. FREQ. (MHz)	PEAK VALUE (dBm)		PPSD (dBm)		PEAK EXCURSION (dB)		LIMIT (dB)	PASS/ FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1		
36	5180	8.58	10.14	-1.79	-0.46	10.37	10.60	13	PASS
40	5200	9.14	10.03	-1.67	-0.64	10.81	10.67	13	PASS
48	5240	9.49	9.77	-1.28	-1.38	10.77	11.15	13	PASS
52	5260	8.77	9.38	-1.77	-1.61	10.54	10.99	13	PASS
60	5300	8.93	9.18	-1.63	-1.59	10.56	10.77	13	PASS
64	5320	10.01	9.88	-0.82	-1.02	10.83	10.90	13	PASS
100	5500	9.94	8.73	-1.15	-1.85	11.09	10.58	13	PASS
116	5580	9.32	9.34	-1.47	-1.32	10.79	10.66	13	PASS
140	5700	9.87	9.65	-1.23	-1.32	11.10	10.97	13	PASS

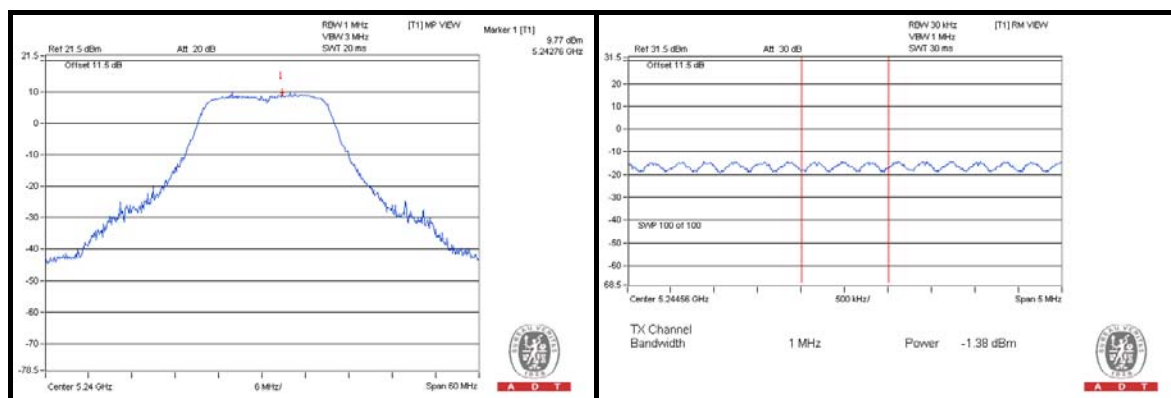

802.11n (40MHz)

CHAN.	CHAN. FREQ. (MHz)	PEAK VALUE (dBm)		PPSD (dBm)		PEAK EXCURSION (dB)		LIMIT (dB)	PASS/ FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1		
38	5190	5.89	5.91	-5.68	-5.35	11.57	11.26	13	PASS
46	5230	6.00	5.69	-4.52	-5.46	10.52	11.15	13	PASS
54	5270	6.43	5.55	-4.38	-5.47	10.81	11.02	13	PASS
62	5310	5.17	5.46	-5.71	-5.77	10.88	11.23	13	PASS
102	5510	4.96	5.22	-5.85	-5.95	10.81	11.17	13	PASS
110	5550	5.93	5.33	-5.71	-5.91	11.64	11.24	13	PASS
134	5670	5.52	6.33	-5.93	-5.68	11.45	12.01	13	PASS

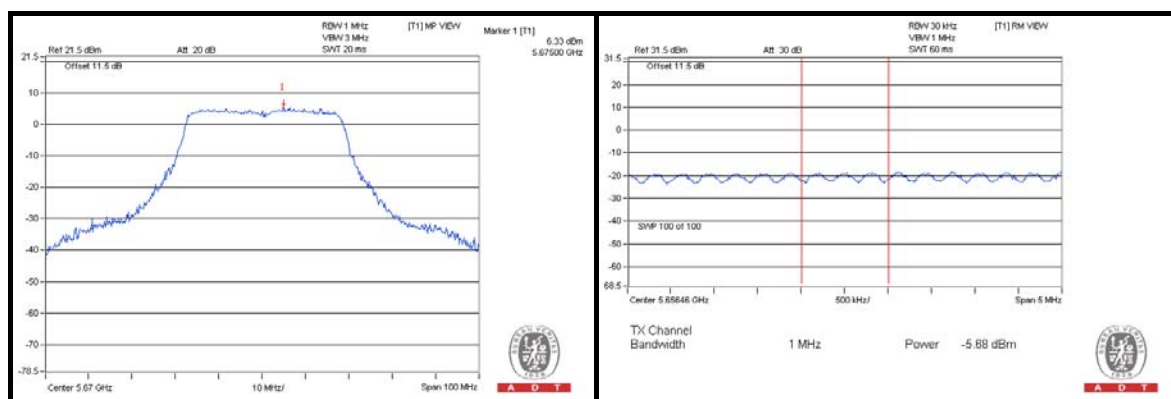


4.6 FREQUENCY STABILITY

4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency of the carrier signal shall be maintained within band of operation

4.6.2 TEST SETUP

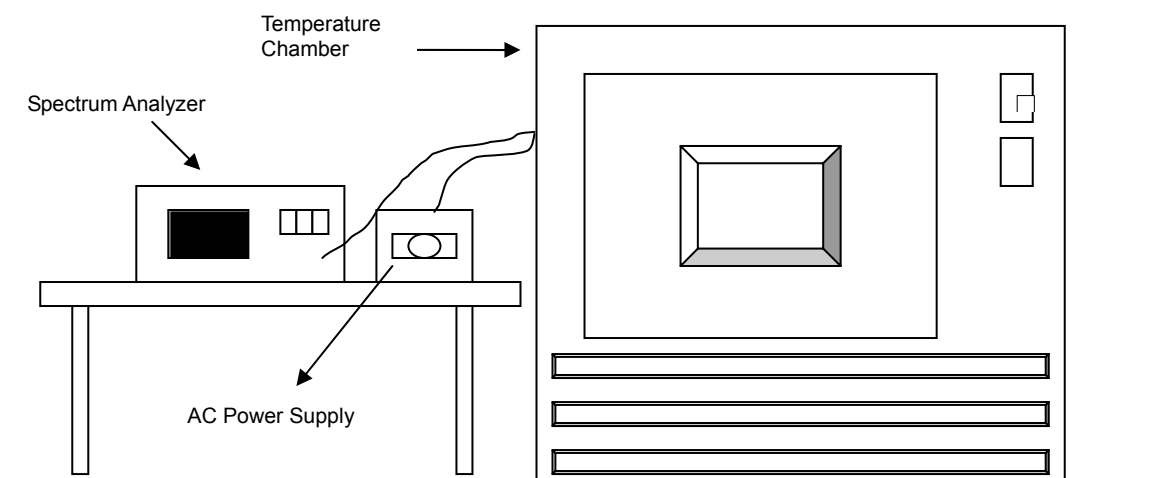

4.6.3 TEST INSTRUMENTS

Refer to section 4.1.3 to get information of above instrument.

4.6.4 TEST PROCEDURE

- a. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- b. Turn the EUT on and couple its output to a spectrum analyzer.
- c. Turn the EUT off and set the chamber to the highest temperature specified.
- d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

4.6.6 EUT OPERATING CONDITION

Set the EUT transmit at un-modulation mode to test frequency stability.

4.6.7 TEST RESULTS

FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5320MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
50	120	5320.0212	0.00040	5320.0244	0.00046	5320.0250	0.00047	5320.0247	0.00046
40	120	5320.0209	0.00039	5320.0174	0.00033	5320.0170	0.00032	5320.0216	0.00041
30	120	5320.0129	0.00024	5320.0130	0.00024	5320.0195	0.00037	5320.0131	0.00025
20	120	5320.0166	0.00031	5320.0109	0.00020	5320.0162	0.00030	5320.0167	0.00031
10	120	5319.9763	-0.00045	5319.9752	-0.00047	5319.9786	-0.00040	5319.9753	-0.00046
0	120	5320.0072	0.00014	5320.0168	0.00032	5320.0076	0.00014	5320.0122	0.00023
-10	120	5320.0127	0.00024	5320.0100	0.00019	5320.0089	0.00017	5320.0145	0.00027
-20	120	5319.9751	-0.00047	5319.9779	-0.00042	5319.9796	-0.00038	5319.9777	-0.00042
-30	120	5320.0168	0.00032	5320.0131	0.00025	5320.0091	0.00017	5320.0150	0.00028

FREQUENCY STABILITY VERSUS VOLTAGE									
OPERATING FREQUENCY: 5320MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)	Measured Frequency (MHz)	Frequency Drift (%)
20	138	5320.0171	0.00032	5320.0115	0.00022	5320.0152	0.00029	5320.0165	0.00031
	120	5320.0166	0.00031	5320.0109	0.00020	5320.0162	0.00030	5320.0167	0.00031
	102	5320.0171	0.00032	5320.0119	0.00022	5320.016	0.00030	5320.0171	0.00032

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

7. APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---