

WCP


Model Number:
WCP2400

External Antenna – Snap-in/Captive

Specifications:


- Fits in .25" case up to .070" thick
- Alignment notches to prevent rotation
- Sub-miniature right angle coax connector
- 1/2 wave coaxial dipole
- Flexible element

Frequency Range	2.4 – 2.5 GHz	
Polarization	Vertical	
Gain	MMCX2	2.5 dBi
	MMCX4	2.5 dBi
	MMCX6	2.0 dBi
	MMCX8	1.5 dBi
	MMCX12	1.0 dBi
Nominal Impedance	50 ohms	
VSWR	2.0:1 max at resonance	
Power Rating	10 watts	
Temperature Range	-40°C to +80°C	
Length	7 cm	
Drop Test	1M	

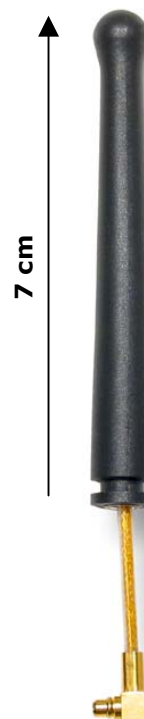


Cables and Connectors:

Model #	Part #	Cable	Connector
WCP2400-MMCX2	CAF28841	2" Brown RG-178	MMCX jack R.A.
WCP2400-MMCX4	CAF28841	4" Brown RG-178	MMCX jack R.A.
WCP2400-MMCX6	CAF28841	6" Brown RG-178	MMCX jack R.A.
WCP2400-MMCX8	CAF28841	8" Brown RG-178	MMCX jack R.A.
WCP2400-MMCX12	CAF28841	12" Brown RG-178	MMCX jack R.A.

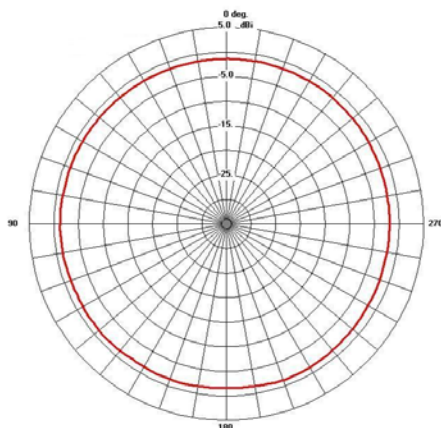

Azimuth Plane
WCP2400MMCX

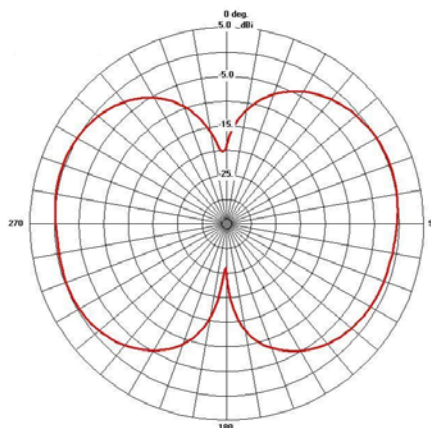

Elevation Plane
WCP2400MMCX

Specifications subject to change without notice.

WCPa – 5/20/04