

SAR Plots

- Verification Plots
- SAR Test Plots

DT&C Co., Ltd.

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:726

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 40.524$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(7.81, 7.81, 7.81) @ 2450 MHz; Calibrated: 1/30/2020 Electronics: DAE4 Sn1391
Sensor-Surface: 2mm (Mechanical Surface Detection)
Phantom: Twin-SAM V5.0 ; Type: QD 000 P40 CD; Serial: 1679
Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2020-07-15; Ambient Temp: 22.3; Tissue Temp: 22.1

2450 MHz System Verification(100mW)


Area Scan (6x8x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = -0.10 dB

Peak SAR (extrapolated) = 11.5 W/kg

SAR(1 g) = 5.41 W/kg; SAR(10 g) = 2.49 W/kg

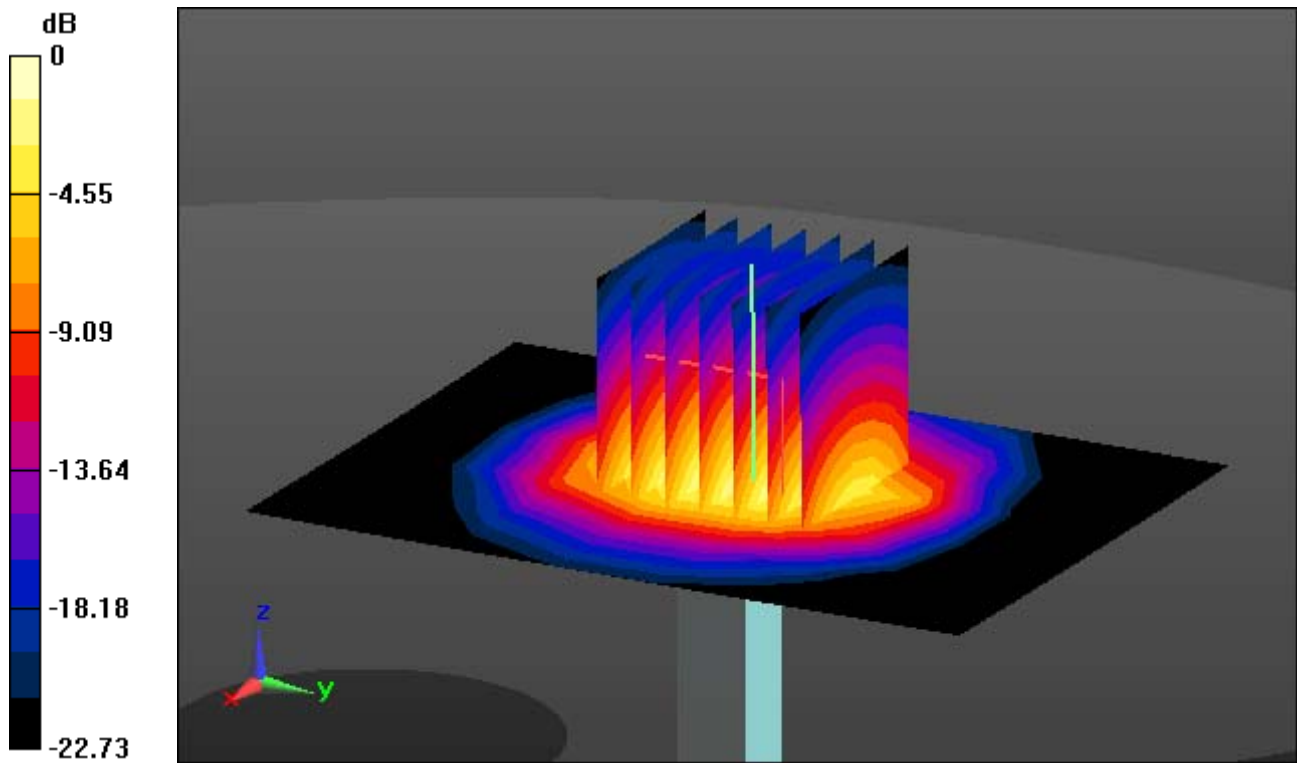

0 dB = 7.76 W/kg

DT&C Co., Ltd.

DUT: SP82; Type: Bluetooth Headset

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.302

Medium parameters used: $f = 2441 \text{ MHz}$; $\sigma = 1.809 \text{ S/m}$; $\epsilon_r = 40.551$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN7368; ConvF(7.81, 7.81, 7.81) @ 2441 MHz; Calibrated: 1/30/2020 Electronics: DAE4 Sn1391

Sensor-Surface: 2mm (Mechanical Surface Detection)

Phantom: Twin-SAM V5.0 ; Type: QD 000 P40 CD; Serial: 1679

Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Test Date: 2020-07-15; Ambient Temp: 22.3; Tissue Temp: 22.1

1 cm space from Body, Front, Bluetooth 1Mbps Ch. 39, Ant External


Area Scan (7x11x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.429 W/kg

SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.103 W/kg

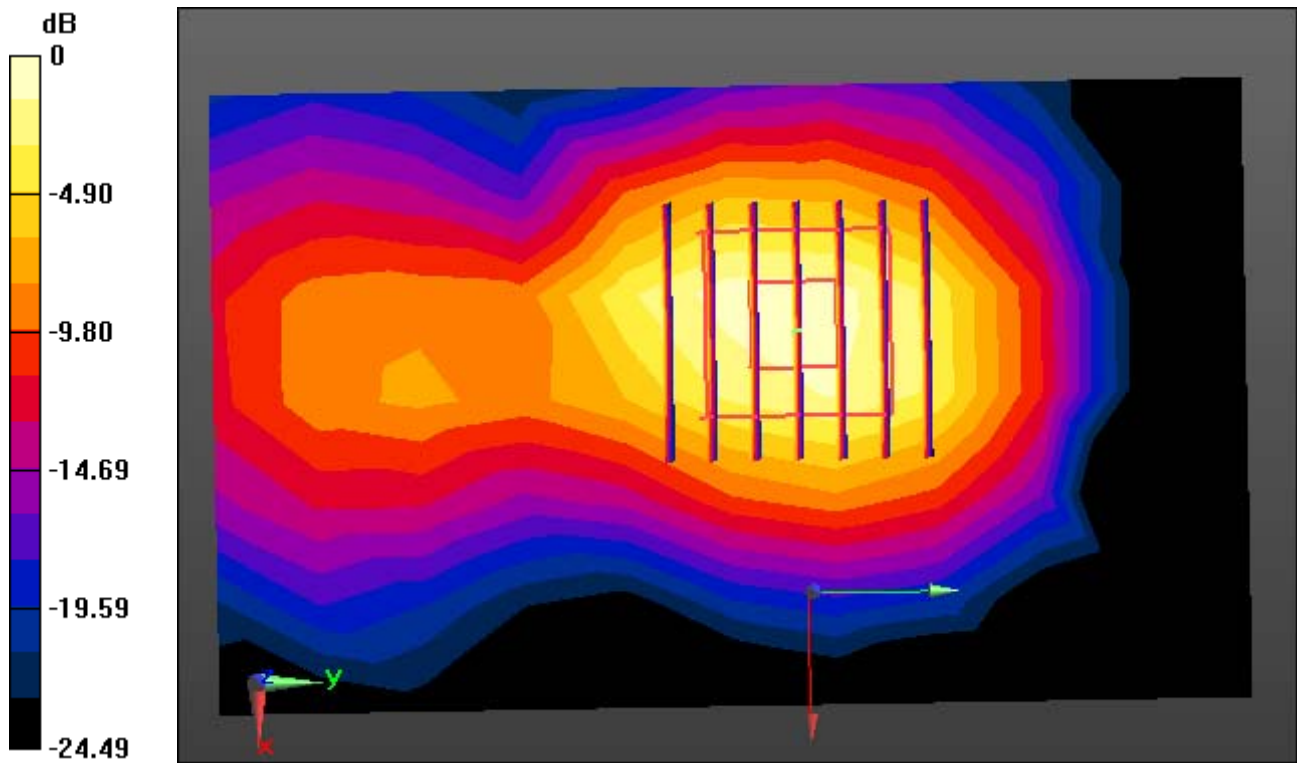

0 dB = 0.320 W/kg