



Report No.:SZ12100121W04



FCC/IC RADIO TEST REPORT

Issued to

Coby Communications Ltd.

For

Mobile Internet Device

Model Name : MID8060/MID8065
 Trade Name : COBY
 Brand Name : COBY
 FCC ID : S7IMID8065-8060
 IC Number : 5824A-8060MID8065
 Standard : 47 CFR Part 15 Subpart C
 RSS-GEN
 RSS-210
 Test date : 2012-11-01 to 2012-11-15
 Issue date : 2012-11-15

Shenzhen MORLAB Communication Technology Co., Ltd.



Tested by Nie Quan
 Nie Quan
 Date 2012.11.15

Approved by Wu Xuewen
 Wu Xuewen
 Date 2012.11.15

Review by Peng Huarui
 Peng Huarui
 Date 2012.11.15



The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for advertizing. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

DIRECTORY

1. GENERAL INFORMATION	3
1.1. EUT Description	3
1.2. Test Standards and Results.....	4
1.3. Facilities and Accreditations	5
2. 47 CFR PART 15C AND RSS-210 REQUIREMENTS.....	6
2.1. Peak Output Power.....	6
2.2. Bandwidth.....	8
2.3. Conducted Spurious Emissions.....	21
2.4. Power spectral density (PSD)	28
2.5. Band Edge.....	35
2.6. Conducted Emission	44
2.7. Radiated Emission.....	47

Change History		
Issue	Date	Reason for change
1.0	November 15, 2012	First edition

1. General Information

1.1. EUT Description

EUT Type: Mobile Internet Device
Serial No.....: (n.a, marked #1 by test site)
Hardware Version: EM_MID8060/MID8065_V3.0
Software Version: 4.0.4
Applicant: Coby Communications Ltd.
Unit C-E, 8/F, PO Shau Centre, 115 How Ming Street, Kwun Tong
Kowloon, Hong Kong
Manufacturer: ShenZhen COBY Communications Ltd
Block 2~3, TaoXia 2nd Industrial Zone, LongHua Town, BaoAn
District, ShenZhen City Guangdong Province P.R. China
Frequency Range.....: 802.11b/g/n-20MHz: 2.412GHz - 2.462GHz
Channel Number.....: 802.11b/g/n-20MHz: 11
Modulation Type: DSSS (802.11b), OFDM (802.11g/n)
Antenna Type.....: PIFA Antenna
Antenna Gain.....: 0.92dBi

Note 1: The EUT is Mobile Internet Device, it contains WIFI Module operating at 2.4GHz ISM band; it supports 802.11b, 802.11g, 802.11n and they are all tested in this report.

Note 2: The frequencies allocated is $F \text{ (MHz)} = 2412 + 5 * (n - 1)$ ($1 \leq n \leq 11$). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 1 (2412MHz), 6 (2437MHz) and 11 (2462MHz).

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

Note 4: The antenna connector of EUT is designed with permanent attachment and no consideration of replacement.

1.2. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C and RSS-210 (Wi-Fi, 2.4GHz ISM band radiators) for the EUT FCC/IC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-09 Edition)	Radio Frequency Devices
2	RSS-GEN: Issue 3, December 2010	General Requirements and Information for the Certification of Radio Apparatus
3	RSS-210: Issue 8, December 2010	Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR 47	Section in RSS-GEN, RSS-210	Description	Result
1	15.247(b)	A8.4 (4)	Peak Output Power	PASS
2	15.247(a)	A8.2 (a)	Bandwidth	PASS
3	15.247(d)	A8.5	Conducted Spurious Emission	PASS
4	15.247(d)	A8.5	Band Edge	PASS
5	15.207	7.2.2	Conducted Emission	PASS
6	15.209 15.247(c)	A8.5	Radiated Emission	PASS
7	15.247(e)	A8.2(b)	Power spectral density (PSD)	PASS

The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.4 2009.

These RF tests were performed according to the method of measurements prescribed in KBD558074.

1.3. Facilities and Accreditations

1.3.1. Facilities

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.3, Building a, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22; the FCC registration number is 741109.

IC registration number is 7183A.

1.3.2. Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR Part 15C and RSS-210 Requirements

2.1. Peak Output Power


2.1.1. Requirement

According to FCC section 15.247(b)(3) and RSS-210 A8.4 (4), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

2.1.2. Test Description

The measured output power was calculated by the reading of the Power Meter and calibration.

A. Test Setup:

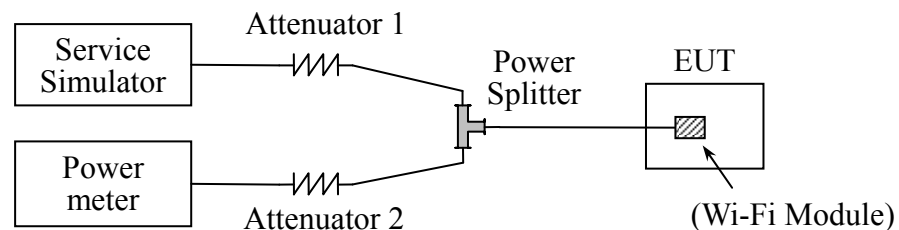

The EUT (Equipment under the test) which is powered by the Battery is coupled to the Power Meter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in power meter.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
EPM Series Power Meter	Agilent	E4418B	GB43318055	2012.05	2013.05
Power Sensor	Agilent	8482A	MY41091706	2012.05	2013.05

2.1.3. Test Result

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

2.1.3.1. 802.11b Test mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	13.96	0.024889	30	1	PASS
6	2437	13.89	0.024491			PASS
11	2462	13.78	0.023878			PASS

2.1.3.2. 802.11g Test mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	12.38	0.017298	30	1	PASS
6	2437	12.25	0.016788			PASS
11	2462	12.30	0.016982			PASS

2.1.3.3. 802.11n-20MHz Test mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	11.25	0.013335	30	1	PASS
6	2437	11.17	0.013092			PASS
11	2462	11.22	0.013243			PASS


2.2. Bandwidth

2.2.1. Requirement

According to FCC section 15.247(a) (2) and RSS-210 A8.2 (a), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.2.2. Test Description

A. Test Set:

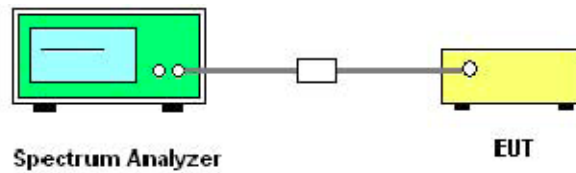

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Receiver	Agilent	E7405A	US44210471	2012.05	2013.05

2.2.3. Test Result


The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the Module.

2.2.3.1. 802.11b Test mode


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits(kHz)	Result
1	2412	7.8125	Plot A	≥ 500	PASS
6	2437	7.2500	Plot B	≥ 500	PASS
11	2462	7.5000	Plot C	≥ 500	PASS


B. Test Plots:

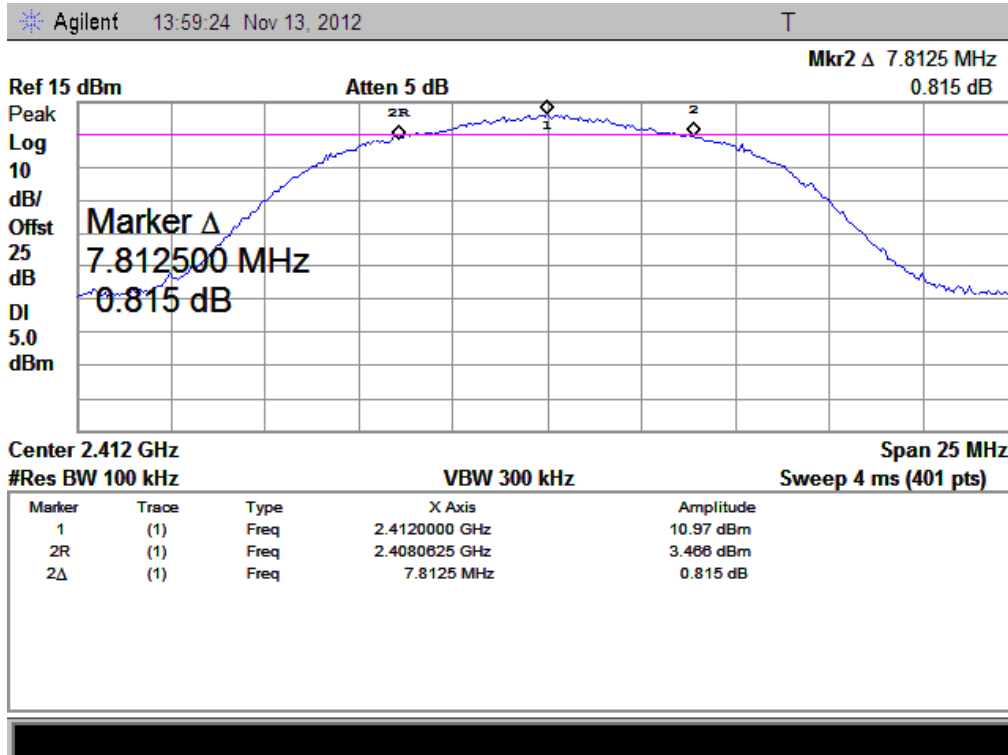

(Plot A: Channel 1: 2412MHz @ 802.11b)

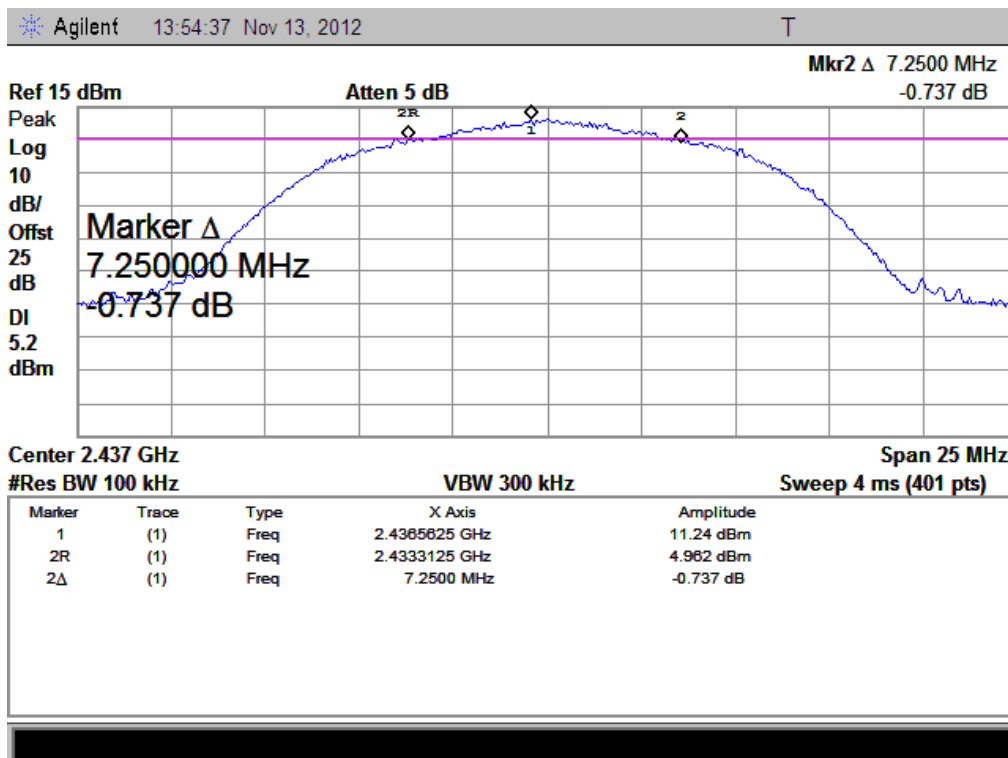


(Plot B: Channel 6: 2437 MHz @ 802.11b)

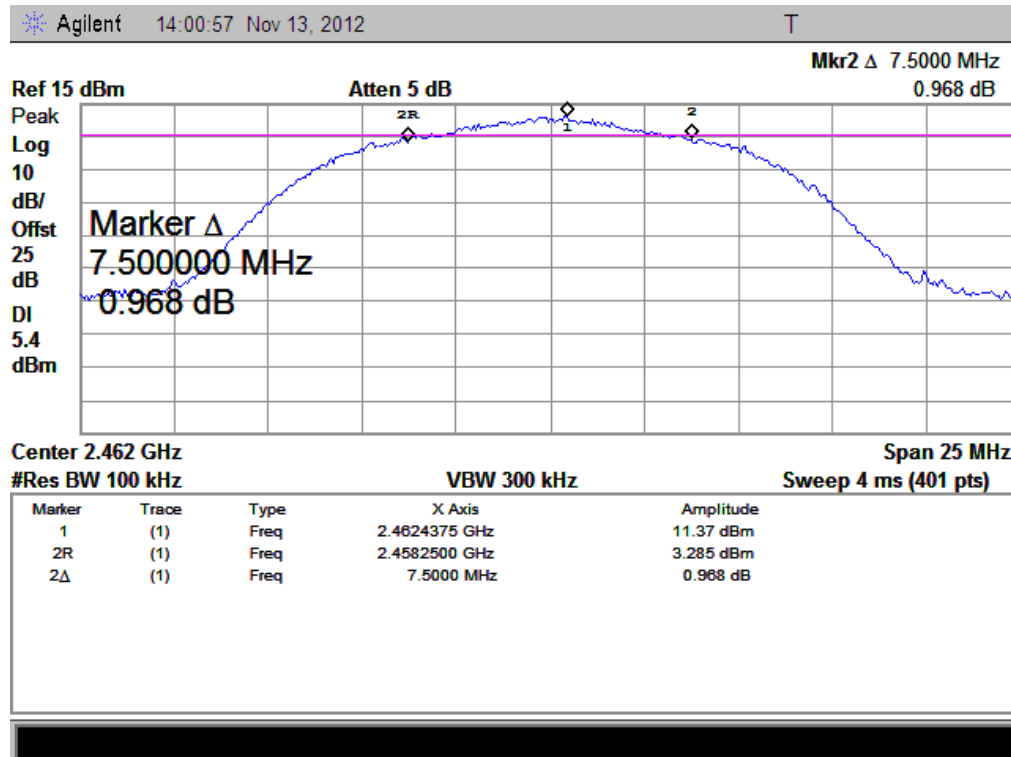


(Plot C: Channel 11: 2462MHz @ 802.11b)

99% Bandwidth


Channel	Frequency (MHz)	99% Bandwidth (MHz)	Refer to Plot
1	2412	11.9607	Plot A1
6	2437	11.9183	Plot B1
11	2462	11.8480	Plot C1

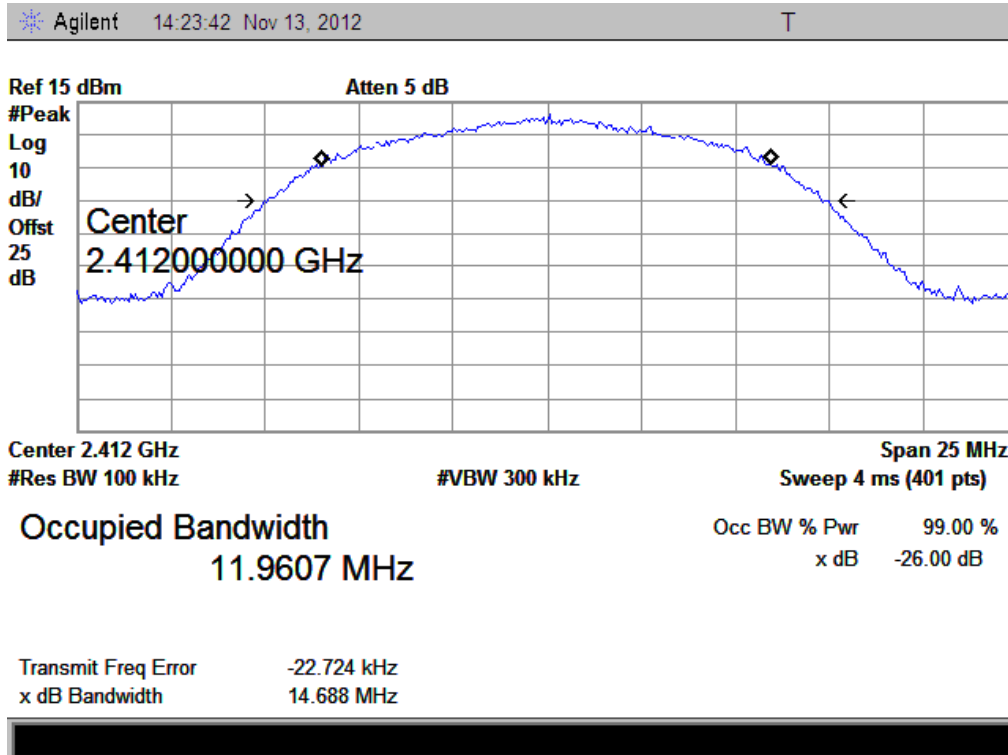

(Plot A1:Channel 1: 2412MHz @ 802.11b)

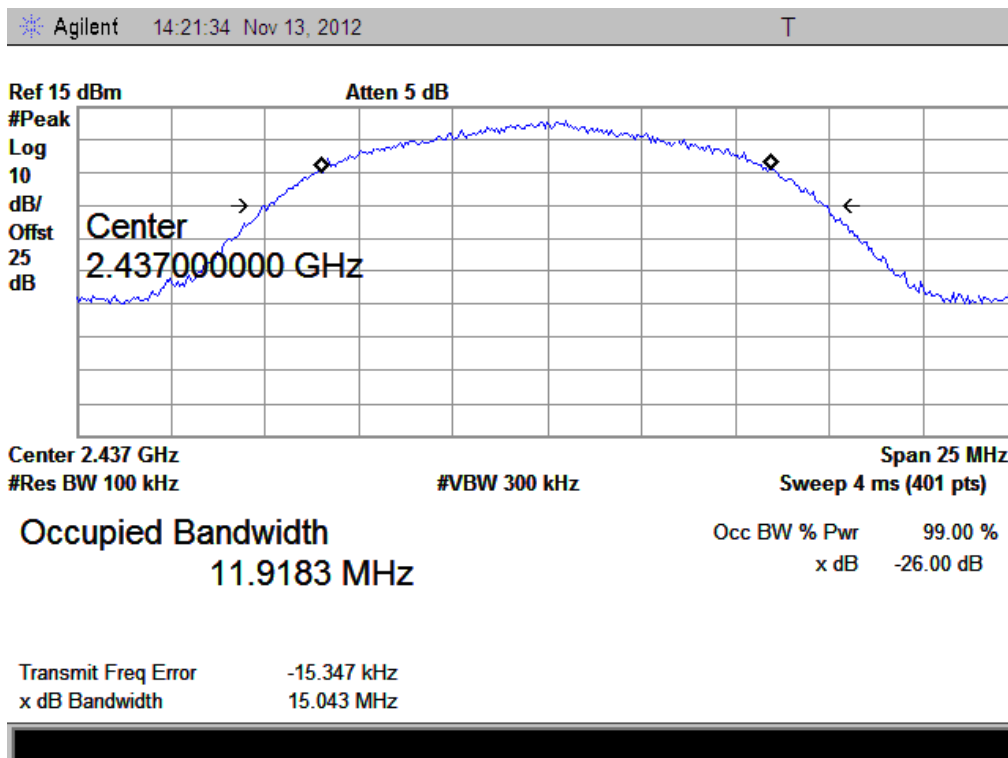

(Plot B1:Channel 1: 2437MHz @ 802.11b)

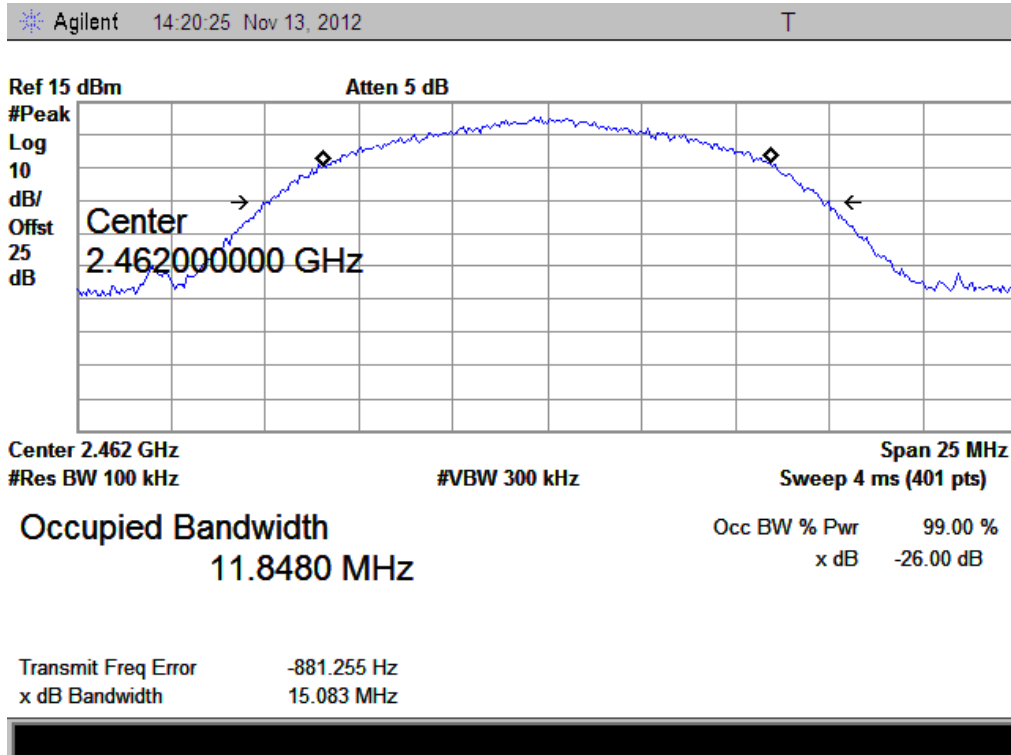


(Plot C1:Channel 1: 2462MHz @ 802.11b)

2.2.3.2. 802.11g Test mode


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits (kHz)	Result
1	2412	16.3750	Plot D	≥ 500	PASS
6	2437	16.4375	Plot E	≥ 500	PASS
11	2462	16.3750	Plot F	≥ 500	PASS


B. Test Plots:

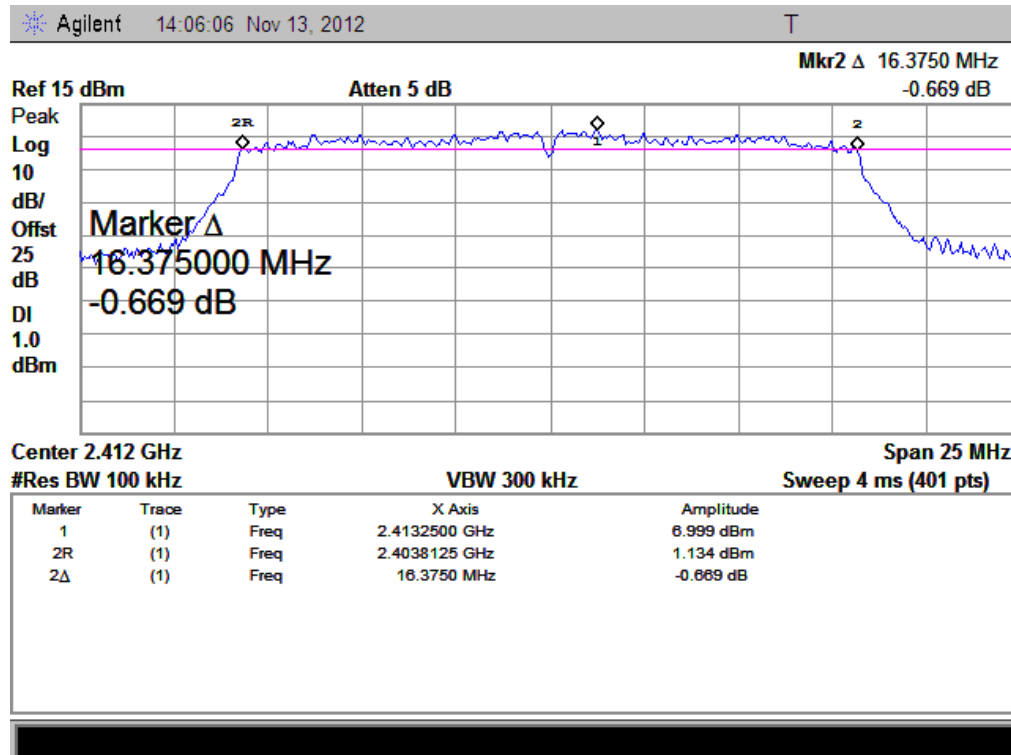

(Plot D: Channel 1: 2412MHz @ 802.11g)

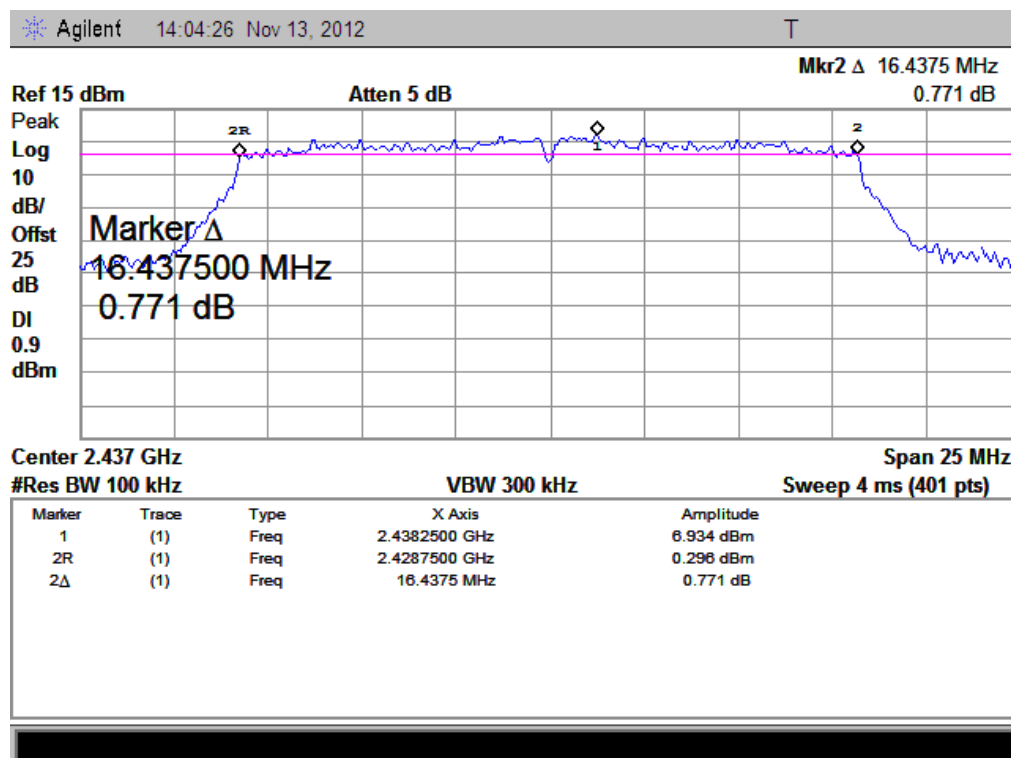


(Plot E: Channel 6: 2437MHz @ 802.11g)

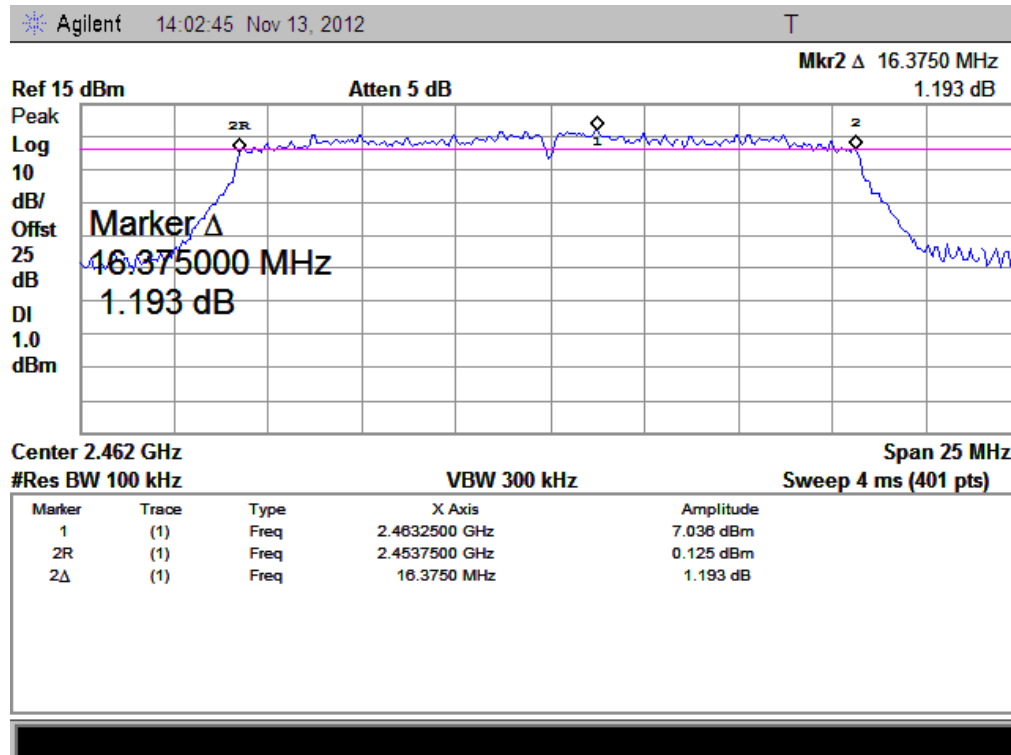


(Plot F: Channel 11: 2462MHz @ 802.11g)

99% Bandwidth


Channel	Frequency (MHz)	99% Bandwidth (MHz)	Refer to Plot
1	2412	16.3105	Plot D1
6	2437	16.2830	Plot E1
11	2462	16.3064	Plot F1

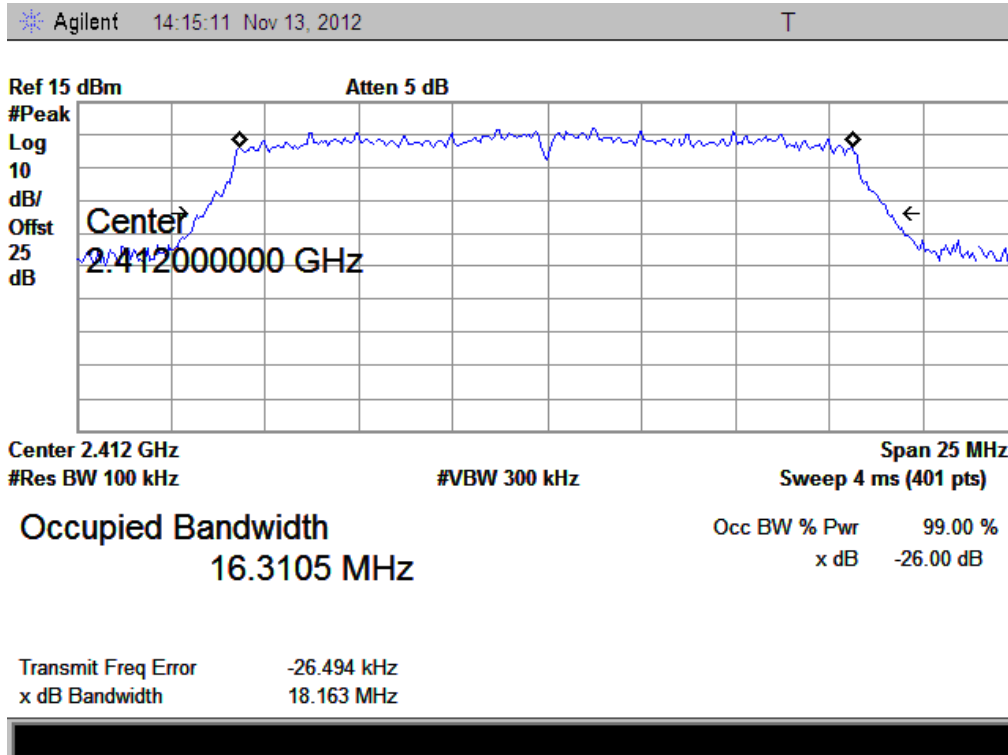

(Plot D1:Channel 1: 2412MHz @ 802.11g)

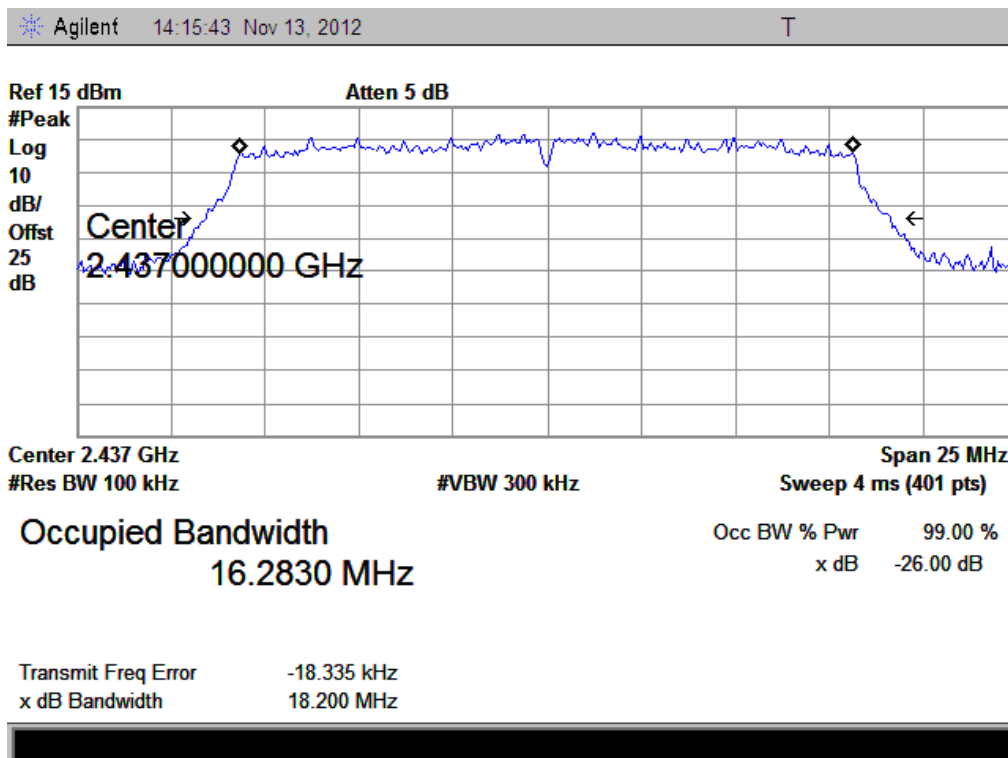

(Plot E1:Channel 6: 2437MHz @ 802.11g)

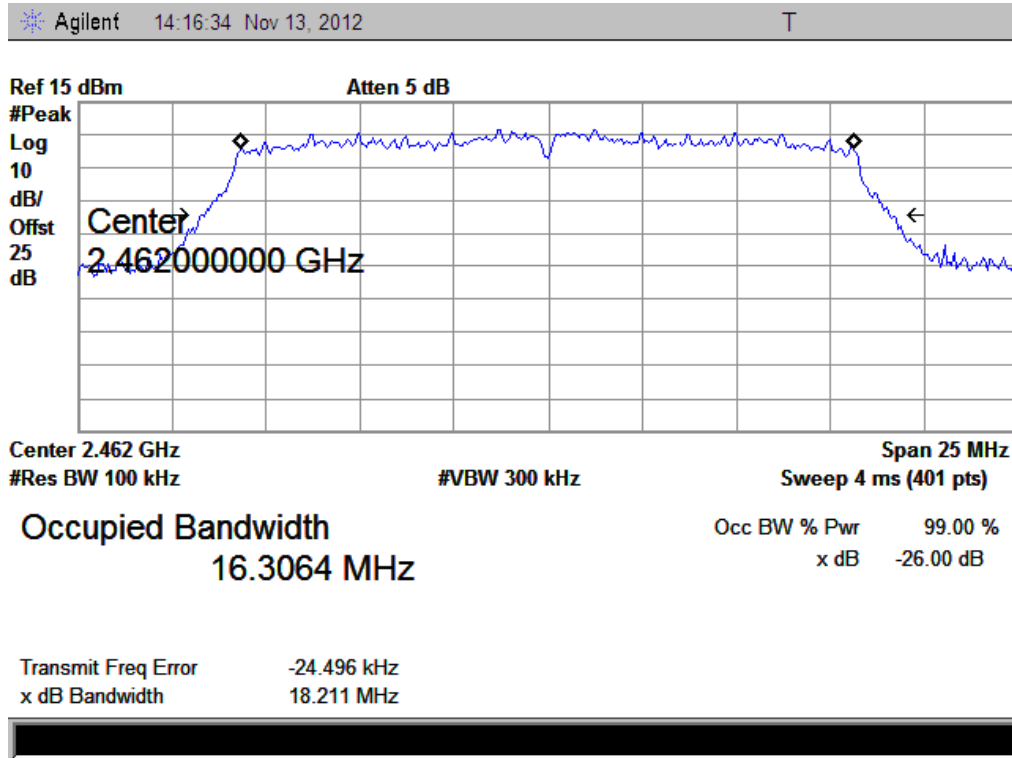


(Plot F1:Channel 11: 2462MHz @ 802.11g)

2.2.3.3. 802.11n-20 Test mode


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits (kHz)	Result
1	2412	17.6875	Plot G	≥ 500	PASS
6	2437	17.6250	Plot H	≥ 500	PASS
11	2462	17.6875	Plot I	≥ 500	PASS


B. Test Plots:

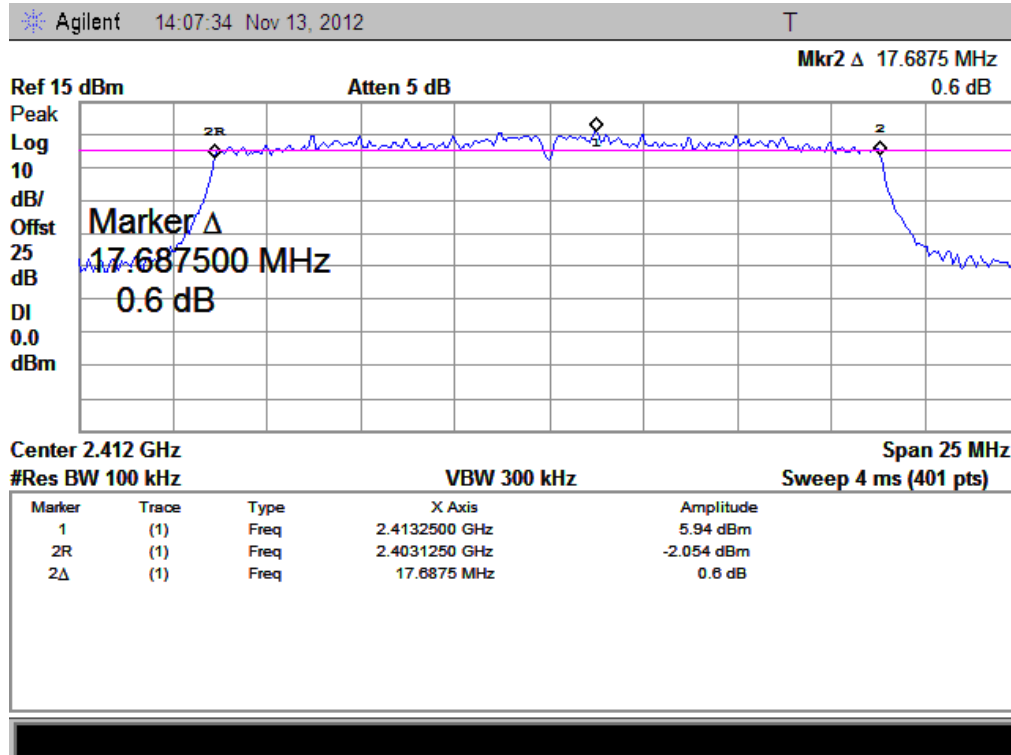

(Plot G: Channel 1: 2412MHz @ 802.11n-20)

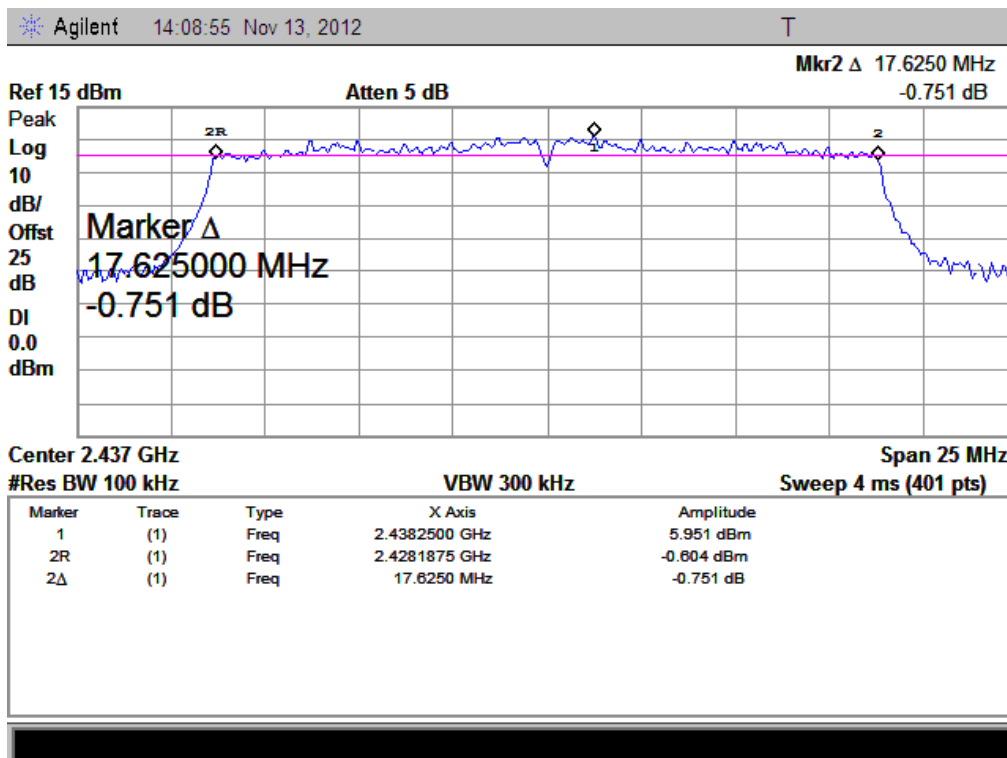


(Plot H: Channel 6: 2437MHz @ 802.11n-20)

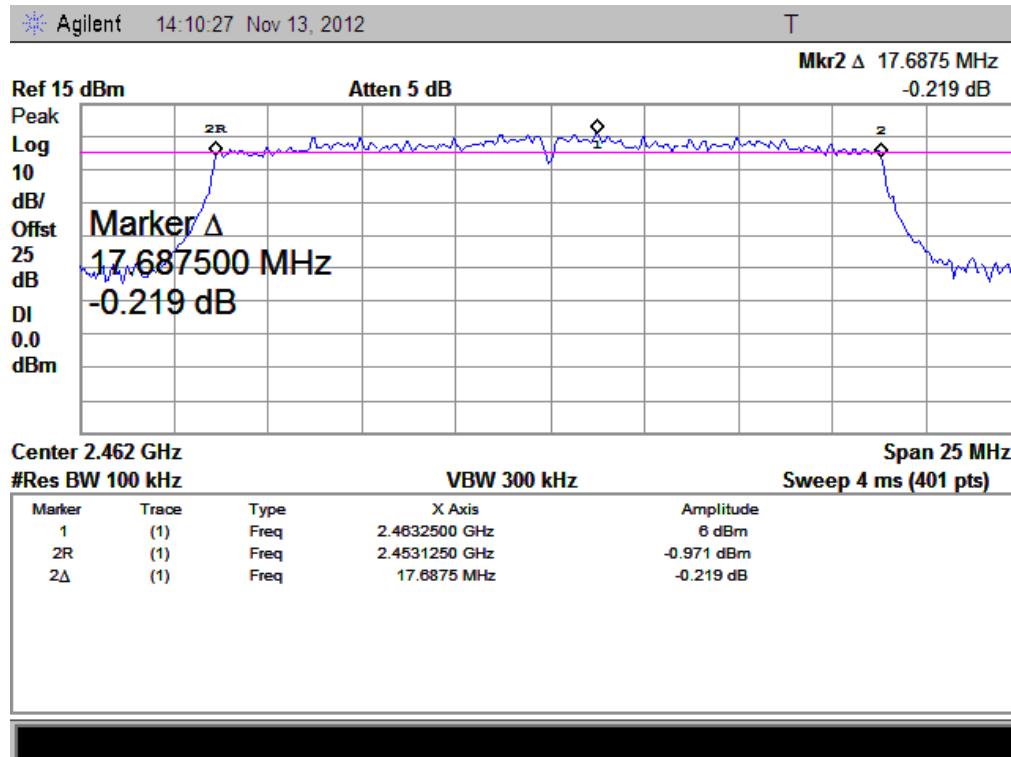


(Plot I: Channel 11: 2462MHz @ 802.11n-20)

99% Bandwidth


Channel	Frequency (MHz)	99% Bandwidth (MHz)	Refer to Plot
1	2412	17.4738	Plot G1
6	2437	17.4514	Plot H1
11	2462	17.4520	Plot I1

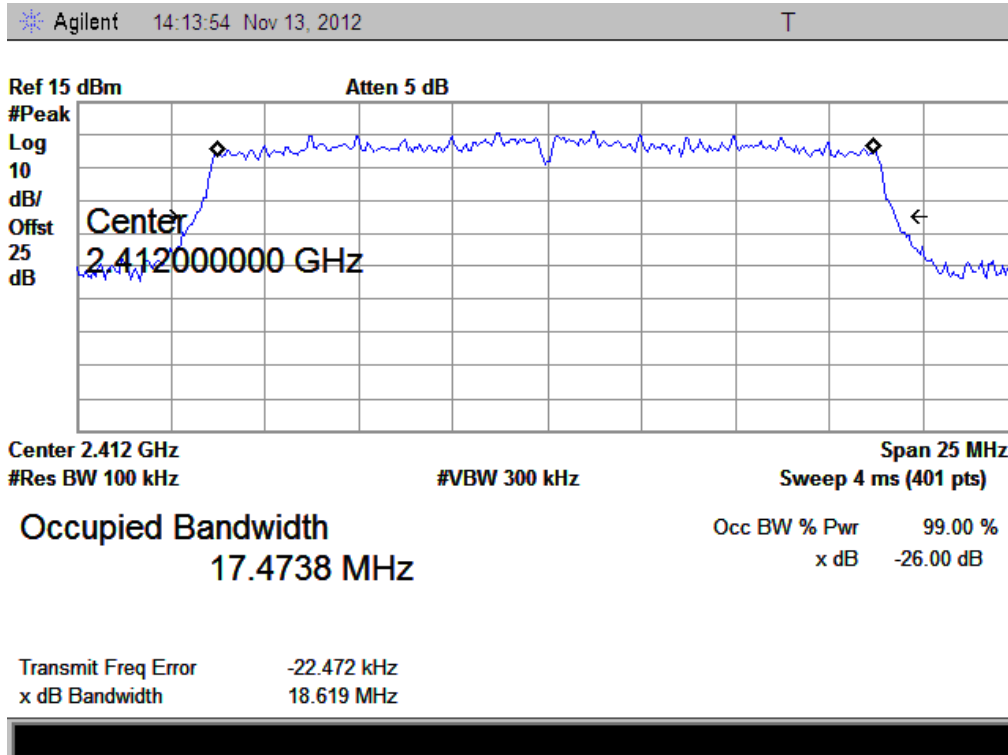

(Plot G1:Channel 1: 2412MHz @ 802.11n-20)

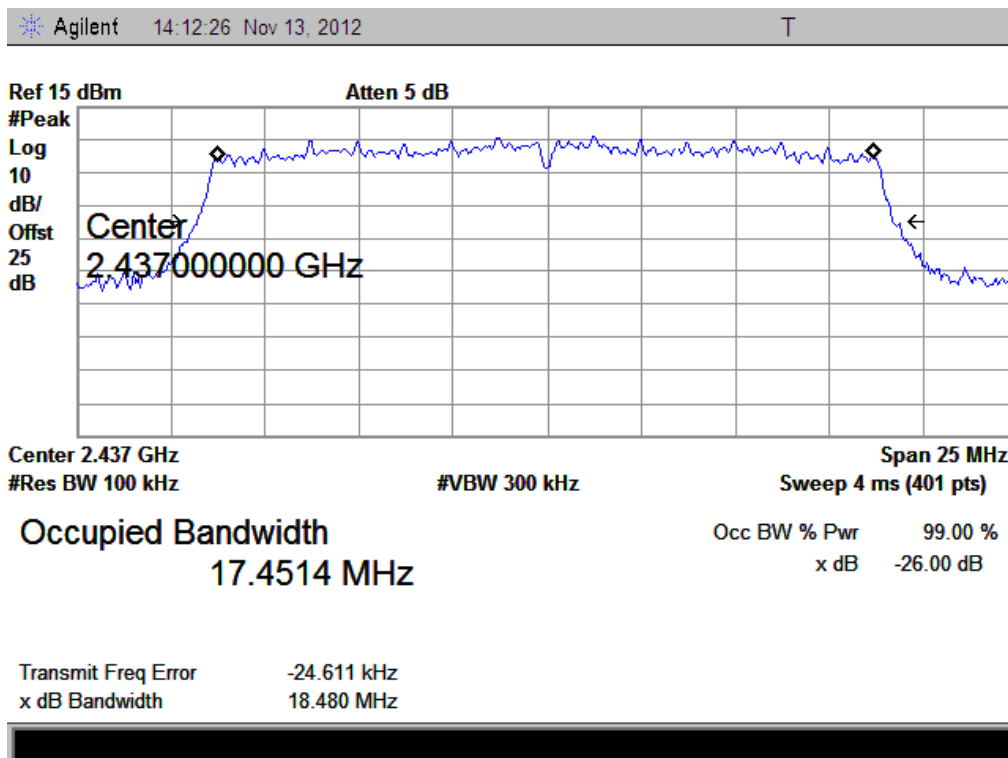

(Plot H1:Channel 6: 2437MHz @ 802.11 n-20)

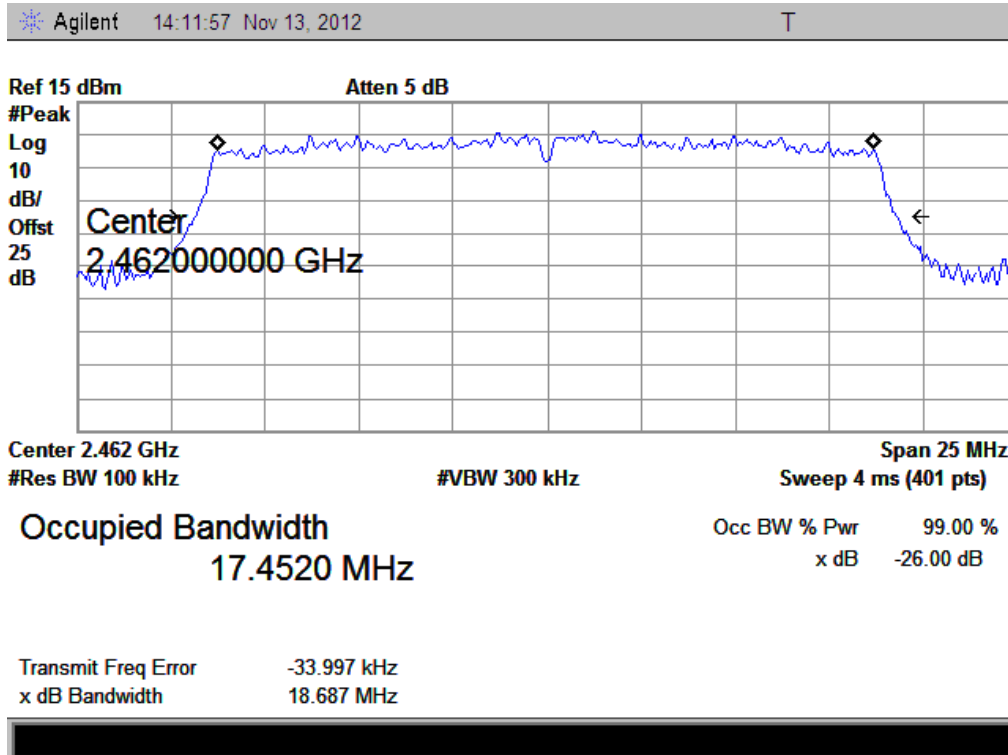

(Plot I1:Channel 11: 2462MHz @ 802.11 n-20)


2.3. Conducted Spurious Emissions

2.3.1. Requirement

According to FCC section 15.247(c) and RSS-A8.5, in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.3.2. Test Description

A. Test Set:

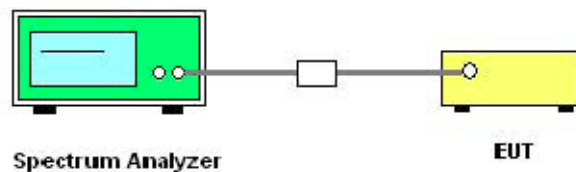

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Receiver	Agilent	E7405A	US44210471	2012.05	2013.05

2.3.3. Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.


2.3.3.1. 802.11b Test mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
1	2412	-41.38	Plot A.1	6.190	-13.8	PASS
6	2437	-41.86	Plot B.1	5.818	-14.2	PASS
11	2462	-41.97	Plot C.1	5.255	-14.7	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

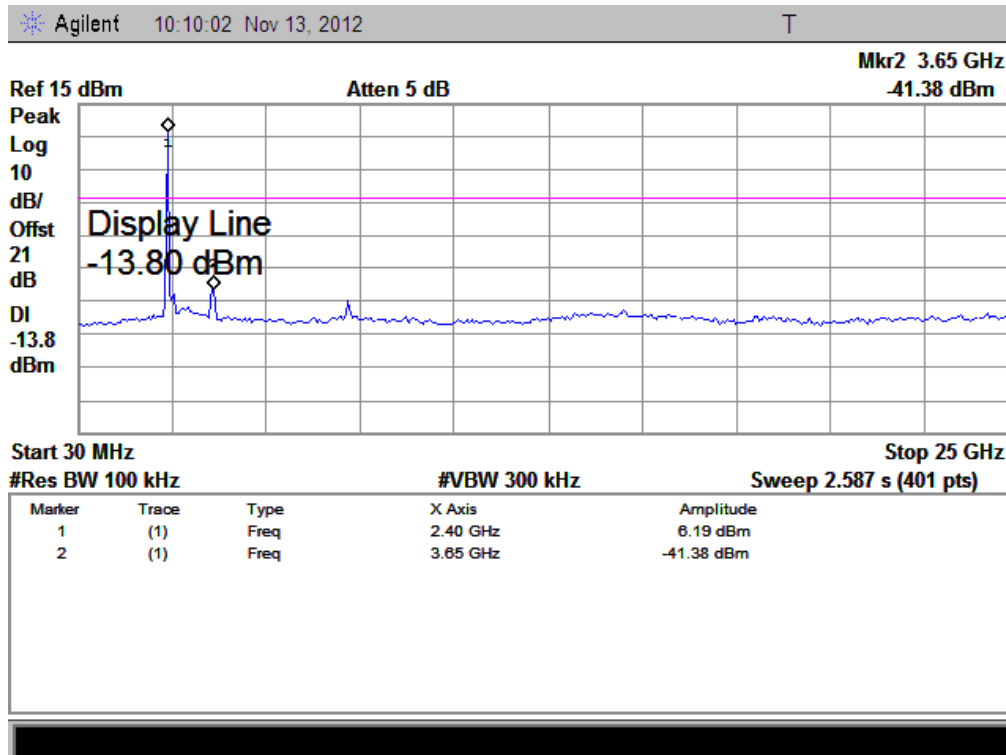

(Plot A.1: Channel = 1, 30MHz to 25GHz)

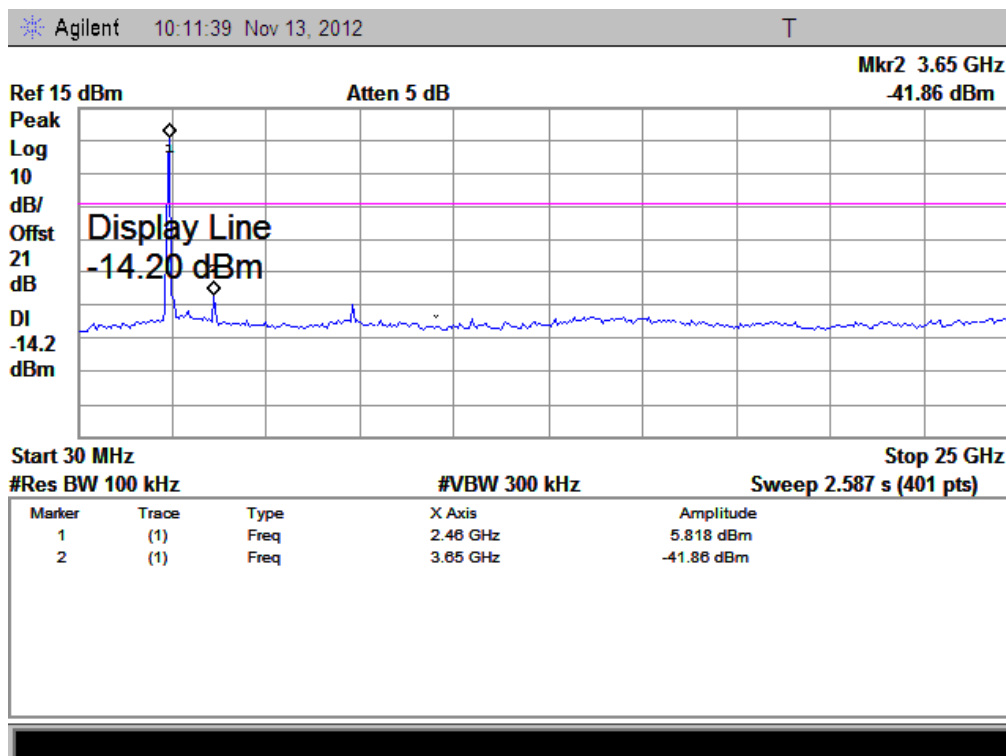

(Plot B.1: Channel = 6, 30MHz to 25GHz)

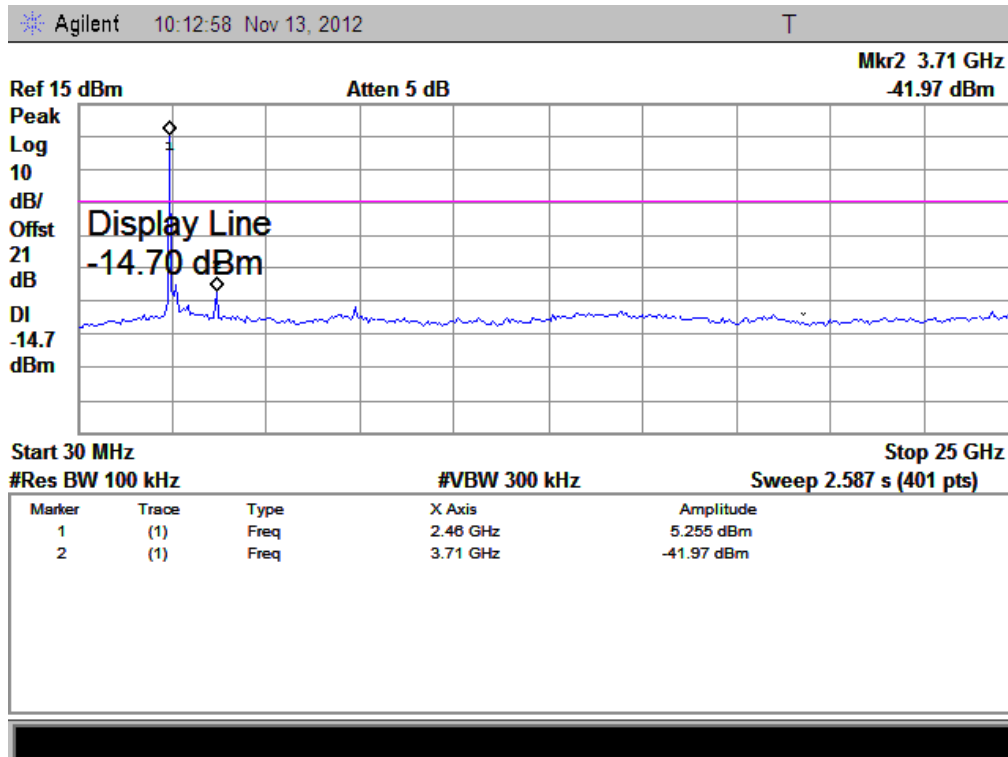

(Plot C.1: Channel = 11, 30MHz to 25GHz)


2.3.3.2. 802.11g Test mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Out of Band Emission (dBm)	Max. Band	Refer to Plot	Limit (dBm)		Verdict
					Carrier Level	Calculated -20dBc Limit	
1	2412	-43.43		Plot D.1	1.382	-18.6	PASS
6	2437	-45.18		Plot E.1	2.270	-17.7	PASS
11	2462	-46.37		Plot F.1	2.412	-17.6	PASS


B. Test Plots:

Note: the power of the Module transmitting frequency should be ignored.

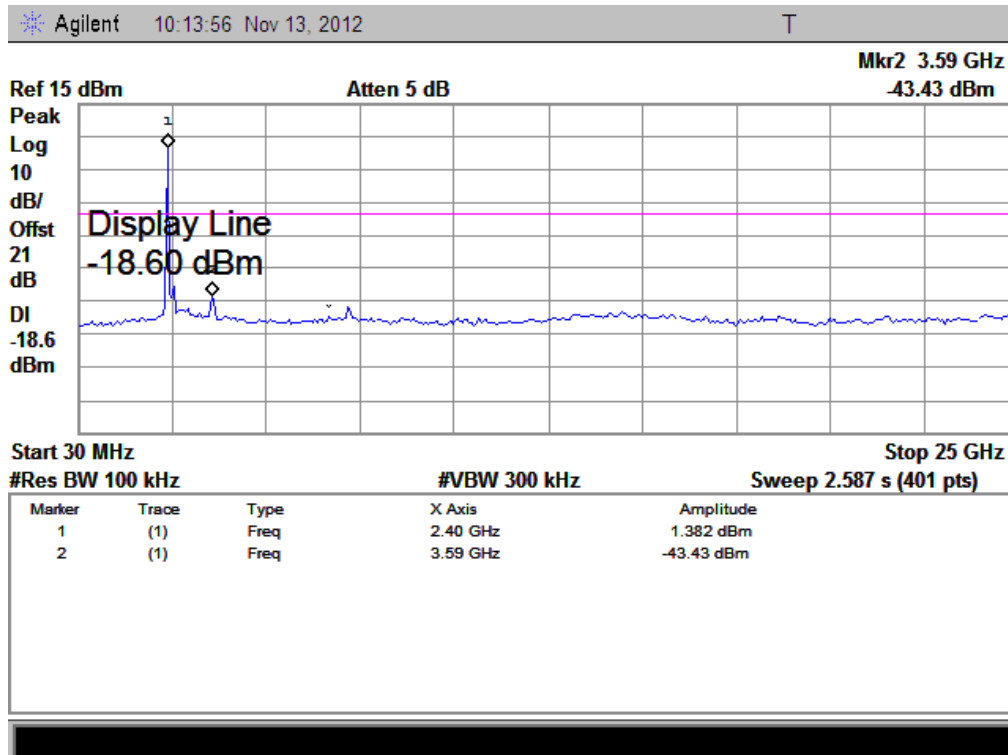


(Plot D.1: Channel = 1, 30MHz to 3GHz)

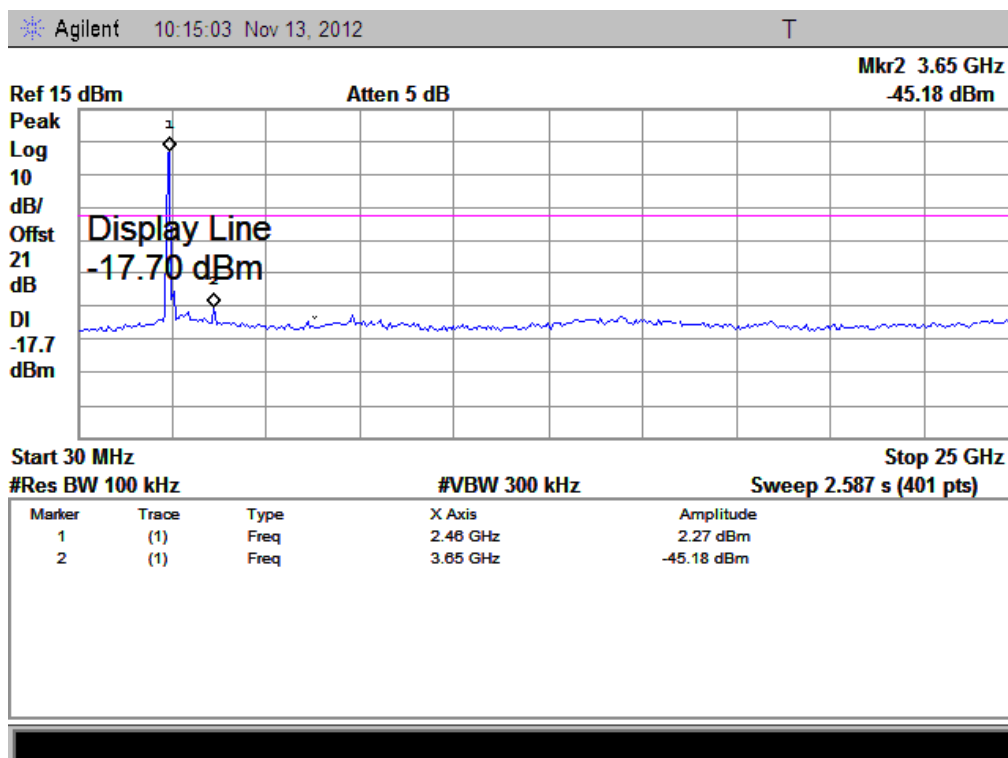

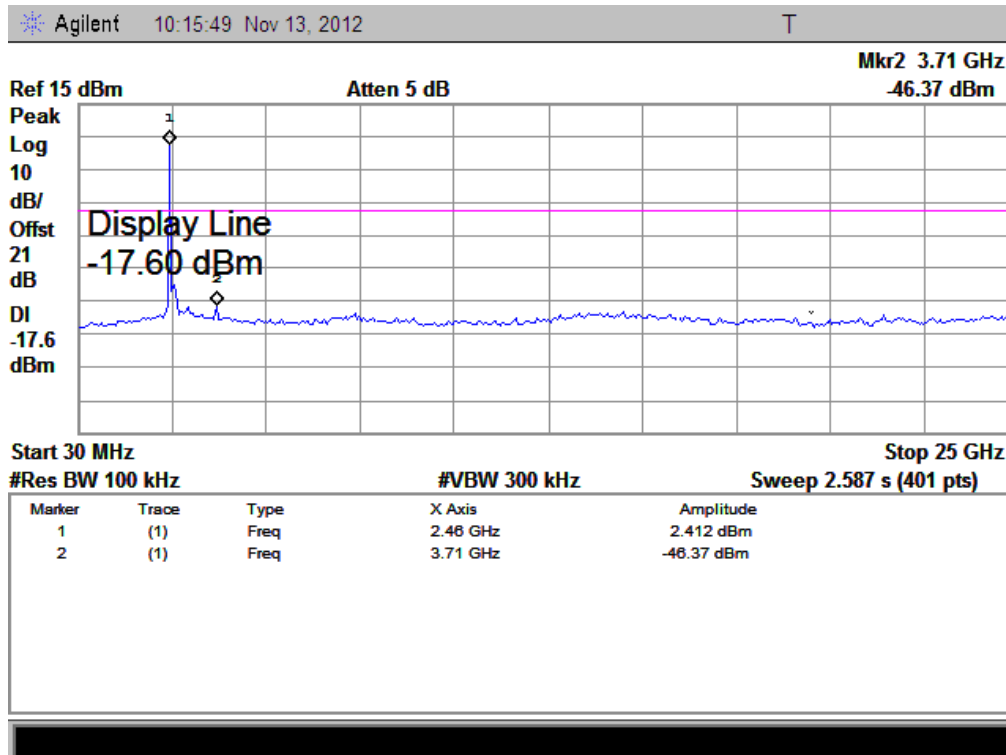

(Plot E.1: Channel = 6, 30MHz to 25GHz)

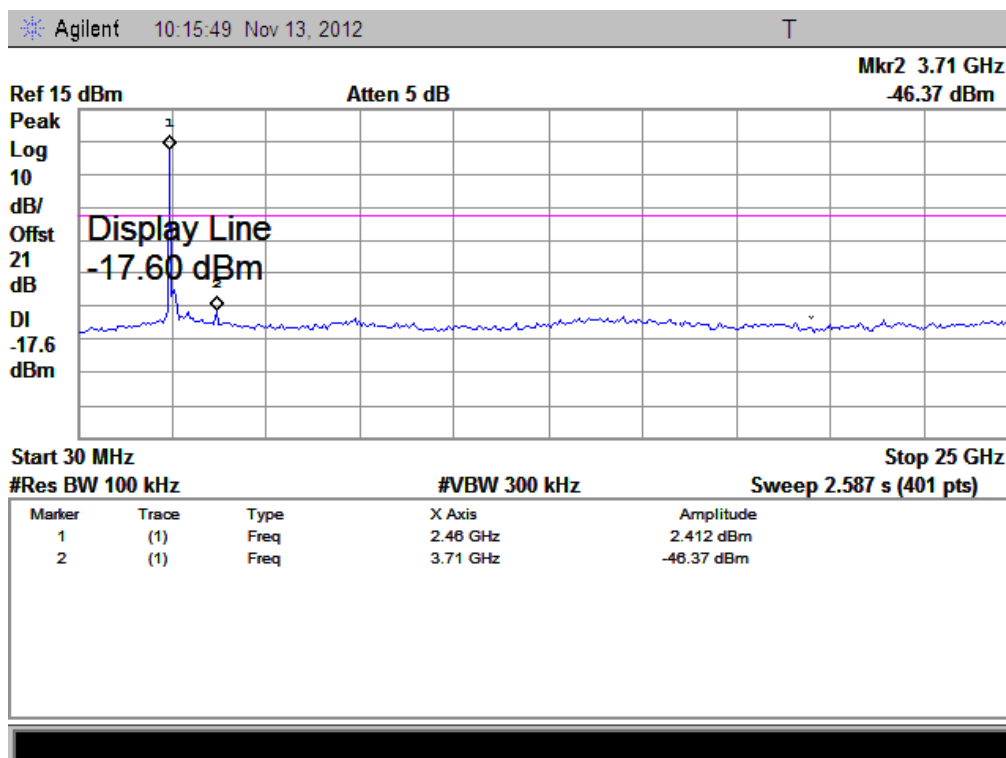

(Plot F.1: Channel = 11, 30MHz to 25GHz)


2.3.3.3. 802.11n -20MHz Test mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Out of Band Emission (dBm)	Max. Band	Refer to Plot	Limit (dBm)		Verdict
					Carrier Level	Calculated -20dBc Limit	
1	2412	-45.19		Plot G.1	1.901	-19.0	PASS
6	2437	-46.77		Plot H.1	0.438	-19.6	PASS
11	2462	-47.23		Plot I.1	1.507	-18.5	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

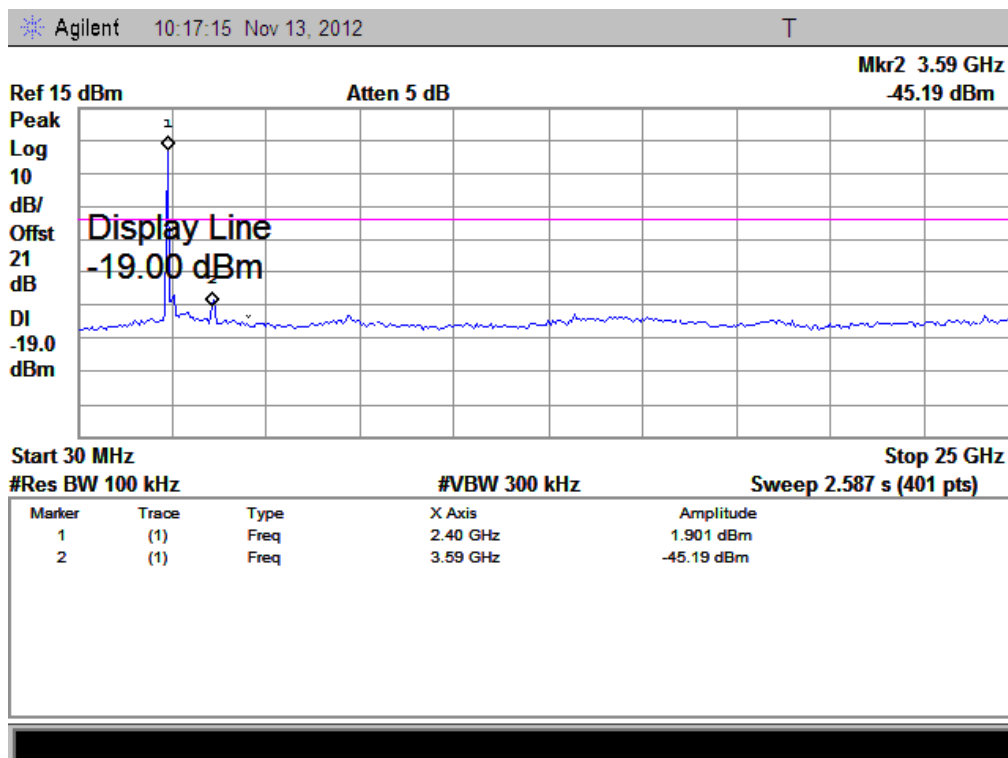

(Plot G.1: Channel = 1, 30MHz to 25GHz)

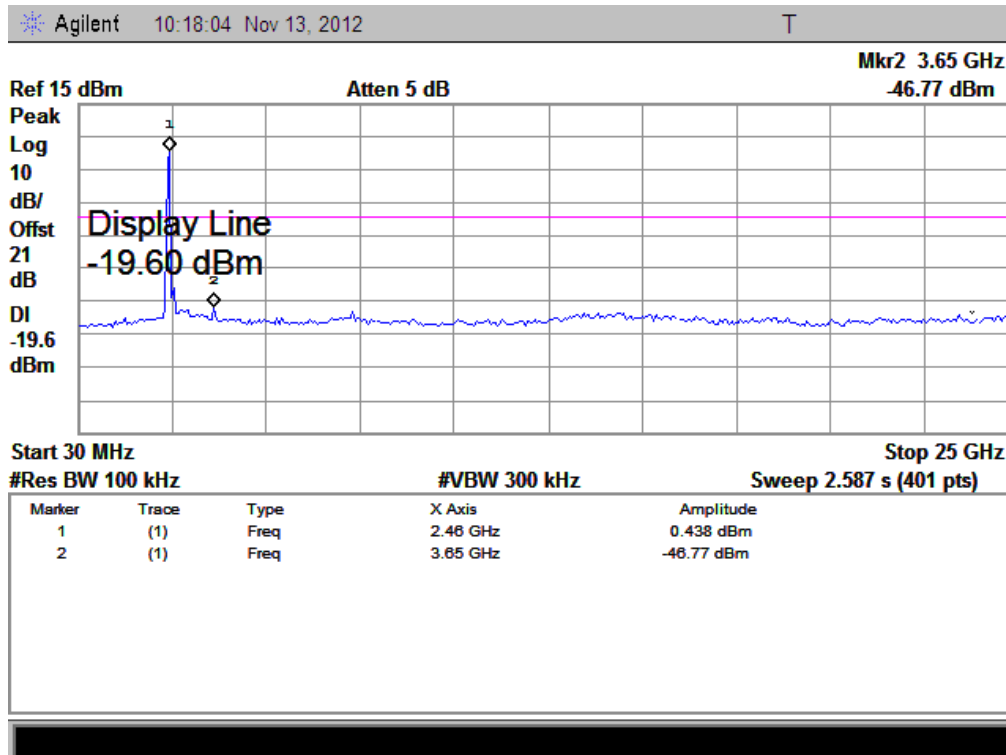

(Plot H.1: Channel = 6, 30MHz to 25GHz)

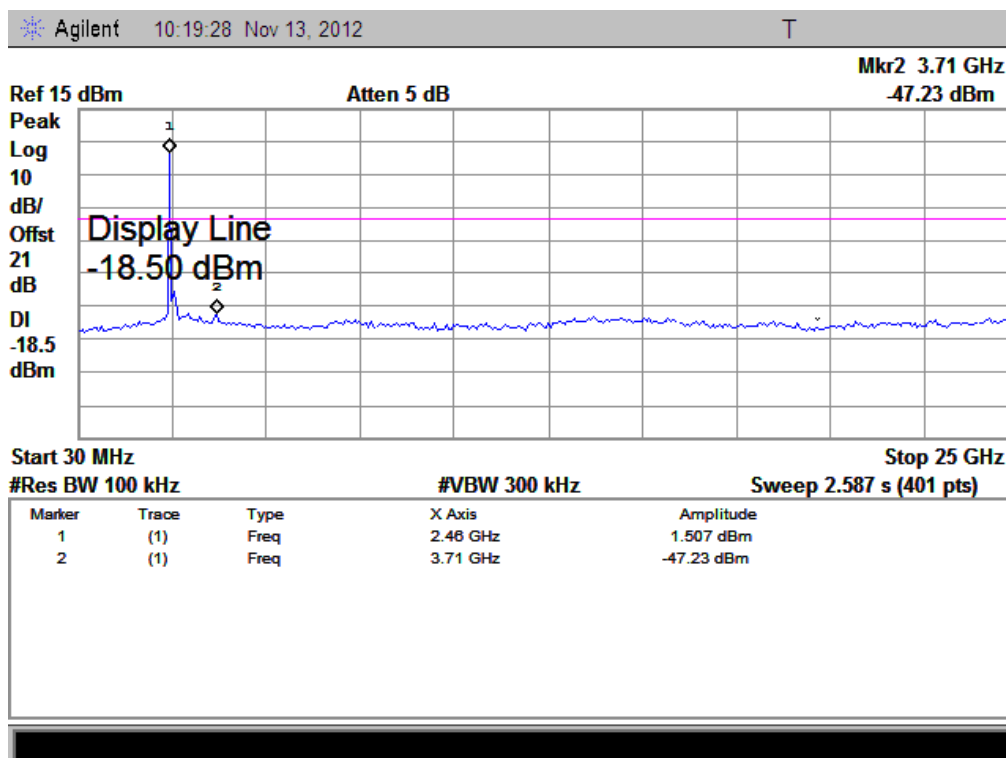

(Plot I.1: Channel = 11, 30MHz to 25GHz)


2.4. Power spectral density (PSD)

2.4.1. Requirement

According to FCC section 15.247(e) and RSS-A8.2(b), the same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

2.4.2. Test Description

A. Test Set:

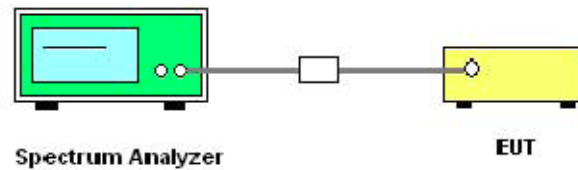

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Receiver	Agilent	E7405A	US44210471	2012.05	2013.05

2.4.3. Test Result


The lowest, middle and highest channels are tested to verify the band edge emissions.

2.4.3.1. 802.11b Test mode


A. Test Verdict:

Spectral power density (dBm/3kHz)					
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Refer to Plot	Limit (dBm/3kHz)	Verdict
1	2412	-3.573	Plot A	8	PASS
6	2437	-2.834	Plot B	8	PASS
11	2462	-3.506	Plot C	8	PASS
Measurement uncertainty: ± 1.3 dB					


B. Test Plots:

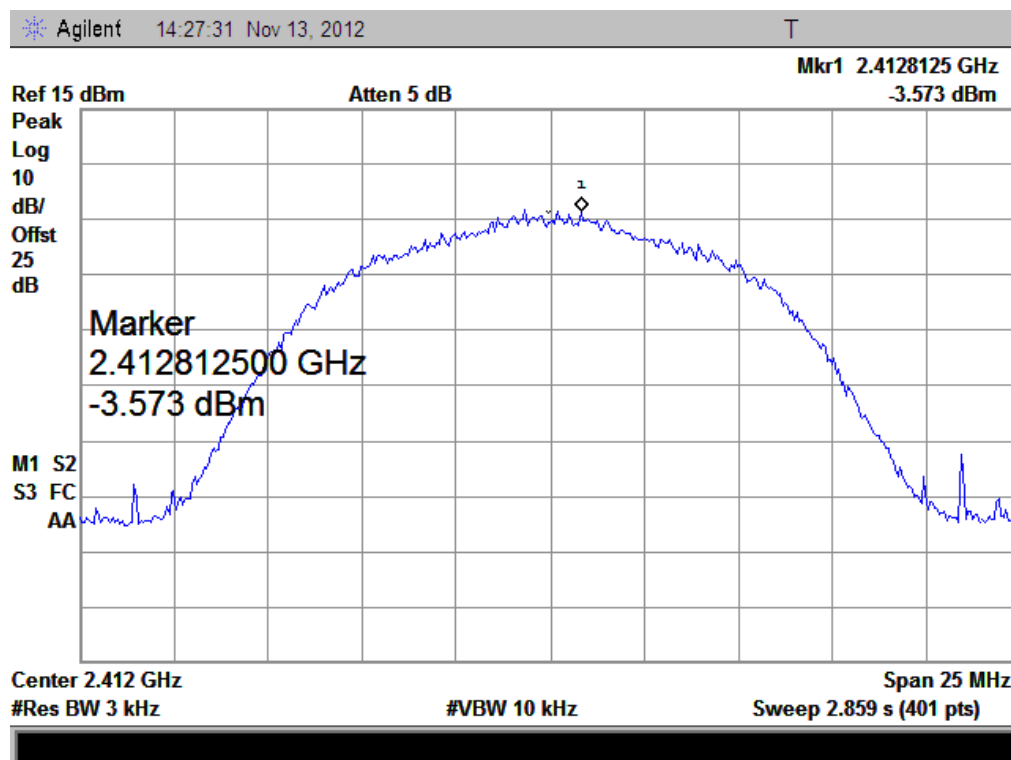

(Plot A: Channel = 1 @ 802.11b)

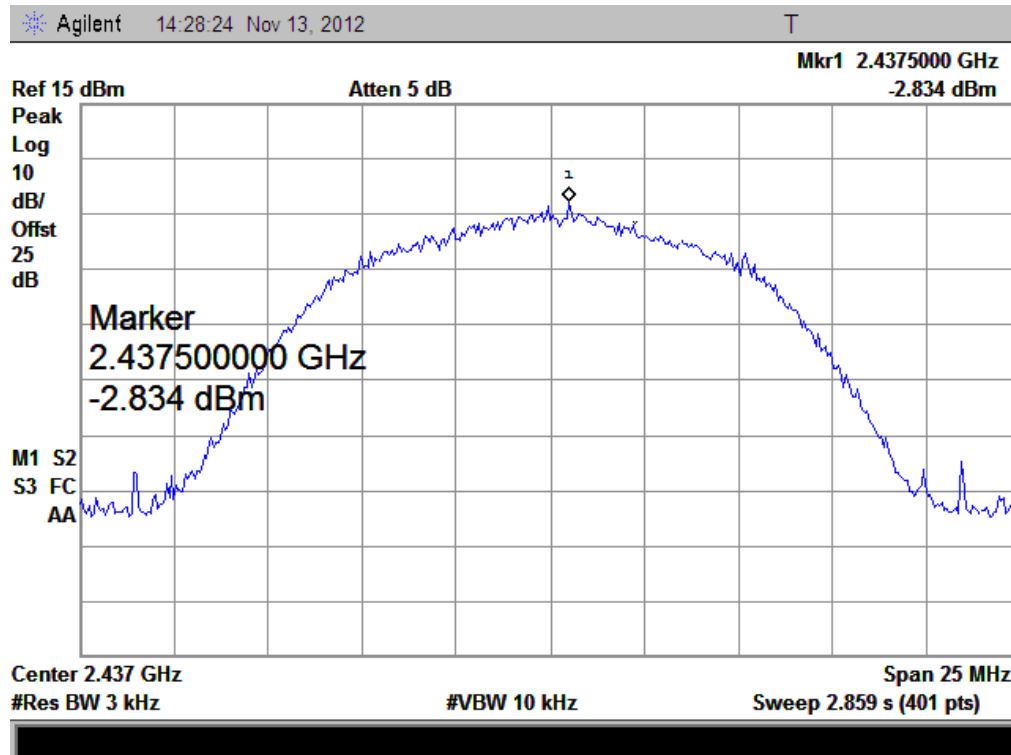

(Plot B: Channel = 6 @ 802.11b)

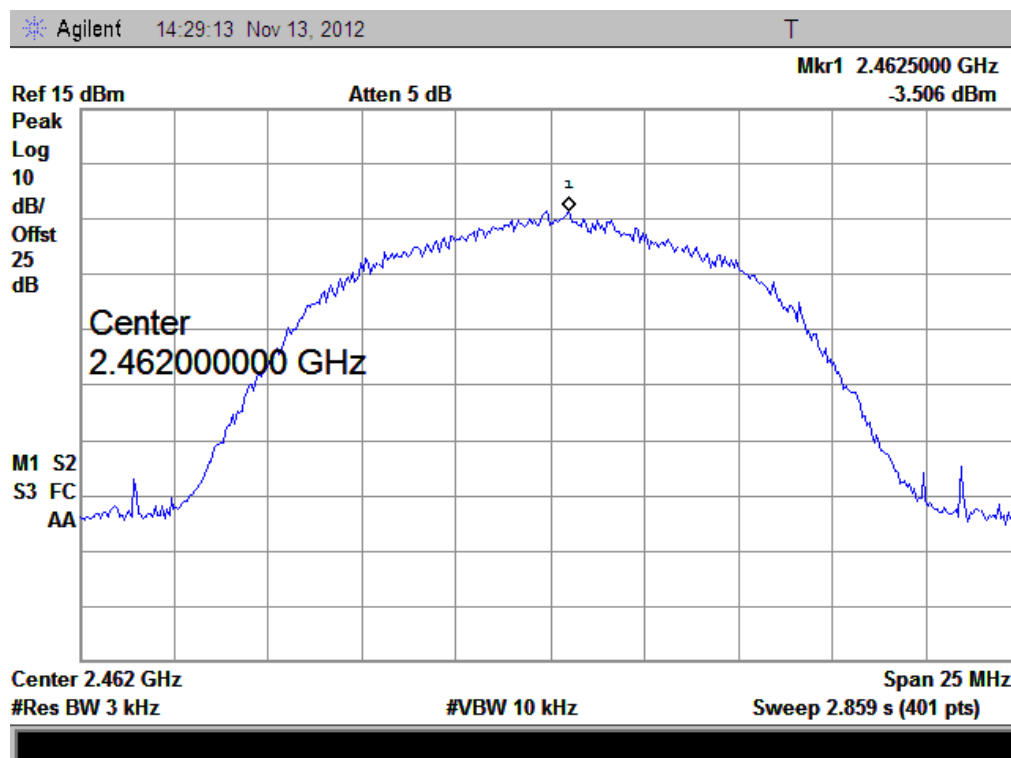


(Plot C: Channel = 11 @ 802.11b)

2.4.3.2. 802.11g Test mode


A. Test Verdict:

Spectral power density (dBm/3kHz)					
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Refer to Plot	Limit (dBm/3kHz)	Verdict
1	2412	-6.62	Plot A	8	PASS
6	2437	-6.45	Plot B	8	PASS
11	2462	-6.57	Plot C	8	PASS
Measurement uncertainty: ± 1.3 dB					


B. Test Plots:

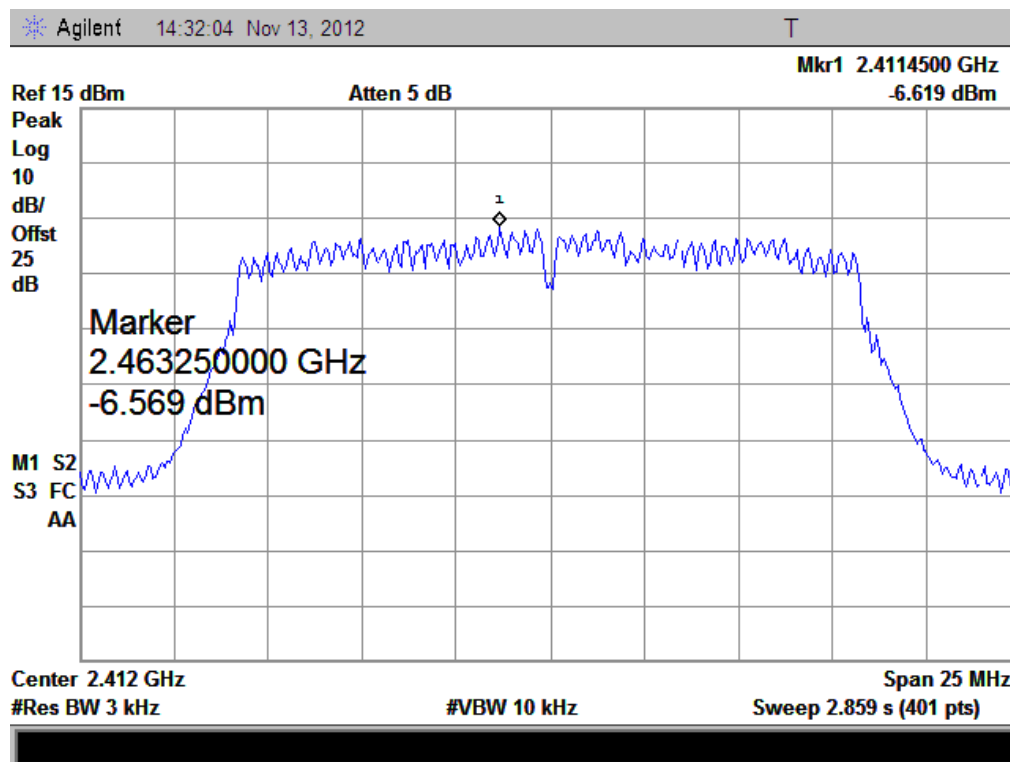

(Plot D: Channel = 1 @ 802.11g)

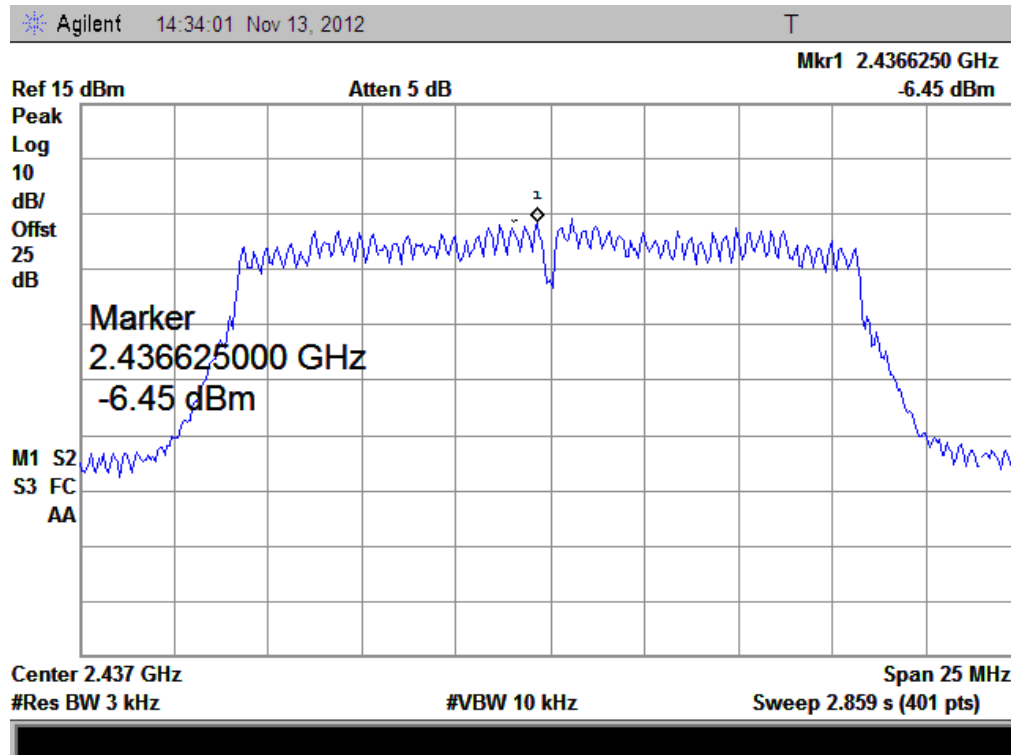

(Plot E: Channel = 6 @ 802.11g)

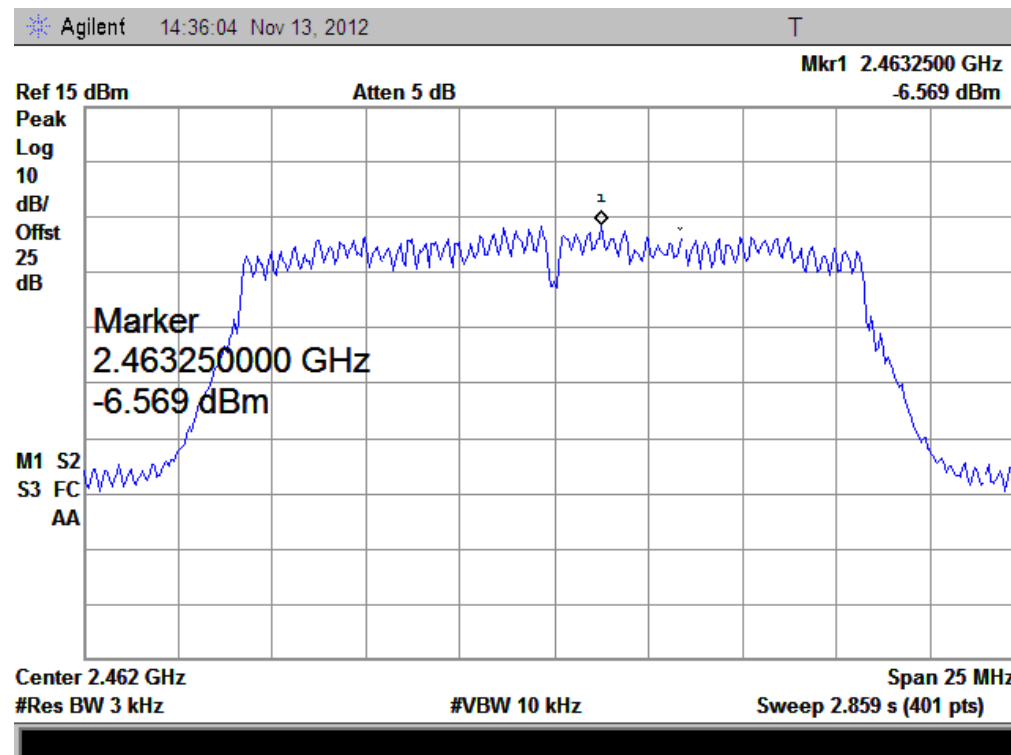


(Plot F: Channel = 11 @ 802.11g)

2.4.3.3. 802.11n-20MHz Test mode


A. Test Verdict:

Spectral power density (dBm/3kHz)					
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Refer to Plot	Limit (dBm/3kHz)	Verdict
1	2412	-7.384	Plot A	8	PASS
6	2437	-8.395	Plot B	8	PASS
11	2462	-8.734	Plot C	8	PASS
Measurement uncertainty: ± 1.3 dB					


B. Test Plots:

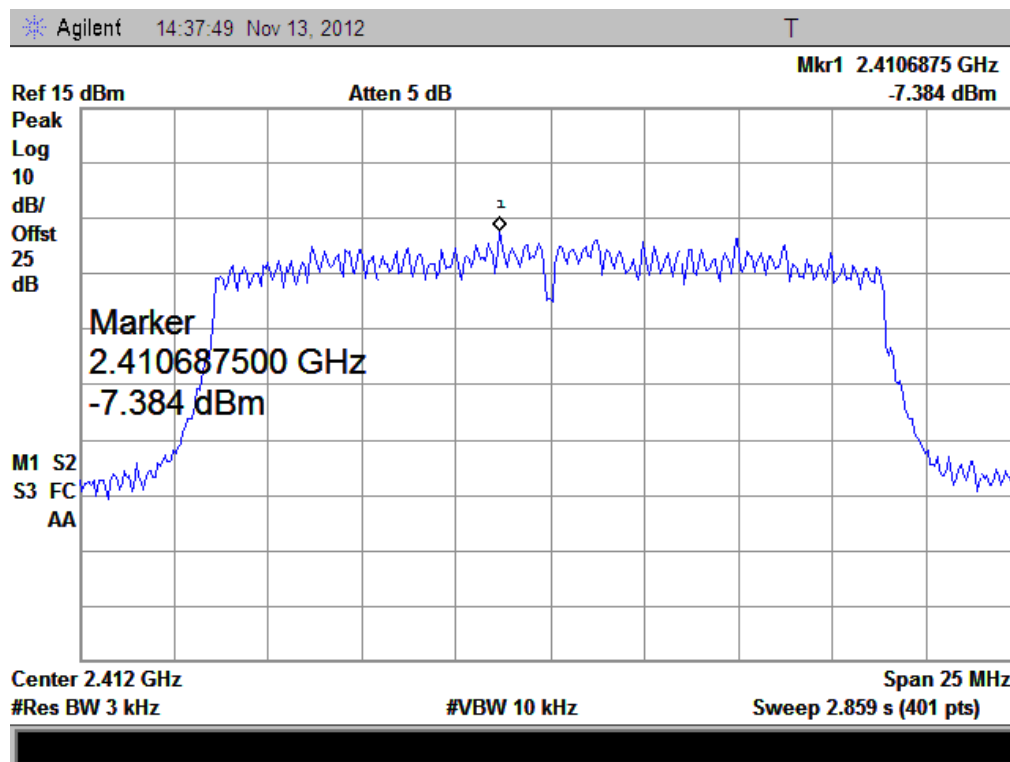

(Plot G: Channel = 1 @ 802.11n)

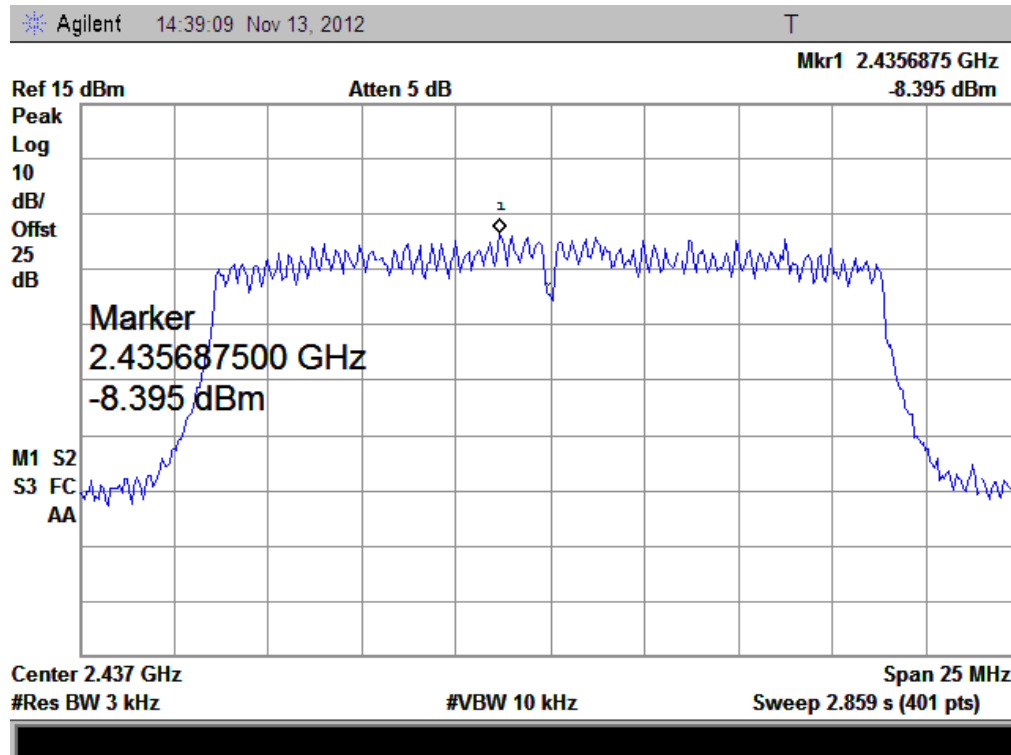

(Plot H: Channel = 6 @ 802.11n)

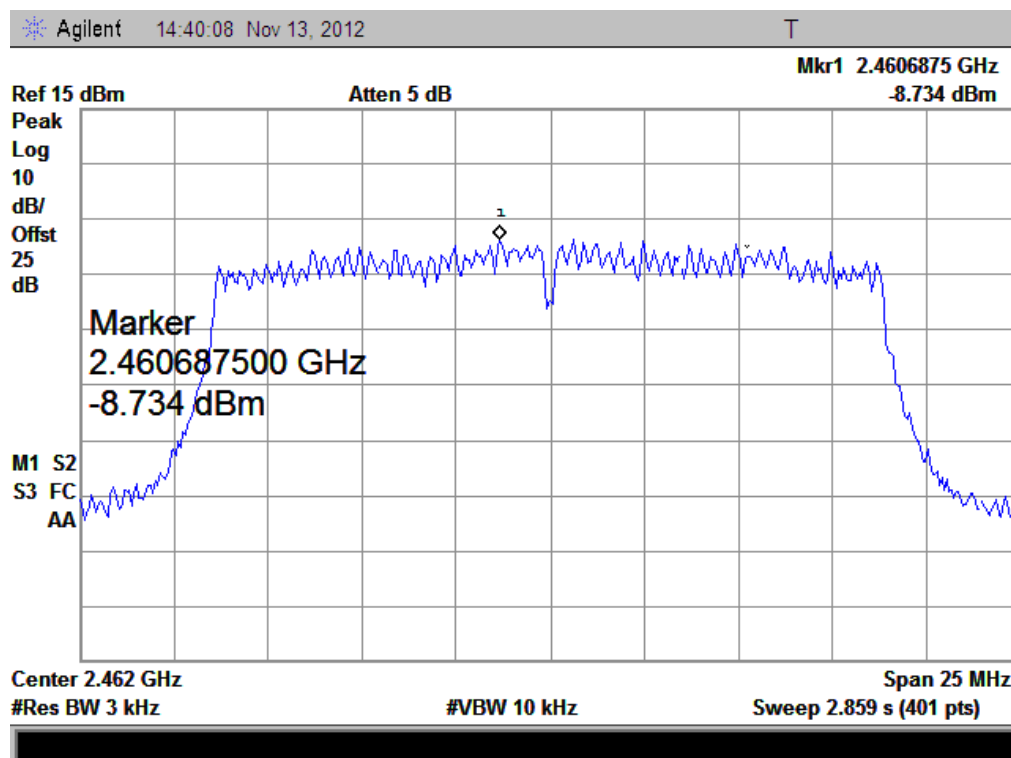

(Plot I: Channel = 11 @ 802.11n)


2.5. Band Edge

2.5.1. Requirement

According to FCC section 15.247(c) and RSS- A8.5, in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.5.2. Test Description

A. Test Setup

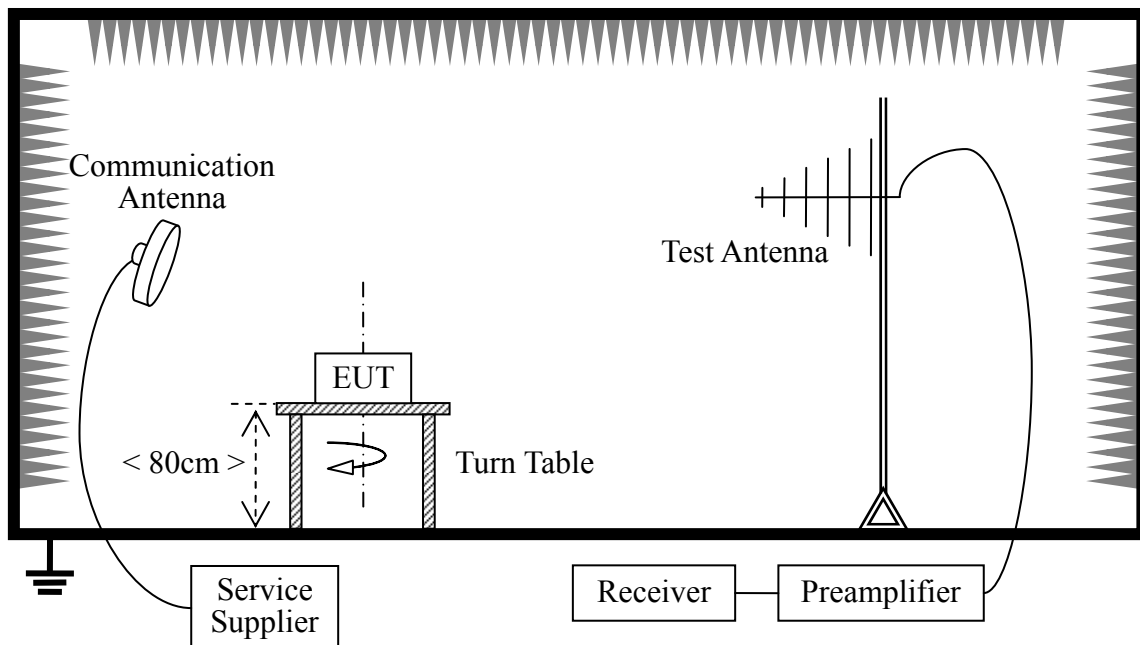

The Module of the EUT is powered by the Battery charged with the AC Adapter. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Receiver	Agilent	E7405A	US44210471	2012.5	2013.05
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2012.5	2014.05
Test Antenna	Schwarzbeck	BBHA 9120C	9120C-384	2012.5	2013.05

2.5.3. Test Result

The lowest and highest channels are tested to verify the band edge emissions.

The measurement results are obtained as below:

$$E \text{ [dB } \mu \text{ V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


2.5.3.1. 802.11b Test mode

The lowest and highest channels are tested to verify the band edge emissions.


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading UR (dBuV)	AT (dB)	AFactor (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
1	2398.84	PK	45.98	-30.93	32.56	47.61	74	Pass
1	2398.28	AV	43.54	-30.93	32.56	45.17	54	Pass
11	2488.89	PK	45.32	-29.05	32.50	48.85	74	Pass
11	2490.60	AV	42.84	-29.05	32.50	46.29	54	Pass


B. Test Plots:

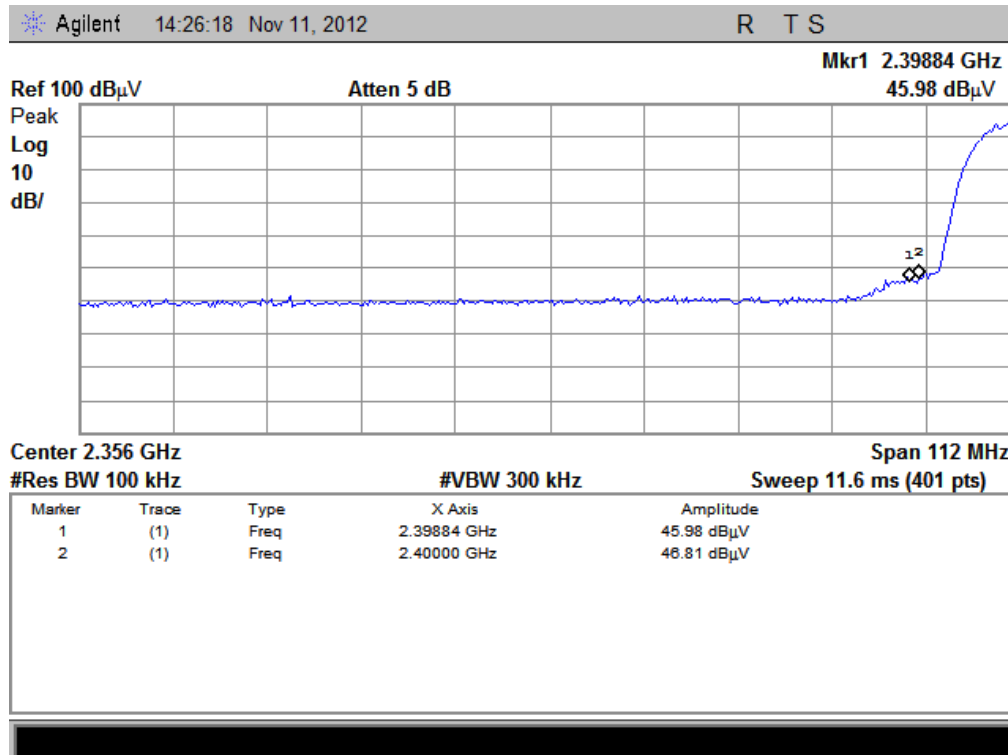


(Plot A1: Channel = 1 PEAK @ 802.11b)

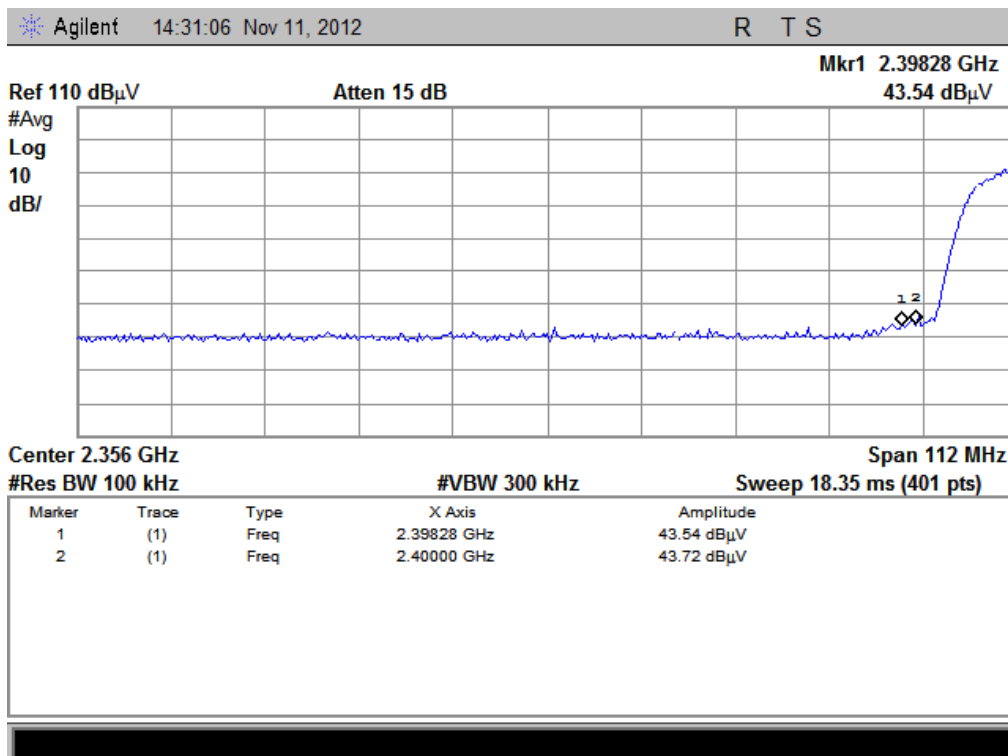

(Plot A2: Channel = 1 AVG @ 802.11b)

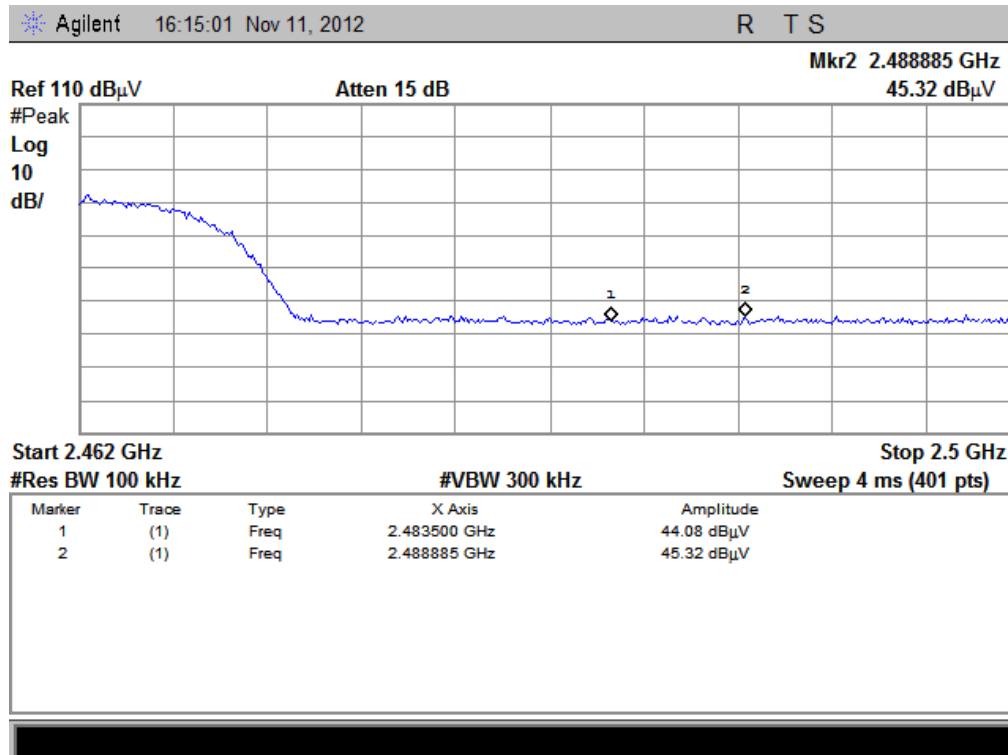

(Plot B1: Channel = 11 PEAK @ 802.11b)

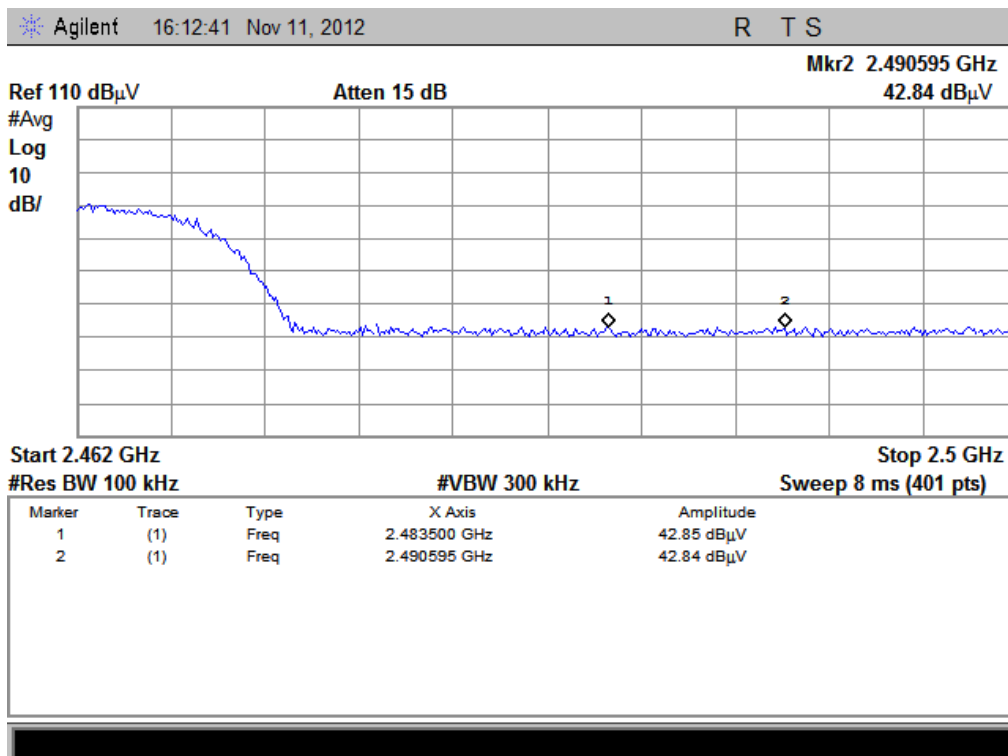

(Plot B2: Channel = 11 AVG @ 802.11b)


2.5.3.2. 802.11g Test mode

The lowest and highest channels are tested to verify the band edge emissions.


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading UR (dBuV)	AT (dB)	AFactor (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
1	2397.72	PK	48.67	-30.93	32.56	50.30	74	Pass
1	2354.88	AV	41.93	-30.93	32.56	43.56	54	Pass
11	2489.65	PK	45.86	-29.05	32.50	49.31	74	Pass
11	2494.21	AV	43.01	-29.05	32.50	46.46	54	Pass


B. Test Plots:

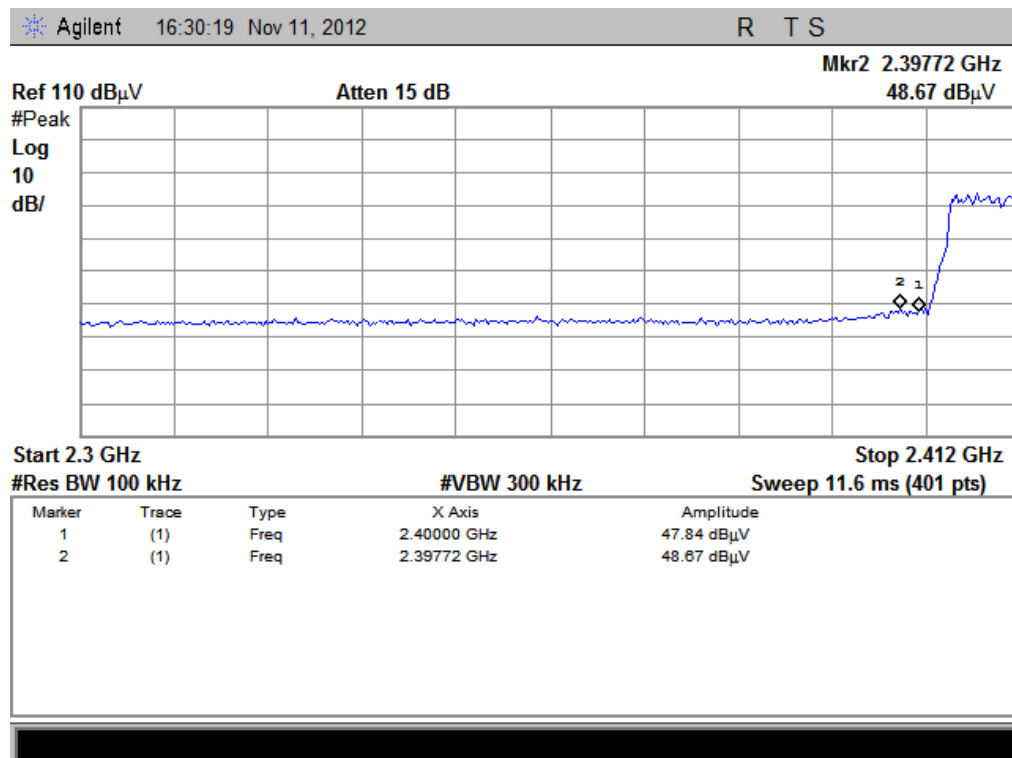


(Plot C1: Channel = 1 PEAK @ 802.11g)

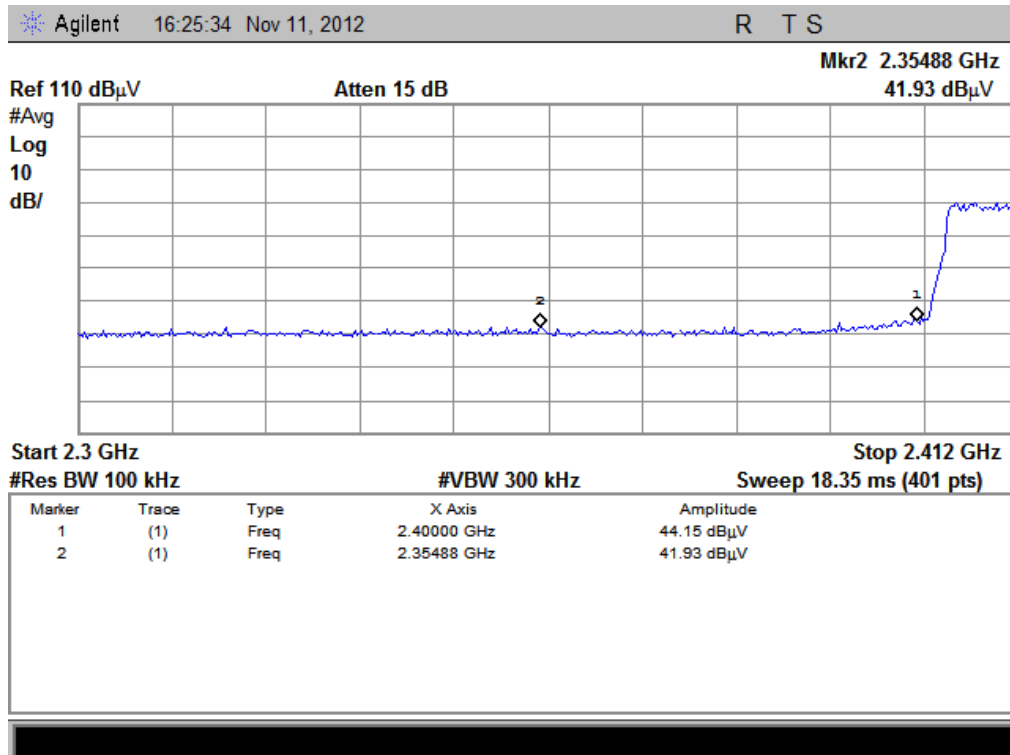

(Plot C2: Channel = 1 AVG @ 802.11g)

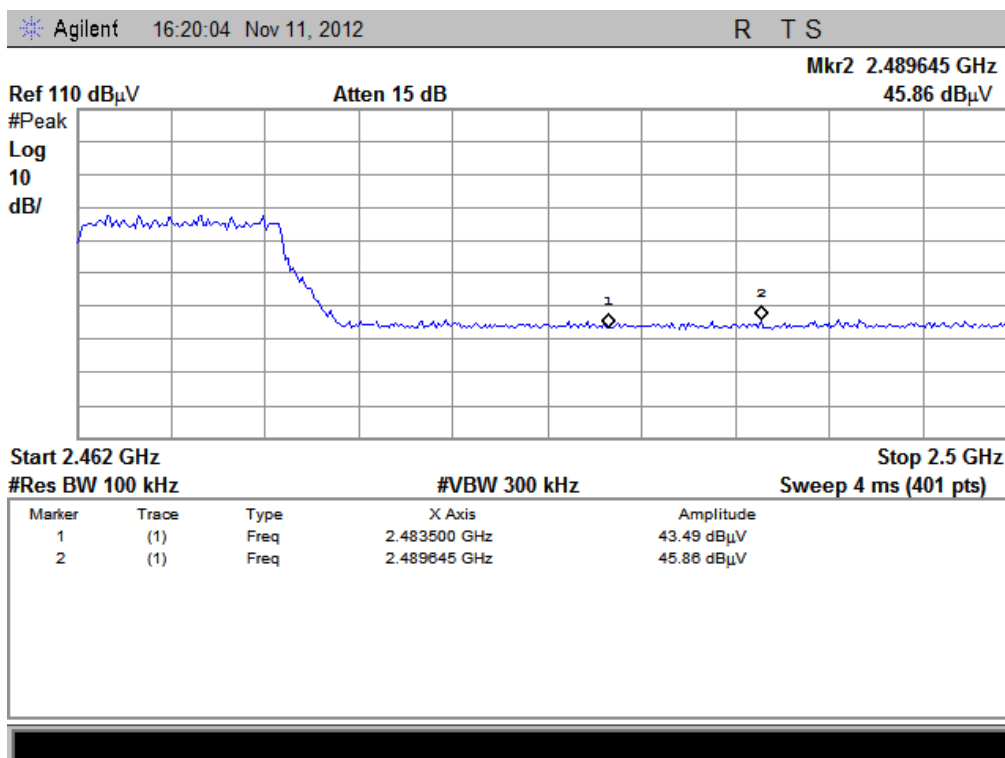

(Plot D1: Channel = 11 PEAK @ 802.11g)

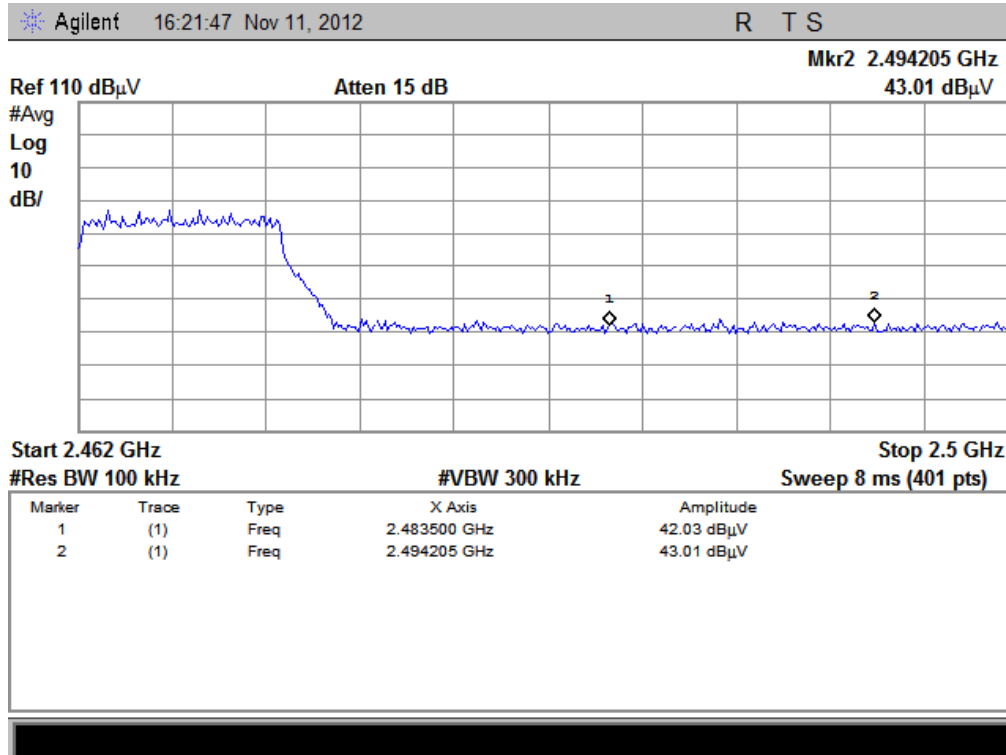

(Plot D2: Channel = 11 AVG @ 802.11g)


2.5.3.3. 802.11n-20MHz Test mode

The lowest and highest channels are tested to verify the band edge emissions.


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading UR (dBuV)	AT (dB)	AFactor (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV				(dB μ V/m)		
1	2399.12	PK	47.66	-30.93	32.56	49.29	74	Pass
1	2395.48	AV	43.42	-30.93	32.56	45.05	54	Pass
11	2489.84	PK	44.81	-29.05	32.50	48.26	74	Pass
11	2496.87	AV	42.64	-29.05	32.50	46.09	54	Pass


B. Test Plots:

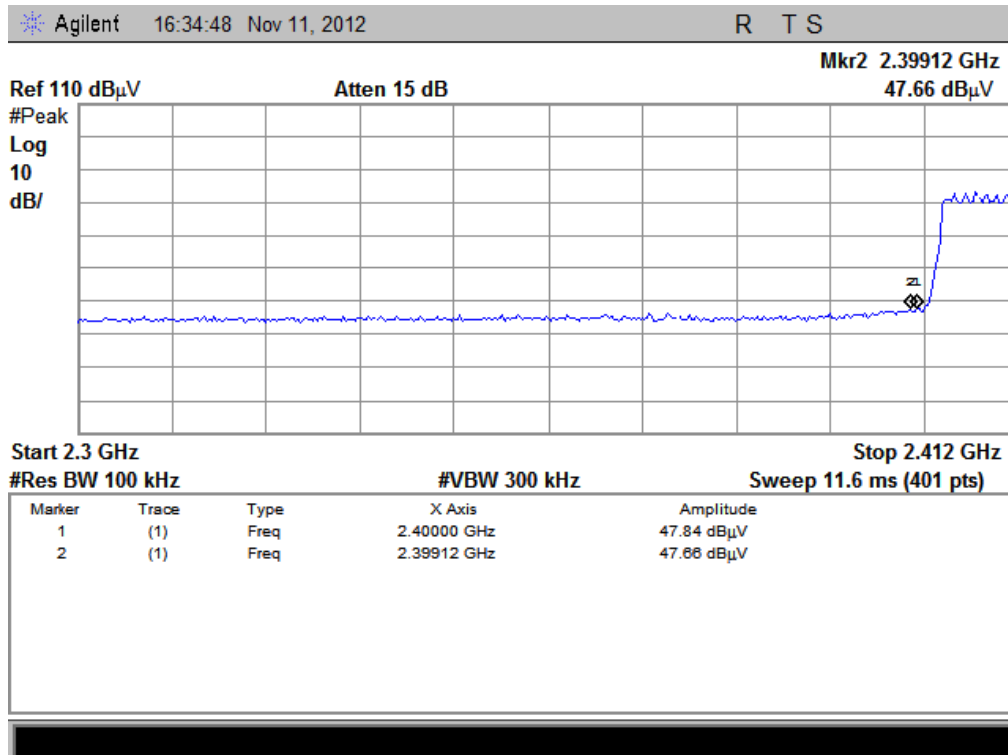


(Plot E1: Channel = 1 PEAK @ 802.11n)

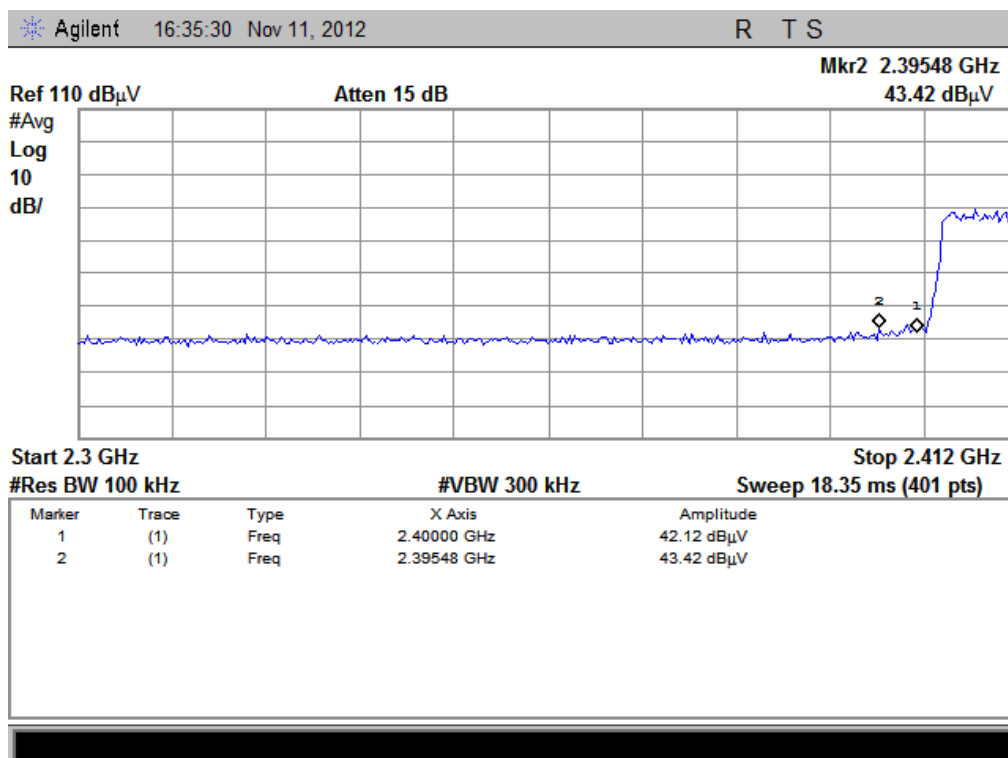

(Plot E2: Channel = 1 AVG @ 802.11n)

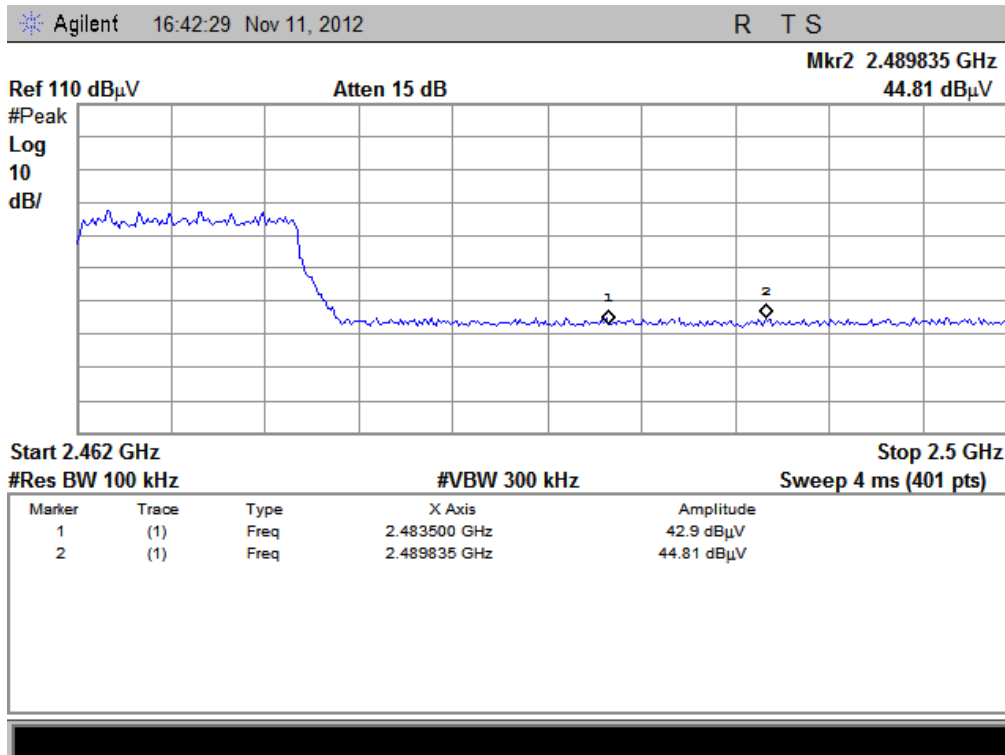

(Plot F1: Channel = 11 PEAK @ 802.11n)

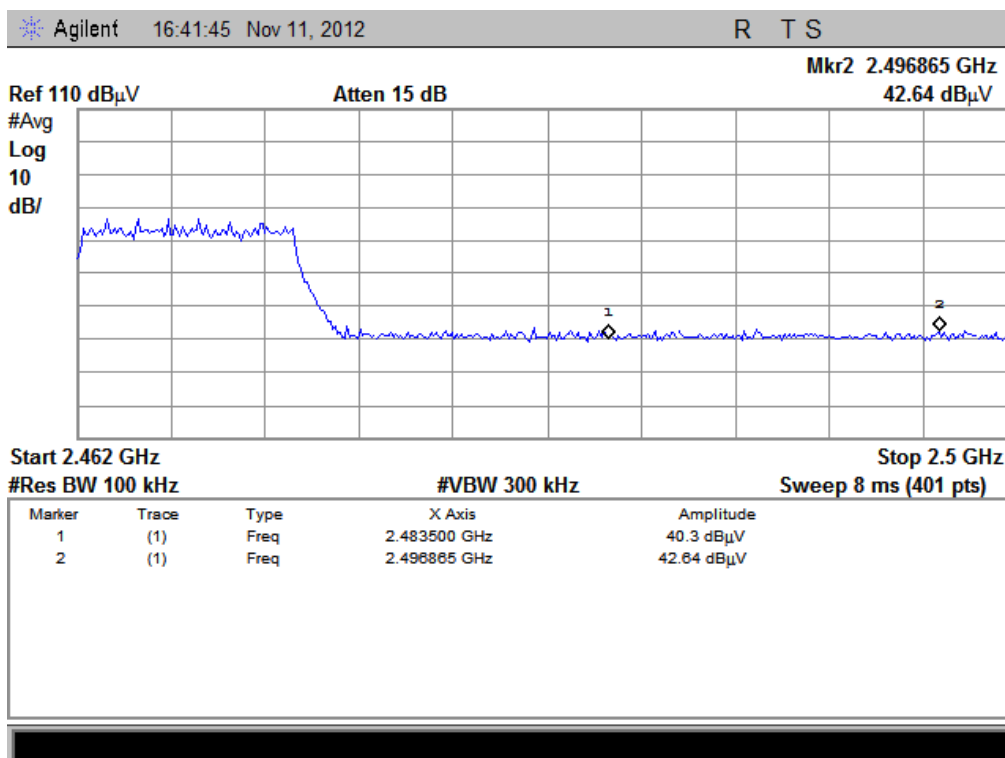

(Plot F2: Channel = 11 AVG @ 802.11n)

2.6. Conducted Emission

2.6.1. Requirement

According to FCC section 15.207 , for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.6.2. Test Description

A. Test Setup:

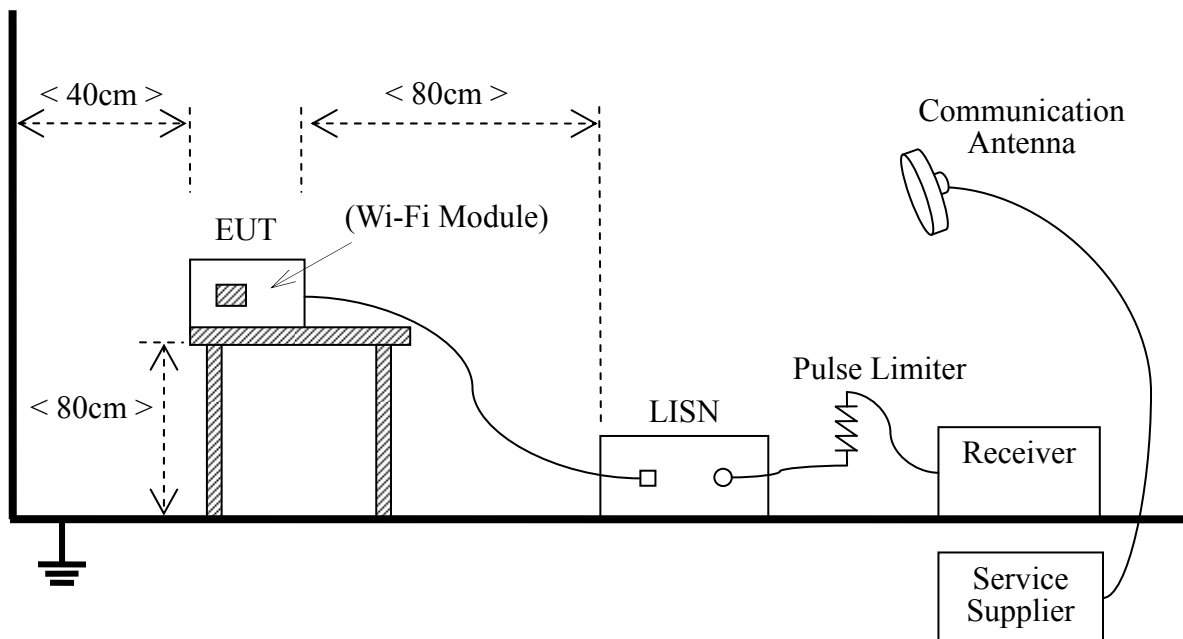

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4:2009


The EUT is powered by the Battery charged with the AC Adapter which is powered by 120V, 60Hz AC mains supply. The factors of the site are calibrated to correct the reading. During the measurement, the EUT is activated and controlled by the Wi-Fi Service Supplier (SS) via a Common Antenna.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Receiver	Agilent	E7405A	US44210471	2012.05	2013.05
LISN	Schwarzbeck	NSLK 8127	812744	2012.05	2013.05
Service Supplier	R&S	CMU200	100448	2012.05	2013.05
Pulse Limiter (20dB)	Schwarzbeck	VTSD 9561-D	9391	2012.05	2013.05

2.6.3. Test Result


The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

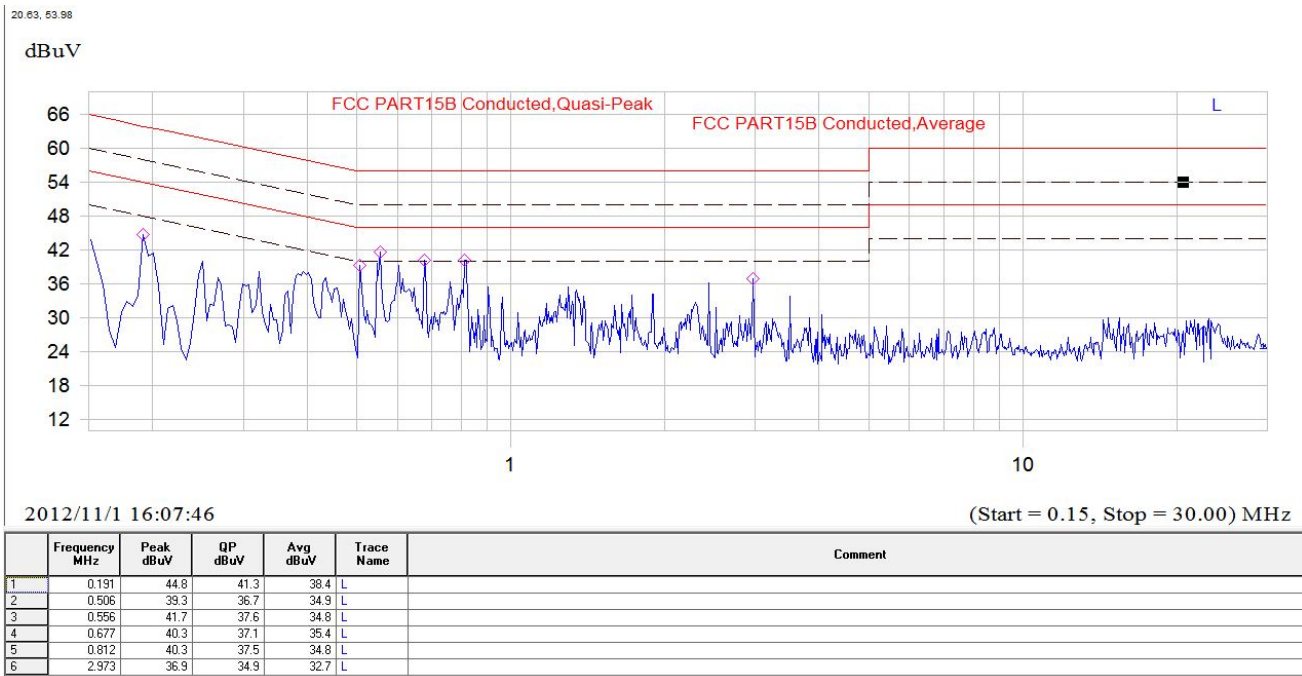

(Plot A: L Phase)

21.39, 53.98

dBuV

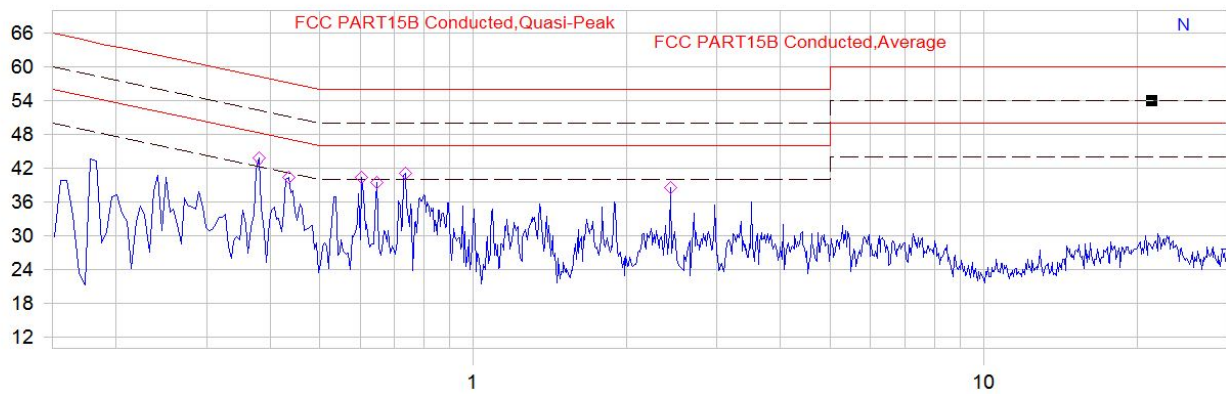

2012/11/1 16:11:33

(Start = 0.15, Stop = 30.00) MHz

	Frequency MHz	Peak dBuV	QP dBuV	Avg dBuV	Trace Name	Comment
1	0.380	43.8	40.1	39.4	N	
2	0.434	40.4	38.7	34.8	N	
3	0.605	40.4	38.2	33.7	N	
4	0.646	39.5	37.3	34.8	N	
5	0.736	41.2	37.6	33.7	N	
6	2.433	38.6	36.8	34.3	N	

(Plot B: N Phase)

2.7. Radiated Emission

2.7.1. Requirement

According to FCC section 15.247(c), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to RSS- Gen section 7.2.3. Those emissions generated in a receiver and radiated from the receiver either via the antenna path or via the control, power, and audio cables that may be used with the receiver. All spurious emissions shall comply with the limits of next table:

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.7.2. Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

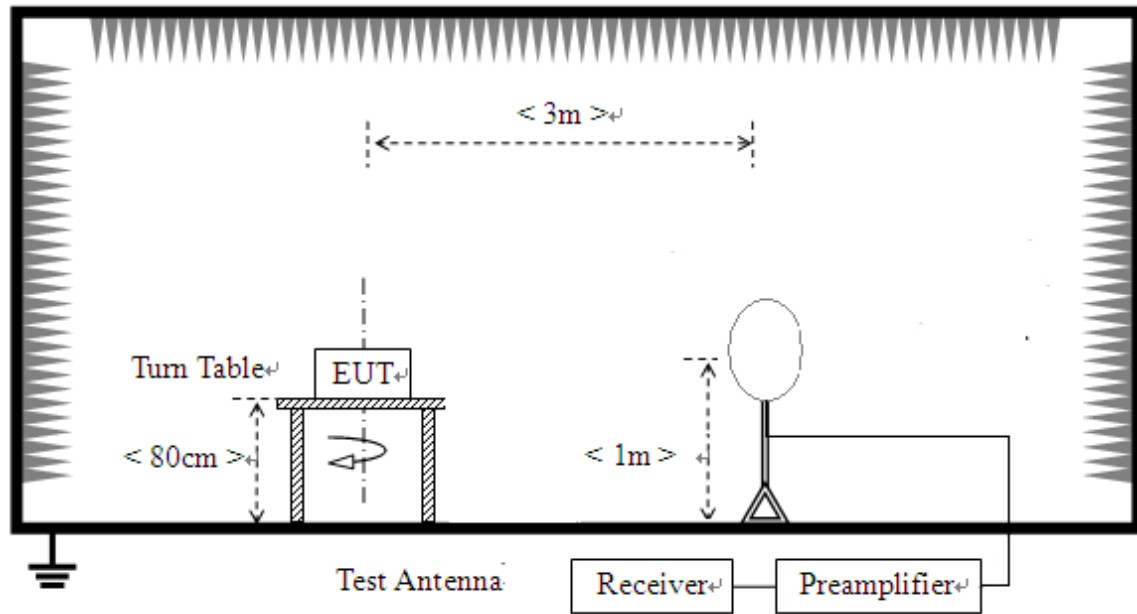

2) For radiated emissions from 30MHz to 1GHz

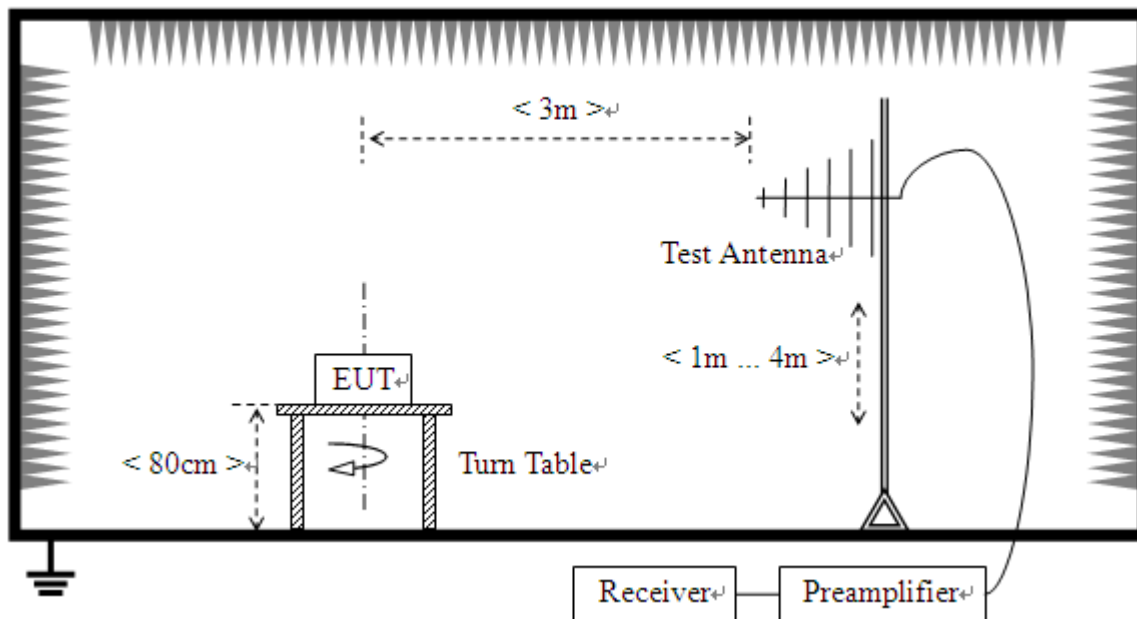

3) For radiated emissions above 1GHz

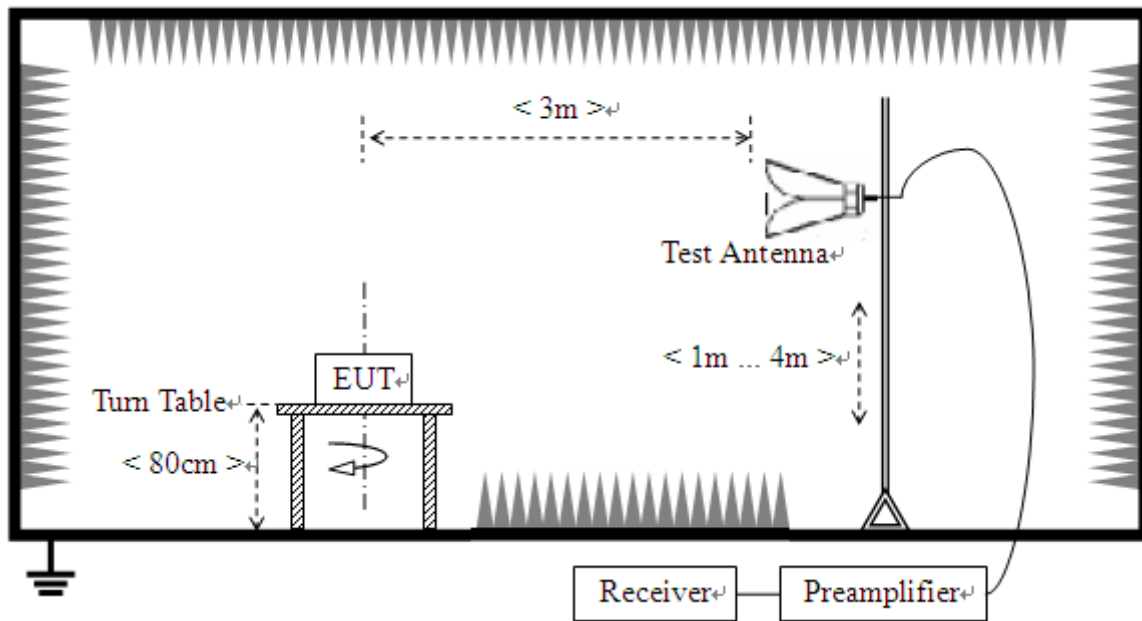

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2009). The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4.

The EUT of the EUT is powered by the Battery charged with the AC Adapter which is powered by 120V, 60Hz AC mains supply. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the EUT is activated and controlled by the Wireless Router via a Common Antenna, and is set to operate under hopping-on test mode.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 2GHz) and Horn Test Antenna (above 2GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	R&S	CMU200	100448	2012.05	2013.05
Receiver	Agilent	E7405A	US44210471	2012.05	2013.05
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2012.05	2014.05
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2012.05	2013.05

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Test Antenna - Horn	Schwarzbeck	BBHA 9120D	9120C-963	2012.05	2013.05
Test Antenna - Horn	R&S	HL050S7	71688	2012.05	2013.05
Test Antenna -Loop	Schwarzbeck	FMZB 1519	1519-022	2012.05	2013.05

2.7.3. Test Result

According to ANSI C63.4 selection 4.2.2, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB } \mu \text{ V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

2.7.3.1. 802.11b Test mode

A. Test Verdict for Harmonics:

The Fundamental Emissions

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

Channel	Frequency (MHz)	Fundamental Emission (dB μ V/m)		Antenna Polarization	Refer to Plot
		PK	AV		
1	2412	79.23	N/A	Horizontal	Plot A.2
		80.10	N/A	Vertical	Plot A.3
6	2437	80.59	N/A	Horizontal	Plot B.2
		80.12	N/A	Vertical	Plot B.3
11	2462	81.77	N/A	Horizontal	Plot C.2
		80.60	N/A	Vertical	Plot C.3


Also refer to following plots for the emissions falling in the restricted bands.

B. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 1




(Plot A.1: 9kHz to 30MHz)

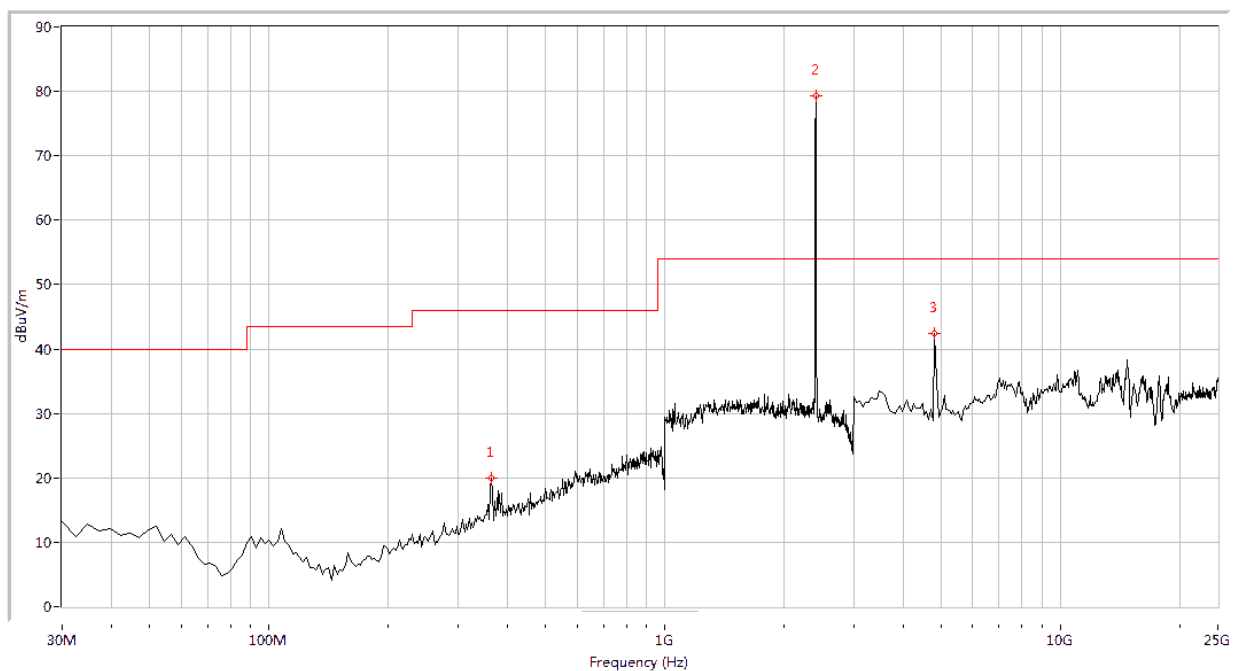

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
363.815	20.02	N.A	N.A	N.A	46.0	N.A	150.2	Horizontal	PASS
2412.000	79.23	N.A	N.A	74.0	N.A	54.0	268.5	Horizontal	N/A
4810.474	42.37	N.A	N.A	74.0	N.A	54.0	355.3	Horizontal	PASS


(Plot A.2: Antenna Horizontal, 30MHz to 25GHz)

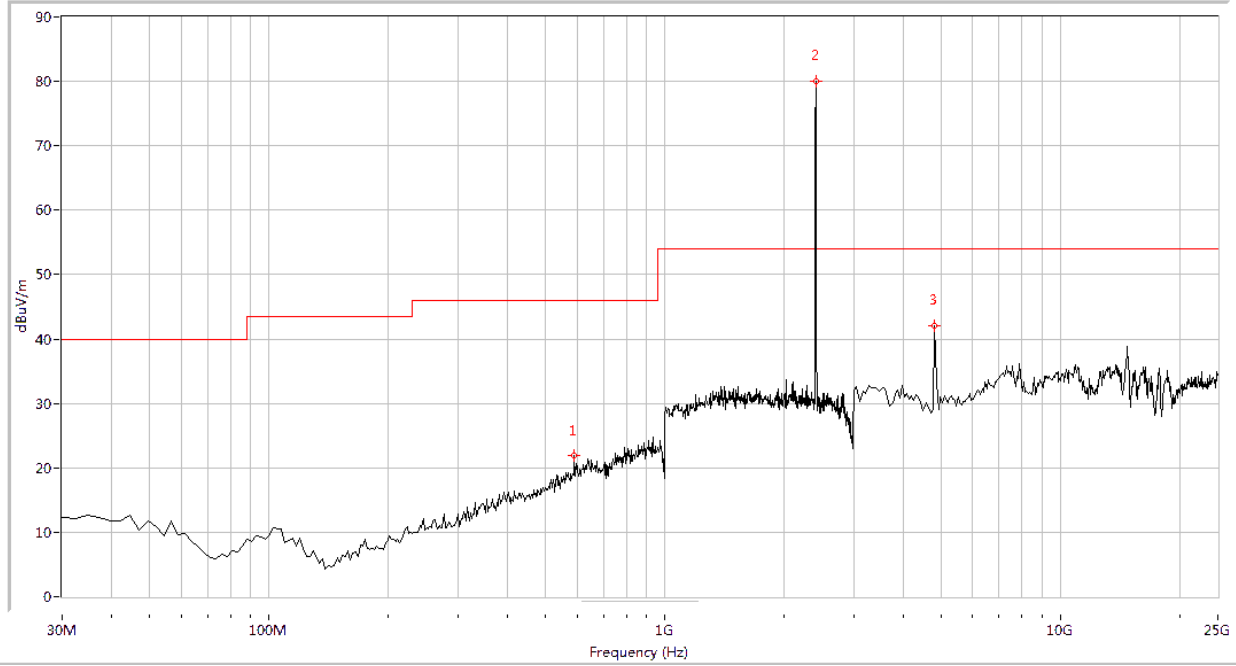


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
591.197	21.85	N.A	N.A	N.A	46.0	N.A	96.4	Vertical	PASS
2412.000	80.10	N.A	N.A	74.0	N.A	54.0	111.6	Vertical	N/A
4810.474	42.11	N.A	N.A	74.0	N.A	54.0	284.3	Vertical	PASS

(Plot A.3: Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 6

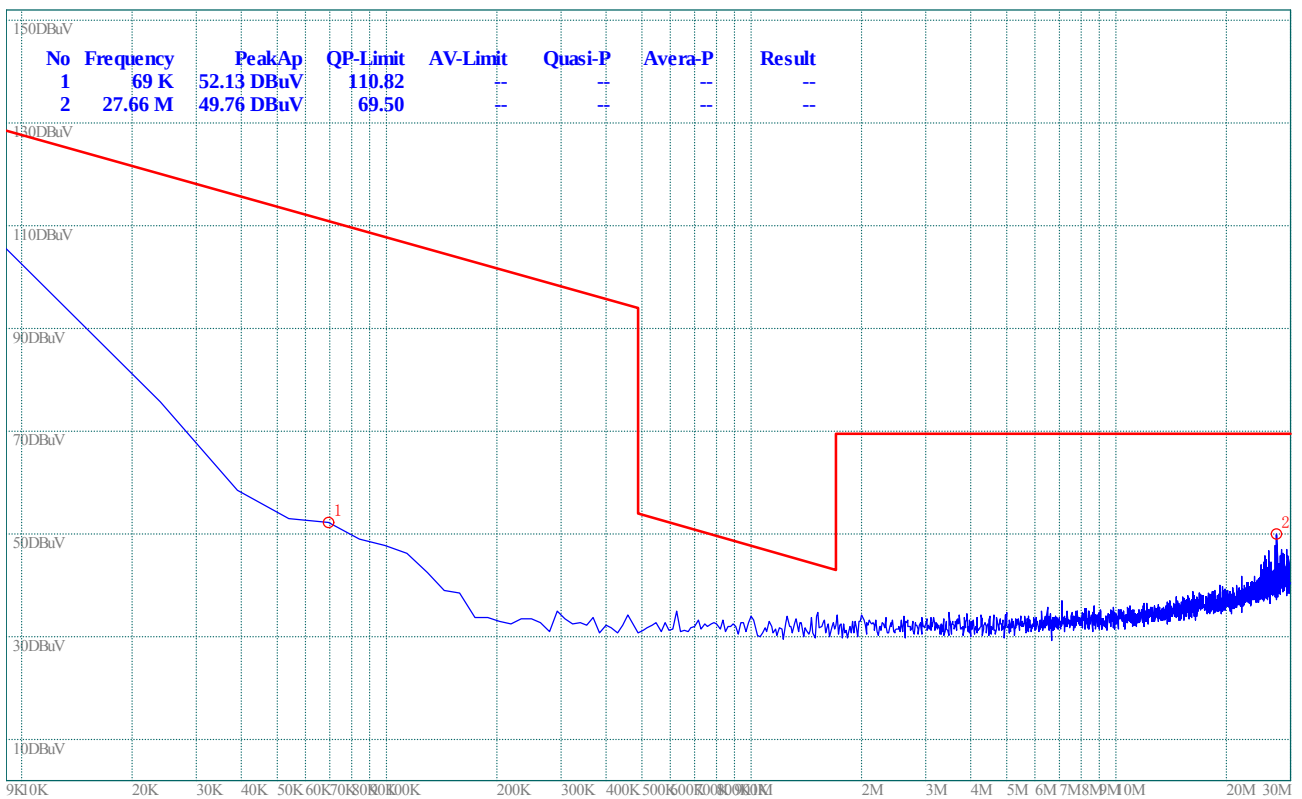


(Plot B.1: 9kHz to 30MHz)

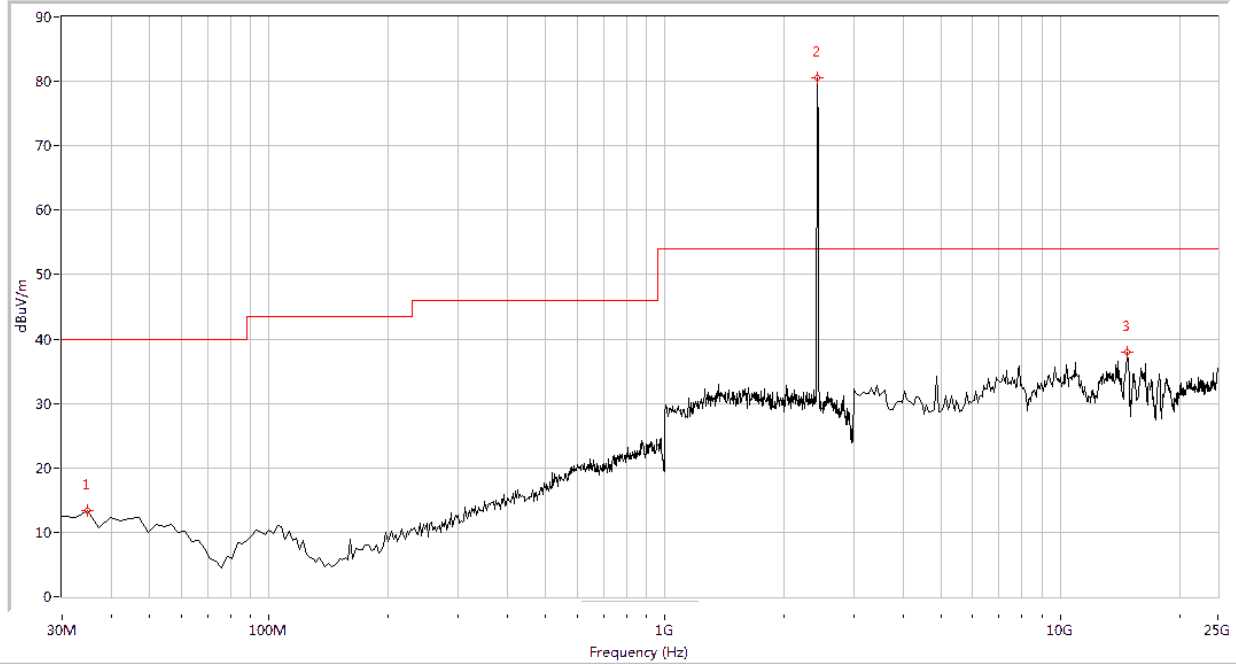

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
34.838	13.32	N.A	N.A	N.A	40.0	N.A	153.6	Horizontal	PASS
2437.000	80.59	N.A	N.A	74.0	N.A	54.0	106.3	Horizontal	N/A
14795.511	37.93	N.A	N.A	74.0	N.A	54.0	321.7	Horizontal	PASS


(Plot B.2: Antenna Horizontal, 30MHz to 25GHz)

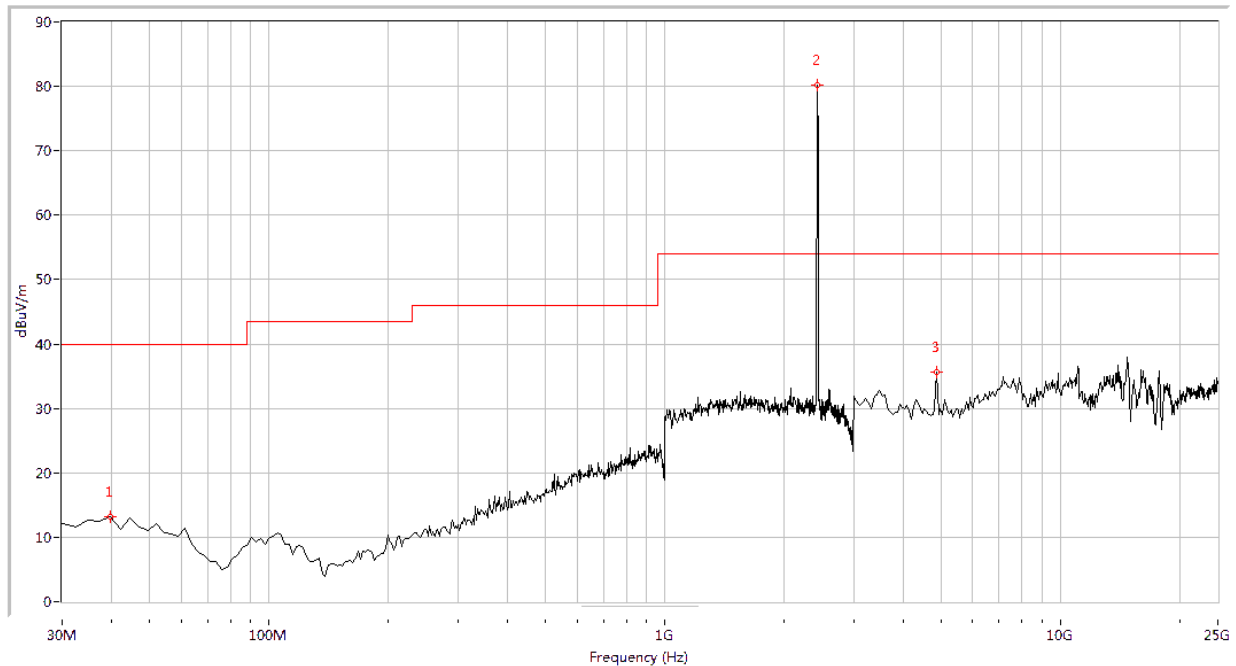


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
39.676	13.11	N.A	N.A	N.A	40.0	N.A	98.5	Vertical	PASS
2437.000	80.12	N.A	N.A	74.0	N.A	54.0	195.1	Vertical	N/A
4865.337	35.73	N.A	N.A	74.0	N.A	54.0	153.4	Vertical	PASS

(Plot B.3: Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 11

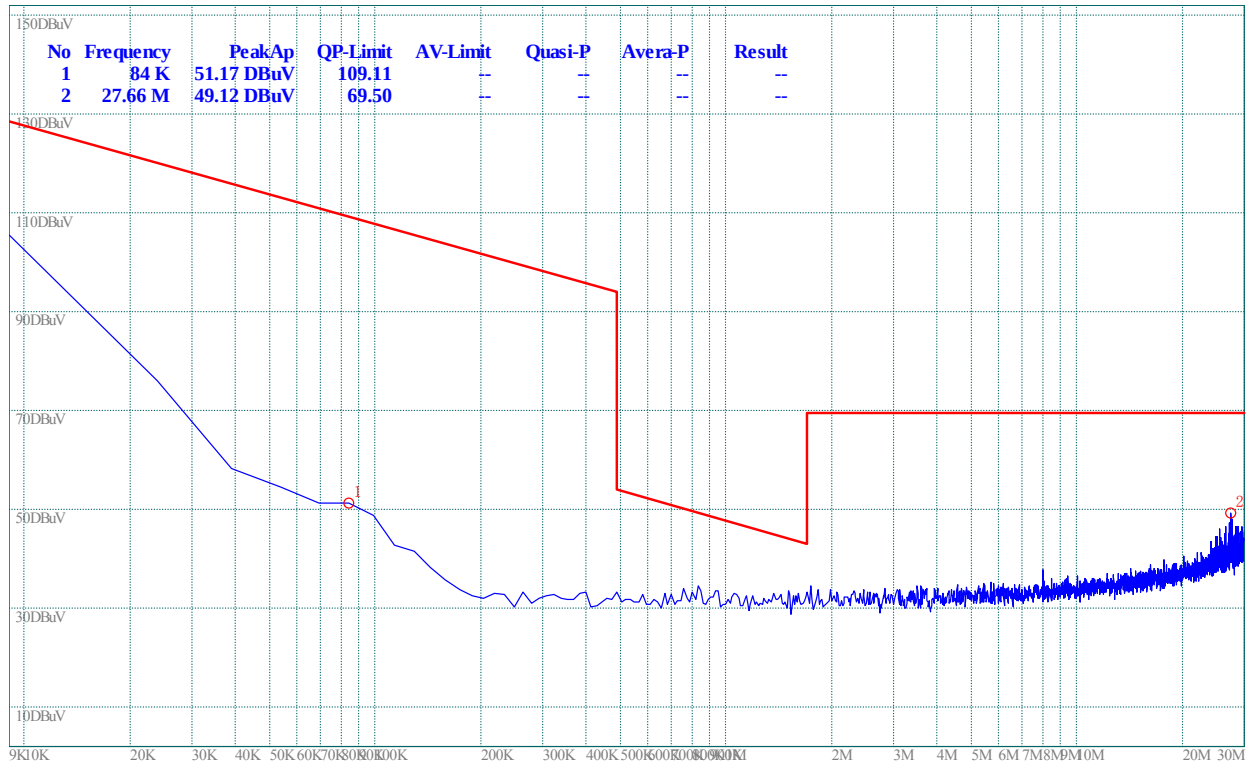


(Plot C.1: 9kHz to 30MHz)

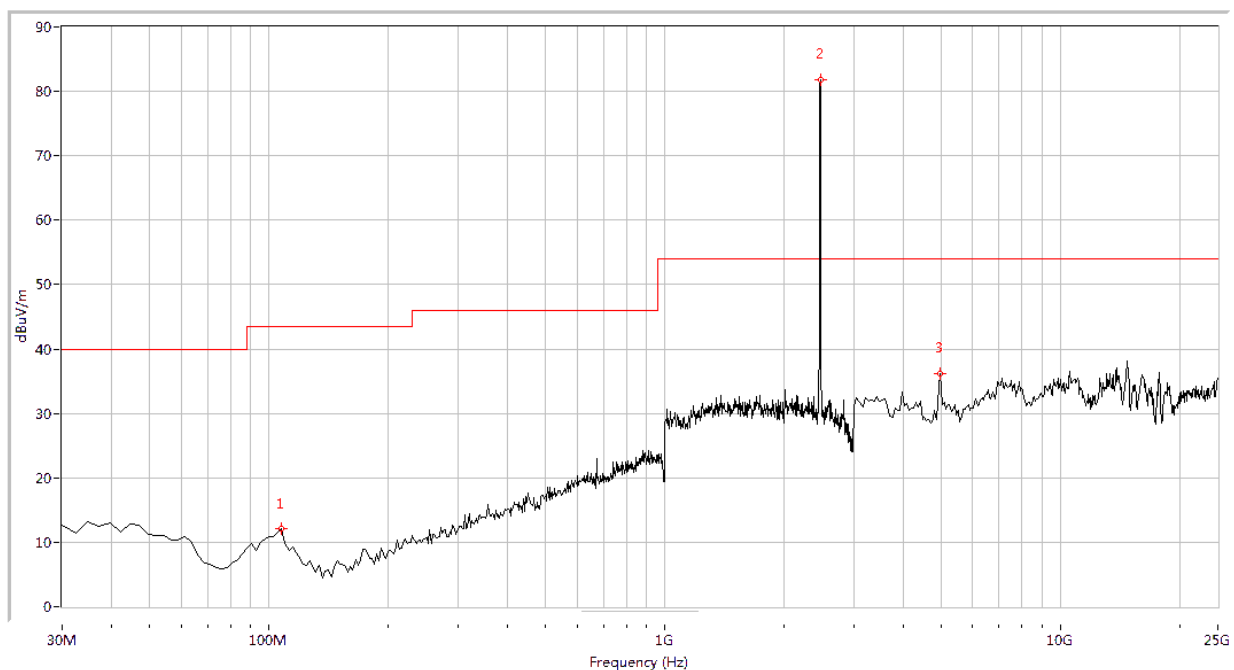

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
107.406	12.04	N.A	N.A	N.A	43.5	N.A	293.4	Horizontal	PASS
2462.000	81.77	N.A	N.A	74.0	N.A	54.0	188.9	Horizontal	N/A
4975.062	36.14	N.A	N.A	74.0	N.A	54.0	301.6	Horizontal	PASS

(Plot C.2: Antenna Horizontal, 30MHz to 25GHz)

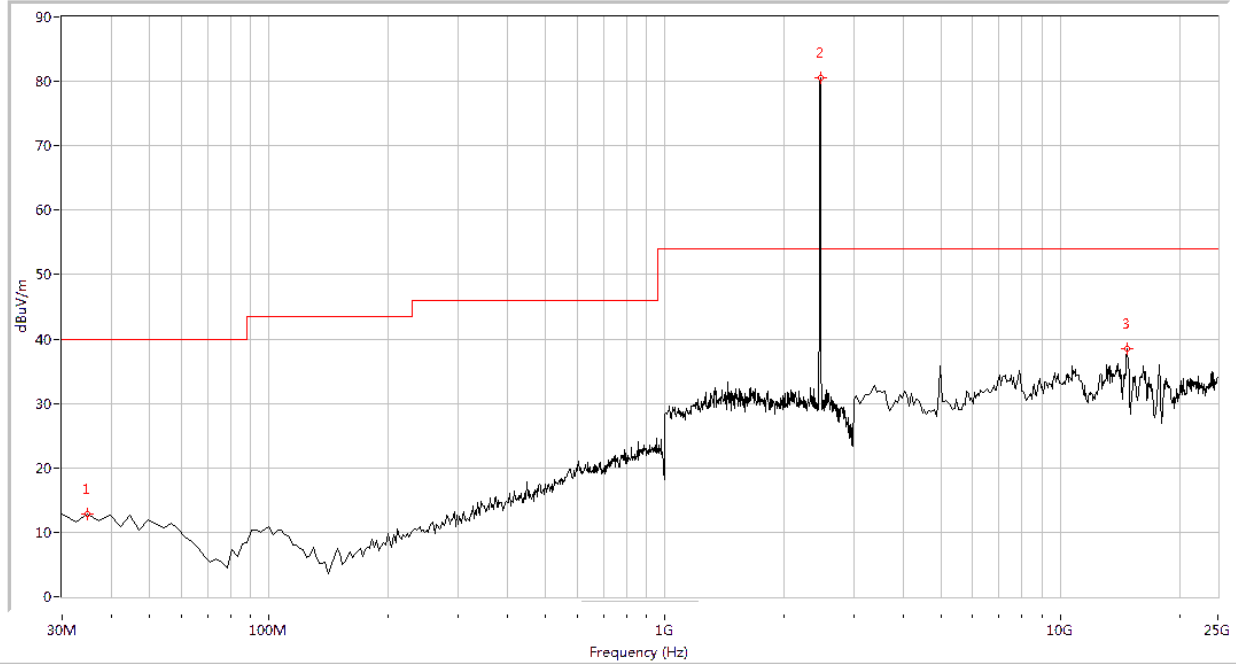

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
34.838	12.81	N.A	N.A	N.A	40.0	N.A	281.3	Vertical	PASS
2462.000	80.60	N.A	N.A	74.0	N.A	54.0	125.1	Vertical	N/A
14740.648	38.56	N.A	N.A	74.0	N.A	54.0	85.5	Vertical	PASS

(Plot C.5: Antenna Vertical, 30MHz to 25GHz)

2.7.3.2. 802.11g Test mode

A. Test Verdict for Harmonics:


The Fundamental Emissions

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.


Channel	Frequency (MHz)	Fundamental Emission (dBμV/m)		Antenna Polarization	Refer to Plot
		PK	AV		
1	2412	80.27	N/A	Horizontal	Plot D.2
		80.47	N/A	Vertical	Plot D.3
6	2437	79.78	N/A	Horizontal	Plot E.2
		79.27	N/A	Vertical	Plot E.3
11	2462	81.47	N/A	Horizontal	Plot F.2
		81.37	N/A	Vertical	Plot F.3

B. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 1

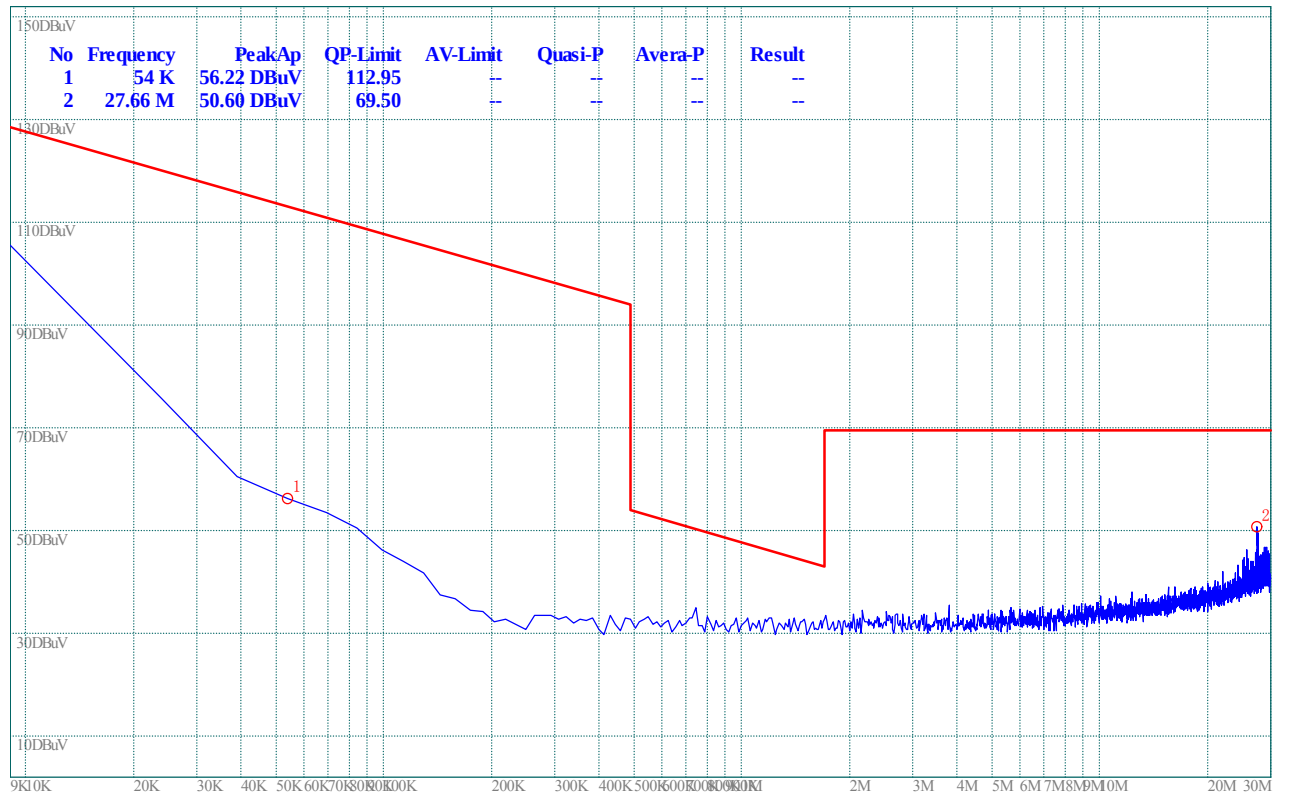


(Plot D.1: 9kHz to 30MHz)

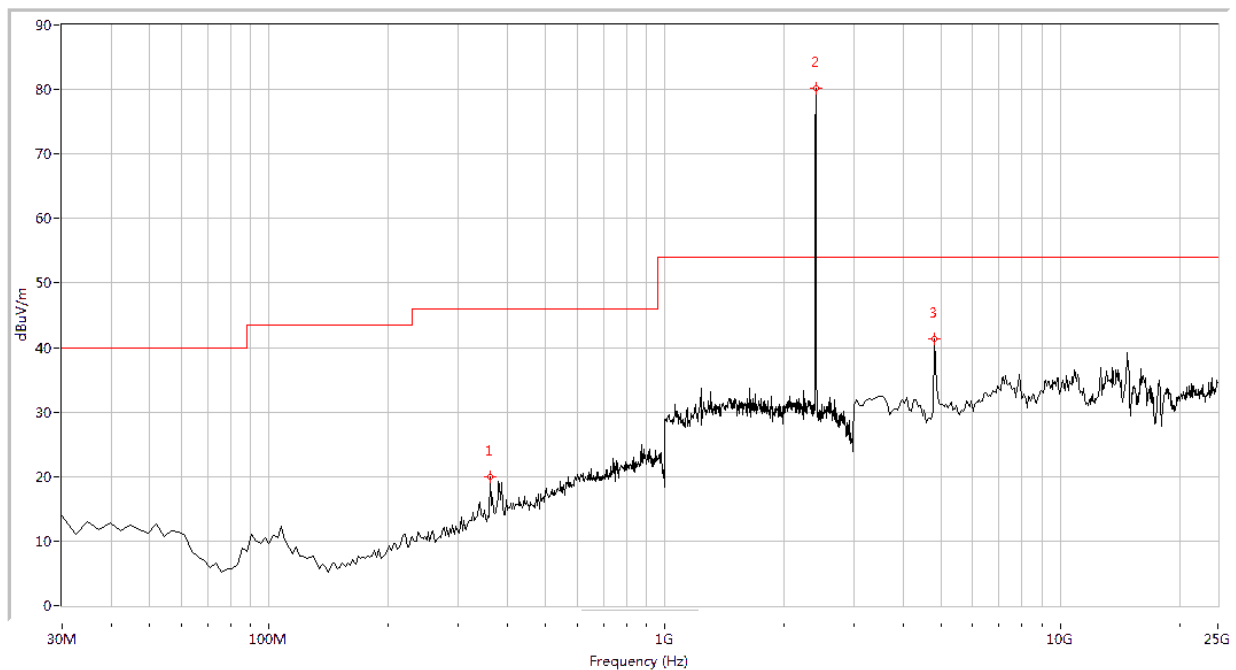

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
361.397	19.96	N.A	N.A	N.A	46.0	N.A	195.3	Horizontal	PASS
2412.000	80.27	N.A	N.A	74.0	N.A	54.0	184.6	Horizontal	N/A
4810.474	41.42	N.A	N.A	74.0	N.A	54.0	258.2	Horizontal	PASS


(Plot D.2: Antenna Horizontal, 30MHz to 25GHz)

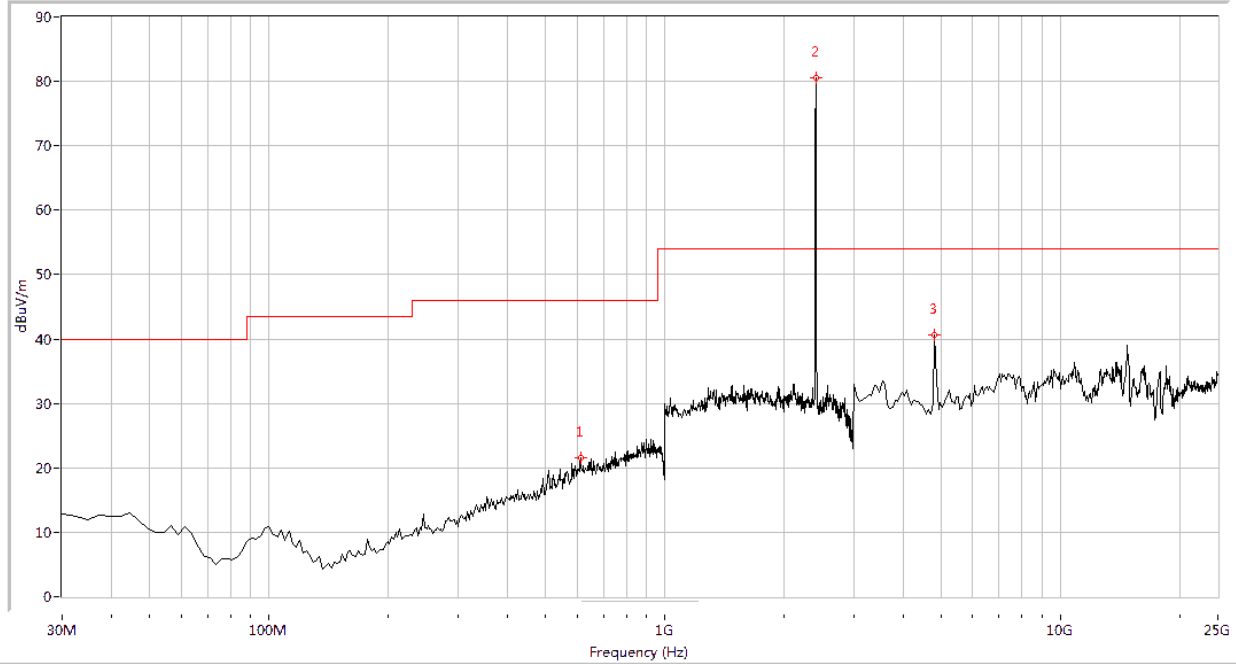


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
612.968	21.53	N.A	N.A	N.A	46.0	N.A	322.9	Vertical	PASS
2412.000	80.47	N.A	N.A	74.0	N.A	54.0	274.6	Vertical	N/A
4810.474	40.65	N.A	N.A	74.0	N.A	54.0	184.2	Vertical	PASS

(Plot D.3: Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 6

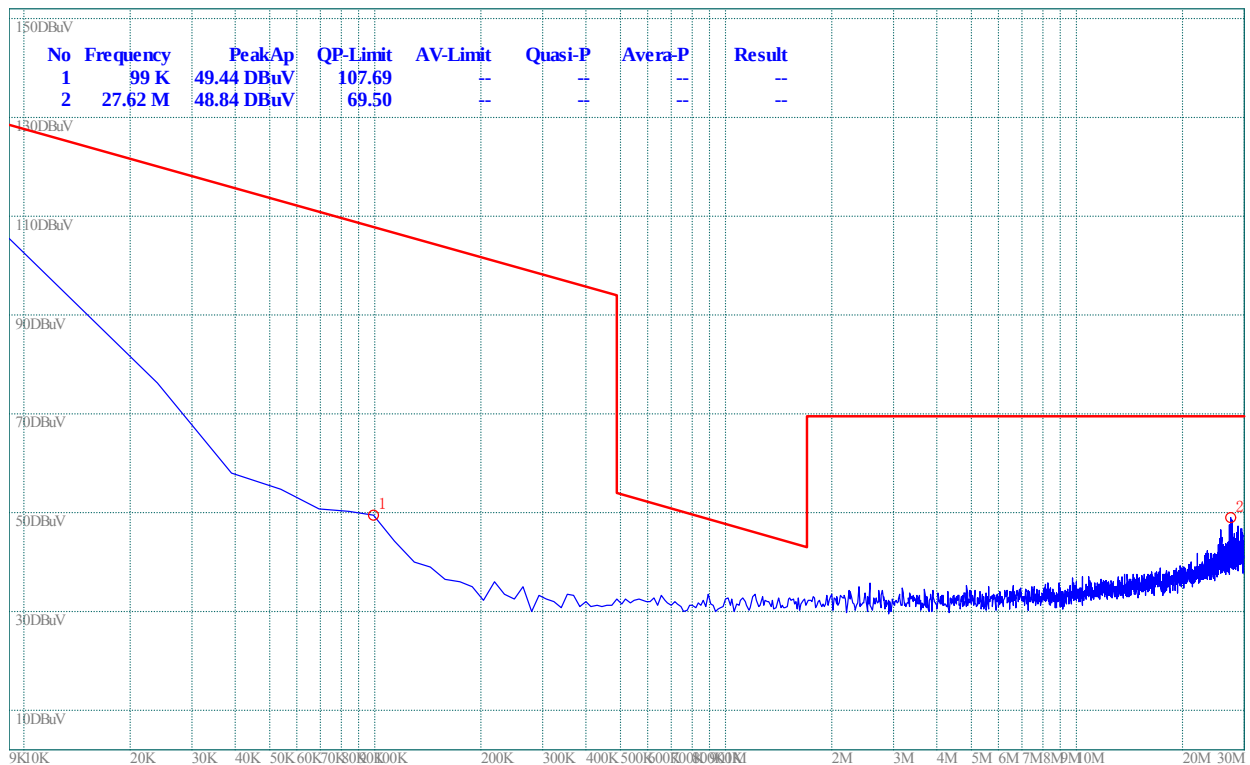


(Plot E.1: 9kHz to 30MHz)

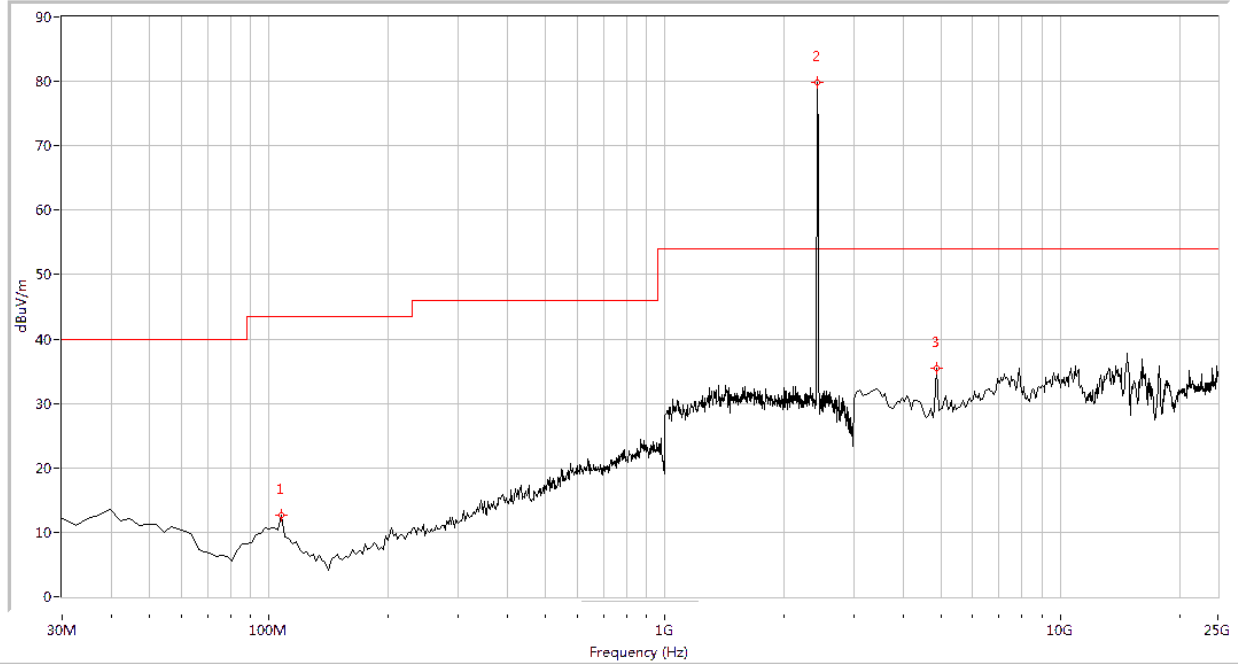

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
107.406	12.65	N.A	N.A	N.A	43.5	N.A	79.6	Horizontal	PASS
2437.000	79.78	N.A	N.A	74.0	N.A	54.0	46.2	Horizontal	N/A
4865.337	35.45	N.A	N.A	74.0	N.A	54.0	317.5	Horizontal	PASS


(Plot E.2: Antenna Horizontal, 30MHz to 25GHz)

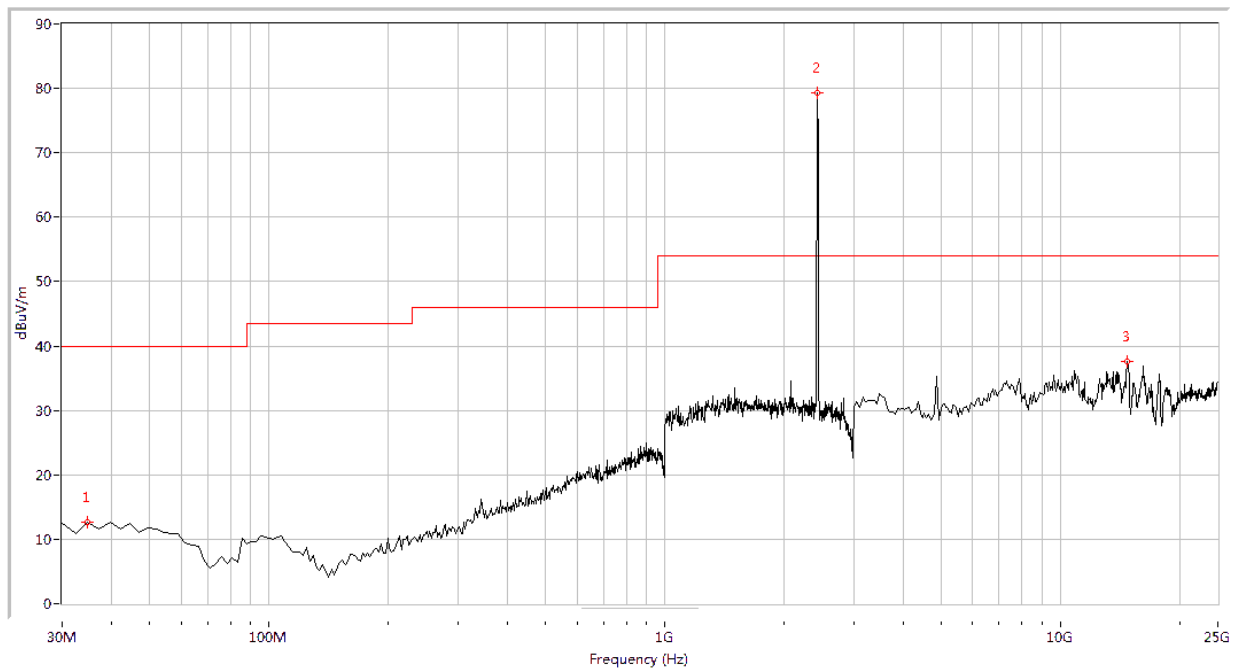


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
34.838	12.63	N.A	N.A	N.A	40.0	N.A	76.3	Vertical	PASS
2437.000	79.27	N.A	N.A	74.0	N.A	54.0	157.2	Vertical	N/A
14795.511	37.57	N.A	N.A	74.0	N.A	54.0	395.6	Vertical	PASS

(Plot E.3: Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 11

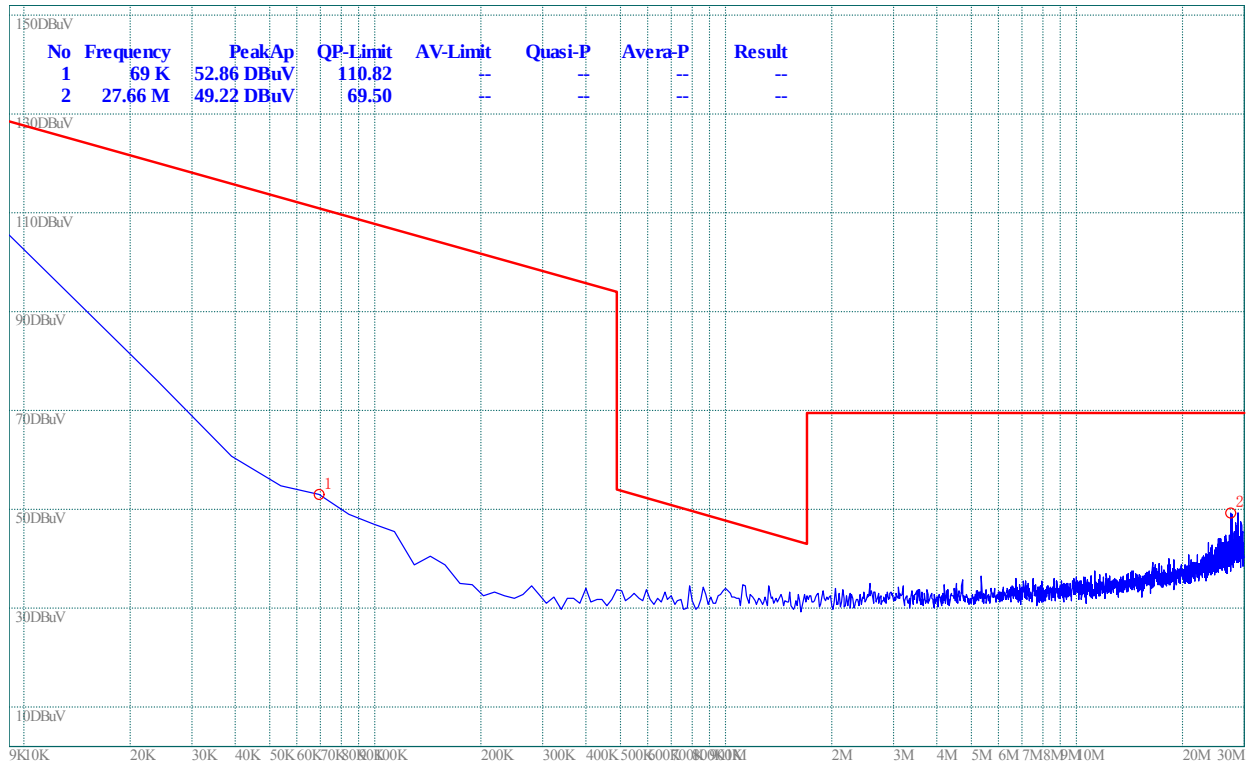


(Plot F.1: 9kHz to 30MHz)

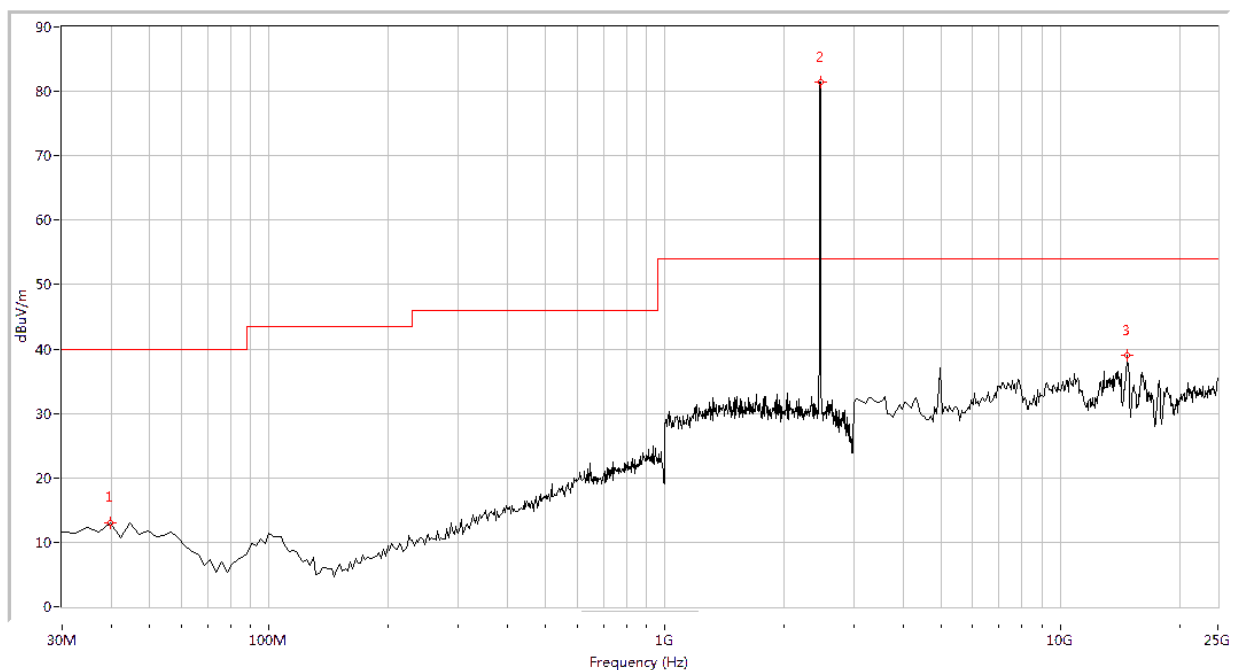

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
39.676	13.07	N.A	N.A	N.A	40.0	N.A	256.3	Horizontal	PASS
2462.000	81.47	N.A	N.A	74.0	N.A	54.0	182.2	Horizontal	N/A
14795.511	39.01	N.A	N.A	74.0	N.A	54.0	87.4	Horizontal	PASS

(Plot F.2: Antenna Horizontal, 30MHz to 25GHz)

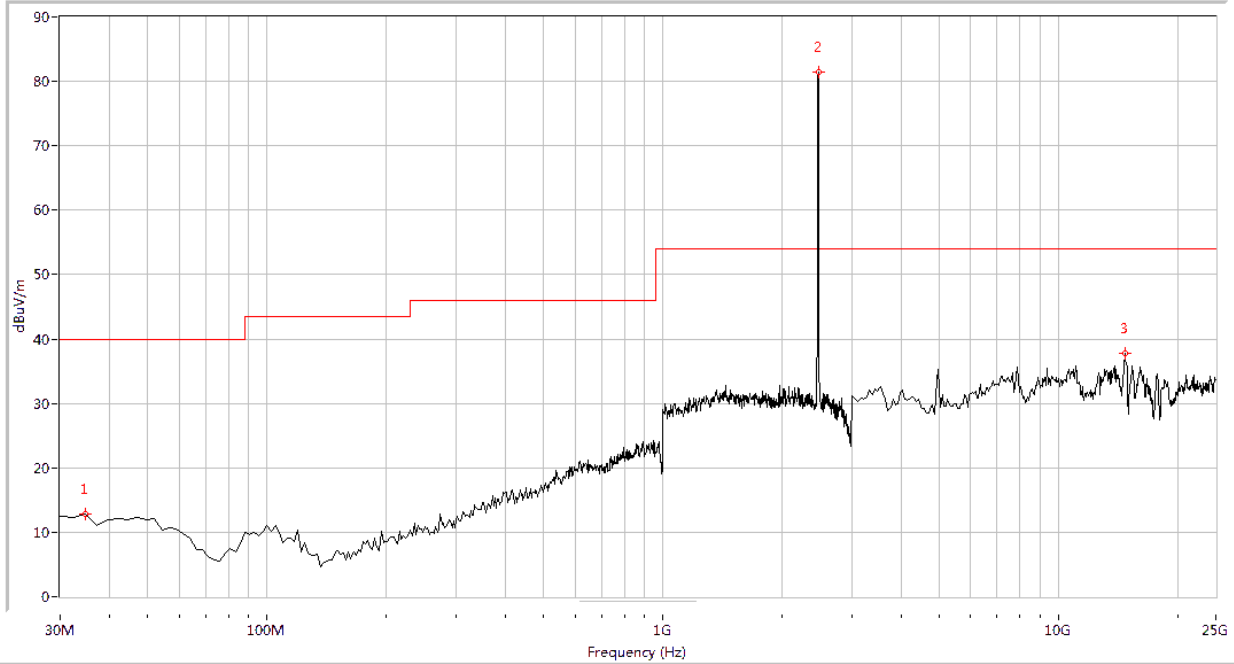

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
34.838	12.79	N.A	N.A	N.A	40.0	N.A	185.5	Vertical	PASS
2462.000	81.37	N.A	N.A	74.0	N.A	54.0	69.2	Vertical	N/A
14740.648	37.84	N.A	N.A	74.0	N.A	54.0	253.6	Vertical	PASS

(Plot F.3: Antenna Vertical, 30MHz to 25GHz)

2.7.3.3. 802.11n-20MHz Test mode

A. Test Verdict for Harmonics:

The Fundamental Emissions

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

Channel	Frequency (MHz)	Fundamental Emission (dBμV/m)		Antenna Polarization	Refer to Plot
		PK	AV		
1	2412	79.17	N/A	Horizontal	Plot G.2
		79.43	N/A	Vertical	Plot G.3
6	2437	79.49	N/A	Horizontal	Plot H.2
		79.41	N/A	Vertical	Plot H.3
11	2462	81.45	N/A	Horizontal	Plot I.2
		81.95	N/A	Vertical	Plot I.3


Also refer to following plots for the emissions falling in the restricted bands.

B. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 1




(Plot G.1: 9kHz to 30MHz)

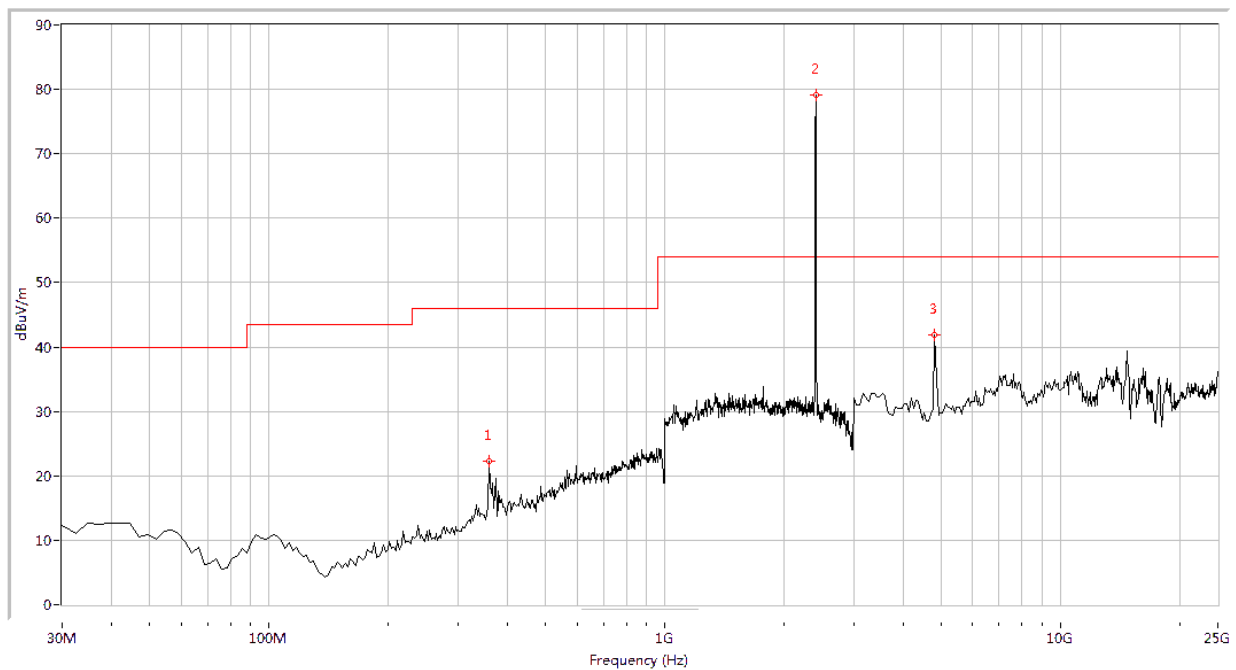

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
358.978	22.30	N.A	N.A	N.A	46.0	N.A	185.6	Horizontal	PASS
2412.000	79.17	N.A	N.A	74.0	N.A	54.0	98.1	Horizontal	N/A
4810.474	41.86	N.A	N.A	74.0	N.A	54.0	251.8	Horizontal	PASS


(Plot G.2: Antenna Horizontal, 30MHz to 25GHz)

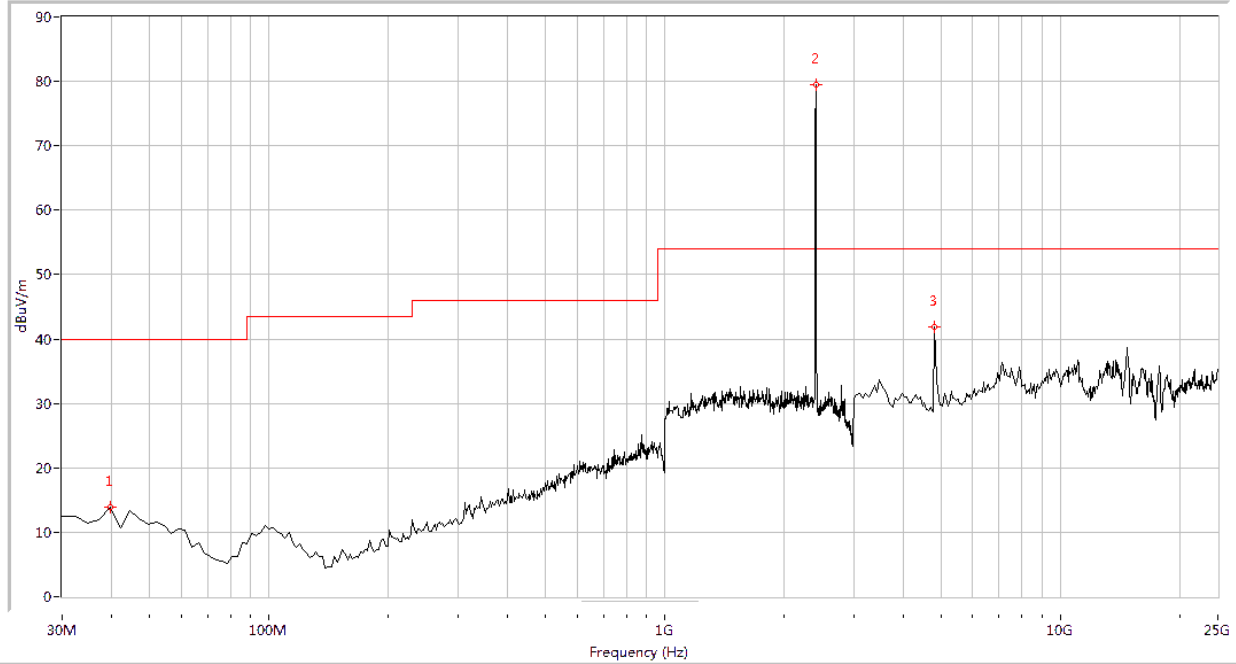


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
39.676	13.92	N.A	N.A	N.A	40.0	N.A	281.6	Vertical	PASS
2412.000	79.43	N.A	N.A	74.0	N.A	54.0	54.4	Vertical	N/A
4810.474	41.82	N.A	N.A	74.0	N.A	54.0	81.5	Vertical	PASS

(Plot G.3: Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 6

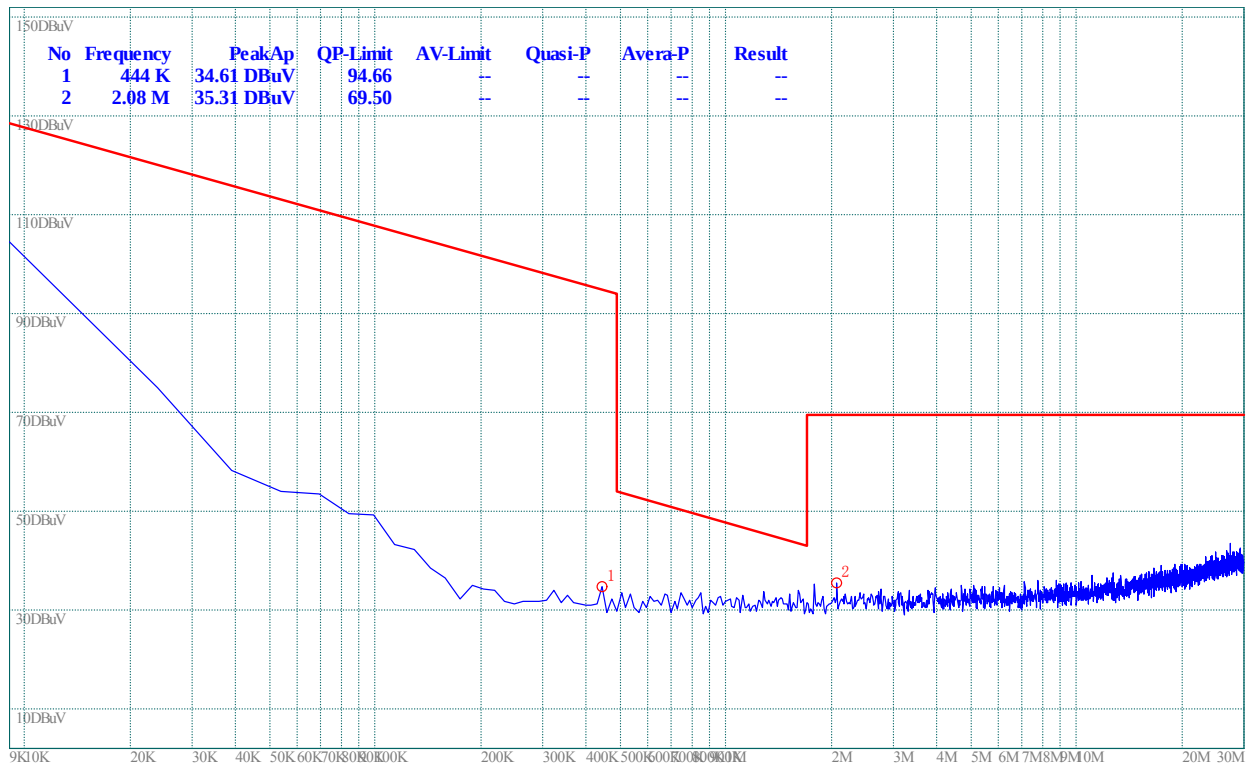


(Plot H.1: 9kHz to 30MHz)

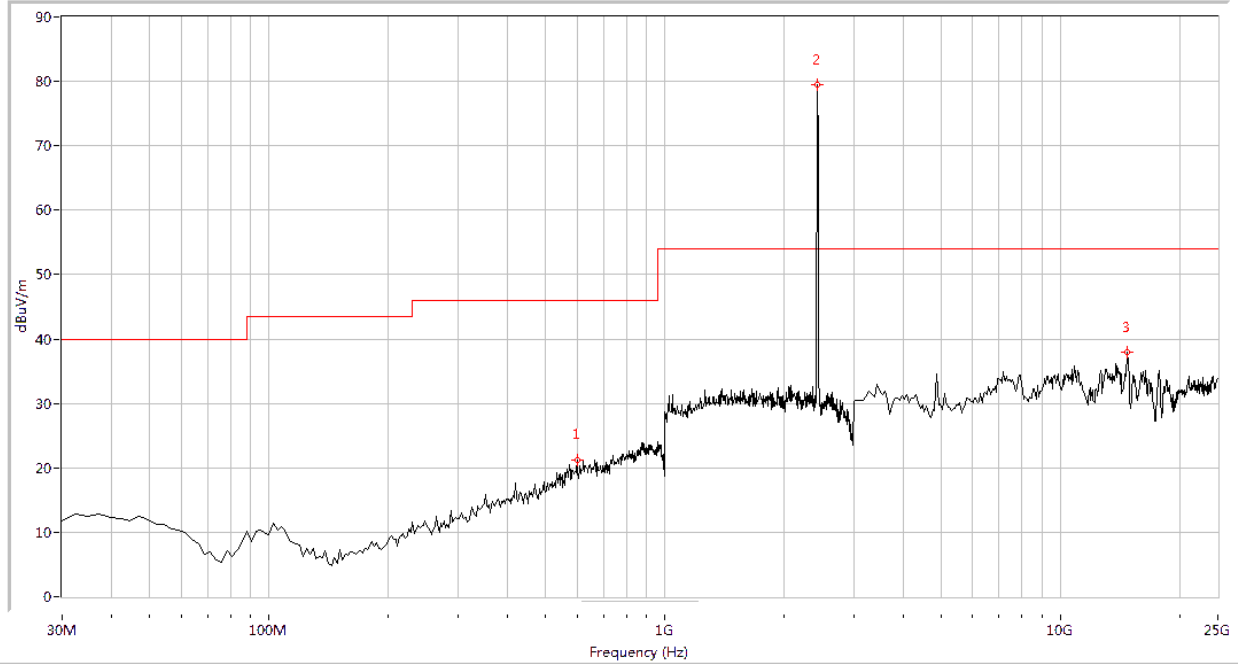

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
600.873	21.27	N.A	N.A	N.A	46.0	N.A	163.3	Horizontal	PASS
2437.000	79.49	N.A	N.A	74.0	N.A	54.0	114.6	Horizontal	N/A
14795.511	37.89	N.A	N.A	74.0	N.A	54.0	286.6	Horizontal	PASS


(Plot H.2: Antenna Horizontal, 30MHz to 25GHz)

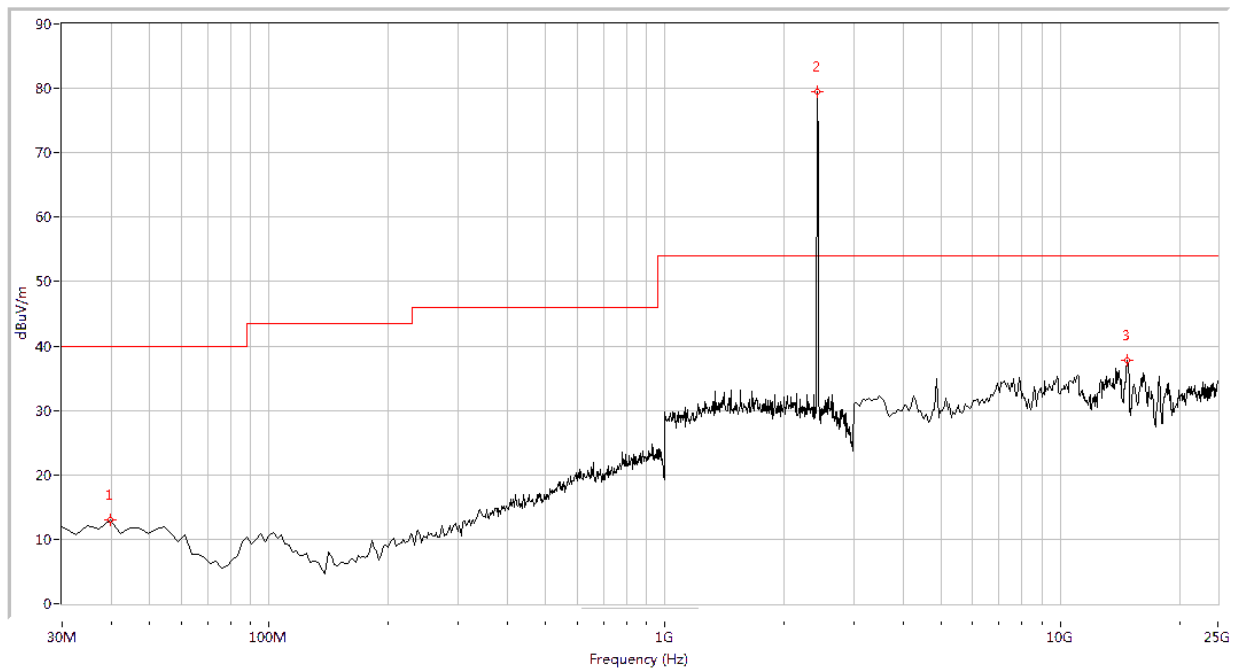


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
39.676	13.07	N.A	N.A	N.A	40.0	N.A	195.3	Vertical	PASS
2437.000	79.41	N.A	N.A	74.0	N.A	54.0	172.1	Vertical	N/A
14795.511	37.79	N.A	N.A	74.0	N.A	54.0	58.6	Vertical	PASS

(Plot H.3: Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 11

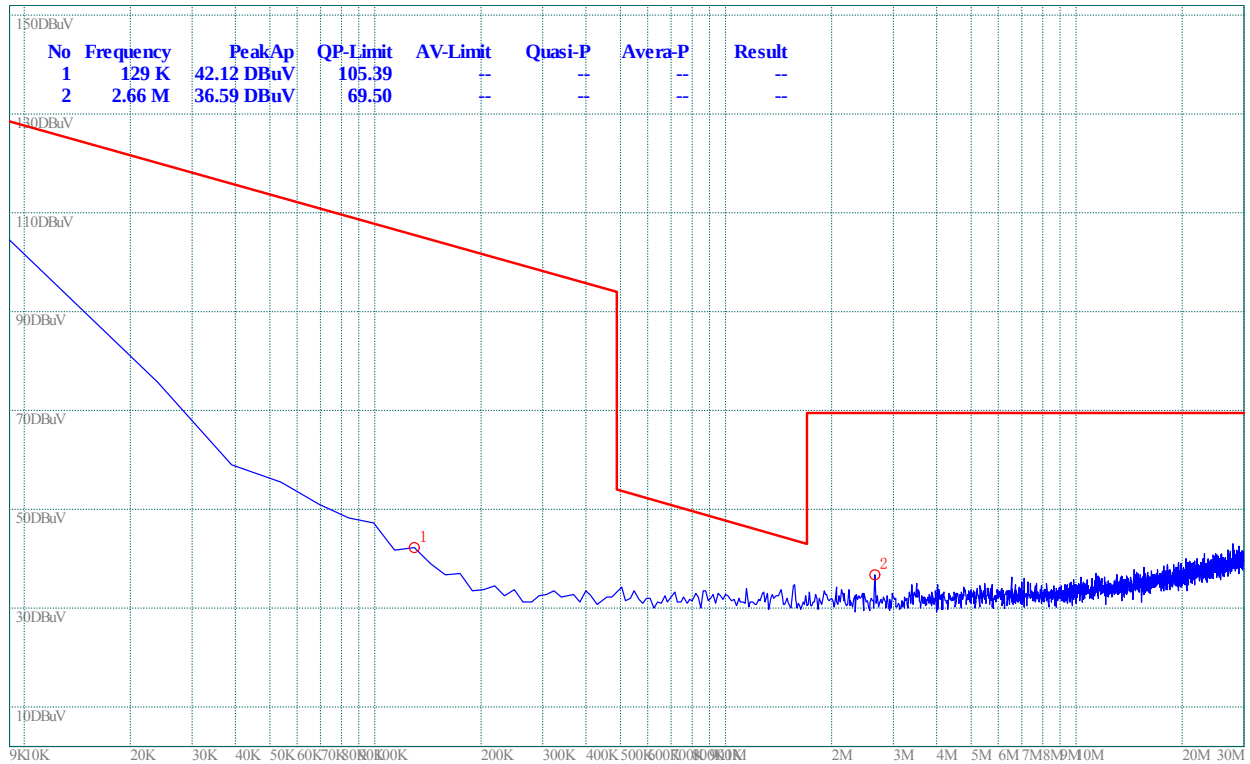


(Plot I.1: 9kHz to 30MHz)

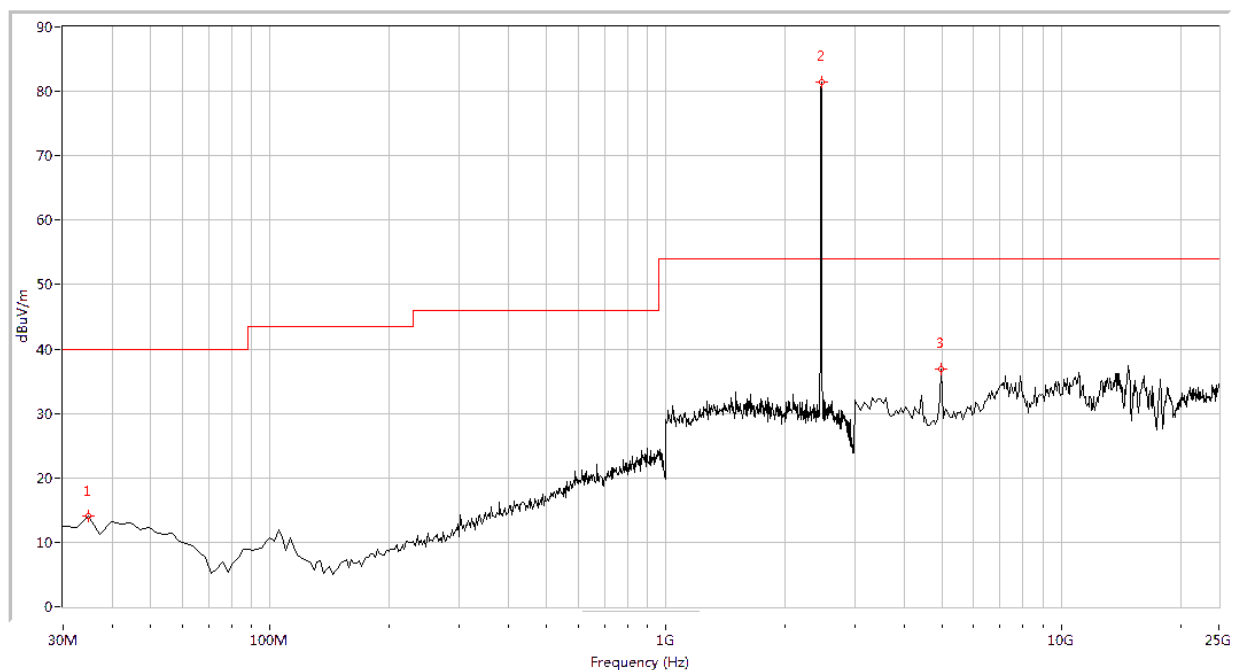

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
34.838	14.03	N.A	N.A	N.A	40.0	N.A	152.1	Horizontal	PASS
2462.000	81.45	N.A	N.A	74.0	N.A	54.0	251.9	Horizontal	N/A
4975.062	36.80	N.A	N.A	74.0	N.A	54.0	111.8	Horizontal	PASS

(Plot I.2: Antenna Horizontal, 30MHz to 25GHz)

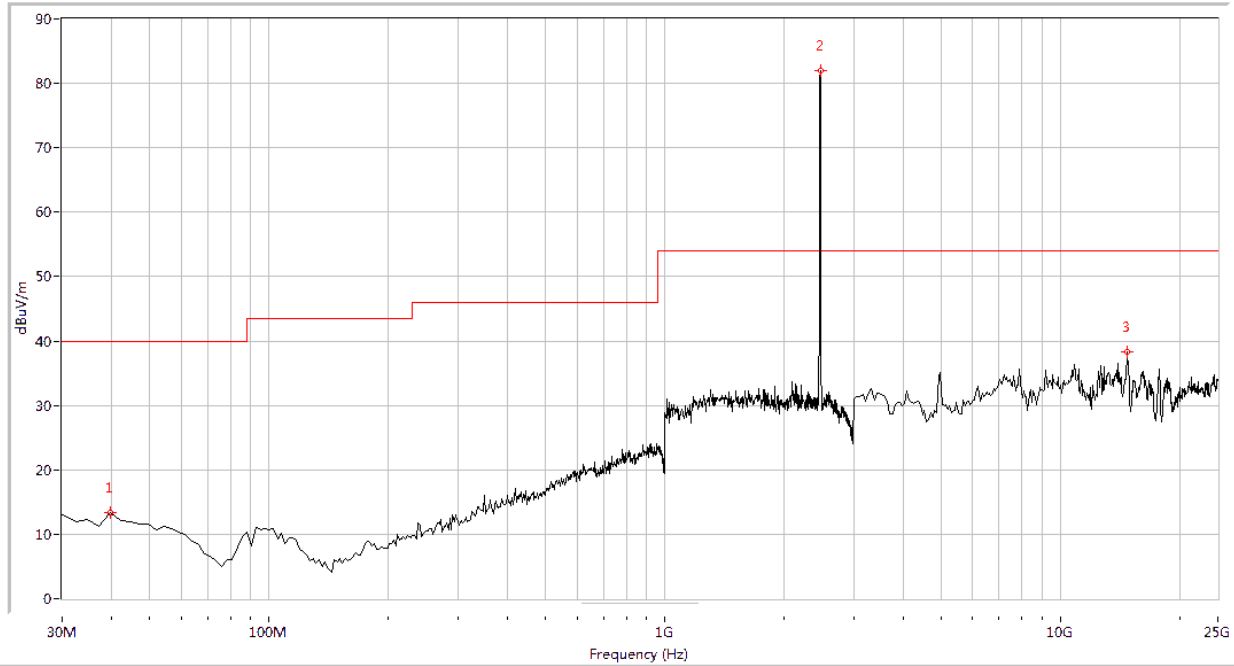

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Degree	Antenna	Verdict
39.676	13.40	N.A	N.A	N.A	40.0	N.A	312.6	Vertical	PASS
2462.000	81.95	N.A	N.A	74.0	N.A	54.0	49.3	Vertical	N/A
14795.511	38.34	N.A	N.A	74.0	N.A	54.0	63.2	Vertical	PASS

(Plot I.3: Antenna Vertical, 30MHz to 25GHz)

**** END OF REPORT ****