

FCC TEST REPORT (15.247)

REPORT NO.: RF941117L08

MODEL NO.: G610

(Refer to page 7 for more details)

RECEIVED: Nov. 17, 2005

TESTED: Nov. 29 ~ Dec. 02, 2005

ISSUED: Dec. 06, 2005

APPLICANT: ELITEGROUP COMPUTER SYSTEMS CO., LTD.

ADDRESS: 2F. No. 240, Sec. 1, Nei Hu Road, Taipei, Taiwan 114, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 98 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



Table of Contents

1.	CERTIFICATION.....	5
2.	SUMMARY OF TEST RESULTS.....	6
2.1	MEASUREMENT UNCERTAINTY.....	6
3.	GENERAL INFORMATION	7
3.1	GENERAL DESCRIPTION OF EUT.....	7
3.2	DESCRIPTION OF TEST MODES.....	8
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	9
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:.....	10
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	12
3.4	DESCRIPTION OF SUPPORT UNITS.....	12
4.	TEST TYPES AND RESULTS (802.11b & g 2412~2462MHz BAND).....	13
4.1	CONDUCTED EMISSION MEASUREMENT	13
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	13
4.1.2	TEST INSTRUMENTS	13
4.1.3	TEST PROCEDURES	14
4.1.4	DEVIATION FROM TEST STANDARD	14
4.1.5	TEST SETUP.....	15
4.1.6	EUT OPERATING CONDITIONS.....	15
4.1.7	TEST RESULTS	16
4.2	RADIATED EMISSION MEASUREMENT	22
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	22
4.2.2	TEST INSTRUMENTS	23
4.2.3	TEST PROCEDURES	24
4.2.4	DEVIATION FROM TEST STANDARD	24
4.2.5	TEST SETUP.....	25
4.2.6	EUT OPERATING CONDITIONS.....	25
4.2.7	TEST RESULTS	26
4.3	6dB BANDWIDTH MEASUREMENT	33
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	33
4.3.2	TEST INSTRUMENTS	33
4.3.3	TEST PROCEDURE.....	34
4.3.4	DEVIATION FROM TEST STANDARD	34
4.3.5	TEST SETUP.....	34
4.3.6	EUT OPERATING CONDITIONS.....	34
4.3.7	TEST RESULTS	35
4.4	MAXIMUM PEAK OUTPUT POWER	41
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	41
4.4.2	INSTRUMENTS.....	41

4.4.1	TEST PROCEDURES42
4.4.2	DEVIATION FROM TEST STANDARD42
4.4.3	TEST SETUP.....	.42
4.4.4	EUT OPERATING CONDITIONS.....	.42
4.4.3	TEST RESULTS43
4.5	POWER SPECTRAL DENSITY MEASUREMENT44
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	.44
4.5.2	TEST INSTRUMENTS44
4.5.3	TEST PROCEDURE.....	.45
4.5.4	DEVIATION FROM TEST STANDARD45
4.5.5	TEST SETUP.....	.45
4.5.6	EUT OPERATING CONDITION45
4.5.7	TEST RESULTS46
4.6	BAND EDGES MEASUREMENT.....	.52
4.6.1	LIMITS OF BAND EDGES MEASUREMENT.....	.52
4.6.2	TEST INSTRUMENTS52
4.6.3	TEST PROCEDURE.....	.52
4.6.4	DEVIATION FROM TEST STANDARD52
4.6.5	EUT OPERATING CONDITION52
4.6.6	TEST RESULTS53
4.7	ANTENNA REQUIREMENT.....	.61
4.7.1	STANDARD APPLICABLE.....	.61
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	.61
5.	TEST TYPES AND RESULTS (802.11a 5725~5850MHz BAND).....	.62
5.1	CONDUCTED EMISSION MEASUREMENT62
5.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT62
5.1.2	TEST INSTRUMENTS62
5.1.3	TEST PROCEDURES63
5.1.4	DEVIATION FROM TEST STANDARD63
5.1.5	TEST SETUP.....	.64
5.1.6	EUT OPERATING CONDITIONS.....	.64
5.1.7	TEST RESULTS65
5.2	RADIATED EMISSION MEASUREMENT67
5.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT67
5.2.2	TEST INSTRUMENTS68
5.2.3	TEST PROCEDURES69
5.2.4	DEVIATION FROM TEST STANDARD69
5.2.5	TEST SETUP.....	.70
5.2.6	EUT OPERATING CONDITIONS.....	.70
5.2.7	TEST RESULTS71
5.3	6dB BANDWIDTH MEASUREMENT76

5.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	76
5.3.2	TEST INSTRUMENTS	76
5.3.3	TEST PROCEDURE	77
5.3.4	DEVIATION FROM TEST STANDARD	77
5.3.5	TEST SETUP	77
5.3.6	EUT OPERATING CONDITIONS	77
5.3.7	TEST RESULTS	78
5.4	MAXIMUM PEAK OUTPUT POWER	81
5.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	81
5.4.2	INSTRUMENTS	81
5.4.3	TEST PROCEDURES	82
5.4.4	DEVIATION FROM TEST STANDARD	82
5.4.5	TEST SETUP	82
5.4.6	EUT OPERATING CONDITIONS	82
5.4.7	TEST RESULTS	83
5.5	POWER SPECTRAL DENSITY MEASUREMENT	84
5.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	84
5.5.2	TEST INSTRUMENTS	84
5.5.3	TEST PROCEDURE	85
5.5.4	DEVIATION FROM TEST STANDARD	85
5.5.5	TEST SETUP	85
5.5.6	EUT OPERATING CONDITION	85
5.5.7	TEST RESULTS	86
5.6	BAND EDGES MEASUREMENT	89
5.6.1	LIMITS OF BAND EDGES MEASUREMENT	89
5.6.2	TEST INSTRUMENTS	89
5.6.3	TEST PROCEDURE	89
5.6.4	DEVIATION FROM TEST STANDARD	89
5.6.5	EUT OPERATING CONDITION	90
5.6.6	TEST RESULTS	90
5.7	ANTENNA REQUIREMENT	94
5.7.1	STANDARD APPLICABLE	94
5.7.2	ANTENNA CONNECTED CONSTRUCTION	94
6.	PHOTOGRAPHS OF THE TEST CONFIGURATION	95
7.	INFORMATION ON THE TESTING LABORATORIES	97
APPENDIX-A		A-1

1. CERTIFICATION

PRODUCT: Notebook

MODEL NO.: G610

(Refer to page 7 for more details)

APPLICANT: ECS

BRAND NAME: ELITEGROUP COMPUTER SYSTEMS CO., LTD.

TEST SAMPLE: ENGINEERING SAMPLE

TESTED: Nov. 29 ~ Dec. 02, 2005

STANDARDS: FCC Part 15, Subpart C (Section 15.247),

ANSI C63.4-2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Rennie Wang, **DATE:** Dec. 06, 2005
Rennie Wang

**TECHNICAL
ACCEPTANCE :** Gary Chang, **DATE:** Dec. 06, 2005
Responsible for RF
Gary Chang

APPROVED BY : Cody Chang, **DATE:** Dec. 06, 2005
Cody Chang / Deputy Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C (Section 15.247)			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -2.76dB at 0.513MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit : min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -2.07dB at 2390.00MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.73 dB
	200MHz ~1000MHz	3.74 dB
	1GHz ~ 18GHz	2.20 dB
	18GHz ~ 40GHz	1.88 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Notebook
MODEL NO.	G610 (Refer to NOTE 1 as below)
POWER SUPPLY	19Vdc from AC adapter
MODULATION TYPE	CCK, QPSK, BPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b:11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11a: 54/48/36/24/18/12/9/6Mbps
FREQUENCY RANGE	802.11b & 802.11g: 2.412 ~ 2.462GHz 802.11a: 5.150 ~ 5.350GHz and 5.725 ~ 5.850GHz
NUMBER OF CHANNEL	802.11b & 802.11g: 11 802.11a: 13
CHANNEL SPACING	802.11b & 802.11g: 5MHz 802.11a: 20MHz
OUTPUT POWER	81.283mW for 802.11b 51.050mW for 802.11g 40.644mW for 5.150 ~ 5.350GHz 64.269mW for 5.725 ~ 5.850GHz
ANTENNA TYPE	PIFA antenna with -3.37dBi gain (for 2.4GHz) PIFA antenna with -4.39dBi gain (for 5.0GHz)
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ASSOCIATED DEVICES	NA

NOTE:

1. The models as below are identical to each other except for their model designation due to OEM model.

Model	Description
G610	Original model
G610V	OEM model
G610P	OEM model
G610G	OEM model

2. The EUT is powered by the following adapter.

Brand	LI SHIN INTERNATIONAL ENTERPRISE CORP.
Model	LSE0202C1990
Input Power	100-240Vac, 50-60Hz, 1.5A
Output Power	19Vdc, 4.74A
Power Cord	DC 1.6 m non-shielded cable with one core

3. The EUT operates in both the 5GHz and 2.4GHz Bands and compatibility with 802.11a and 802.11b, 802.11g technology.
 4. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
 5. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

For 802.11b/g: Eleven channels are provided to this EUT.


Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

Operated in 5725 ~ 5850MHz band:

For 802.11a: Five channels are provided to this EUT.

Channel	Frequency
1	5745 MHz
2	5765 MHz
3	5785 MHz
4	5805 MHz
5	5825 MHz

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

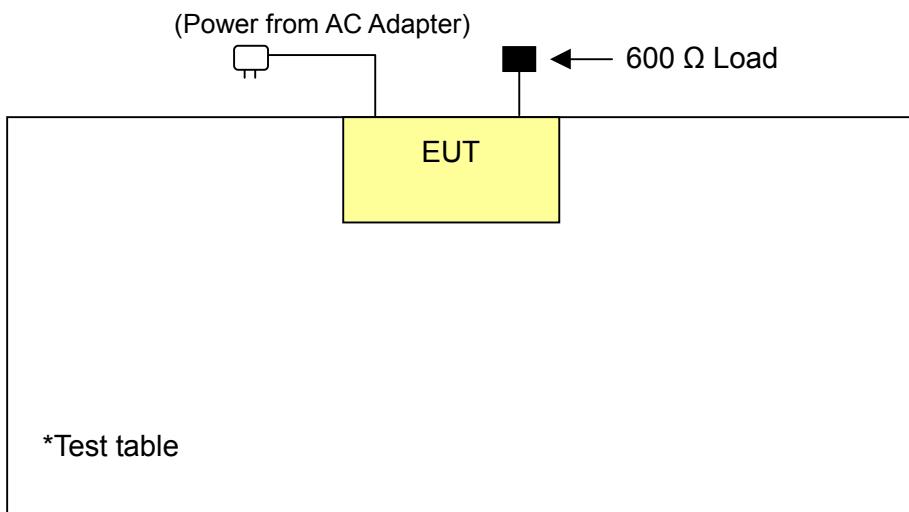

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
-	√	√	√	√	-

Where PLC: Power Line Conducted Emission
 RE<1G: Radiated Emission below 1GHz
 RE≥1G: Radiated Emission above 1GHz
 APCM: Antenna Port Conducted Measurement

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11a	1 to 5	3	OFDM	BPSK	6

Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11g	1 to 11	11	OFDM	BPSK	6
802.11a	1 to 5	3	OFDM	BPSK	6

Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11a	1 to 5	1, 3, 5	OFDM	BPSK	6

Bandedge Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 11	DSSS	CCK	11
802.11g	1 to 11	1, 11	OFDM	BPSK	6
802.11a	1 to 5	1, 5	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11a	1 to 5	1, 3, 5	OFDM	BPSK	6

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product, according to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)
ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	600 Ω LOAD	NA	NA	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA

NOTE: All power cords of the above support units are non shielded (1.8m).

4. TEST TYPES AND RESULTS (802.11b & g 2412~2462MHz Band)

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 11, 2006
RF signal cable Woken	5D-FB	Cable-HYC01-01	Jan. 09, 2006
LISN SCHWARZBECK	NNBL 8226-2	8226-142	May. 02, 2006
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Feb. 15, 2006
Software ADT	ADT_Cond_V3	NA	NA

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 1.
3. The VCCI Site Registration No. is C-2040.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

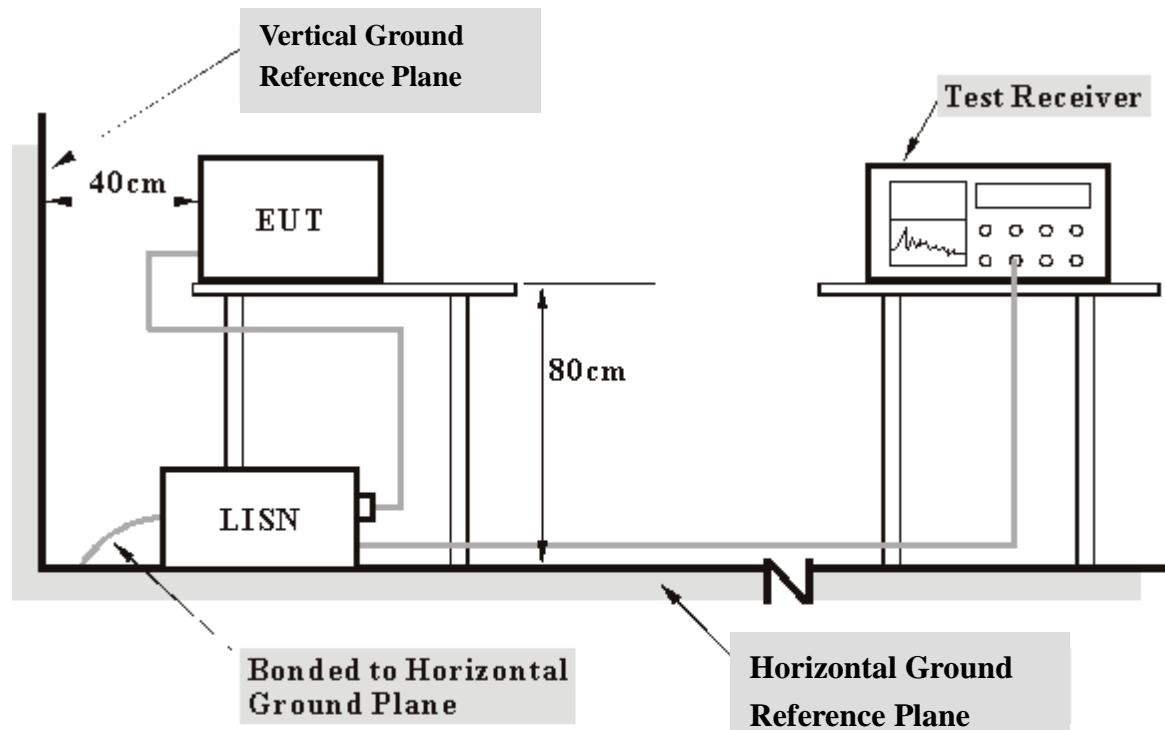

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on a testing table.
- b. The EUT ran a test program (provided by manufacturer) to enable all functions under transmission/receiving condition continuously at specific channel frequency.
- c. The notebook system sent "H" messages to its screen.
- d. Step c was repeated.

4.1.7 TEST RESULTS


Conducted Worst-Case Data

EUT	Notebook	MEASUREMENT DETAIL	
MODEL	G610	PHASE	Line 1
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jay Hsu		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
			Factor	[dB (uV)]	[dB (uV)]	[dB (uV)]	(dB)			
	[MHz]	(dB)		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.172	0.11	52.68	-	52.79	-	64.85	54.85	-12.06	-
2	0.322	0.11	54.34	40.21	54.45	40.32	59.66	49.66	-5.21	-9.34
3	0.388	0.11	54.61	41.04	54.72	41.15	58.10	48.10	-3.38	-6.95
4	0.578	0.15	53.17	39.98	53.32	40.13	56.00	46.00	-2.68	-5.87
5	0.859	0.21	49.61	39.49	49.82	39.70	56.00	46.00	-6.18	-6.30
6	1.479	0.25	46.62	38.27	46.87	38.52	56.00	46.00	-9.13	-7.48

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

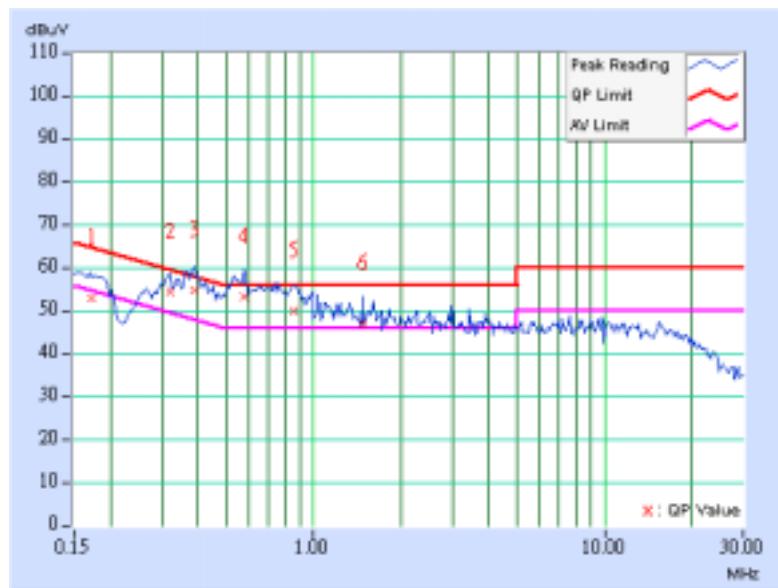


EUT	Notebook	MEASUREMENT DETAIL	
MODEL	G610	PHASE	Line 2
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jay Hsu		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.193	0.11	53.75	-	53.86	-	63.91	53.91	-10.05	-
2	0.322	0.11	55.34	40.72	55.45	40.83	59.66	49.66	-4.21	-8.83
3	0.396	0.11	52.48	40.46	52.59	40.57	57.93	47.93	-5.34	-7.36
4	0.588	0.15	53.29	40.28	53.44	40.43	56.00	46.00	-2.56	-5.57
5	0.880	0.21	50.82	42.17	51.03	42.38	56.00	46.00	-4.97	-3.62
6	1.621	0.25	45.74	-	45.99	-	56.00	46.00	-10.01	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

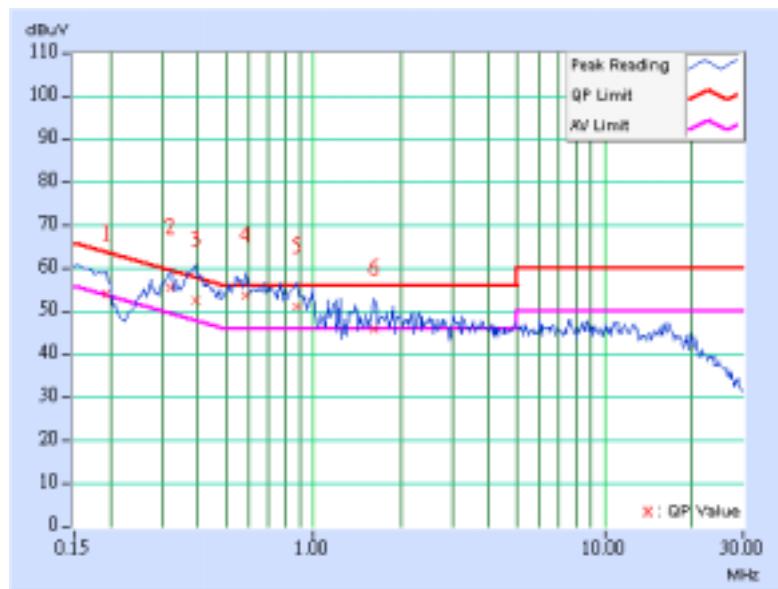


EUT	Notebook	MEASUREMENT DETAIL	
MODEL	G610	PHASE	Line 1
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jay Hsu		

No	Freq. Factor	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.171	0.11	52.48	-	52.59	-	64.90	54.90	-12.31	-
2	0.383	0.11	52.07	39.82	52.18	39.93	58.22	48.22	-6.04	-8.29
3	0.554	0.14	50.98	39.58	51.12	39.72	56.00	46.00	-4.88	-6.28
4	0.715	0.18	50.98	37.97	51.16	38.15	56.00	46.00	-4.84	-7.85
5	0.842	0.21	50.65	41.75	50.86	41.96	56.00	46.00	-5.14	-4.04
6	2.166	0.27	44.91	-	45.18	-	56.00	46.00	-10.82	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

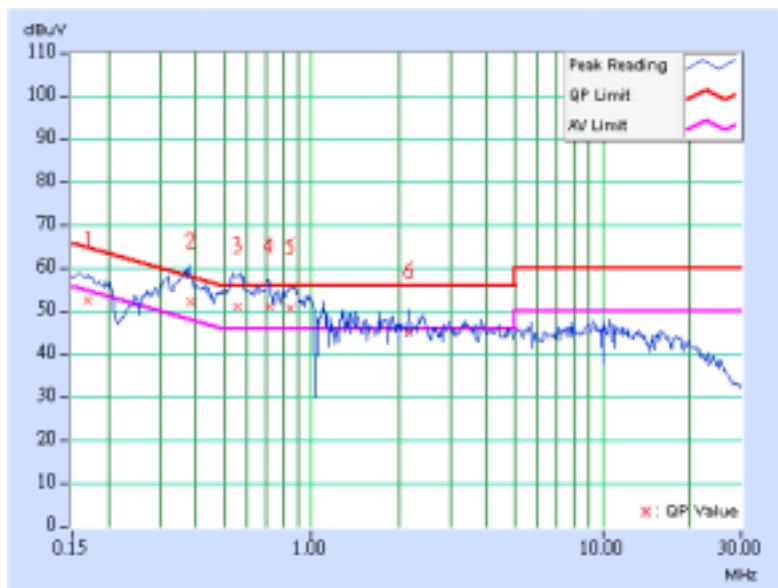


EUT	Notebook	MEASUREMENT DETAIL	
MODEL	G610	PHASE	Line 2
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jay Hsu		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.165	0.11	54.35	-	54.46	-	65.21	55.21	-10.76	-
2	0.318	0.11	54.79	39.48	54.90	39.59	59.77	49.77	-4.87	-10.18
3	0.375	0.11	53.85	39.82	53.96	39.93	58.39	48.39	-4.43	-8.46
4	0.565	0.15	51.79	39.04	51.94	39.19	56.00	46.00	-4.06	-6.81
5	0.853	0.21	50.57	41.51	50.78	41.72	56.00	46.00	-5.22	-4.28
6	1.340	0.25	47.01	38.24	47.26	38.49	56.00	46.00	-8.74	-7.51

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

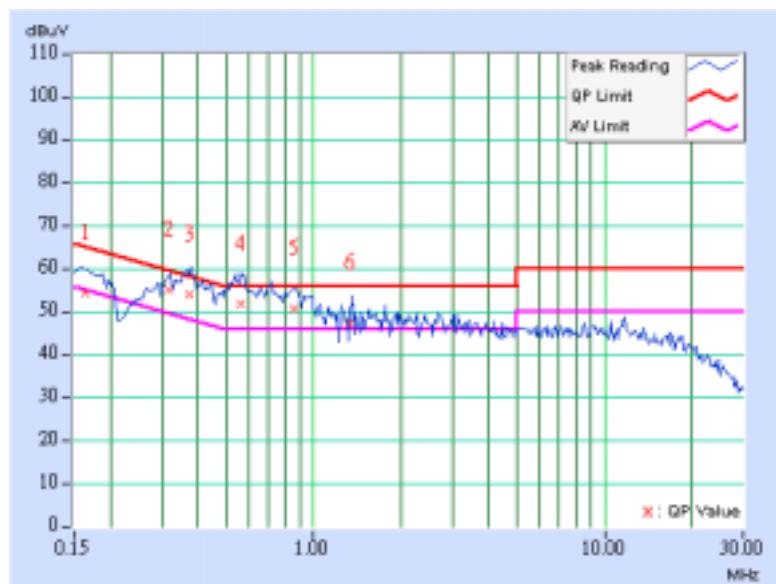


EUT	Notebook	MEASUREMENT DETAIL	
MODEL	G610	PHASE	Line 1
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jay Hsu		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.166	0.11	52.51	-	52.62	-	65.17	55.17	-12.55	-
2	0.322	0.11	50.43	38.44	50.54	38.55	59.65	49.65	-9.11	-11.10
3	0.361	0.11	53.06	40.19	53.17	40.30	58.71	48.71	-5.54	-8.41
4	0.527	0.14	51.90	39.90	52.04	40.04	56.00	46.00	-3.96	-5.96
5	0.709	0.18	50.98	37.03	51.16	37.21	56.00	46.00	-4.84	-8.79
6	0.848	0.21	50.87	41.78	51.08	41.99	56.00	46.00	-4.92	-4.01

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

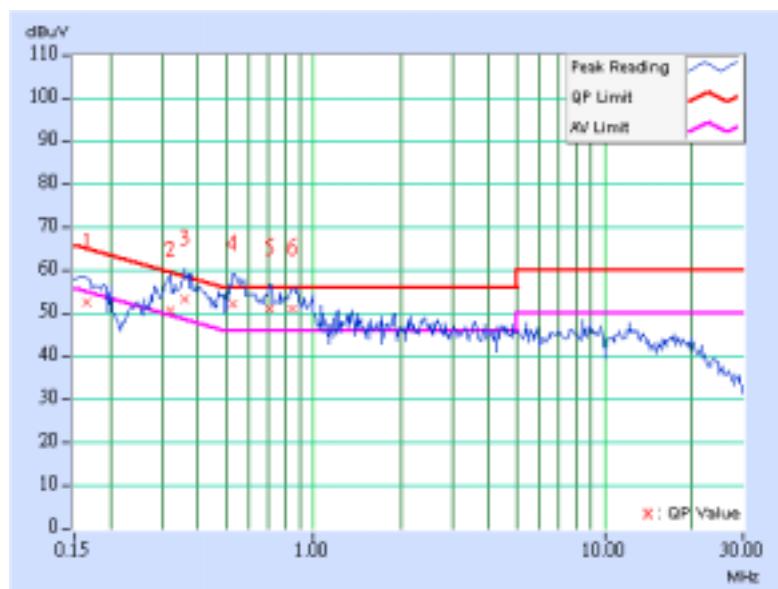


EUT	Notebook	MEASUREMENT DETAIL	
MODEL	G610	PHASE	Line 2
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jay Hsu		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.168	0.11	51.06	-	51.17	-	65.05	55.05	-13.88	-
2	0.373	0.11	47.34	-	47.45	-	58.44	48.44	-10.99	-
3	0.533	0.14	52.73	39.59	52.87	39.73	56.00	46.00	-3.13	-6.27
4	0.710	0.18	51.70	37.57	51.88	37.75	56.00	46.00	-4.12	-8.25
5	0.877	0.21	48.97	39.39	49.18	39.60	56.00	46.00	-6.82	-6.40
6	1.782	0.26	51.95	39.25	52.21	39.51	56.00	46.00	-3.79	-6.49

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

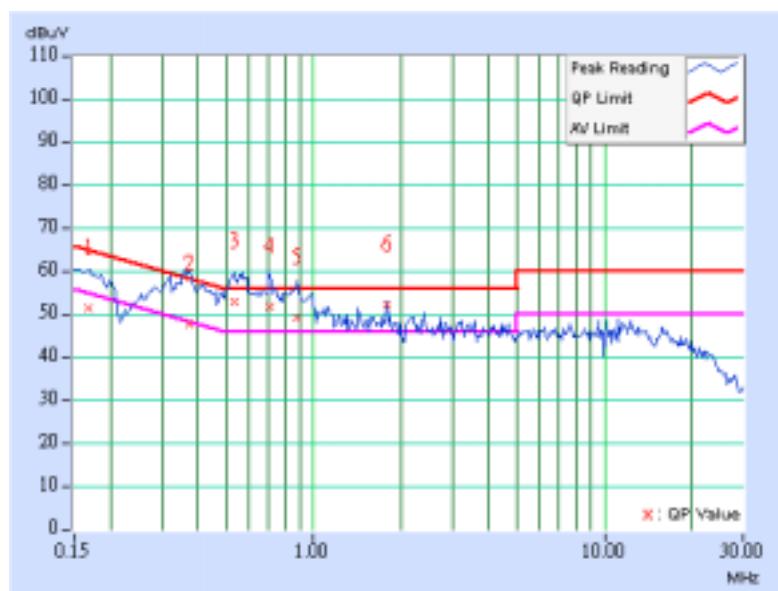

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_uV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESIB7	100188	Dec. 19, 2005
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Nov. 27, 2006
BILOG Antenna SCHWARZBECK	VULB9168	9168-157	Jan. 22, 2006
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-407	Jan. 16, 2006
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170241	Feb. 23, 2006
Preamplifier Agilent	8449B	3008A01961	Oct. 23, 2006
Preamplifier Agilent	8447D	2944A10629	Oct. 27, 2006
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218182/4	Feb. 17, 2006
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218194/4	Feb. 17, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower ADT.	AT100	AT93021702	NA
Turn Table ADT.	TT100.	TT93021702	NA
Controller ADT.	SC100.	SC93021702	NA
26GHz ~ 40GHz Amplifier	AMF-6F-2600400	923362	Mar. 13, 2006

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 1.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC4924-2.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

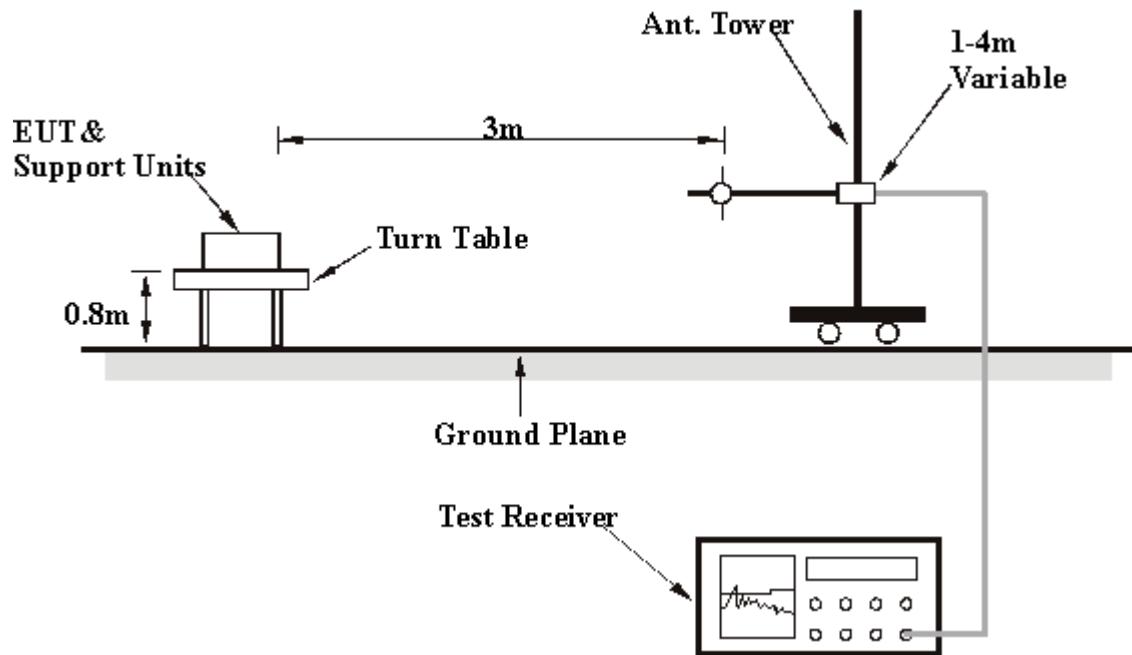

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

Below 1GHz Worst-Case Data

EUT		Notebook	MEASUREMENT DETAIL		
MODEL	G610		FREQUENCY RANGE		Below 1000MHz
CHANNEL	Channel 11		DETECTOR FUNCTION		Quasi-Peak
MODULATION TYPE	BPSK		ENVIRONMENTAL CONDITIONS		24deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps		INPUT POWER (SYSTEM)		120Vac, 60 Hz
TESTED BY	Jay Hsu				

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	183.57	30.17 QP	43.50	-13.33	2.00 H	235	18.15	12.02
2	249.66	35.51 QP	46.00	-10.49	2.00 H	235	22.91	12.61
3	274.93	34.29 QP	46.00	-11.71	2.00 H	76	19.75	14.54
4	638.44	33.12 QP	46.00	-12.88	2.00 H	76	9.96	23.16
5	663.71	36.68 QP	46.00	-9.32	2.00 H	100	13.27	23.41
6	797.84	40.86 QP	46.00	-5.14	2.00 H	76	14.60	26.26
7	817.27	32.22 QP	46.00	-13.78	1.00 H	109	5.79	26.44

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	432.38	32.67 QP	46.00	-13.33	1.00 V	61	13.97	18.70
2	502.36	32.79 QP	46.00	-13.21	1.00 V	238	12.46	20.33
3	527.64	38.67 QP	46.00	-7.33	1.00 V	199	17.90	20.77
4	564.57	32.80 QP	46.00	-13.20	1.00 V	61	11.14	21.67
5	638.44	36.18 QP	46.00	-9.82	1.00 V	25	13.03	23.16
6	663.71	40.45 QP	46.00	-5.55	1.00 V	61	17.05	23.41
7	712.30	35.44 QP	46.00	-10.56	1.00 V	52	11.07	24.37
8	737.58	33.92 QP	46.00	-12.08	1.50 V	10	8.52	25.40
9	797.84	43.41 QP	46.00	-2.59	1.00 V	25	17.15	26.26
10	933.91	32.06 QP	46.00	-13.94	1.50 V	28	4.42	27.63

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

802.11b DSSS modulation

EUT		Notebook	MEASUREMENT DETAIL			
MODEL		G610	FREQUENCY RANGE		1 ~ 25GHz	
CHANNEL		Channel 1	DETECTOR FUNCTION		Peak(PK) Average (AV)	
MODULATION TYPE		CCK	ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH, 991hPa	
TRANSFER RATE		11Mbps	INPUT POWER (SYSTEM)		120Vac, 60 Hz	
TESTED BY		Match Tsui				

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.12 PK	74.00	-15.88	1.24 H	289	26.08	32.04
1	2390.00	48.77 AV	54.00	-5.23	1.24 H	289	16.73	32.04
2	*2412.00	110.10 PK			1.24 H	285	77.97	32.13
2	*2412.00	102.26 AV			1.24 H	285	70.13	32.13
3	4824.00	47.14 PK	74.00	-26.86	1.26 H	11	8.94	38.20
3	4824.00	35.50 AV	54.00	-18.50	1.26 H	11	-2.70	38.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.67 PK	74.00	-17.33	1.76 V	257	24.63	32.04
1	2390.00	47.49 AV	54.00	-6.51	1.76 V	257	15.45	32.04
2	*2412.00	109.38 PK			1.74 V	263	77.25	32.13
2	*2412.00	101.80 AV			1.74 V	263	69.67	32.13
3	4824.00	47.56 PK	74.00	-26.44	1.07 V	355	9.36	38.20
3	4824.00	35.06 AV	54.00	-18.94	1.07 V	355	-3.14	38.20

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “*”: Fundamental frequency

EUT		Notebook	MEASUREMENT DETAIL		
MODEL	G610		FREQUENCY RANGE		1 ~ 25GHz
CHANNEL	Channel 6		DETECTOR FUNCTION		Peak(PK) Average (AV)
MODULATION TYPE	CCK		ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH, 991hPa
TRANSFER RATE	11Mbps		INPUT POWER (SYSTEM)		120Vac, 60 Hz
TESTED BY	Match Tsui				

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	110.33 PK			1.24 H	231	78.08	32.25
1	*2437.00	102.59 AV			1.24 H	231	70.34	32.25
2	4874.00	47.31 PK	74.00	-26.69	1.00 H	220	8.99	38.32
2	4874.00	35.66 AV	54.00	-18.34	1.00 H	220	-2.66	38.32

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	109.28 PK			1.30 V	204	77.03	32.25
1	*2437.00	101.59 AV			1.30 V	204	69.34	32.25
2	4874.00	46.85 PK	74.00	-27.15	1.03 V	240	8.53	38.32
2	4874.00	35.75 AV	54.00	-18.25	1.03 V	240	-2.57	38.32

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “*”: Fundamental frequency

EUT		Notebook	MEASUREMENT DETAIL			
MODEL	G610		FREQUENCY RANGE		1 ~ 25GHz	
CHANNEL	Channel 11		DETECTOR FUNCTION		Peak(PK) Average (AV)	
MODULATION TYPE	CCK		ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH, 991hPa	
TRANSFER RATE	11Mbps		INPUT POWER (SYSTEM)		120Vac, 60 Hz	
TESTED BY	Match Tsui					

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.60 PK			1.22 H	231	78.24	32.36
1	*2462.00	102.13 AV			1.22 H	231	69.77	32.36
2	2483.50	57.91 PK	74.00	-16.09	1.20 H	231	25.45	32.46
2	2483.50	49.48 AV	54.00	-4.52	1.20 H	231	17.02	32.46
3	4924.00	47.66 PK	74.00	-26.34	1.03 H	240	9.20	38.46
3	4924.00	36.28 AV	54.00	-17.72	1.03 H	240	-2.18	38.46

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.01 PK			1.21 V	257	76.65	32.36
1	*2462.00	102.53 AV			1.21 V	257	70.17	32.36
2	2483.50	56.37 PK	74.00	-17.63	1.20 V	244	23.91	32.46
2	2483.50	48.22 AV	54.00	-5.78	1.20 V	244	15.76	32.46
3	4924.00	47.49 PK	74.00	-26.51	1.03 V	240	9.03	38.46
3	4924.00	36.03 AV	54.00	-17.97	1.03 V	240	-2.43	38.46

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “*”: Fundamental frequency

802.11g OFDM modulation

EUT		Notebook	MEASUREMENT DETAIL		
MODEL		G610	FREQUENCY RANGE		1 ~ 25GHz
CHANNEL		Channel 1	DETECTOR FUNCTION		Peak(PK) Average (AV)
MODULATION TYPE		BPSK	ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH, 991hPa
TRANSFER RATE		6Mbps	INPUT POWER (SYSTEM)		120Vac, 60 Hz
TESTED BY		Match Tsui			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.97 PK	74.00	-7.03	1.24 H	288	34.93	32.04
1	2390.00	50.67 AV	54.00	-3.33	1.00 H	100	18.63	32.04
2	*2412.00	104.03 PK			1.22 H	283	71.90	32.13
2	*2412.00	95.03 AV			1.22 H	283	62.90	32.13
3	4824.00	47.78 PK	74.00	-26.22	1.24 H	1	9.58	38.20
3	4824.00	35.57 AV	54.00	-18.43	1.24 H	1	-2.63	38.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.21 PK	74.00	-6.79	1.28 V	261	35.17	32.04
1	2390.00	50.62 AV	54.00	-3.38	1.28 V	261	18.58	32.04
2	*2412.00	103.41 PK			1.27 V	250	71.28	32.13
2	*2412.00	94.28 AV			1.27 V	250	62.15	32.13
3	4824.00	47.59 PK	74.00	-26.41	1.24 V	272	9.39	38.20
3	4824.00	34.93 AV	54.00	-19.07	1.24 V	272	-3.27	38.20

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “*”: Fundamental frequency

EUT		Notebook	MEASUREMENT DETAIL			
MODEL	G610	FREQUENCY RANGE				1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION				Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS				25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)				120Vac, 60 Hz
TESTED BY	Match Tsui					

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	104.63 PK			1.21 H	228	72.38	32.25
1	*2437.00	96.18 AV			1.21 H	228	63.93	32.25
2	4874.00	56.68 PK	74.00	-17.32	1.00 H	210	18.36	38.32
2	4874.00	43.72 AV	54.00	-10.28	1.00 H	210	5.40	38.32

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	103.07 PK			1.66 V	276	70.82	32.25
1	*2437.00	93.55 AV			1.66 V	276	61.30	32.25
2	4874.00	48.13 PK	74.00	-25.87	1.55 V	273	9.81	38.32
2	4874.00	36.01 AV	54.00	-17.99	1.55 V	273	-2.31	38.32

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “*”: Fundamental frequency

EUT		Notebook	MEASUREMENT DETAIL		
MODEL		G610	FREQUENCY RANGE		1 ~ 25GHz
CHANNEL		Channel 11	DETECTOR FUNCTION		Peak(PK) Average (AV)
MODULATION TYPE		BPSK	ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH, 991hPa
TRANSFER RATE		6Mbps	INPUT POWER (SYSTEM)		120Vac, 60 Hz
TESTED BY		Match Tsui			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	104.08 PK			1.22 H	289	71.72	32.36
1	*2462.00	94.54 AV			1.22 H	289	62.18	32.36
2	2483.50	59.47 PK	74.00	-14.53	1.17 H	284	27.01	32.46
2	2483.50	49.04 AV	54.00	-4.96	1.17 H	284	16.58	32.46
3	4924.00	48.46 PK	74.00	-25.54	1.02 H	241	10.00	38.46
3	4924.00	35.36 AV	54.00	-18.64	1.02 H	241	-3.10	38.46

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	103.15 PK			1.26 V	260	70.79	32.36
1	*2462.00	94.16 AV			1.26 V	260	61.80	32.36
2	2483.50	62.02 PK	74.00	-11.98	1.22 V	247	29.56	32.46
2	2483.50	48.19 AV	54.00	-5.81	1.22 V	247	15.73	32.46
3	4924.00	48.64 PK	74.00	-25.36	1.00 V	247	10.18	38.46
3	4924.00	35.35 AV	54.00	-18.65	1.00 V	247	-3.11	38.46

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “*”: Fundamental frequency

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK 30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

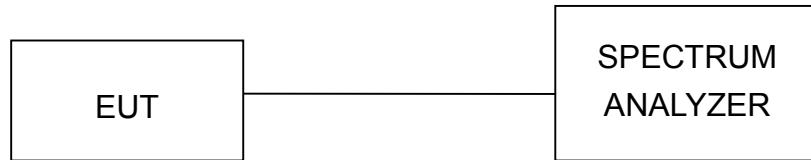

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

FCC ID: SA6GG610IABG



4.3.7 TEST RESULTS

802.11b DSSS modulation


EUT	Notebook	MODEL	G610
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	8.88	0.5	PASS
6	2437	8.20	0.5	PASS
11	2462	8.32	0.5	PASS


FCC ID: SA6GG610IABG




CH 1

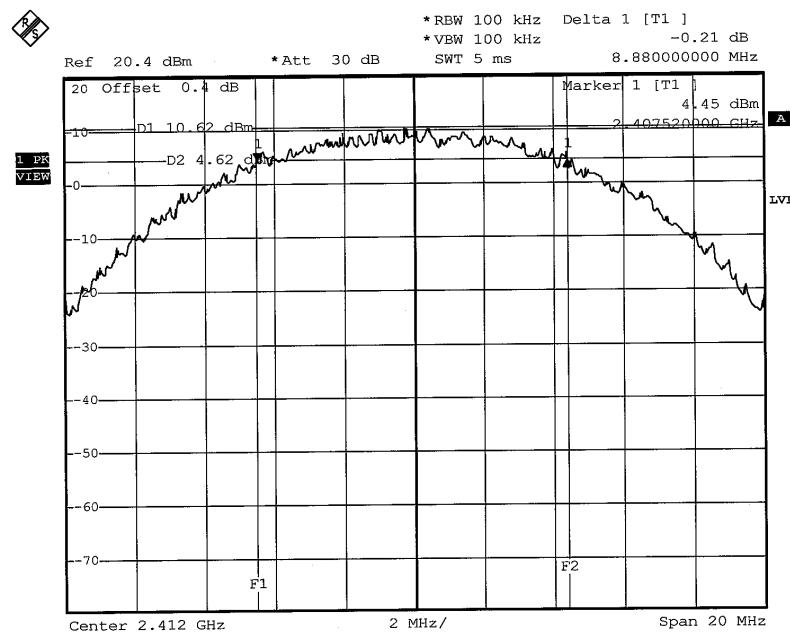

CH 6

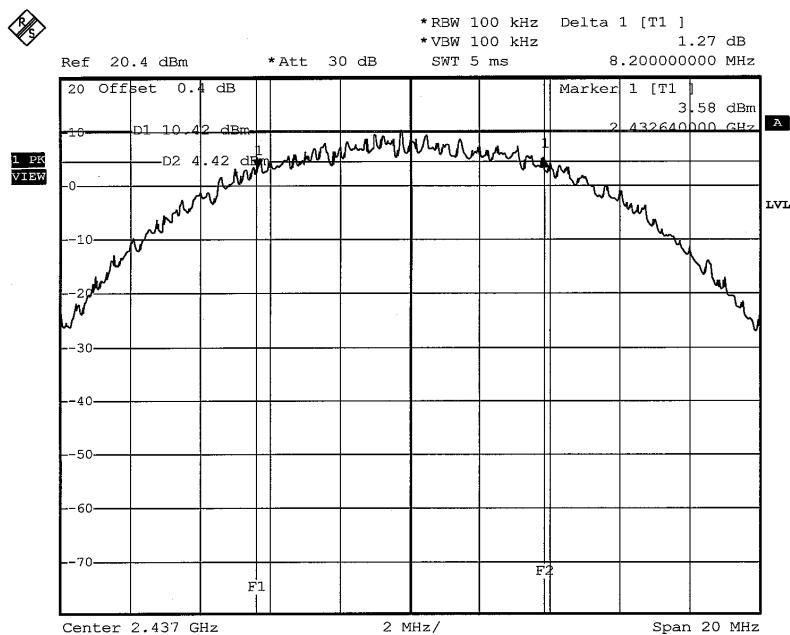

CH 11

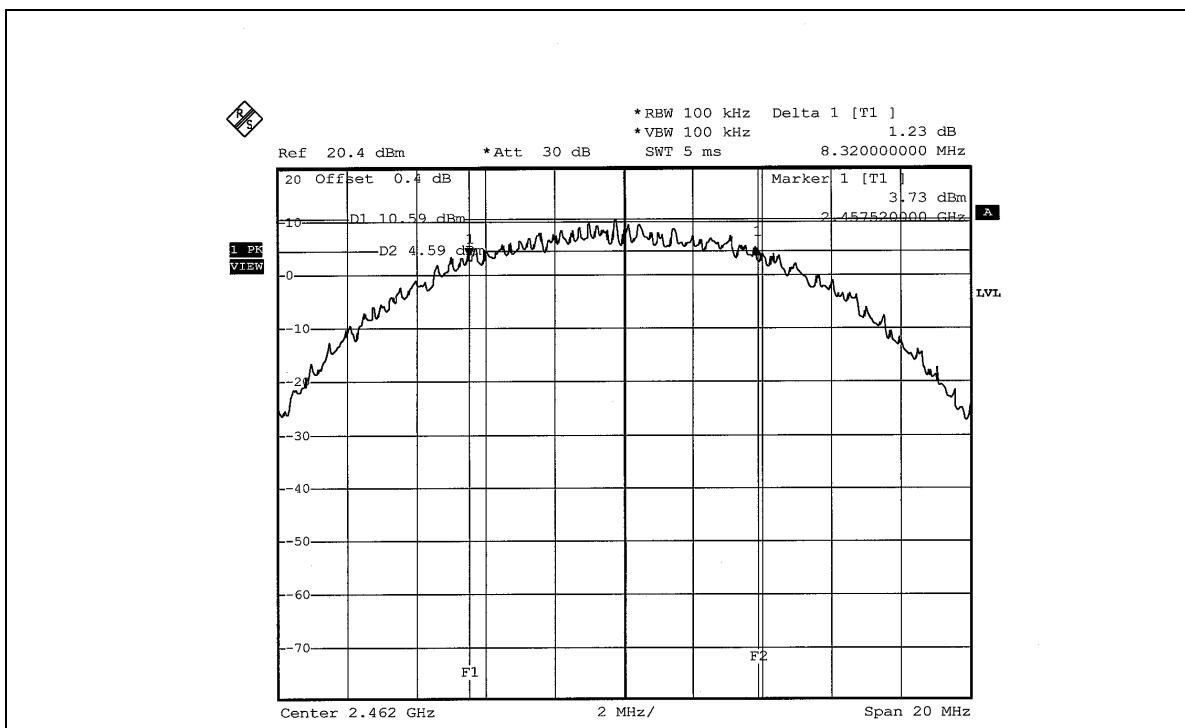

FCC ID: SA6GG610IABG



802.11g OFDM modulation


EUT	Notebook	MODEL	G610
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.52	0.5	PASS
6	2437	16.48	0.5	PASS
11	2462	16.52	0.5	PASS


FCC ID: SA6GG610IABG




CH 1

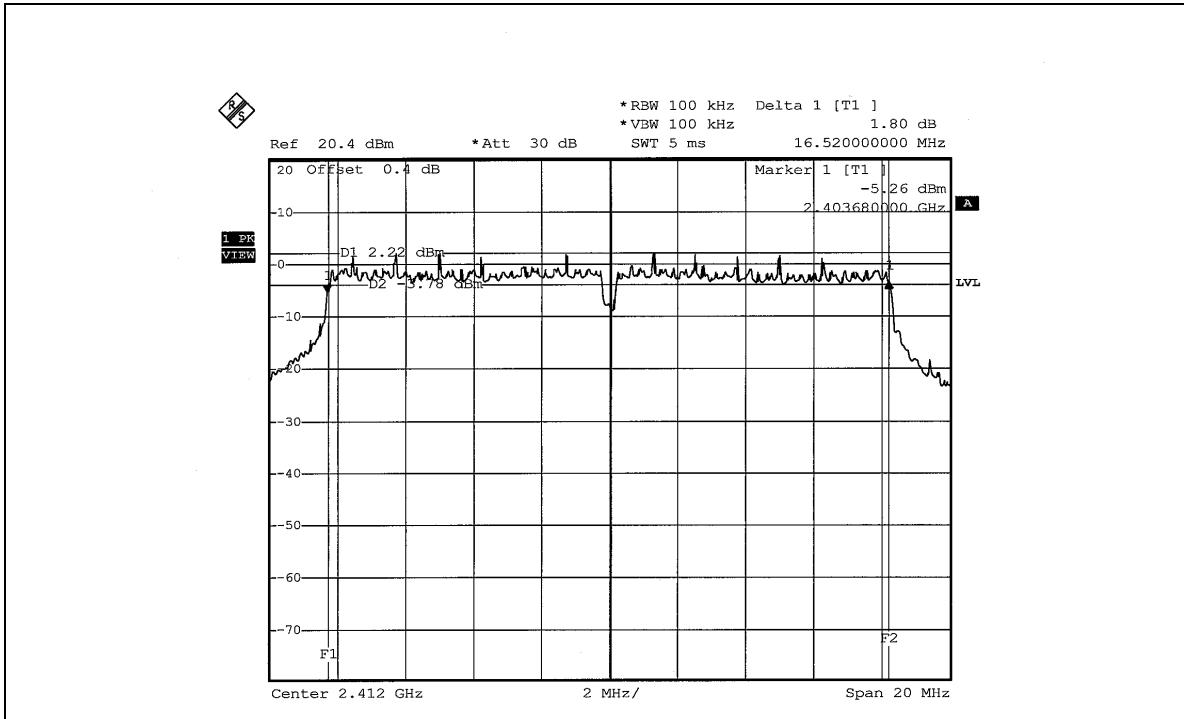

CH 6

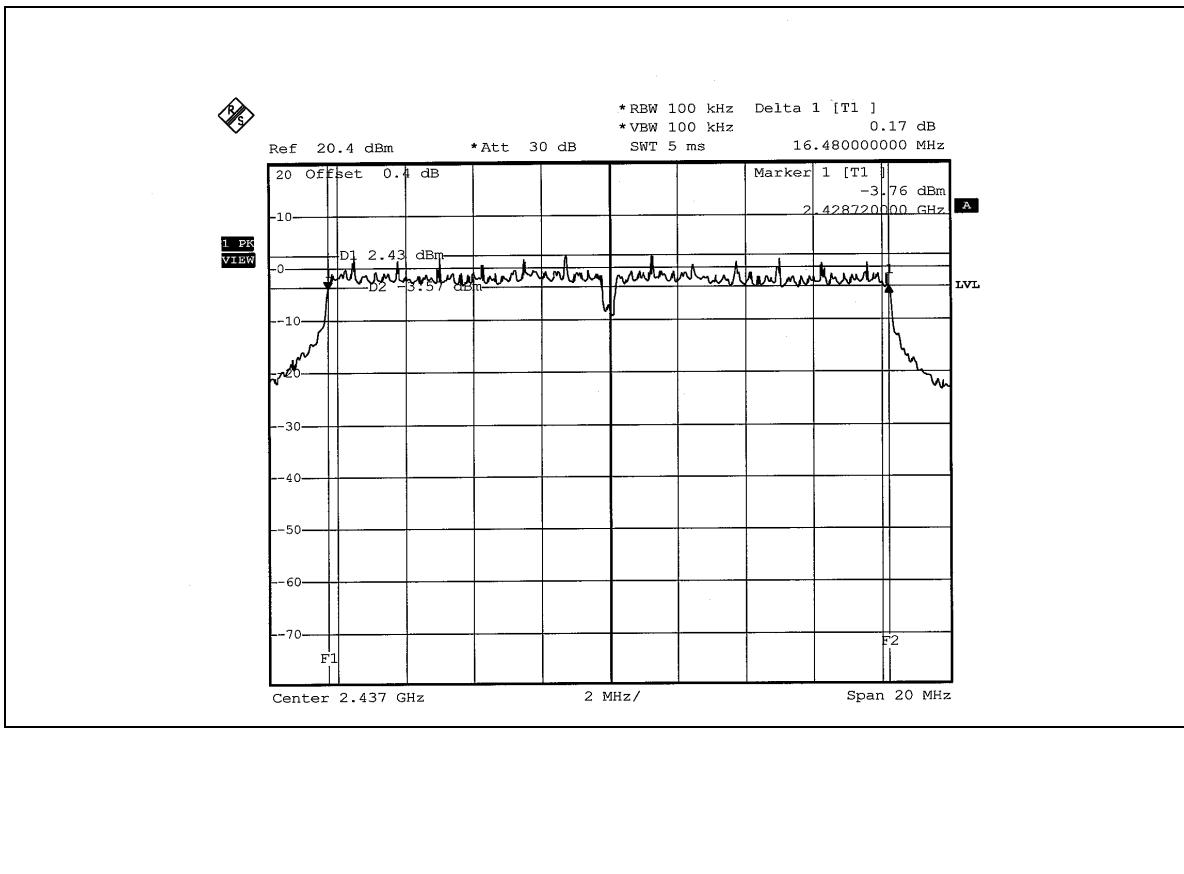

CH 11

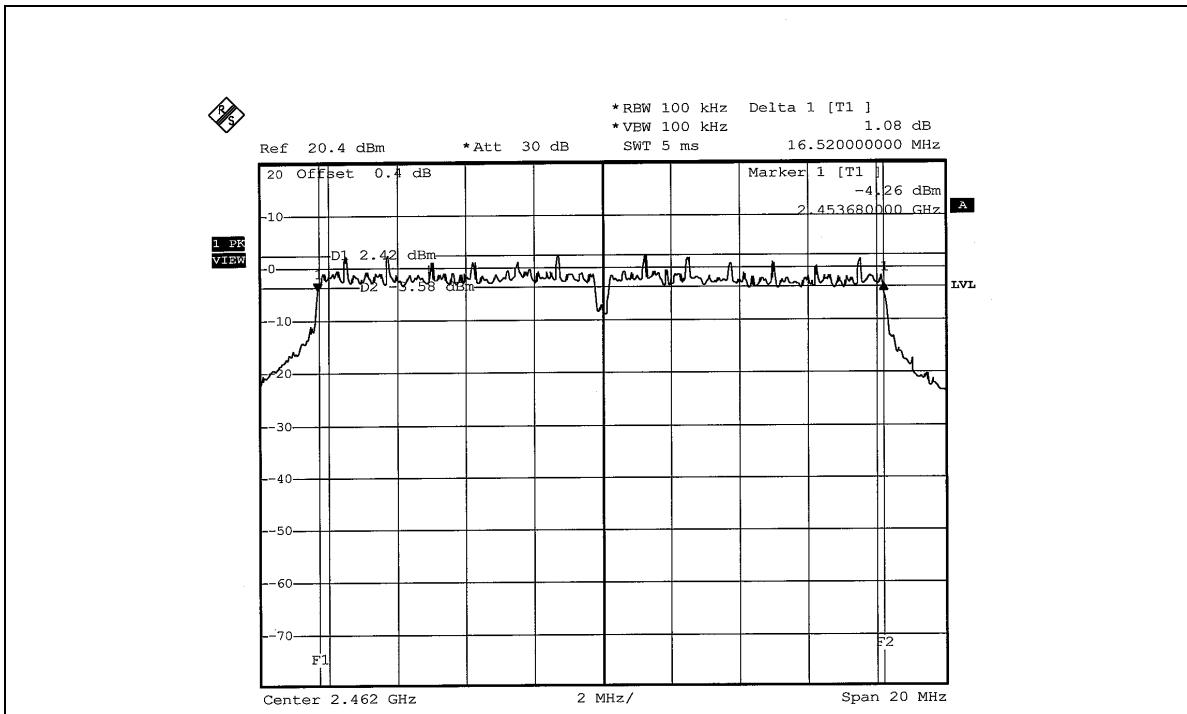

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 31, 2005
TEKTRONIX OSCILLOSCOPE	TDS 1012	C019167	Feb. 01, 2006
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.1 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.4.2 DEVIATION FROM TEST STANDARD

No deviation

4.4.3 TEST SETUP



4.4.4 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.3 TEST RESULTS

802.11b DSSS modulation

EUT	Notebook	MODEL	G610
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	81.283	19.10	30	PASS
6	2437	79.799	19.02	30	PASS
11	2462	80.538	19.06	30	PASS

802.11g OFDM modulation

EUT	Notebook	MODEL	G610
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	50.119	17.00	30	PASS
6	2437	51.050	17.08	30	PASS
11	2462	50.466	17.03	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6

FCC ID: SA6GG610IABG




4.5.7 TEST RESULTS

802.11b DSSS modulation


EUT	Notebook	MODEL	G610
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-4.79	8	PASS
6	2437	-4.22	8	PASS
11	2462	-4.26	8	PASS


CH 1

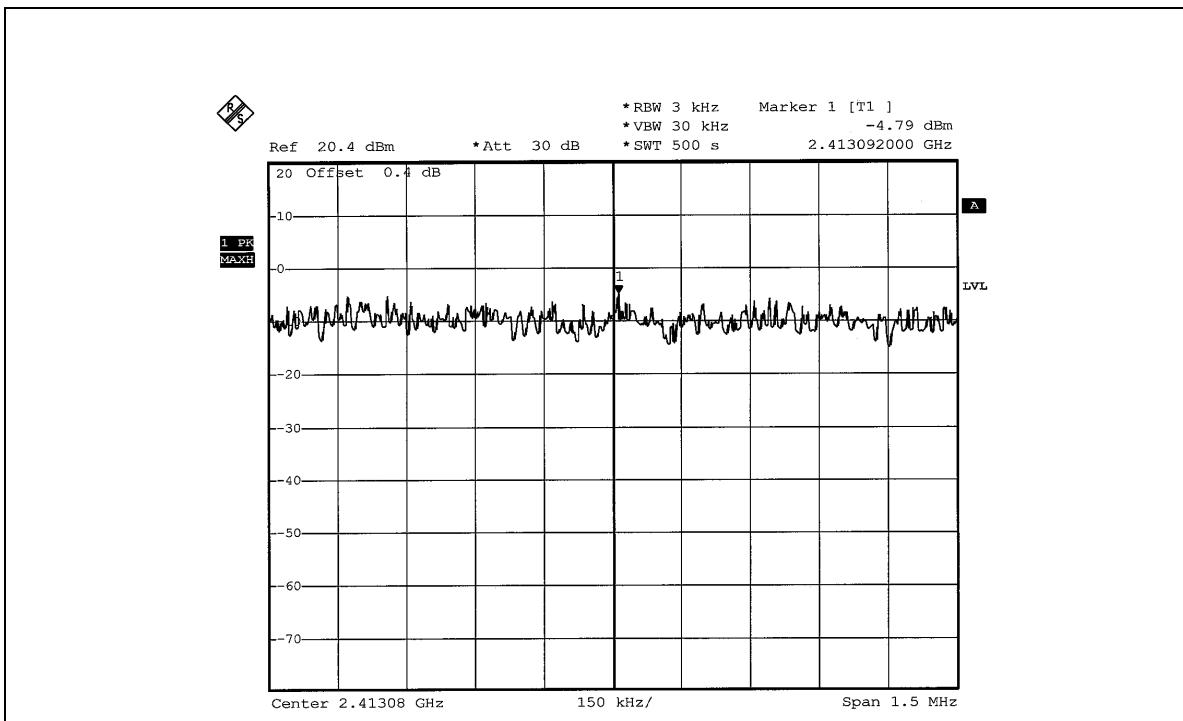

CH 6

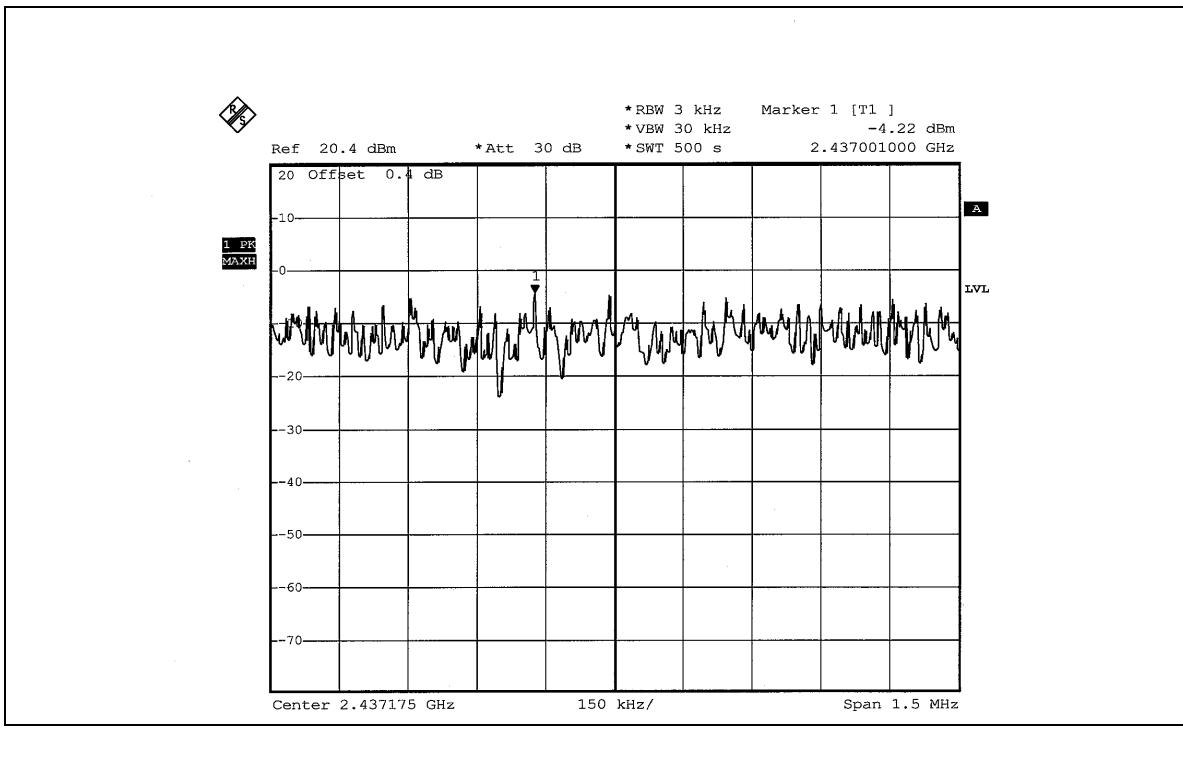

CH 11

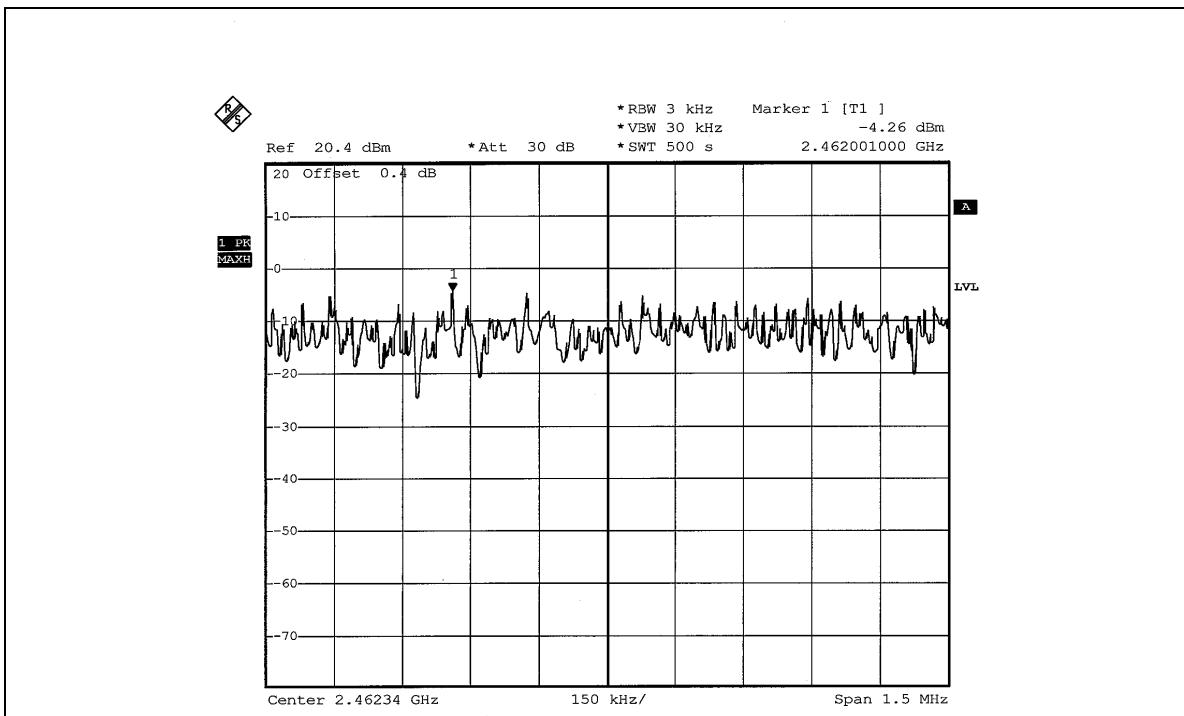

FCC ID: SA6GG610IABG




802.11g OFDM modulation


EUT	Notebook	MODEL	G610
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-13.72	8	PASS
6	2437	-13.30	8	PASS
11	2462	-13.33	8	PASS


CH 1

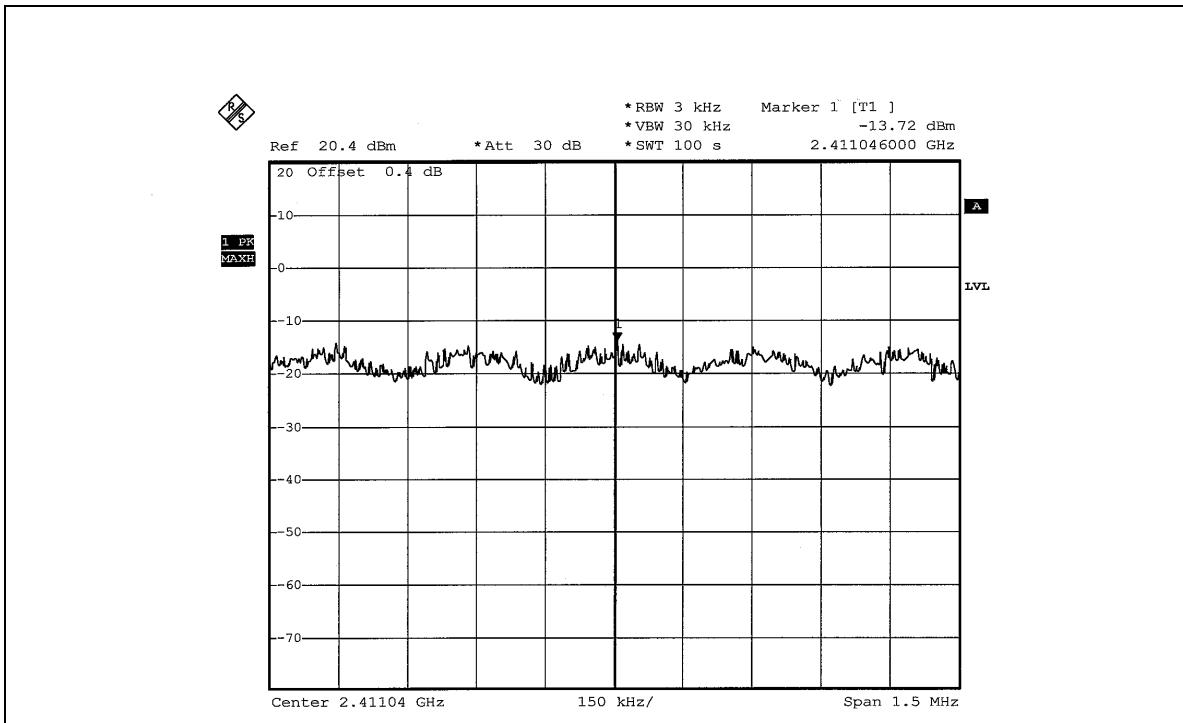

CH 6

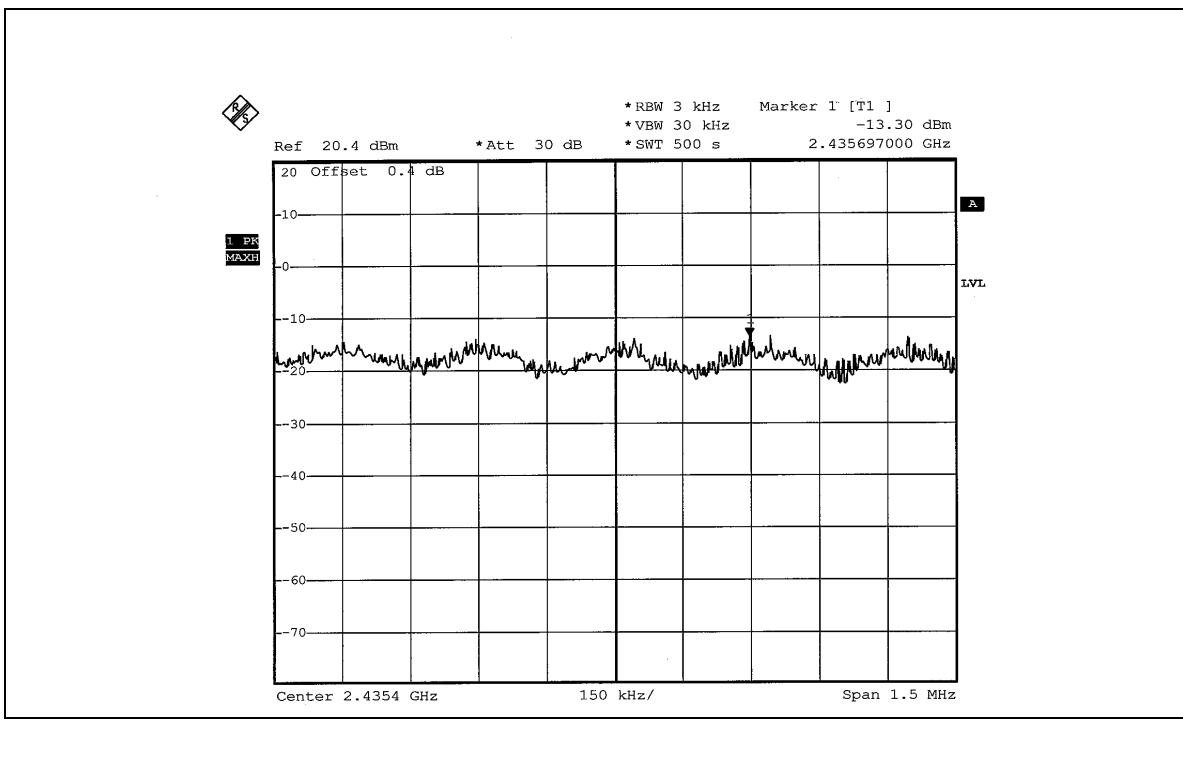

CH 11

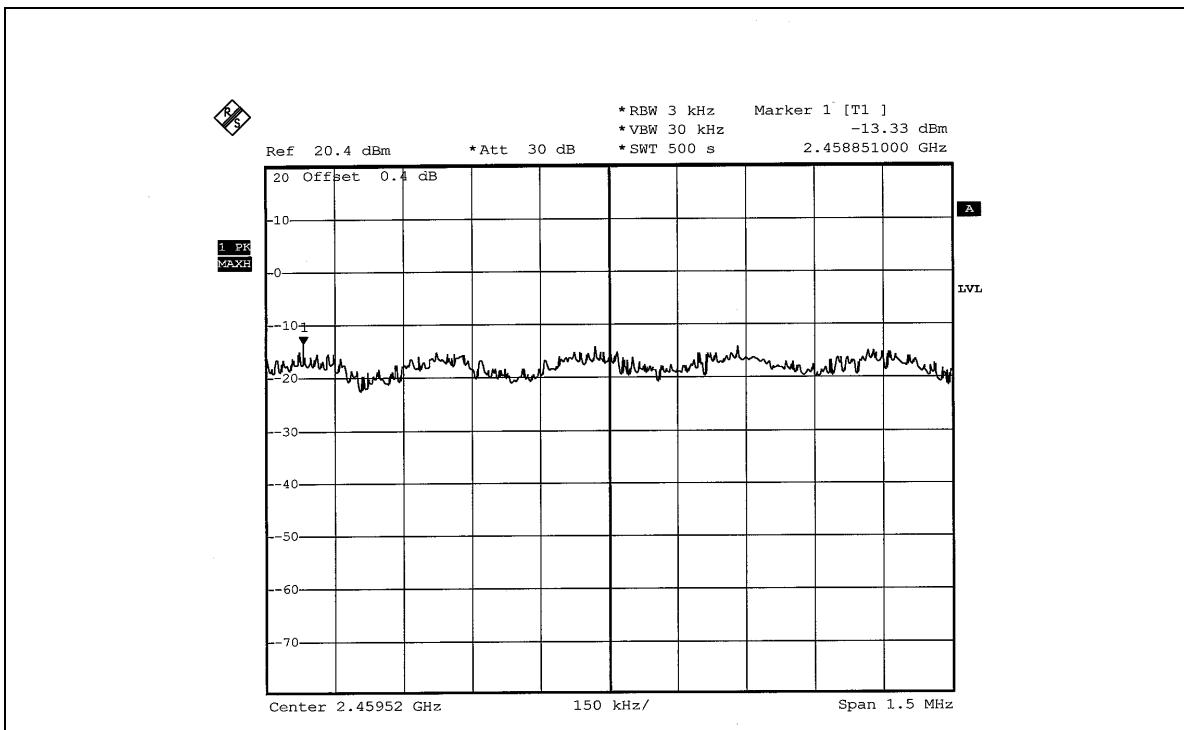

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW=VBW=100kHz ; Average RBW=1MHz, VBW=1kHz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.6 TEST RESULTS

The spectrum plots are attached on the following 12 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS modulation



NOTE 1: The band edge emission plot on page 53 shows 57.30dBc between carrier maximum power and local maximum emission in restrict band (2.37468GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 110.10dBuV/m (Peak), so the maximum field strength in restrict band is $110.10 - 57.30 = 52.80$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of on page 53 shows 59.70dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 102.26dBuV/m (Average), so the maximum field strength in restrict band is $102.26 - 59.70 = 42.56$ dBuV/m which is under 54dBuV/m limit.



NOTE 2: The band edge emission plot on page 54 shows 55.86dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 110.60dBuV/m (Peak), so the maximum field strength in restrict band is $110.60 - 55.86 = 54.74$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on page 55 shows 59.57dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 102.13dBuV/m (Average), so the maximum field strength in restrict band is $102.13 - 59.57 = 42.56$ dBuV/m which is under 54dBuV/m limit.

802.11b DSSS modulation

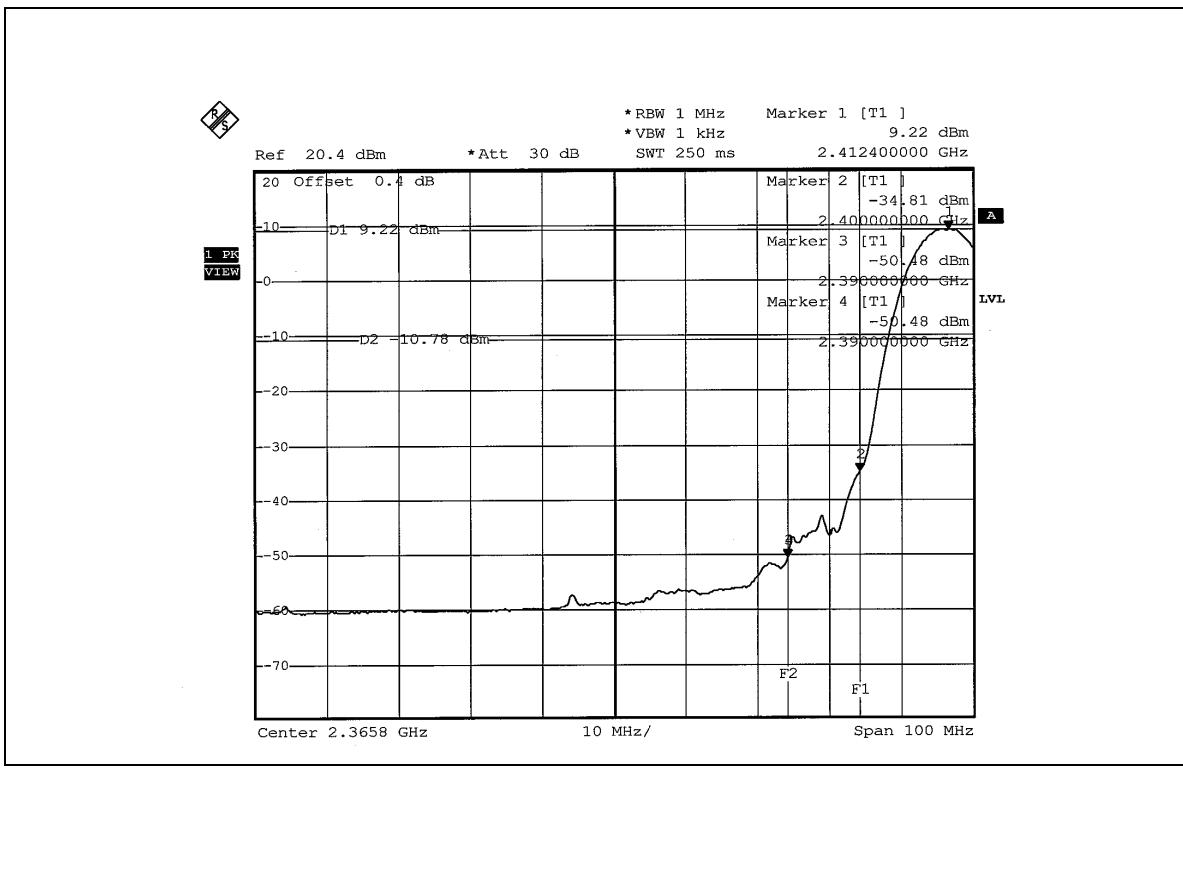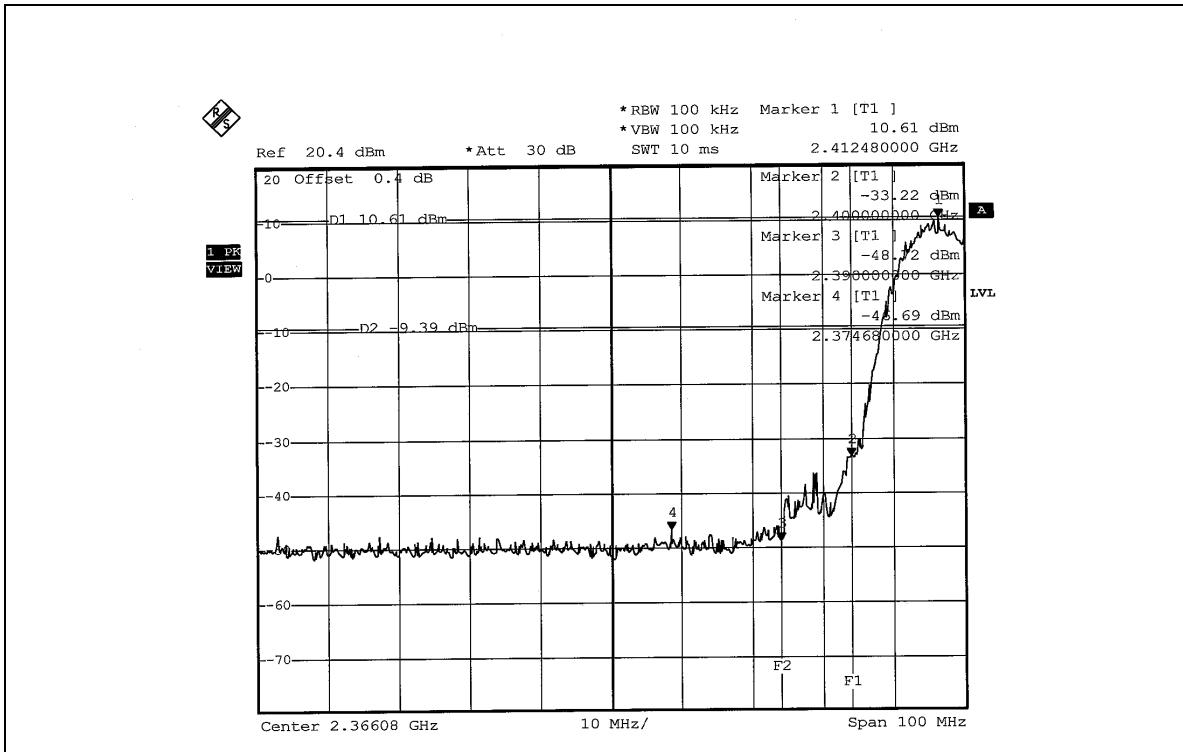

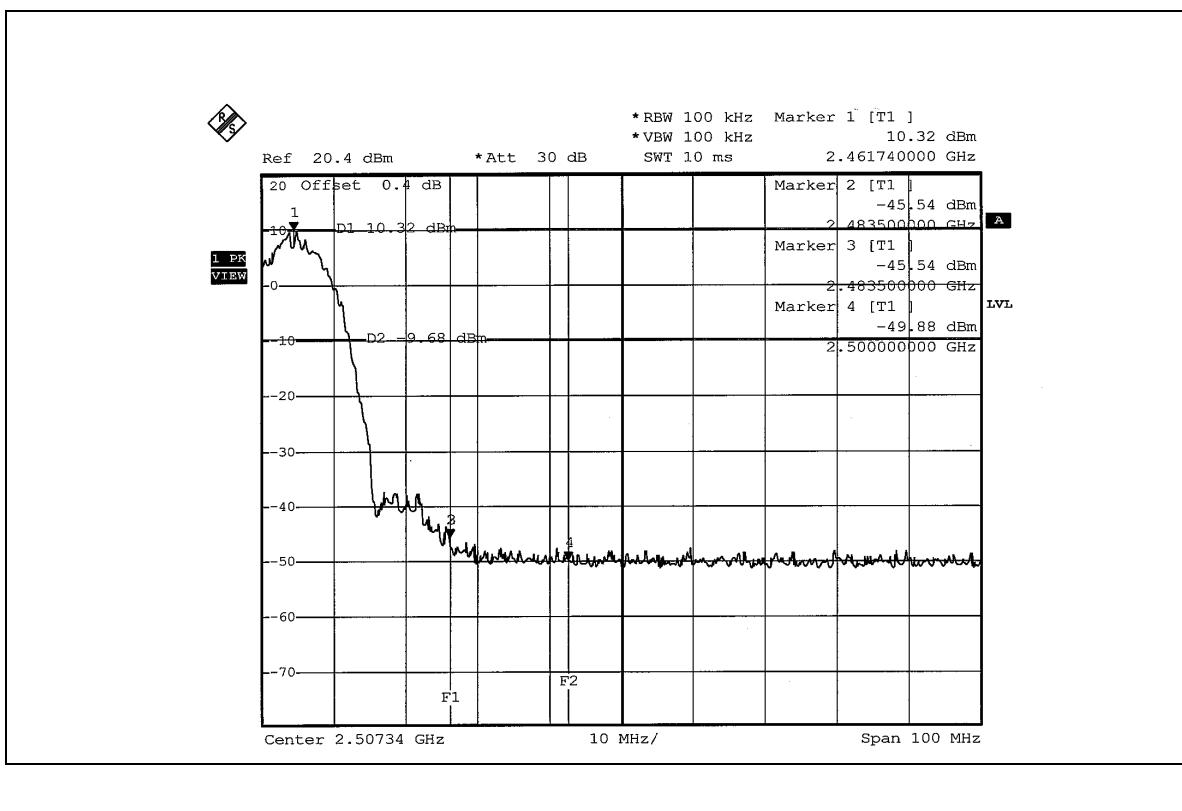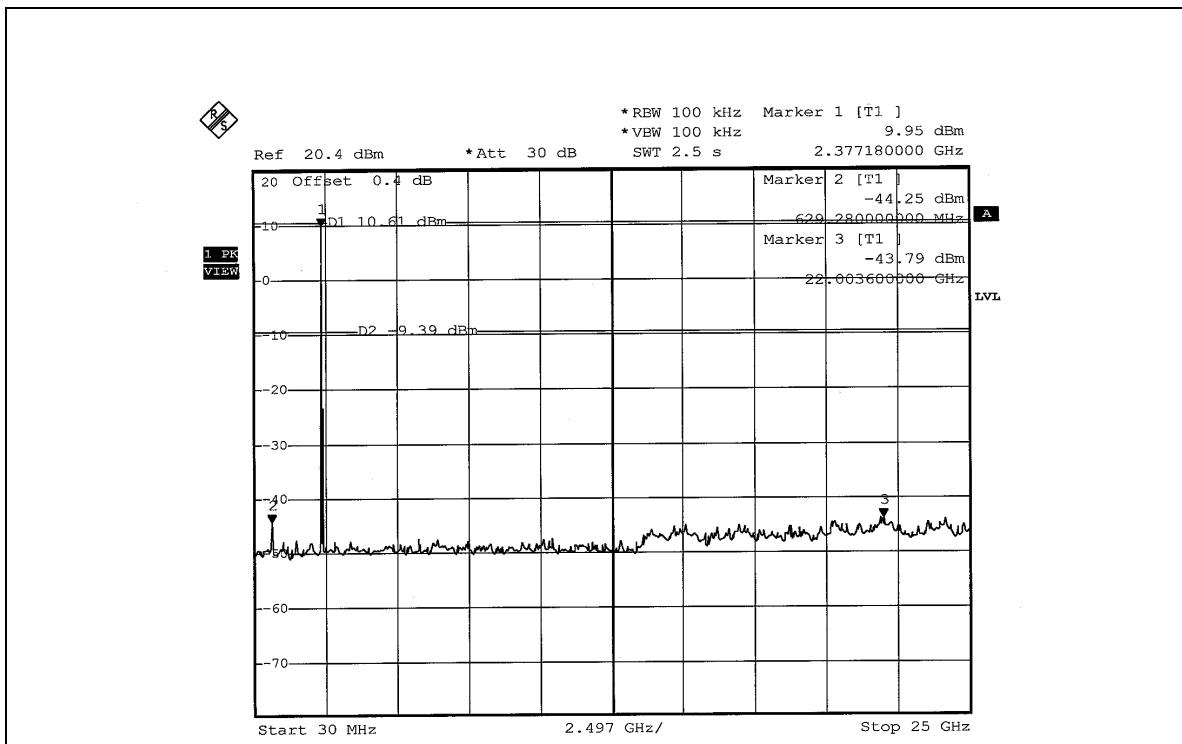

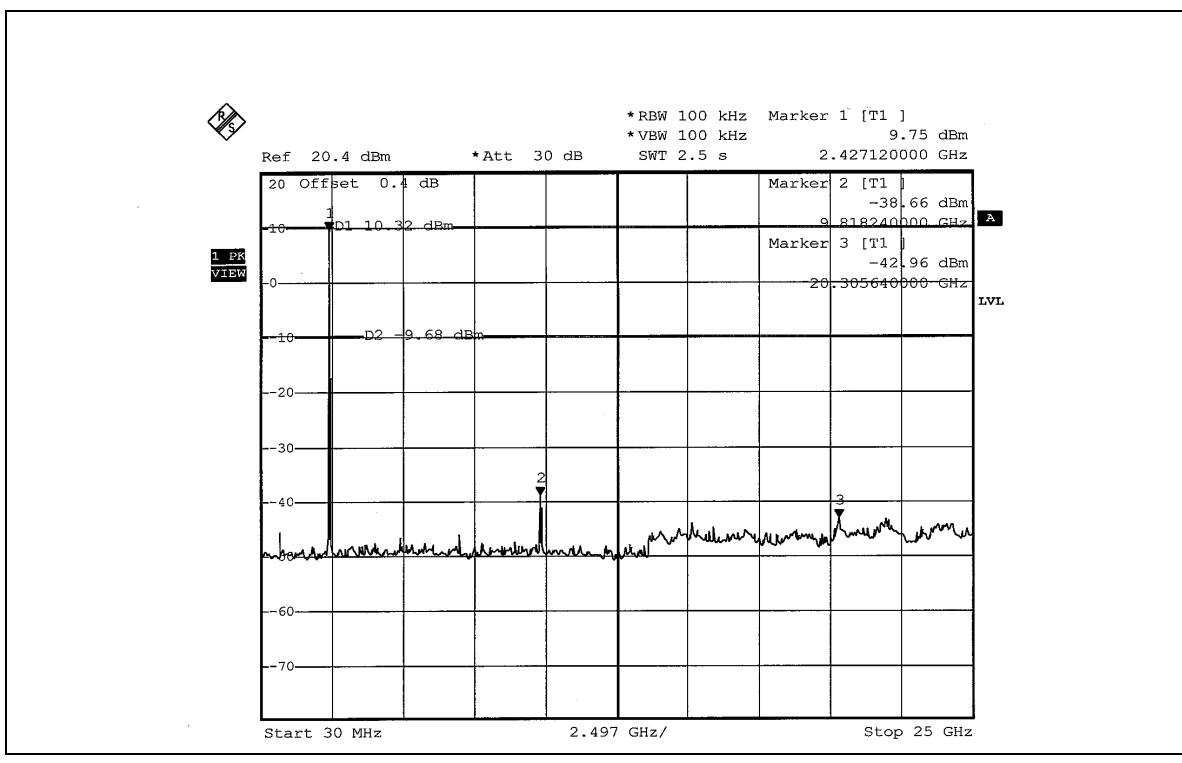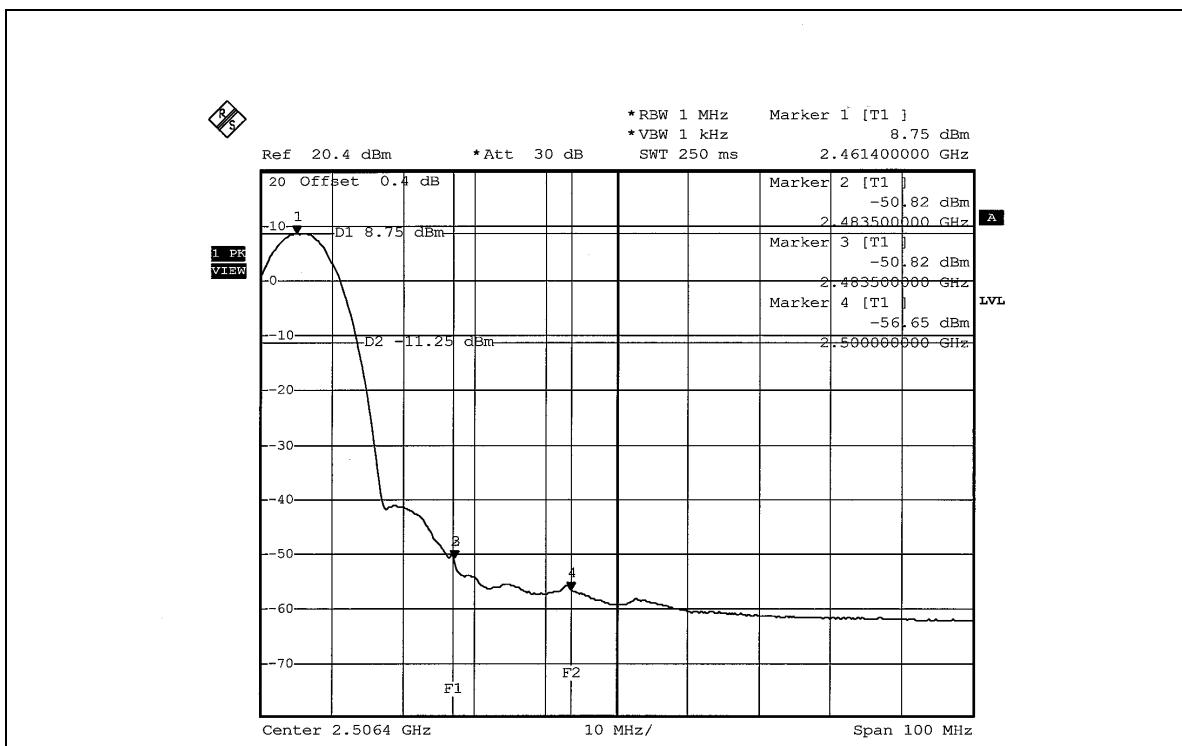

802.11g OFDM modulation



NOTE 1: The band edge emission plot on page 57 shows 40.64dBc between carrier maximum power and local maximum emission in restrict band (2.38704GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 104.03dBuV/m (Peak), so the maximum field strength in restrict band is $104.03 - 40.64 = 63.39$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of on page 57 shows 45.27dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 95.03dBuV/m (Average), so the maximum field strength in restrict band is $95.03 - 45.27 = 49.76$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on page 58 shows 43.72dBc between carrier maximum power and local maximum emission in restrict band (2.48370GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 104.08dBuV/m (Peak), so the maximum field strength in restrict band is $104.08 - 43.72 = 60.36$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on page 59 shows 47.20dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 94.54dBuV/m (Average), so the maximum field strength in restrict band is $94.54 - 47.20 = 47.34$ dBuV/m which is under 54dBuV/m limit.

802.11g OFDM modulation

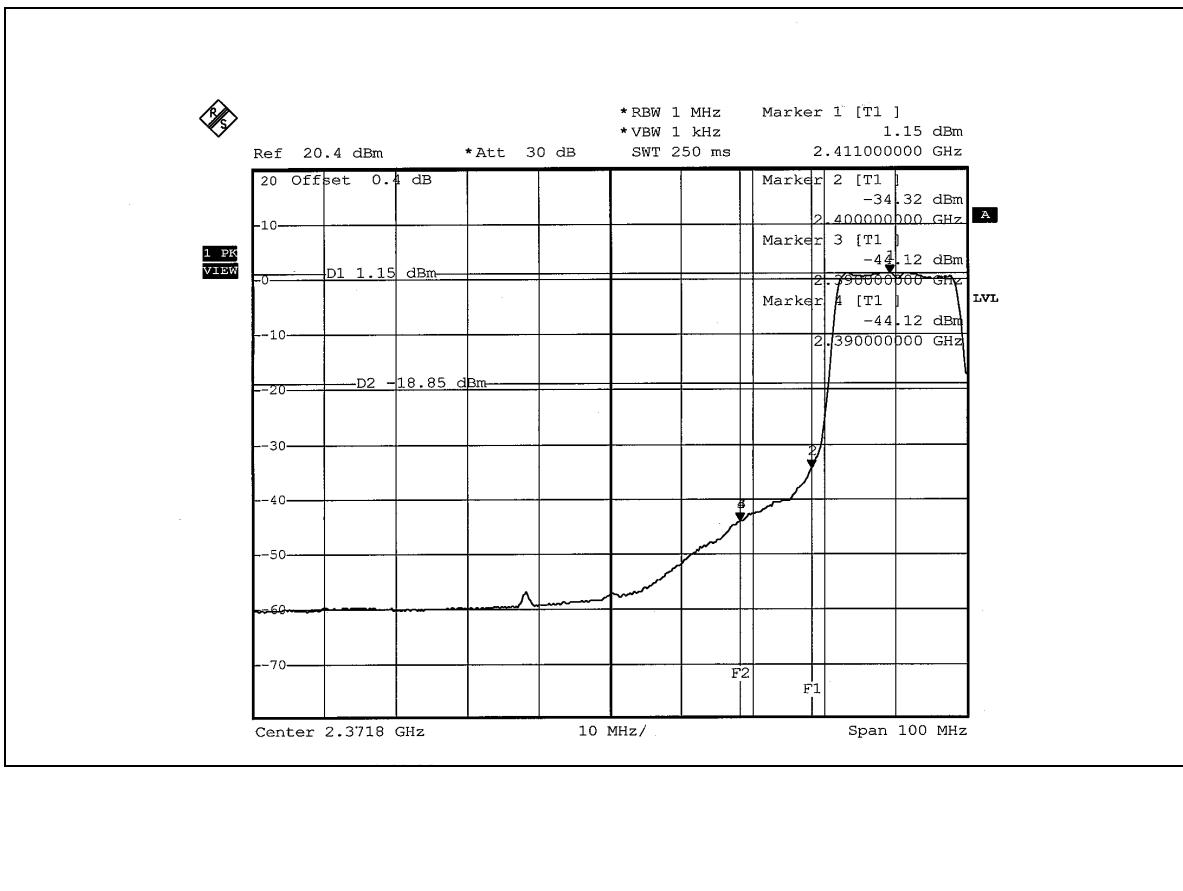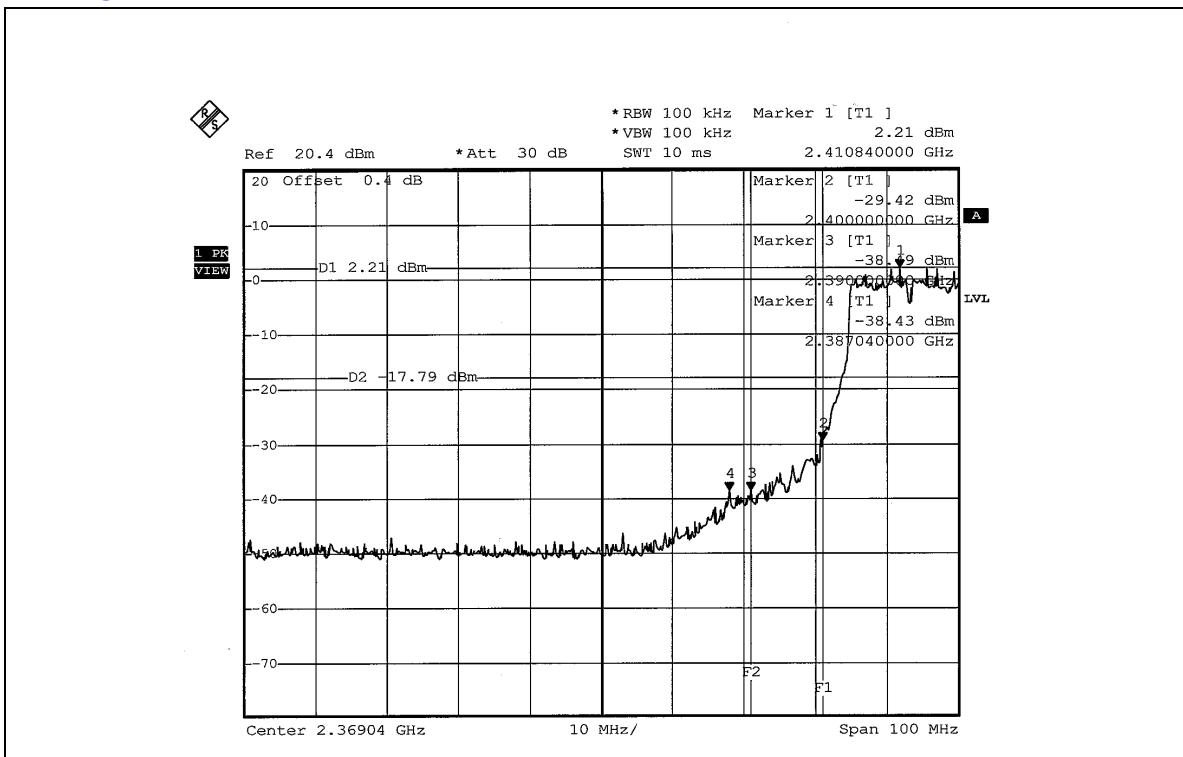

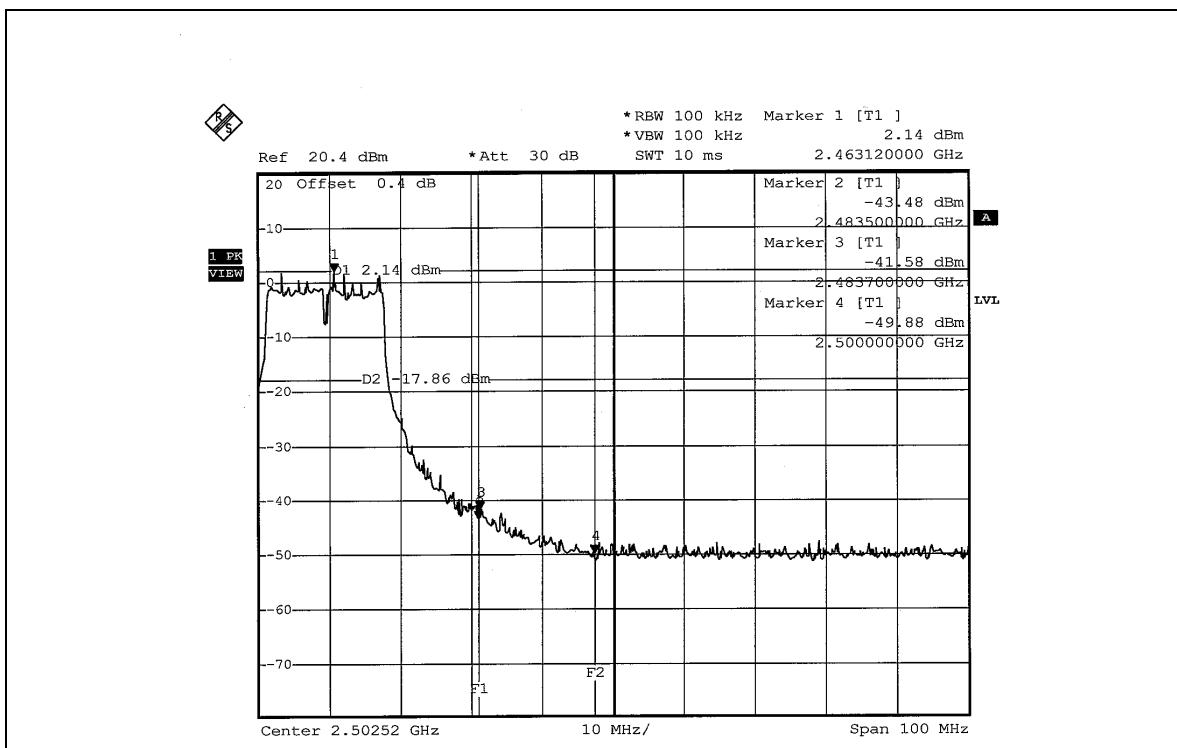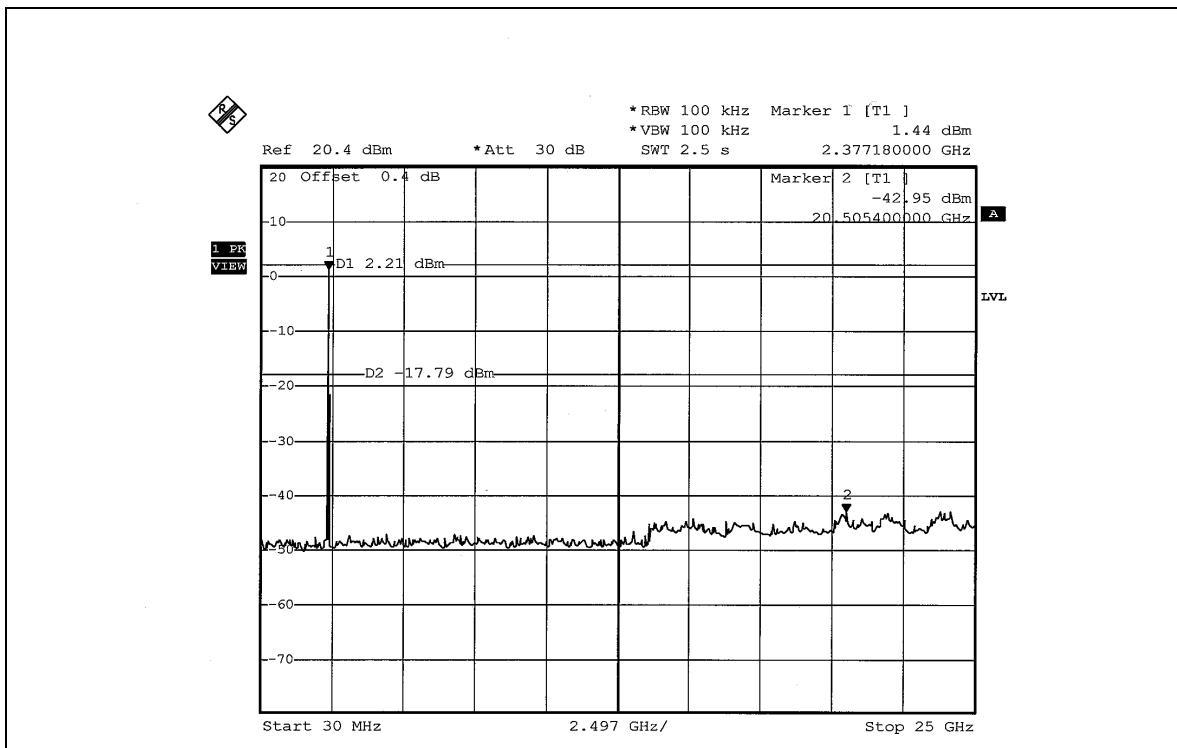

FCC ID: SA6GG610IABG

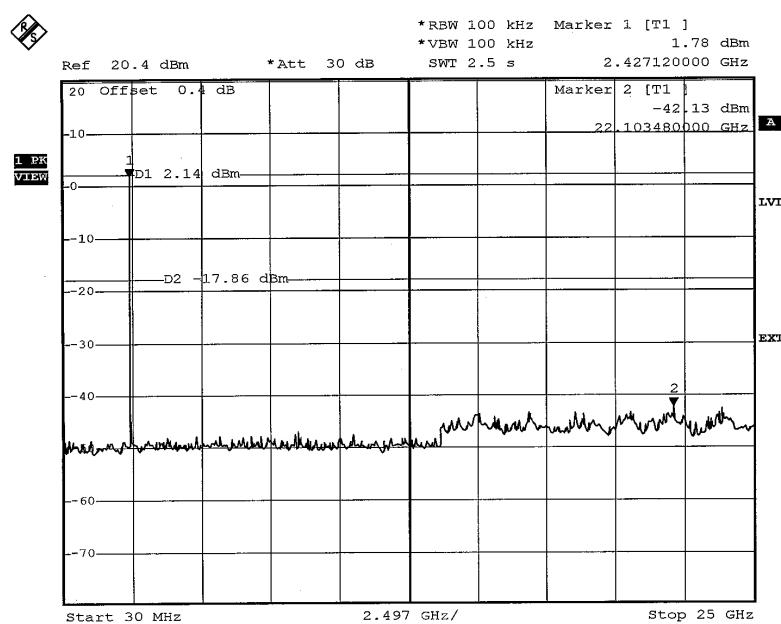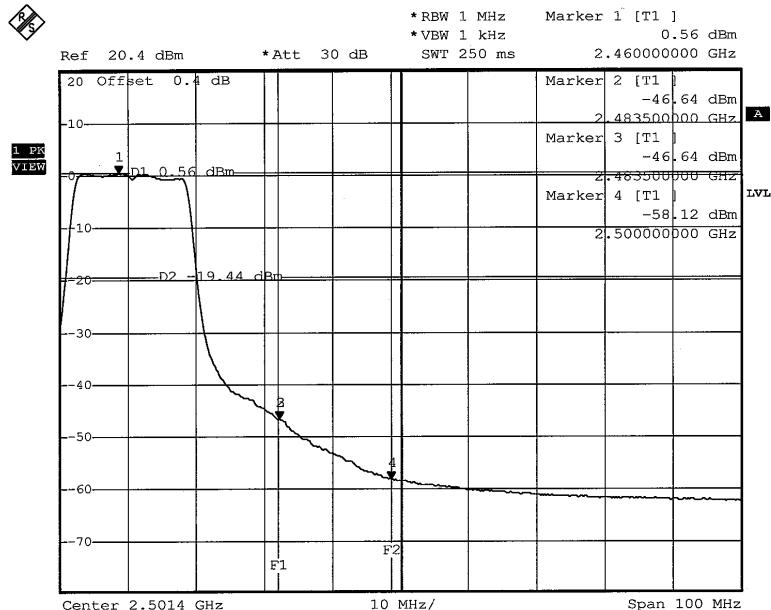

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is PIFA antenna with UFL connector. The maximum Gain of the antenna is -3.37dBi.

5. TEST TYPES AND RESULTS (802.11a 5725~5850MHz Band)

5.1 CONDUCTED EMISSION MEASUREMENT

5.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
1. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
2. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

5.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 11, 2006
RF signal cable Woken	5D-FB	Cable-HYC01-01	Jan. 09, 2006
LISN SCHWARZBECK	NNBL 8226-2	8226-142	May. 02, 2006
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Feb. 15, 2006
Software ADT	ADT_Cond_V3	NA	NA

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 1.
3. The VCCI Site Registration No. is C-2040.


5.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit – 20dB) was not recorded.

5.1.4 DEVIATION FROM TEST STANDARD

No deviation

5.1.5 TEST SETUP

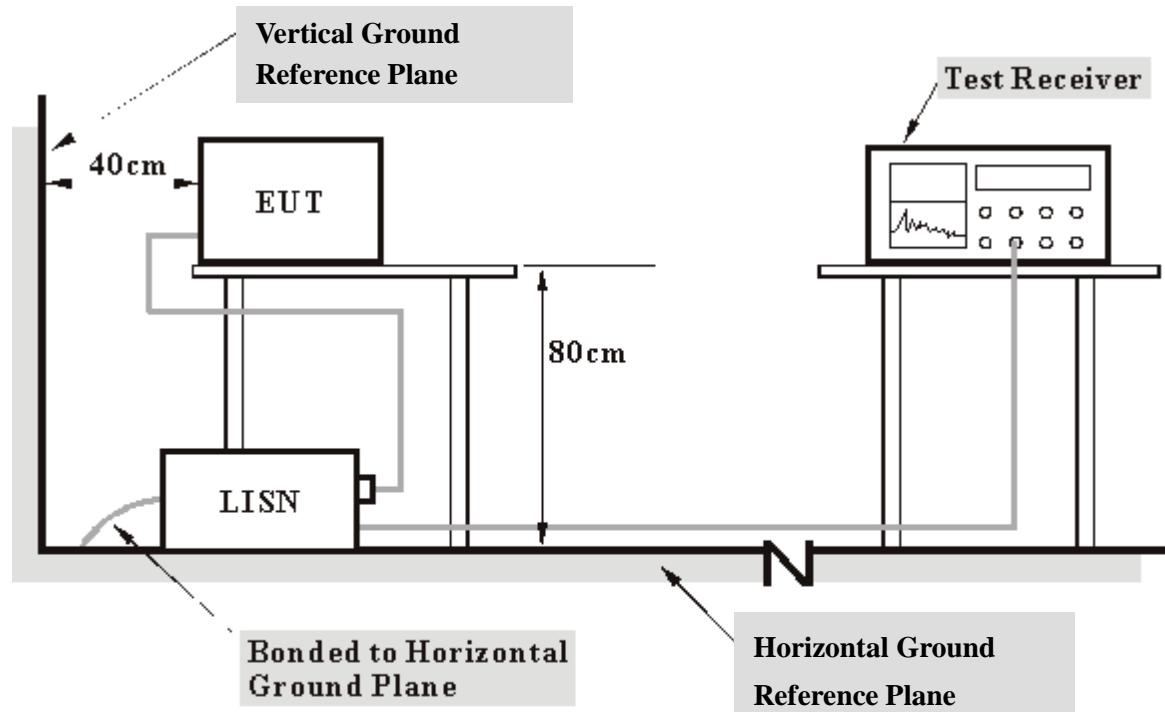

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMIN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.1.6 EUT OPERATING CONDITIONS

Same as 4.1.6

5.1.7 TEST RESULTS


Conducted Worst-Case Data

EUT	Notebook	MEASUREMENT DETAIL	
MODEL	G610	PHASE	Line 1
CHANNEL	Channel 3	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jay Hsu		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.197	0.11	50.66	-	50.77	-	63.74	53.74	-12.97	-
2	0.323	0.11	54.40	41.05	54.51	41.16	59.62	49.62	-5.11	-8.46
3	0.543	0.14	52.10	39.81	52.24	39.95	56.00	46.00	-3.76	-6.05
4	0.715	0.18	52.44	38.94	52.62	39.12	56.00	46.00	-3.38	-6.88
5	0.978	0.24	47.44	37.94	47.68	38.18	56.00	46.00	-8.32	-7.82
6	2.229	0.27	46.87	38.50	47.14	38.77	56.00	46.00	-8.86	-7.23

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

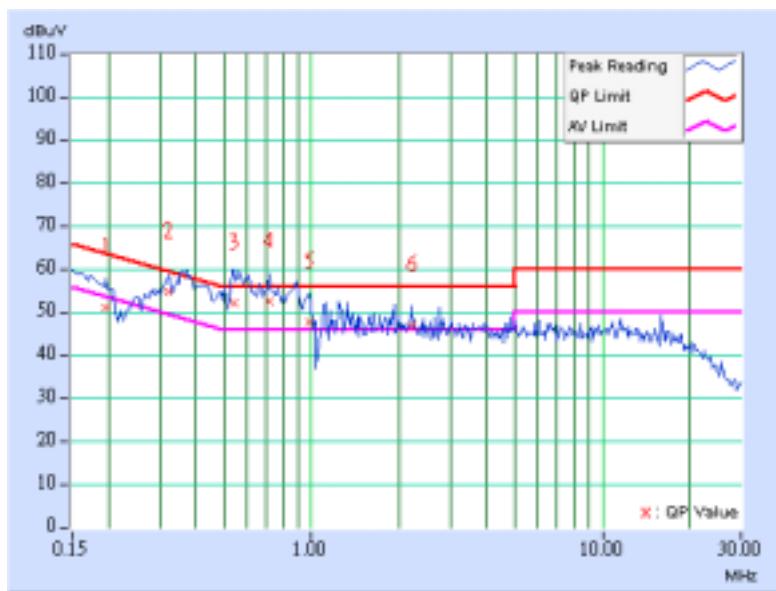


EUT	Notebook	MEASUREMENT DETAIL	
MODEL	G610	PHASE	Line 2
CHANNEL	Channel 3	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jay Hsu		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.183	0.11	53.58	-	53.69	-	64.35	54.35	-10.66	-
2	0.370	0.11	53.67	41.06	53.78	41.17	58.51	48.51	-4.73	-7.34
3	0.539	0.14	52.50	39.81	52.64	39.95	56.00	46.00	-3.36	-6.05
4	0.892	0.22	49.77	39.86	49.99	40.08	56.00	46.00	-6.01	-5.92
5	2.242	0.28	45.64	-	45.92	-	56.00	46.00	-10.08	-
6	3.505	0.36	43.34	-	43.70	-	56.00	46.00	-12.30	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

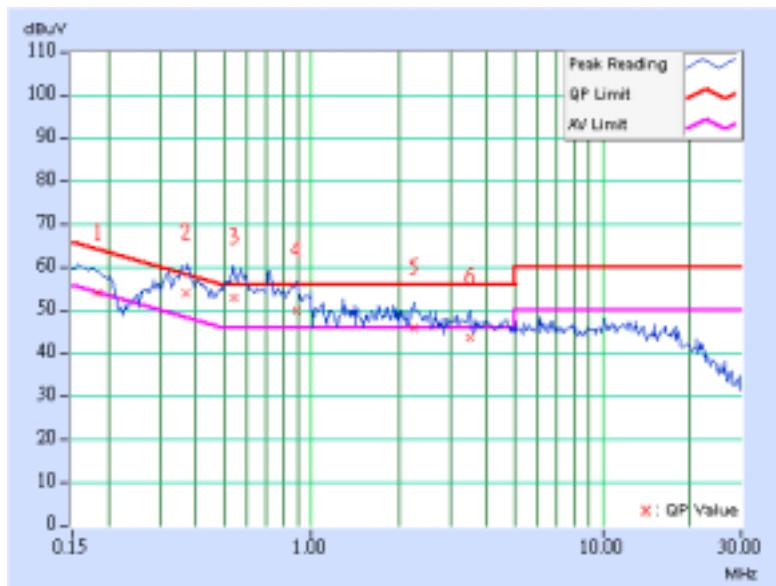

5.2 RADIATED EMISSION MEASUREMENT

5.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

5.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESIB7	100188	Dec. 19, 2005
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Nov. 27, 2006
BILOG Antenna SCHWARZBECK	VULB9168	9168-157	Jan. 22, 2006
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-407	Jan. 16, 2006
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170241	Feb. 23, 2006
Preamplifier Agilent	8449B	3008A01961	Oct. 23, 2006
Preamplifier Agilent	8447D	2944A10629	Oct. 27, 2006
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218182/4	Feb. 17, 2006
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218194/4	Feb. 17, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower ADT.	AT100	AT93021702	NA
Turn Table ADT.	TT100.	TT93021702	NA
Controller ADT.	SC100.	SC93021702	NA
26GHz ~ 40GHz Amplifier	AMF-6F-2600400	923362	Mar. 13, 2006

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 1.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC4924-2.

5.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz for Average detection (AV) at frequency above 1GHz.

5.2.4 DEVIATION FROM TEST STANDARD

No deviation

5.2.5 TEST SETUP

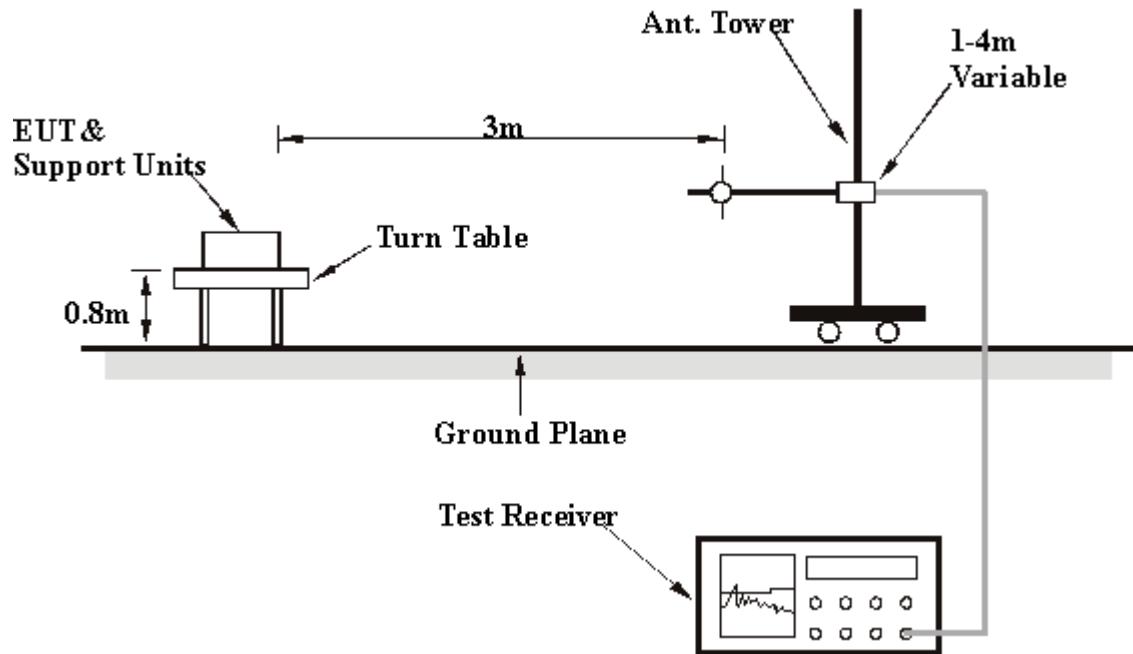

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

5.2.7 TEST RESULTS

Below 1GHz Worst-Case Data

EUT		Notebook	MEASUREMENT DETAIL		
MODEL	G610	FREQUENCY RANGE			Below 1000MHz
CHANNEL	Channel 3	DETECTOR FUNCTION			Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS			24deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)			120Vac, 60 Hz
TESTED BY	Jay Hsu				

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	206.89	29.59 QP	43.50	-13.91	1.50 H	124	18.16	11.43
2	249.66	34.72 QP	46.00	-11.28	1.00 H	202	22.11	12.61
3	276.87	32.86 QP	46.00	-13.14	2.00 H	88	18.22	14.64
4	432.38	29.57 QP	46.00	-16.43	1.50 H	133	10.87	18.70
5	502.36	28.63 QP	46.00	-17.37	2.50 H	232	8.30	20.33
6	527.64	30.96 QP	46.00	-15.04	2.50 H	226	10.19	20.77
7	638.44	33.19 QP	46.00	-12.81	3.00 H	115	10.04	23.16
8	663.71	35.28 QP	46.00	-10.72	2.00 H	1	11.87	23.41
9	712.30	32.69 QP	46.00	-13.31	1.00 H	202	8.32	24.37
10	803.67	40.06 QP	46.00	-5.94	2.50 H	115	13.75	26.31

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value

EUT		Notebook	MEASUREMENT DETAIL		
MODEL	G610	FREQUENCY RANGE			Below 1000MHz
CHANNEL	Channel 3	DETECTOR FUNCTION			Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS			24deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)			120Vac, 60 Hz
TESTED BY	Jay Hsu				

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	249.66	30.70 QP	46.00	-15.30	1.50 V	175	18.09	12.61
2	383.79	30.48 QP	46.00	-15.52	2.00 V	166	12.91	17.58
3	432.38	33.83 QP	46.00	-12.17	2.00 V	127	15.13	18.70
4	502.36	33.40 QP	46.00	-12.60	1.00 V	49	13.08	20.33
5	527.64	38.60 QP	46.00	-7.40	1.00 V	121	17.83	20.77
6	564.57	32.20 QP	46.00	-13.80	2.00 V	127	10.53	21.67
7	638.44	38.59 QP	46.00	-7.41	1.50 V	37	15.43	23.16
8	663.71	39.52 QP	46.00	-6.48	2.00 V	127	16.12	23.41
9	712.30	36.59 QP	46.00	-9.41	1.00 V	106	12.22	24.37
10	737.58	34.41 QP	46.00	-11.59	1.00 V	82	9.01	25.40
11	797.84	42.04 QP	46.00	-3.96	1.50 V	37	15.78	26.26
12	933.91	33.35 QP	46.00	-12.65	1.50 V	70	5.71	27.63

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
5. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
6. The other emission levels were very low against the limit.
7. Margin value = Emission level – Limit value

802.11a OFDM modulation

EUT		Notebook	MEASUREMENT DETAIL		
MODEL		G610	FREQUENCY RANGE		1 ~ 40 GHz
CHANNEL		Channel 1	DETECTOR FUNCTION		Peak(PK) Average (AV)
MODULATION TYPE		BPSK	ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH, 991hPa
TRANSFER RATE		6Mbps	INPUT POWER (SYSTEM)		120Vac, 60 Hz
TESTED BY		Match Tsui			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5715.00	66.66 PK	82.14	-15.48	1.08 H	239	26.63	40.03
1	5725.00	70.44 PK	82.14	-11.70	1.08 H	239	30.40	40.05
2	*5745.00	102.14 PK			1.08 H	239	62.06	40.08
2	*5745.00	93.27 AV			1.08 H	239	53.19	40.08
3	#11490.00	63.64 PK	74.00	-10.36	1.04 H	1	13.46	50.18
3	#11490.00	46.85 AV	54.00	-7.15	1.04 H	1	-3.33	50.18

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5715.00	66.59 PK	83.32	-16.73	1.32 V	258	26.56	40.03
1	5725.00	69.12 PK	83.32	-14.20	1.32 V	258	29.07	40.05
2	*5745.00	103.32 PK			1.32 V	258	63.24	40.08
2	*5745.00	93.64 AV			1.32 V	258	53.56	40.08
3	#11490.00	63.44 PK	74.00	-10.56	1.32 V	360	13.26	50.18
3	#11490.00	47.15 AV	54.00	-6.85	1.32 V	360	-3.03	50.18

NOTE:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value
5. “*” : Fundamental frequency
6. “#”The radiated frequency falling in the restricted band.
7. The limit value is defined as per 15.247

EUT		Notebook	MEASUREMENT DETAIL		
MODEL		G610	FREQUENCY RANGE		1 ~ 40 GHz
CHANNEL		Channel 3	DETECTOR FUNCTION		Peak(PK) Average (AV)
MODULATION TYPE		BPSK	ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH, 991hPa
TRANSFER RATE		6Mbps	INPUT POWER (SYSTEM)		120Vac, 60 Hz
TESTED BY		Match Tsui			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	102.07 PK			1.25 H	241	61.92	40.15
1	*5785.00	93.20 AV			1.25 H	241	53.05	40.15
2	#11570.00	63.82 PK	74.00	-10.18	1.02 H	359	13.70	50.12
2	#11570.00	47.06 AV	54.00	-6.94	1.02 H	359	-3.06	50.12

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	103.45 PK			1.20 V	250	63.30	40.15
1	*5785.00	94.28 AV			1.20 V	250	54.13	40.15
2	#11570.00	62.98 PK	74.00	-11.02	1.22 V	1	12.86	50.12
2	#11570.00	45.99 AV	54.00	-8.01	1.22 V	1	-4.13	50.12

NOTE:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value
5. “*” : Fundamental frequency
6. “#”The radiated frequency falling in the restricted band.
7. The limit value is defined as per 15.247

EUT		Notebook	MEASUREMENT DETAIL		
MODEL	G610	FREQUENCY RANGE			1 ~ 40 GHz
CHANNEL	Channel 5	DETECTOR FUNCTION			Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS			25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)			120Vac, 60 Hz
TESTED BY	Match Tsui				

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)
1	*5825.00	102.29 PK			1.56 H	339	62.07
1	*5825.00	93.07 AV			1.56 H	339	52.85
2	5850.00	68.62 PK	82.29	-13.67	1.56 H	339	28.36
2	5860.00	67.89 PK	82.29	-14.40	1.56 H	339	27.61
3	#11650.00	64.06 PK	74.00	-9.94	1.24 H	359	13.87
3	#11650.00	47.05 AV	54.00	-6.95	1.24 H	359	-3.13
							50.19

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M							
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)
1	*5825.00	103.80 PK			1.28 V	253	63.58
1	*5825.00	94.87 AV			1.28 V	253	54.65
2	5850.00	69.81 PK	83.80	-13.99	1.28 V	253	29.55
2	5860.00	66.37 PK	83.80	-17.43	1.28 V	253	29.09
3	#11650.00	63.08 PK	74.00	-10.92	1.02 V	356	12.89
3	#11650.00	46.37 AV	54.00	-7.63	1.02 V	356	-3.82
							50.19

NOTE:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value
5. ** : Fundamental frequency
6. # : The radiated frequency falling in the restricted band.
7. The limit value is defined as per 15.247

5.3 6dB BANDWIDTH MEASUREMENT

5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

5.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTES: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

5.3.4 DEVIATION FROM TEST STANDARD

No deviation

5.3.5 TEST SETUP



5.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

FCC ID: SA6GG610IABG




5.3.7 TEST RESULTS

802.11a OFDM modulation


EUT	Notebook	MODEL	G610
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 67%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	5745	16.32	0.5	PASS
3	5785	16.44	0.5	PASS
5	5825	16.44	0.5	PASS


CH 1

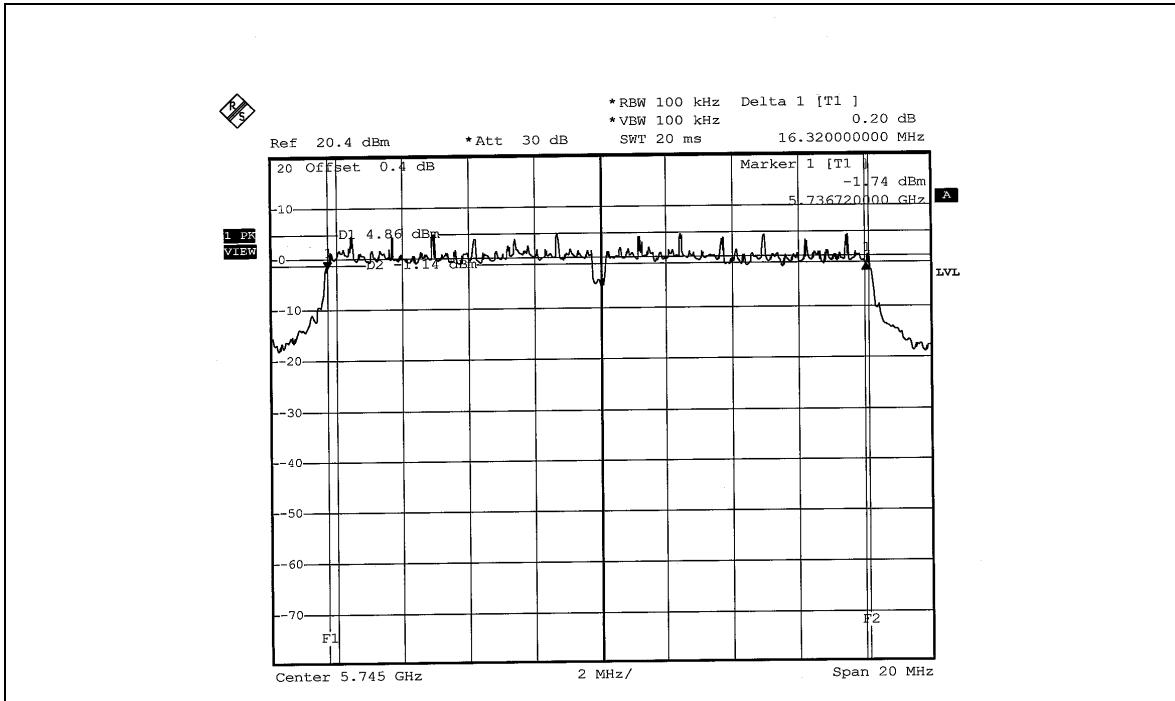

CH 3

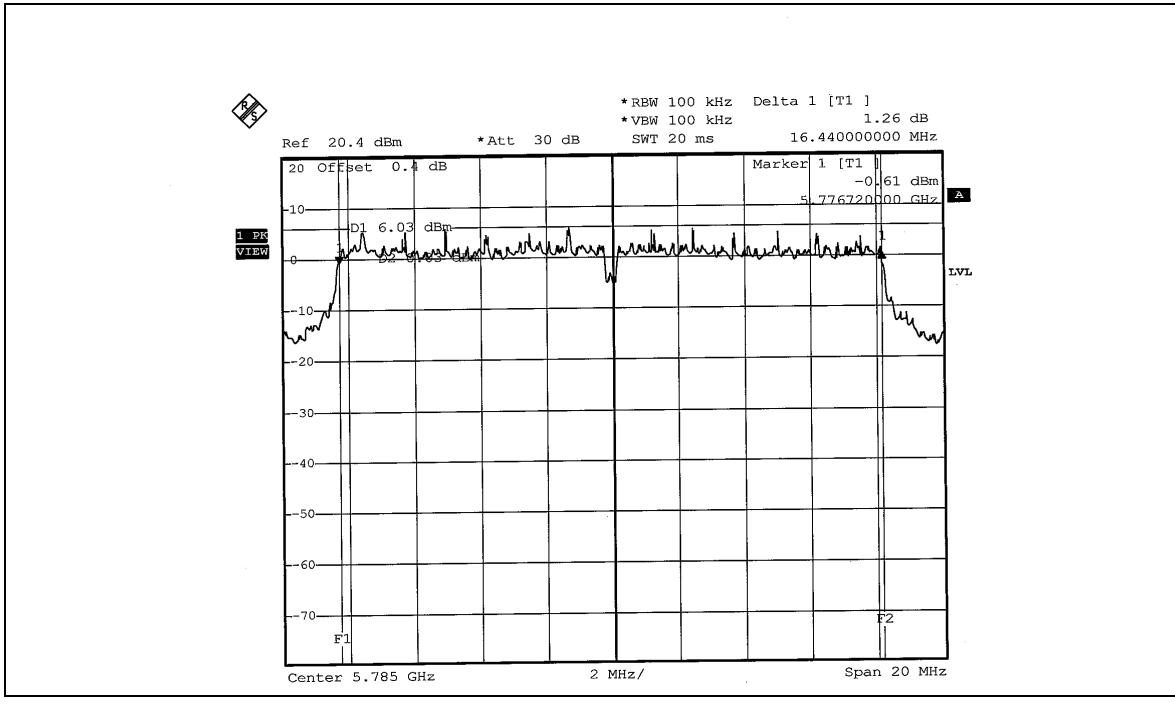

CH 5

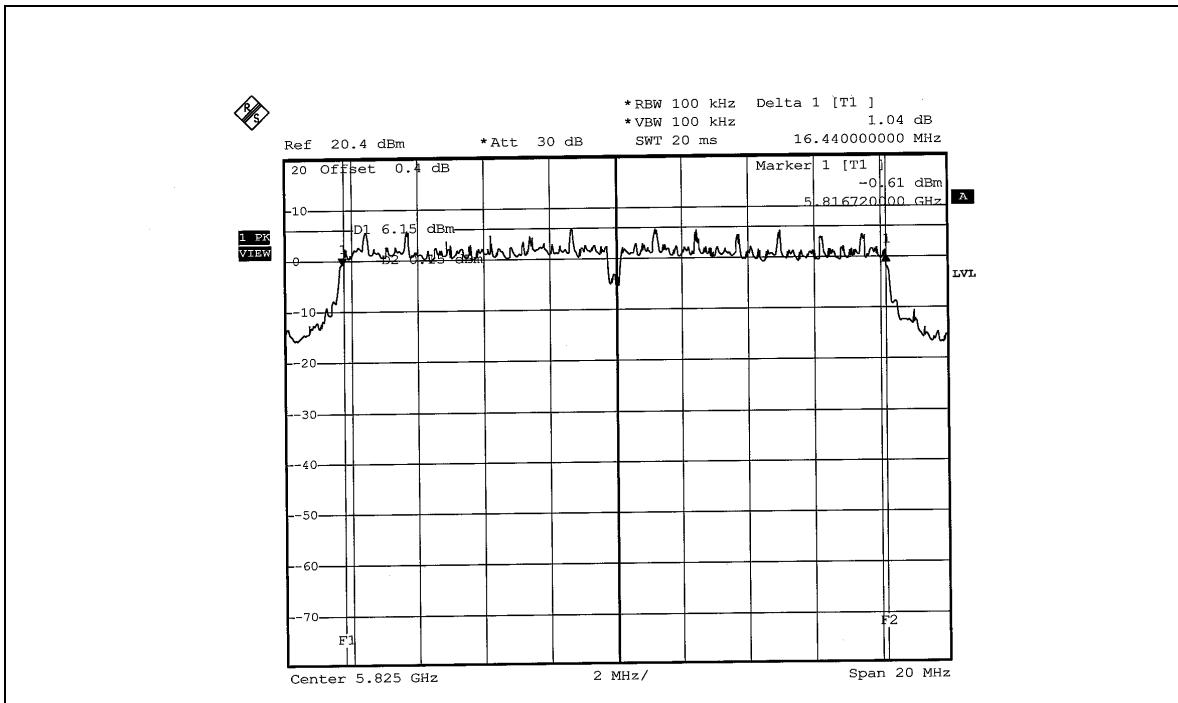

5.4 MAXIMUM PEAK OUTPUT POWER

5.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

5.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 31, 2005
TEKTRONIX OSCILLOSCOPE	TDS 1012	C019167	Feb. 01, 2006
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA..

5.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator . The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

5.4.4 DEVIATION FROM TEST STANDARD

No deviation

5.4.5 TEST SETUP



5.4.6 EUT OPERATING CONDITIONS

Same as Item 5.3.6

FCC ID: SA6GG610IABG



5.4.7 TEST RESULTS

802.11a OFDM modulation

EUT	Notebook	MODEL	G610
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 67%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	5745	64.269	18.08	30	PASS
3	5785	63.241	18.01	30	PASS
5	5825	63.826	18.05	30	PASS

5.5 POWER SPECTRAL DENSITY MEASUREMENT

5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

5.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTES:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time = span/3 kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3 kHz for a full response of the mixer in the spectrum analyzer.

5.5.4 DEVIATION FROM TEST STANDARD

No deviation

5.5.5 TEST SETUP



5.5.6 EUT OPERATING CONDITION

Same as Item 5.3.6

FCC ID: SA6GG610IABG




5.5.7 TEST RESULTS

802.11a OFDM modulation


EUT	Notebook	MODEL	G610
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 67%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	5745	-10.93	8	PASS
3	5785	-10.52	8	PASS
5	5825	-10.88	8	PASS


CH 1

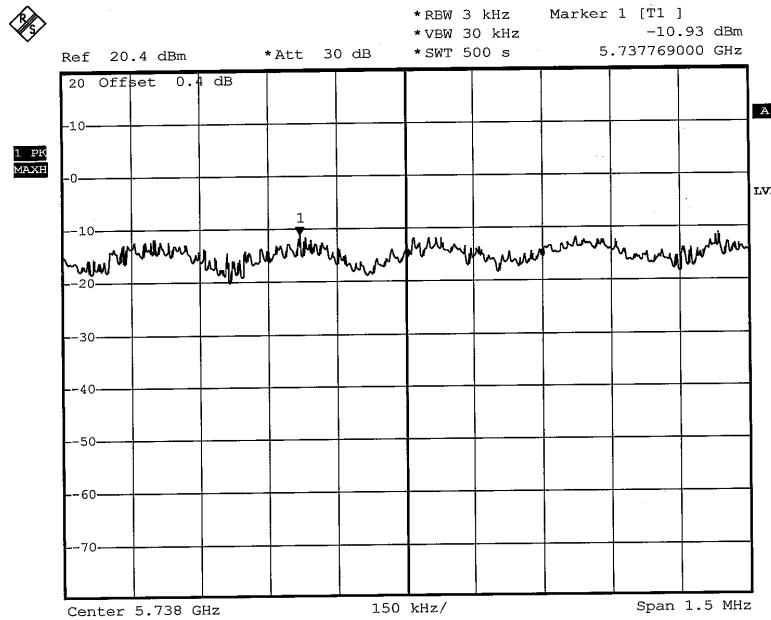

CH 3

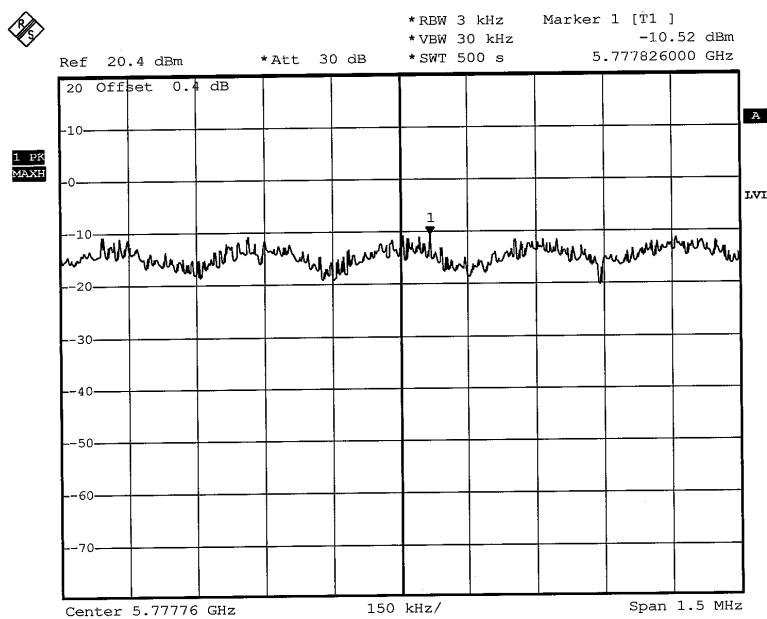

CH 5

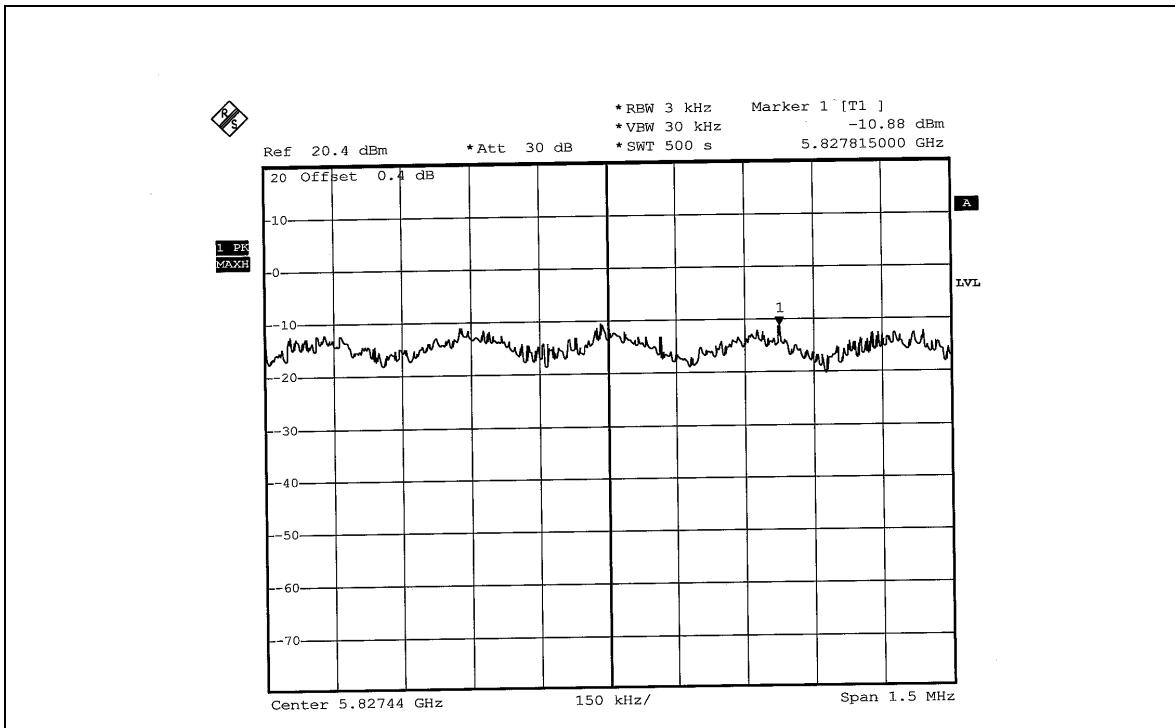

5.6 BAND EDGES MEASUREMENT

5.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

5.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTES:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

5.6.4 DEVIATION FROM TEST STANDARD

No deviation



5.6.5 EUT OPERATING CONDITION



Same as Item 5.9.6



5.6.6 TEST RESULTS

The spectrum plots are attached on the following pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(d).

802.11a OFDM modulation

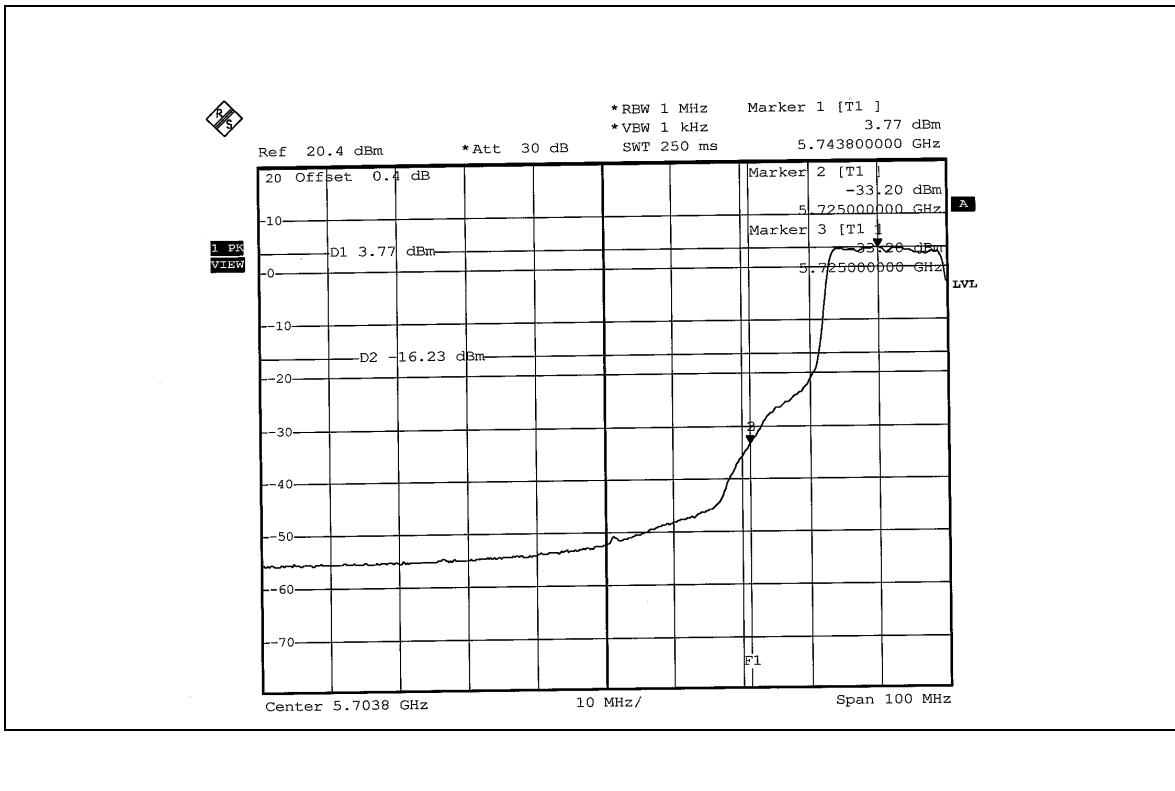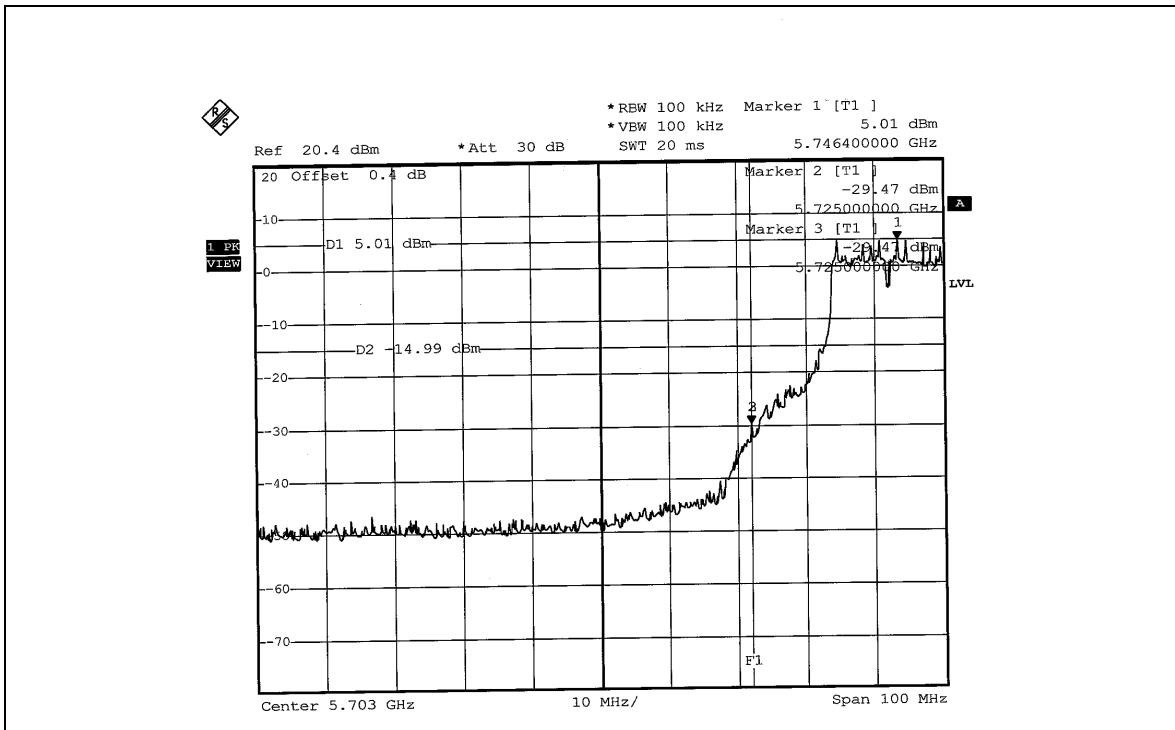

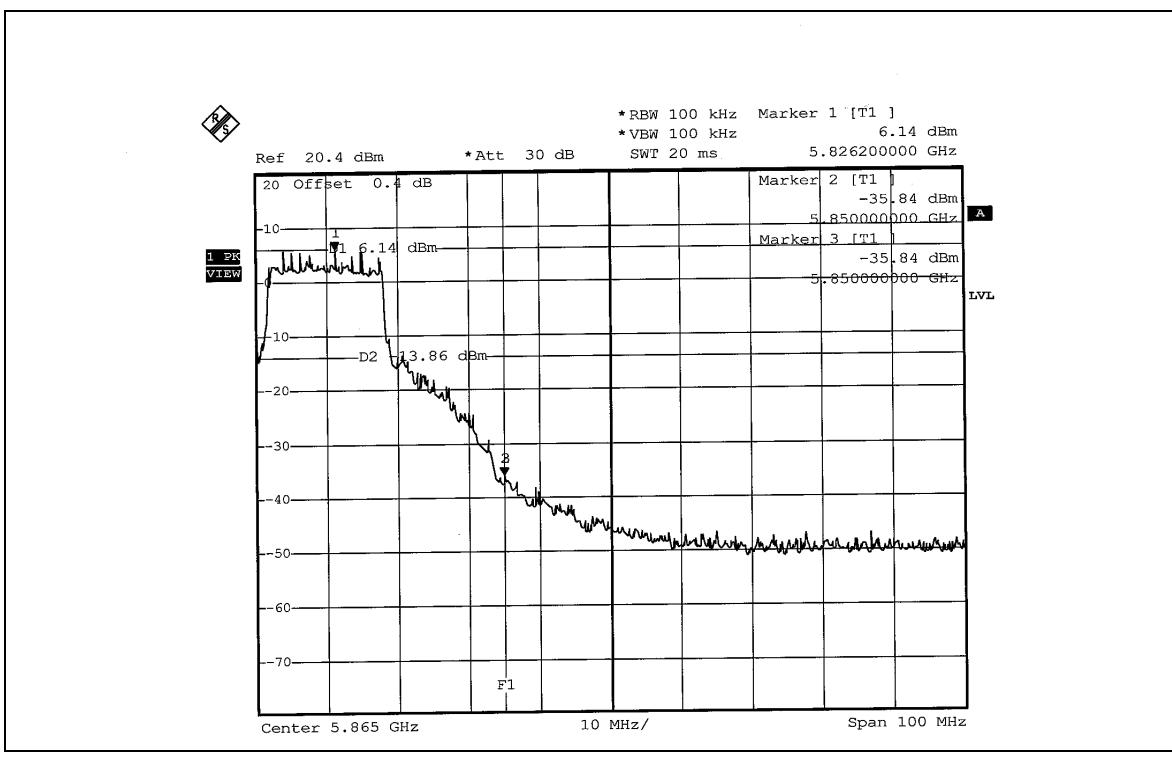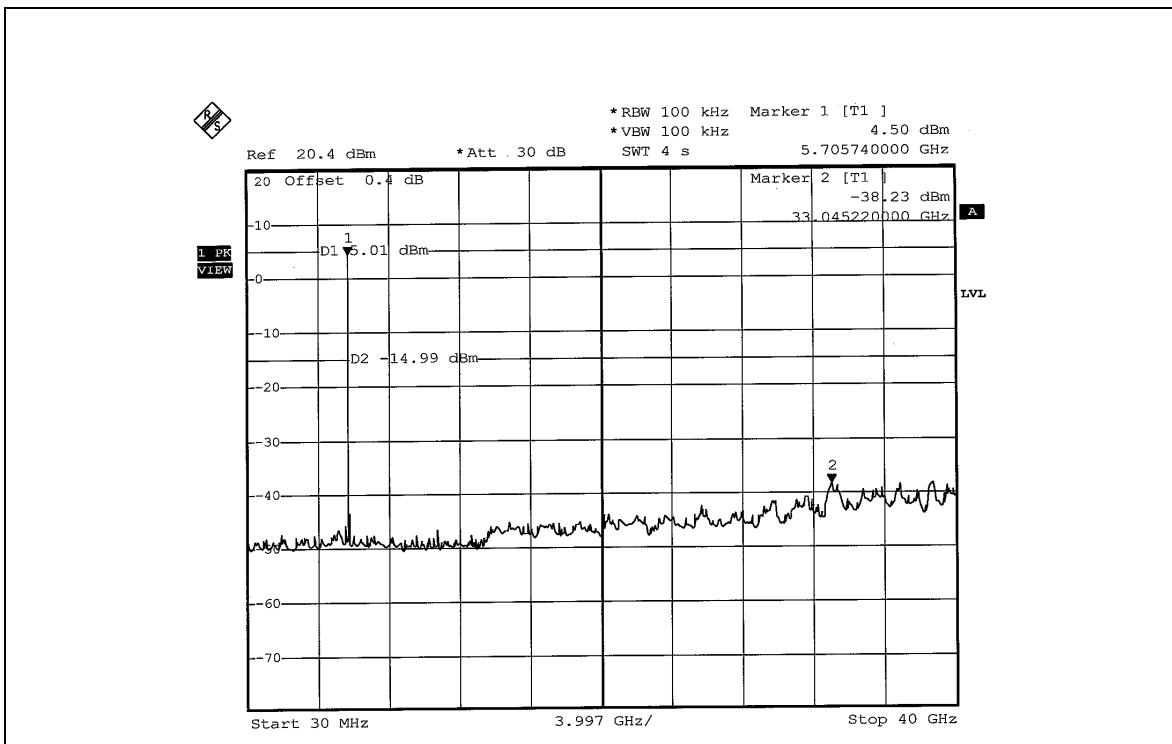

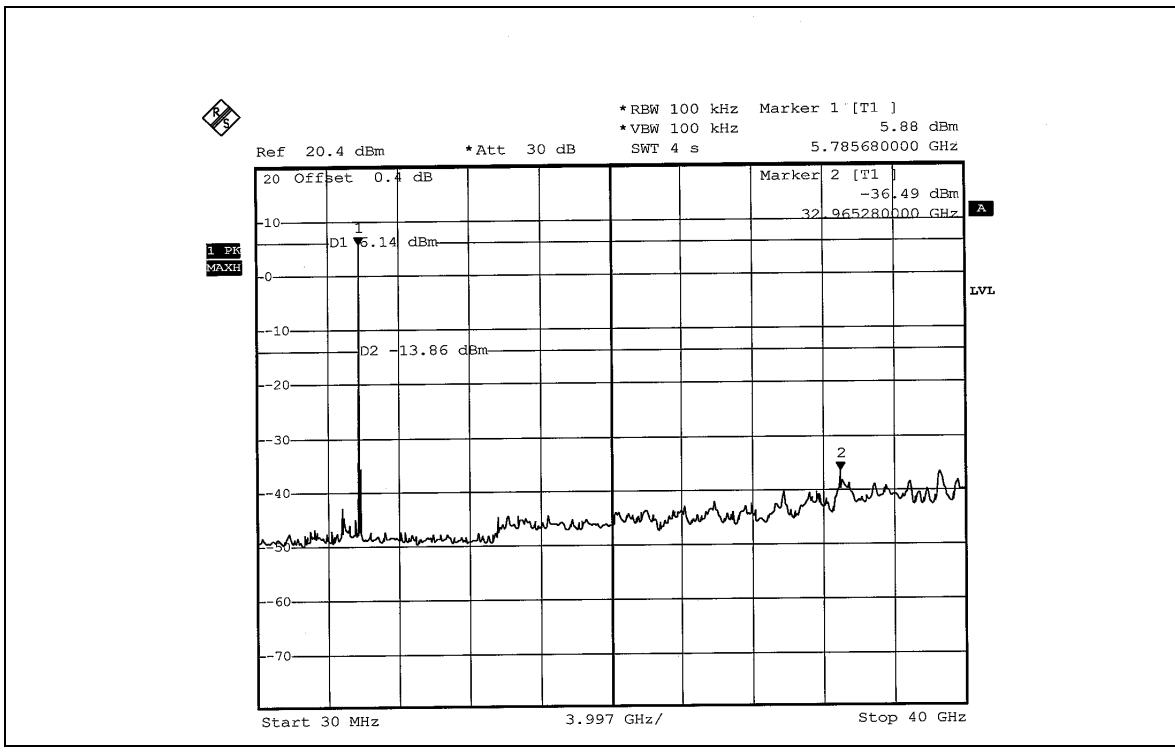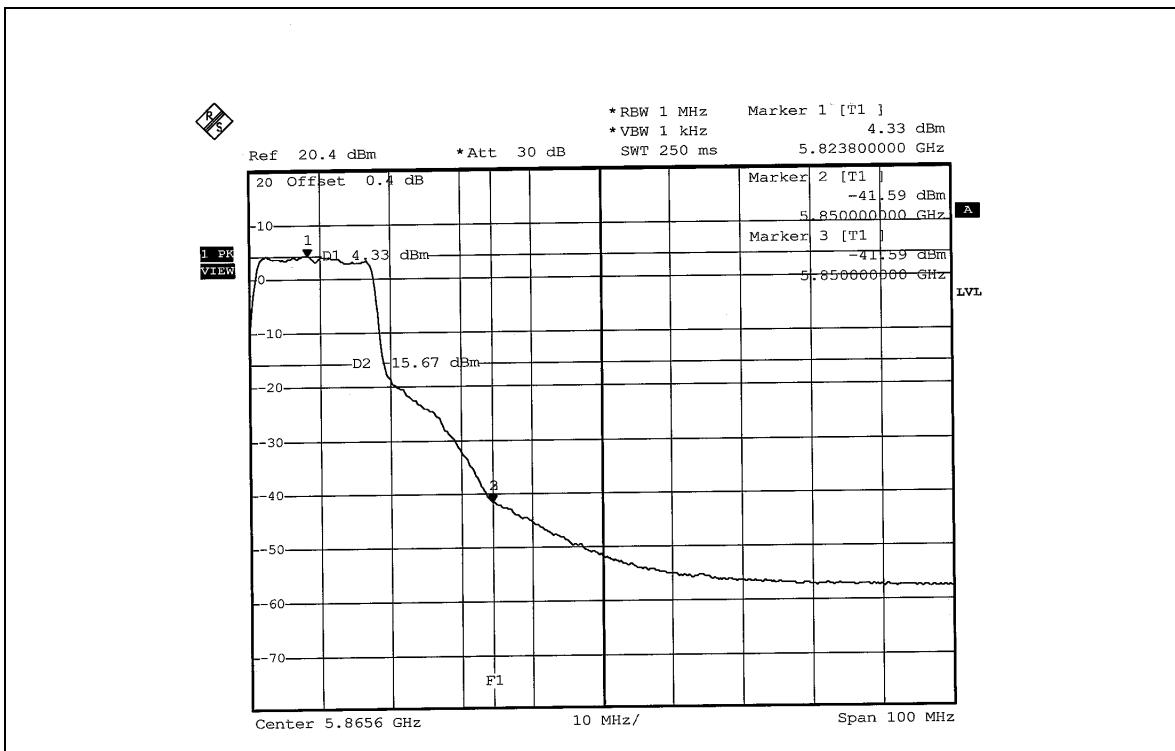

5.7 ANTENNA REQUIREMENT

5.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247(a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

5.7.2 ANTENNA CONNECTED CONSTRUCTION


The antenna used in this product is PIFA antenna with UFL connector. The maximum Gain of the antenna is –4.39dBi.

6. PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST



RADIATED EMISSION TEST

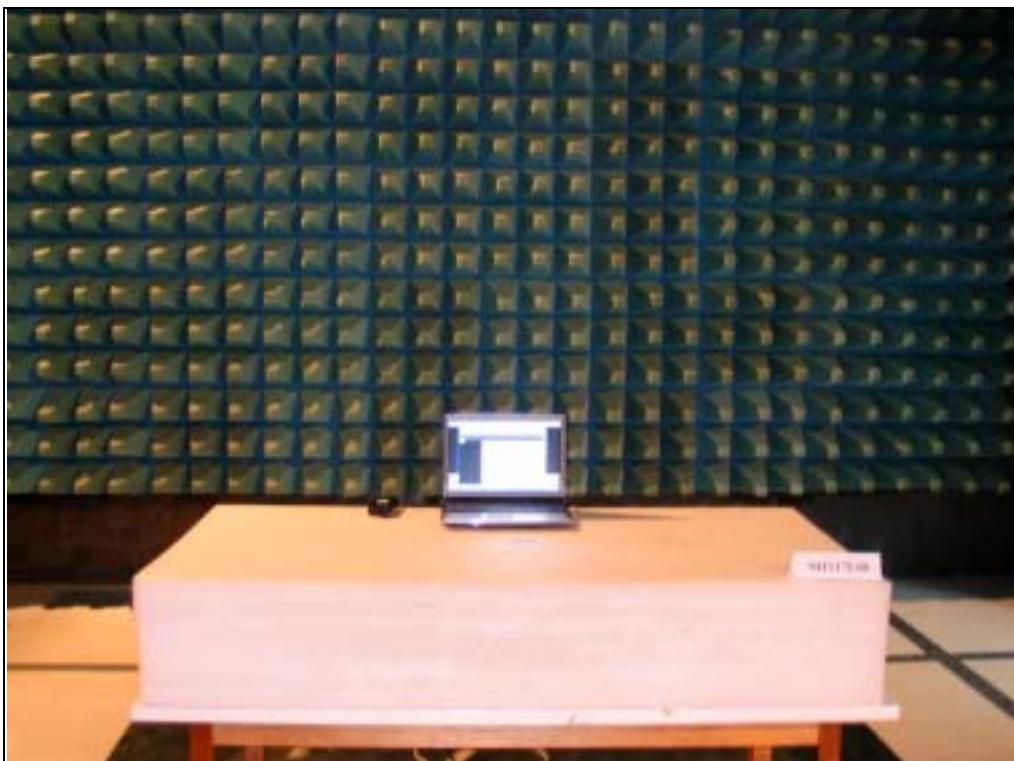

7. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025

USA	FCC, NVLAP, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:
Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:
Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:
Tel: 886-3-3183232
Fax: 886-3-3185050

Linko RF Lab.
Tel: 886-3-3270910
Fax: 886-3-3270892

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

FCC ID: SA6GG610IABG



APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.