



849 NW State Road 45
Newberry, FL 32669 USA
Ph: 888.472.2424 or 352.472.5500
Fax: 352.472.2030
Email: info@timcoengr.com
Website: www.timcoengr.com

FCC PT 15.519 & PT 15.249 COMPOSITE DEVICE

Pt 15.249 LOW POWER DEVICE TEST REPORT

Applicant	Ubisense Limited	
Address	St Andrews House 90 St. Andrews Road Chesterton, Cambridge CB4 1DL UK	
FCC ID	SEATAG21HH	
Model Number	UBITAG7024	
Product Description	UWB tag	
Date Sample Received	February 5, 2007	
Date Tested	February 5, 2007	
Tested By	Mario de Aranzeta	
Approved By	Mario de Aranzeta	
Report Number	2432UC7_SEATAG21HH_15.249_TestReport.pdf	
Test Results	<input checked="" type="checkbox"/> PASS	<input type="checkbox"/> FAIL

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.



Certificate # 0955-01



TABLE OF CONTENT

ATTESTATION STATEMENT.....	3
LETTER OF EXPLANATION.....	Error! Bookmark not defined.
GENERAL INFORMATION	4
TEST ENVIRONMENT	4
TEST SETUP.....	4
DUT SPECIFICATION.....	5
EMC EQUIPMENT LIST.....	6
TEST PROCEDURE.....	7
RADIATION INTERFERENCE	8
OCCUPIED BANDWIDTH	10
POWER LINE CONDUCTED INTERFERENCE.....	11



ATTESTATION STATEMENT

This equipment has been tested in accordance with the standards identified in the referenced test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report and demonstrate that the equipment complies with the appropriate standards. No modifications were made to the equipment during testing in order to demonstrate compliance with these standards.



Certificate # 0955-01

All Timco instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made by me or under my supervision, at TIMCO ENGINEERING, INC. located at 849 N.W. State Road 45, Newberry, Florida 32669.

Authorized by: Mario de Aranzeta

Signature: On file

Function: Engineer

Date: February 28, 2007



GENERAL INFORMATION

Disclaimer	The test results relate only to the items tested.
Purpose of Report	To demonstrate the DUT complies with FCC Pt 15.249 requirement for a low power unlicensed device.
Applicable Standard	Part 15.249, ANSI C63.4: 2003
Related Report/Approval	2432UC7_SEATAG21HH_15.519_TestReport.pdf

TEST ENVIRONMENT

Test Facility	The test sites used by Timco Engineering Inc. are located at 849 NW State Road 45 Newberry, FL 32669 USA.
Test Environment	Temperature: 26; Humidity: 55%

TEST SETUP

Test Supporting Equipment	Description: N/A Manufactured by: Model or FCC ID: N/A
Test Exercise (e.g. software description, test signal, etc.)	The DUT was put in the testing mode by using applicant's software and per applicant's instruction.
Deviation from the standard(s)	No deviation
Modification to the DUT	No modification



DUT SPECIFICATION

Manufacturer:	Ubisense Limited
Product Description:	A wireless device intended to be used for the real-time location of personnel and hand-held items. It transmits ultra-wideband (UWB) pulses which are picked up by a network of basestations, allowing the 3D position of the tag to be found to an accuracy of six inches (15 cm).
FCC ID:	SEATAG21HH
Model Number:	UBITAG7024 (Ubitag V2.4)
Brand Name:	Ubisense
Operating Frequency:	2402-2480.3 MHz
Emission Designator:	N/A
EUT Power Source:	Primary Power – 3 V Battery (coin type cell) Secondary Power – N/A
Test Item:	Prototype
Type of Equipment	Portable
Antennas	Patch
Antenna Connector	Permanently attached



EMC EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3/10-Meter OATS	TEI	N/A	N/A	Listed 3/27/04	3/26/07
3-Meter OATS	TEI	N/A	N/A	Listed 1/11/06	1/10/09
Antenna: Biconnical	Eaton	94455-1	1057	CAL 12/12/05	12/12/07
Antenna: Biconnical	Eaton	94455-1	1096	CAL 10/11/06	10/11/08
Antenna: Biconnical	Electro-Metrics	BIA-25	1171	CAL 4/29/05	4/29/07
Analyzer Blue Tower Quasi-Peak Adapter	HP	85650A	2811A01279	CAL 4/13/05	4/13/07
Analyzer Blue Tower RF Preselector	HP	85685A	2926A00983	CAL 9/5/05	9/5/07
Analyzer Blue Tower Spectrum Analyzer	HP	8568B	2928A04729 2848A18049	CAL 4/13/05	4/13/07
LISN	Electro-Metrics	ANS-25/2	2604	CAL 10/5/06	10/5/08
LISN	Electro-Metrics	EM-7820	2682	CAL 4/28/05	4/28/07
Antenna: Log-Periodic	Eaton	96005	1243	CAL 12/14/05	12/14/07



TEST PROCEDURE

Radiation Interference: The measurement was made per ANSI C63.4-2003 using an Agilent model 8566B spectrum analyzer, a model 85685A preselector, a model 85650A quasi-peak adapter, and an appropriate antenna. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz with an appropriate sweep speed and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a VBW greater than or equal to the RBW above 1 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The spectrum was searched to at least the tenth (10) harmonic of the fundamental.

Formula Of Conversion Factors: The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

Example:

$$\begin{array}{llll} \text{Freq (MHz)} & \text{Meter Reading} & + \text{ACF} & + \text{CL} = \text{FS} \\ 33 & 20 \text{ dBuV} & + 10.36 \text{ dB/m} & + 0.5 = 30.86 \text{ dBuV/m} @ 3m \end{array}$$

Power Line Conducted Interference: The procedure used was ANSI C63.4-2003 using a 50uH LISN. Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed. The spectrum was scanned from 0.15 to 30 MHz.

Occupied Bandwidth: A small sample of the transmitter output was fed into the spectrum analyzer and the attached plot was printed. The vertical scale is set to -10 dBm per division.

ANSI C63.4-2003 Measurement Procedures: The DUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The DUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.



RADIATION INTERFERENCE

Rules Part No.: Pt 15.249, Pt 15.209

Requirements:

Frequency	Limits
Part 15.209	
9 to 490 kHz	2400/F (kHz) μ V/m @ 300 meters
490 to 1705 kHz	24000/F (kHz) μ V/m @ 30 meters
1705 kHz to 30 MHz	29.54 dB μ V/m @ 30 meters
30 - 88	40.0 dB μ V/m @ 3 meters
80 - 216	43.5 dB μ V/m @ 3 meters
216 - 960	46.0 dB μ V/m @ 3 meters
Above 960	54.0 dB μ V/m @ 3 meters
Part 15.249	
Fundamental 902 - 928 MHz	94.0 dB μ V/m @ 3 meters
Fundamental 2.4 - 2.4835 MHz	94.0 dB μ V/m @ 3 meters
Harmonics	54.0 dB μ V/m @ 3 meters

Test Data:

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dB μ V	Ant. Polarity V/H	Duty Cycle C.F. (dB)	Coax Loss dB	Correction Factor dB/m	Field Strength dB μ V/m	Margin dB
2,402.0	2,400.00	18.9	V	-12.7	3.18	32.40	41.78	12.22
2,402.0	2,402.00	54.0	H	-12.7	3.18	32.40	76.88	17.12
2,402.0	2,402.00	56.2	V	-12.7	3.18	32.40	79.08	14.92
2,402.0	4,805.00	19.3	H	-12.7	4.90	34.88	46.38	47.62
2,402.0	4,805.00	21.1	V	-12.7	4.90	34.88	48.18	5.82
2,402.0	7,207.00	21.0	H	-12.7	5.72	35.88	49.9	4.1
2,402.0	7,207.00	22.0	V	-12.7	5.72	35.88	50.9	3.1

The spectrum was checked to the tenth harmonic.

[Continued]



Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity V/H	Duty Cycle C.F. (dB)	Coax Loss dB	ACF dB/m	Field Strength dBuV/m	Margin dB
2,441.7	2,441.70	50.5	H	-12.7	3.21	32.48	73.49	20.51
2,441.7	2,441.70	57.1	V	-12.7	3.21	32.48	80.09	13.91
2,441.7	4,883.30	17.8	H	-12.7	4.94	34.93	44.97	9.03
2,441.7	4,883.30	23.4	V	-12.7	4.94	34.93	50.57	3.43
2,441.7	7,325.00	23.4	H	-12.7	5.74	35.86	52.3	1.70
2,441.7	7,325.00	24.8	V	-12.7	5.74	35.81	53.65	0.35
2,480.5	2,480.50	54.7	H	-12.7	3.24	32.56	77.8	16.2
2,480.5	2,480.50	56.4	V	-12.7	3.24	32.56	79.5	14.5
2,480.5	2,483.50	10.8	V	-12.7	3.24	32.57	33.91	20.09
2,480.5	4,961.00	16.8	H	-12.7	4.98	34.98	44.06	9.94
2,480.5	4,961.00	21.2	V	-12.7	4.98	34.98	48.46	5.54
2,480.5	7,441.00	19.7	H	-12.7	5.86	35.74	48.6	5.4
2,480.5	7,441.00	24.0	V	-12.7	5.86	35.74	52.9	1.1

The spectrum was checked to the tenth harmonic.

Emissions below 1 GHz


Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity V/H	Coax Loss dB	Correction Factor dB/m	Field Strength dBuV/m	Margin dB
81.14	5.3	V	0.60	6.95	12.85	27.15
85.78	6.4	V	0.61	8.07	15.08	24.92
381.39	6.3	H	1.18	15.46	22.94	23.06

OCCUPIED BANDWIDTH

Rules Part No.: Pt 15.249 (d)

Requirements: The field strength of any emissions appearing outside the bandedges and up to 10 kHz above and below the band edges shall be attenuated at least 50 dB below the level of the carrier or to the general limits of 15.209. Whichever is the lesser.

Test Data:

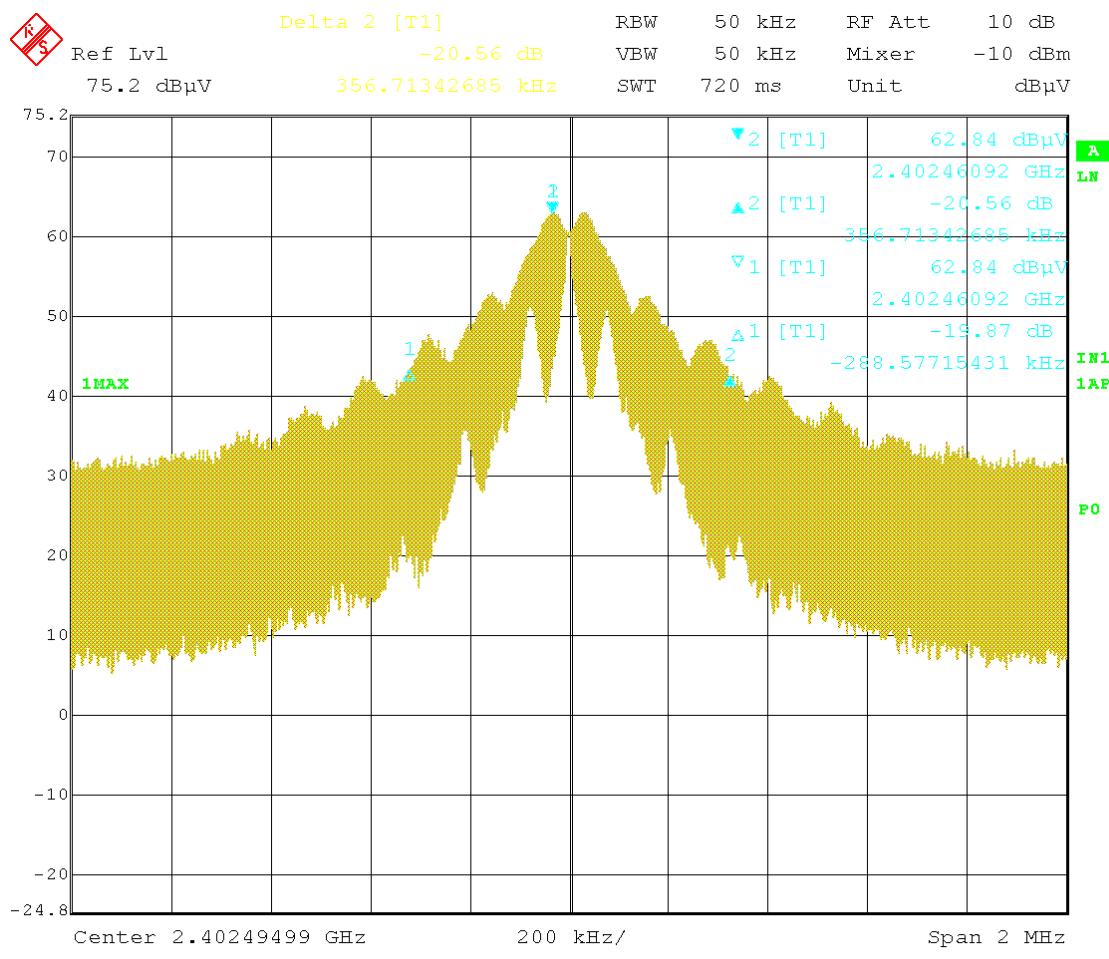



POWER LINE CONDUCTED INTERFERENCE

Rules Part No.: Pt 15.207

Requirements:

Frequency (MHz)	Quasi Peak Limits (dBuV)	Average Limits (dBuV)
0.15 – 0.5	66 – 56 *	56 – 46 *
0.5 – 5.0	56	46
5.0 – 30	60	50

* Decreases with logarithm of frequency

Test Data: Not applicable because the DUT is battery operated exclusively.