

FCC TEST REPORT

REPORT NO.: RF950616L04F

MODEL NO.: WRT-372U

RECEIVED: Mar. 20, 2007

TESTED: Mar. 29 ~ Apr. 04, 2007

ISSUED: Apr. 10, 2007

APPLICANT: U-MEDIA Communications, Inc.

ADDRESS: 9F, No. 1, Jin-shan 7th St., Hsinchu 300, Taiwan,
R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: 47 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang
244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan,
R.O.C.

This test report consists of 130 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



No. 2177-01



0528

TABLE OF CONTENTS

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	5
3.	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	8
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	9
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	11
3.4	DESCRIPTION OF SUPPORT UNITS	11
4.	TEST TYPES AND RESULTS	12
4.1	CONDUCTED EMISSION MEASUREMENT	12
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	12
4.1.2	TEST INSTRUMENTS	12
4.1.3	TEST PROCEDURES	13
4.1.4	DEVIATION FROM TEST STANDARD	13
4.1.5	TEST SETUP	14
4.1.6	EUT OPERATING CONDITIONS	14
4.1.7	TEST RESULTS	15
4.2	RADIATED EMISSION MEASUREMENT	51
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	51
4.2.2	TEST INSTRUMENTS	52
4.2.3	TEST PROCEDURES	53
4.2.4	DEVIATION FROM TEST STANDARD	53
4.2.5	TEST SETUP	54
4.2.6	EUT OPERATING CONDITIONS	54
4.2.7	TEST RESULTS	55
4.3	6dB BANDWIDTH MEASUREMENT	73
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	73
4.3.2	TEST INSTRUMENTS	73
4.3.3	TEST PROCEDURE	73
4.3.4	DEVIATION FROM TEST STANDARD	73
4.3.5	TEST SETUP	74
4.3.6	EUT OPERATING CONDITIONS	74
4.3.7	TEST RESULTS	75
4.4	MAXIMUM PEAK OUTPUT POWER	89
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	89
4.4.2	INSTRUMENTS	89
4.4.3	TEST PROCEDURES	89
4.4.4	DEVIATION FROM TEST STANDARD	89
4.4.5	TEST SETUP	90
4.4.6	EUT OPERATING CONDITIONS	90
4.4.7	TEST RESULTS	91
4.5	POWER SPECTRAL DENSITY MEASUREMENT	93
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	93
4.5.2	TEST INSTRUMENTS	93
4.5.3	TEST PROCEDURE	93
4.5.4	DEVIATION FROM TEST STANDARD	93

4.5.5	TEST SETUP	94
4.5.6	EUT OPERATING CONDITION	94
4.5.7	TEST RESULTS	95
4.6	BAND EDGES MEASUREMENT	109
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	109
4.6.2	TEST INSTRUMENTS	109
4.6.3	TEST PROCEDURE	110
4.6.4	DEVIATION FROM TEST STANDARD	110
4.6.5	EUT OPERATING CONDITION	111
4.6.6	TEST RESULTS	111
4.7	ANTENNA REQUIREMENT	127
4.7.1	STANDARD APPLICABLE	127
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	127
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	128
6.	INFORMATION ON THE TESTING LABORATORIES	129
APPENDIX-A.....		A-1

1. CERTIFICATION

PRODUCT : 2.4GHz Wireless 802.11n(DRAFT) Router

MODEL NO.: WRT-372U

BRAND: U-MEDIA

APPLICANT : U-MEDIA Communications, Inc.

TESTED: Mar. 29 ~ Apr. 04, 2007

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment (Model: WRT-372U) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Andrea Hsia, **DATE:** Apr. 10, 2007
Andrea Hsia

TECHNICAL
ACCEPTANCE : Long Chen, **DATE:** Apr. 10, 2007
Responsible for RF Long Chen

APPROVED BY : Gary Chang, **DATE:** Apr. 10, 2007
Gary Chang / Supervisor

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -13.87dB at 2.090MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit : min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.00dB at 2488.00MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz ~ 30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.59 dB
	200MHz ~1000MHz	3.61 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	2.4GHz Wireless 802.11n(DRAFT) Router
MODEL NO.	WRT-372U
FCC ID	SI5WRT372U
POWER SUPPLY	12.0Vdc from AC adapter 5.0Vdc from AC adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps Draft 802.11n (20MHz): 144.44/ 130.00/ 115.56/ 86.67/ 57.78/ 43.33/ 28.89/ 14.44/ 72.2/ 65.0/ 57.8/ 43.3/ 28.9/ 21.7/ 14.4/ 7.2Mbps Draft 802.11n (40MHz): 300.0/ 270.0/ 240.0/ 180.0/ 120.0/ 90.0/ 60.0/ 30.0/ 150.0/ 135.0/ 120.0/ 90.0/ 60.0/ 45.0/ 30.0/ 15.0Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11 for 802.11b, 802.11g, Draft 802.11n (20MHz) 7 for Draft 802.11n (40MHz)
MAXIMUM OUTPUT POWER	81.138mW
ANTENNA TYPE	Dipole antenna with 4dBi gain
DATA CABLE	NA
I/O PORTS	RJ45
ASSOCIATED DEVICES	Adapter

NOTE:

1. This report is issued as a supplementary report of ADT report no.: RF950616L04. This report is prepared for FCC class II permissive change. The differences compared with the original design are adding a new adapter and re-layout (didn't change the RF circuit and design). Therefore we re-tested all the test items and presented in the test report.
2. There are two types for the EUT one is with USB port & RX connector and the other without USB port & RX connector.
3. The EUT were powered by the following adapters

(For New Adapter) :

Brand	LEADER ELECTRONICS INC
Model	MT12-4120100-A1
Input Power	120Vac, 60Hz, 0.3A
Output Power	12Vdc, 1A
Power Cord	DC 1.8m shielded cable without core

(For Original Adapter):

Brand	DVE
Model	DSA-15P-05 US 050125
Input Power	100-240Vac, 50/60Hz, 0.5A
Output Power	5.0Vdc, 2.5A
Power Cord	DC 1.8m shielded cable without core

**The EUT with USB port only could power by 5Vdc, and the one without only could power by 12Vdc.

4. The EUT incorporates a MIMO function with 802.11b, 802.11g, draft 802.11n. Physically, the card provides two completed transmitters and three receivers.
5. The EUT is 2 * 3 spatial MIMO (2Tx & 3Rx) without beam forming function that only operate dual chain configuration (chain 0 and chain 1 transceivers are operational).
6. When the EUT operating in 802.11b is for single Tx.
7. When the EUT operating in 802.11g, the software operation, which is defined by manufacturer, only set dual Tx.
8. When the EUT operating in draft 802.11n, the software operation, which is defined by manufacturer, only set 0 ~ 15 of "MCS" (MCS: Modulation and Coding Schemes) for dual Tx.
9. The EUT complies with draft 802.11n standards and backwards compatible with 802.11b, 802.11g products.
10. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 300Mbps.
11. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.
12. Notebook sends commands via extend card to control EUT transmit continuously.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided for 802.11b, 802.11g, draft 802.11n (20MHz):


CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Seven channels are provided for draft 802.11n (40MHz):


CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2422MHz	5	2442MHz
2	2427MHz	6	2447MHz
3	2432MHz	7	2452MHz
4	2437MHz		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

TEST MODE A

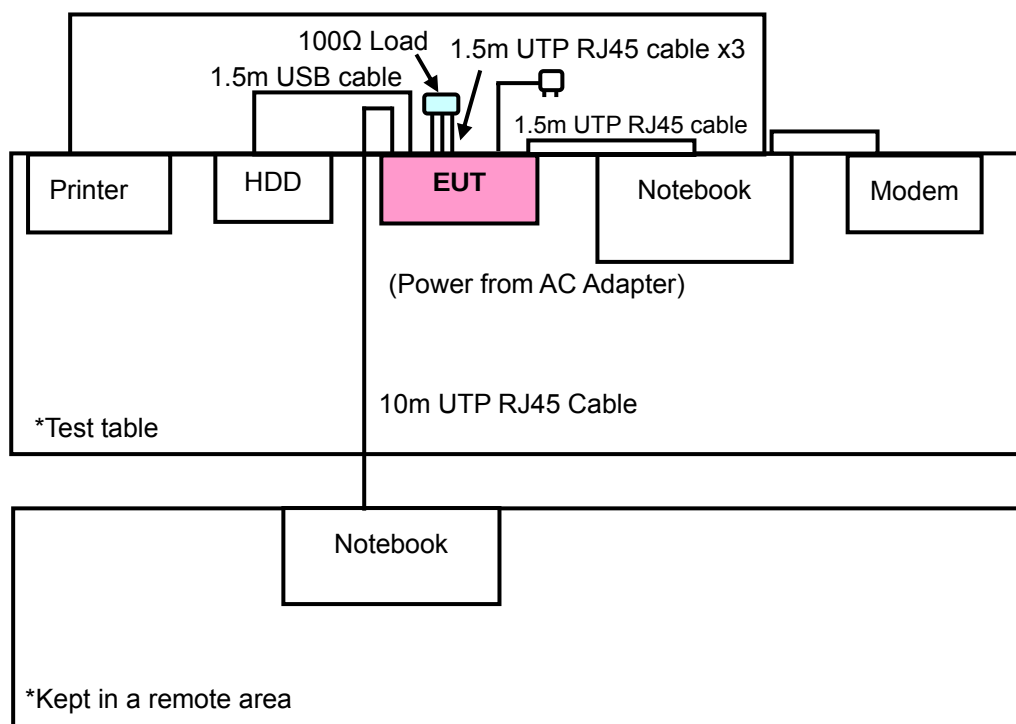

TEST MODE B

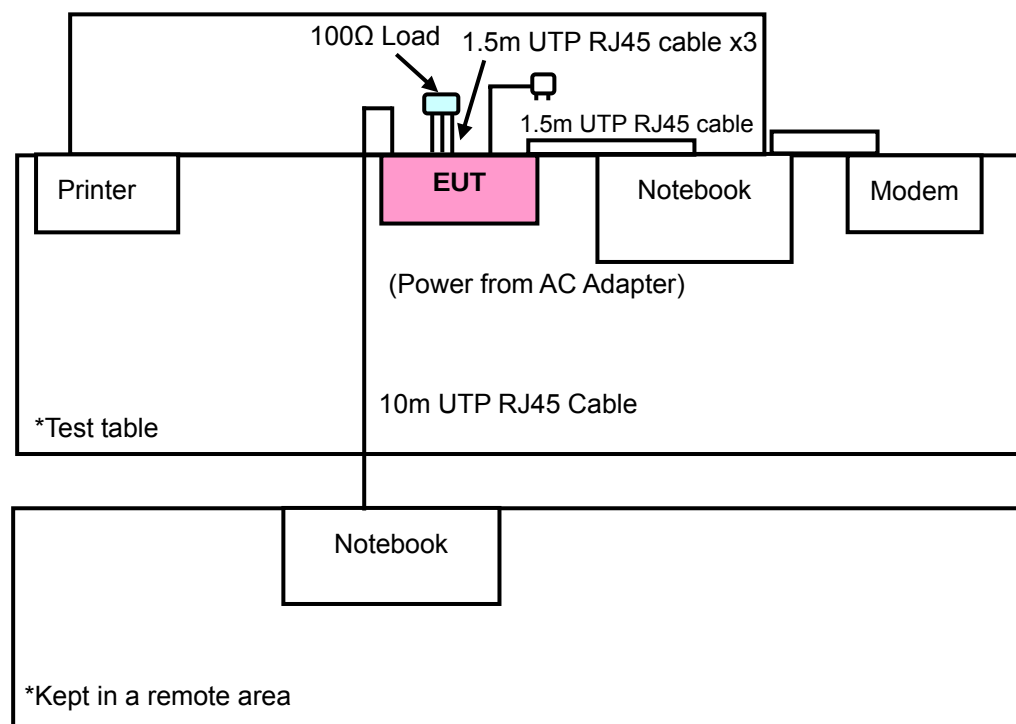

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	
A	√	√	-	-	Power from 5Vdc AC adapter (with USB)
B	√	√	√	√	Power from 12Vdc AC adapter (without USB)

Where **PLC:** Power Line Conducted Emission

RE < 1G: Radiated Emission below 1GHz

RE ≥ 1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

Note: “-” means no effect.

POWER LINE CONDUCTED EMISSION TEST:

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX CONDITION
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0	Dual
B	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0	Dual
A	Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2	Dual
B	Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2	Dual
A	Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	15.0	Dual
B	Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	15.0	Dual

RADIATED EMISSION TEST (BELOW 1 GHz):

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX CONDITION
A	802.11g	1 to 11	1	OFDM	BPSK	6.0	Dual
B	802.11g	1 to 11	1	OFDM	BPSK	6.0	Dual
A	Draft 802.11n (20MHz)	1 to 11	1	OFDM	BPSK	7.2	Dual
B	Draft 802.11n (20MHz)	1 to 11	1	OFDM	BPSK	7.2	Dual
A	Draft 802.11n (40MHz)	1 to 7	1	OFDM	BPSK	15.0	Dual
B	Draft 802.11n (40MHz)	1 to 7	1	OFDM	BPSK	15.0	Dual

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX CONDITION
B	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0	Single
B	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0	Dual
B	Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2	Dual
B	Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	15.0	Dual

BANDEDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX CONDITION
B	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0	Single
B	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0	Dual
B	Draft 802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	7.2	Dual
B	Draft 802.11n (40MHz)	1 to 7	1, 7	OFDM	BPSK	15.0	Dual

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX CONDITION
B	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0	Single
B	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0	Dual
B	Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	7.2	Dual
B	Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	15.0	Dual

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	16484462992	E2K24CLNS
2	PRINTER	EPSON	LQ-300+	DCGY054147	FCC DoC Approved
3	MODEM	ACEEX	1414V/3	0401008269	IFAXDM1414
4	FIREWIRE HARD DRIVE	Terasys	F12-UF	A0100222-4A60001	FCC DoC Approved
5	100Ω LOAD	NA	NA	NA	NA
6	NOTEBOOK COMPUTER	DELL	PP05L	12130898320	E2K24CLNS

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	1.5m UTP RJ45 cable
2	1.2m shielded cable
3	1.3m shielded cable
4	1.5m shielded cable
5	NA
6	10m UTP RJ45 cable

NOTE: 1. All power cords of the above support units are non shielded (1.8m).
2. Item 6 acted as communication partners to transfer data.

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Dec. 07, 2007
RF signal cable Woken	5D-FB	Cable-HYC01-01	Jan. 06, 2008
LISN ROHDE & SCHWARZ	ESH3-Z5	100312	Feb. 13, 2008
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Sep. 14, 2007
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

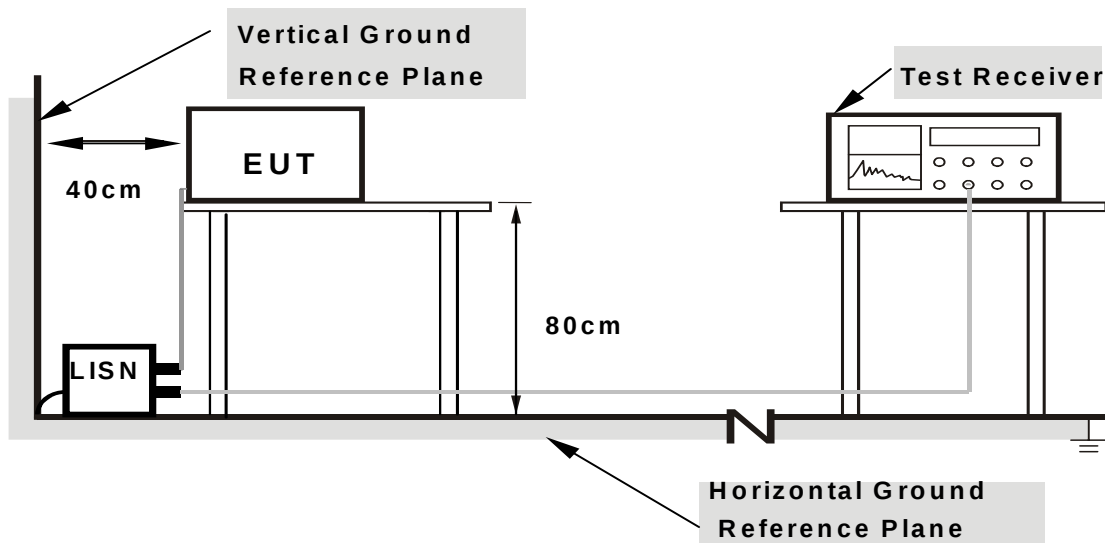

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- Connected the EUT to the Notebook system and placed on a testing table.
- Prepared a notebook computer and placed it outside of testing area to act as communication partner for EUT.
- The Notebook system ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.


4.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA: 802.11g OFDM MODULATION – DUAL TX:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	A
TESTED BY	Match Tsui		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.21	40.42	-	40.63	-	65.58	55.58	-24.95	-
2	0.259	0.21	36.93	-	37.14	-	61.45	51.45	-24.31	-
3	0.318	0.21	44.22	-	44.43	-	59.76	49.76	-15.33	-
4	0.533	0.22	35.79	-	36.01	-	56.00	46.00	-19.99	-
5	3.340	0.35	28.29	-	28.64	-	56.00	46.00	-27.36	-
6	13.129	0.67	28.17	-	28.84	-	60.00	50.00	-31.16	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

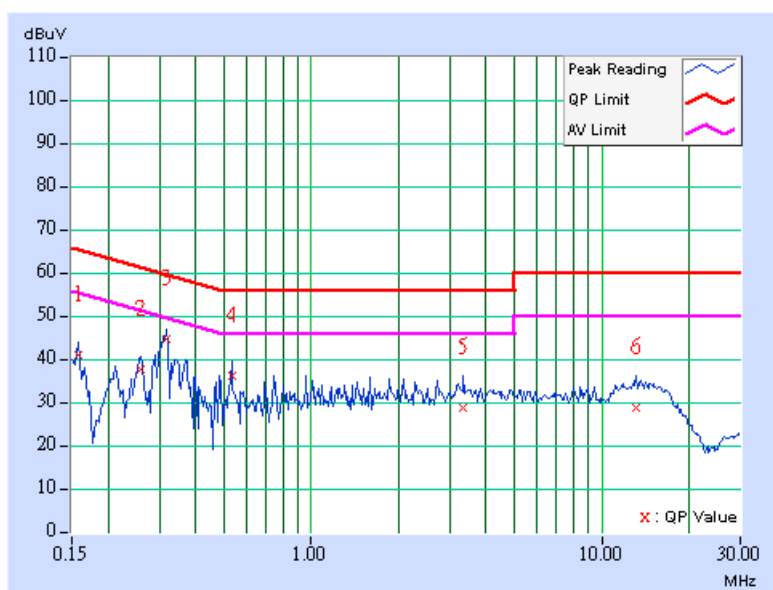

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	A
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.155	0.21	40.22	-	40.43	-	65.72	55.72	-25.29	-
2	0.213	0.21	36.63	-	36.84	-	63.11	53.11	-26.27	-
3	0.317	0.21	41.08	-	41.29	-	59.79	49.79	-18.50	-
4	0.740	0.23	29.63	-	29.86	-	56.00	46.00	-26.14	-
5	3.180	0.34	25.33	-	25.67	-	56.00	46.00	-30.33	-
6	9.708	0.53	22.21	-	22.74	-	60.00	50.00	-37.26	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

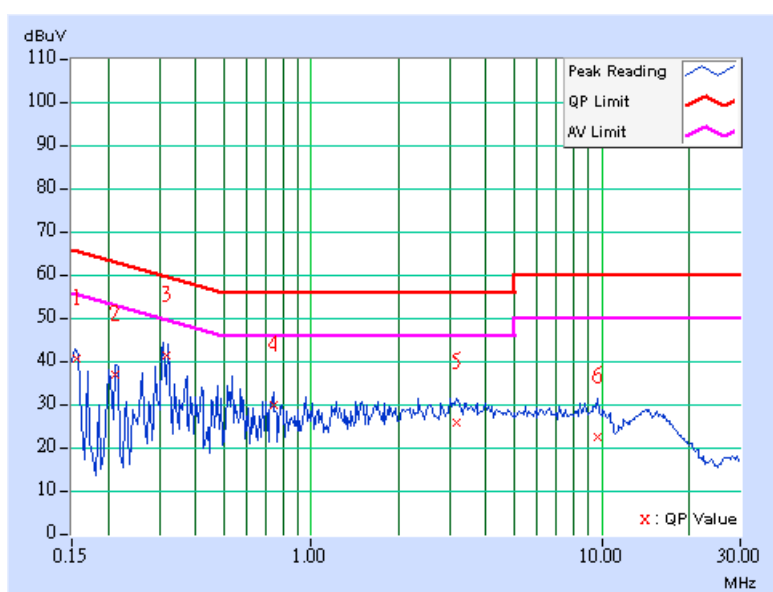

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	A
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.21	39.50	-	39.71	-	65.79	55.79	-26.08	-
2	0.209	0.21	35.21	-	35.42	-	63.26	53.26	-27.84	-
3	0.314	0.21	43.99	-	44.20	-	59.86	49.86	-15.66	-
4	0.529	0.22	36.29	-	36.51	-	56.00	46.00	-19.49	-
5	1.219	0.24	31.78	-	32.02	-	56.00	46.00	-23.98	-
6	15.270	0.77	27.81	-	28.58	-	60.00	50.00	-31.42	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

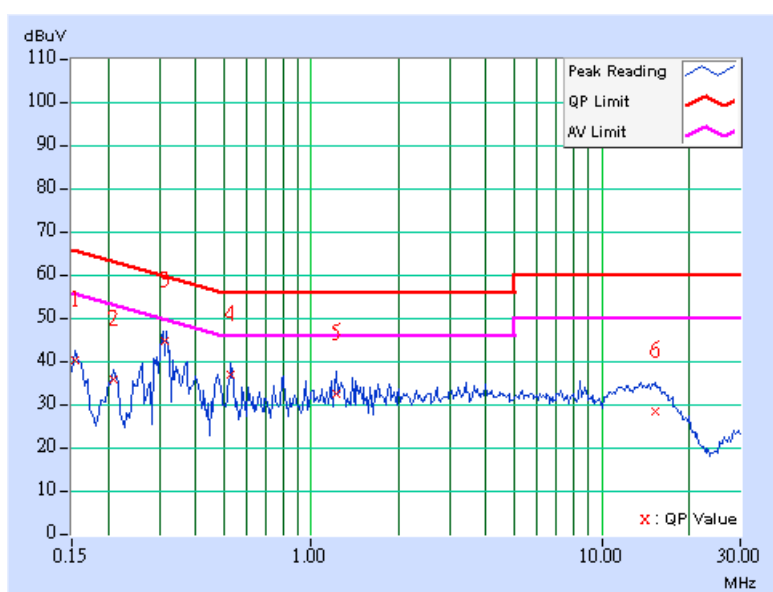

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	A
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.21	39.44	-	39.65	-	65.58	55.58	-25.93	-
2	0.209	0.21	37.73	-	37.94	-	63.26	53.26	-25.32	-
3	0.314	0.21	42.28	-	42.49	-	59.86	49.86	-17.37	-
4	0.525	0.22	33.26	-	33.48	-	56.00	46.00	-22.52	-
5	2.805	0.31	25.89	-	26.20	-	56.00	46.00	-29.80	-
6	8.762	0.51	21.73	-	22.24	-	60.00	50.00	-37.76	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

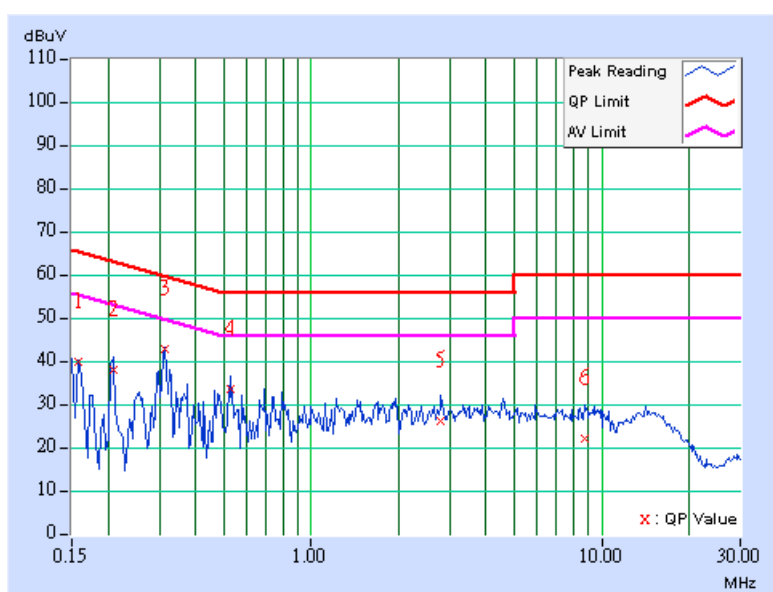

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	A
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.157	0.21	39.66	-	39.87	-	65.63	55.63	-25.77	-
2	0.259	0.21	37.21	-	37.42	-	61.45	51.45	-24.03	-
3	0.314	0.21	44.41	-	44.62	-	59.86	49.86	-15.24	-
4	0.533	0.22	36.37	-	36.59	-	56.00	46.00	-19.41	-
5	2.074	0.26	30.26	-	30.52	-	56.00	46.00	-25.48	-
6	14.742	0.74	28.33	-	29.07	-	60.00	50.00	-30.93	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

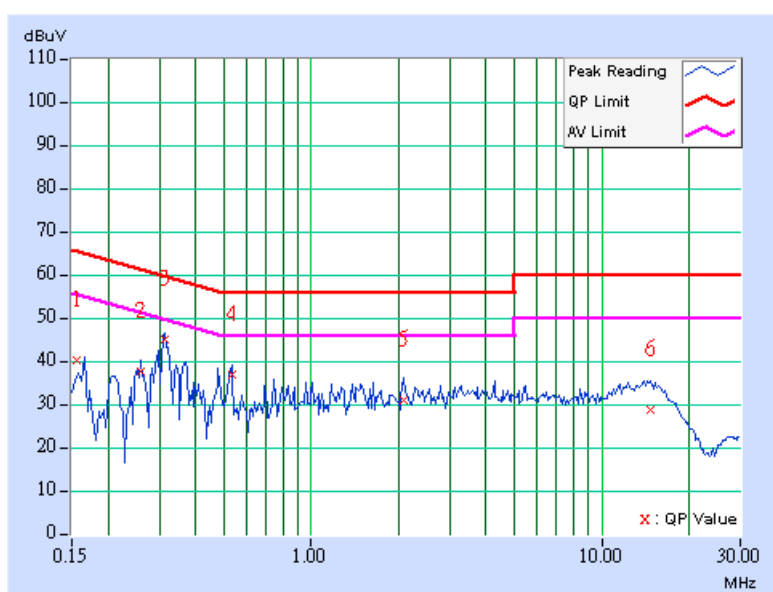

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	A
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.21	38.85	-	39.06	-	65.58	55.58	-26.52	-
2	0.209	0.21	37.67	-	37.88	-	63.26	53.26	-25.38	-
3	0.314	0.21	42.32	-	42.53	-	59.86	49.86	-17.33	-
4	0.530	0.22	33.66	-	33.88	-	56.00	46.00	-22.12	-
5	3.285	0.34	24.62	-	24.96	-	56.00	46.00	-31.04	-
6	14.832	0.45	22.23	-	22.68	-	60.00	50.00	-37.32	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

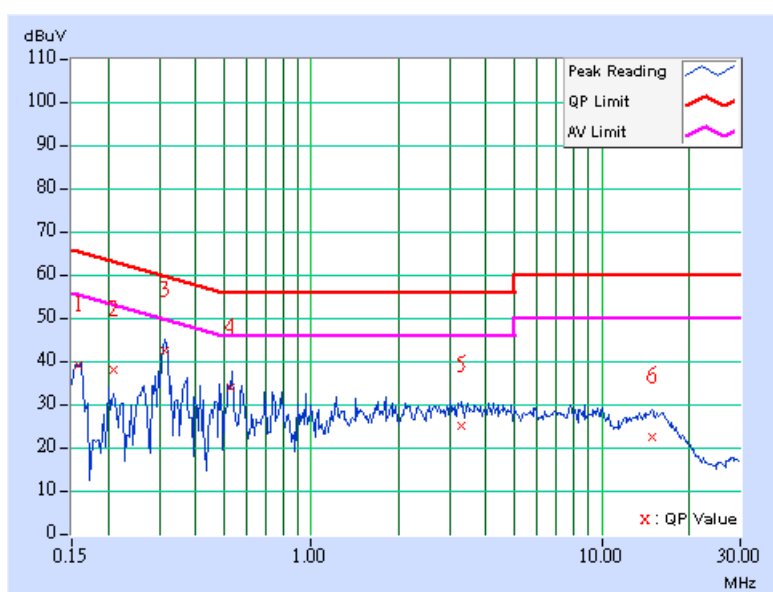

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	B
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.197	0.21	35.83	-	36.04	-	63.75	53.75	-27.71	-
2	0.400	0.21	34.94	-	35.15	-	57.85	47.85	-22.70	-
3	0.603	0.22	35.40	-	35.62	-	56.00	46.00	-20.38	-
4	1.887	0.26	40.27	-	40.53	-	56.00	46.00	-15.47	-
5	4.379	0.40	33.63	-	34.03	-	56.00	46.00	-21.97	-
6	11.500	0.60	28.29	-	28.89	-	60.00	50.00	-31.11	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

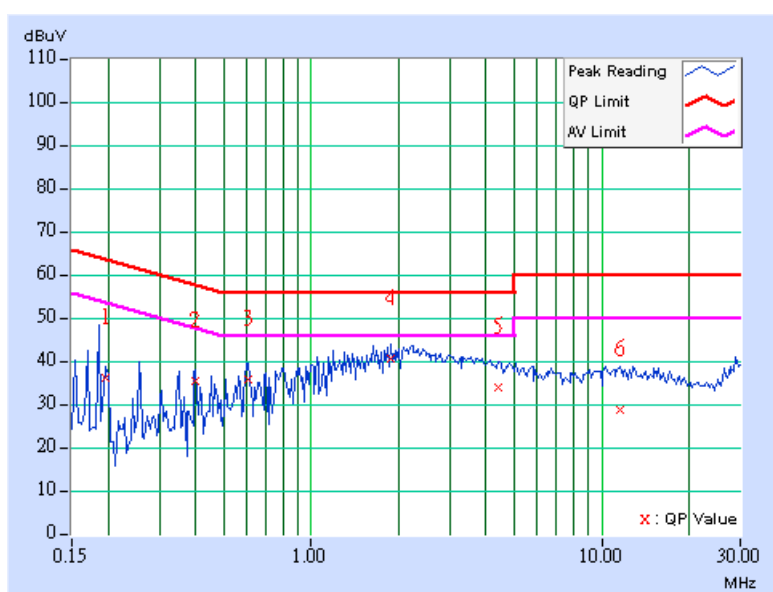

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	B
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.21	43.86	-	44.07	-	66.00	56.00	-21.93	-
2	0.349	0.21	41.43	-	41.64	-	58.98	48.98	-17.34	-
3	0.677	0.22	39.32	-	39.54	-	56.00	46.00	-16.46	-
4	1.543	0.25	40.45	-	40.70	-	56.00	46.00	-15.30	-
5	4.113	0.39	32.68	-	33.07	-	56.00	46.00	-22.93	-
6	12.000	0.50	30.45	-	30.95	-	60.00	50.00	-29.05	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

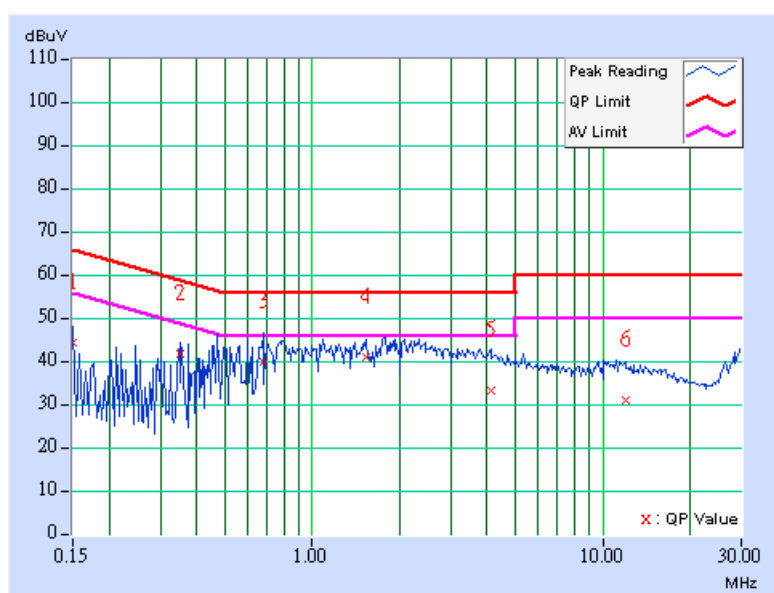

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	B
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.21	39.82	-	40.03	-	65.79	55.79	-25.76	-
2	0.252	0.21	37.93	-	38.14	-	61.71	51.71	-23.57	-
3	0.595	0.22	36.71	-	36.93	-	56.00	46.00	-19.07	-
4	1.891	0.26	39.50	-	39.76	-	56.00	46.00	-16.24	-
5	3.672	0.37	35.75	-	36.12	-	56.00	46.00	-19.88	-
6	11.559	0.61	28.85	-	29.46	-	60.00	50.00	-30.54	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

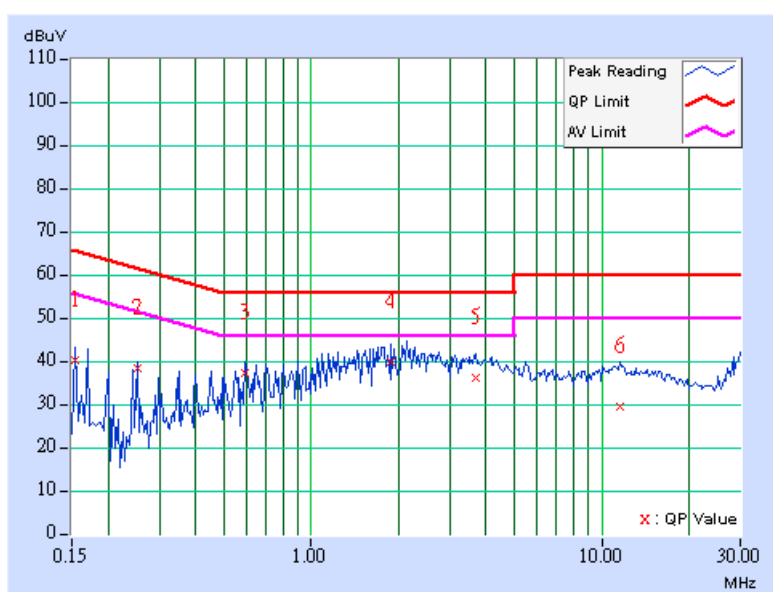

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	B
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.21	43.52	-	43.73	-	66.00	56.00	-22.27	-
2	0.349	0.21	41.57	-	41.78	-	58.98	48.98	-17.20	-
3	0.509	0.22	39.07	-	39.29	-	56.00	46.00	-16.71	-
4	0.814	0.23	38.19	-	38.42	-	56.00	46.00	-17.58	-
5	2.383	0.28	41.17	-	41.45	-	56.00	46.00	-14.55	-
6	11.301	0.52	30.96	-	31.48	-	60.00	50.00	-28.52	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

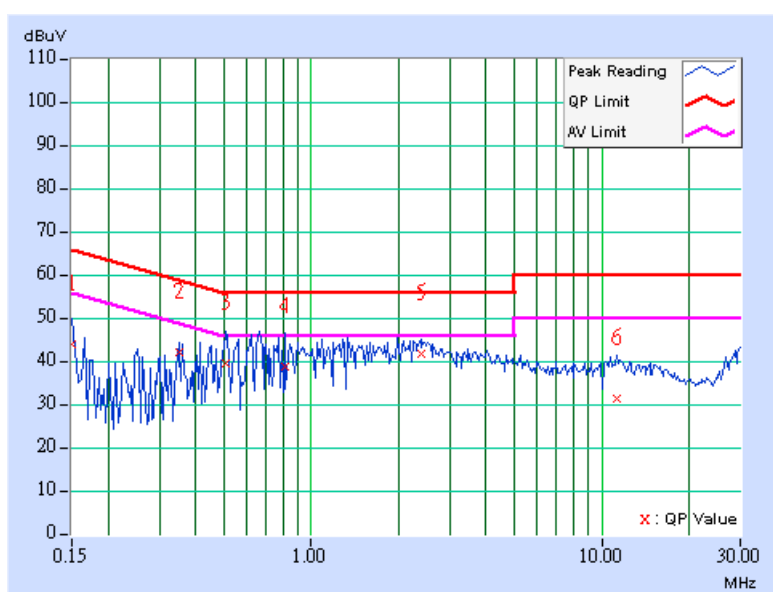

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	B
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.21	39.80	-	40.01	-	65.79	55.79	-25.78	-
2	0.251	0.21	38.43	-	38.64	-	61.73	51.73	-23.09	-
3	0.798	0.23	35.73	-	35.96	-	56.00	46.00	-20.04	-
4	2.236	0.28	40.24	-	40.52	-	56.00	46.00	-15.48	-
5	4.270	0.40	35.25	-	35.65	-	56.00	46.00	-20.35	-
6	11.758	0.61	30.22	-	30.83	-	60.00	50.00	-29.17	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

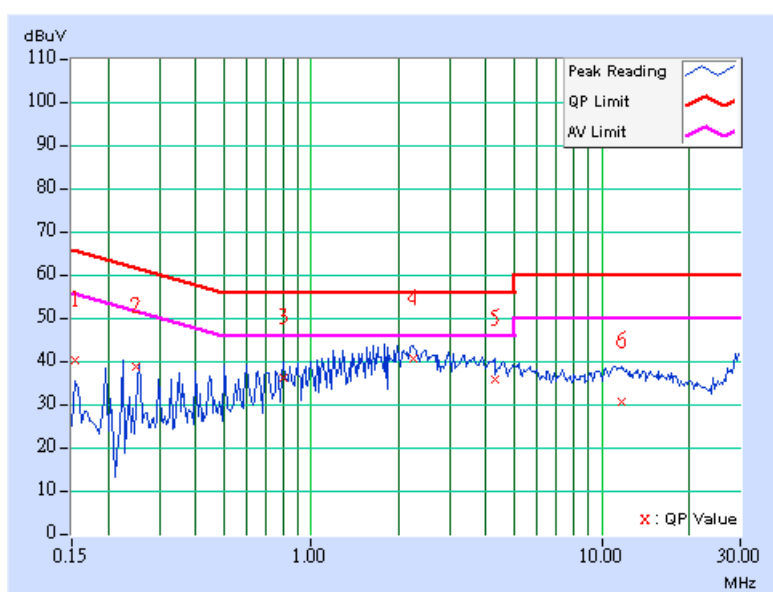

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	6.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	B
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.213	0.21	39.54	-	39.75	-	63.11	53.11	-23.36	-
2	0.365	0.21	36.48	-	36.69	-	58.62	48.62	-21.93	-
3	0.716	0.23	38.87	-	39.10	-	56.00	46.00	-16.90	-
4	2.133	0.27	40.86	-	41.13	-	56.00	46.00	-14.87	-
5	3.672	0.37	37.24	-	37.61	-	56.00	46.00	-18.39	-
6	10.172	0.54	32.32	-	32.86	-	60.00	50.00	-27.14	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

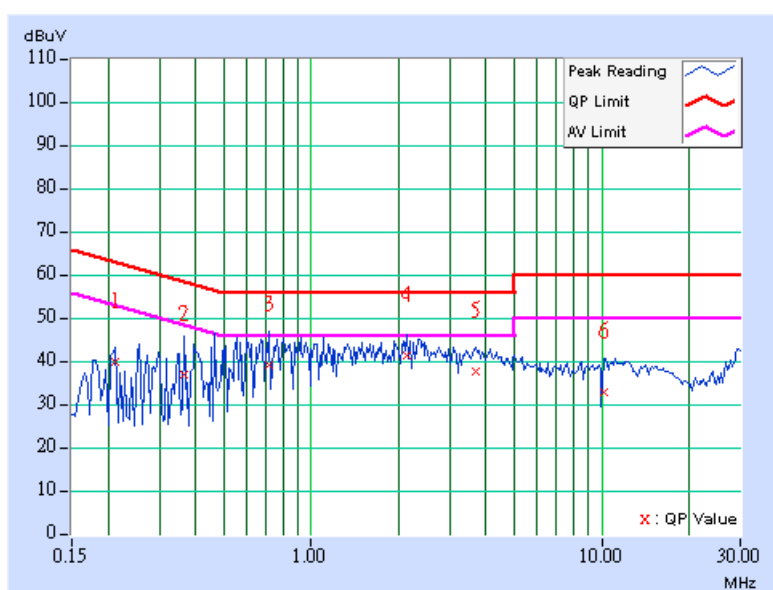


DRAFT 802.11n (20MHz) OFDM MODULATION – DUAL TX:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	7.2Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	A
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.21	34.32	-	34.53	-	65.38	55.38	-30.85	-
2	0.189	0.21	33.26	-	33.47	-	64.08	54.08	-30.61	-
3	0.377	0.21	37.53	-	37.74	-	58.35	48.35	-20.61	-
4	0.931	0.24	32.44	-	32.68	-	56.00	46.00	-23.32	-
5	3.602	0.36	33.63	-	33.99	-	56.00	46.00	-22.01	-
6	10.906	0.58	28.52	-	29.10	-	60.00	50.00	-30.90	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

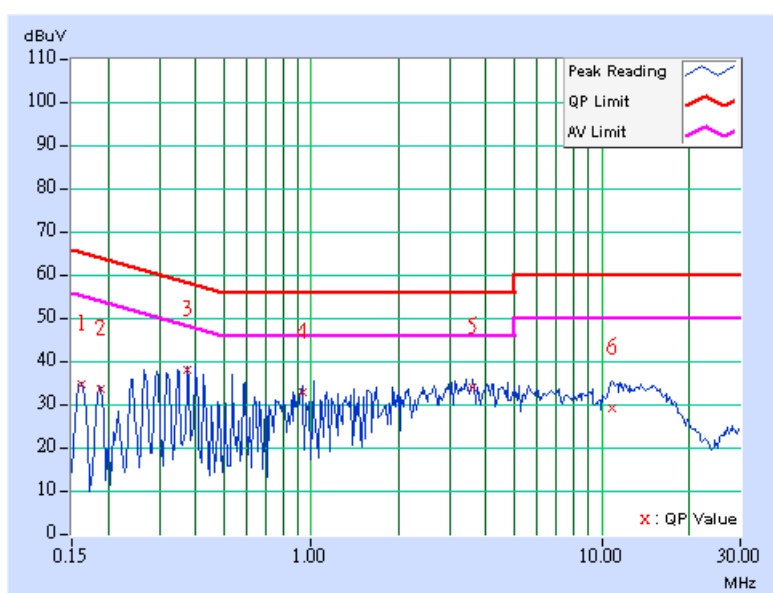

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	7.2Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	A
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.21	36.39	-	36.60	-	65.58	55.58	-28.98	-
2	0.185	0.21	37.93	-	38.14	-	64.25	54.25	-26.11	-
3	0.341	0.21	38.15	-	38.36	-	59.17	49.17	-20.81	-
4	0.584	0.22	32.58	-	32.80	-	56.00	46.00	-23.20	-
5	2.863	0.32	26.03	-	26.35	-	56.00	46.00	-29.65	-
6	8.108	0.49	27.26	-	27.75	-	60.00	50.00	-32.25	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

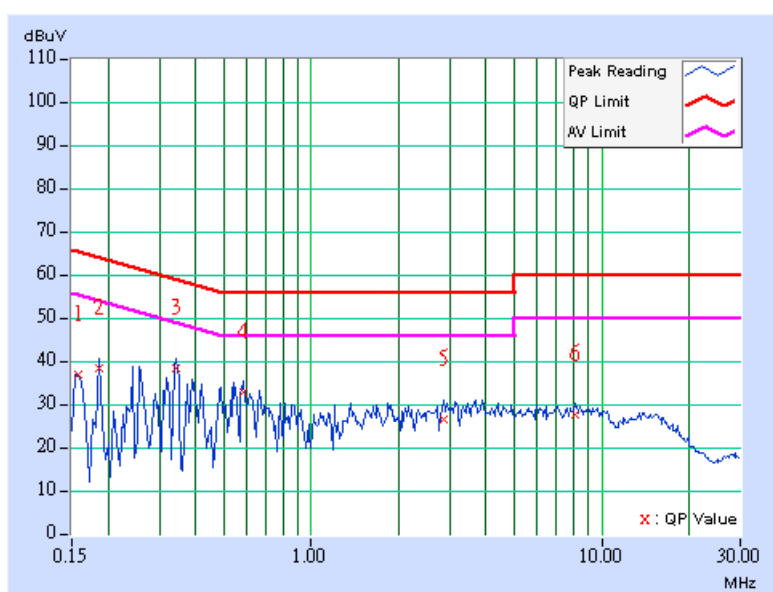

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	7.2Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	A
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.189	0.21	33.22	-	33.43	-	64.08	54.08	-30.65	-
2	0.295	0.21	36.43	-	36.64	-	60.40	50.40	-23.76	-
3	0.538	0.22	36.72	-	36.94	-	56.00	46.00	-19.06	-
4	1.129	0.24	32.09	-	32.33	-	56.00	46.00	-23.67	-
5	3.078	0.33	29.66	-	29.99	-	56.00	46.00	-26.01	-
6	11.516	0.60	29.86	-	30.46	-	60.00	50.00	-29.54	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

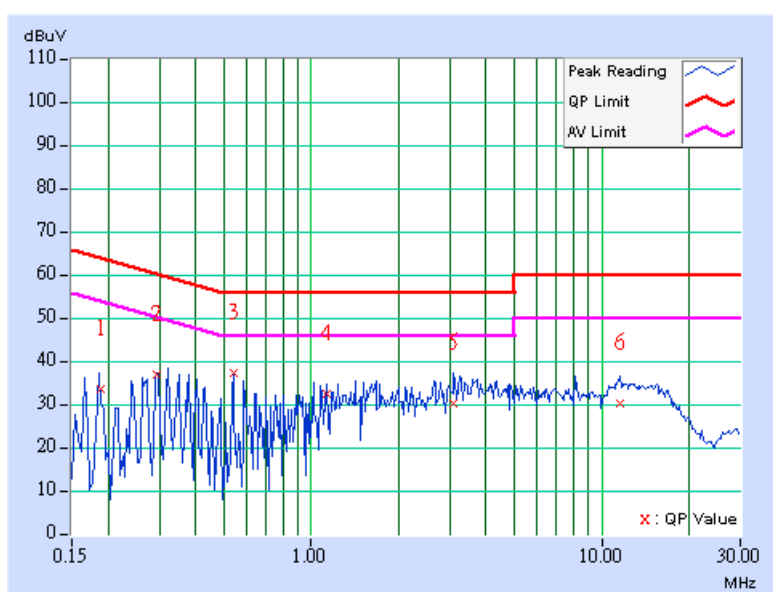

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	7.2Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	A
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.21	33.54	-	33.75	-	65.38	55.38	-31.63	-
2	0.240	0.21	36.92	-	37.13	-	62.10	52.10	-24.97	-
3	0.588	0.22	34.93	-	35.15	-	56.00	46.00	-20.85	-
4	0.877	0.23	28.33	-	28.56	-	56.00	46.00	-27.44	-
5	3.617	0.37	28.81	-	29.18	-	56.00	46.00	-26.82	-
6	8.066	0.49	26.94	-	27.43	-	60.00	50.00	-32.57	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

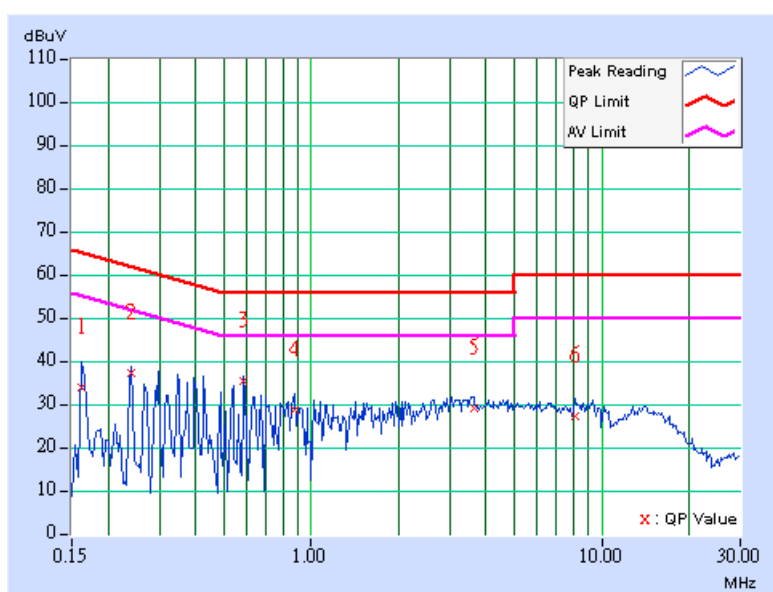

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	7.2Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	A
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.189	0.21	33.42	-	33.63	-	64.08	54.08	-30.45	-
2	0.377	0.21	38.31	-	38.52	-	58.35	48.35	-19.83	-
3	0.537	0.22	36.72	-	36.94	-	56.00	46.00	-19.06	-
4	1.418	0.25	31.68	-	31.93	-	56.00	46.00	-24.07	-
5	3.391	0.35	29.96	-	30.31	-	56.00	46.00	-25.69	-
6	11.465	0.60	31.10	-	31.70	-	60.00	50.00	-28.30	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

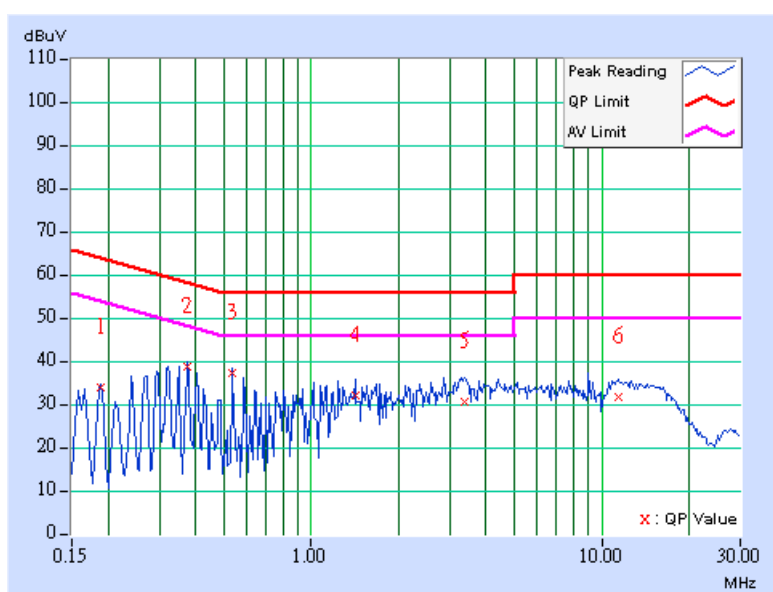

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	7.2Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	A
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.189	0.21	37.17	-	37.38	-	64.08	54.08	-26.70	-
2	0.348	0.21	36.09	-	36.30	-	59.01	49.01	-22.71	-
3	0.537	0.22	35.92	-	36.14	-	56.00	46.00	-19.86	-
4	1.074	0.24	29.64	-	29.88	-	56.00	46.00	-26.12	-
5	3.133	0.33	29.13	-	29.46	-	56.00	46.00	-26.54	-
6	9.301	0.52	28.42	-	28.94	-	60.00	50.00	-31.06	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

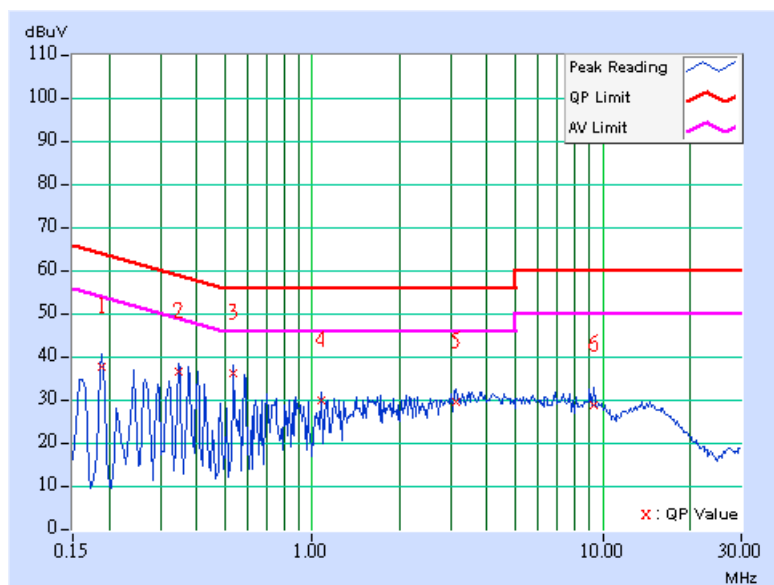

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	7.2Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	B
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.21	44.97	-	45.18	-	66.00	56.00	-20.82	-
2	0.252	0.21	39.11	-	39.32	-	61.71	51.71	-22.39	-
3	0.707	0.23	35.42	-	35.65	-	56.00	46.00	-20.35	-
4	1.445	0.25	37.79	-	38.04	-	56.00	46.00	-17.96	-
5	3.281	0.34	35.65	-	35.99	-	56.00	46.00	-20.01	-
6	10.742	0.57	29.13	-	29.70	-	60.00	50.00	-30.30	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

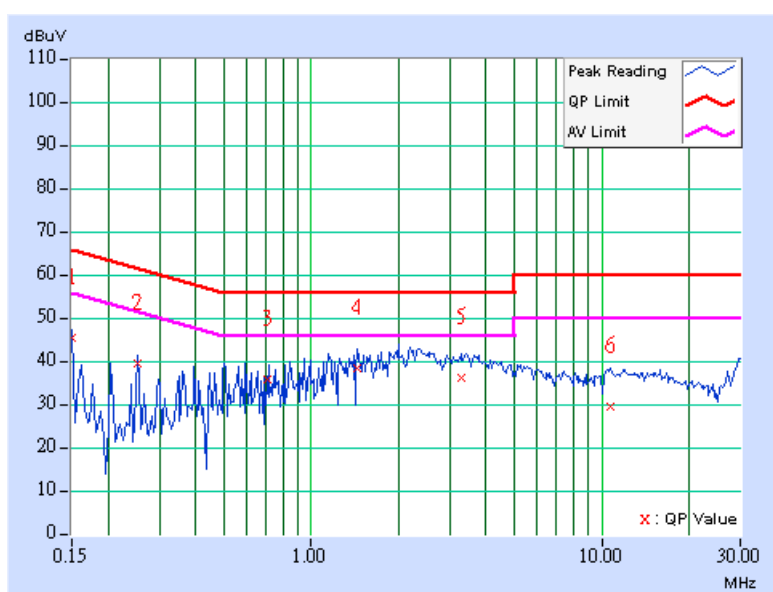

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	7.2Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	B
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.21	43.75	-	43.96	-	65.79	55.79	-21.83	-
2	0.181	0.21	37.08	-	37.29	-	64.43	54.43	-27.14	-
3	0.568	0.22	40.54	-	40.76	-	56.00	46.00	-15.24	-
4	1.898	0.26	40.40	-	40.66	-	56.00	46.00	-15.34	-
5	3.645	0.37	36.54	-	36.91	-	56.00	46.00	-19.09	-
6	10.754	0.53	31.57	-	32.10	-	60.00	50.00	-27.90	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

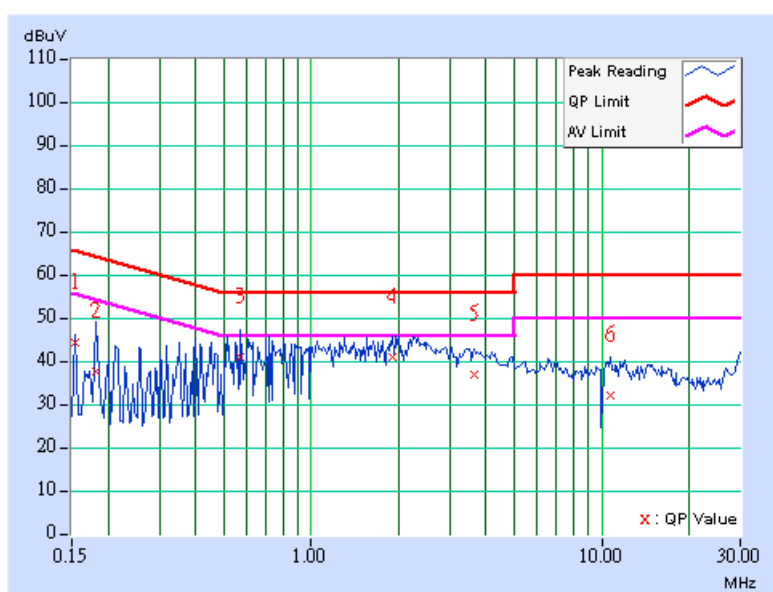

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	7.2Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	B
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.153	0.21	43.06	-	43.27	-	65.84	55.84	-22.57	-
2	0.255	0.21	36.51	-	36.72	-	61.58	51.58	-24.86	-
3	0.498	0.21	36.03	-	36.24	-	56.04	46.04	-19.79	-
4	1.543	0.25	38.30	-	38.55	-	56.00	46.00	-17.45	-
5	3.676	0.37	34.69	-	35.06	-	56.00	46.00	-20.94	-
6	11.879	0.62	28.94	-	29.56	-	60.00	50.00	-30.44	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

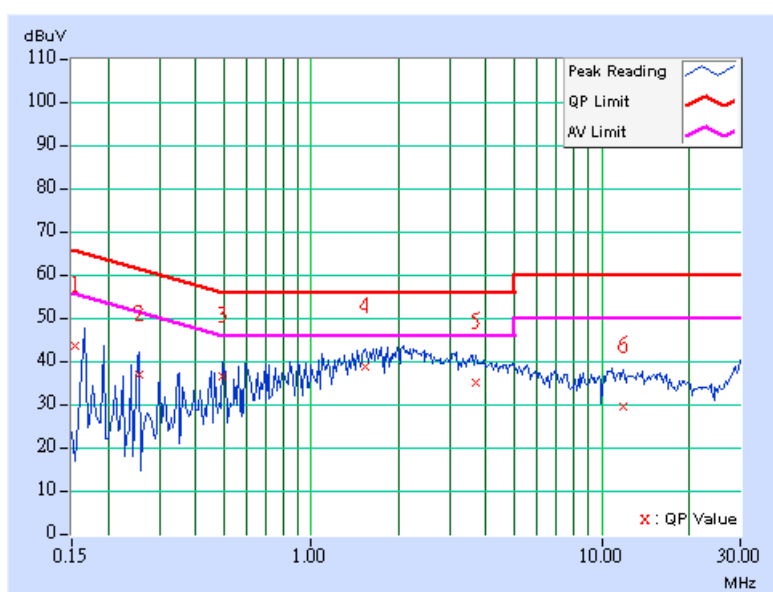

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	7.2Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	B
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.21	42.80	-	43.01	-	65.79	55.79	-22.78	-
2	0.201	0.21	39.30	-	39.51	-	63.58	53.58	-24.07	-
3	0.517	0.22	37.89	-	38.11	-	56.00	46.00	-17.89	-
4	1.645	0.25	40.42	-	40.67	-	56.00	46.00	-15.33	-
5	3.578	0.36	36.57	-	36.93	-	56.00	46.00	-19.07	-
6	10.438	0.53	31.56	-	32.09	-	60.00	50.00	-27.91	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

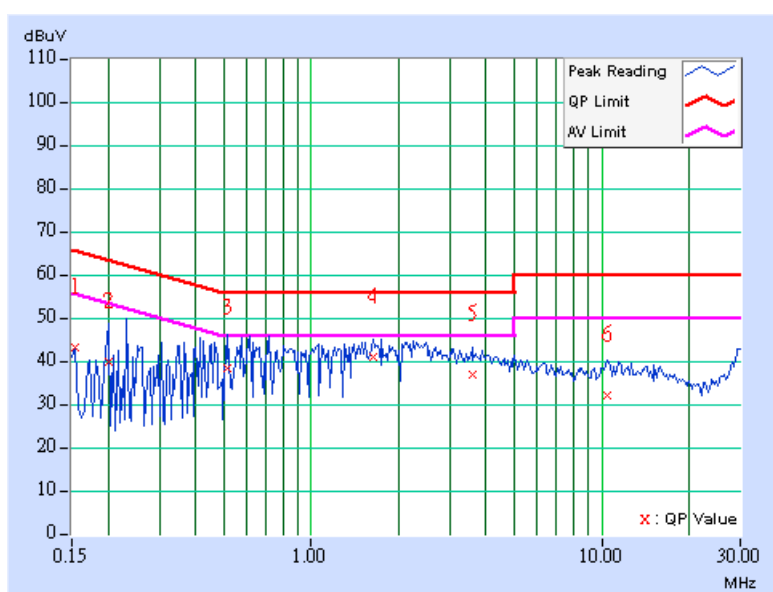

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	7.2Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	B
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.21	43.48	-	43.69	-	66.00	56.00	-22.31	-
2	0.201	0.21	36.63	-	36.84	-	63.55	53.55	-26.71	-
3	0.502	0.22	35.82	-	36.04	-	56.00	46.00	-19.96	-
4	2.297	0.28	37.20	-	37.48	-	56.00	46.00	-18.52	-
5	3.434	0.35	34.90	-	35.25	-	56.00	46.00	-20.75	-
6	11.824	0.62	29.28	-	29.90	-	60.00	50.00	-30.10	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

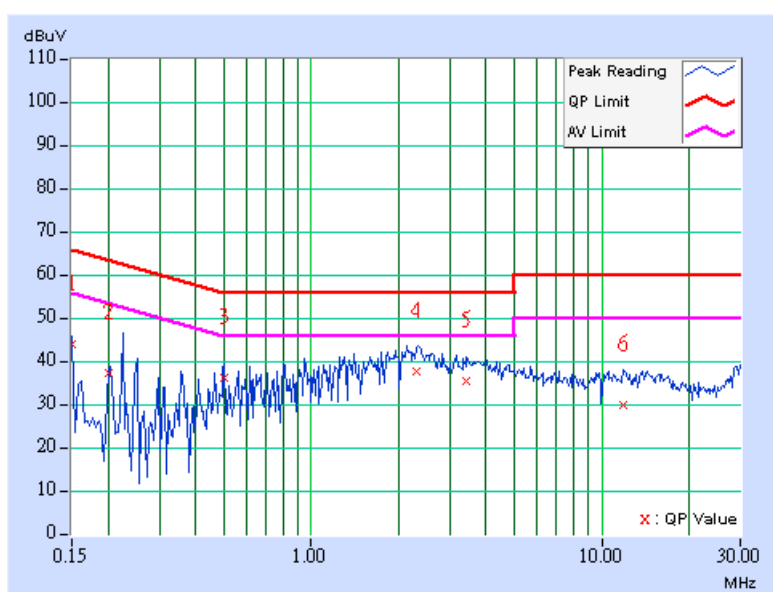

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	7.2Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	B
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.21	43.98	-	44.19	-	66.00	56.00	-21.81	-
2	0.361	0.21	39.33	-	39.54	-	58.71	48.71	-19.17	-
3	0.681	0.22	38.34	-	38.56	-	56.00	46.00	-17.44	-
4	1.988	0.26	40.44	-	40.70	-	56.00	46.00	-15.30	-
5	3.078	0.33	35.25	-	35.58	-	56.00	46.00	-20.42	-
6	10.730	0.53	31.17	-	31.70	-	60.00	50.00	-28.30	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

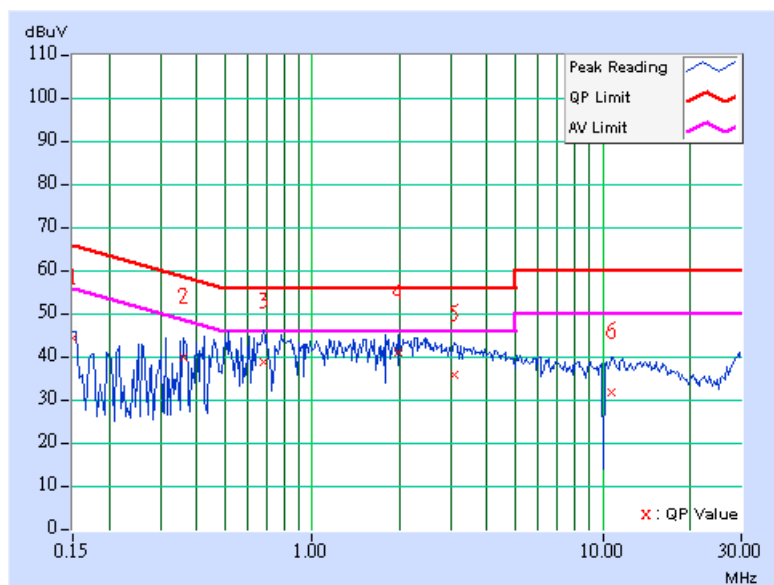


DRAFT 802.11n (40MHz) OFDM MODULATION – DUAL TX:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	A
TESTED BY	Match Tsui		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.189	0.21	33.46	-	33.67	-	64.08	54.08	-30.41	-
2	0.267	0.21	35.36	-	35.57	-	61.20	51.20	-25.63	-
3	0.537	0.22	36.80	-	37.02	-	56.00	46.00	-18.98	-
4	1.238	0.24	34.83	-	35.07	-	56.00	46.00	-20.93	-
5	3.555	0.36	32.42	-	32.78	-	56.00	46.00	-23.22	-
6	12.395	0.64	29.17	-	29.81	-	60.00	50.00	-30.19	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

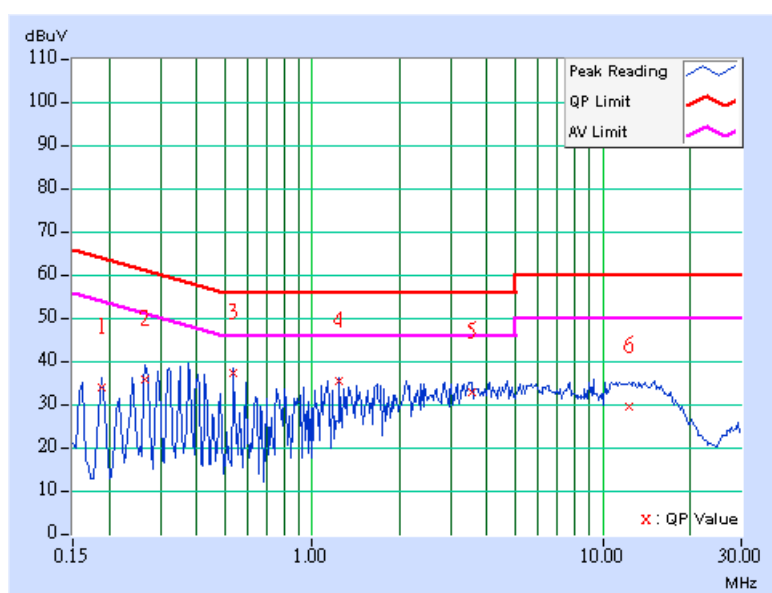

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	A
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.187	0.21	36.99	-	37.20	-	64.16	54.16	-26.96	-
2	0.295	0.21	35.51	-	35.72	-	60.40	50.40	-24.68	-
3	0.588	0.22	34.85	-	35.07	-	56.00	46.00	-20.93	-
4	1.773	0.26	29.35	-	29.61	-	56.00	46.00	-26.39	-
5	3.832	0.38	28.77	-	29.15	-	56.00	46.00	-26.85	-
6	9.297	0.52	28.87	-	29.39	-	60.00	50.00	-30.61	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

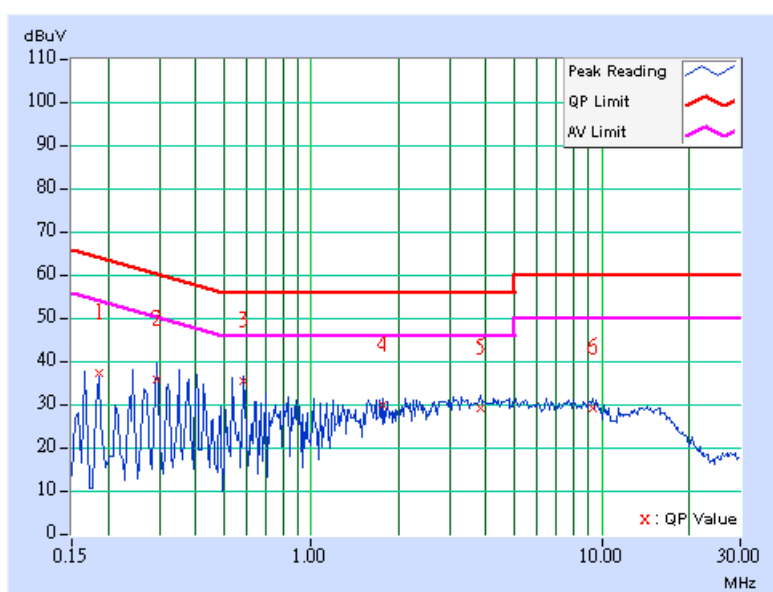

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	A
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.189	0.21	35.12	-	35.33	-	64.08	54.08	-28.75	-
2	0.377	0.21	38.23	-	38.44	-	58.35	48.35	-19.91	-
3	0.537	0.22	38.19	-	38.41	-	56.00	46.00	-17.59	-
4	1.237	0.24	34.64	-	34.88	-	56.00	46.00	-21.12	-
5	4.035	0.39	31.97	-	32.36	-	56.00	46.00	-23.64	-
6	11.000	0.58	29.30	-	29.88	-	60.00	50.00	-30.12	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

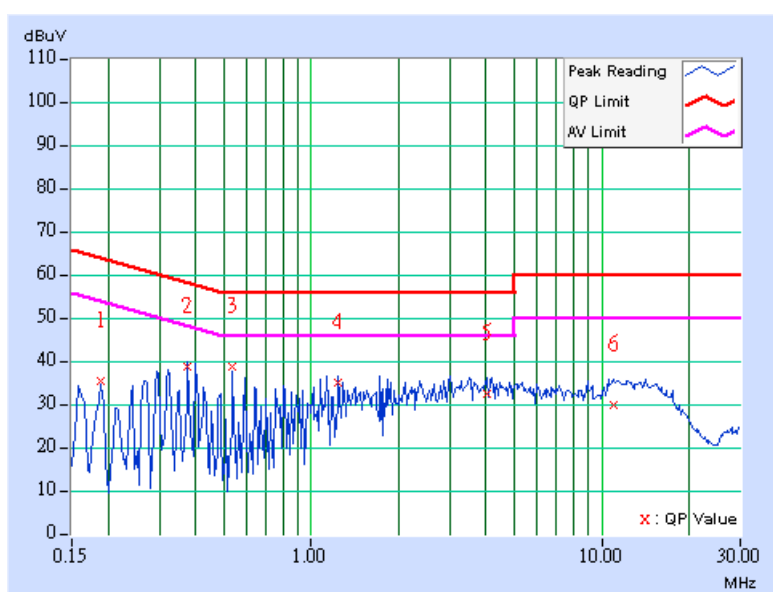

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	A
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.186	0.21	36.39	-	36.60	-	64.19	54.19	-27.60	-
2	0.377	0.21	35.55	-	35.76	-	58.35	48.35	-22.59	-
3	0.537	0.22	35.80	-	36.02	-	56.00	46.00	-19.98	-
4	1.668	0.25	28.64	-	28.89	-	56.00	46.00	-27.11	-
5	3.293	0.34	29.40	-	29.74	-	56.00	46.00	-26.26	-
6	8.988	0.51	26.51	-	27.02	-	60.00	50.00	-32.98	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

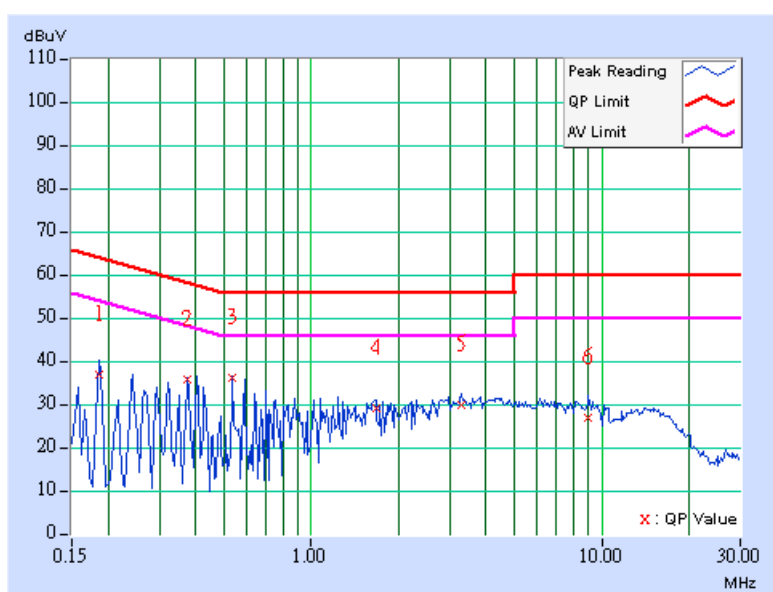

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	A
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.187	0.21	33.44	-	33.65	-	64.17	54.17	-30.52	-
2	0.377	0.21	38.63	-	38.84	-	58.35	48.35	-19.51	-
3	0.591	0.22	34.72	-	34.94	-	56.00	46.00	-21.06	-
4	1.238	0.24	35.19	-	35.43	-	56.00	46.00	-20.57	-
5	3.012	0.33	32.96	-	33.29	-	56.00	46.00	-22.71	-
6	11.645	0.61	29.58	-	30.19	-	60.00	50.00	-29.81	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

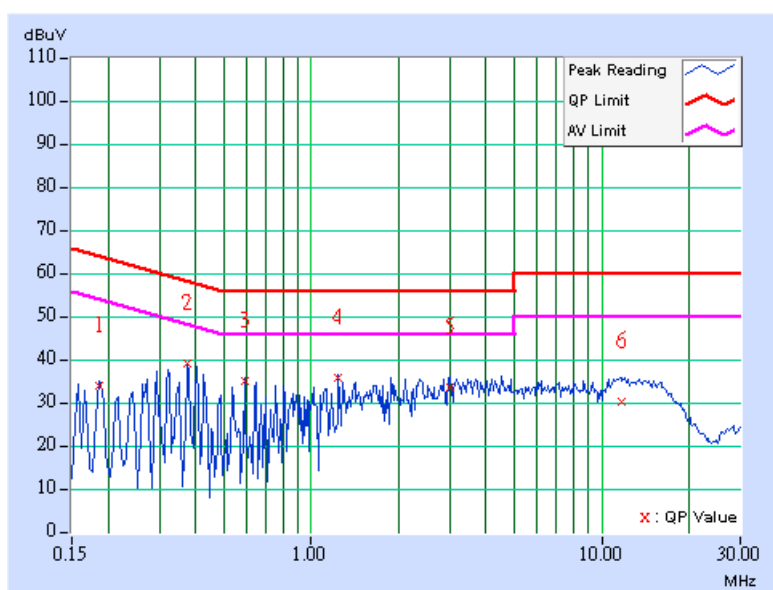

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	A
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.162	0.21	33.86	-	34.07	-	65.38	55.38	-31.31	-
2	0.298	0.21	35.03	-	35.24	-	60.29	50.29	-25.05	-
3	0.590	0.22	35.33	-	35.55	-	56.00	46.00	-20.45	-
4	1.773	0.26	29.59	-	29.85	-	56.00	46.00	-26.15	-
5	3.348	0.35	29.21	-	29.56	-	56.00	46.00	-26.44	-
6	8.980	0.51	28.45	-	28.96	-	60.00	50.00	-31.04	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

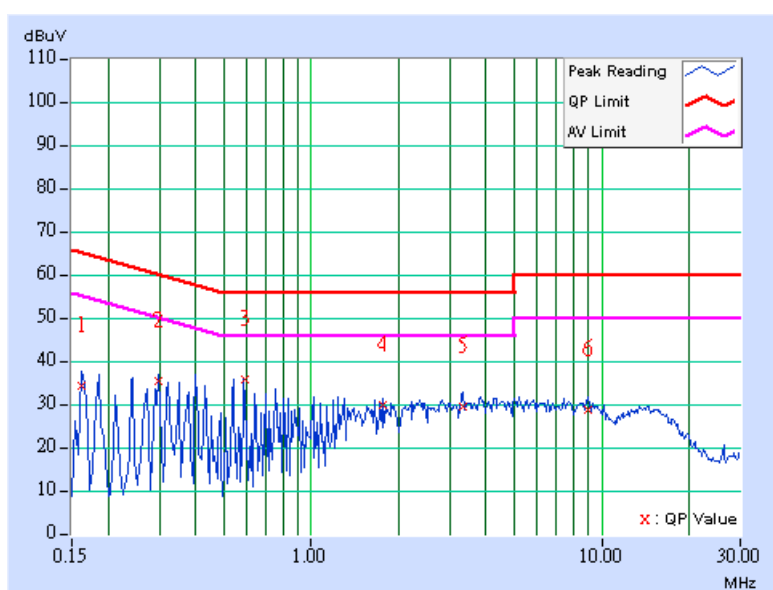

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	B
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.153	0.21	41.83	-	42.04	-	65.85	55.85	-23.81	-
2	0.353	0.21	35.12	-	35.33	-	58.89	48.89	-23.56	-
3	0.595	0.22	35.93	-	36.15	-	56.00	46.00	-19.85	-
4	1.195	0.24	38.93	-	39.17	-	56.00	46.00	-16.83	-
5	1.891	0.26	38.98	-	39.24	-	56.00	46.00	-16.76	-
6	14.031	0.71	30.10	-	30.81	-	60.00	50.00	-29.19	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

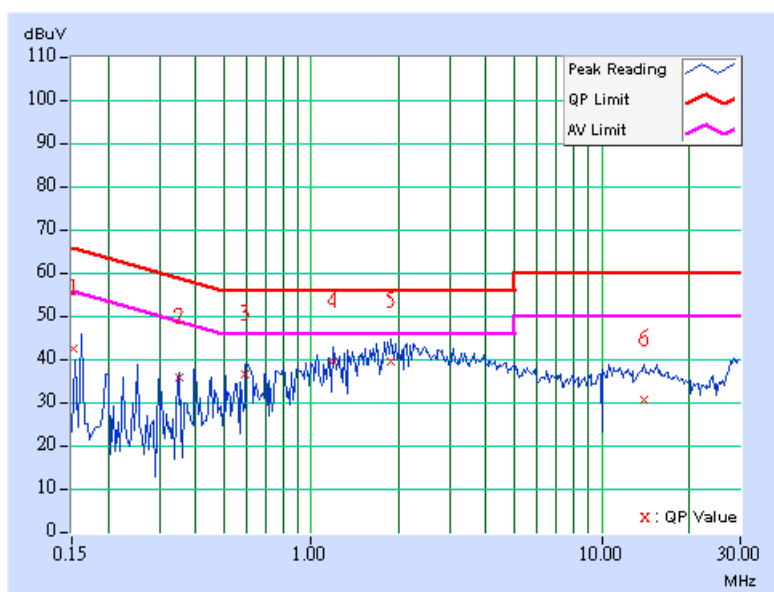

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	B
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.21	43.62	-	43.83	-	66.00	56.00	-22.17	-
2	0.205	0.21	37.57	-	37.78	-	63.42	53.42	-25.64	-
3	0.670	0.22	38.65	-	38.87	-	56.00	46.00	-17.13	-
4	2.090	0.27	41.86	-	42.13	-	56.00	46.00	-13.87	-
5	3.633	0.37	38.77	-	39.14	-	56.00	46.00	-16.86	-
6	11.297	0.52	33.78	-	34.30	-	60.00	50.00	-25.70	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

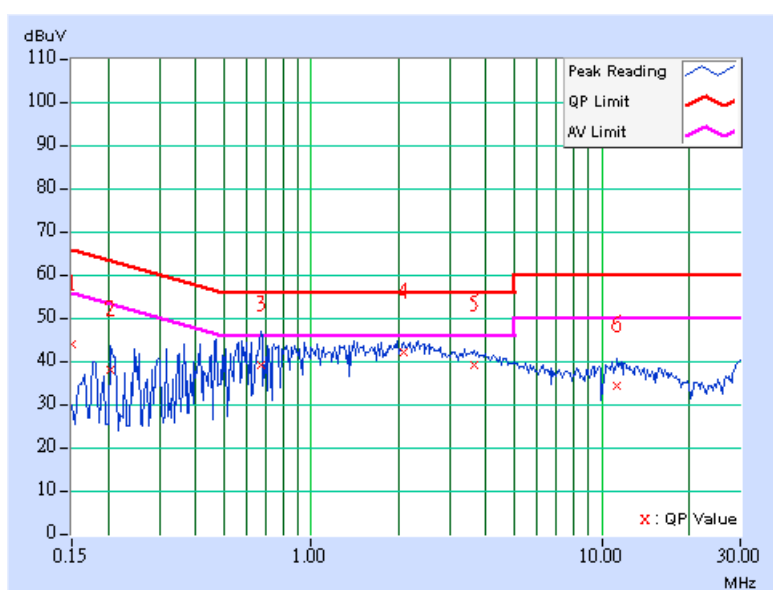

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	B
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.21	39.50	-	39.71	-	65.79	55.79	-26.08	-
2	0.202	0.21	35.69	-	35.90	-	63.53	53.53	-27.63	-
3	0.603	0.22	35.68	-	35.90	-	56.00	46.00	-20.10	-
4	1.741	0.25	39.78	-	40.03	-	56.00	46.00	-15.97	-
5	3.682	0.37	36.93	-	37.30	-	56.00	46.00	-18.70	-
6	11.479	0.60	31.17	-	31.77	-	60.00	50.00	-28.23	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

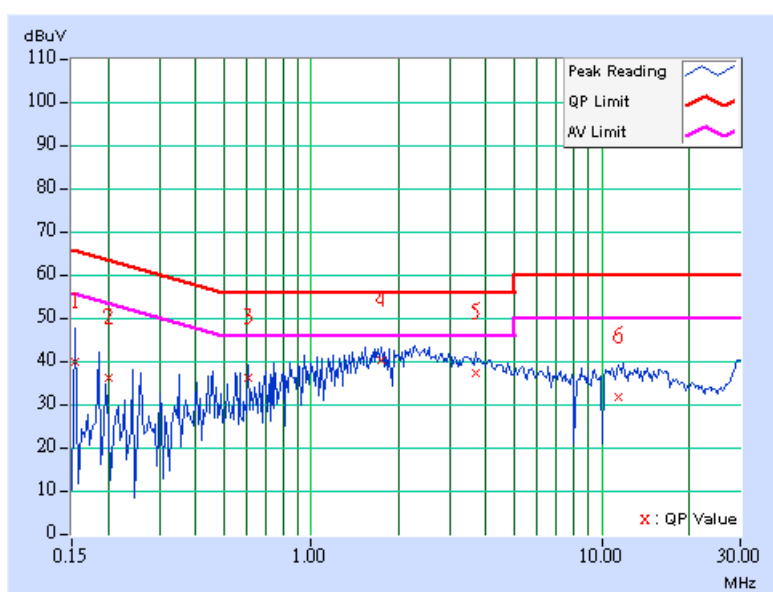

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	B
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.21	43.24	-	43.45	-	66.00	56.00	-22.55	-
2	0.248	0.21	40.47	-	40.68	-	61.84	51.84	-21.16	-
3	0.677	0.22	38.45	-	38.67	-	56.00	46.00	-17.33	-
4	2.203	0.27	39.69	-	39.96	-	56.00	46.00	-16.04	-
5	3.840	0.38	36.50	-	36.88	-	56.00	46.00	-19.12	-
6	10.906	0.52	33.52	-	34.04	-	60.00	50.00	-25.96	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

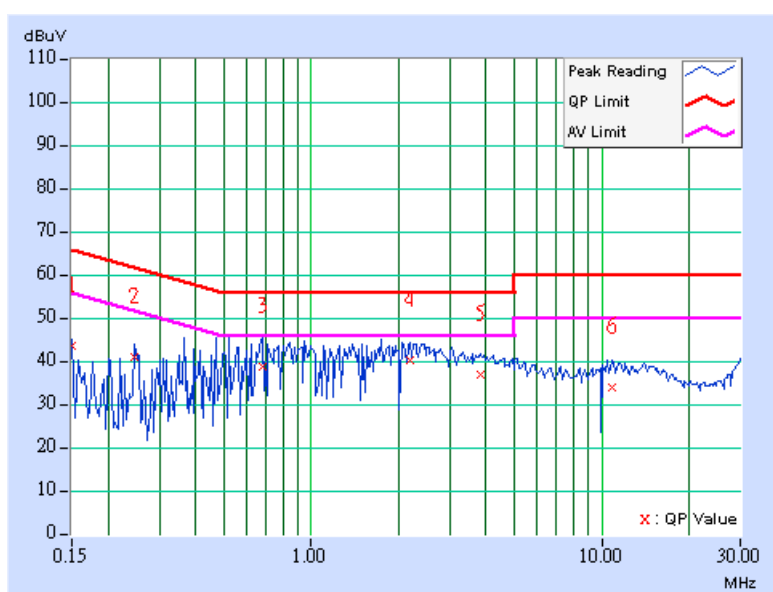

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	PHASE	Line 1
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	B
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.21	42.53	-	42.74	-	66.00	56.00	-23.26	-
2	0.252	0.21	37.83	-	38.04	-	61.71	51.71	-23.67	-
3	0.943	0.24	36.53	-	36.77	-	56.00	46.00	-19.23	-
4	1.891	0.26	39.79	-	40.05	-	56.00	46.00	-15.95	-
5	3.672	0.37	30.48	-	30.85	-	56.00	46.00	-25.15	-
6	11.328	0.60	28.92	-	29.52	-	60.00	50.00	-30.48	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

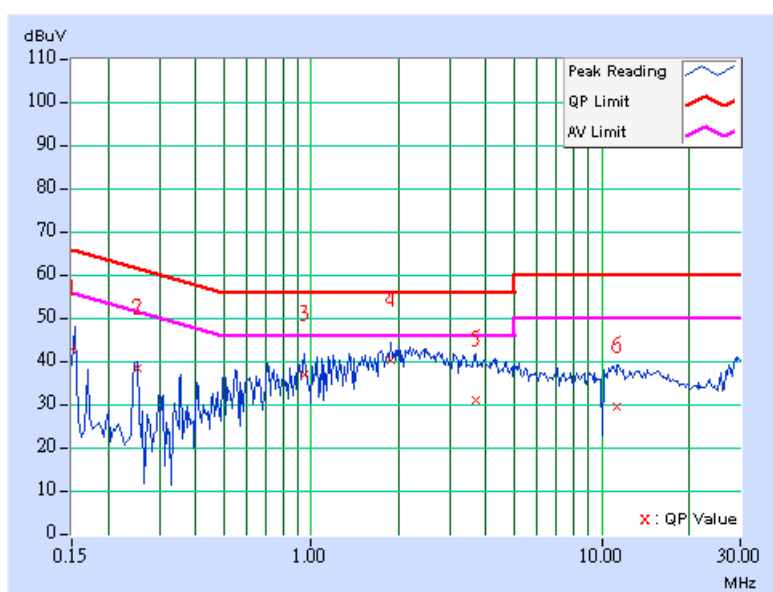

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	PHASE	Line 2
MODULATION TYPE	BPSK	6dB BANDWIDTH	9 kHz
TRANSFER RATE	15.0Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60% RH, 991hPa	TEST MODE	B
TESTED BY	Match Tsui		

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.21	42.87	-	43.08	-	66.00	56.00	-22.92	-
2	0.257	0.21	38.51	-	38.72	-	61.53	51.53	-22.81	-
3	0.470	0.21	38.43	-	38.64	-	56.51	46.51	-17.86	-
4	0.779	0.23	38.60	-	38.83	-	56.00	46.00	-17.17	-
5	1.992	0.26	41.44	-	41.70	-	56.00	46.00	-14.30	-
6	10.508	0.53	33.65	-	34.18	-	60.00	50.00	-25.82	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

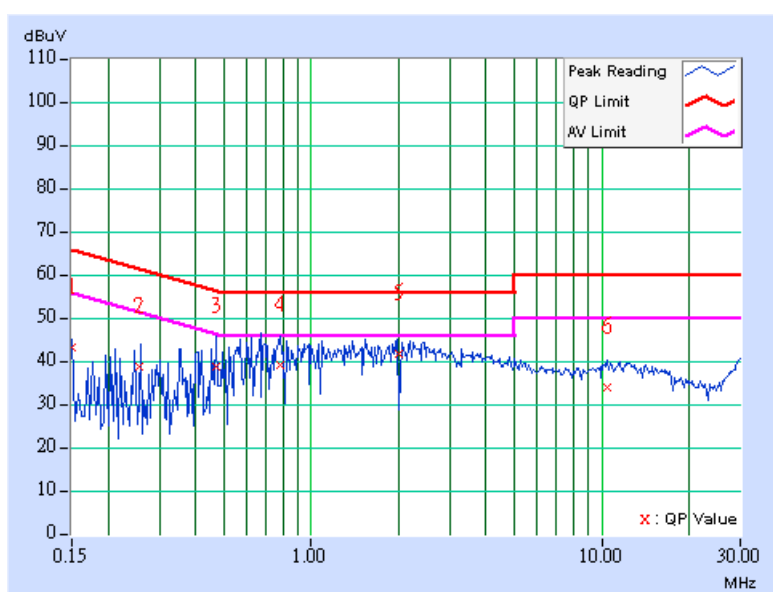

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400 / F(kHz)	300
0.490 ~ 1.705	24000 / F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESIB7	100212	May. 08, 2007
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Aug. 07, 2007
BILOG Antenna SCHWARZBECK	VULB9168	9168-153	Jan. 04, 2008
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-563	Jul. 26, 2007
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 16, 2008
Preamplifier Agilent	8449B	3008A01911	Sep. 13, 2007
Preamplifier Agilent	8447D	2944A10638	Dec. 20, 2007
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218188/218189	Nov. 14, 2007
RF signal cable Worken	8D-FB	Cable-HYCH9-01	Aug. 16, 2007
Software	ADT_Radiated_V7.6	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA
Turn Table EMCO	2087-2.03	NA	NA
Antenna Tower & Turn Table Controller EMCO	2090	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 9.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC3789B-9.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

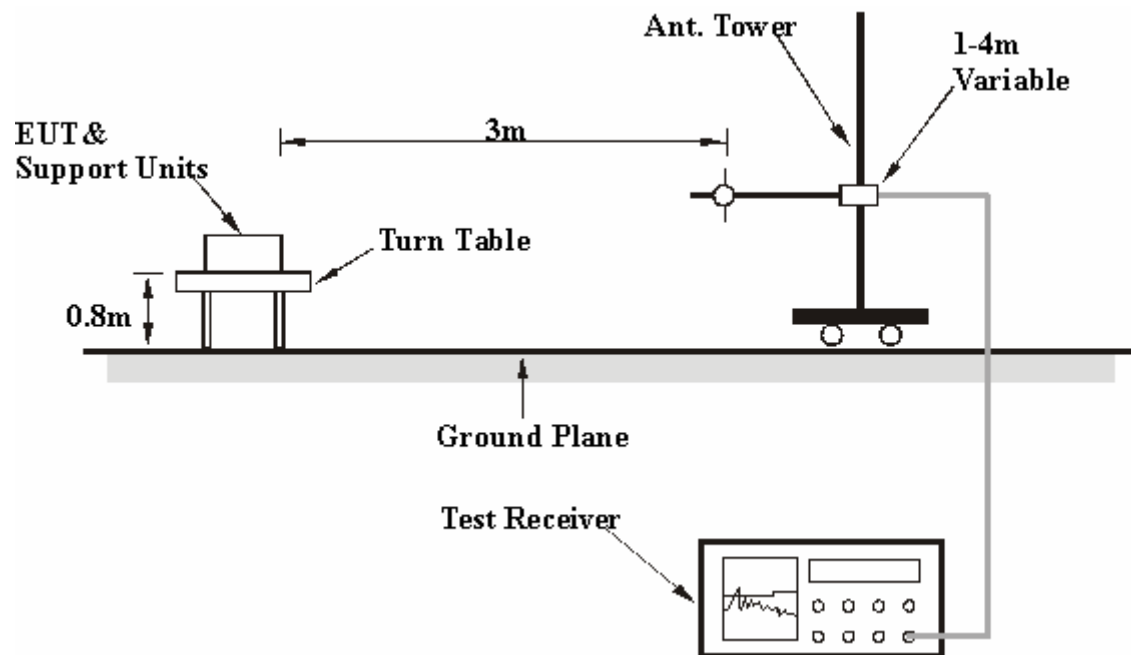

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA: 802.11g OFDM MODULATION – DUAL TX:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	6.0Mbps	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65% RH, 991hPa	TEST MODE	A
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	249.60	36.85 QP	46.00	-9.15	1.00 H	40	23.38	13.47
2	366.26	38.95 QP	46.00	-7.05	1.00 H	271	22.10	16.85
3	399.31	36.47 QP	46.00	-9.53	1.00 H	196	18.85	17.62
4	599.58	37.86 QP	46.00	-8.14	1.25 H	7	15.41	22.45
5	700.68	38.53 QP	46.00	-7.47	1.25 H	355	14.32	24.22
6	799.84	43.41 QP	46.00	-2.59	1.00 H	214	17.52	25.88

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	47.80	38.55 QP	40.00	-1.45	1.09 V	111	23.97	14.58
2	58.71	37.00 QP	40.00	-3.00	1.00 V	208	22.91	14.09
3	68.79	35.55 QP	40.00	-4.45	1.00 V	16	22.70	12.85
4	249.60	39.66 QP	46.00	-6.34	1.25 V	352	26.18	13.47
5	599.58	39.00 QP	46.00	-7.00	1.00 V	196	16.55	22.45
6	799.84	38.16 QP	46.00	-7.84	1.50 V	160	12.27	25.88

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	6.0Mbps	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 65% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	105.73	30.73 QP	43.50	-12.77	2.50 H	346	19.84	10.89
2	249.60	37.99 QP	46.00	-8.01	1.00 H	310	24.52	13.47
3	399.31	36.98 QP	46.00	-9.02	1.00 H	172	19.35	17.62
4	574.30	34.69 QP	46.00	-11.31	1.50 H	37	12.85	21.84
5	599.58	40.04 QP	46.00	-5.96	1.50 H	154	17.59	22.45
6	700.68	38.94 QP	46.00	-7.06	1.25 H	355	14.73	24.22
7	799.84	42.09 QP	46.00	-3.91	1.00 H	187	16.20	25.88

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	58.69	36.35 QP	40.00	-3.65	2.00 V	353	22.26	14.09
2	249.60	38.29 QP	46.00	-7.71	1.00 V	256	24.82	13.47
3	399.31	37.23 QP	46.00	-8.77	1.25 V	22	19.61	17.62
4	599.58	37.96 QP	46.00	-8.04	1.25 V	70	15.51	22.45
5	799.84	39.70 QP	46.00	-6.30	1.50 V	85	13.82	25.88
6	875.67	34.28 QP	46.00	-11.72	1.00 V	28	6.99	27.29

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

DRAFT 802.11n (20MHZ) OFDM MODULATION – DUAL TX:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	7.2Mbps	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	24deg. C, 64% RH, 991hPa	TEST MODE	A
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	249.60	40.16 QP	46.00	-5.84	1.25 H	40	27.62	12.54
2	333.21	34.08 QP	46.00	-11.92	1.25 H	160	19.92	14.16
3	366.26	36.92 QP	46.00	-9.08	1.00 H	124	21.98	14.93
4	399.31	34.35 QP	46.00	-11.65	1.00 H	187	18.66	15.69
5	500.42	34.54 QP	46.00	-11.46	1.00 H	151	15.78	18.76
6	599.58	39.53 QP	46.00	-6.47	1.50 H	202	18.45	21.09
7	700.68	36.78 QP	46.00	-9.22	1.25 H	319	14.78	22.01
8	766.79	35.57 QP	46.00	-10.43	1.00 H	325	11.98	23.59
9	799.84	43.16 QP	46.00	-2.84	1.00 H	193	18.80	24.36

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	59.06	27.51 QP	40.00	-12.49	1.25 V	262	14.22	13.30
2	150.45	31.63 QP	43.50	-11.87	1.00 V	208	17.97	13.66
3	249.60	41.25 QP	46.00	-4.75	1.00 V	349	28.72	12.54
4	500.42	38.49 QP	46.00	-7.51	1.00 V	217	19.73	18.76
5	599.58	38.11 QP	46.00	-7.89	1.00 V	295	17.02	21.09
6	799.84	40.37 QP	46.00	-5.63	1.00 V	289	16.01	24.36
7	875.67	35.65 QP	46.00	-10.35	1.50 V	31	10.56	25.09

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	7.2Mbps	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	24deg. C, 64% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	249.60	40.07 QP	46.00	-5.93	1.00 H	298	27.53	12.54
2	366.26	35.16 QP	46.00	-10.84	1.00 H	133	20.22	14.93
3	399.31	35.46 QP	46.00	-10.54	1.00 H	88	19.77	15.69
4	634.57	34.40 QP	46.00	-11.60	1.00 H	190	12.99	21.41
5	700.68	36.43 QP	46.00	-9.57	1.00 H	187	14.42	22.01
6	733.73	34.03 QP	46.00	-11.97	1.00 H	166	11.23	22.80
7	766.79	34.93 QP	46.00	-11.07	1.00 H	334	11.34	23.59
8	799.84	40.83 QP	46.00	-5.17	1.00 H	163	16.47	24.36

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	43.51	30.51 QP	40.00	-9.49	1.00 V	187	18.19	12.32
2	99.89	33.96 QP	43.50	-9.54	1.25 V	277	24.82	9.15
3	249.60	38.99 QP	46.00	-7.01	1.00 V	205	26.45	12.54
4	500.42	36.34 QP	46.00	-9.66	1.00 V	202	17.58	18.76
5	599.58	35.99 QP	46.00	-10.01	1.00 V	286	14.90	21.09
6	799.84	39.17 QP	46.00	-6.83	1.25 V	103	14.81	24.36
7	836.78	38.36 QP	46.00	-7.64	1.00 V	67	13.64	24.72
8	867.89	35.03 QP	46.00	-10.97	1.25 V	100	10.02	25.01

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

DRAFT 802.11n (40MHZ) OFDM MODULATION – DUAL TX:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	15.0Mbps	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	24deg. C, 64% RH, 991hPa	TEST MODE	A
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	249.60	40.24 QP	46.00	-5.76	1.25 H	31	27.71	12.54
2	333.21	34.22 QP	46.00	-11.78	1.00 H	154	20.06	14.16
3	366.26	36.99 QP	46.00	-9.01	1.00 H	133	22.06	14.93
4	399.31	34.55 QP	46.00	-11.45	1.00 H	184	18.86	15.69
5	500.42	34.49 QP	46.00	-11.51	1.00 H	148	15.73	18.76
6	599.58	38.70 QP	46.00	-7.30	1.25 H	205	17.62	21.09
7	634.57	34.04 QP	46.00	-11.96	1.25 H	196	12.63	21.41
8	700.68	36.03 QP	46.00	-9.97	1.00 H	181	14.02	22.01
9	766.79	35.85 QP	46.00	-10.15	1.00 H	334	12.26	23.59
10	799.84	42.90 QP	46.00	-3.10	1.00 H	190	18.54	24.36

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	150.45	31.72 QP	43.50	-11.78	1.00 V	199	18.06	13.66
2	249.60	41.09 QP	46.00	-4.91	1.00 V	319	28.55	12.54
3	500.42	38.69 QP	46.00	-7.31	1.00 V	202	19.93	18.76
4	599.58	37.21 QP	46.00	-8.79	1.00 V	292	16.13	21.09
5	799.84	39.79 QP	46.00	-6.21	1.00 V	286	15.43	24.36
6	825.11	34.27 QP	46.00	-11.73	1.25 V	55	9.66	24.61
7	867.89	36.00 QP	46.00	-10.00	1.25 V	286	10.99	25.01

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	15.0Mbps	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	24deg. C, 64% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	249.60	40.27 QP	46.00	-5.73	1.00 H	304	27.74	12.54
2	366.26	35.49 QP	46.00	-10.51	1.00 H	136	20.55	14.93
3	399.31	35.12 QP	46.00	-10.88	1.00 H	79	19.42	15.69
4	539.30	34.64 QP	46.00	-11.36	1.25 H	133	14.97	19.68
5	599.58	36.67 QP	46.00	-9.33	1.25 H	205	15.58	21.09
6	634.57	36.30 QP	46.00	-9.70	1.25 H	196	14.89	21.41
7	700.68	36.63 QP	46.00	-9.37	1.00 H	172	14.62	22.01
8	766.79	35.34 QP	46.00	-10.66	1.00 H	220	11.75	23.59
9	799.84	40.76 QP	46.00	-5.24	1.00 H	163	16.40	24.36
10	825.11	36.16 QP	46.00	-9.84	1.00 H	247	11.55	24.61

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	59.06	30.46 QP	40.00	-9.54	1.25 V	100	17.16	13.30
2	99.89	33.61 QP	43.50	-9.89	1.00 V	310	24.46	9.15
3	249.60	38.31 QP	46.00	-7.69	1.00 V	61	25.77	12.54
4	500.42	36.81 QP	46.00	-9.19	1.00 V	208	18.05	18.76
5	599.58	36.23 QP	46.00	-9.77	1.00 V	283	15.14	21.09
6	799.84	40.23 QP	46.00	-5.77	1.25 V	106	15.87	24.36
7	836.78	38.35 QP	46.00	-7.65	1.00 V	196	13.63	24.72
8	867.89	34.26 QP	46.00	-11.74	1.25 V	283	9.25	25.01

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

802.11b DSSS MODULATION – SINGLE TX:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	1.0Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2386.00	56.90 PK	74.00	-17.10	1.09 H	351	25.68	31.22
2	2386.00	46.14 AV	54.00	-7.86	1.09 H	351	14.92	31.22
3	*2412.00	100.97 PK			1.05 H	350	69.76	31.21
4	*2412.00	96.23 AV			1.05 H	350	65.02	31.21
5	4824.00	45.59 PK	74.00	-28.41	1.50 H	127	9.11	36.48
6	4824.00	34.09 AV	54.00	-19.91	1.50 H	127	-2.39	36.48

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2386.00	63.60 PK	74.00	-10.40	1.12 V	83	32.38	31.22
2	2386.00	52.91 AV	54.00	-1.09	1.12 V	83	21.69	31.22
3	*2412.00	111.24 PK			1.12 V	102	80.03	31.21
4	*2412.00	106.72 AV			1.12 V	102	75.51	31.21
5	4824.00	46.56 PK	74.00	-27.44	1.08 V	180	10.08	36.48
6	4824.00	35.38 AV	54.00	-18.62	1.08 V	180	-1.10	36.48

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247.
6. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	1.0Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	102.80 PK			1.05 H	166	71.58	31.22
2	*2437.00	98.20 AV			1.05 H	166	66.98	31.22
3	4874.00	47.62 PK	74.00	-26.38	1.00 H	216	11.04	36.58
4	4874.00	40.59 AV	54.00	-13.41	1.00 H	216	4.01	36.58

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	111.86 PK			1.10 V	115	80.64	31.22
2	*2437.00	107.13 AV			1.10 V	115	75.91	31.22
3	4874.00	48.23 PK	74.00	-25.77	1.07 V	175	11.65	36.58
4	4874.00	41.39 AV	54.00	-12.61	1.07 V	175	4.81	36.58

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * ”: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	DBPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	1.0Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	100.68 PK			1.10 H	349	69.45	31.23
2	*2462.00	96.10 AV			1.10 H	349	64.87	31.23
3	2488.00	56.95 PK	74.00	-17.05	1.10 H	350	25.71	31.24
4	2488.00	46.48 AV	54.00	-7.52	1.10 H	350	15.24	31.24
5	4924.00	46.64 PK	74.00	-27.36	1.04 H	121	9.96	36.68
6	4924.00	36.87 AV	54.00	-17.13	1.04 H	121	0.19	36.68

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.13 PK			1.05 V	92	79.90	31.23
2	*2462.00	106.08 AV			1.05 V	92	74.85	31.23
3	2488.00	63.38 PK	74.00	-10.62	1.09 V	120	32.14	31.24
4	2488.00	53.00 AV	54.00	-1.00	1.09 V	120	21.76	31.24
5	4924.00	47.36 PK	74.00	-26.64	1.06 V	282	10.68	36.68
6	4924.00	37.45 AV	54.00	-16.55	1.06 V	282	0.77	36.68

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.

802.11g OFDM MODULATION – DUAL TX:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	6.0Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.78 PK	74.00	-14.22	1.02 H	326	28.56	31.22
2	2390.00	46.51 AV	54.00	-7.49	1.02 H	326	15.29	31.22
3	*2412.00	102.53 PK			1.02 H	324	71.32	31.21
4	*2412.00	92.46 AV			1.02 H	324	61.25	31.21
5	4824.00	45.87 PK	74.00	-28.13	1.00 H	165	9.39	36.48
6	4824.00	31.58 AV	54.00	-22.42	1.00 H	165	-4.90	36.48

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.04 PK	74.00	-5.96	1.11 V	90	36.82	31.22
2	2390.00	52.77 AV	54.00	-1.23	1.11 V	90	21.55	31.22
3	*2412.00	113.77 PK			1.08 V	94	82.56	31.21
4	*2412.00	104.00 AV			1.08 V	94	72.79	31.21
5	4824.00	46.19 PK	74.00	-27.81	1.10 V	0	9.71	36.48
6	4824.00	32.91 AV	54.00	-21.09	1.10 V	0	-3.57	36.48

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247.
6. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	6.0Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	102.42 PK			1.06 H	165	71.20	31.22
2	*2437.00	92.34 AV			1.06 H	165	61.12	31.22
3	4874.00	45.76 PK	74.00	-28.24	1.64 H	37	9.18	36.58
4	4874.00	31.60 AV	54.00	-22.40	1.64 H	37	-4.98	36.58

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	113.71 PK			1.10 V	109	82.49	31.22
2	*2437.00	103.67 AV			1.10 V	109	72.45	31.22
3	4874.00	46.55 PK	74.00	-27.45	1.24 V	354	9.97	36.58
4	4874.00	32.87 AV	54.00	-21.13	1.24 V	354	-3.71	36.58

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	6.0Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 65% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	102.26 PK			1.08 H	358	71.03	31.23
2	*2462.00	92.11 AV			1.08 H	358	60.88	31.23
3	2483.50	57.25 PK	74.00	-16.75	1.10 H	358	26.01	31.24
4	2483.50	45.93 AV	54.00	-8.07	1.10 H	358	14.69	31.24
5	4924.00	45.34 PK	74.00	-28.66	1.33 H	302	8.66	36.68
6	4924.00	31.58 AV	54.00	-22.42	1.33 H	302	-5.10	36.68

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.32 PK			1.07 V	90	82.09	31.23
2	*2462.00	103.14 AV			1.07 V	90	71.91	31.23
3	2483.50	70.90 PK	74.00	-3.10	1.08 V	113	39.66	31.24
4	2483.50	52.87 AV	54.00	-1.13	1.08 V	113	21.63	31.24
5	4924.00	46.39 PK	74.00	-27.61	1.02 V	295	9.71	36.68
6	4924.00	32.75 AV	54.00	-21.25	1.02 V	295	-3.93	36.68

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * ”: Fundamental frequency.

DRAFT 802.11n (20MHz) OFDM MODULATION – DUAL TX:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	7.2Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 69% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.70 PK	74.00	-15.30	1.06 H	136	27.48	31.22
2	2390.00	45.79 AV	54.00	-8.21	1.06 H	136	14.57	31.22
3	*2412.00	100.99 PK			1.06 H	139	69.78	31.21
4	*2412.00	90.92 AV			1.06 H	139	59.71	31.21
5	4824.00	44.32 PK	74.00	-29.68	1.03 H	32	7.84	36.48
6	4824.00	31.85 AV	54.00	-22.15	1.03 H	32	-4.63	36.48

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.69 PK	74.00	-4.31	1.14 V	95	38.47	31.22
2	2390.00	52.22 AV	54.00	-1.78	1.14 V	95	21.00	31.22
3	*2412.00	113.78 PK			1.12 V	108	82.57	31.21
4	*2412.00	103.88 AV			1.12 V	108	72.67	31.21
5	4824.00	45.50 PK	74.00	-28.50	1.21 V	230	9.02	36.48
6	4824.00	32.19 AV	54.00	-21.81	1.21 V	230	-4.29	36.48

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	7.2Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 69% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	100.33 PK			1.15 H	321	69.11	31.22
2	*2437.00	90.47 AV			1.15 H	321	59.25	31.22
3	4874.00	45.54 PK	74.00	-28.46	1.00 H	277	8.96	36.58
4	4874.00	32.89 AV	54.00	-21.11	1.00 H	277	-3.69	36.58

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	113.11 PK			1.11 V	102	81.89	31.22
2	*2437.00	103.37 AV			1.11 V	102	72.15	31.22
3	4874.00	46.79 PK	74.00	-27.21	1.30 V	253	10.21	36.58
4	4874.00	33.54 AV	54.00	-20.46	1.30 V	253	-3.04	36.58

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	7.2Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 69% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	100.46 PK			1.21 H	290	69.23	31.23
2	*2462.00	90.50 AV			1.21 H	290	59.27	31.23
3	2483.50	60.08 PK	74.00	-13.92	1.20 H	290	28.84	31.24
4	2483.50	46.86 AV	54.00	-7.14	1.20 H	290	15.62	31.24
5	4924.00	45.60 PK	74.00	-28.40	1.56 H	174	8.92	36.68
6	4924.00	32.79 AV	54.00	-21.21	1.56 H	174	-3.89	36.68

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	113.53 PK			1.11 V	95	82.30	31.23
2	*2462.00	103.30 AV			1.11 V	95	72.07	31.23
3	2483.50	72.72 PK	74.00	-1.28	1.10 V	108	41.48	31.24
4	2483.50	52.92 AV	54.00	-1.08	1.10 V	108	21.68	31.24
5	4924.00	46.88 PK	74.00	-27.12	1.25 V	67	10.20	36.68
6	4924.00	33.73 AV	54.00	-20.27	1.25 V	67	-2.95	36.68

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * ”: Fundamental frequency.

DRAFT 802.11n (40MHz) OFDM MODULATION – DUAL TX:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	15.0Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 69% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.32 PK	74.00	-13.68	1.36 H	139	29.10	31.22
2	2390.00	46.51 AV	54.00	-7.49	1.36 H	139	15.29	31.22
3	*2422.00	97.35 PK			1.05 H	141	66.13	31.22
4	*2422.00	86.89 AV			1.05 H	141	55.67	31.22
5	4824.00	44.87 PK	74.00	-29.13	1.10 H	136	8.39	36.48
6	4824.00	31.26 AV	54.00	-22.74	1.10 H	136	-5.22	36.48

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.66 PK	74.00	-1.34	1.12 V	89	41.44	31.22
2	2390.00	52.94 AV	54.00	-1.06	1.12 V	89	21.72	31.22
3	*2422.00	108.49 PK			1.11 V	95	77.27	31.22
4	*2422.00	98.55 AV			1.11 V	95	67.33	31.22
5	4844.00	45.75 PK	74.00	-28.25	1.05 V	52	9.23	36.52
6	4844.00	32.23 AV	54.00	-21.77	1.05 V	52	-4.29	36.52

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	15.0Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 69% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	97.23 PK			1.59 H	317	66.01	31.22
2	*2437.00	86.81 AV			1.59 H	317	55.59	31.22
3	4874.00	44.63 PK	74.00	-29.37	1.34 H	205	8.05	36.58
4	4874.00	31.48 AV	54.00	-22.52	1.34 H	205	-5.10	36.58

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	108.42 PK			1.10 V	96	77.20	31.22
2	*2437.00	98.24 AV			1.10 V	96	67.02	31.22
3	4874.00	45.79 PK	74.00	-28.21	1.00 V	106	9.21	36.58
4	4874.00	32.36 AV	54.00	-21.64	1.00 V	106	-4.22	36.58

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * “: Fundamental frequency.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 7	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TRANSFER RATE	15.0Mbps	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	23deg. C, 69% RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	97.11 PK			1.09 H	231	65.88	31.23
2	*2452.00	86.57 AV			1.09 H	231	55.34	31.23
3	2483.50	57.11 PK	74.00	-16.89	1.10 H	231	25.87	31.24
4	2483.50	47.32 AV	54.00	-6.68	1.10 H	231	16.08	31.24
5	4904.00	45.67 PK	74.00	-28.33	1.03 H	220	9.03	36.64
6	4904.00	31.73 AV	54.00	-22.27	1.03 H	220	-4.91	36.64

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	108.29 PK			1.11 V	101	77.06	31.23
2	*2452.00	98.21 AV			1.11 V	101	66.98	31.23
3	2483.50	72.94 PK	74.00	-1.06	1.10 V	57	41.70	31.24
4	2483.50	52.91 AV	54.00	-1.09	1.10 V	57	21.67	31.24
5	4904.00	46.10 PK	74.00	-27.90	1.27 V	153	9.46	36.64
6	4904.00	32.57 AV	54.00	-21.43	1.27 V	153	-4.07	36.64

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247.
 6. “ * ”: Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP40	100040	Jun. 07, 2007

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

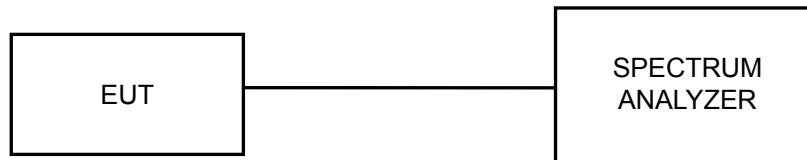

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.7 TEST RESULTS

802.11b DSSS MODULATION – SINGLE TX:


MODULATION TYPE	DBPSK	TRANSFER RATE	1.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 63% RH, 991hPa
TEST MODE	B	TESTED BY	Long Chen

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	12.08	0.5	PASS
6	2437	10.16	0.5	PASS
11	2462	11.12	0.5	PASS


CH 1

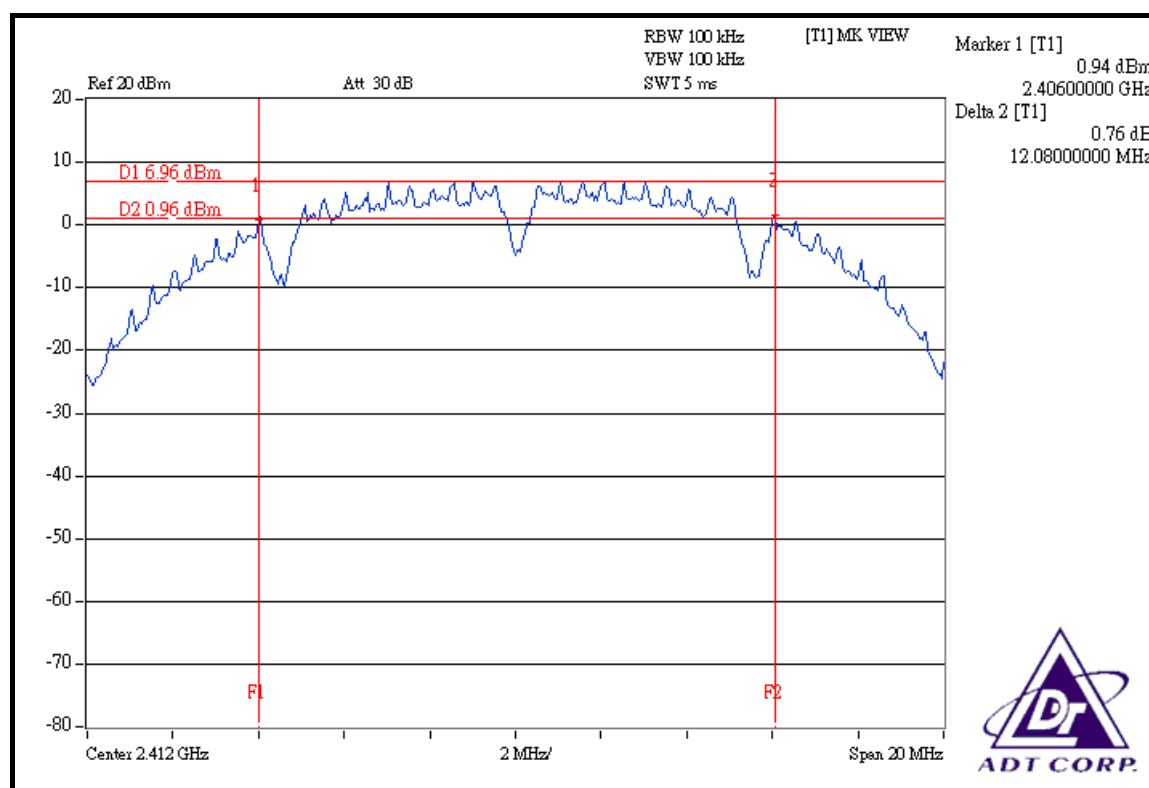

CH 6

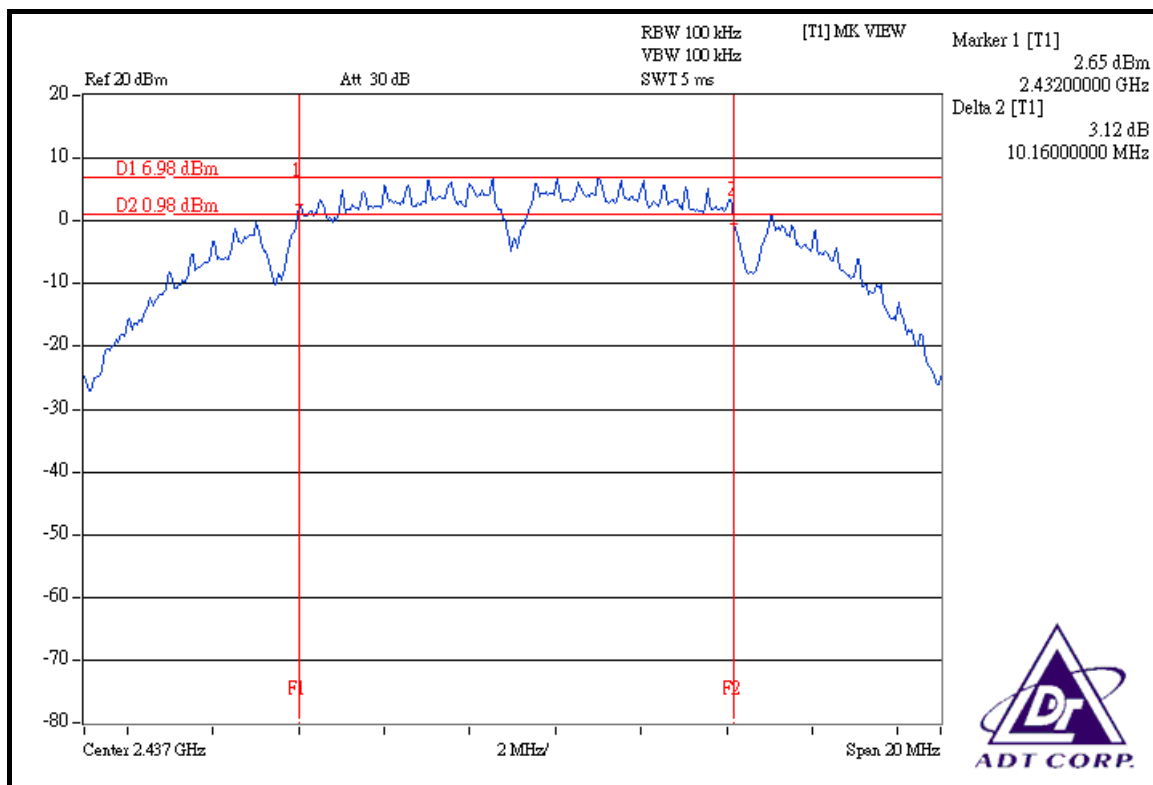

CH 11

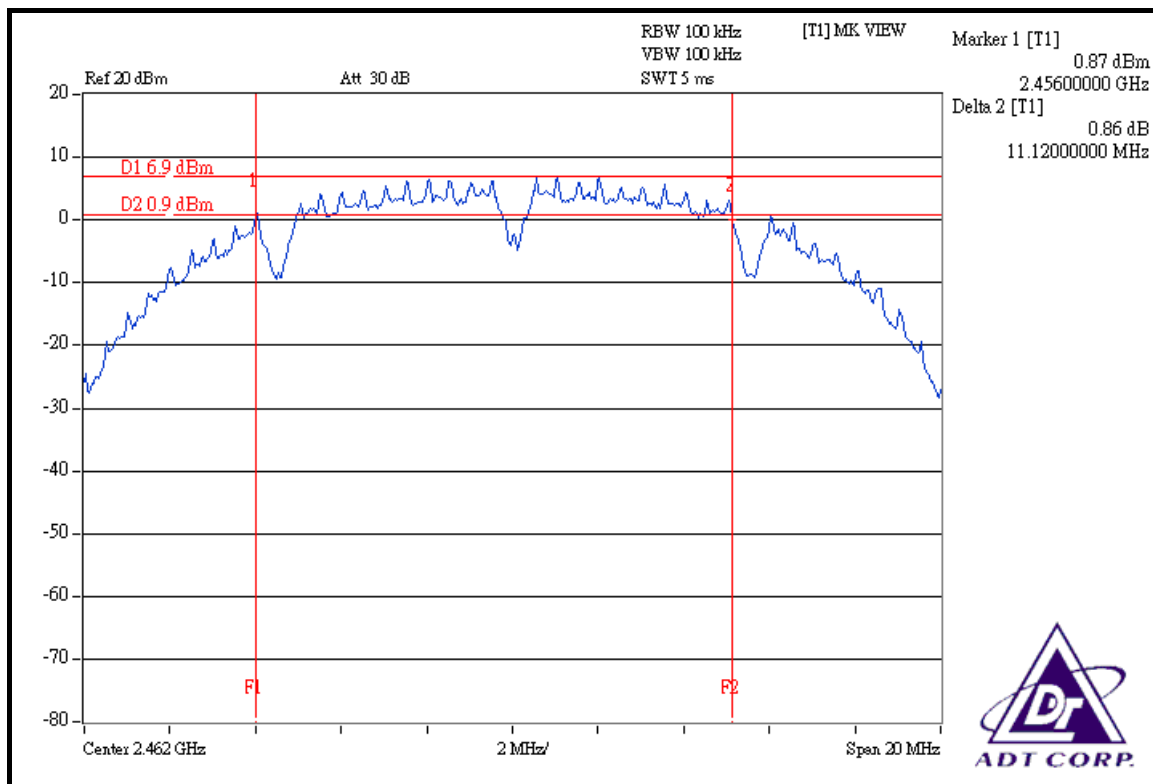


802.11g OFDM MODULATION – DUAL TX:


MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 63% RH, 991hPa
TEST MODE	B	TESTED BY	Long Chen

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	16.40	16.12	0.5	PASS
6	2437	16.36	16.40	0.5	PASS
11	2462	16.40	16.36	0.5	PASS


FOR CHAIN 0: CH 1

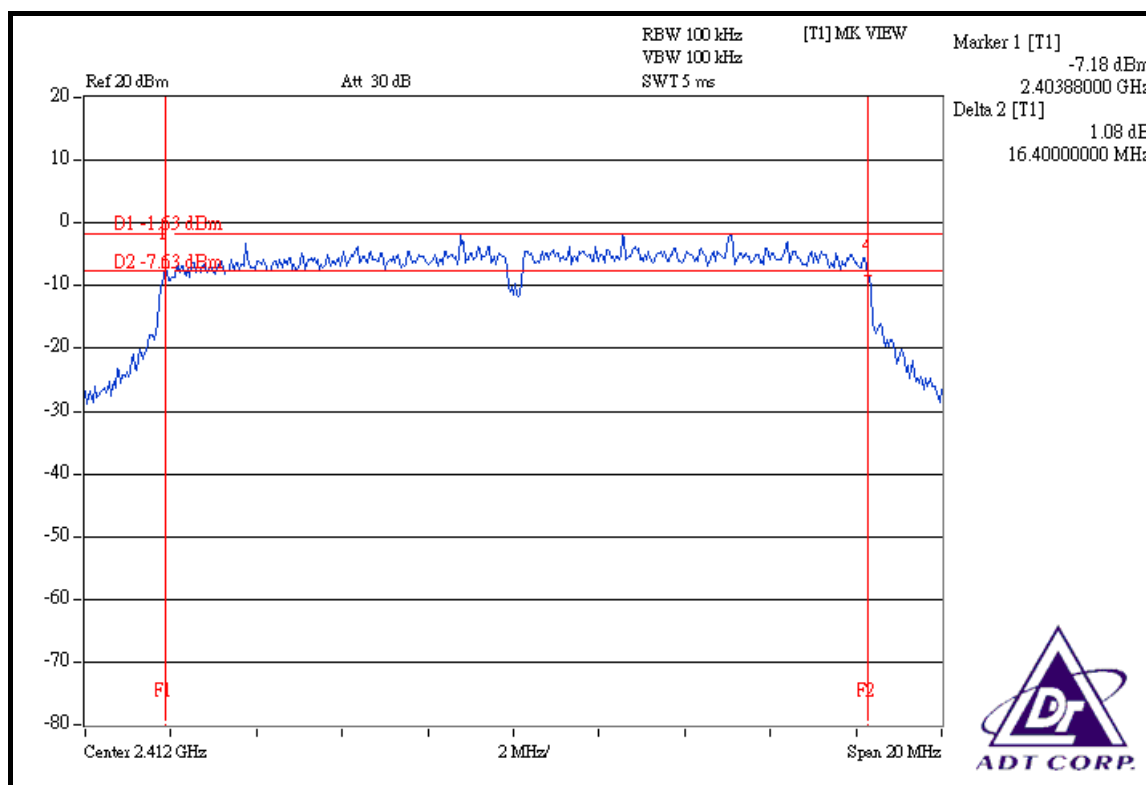


CH 6

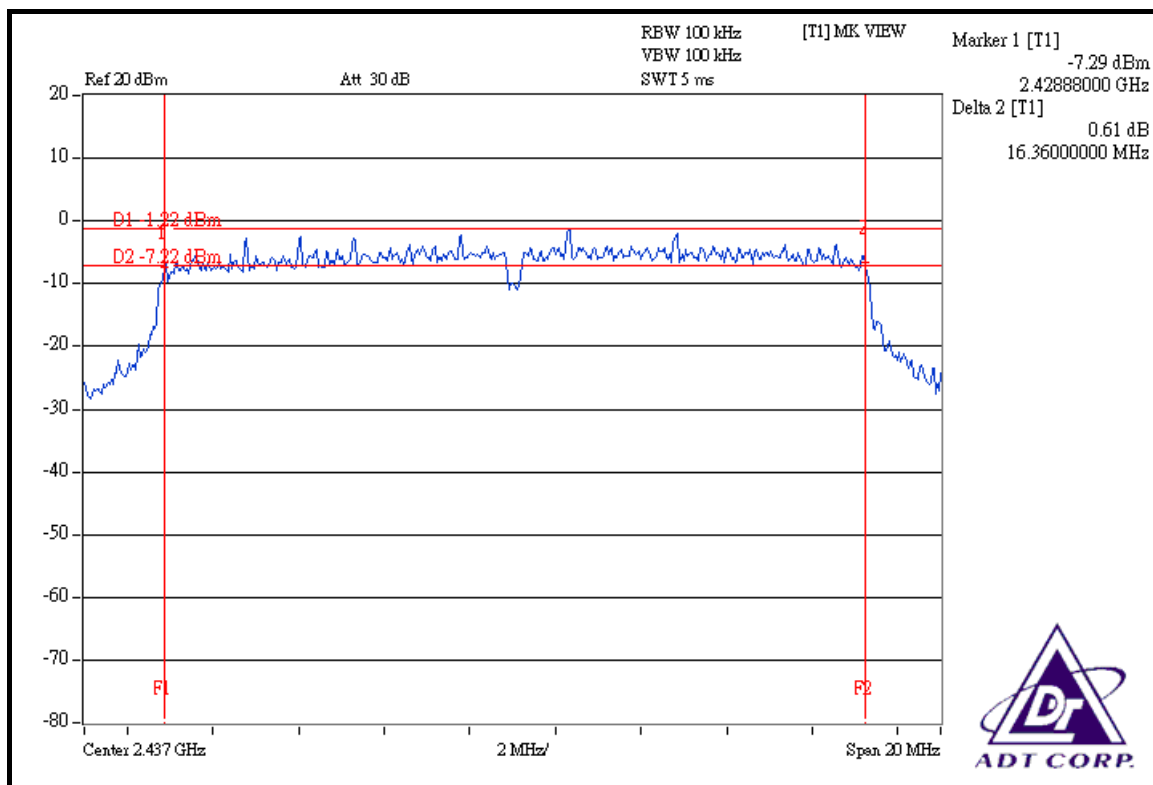


CH 11

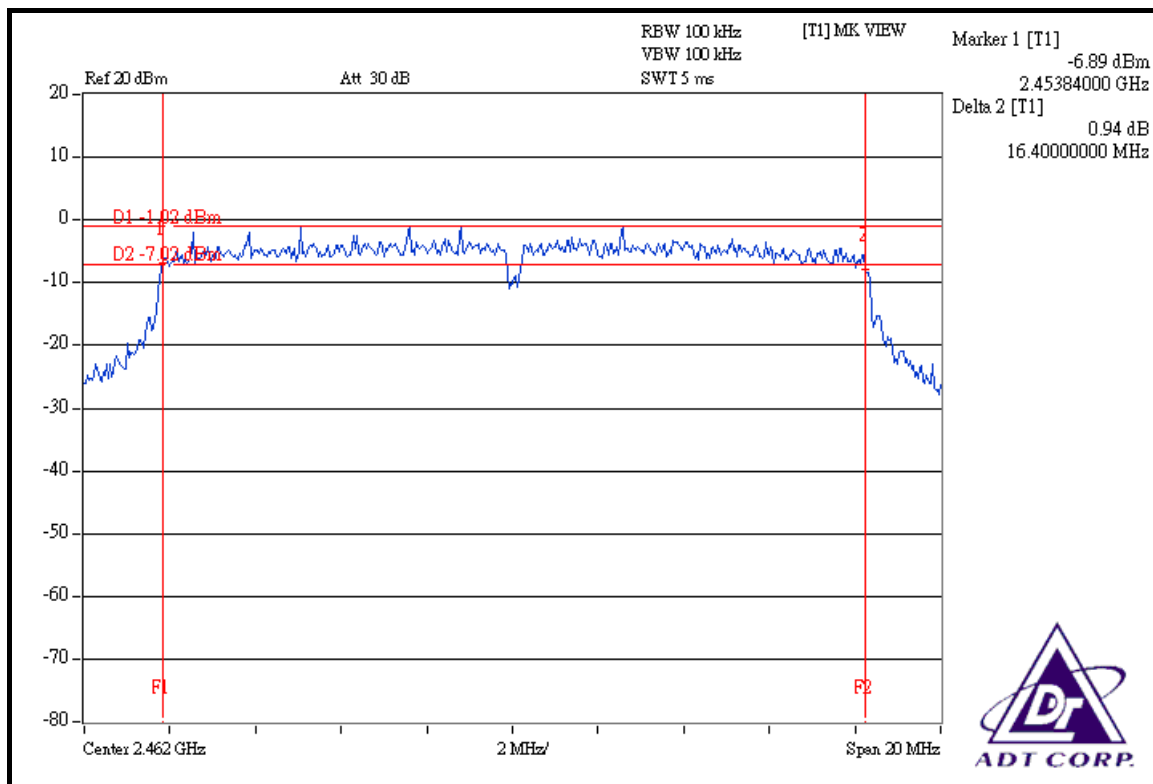


FOR CHAIN 1: CH 1

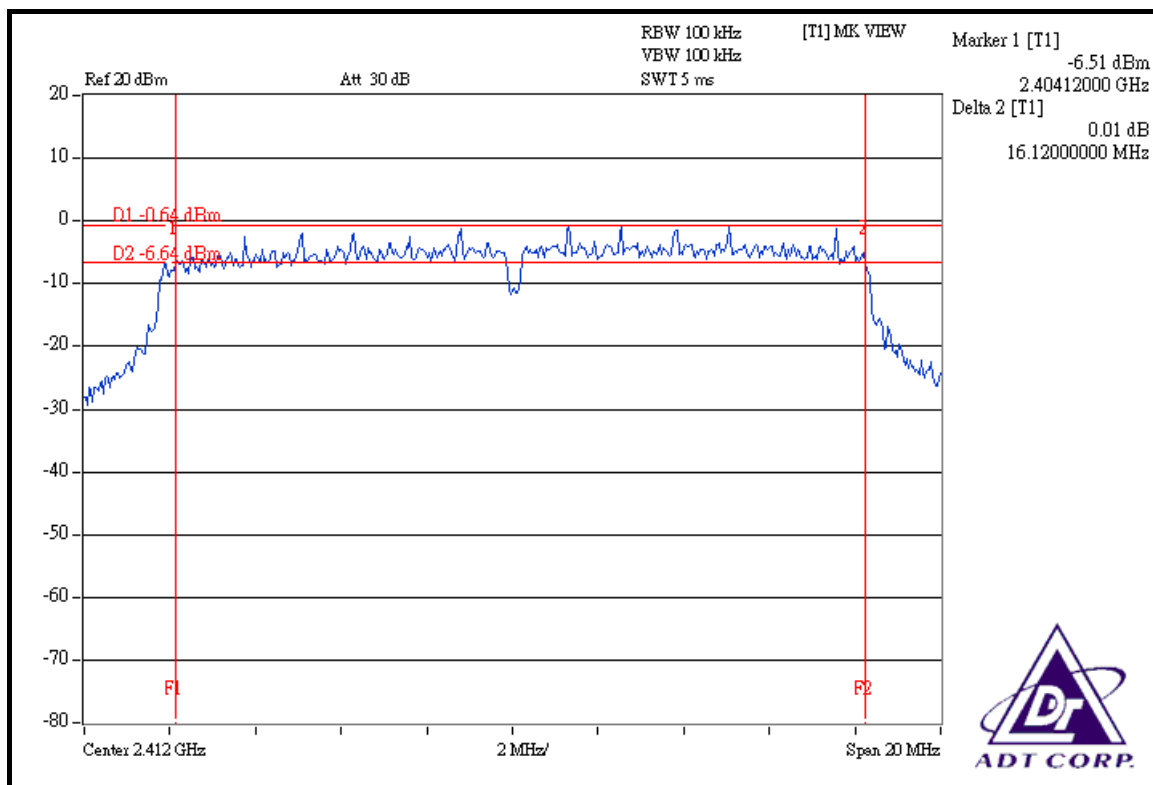

CH 6

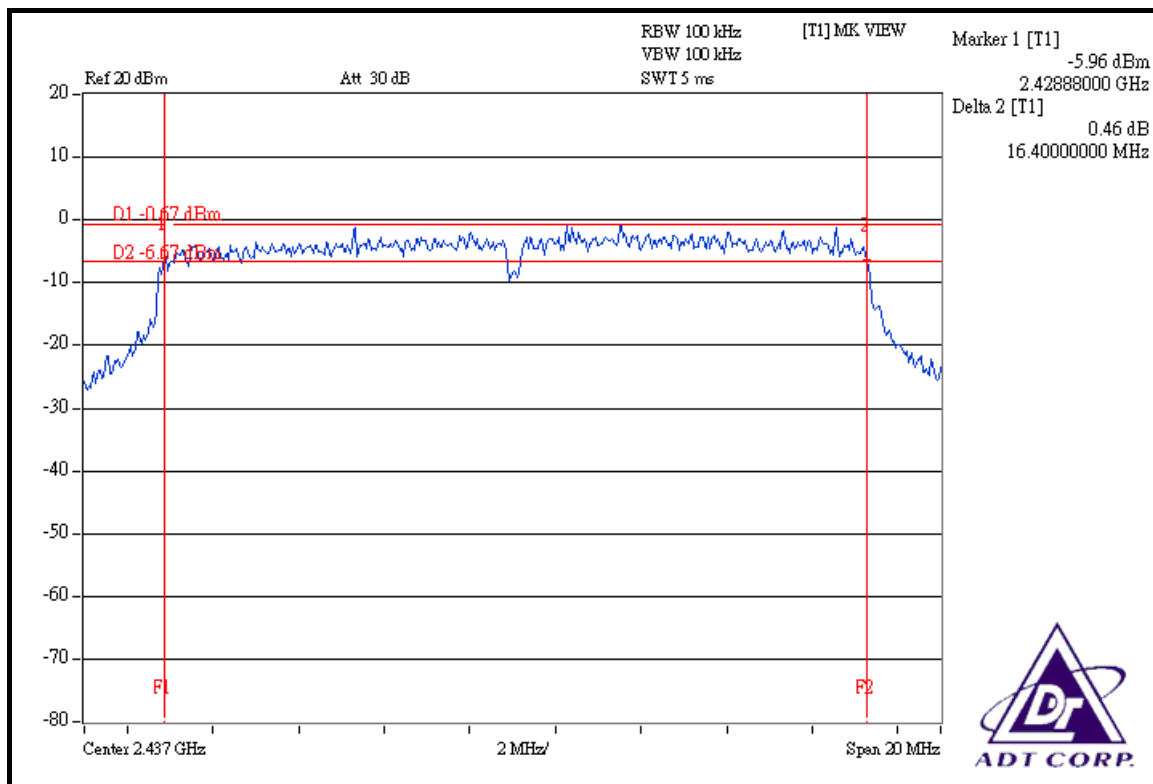

CH 11

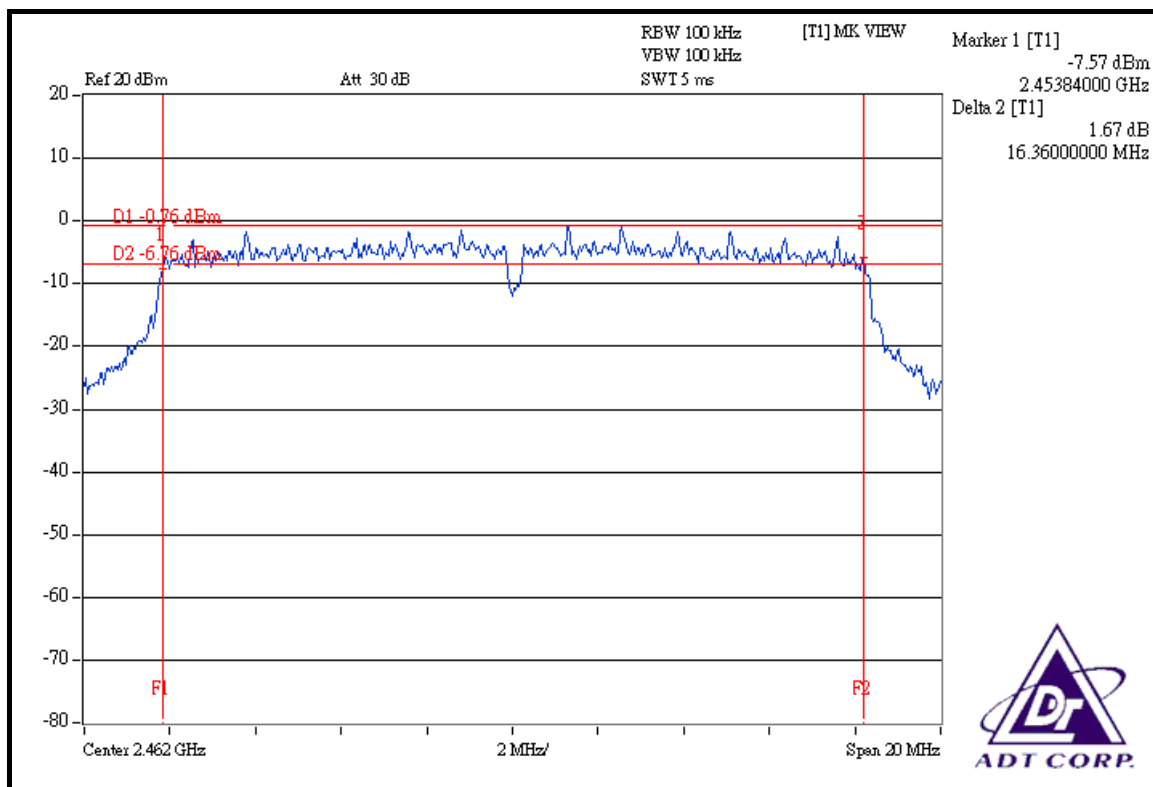


DRAFT 802.11n (20MHz) OFDM MODULATION – DUAL TX:


MODULATION TYPE	BPSK	TRANSFER RATE	7.2Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 63% RH, 991hPa
TEST MODE	B	TESTED BY	Long Chen

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	17.64	17.64	0.5	PASS
6	2437	17.60	17.64	0.5	PASS
11	2462	17.24	17.60	0.5	PASS


FOR CHAIN 0: CH 1

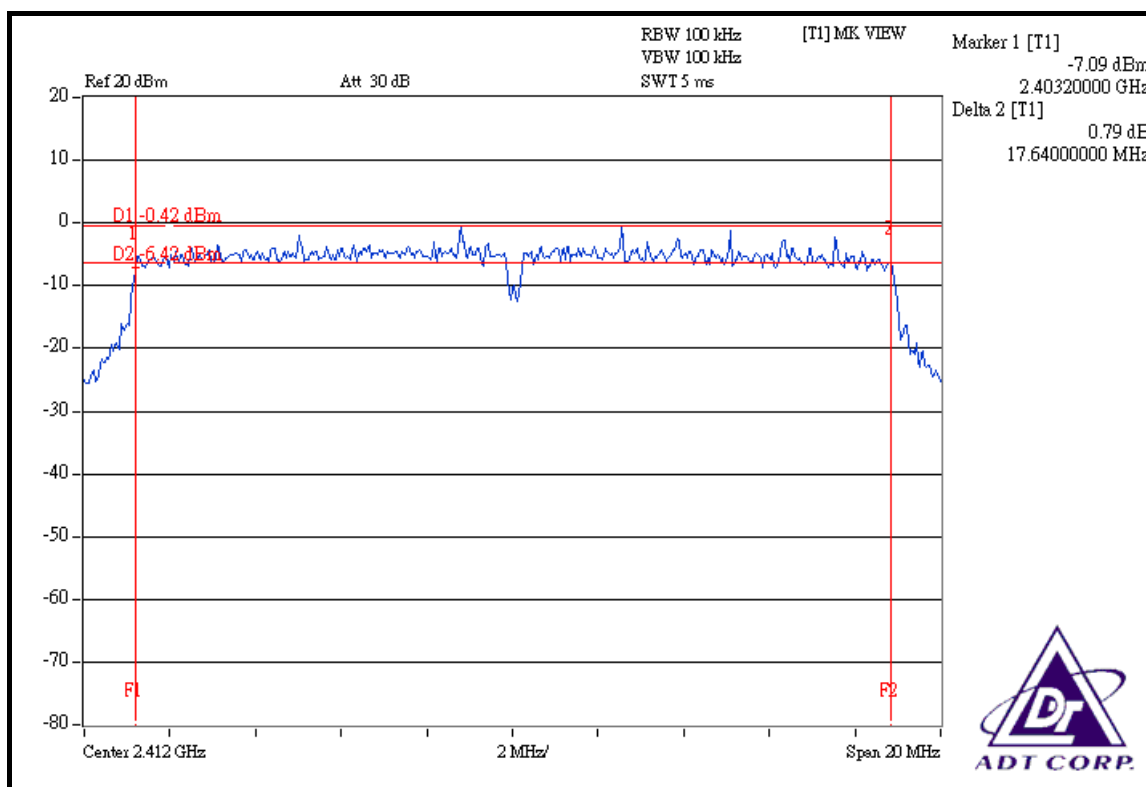


CH 6

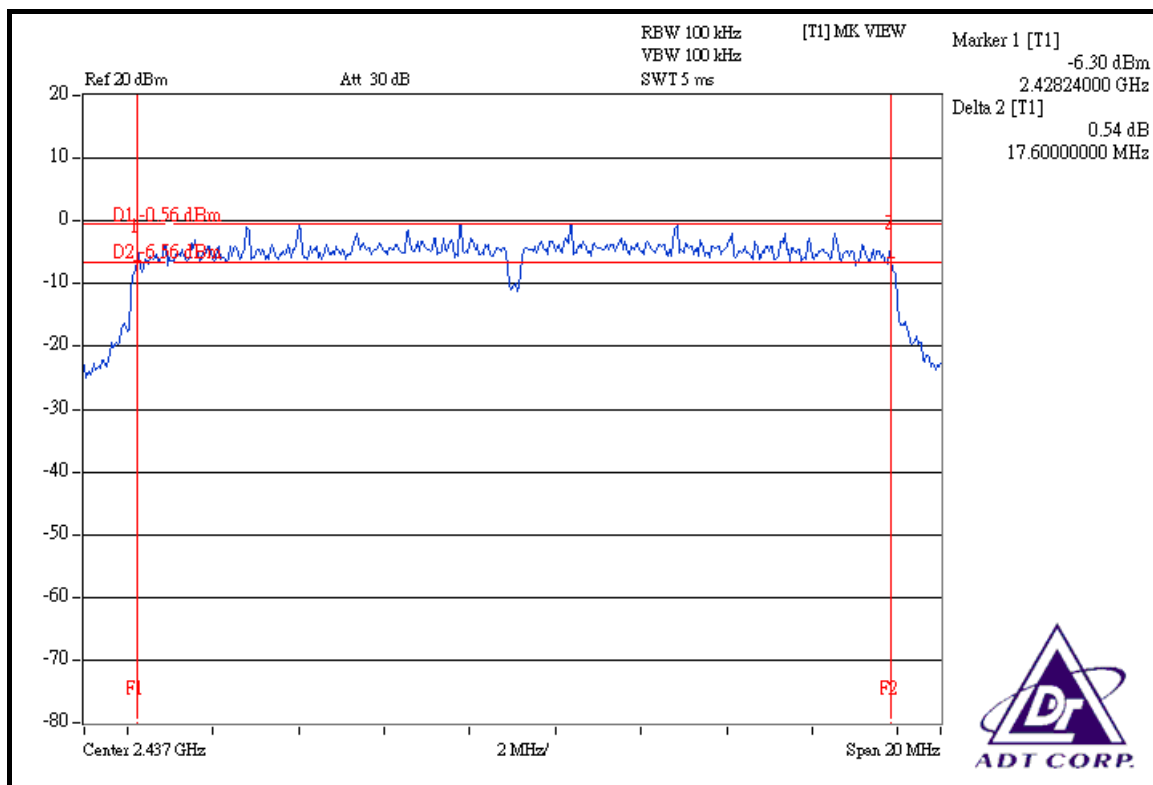


CH 11

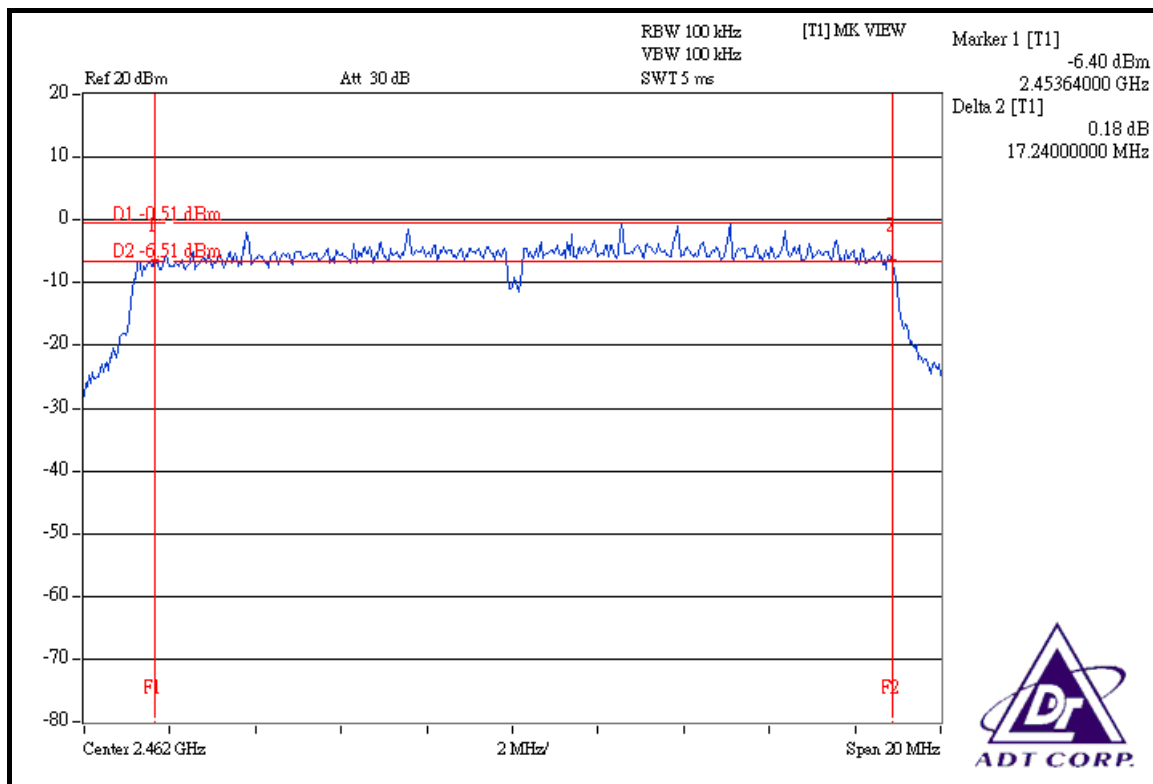

FOR CHAIN 1: CH 1

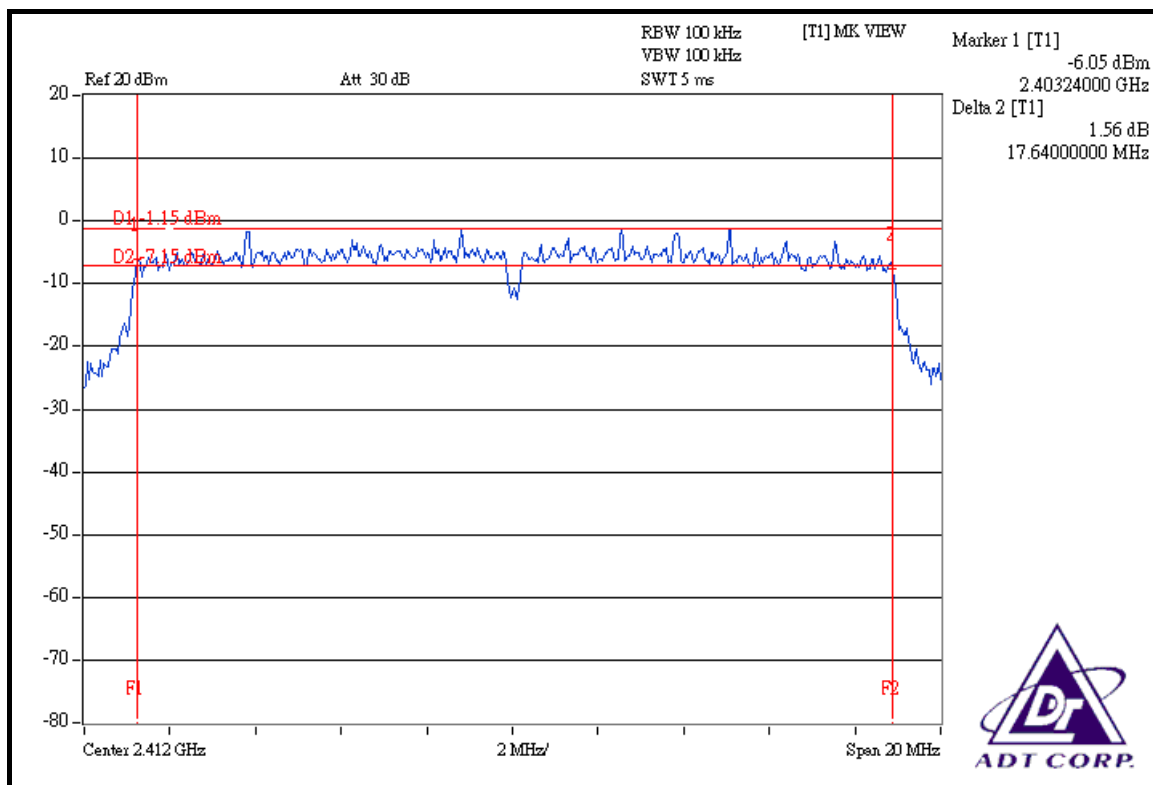

CH 6

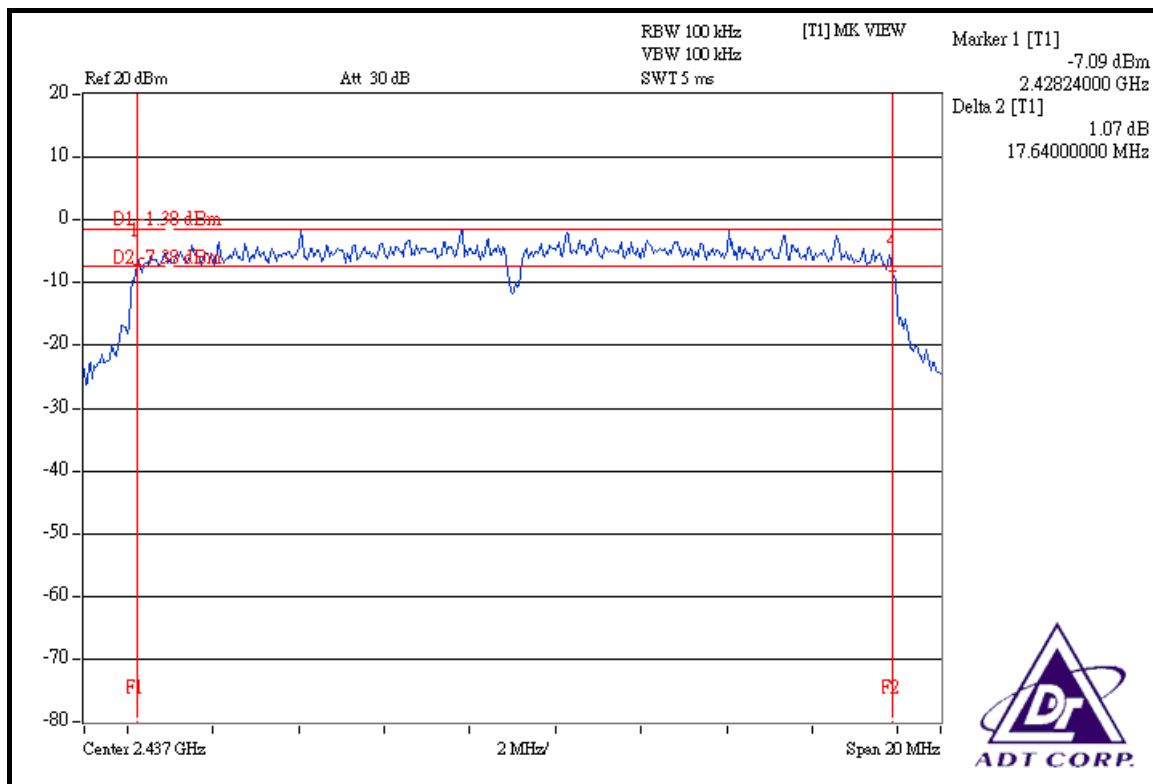


DRAFT 802.11n (40MHz) OFDM MODULATION – DUAL TX:


MODULATION TYPE	BPSK	TRANSFER RATE	15.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 63% RH, 991hPa
TEST MODE	B	TESTED BY	Long Chen

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2422	34.56	35.92	0.5	PASS
4	2437	36.16	35.84	0.5	PASS
7	2452	36.40	36.40	0.5	PASS


FOR CHAIN 0: CH 1

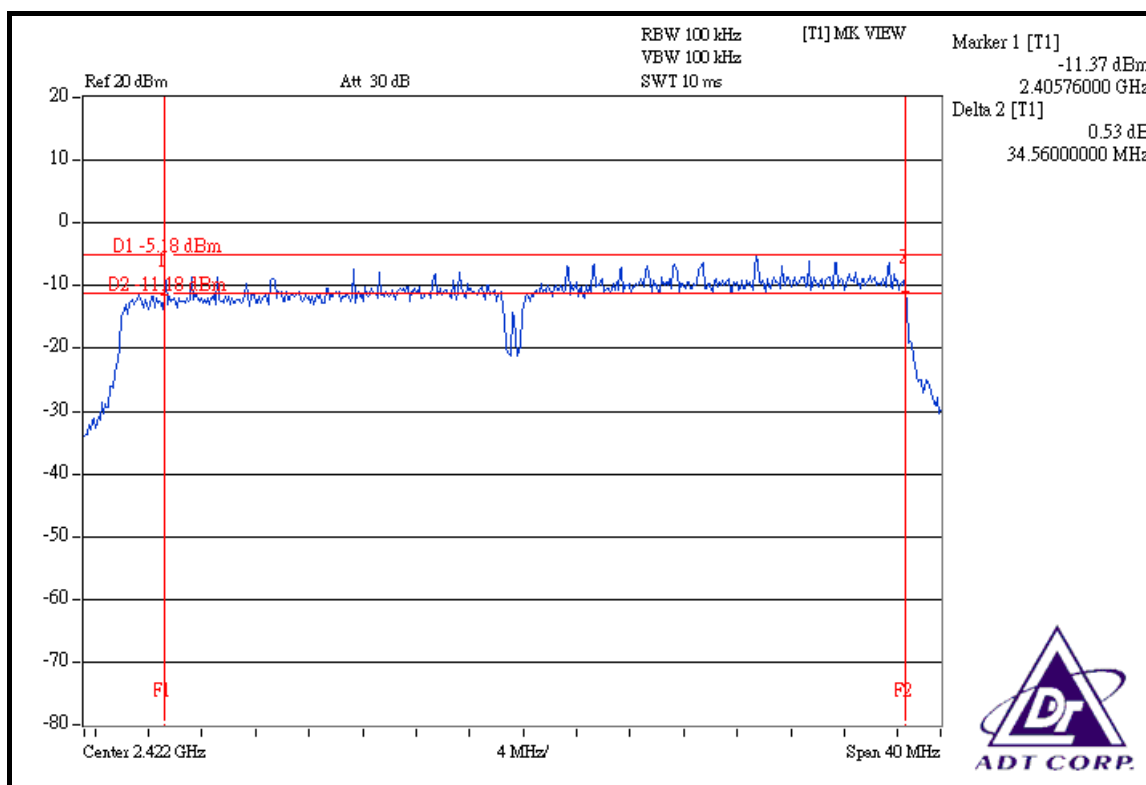


CH 4

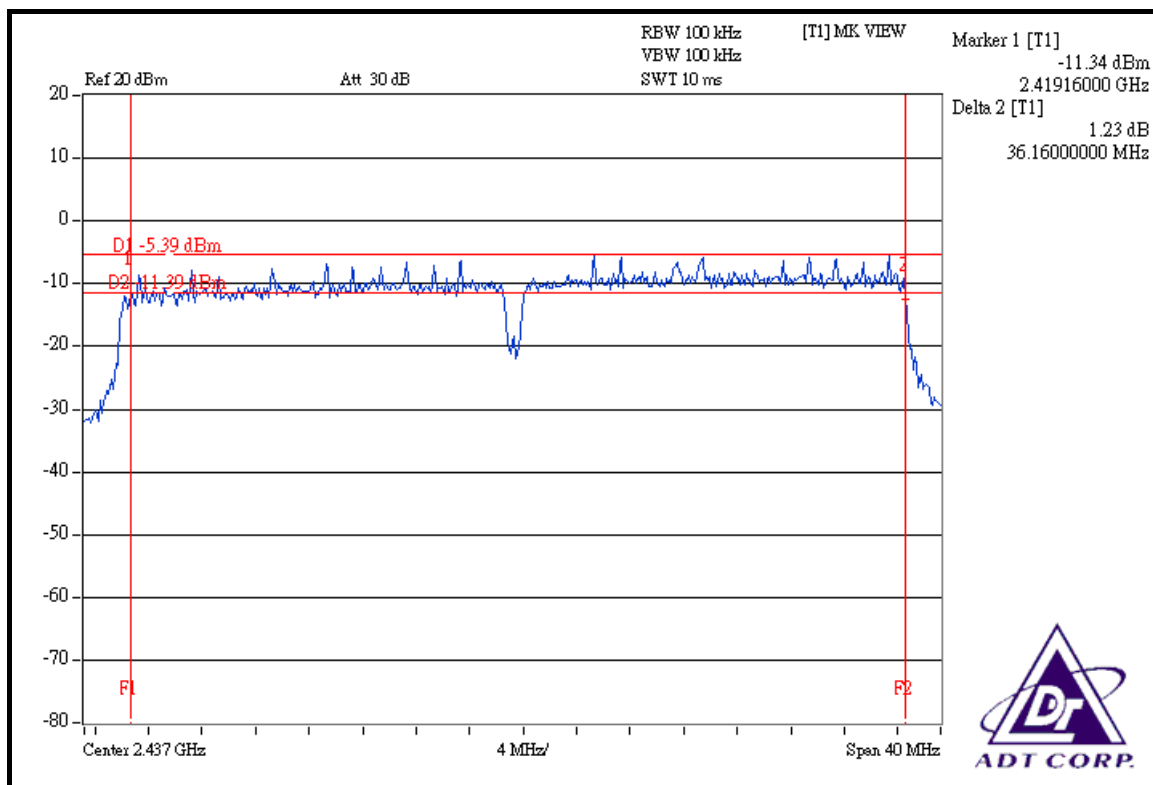


CH 7

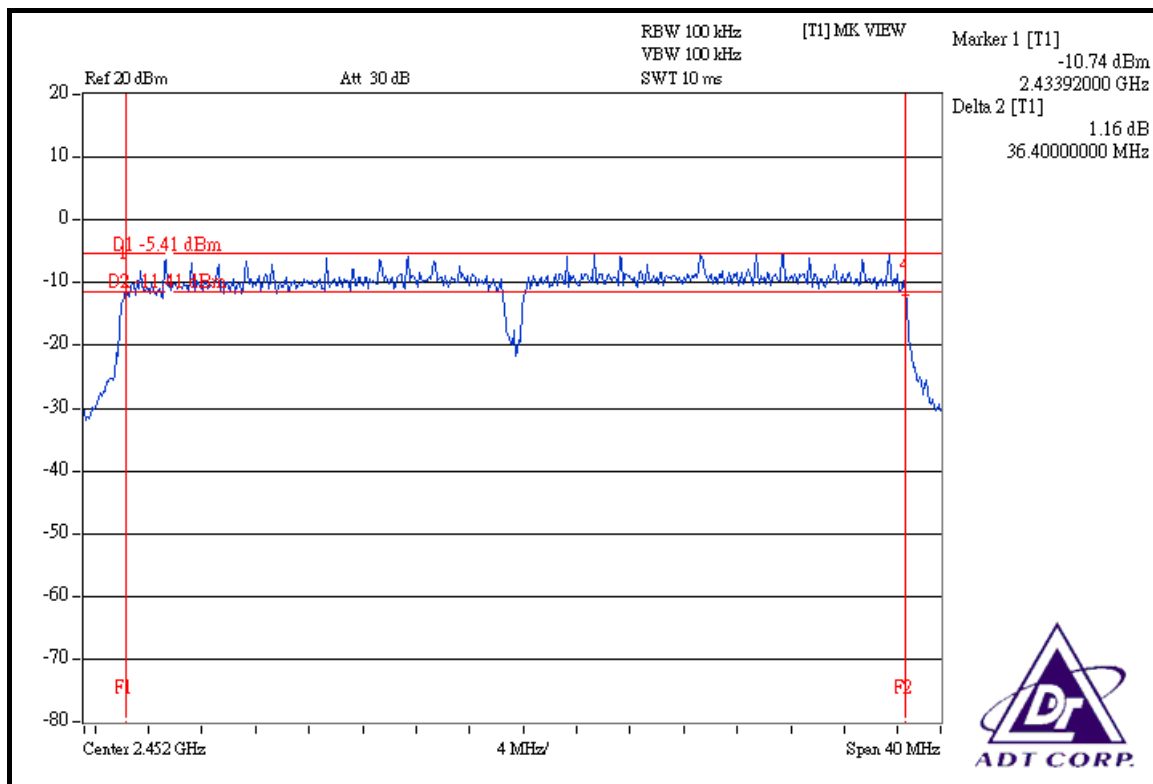


FOR CHAIN 1: CH 1

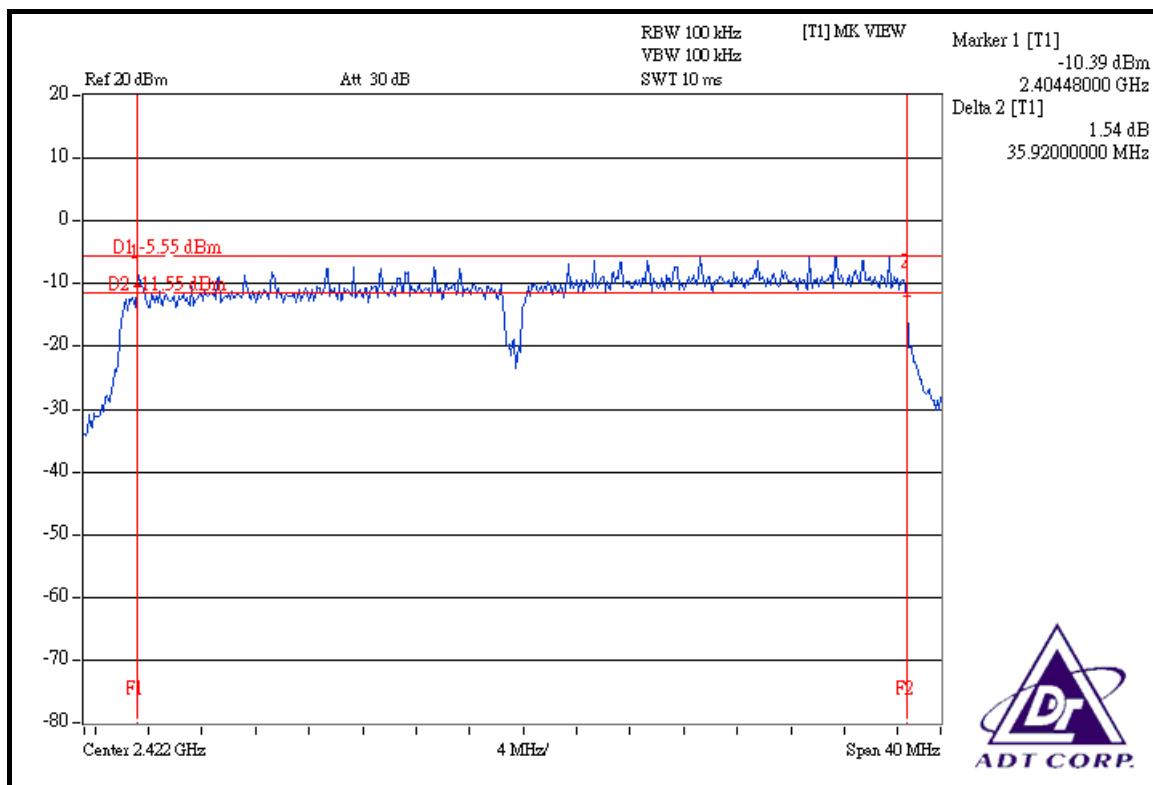

CH 4

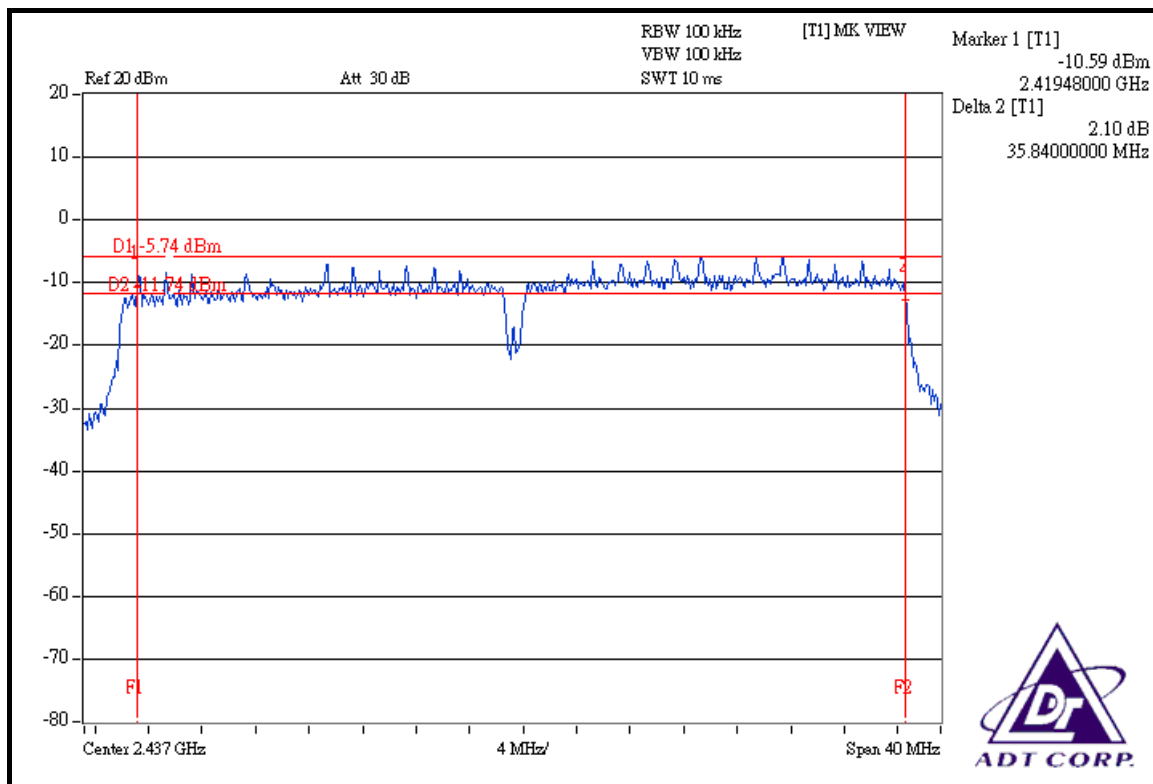

CH 7

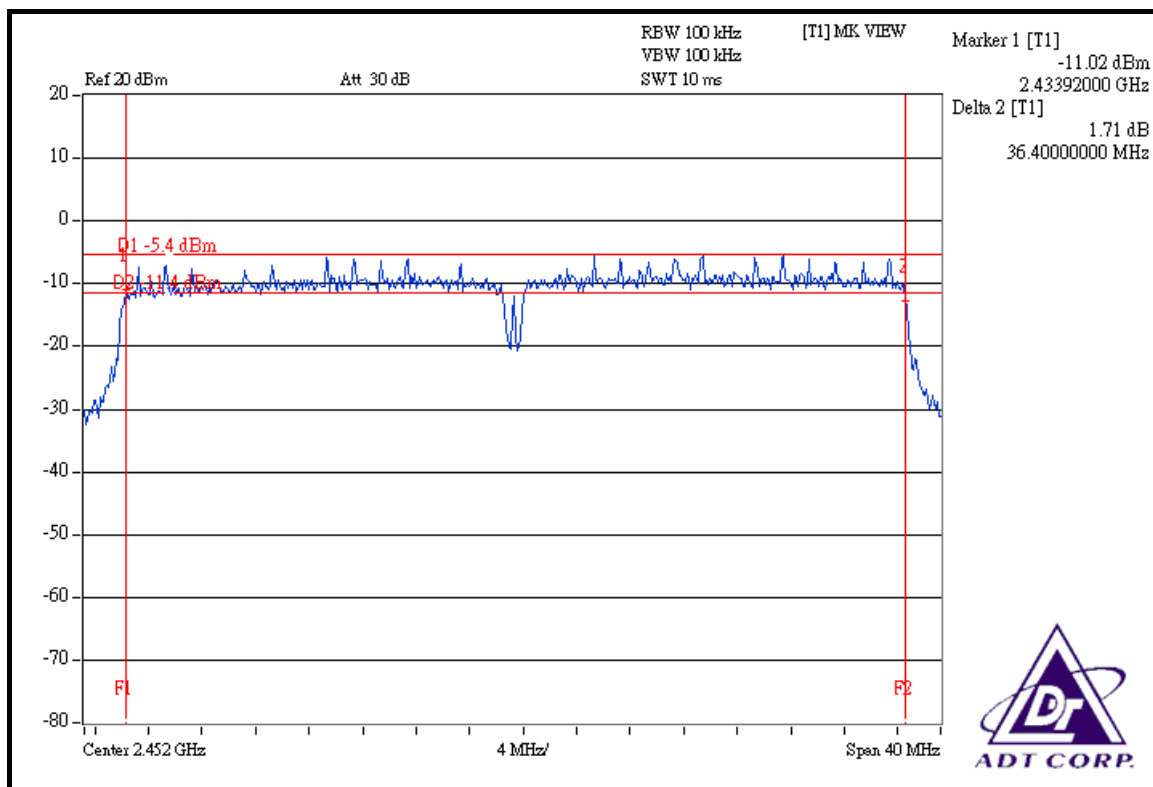

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP40	100040	Jun. 07, 2007
Anritsu Synthesized Signal Generator	68247B	984703	May 08, 2007
TEKTRONIX OSCILLOSCOPE	TDS1012	C037299	Nov. 27, 2007
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

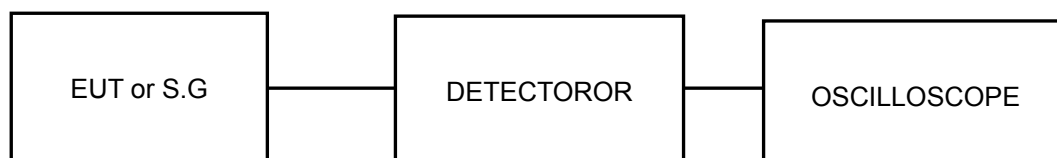

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS

802.11b DSSS MODULATION – SINGLE TX:

MODULATION TYPE	DBPSK	TRANSFER RATE	1.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 63% RH, 991hPa
TEST MODE	B	TESTED BY	Long Chen

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	2412	60.534	17.82	30	PASS
6	2437	66.222	18.21	30	PASS
11	2462	59.566	17.75	30	PASS

802.11g OFDM MODULATION – DUAL TX:

MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 63% RH, 991hPa
TEST MODE	B	TESTED BY	Long Chen

CHAN.	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)		PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1				
1	2412	36.983	38.194	15.68	15.82	75.177	18.76	30	PASS
6	2437	41.210	39.084	16.15	15.92	80.294	19.05	30	PASS
11	2462	39.084	41.020	15.92	16.13	80.104	19.04	30	PASS

DRAFT 802.11n (20MHz) OFDM MODULATION – DUAL TX:

MODULATION TYPE	BPSK	TRANSFER RATE	7.2Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 63% RH, 991hPa
TEST MODE	B	TESTED BY	Long Chen

CHAN.	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)		PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1				
1	2412	34.277	38.459	15.35	15.85	72.736	18.62	30	PASS
6	2437	39.355	41.783	15.95	16.21	81.138	19.09	30	PASS
11	2462	37.411	39.084	15.73	15.92	76.495	18.84	30	PASS

DRAFT 802.11n (40MHz) OFDM MODULATION – DUAL TX:

MODULATION TYPE	BPSK	TRANSFER RATE	15.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 63% RH, 991hPa
TEST MODE	B	TESTED BY	Long Chen

CHAN.	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)		PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (mW)	TOTAL PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1				
1	2422	23.174	23.714	13.65	13.75	46.888	16.71	30	PASS
4	2437	23.388	24.099	13.69	13.82	47.487	16.77	30	PASS
7	2452	23.768	24.774	13.76	13.94	48.543	16.86	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP40	100040	Jun. 07, 2007

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6


4.5.7 TEST RESULTS

802.11b DSSS MODULATION – SINGLE TX:

MODULATION TYPE	DBPSK	TRANSFER RATE	1.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 63% RH, 991hPa
TEST MODE	B	TESTED BY	Long Chen

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	2412	-8.15	8	PASS
6	2437	-7.40	8	PASS
11	2462	-8.08	8	PASS

CH 1

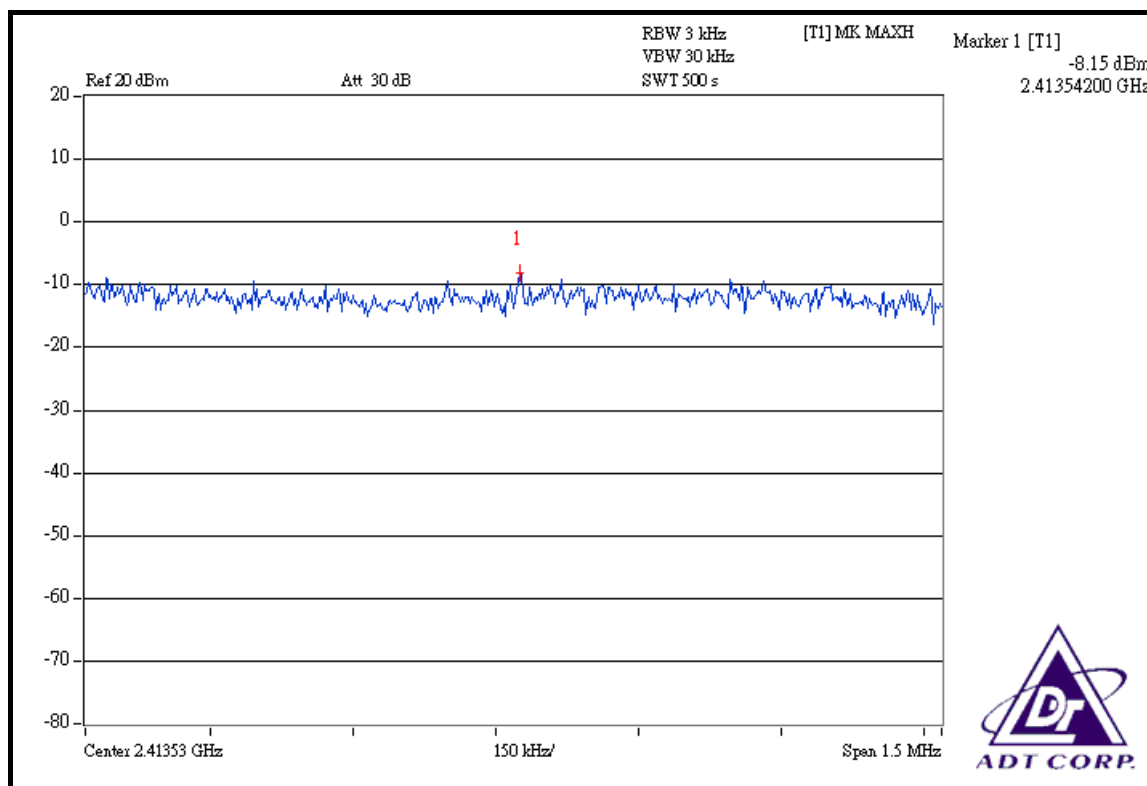


802.11g OFDM MODULATION – DUAL TX:


MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 63% RH, 991hPa
TEST MODE	B	TESTED BY	Long Chen

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (mW)		RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1				
1	2412	0.036	0.032	-14.46	-14.90	0.068	-11.674	8	PASS
6	2437	0.040	0.031	-14.03	-15.09	0.071	-11.487	8	PASS
11	2462	0.041	0.031	-13.86	-15.12	0.072	-11.427	8	PASS


FOR CHAIN 0: CH 1

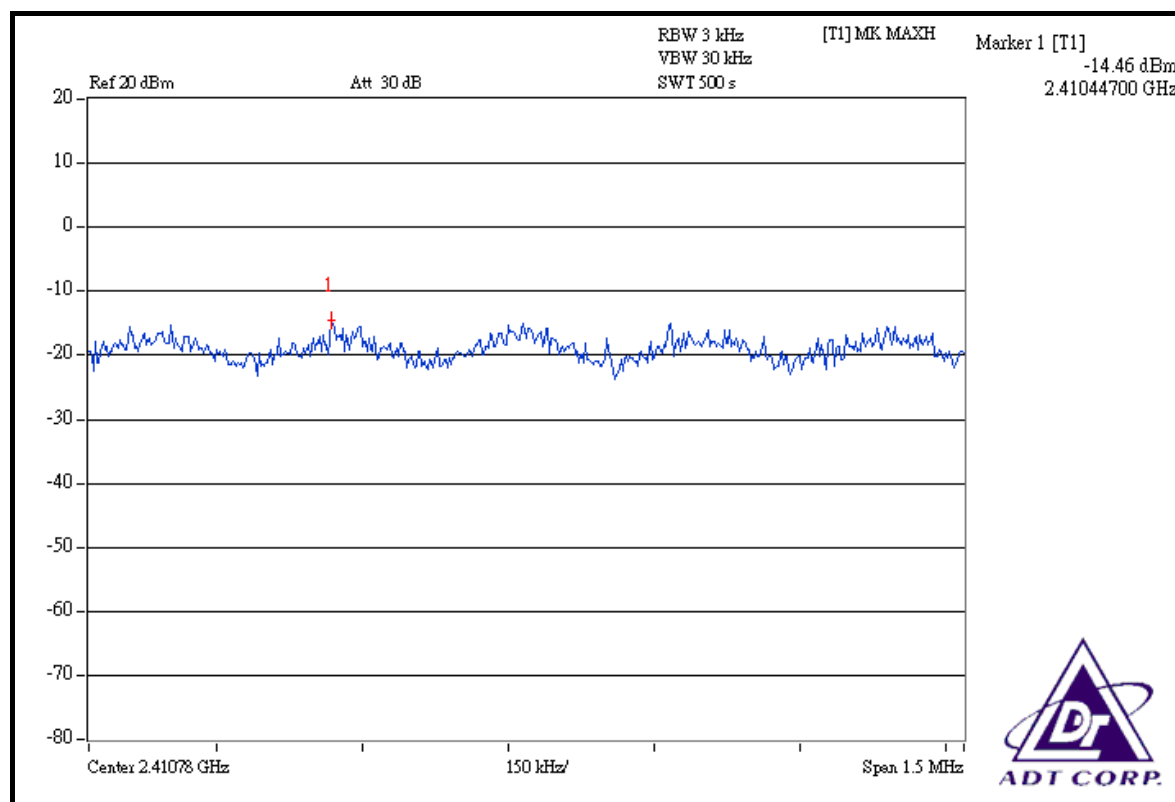


CH 6

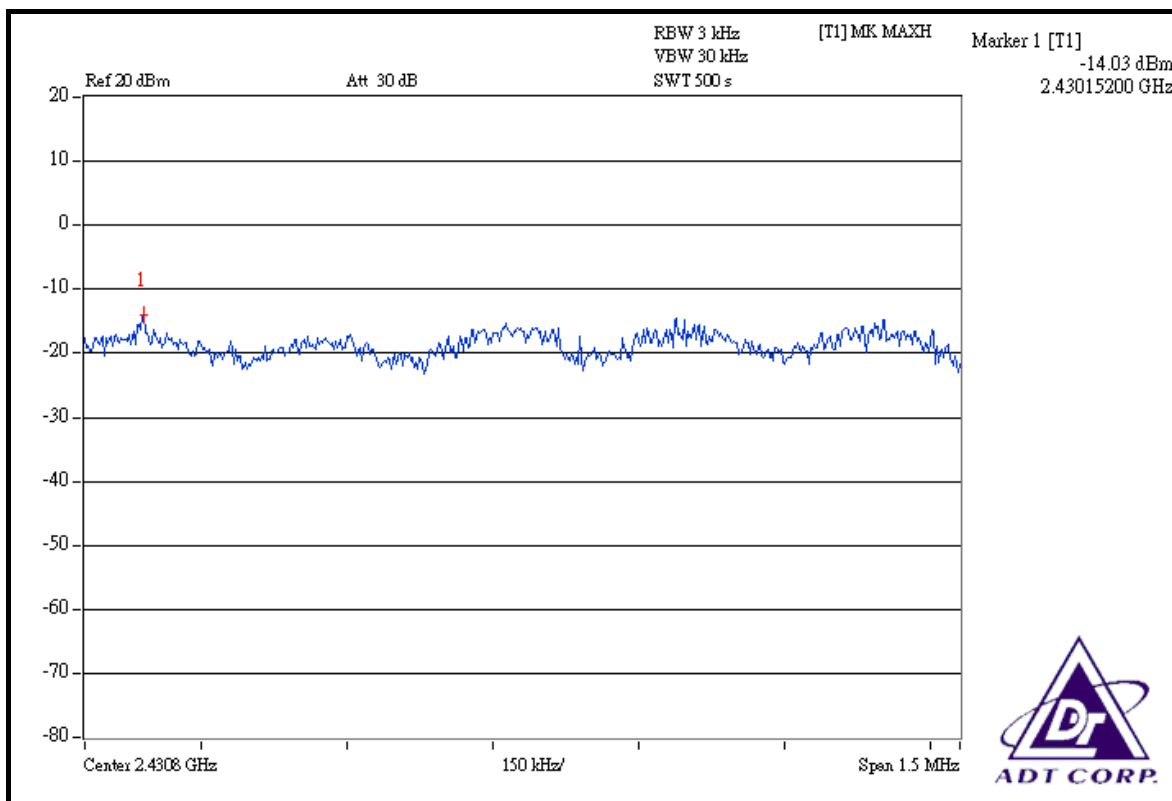


CH 11

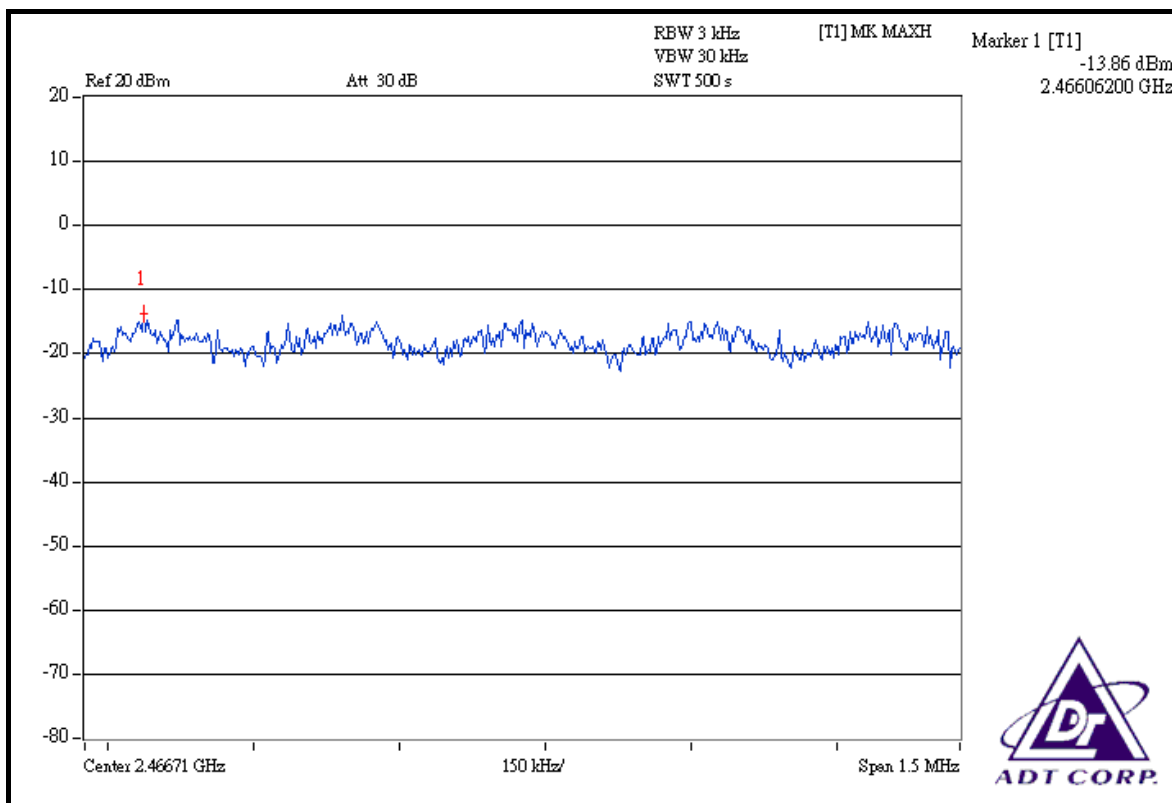


FOR CHAIN 1: CH 1

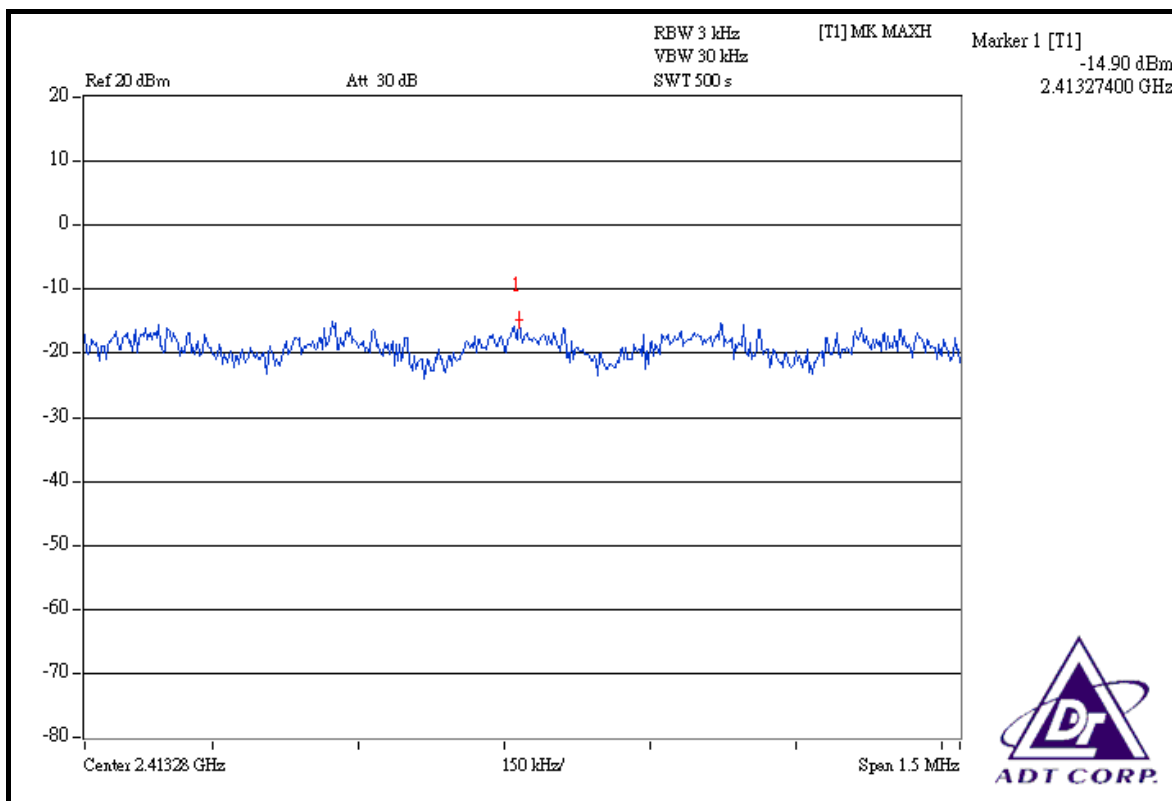

CH 6

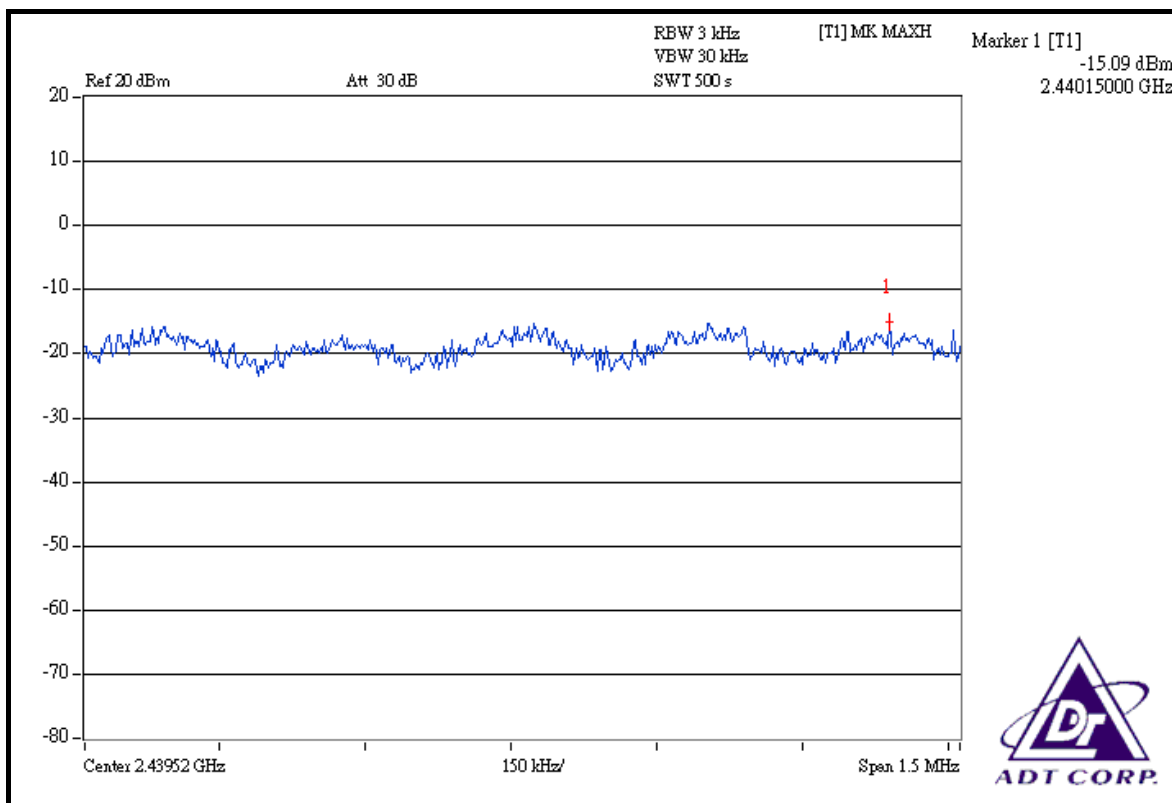

CH 11

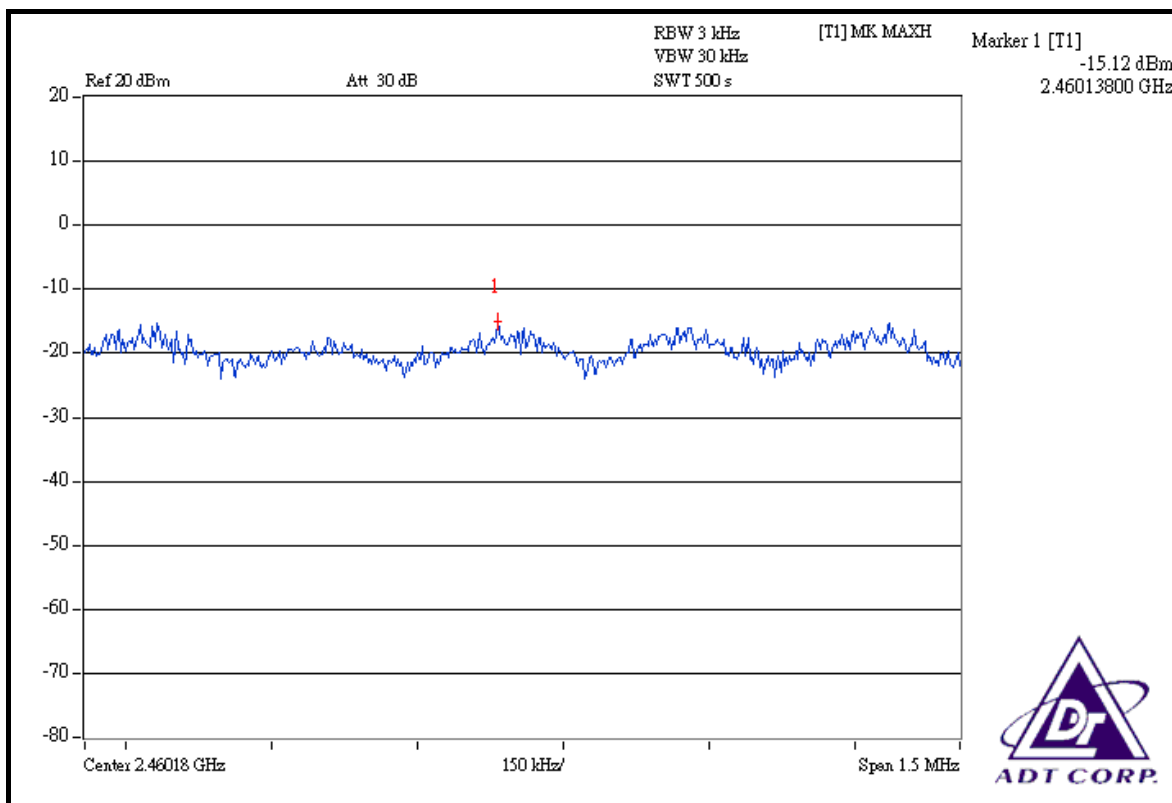


DRAFT 802.11n (20MHz) OFDM MODULATION – DUAL TX:


MODULATION TYPE	BPSK	TRANSFER RATE	7.2Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 63% RH, 991hPa
TEST MODE	B	TESTED BY	Long Chen

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (mW)		RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1				
1	2412	0.034	0.031	-14.73	-15.07	0.065	-11.871	8	PASS
6	2437	0.038	0.032	-14.24	-14.95	0.070	-11.549	8	PASS
11	2462	0.037	0.030	-14.28	-15.24	0.067	-11.739	8	PASS


FOR CHAIN 0: CH 1

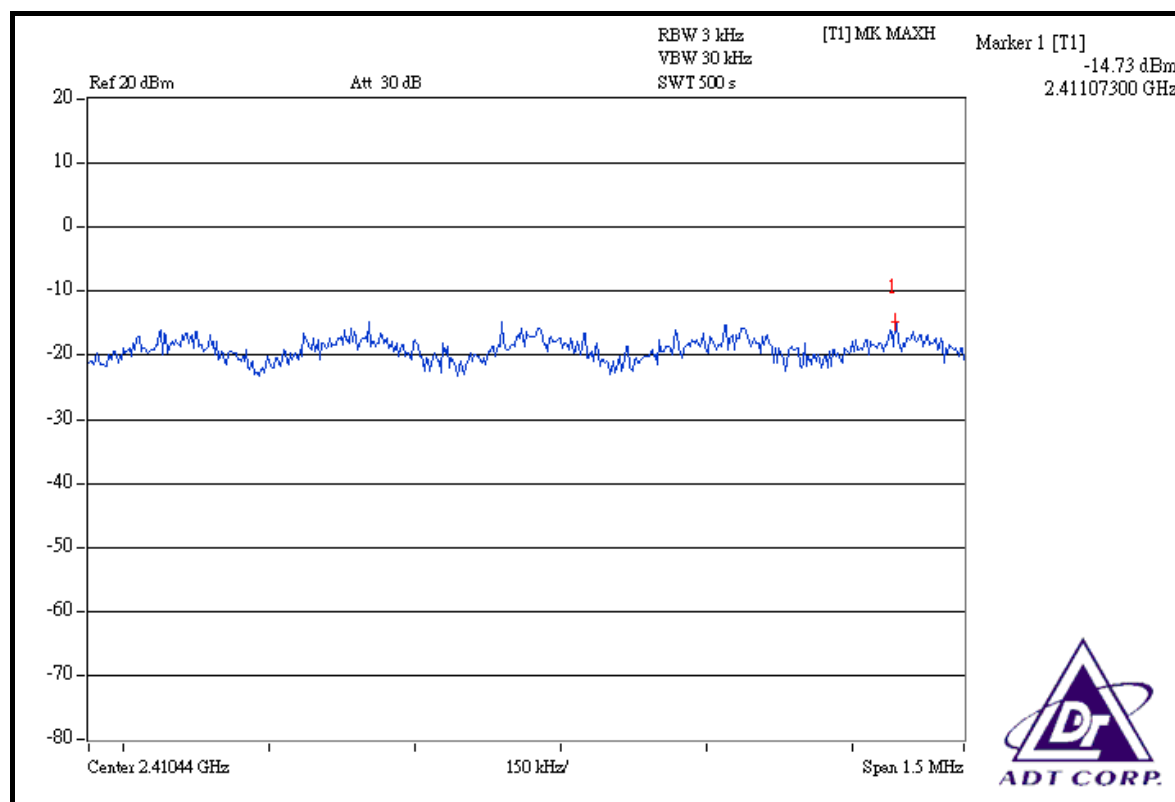


CH 6

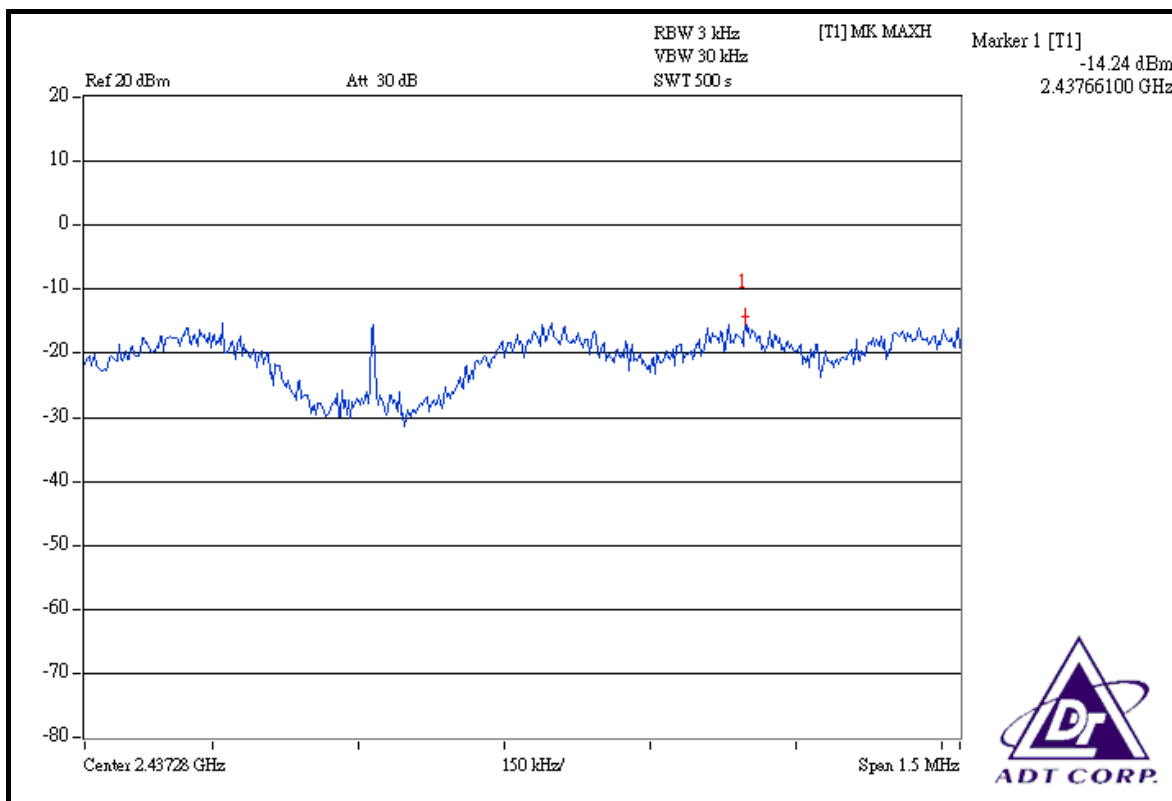


CH 11

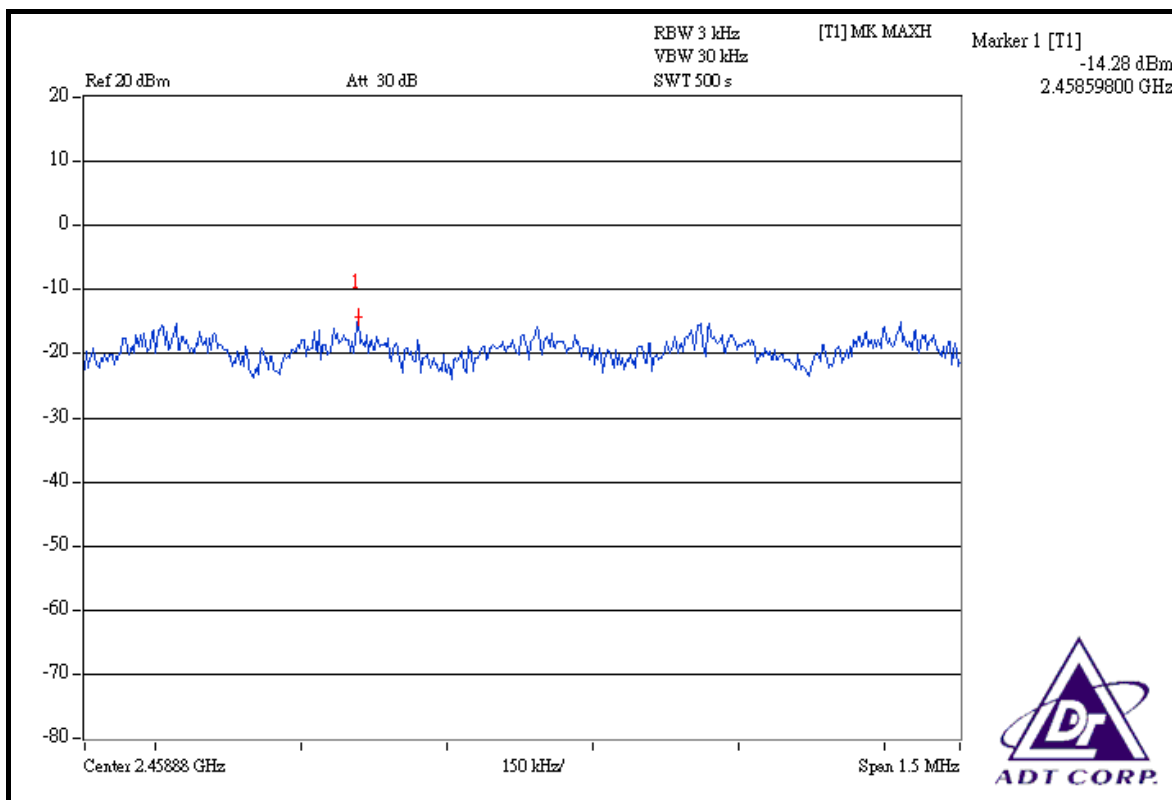


FOR CHAIN 1: CH 1

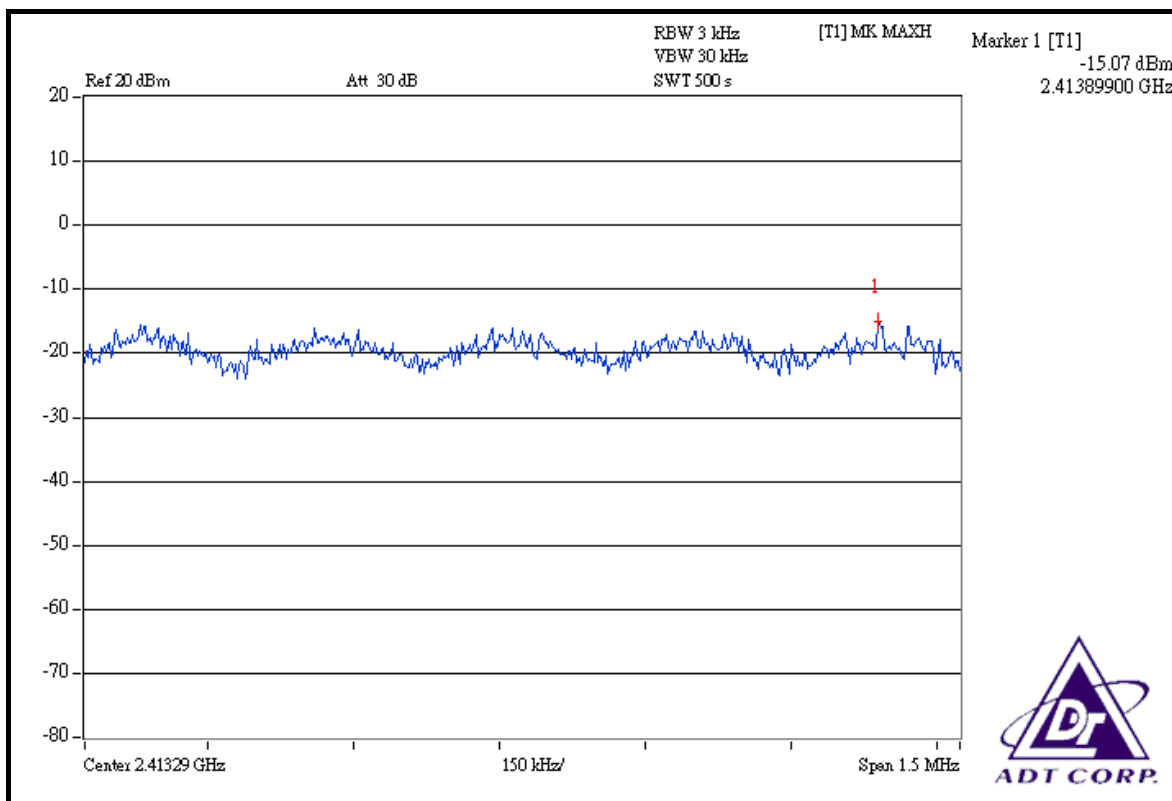

CH 6

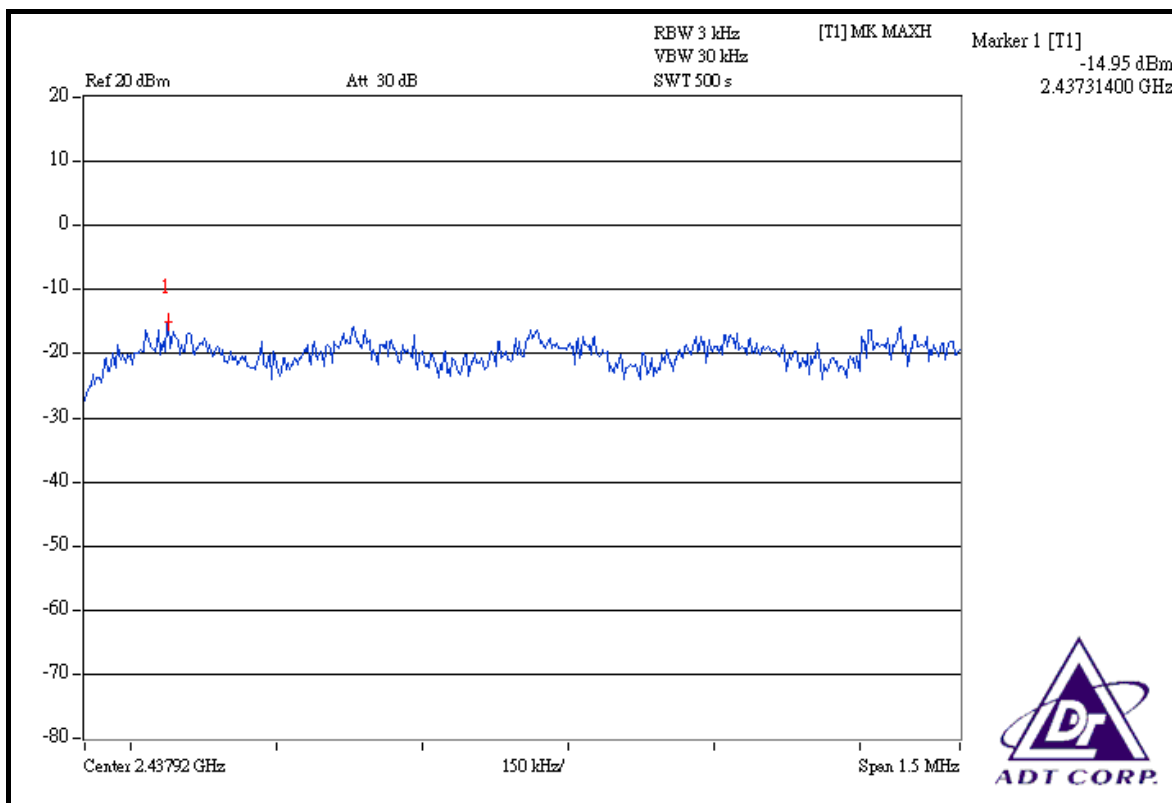

CH 11

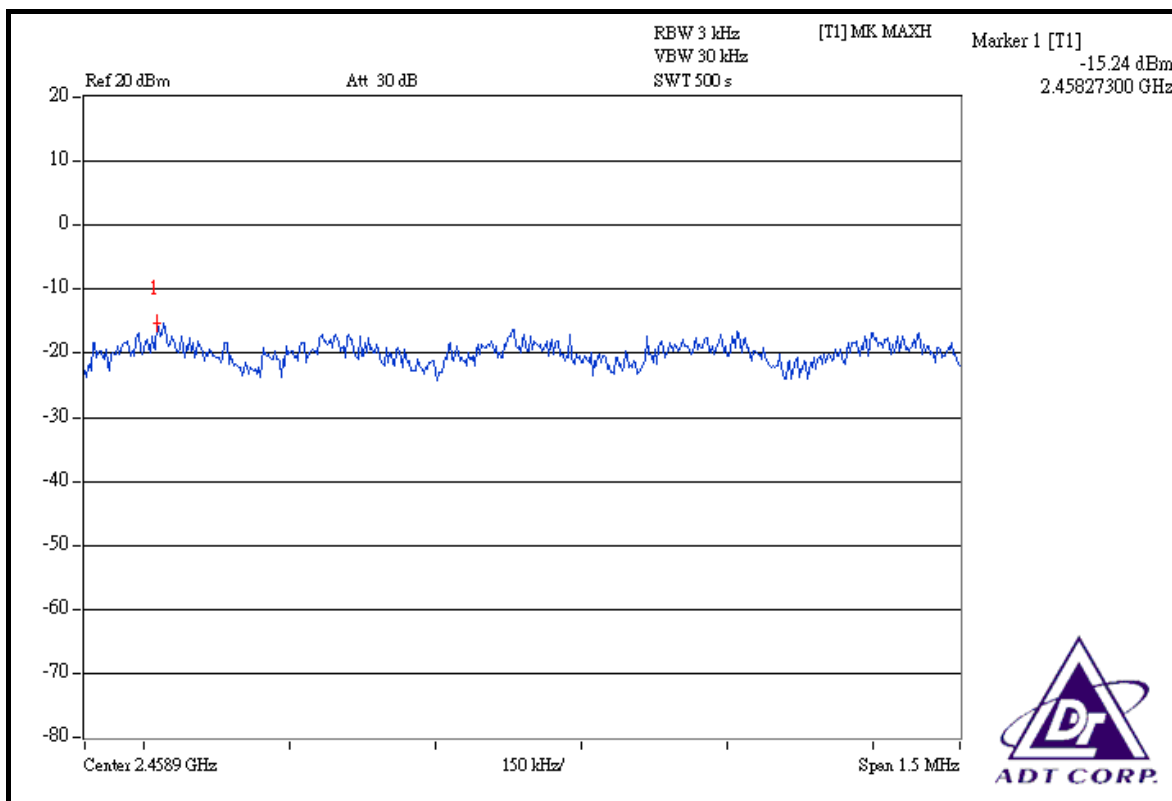


DRAFT 802.11n (40MHz) OFDM MODULATION – DUAL TX:


MODULATION TYPE	BPSK	TRANSFER RATE	15.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg.C, 63% RH, 991hPa
TEST MODE	B	TESTED BY	Long Chen

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (mW)		RF POWER LEVEL IN 3kHz BW (dBm)		TOTAL POWER DENSITY (mW)	TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1				
1	2422	0.016	0.018	-17.89	-17.33	0.035	-14.559	8	PASS
4	2437	0.017	0.019	-17.71	-17.16	0.036	-14.437	8	PASS
7	2452	0.016	0.018	-17.92	-17.55	0.034	-14.685	8	PASS


FOR CHAIN 0: CH 1

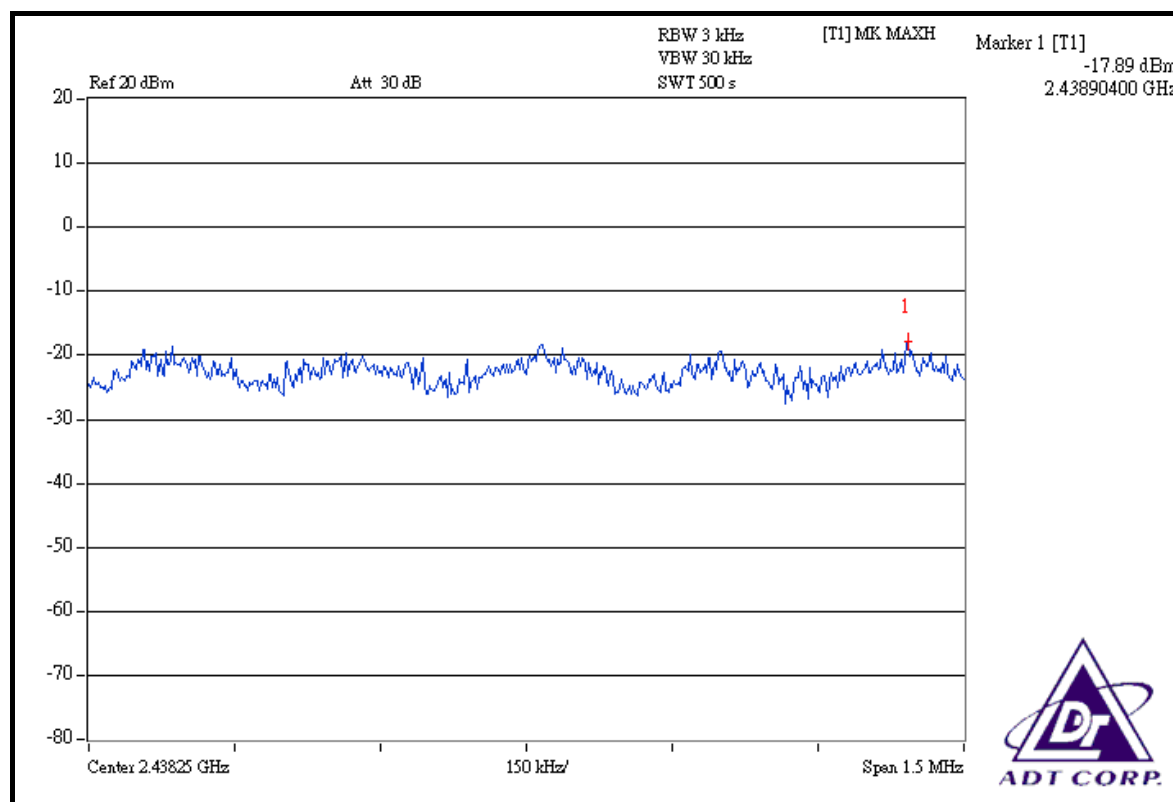


CH 4

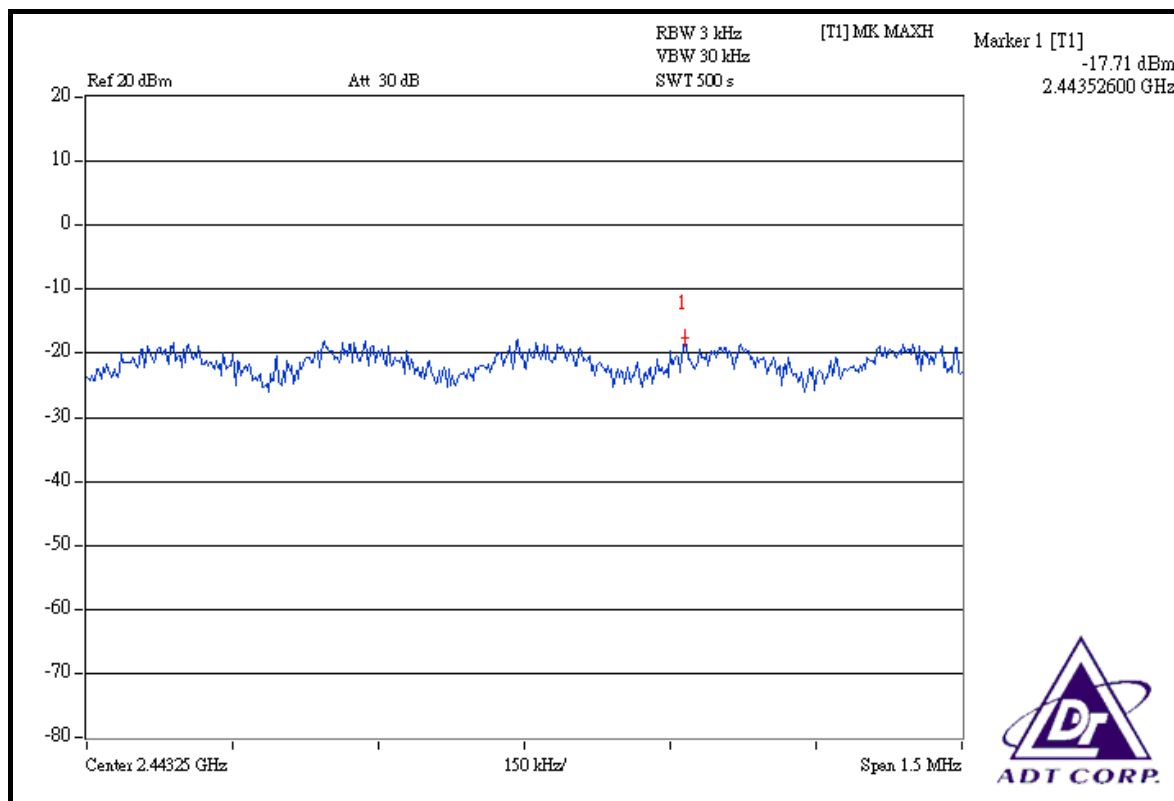


CH 7

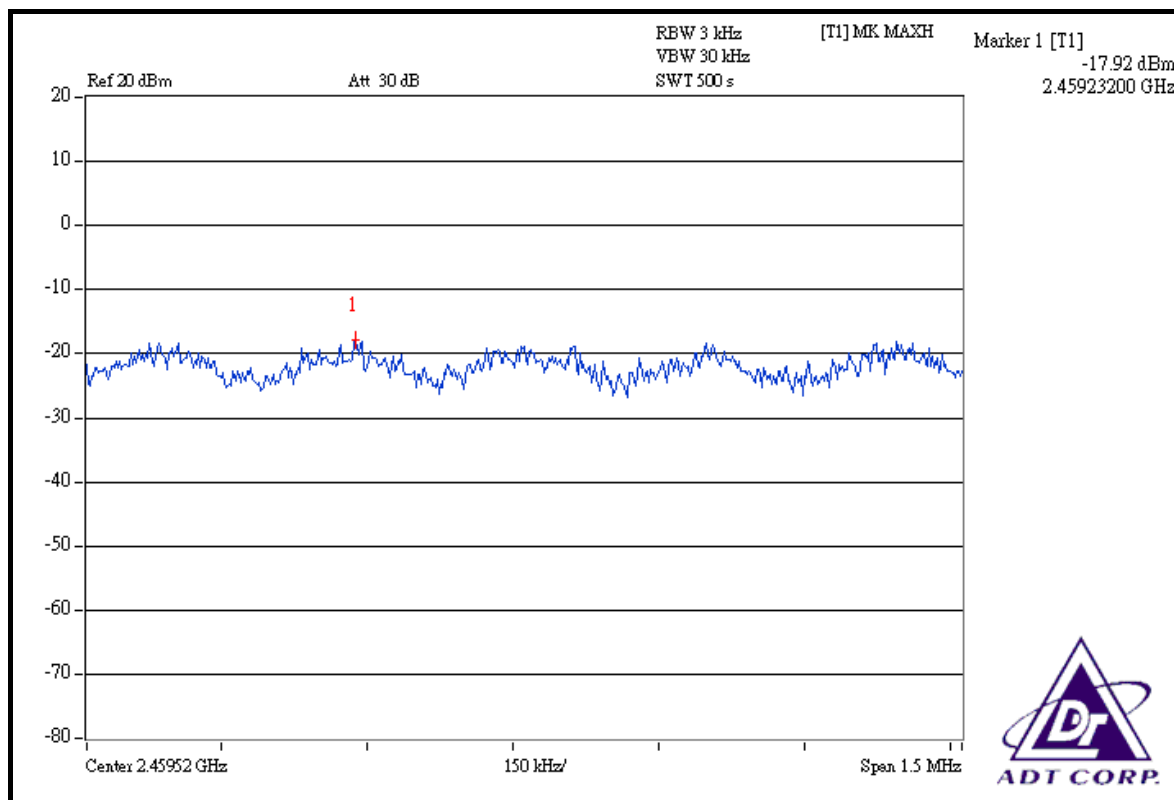


FOR CHAIN 1: CH 1

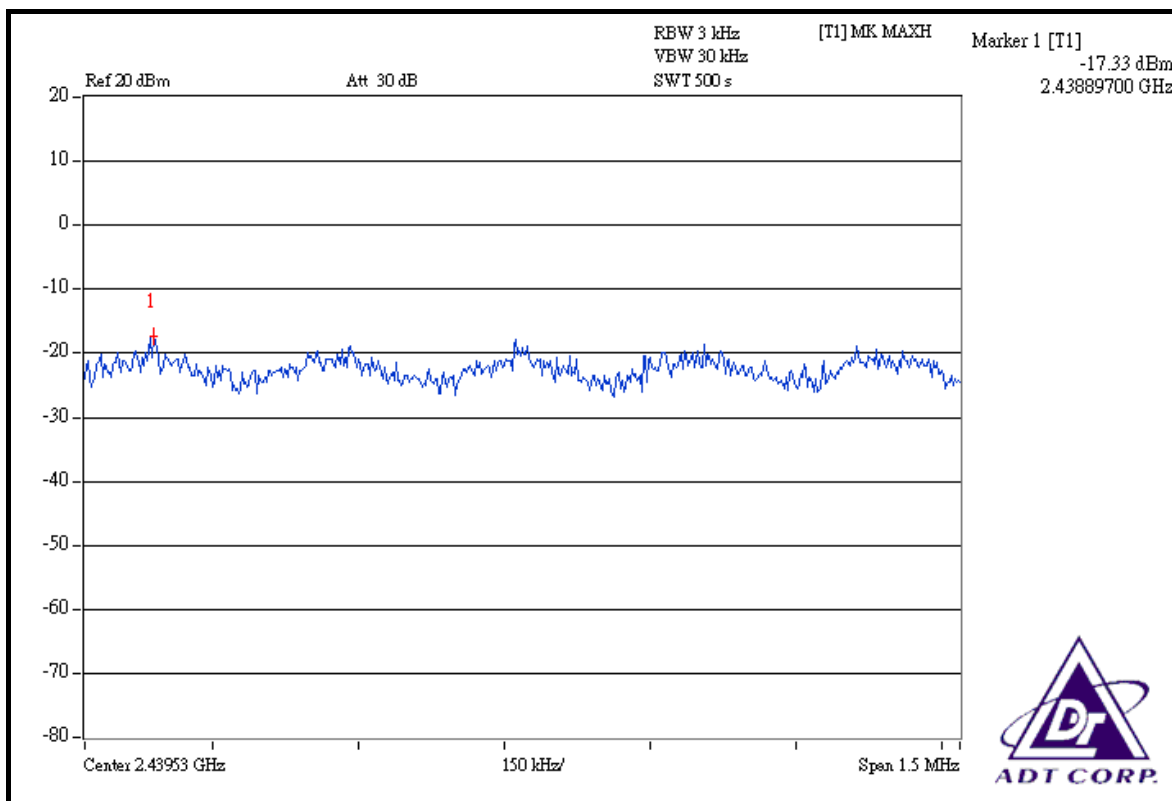

CH 4

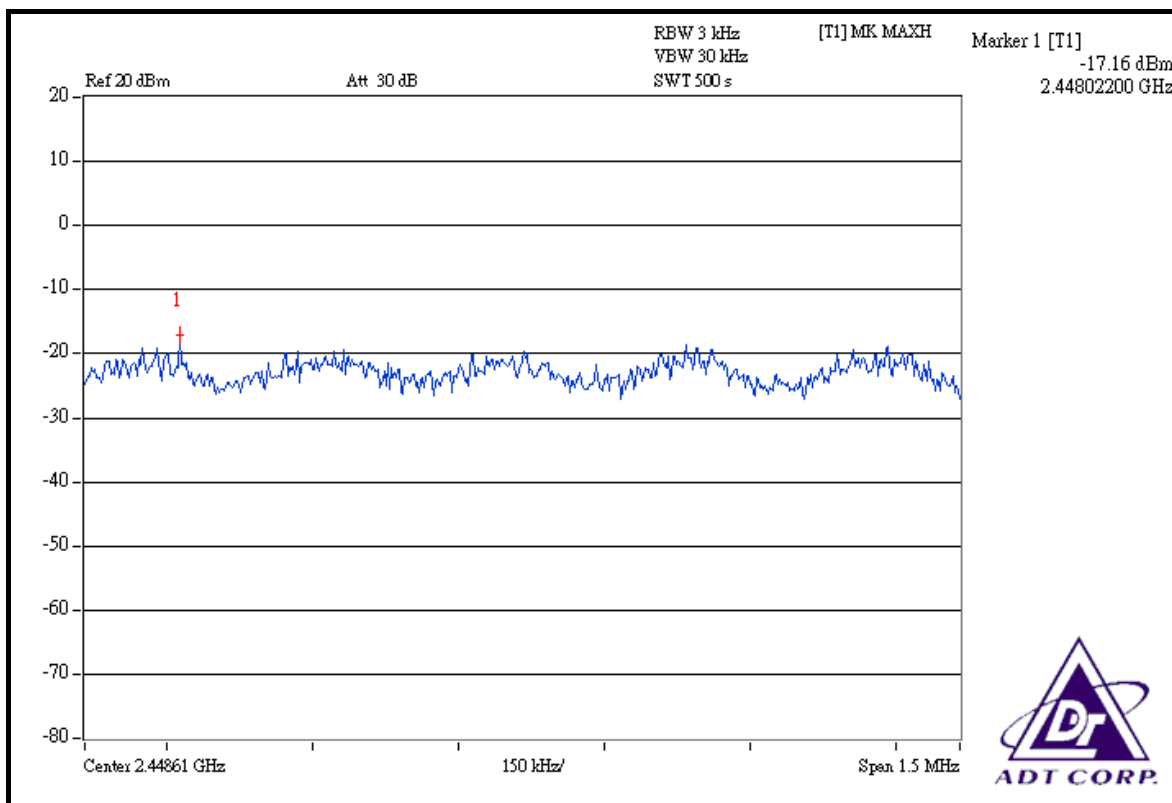

CH 7

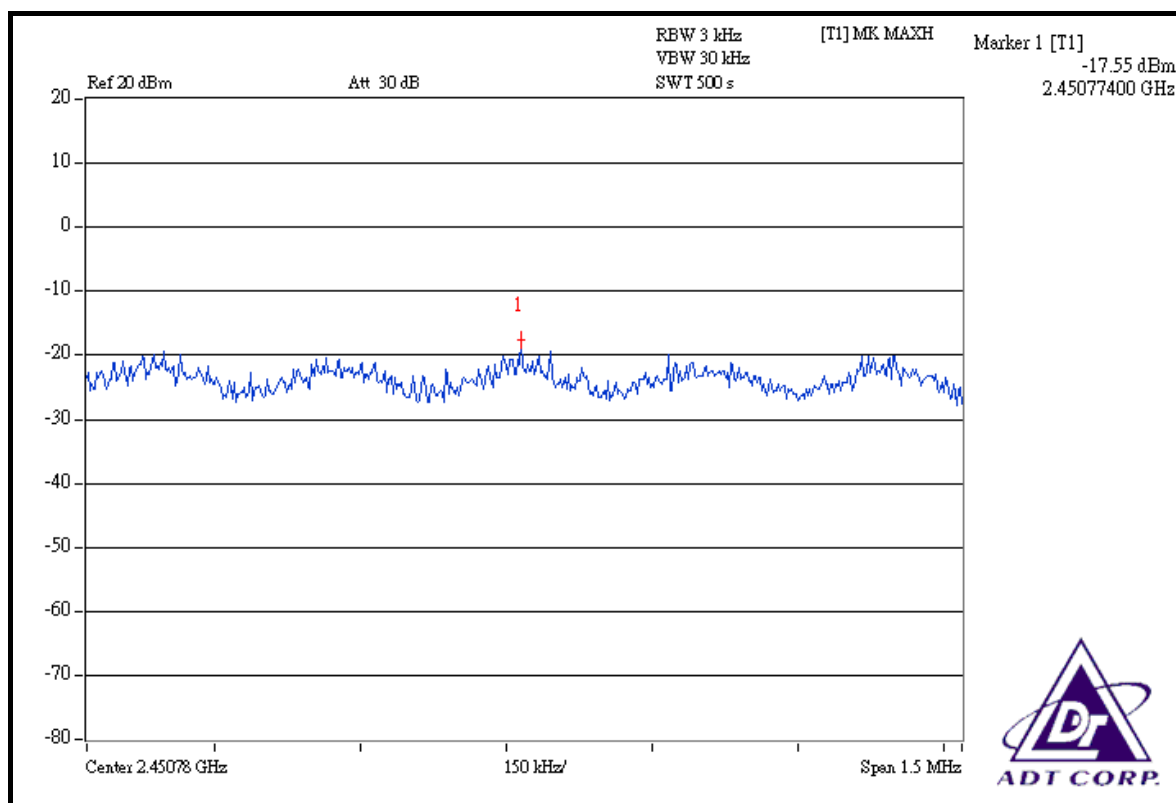

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSP40	100040	Jun. 07, 2007

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

For Single TX:

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 10Hz bandwidth from band edge. The band edges were measured and recorded.

The spectrum plots (Peak RBW = VBW = 100kHz; Average RBW = 1MHz, VBW = 10Hz) are attached on the following pages.

For Dual TX:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges were measured and recorded.

The spectrum plots (Peak RBW = VBW = 100kHz; Average RBW = 1MHz, VBW = 10Hz)

NOTE: The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.6 TEST RESULTS

The spectrum plots are attached on the following 24 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS MODULATION – SINGLE TX:

NOTE 1:



The band edge emission plot of DSSS technique on the next page shows 50.12dBc between carrier maximum power and local maximum emission in restrict band (2.3862GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 111.24dBuV/m (Peak), so the maximum field strength in restrict band is $111.24 - 50.12 = 61.12$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of DSSS technique on the next page shows 55.34dBc between carrier maximum power and local maximum emission in restrict band (2.3864GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 106.72dBuV/m (Average), so the maximum field strength in restrict band is $106.72 - 55.34 = 51.38$ dBuV/m which is under 54dBuV/m limit.



NOTE 2:

The band edge emission plot of DSSS technique on the next second page shows 49.93dBc between carrier maximum power and local maximum emission in restrict band (2.4878GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 111.13dBuV/m (Peak), so the maximum field strength in restrict band is $111.13 - 49.93 = 61.20$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot of DSSS technique on the next third page shows 53.47dBc between carrier maximum power and local maximum emission in restrict band (2.4876GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 106.08dBuV/m (Average), so the maximum field strength in restrict band is $106.08 - 53.47 = 52.61$ dBuV/m which is under 54dBuV/m limit.

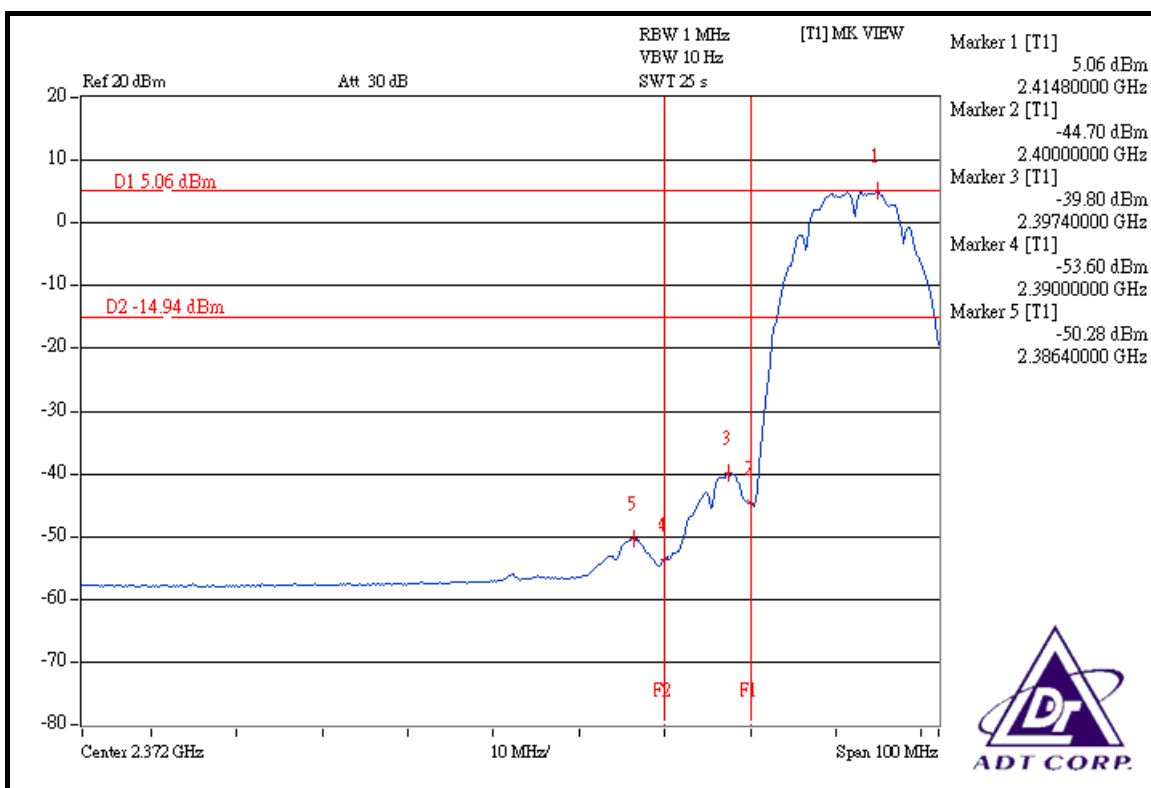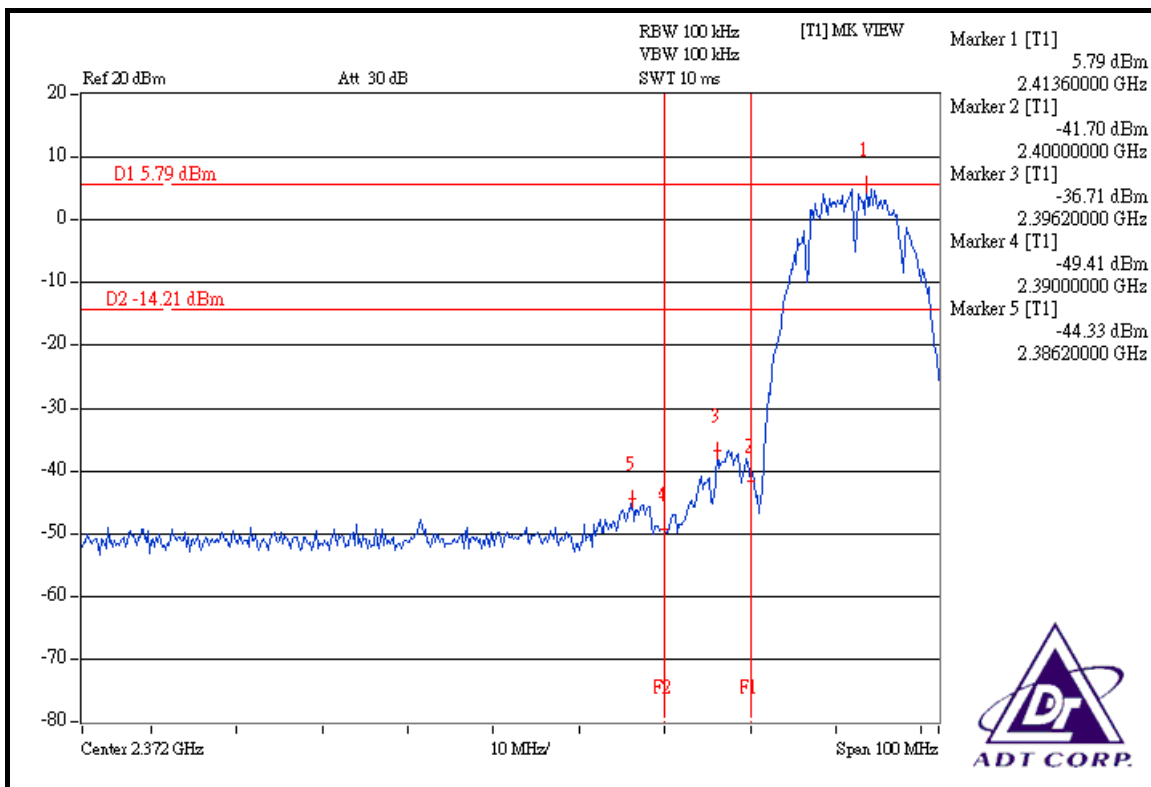

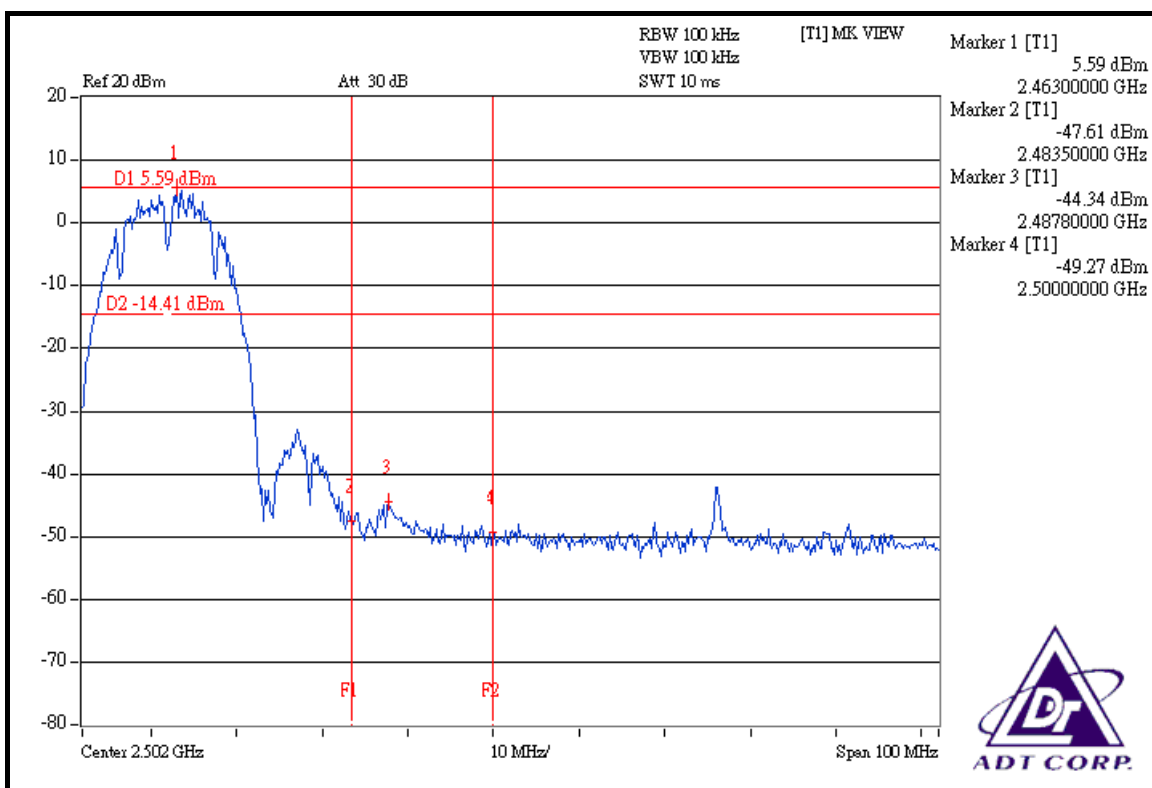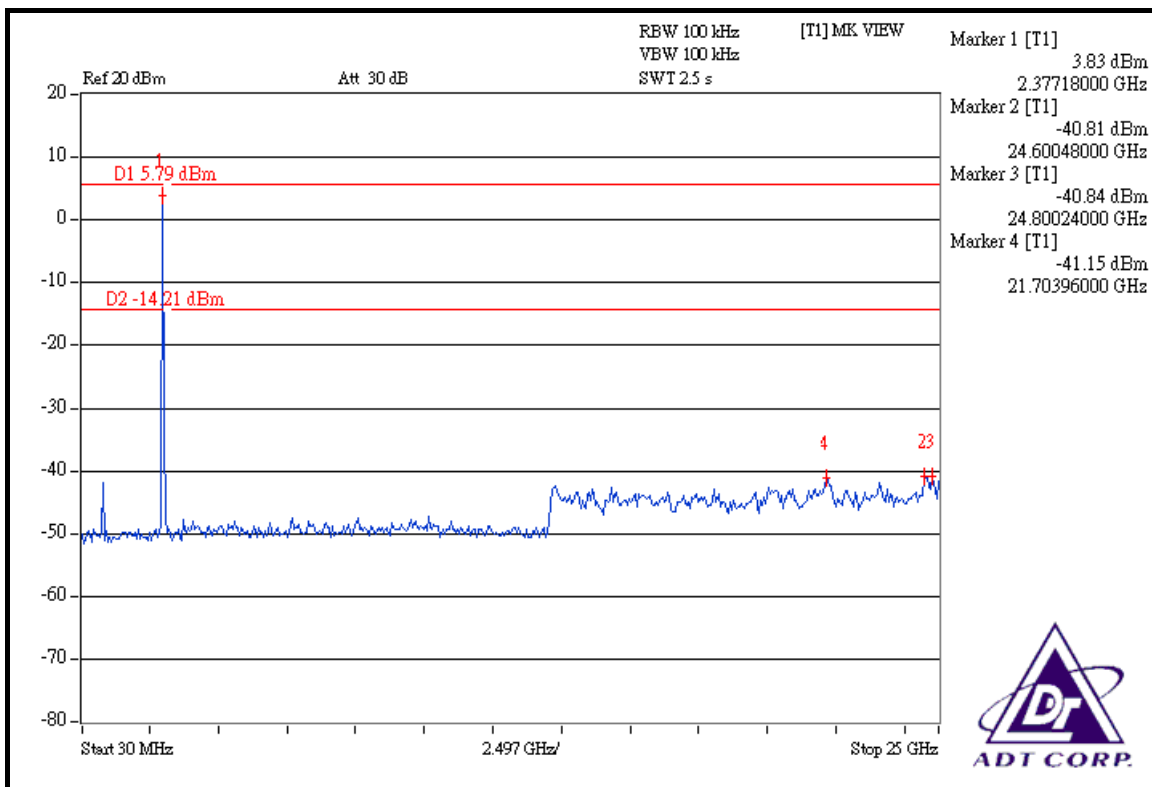

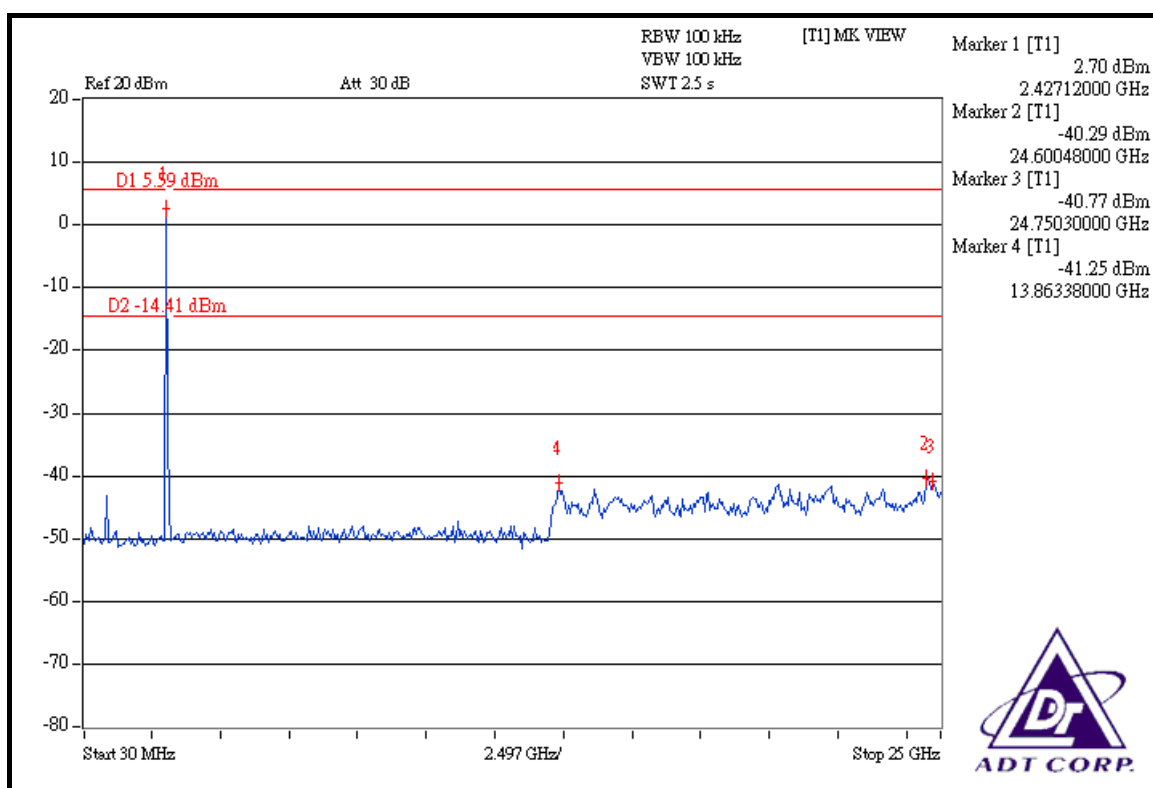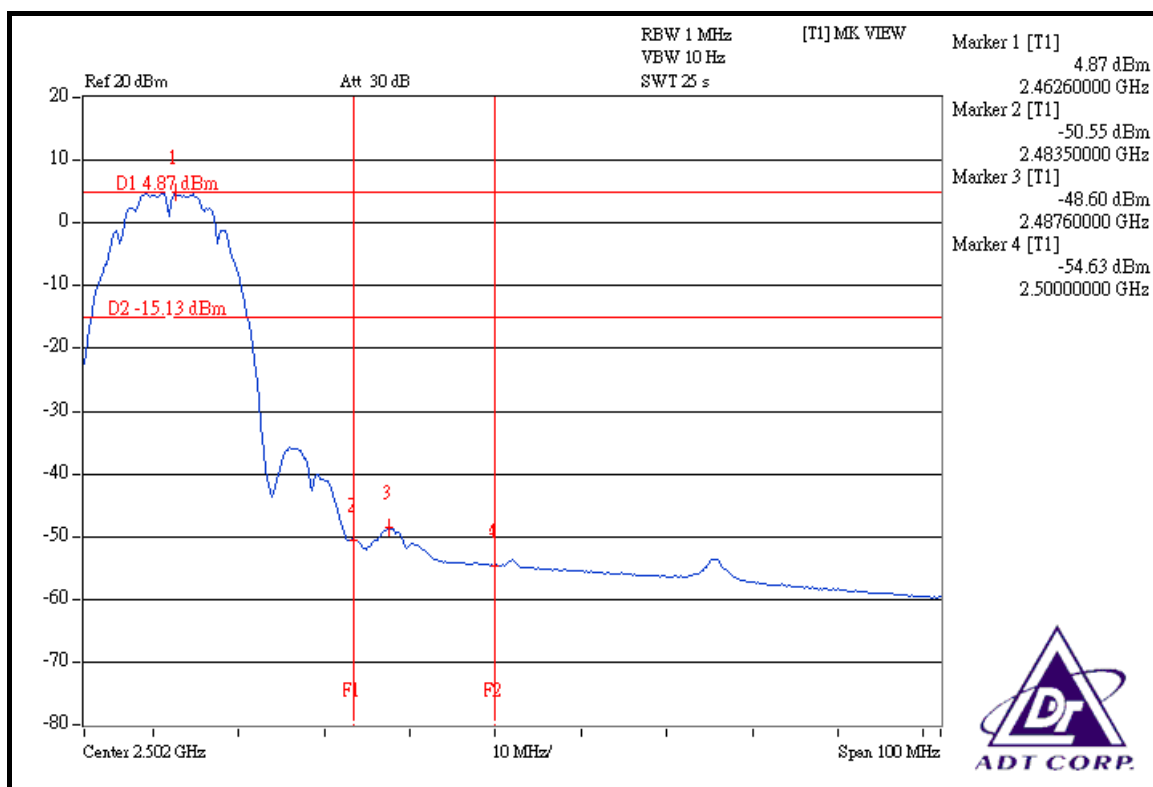

802.11g OFDM MODULATION – DUAL TX:

NOTE 1:



The band edge emission plot of OFDM technique on the next page shows 51.33dBc between carrier maximum power and local maximum emission in restrict band (2.3862GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 113.77dBuV/m (Peak), so the maximum field strength in restrict band is $113.77 - 51.33 = 62.44$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of OFDM technique on the next page shows 54.70dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 104.00dBuV/m (Average), so the maximum field strength in restrict band is $104.00 - 54.70 = 49.30$ dBuV/m which is under 54dBuV/m limit.



NOTE 2:

The band edge emission plot of OFDM technique on the next second page shows 51.11dBc between carrier maximum power and local maximum emission in restrict band (2.4881GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 113.32dBuV/m (Peak), so the maximum field strength in restrict band is $113.32 - 51.11 = 62.21$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot of OFDM technique on the next third page shows 52.94dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 103.14dBuV/m (Average), so the maximum field strength in restrict band is $103.14 - 52.94 = 50.20$ dBuV/m which is under 54dBuV/m limit.

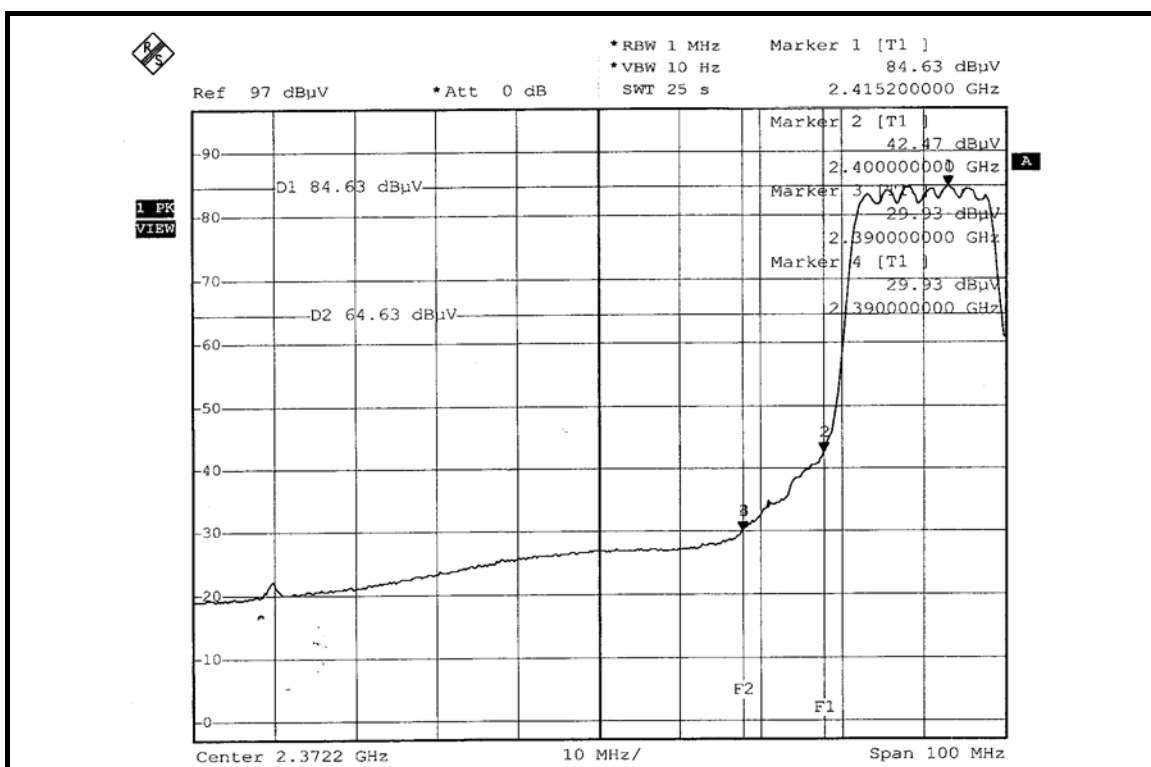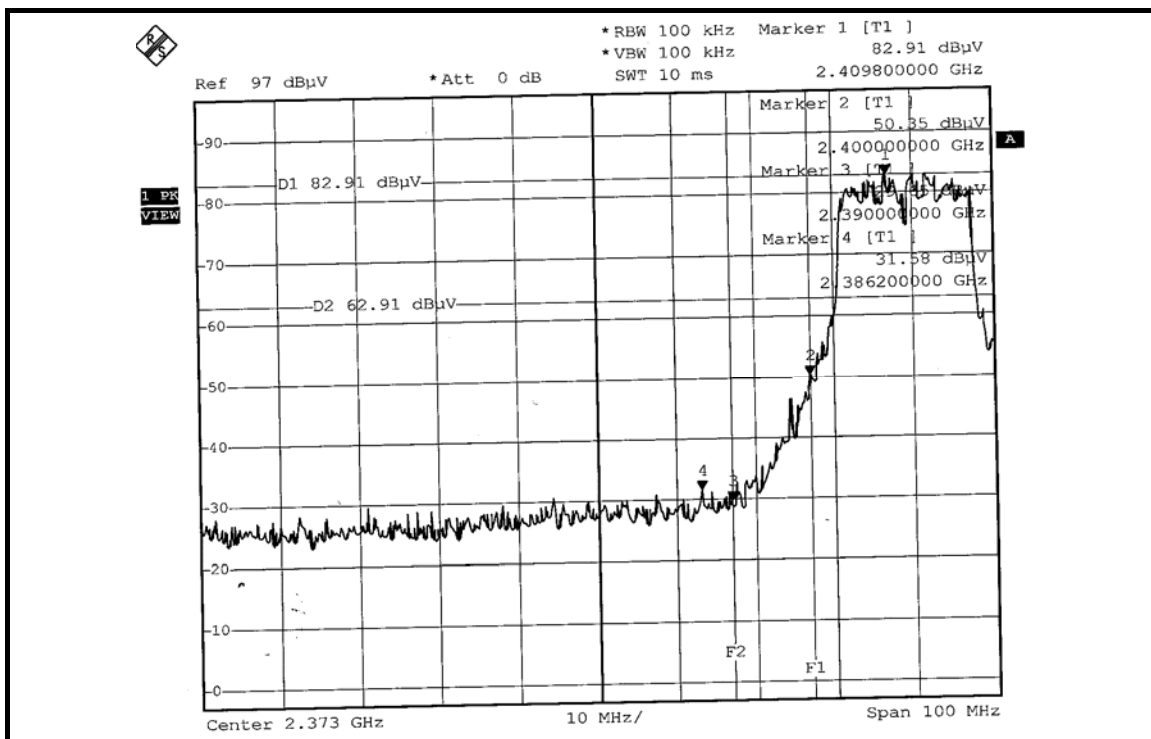

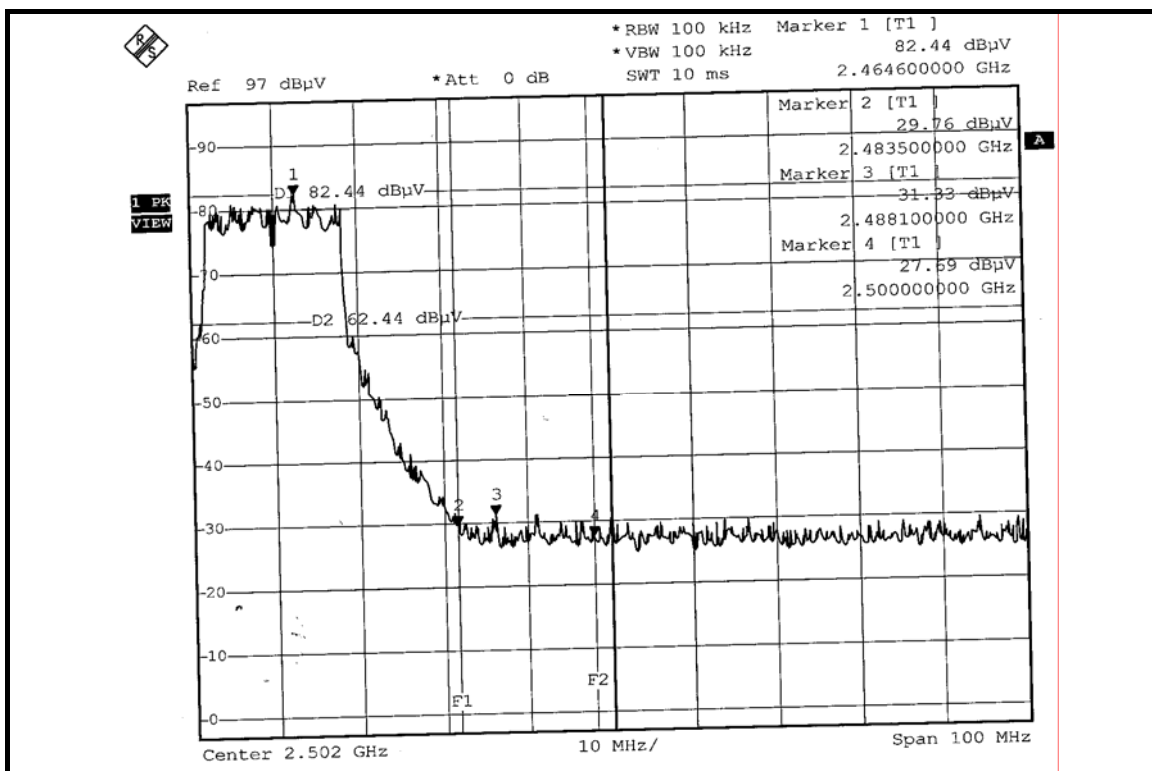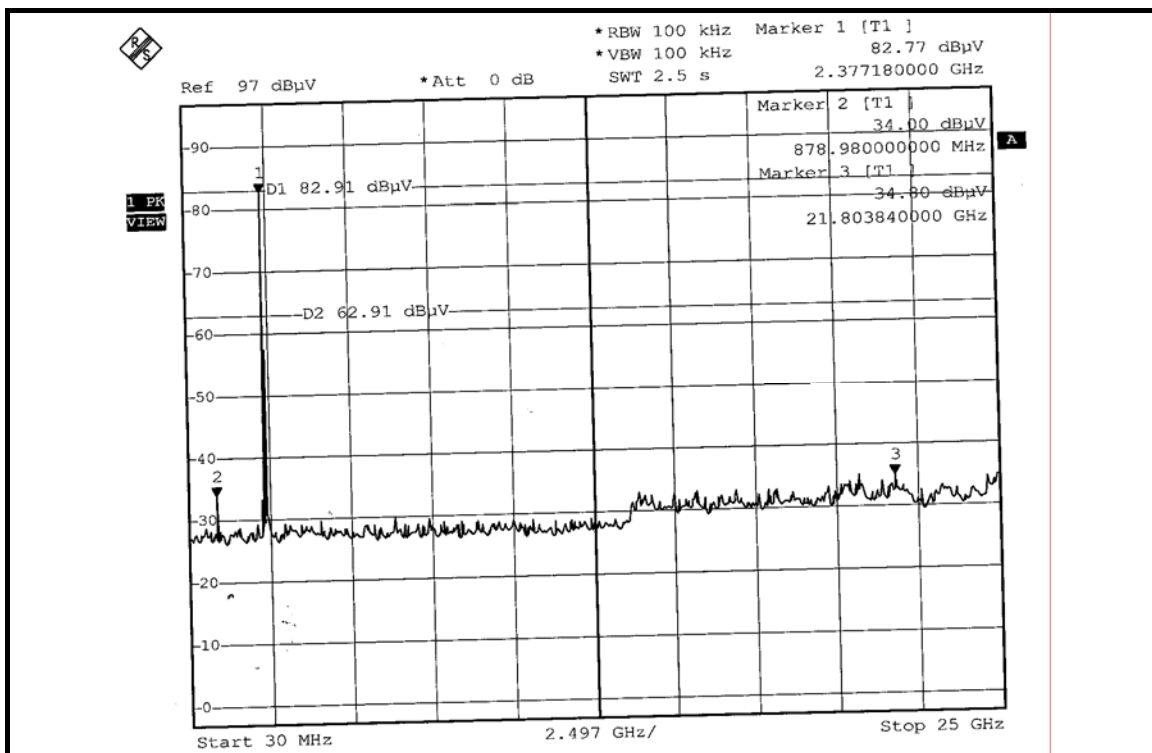

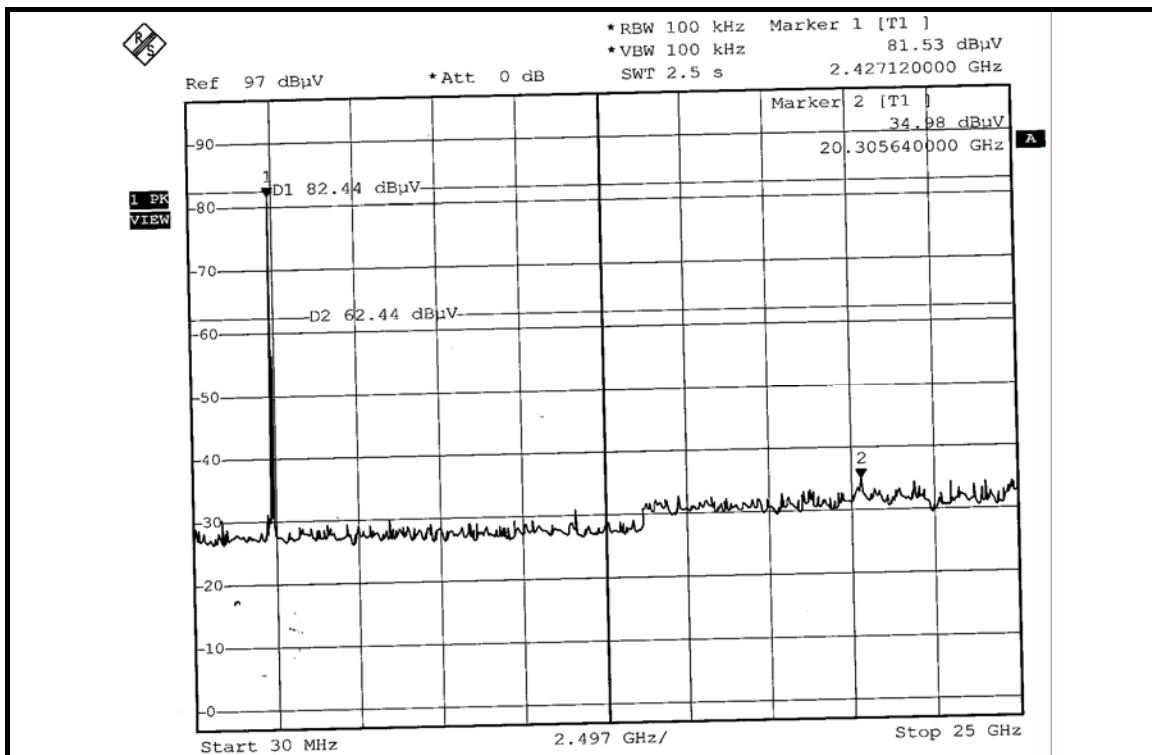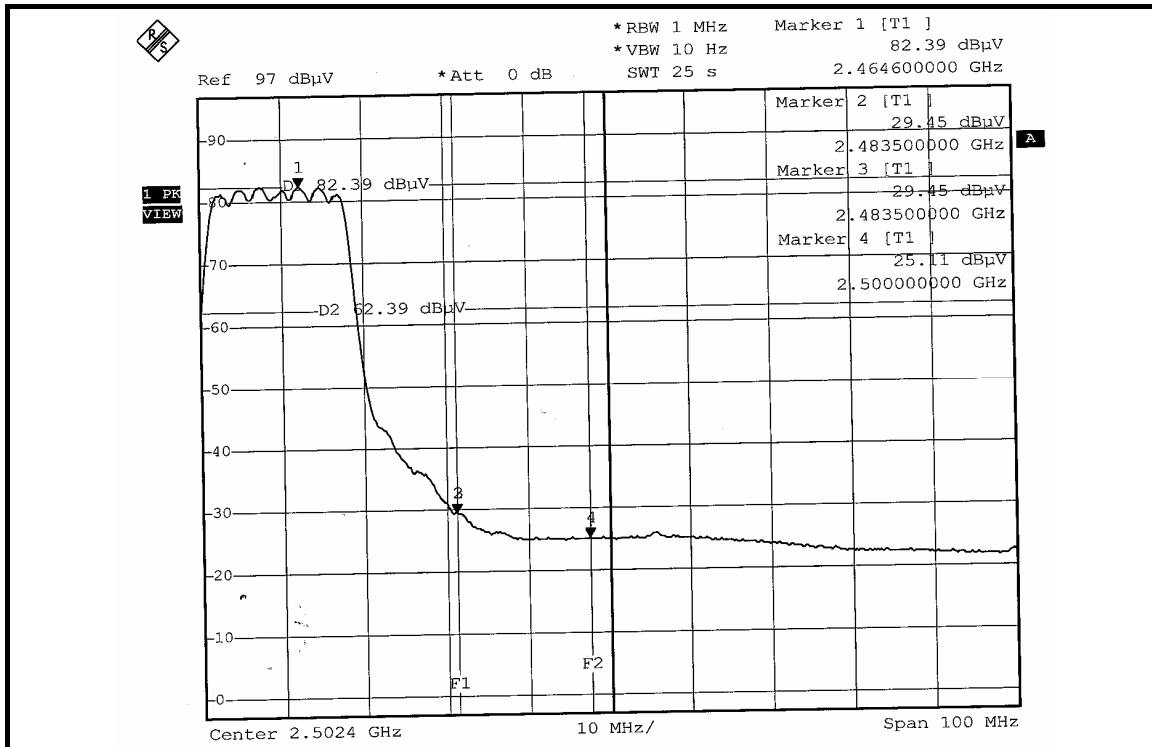

DRAFT 802.11n (20MHz) OFDM MODULATION – DUAL TX:

NOTE 1:



The band edge emission plot of OFDM technique on the next page shows 50.63dBc between carrier maximum power and local maximum emission in restrict band (2.3778GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 113.78dBuV/m (Peak), so the maximum field strength in restrict band is $113.78 - 50.63 = 63.15\text{dBuV/m}$ which is under 74dBuV/m limit.



The band edge emission plot of OFDM technique on the next page shows 53.48dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 103.88dBuV/m (Average), so the maximum field strength in restrict band is $103.88 - 53.48 = 50.40\text{dBuV/m}$ which is under 54dBuV/m limit.



NOTE 2:

The band edge emission plot of OFDM technique on the next second page shows 48.26dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 113.53dBuV/m (Peak), so the maximum field strength in restrict band is $113.53 - 48.26 = 65.27\text{dBuV/m}$ which is under 74dBuV/m limit.

The band edge emission plot of OFDM technique on the next third page shows 51.52dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 103.30dBuV/m (Average), so the maximum field strength in restrict band is $103.30 - 51.52 = 51.78\text{dBuV/m}$ which is under 54dBuV/m limit.

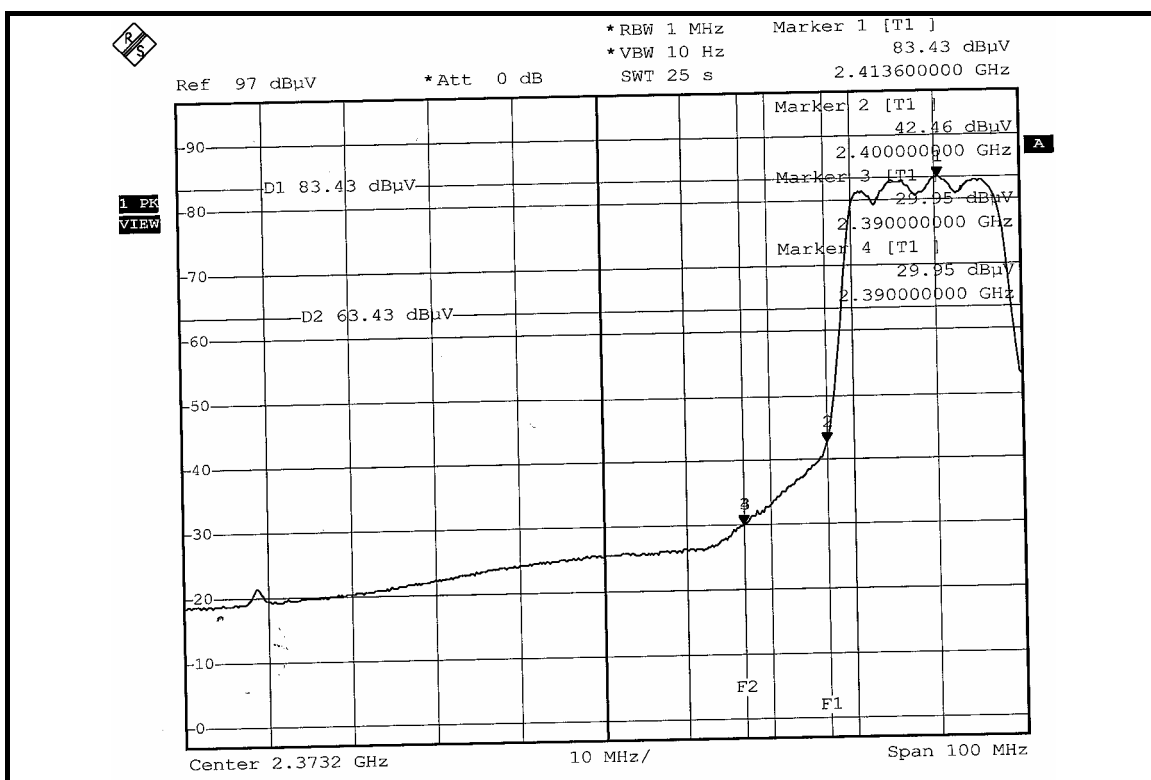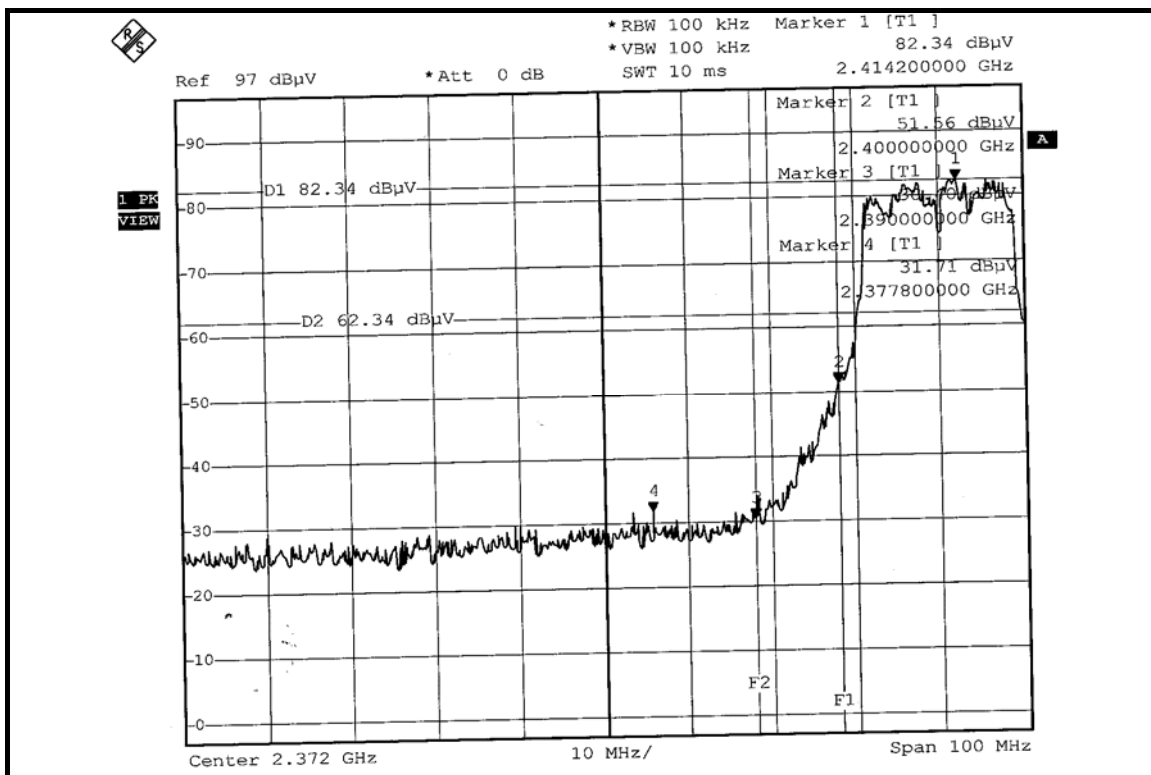

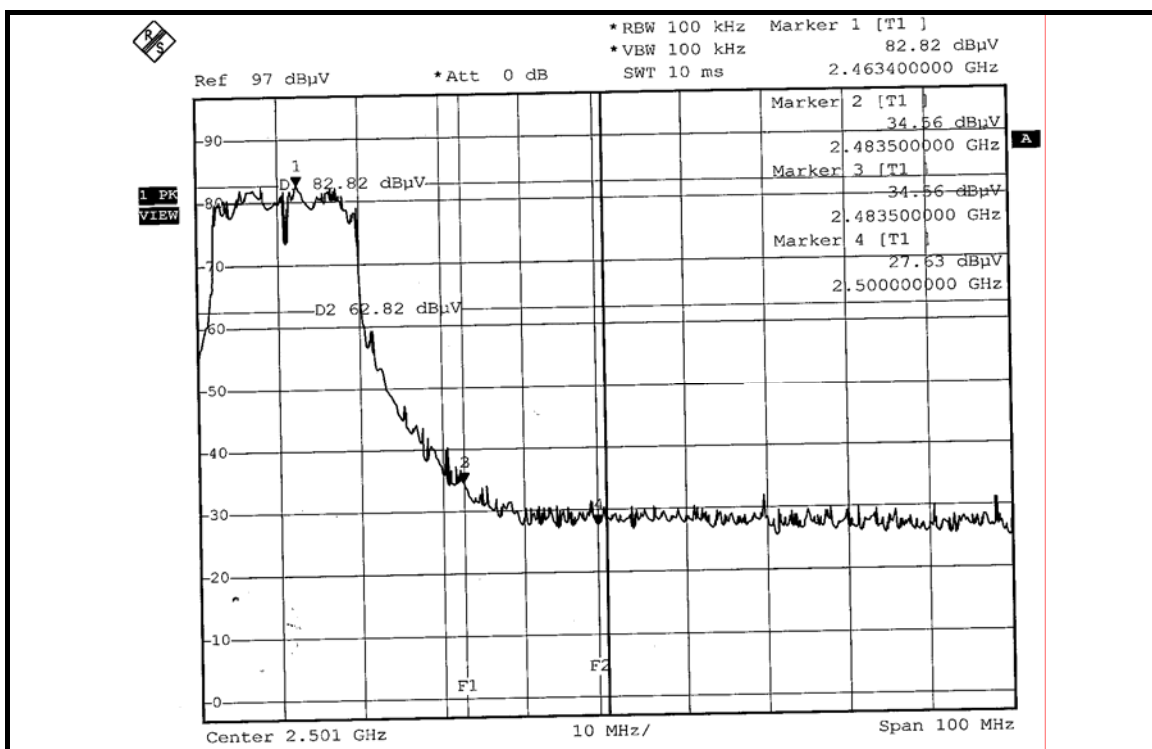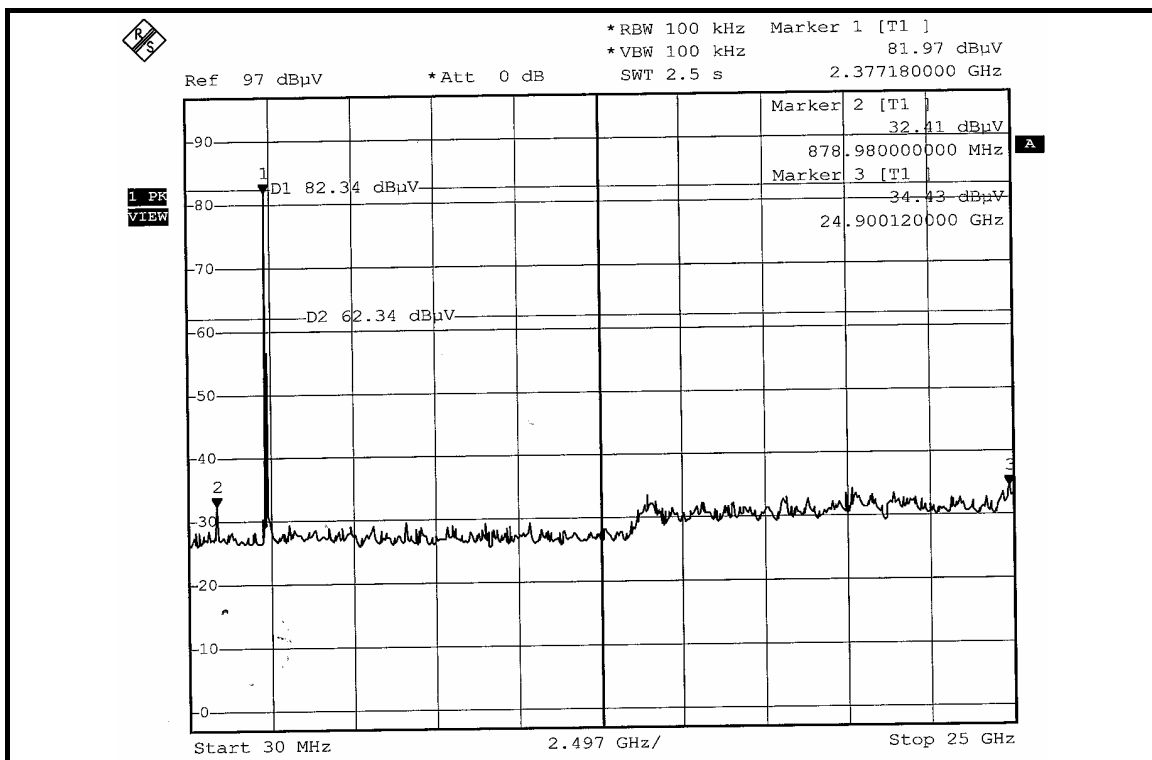

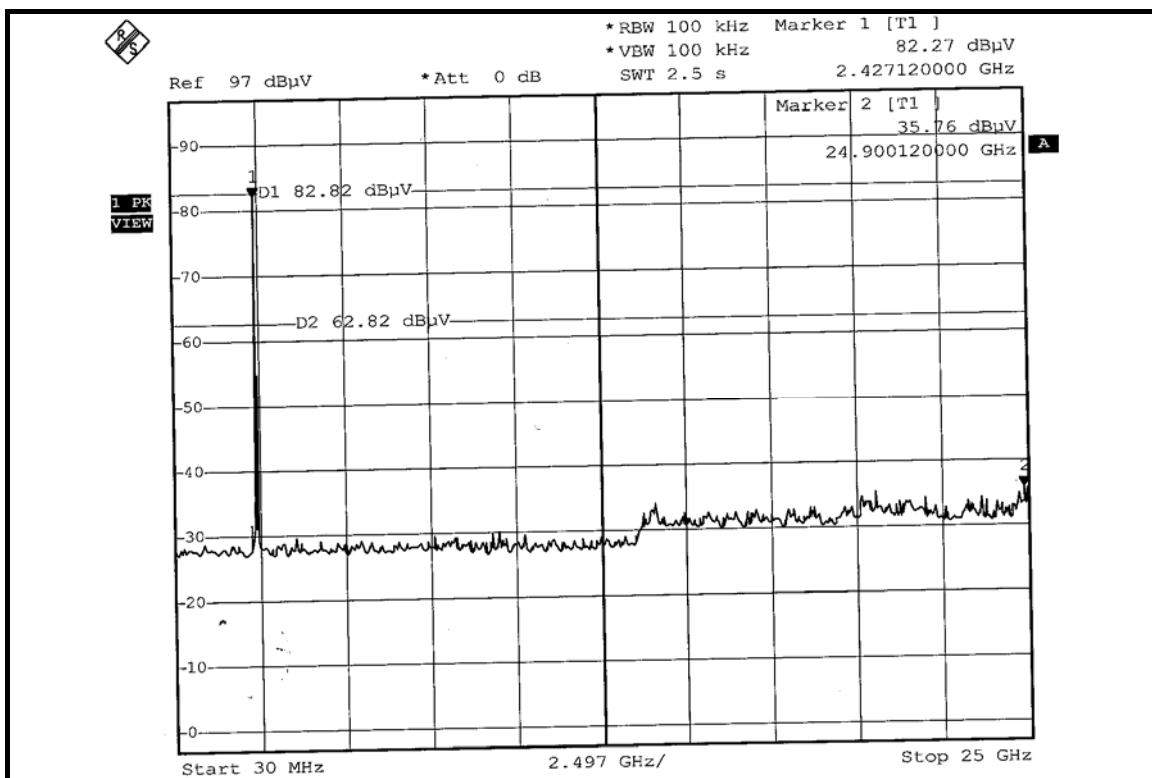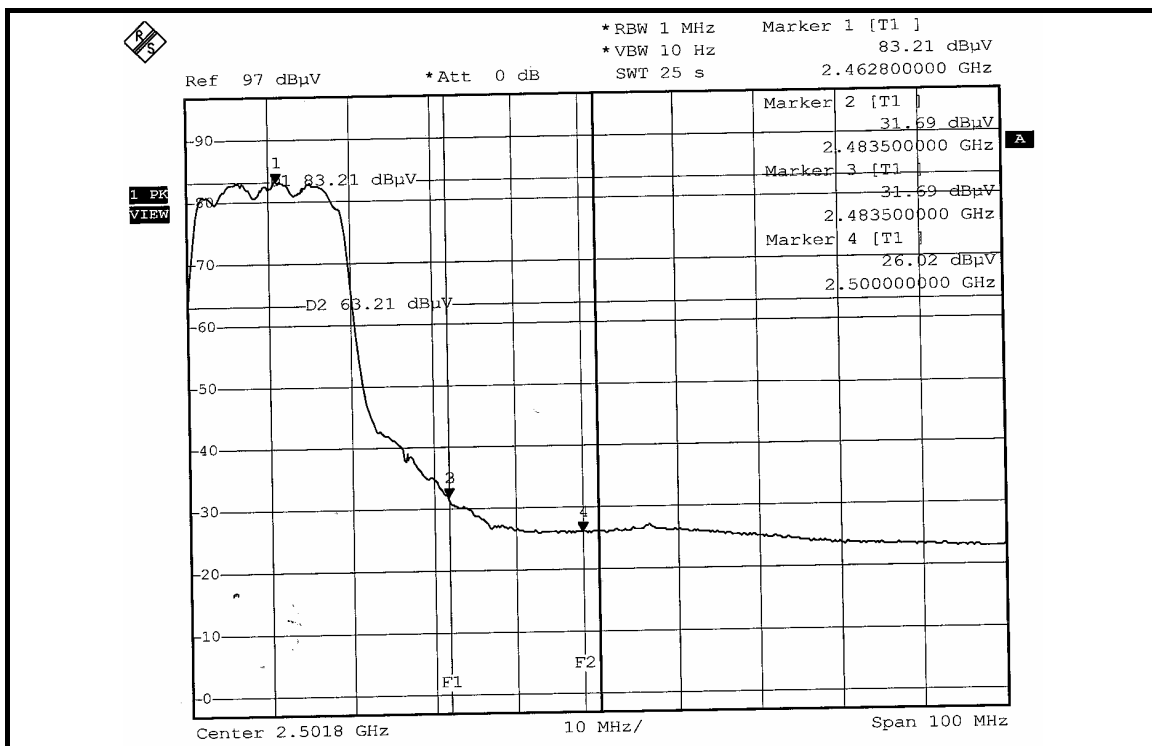

DRAFT 802.11n (40MHz) OFDM MODULATION – DUAL TX:

NOTE 1:



The band edge emission plot of OFDM technique on the next page shows 42.62dBc between carrier maximum power and local maximum emission in restrict band (2.3892GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 108.49dBuV/m (Peak), so the maximum field strength in restrict band is $108.49 - 42.62 = 65.87\text{dBuV/m}$ which is under 74dBuV/m limit.



The band edge emission plot of OFDM technique on the next page shows 45.84dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 98.55dBuV/m (Average), so the maximum field strength in restrict band is $98.55 - 45.84 = 52.71\text{dBuV/m}$ which is under 54dBuV/m limit.



NOTE 2:

The band edge emission plot of OFDM technique on the next second page shows 42.61dBc between carrier maximum power and local maximum emission in restrict band (2.4895GHz). The emission of carrier strength list in the test result of channel 7 at the item 4.2.7 is 108.29dBuV/m (Peak), so the maximum field strength in restrict band is $108.29 - 42.61 = 65.68\text{dBuV/m}$ which is under 74dBuV/m limit.

The band edge emission plot of OFDM technique on the next third page shows 47.16dBc between carrier maximum power and local maximum emission in restrict band (2.4876GHz). The emission of carrier strength list in the test result of channel 7 at the item 4.2.7 is 98.21dBuV/m (Average), so the maximum field strength in restrict band is $98.21 - 47.16 = 51.05\text{dBuV/m}$ which is under 54dBuV/m limit.

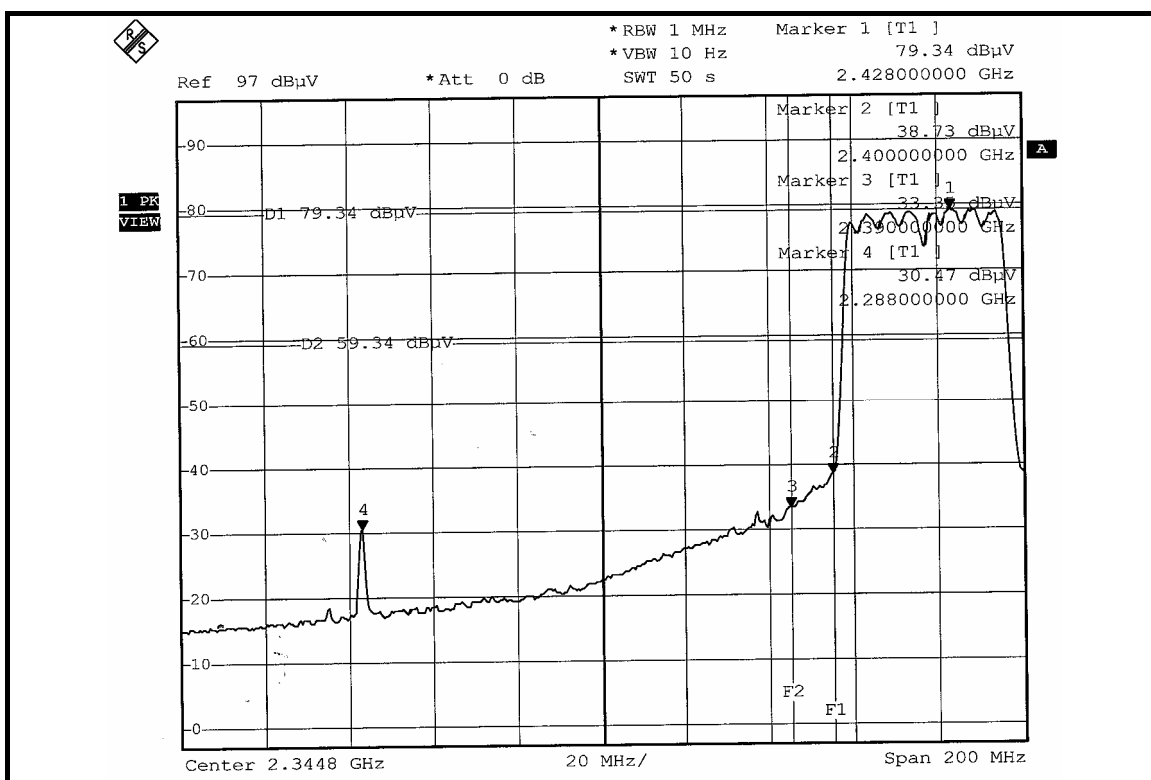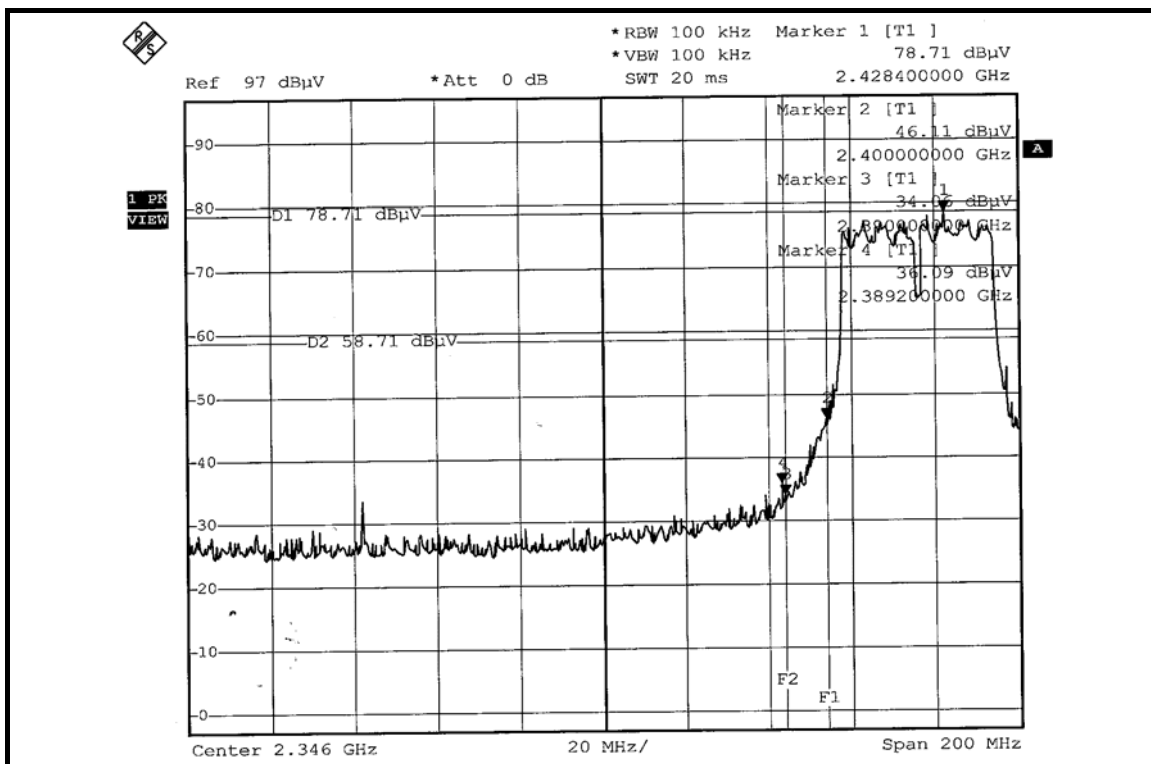

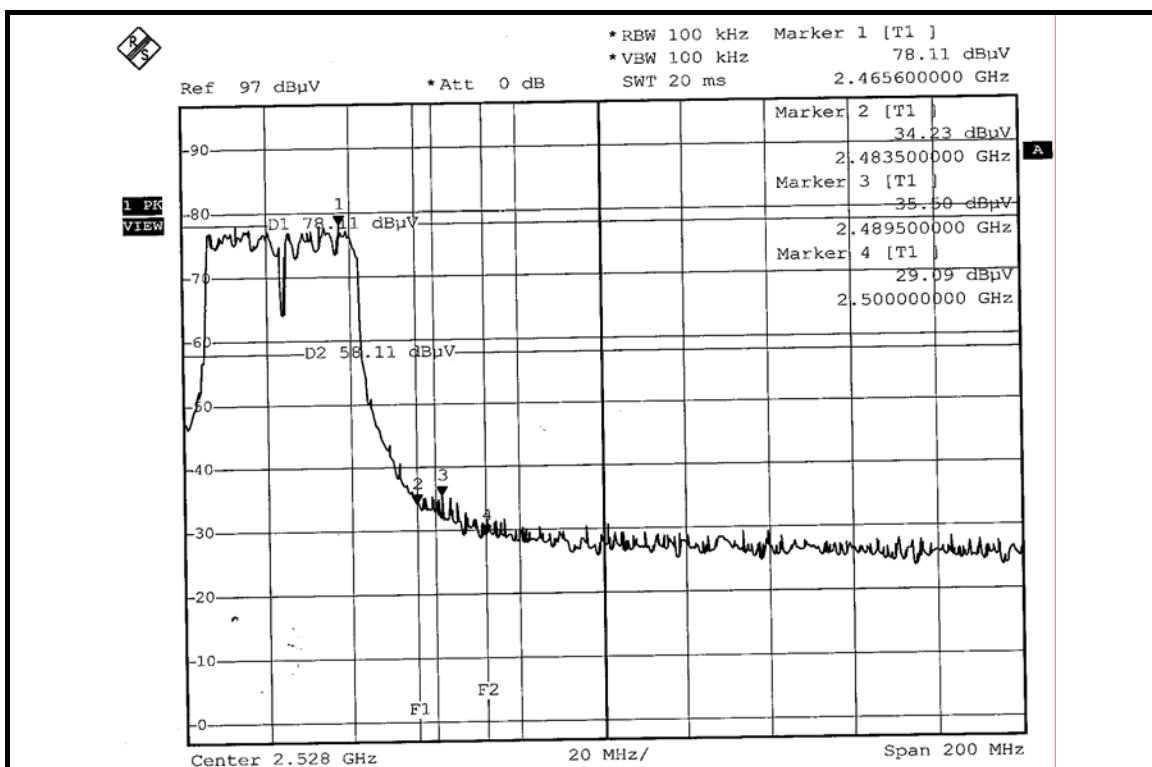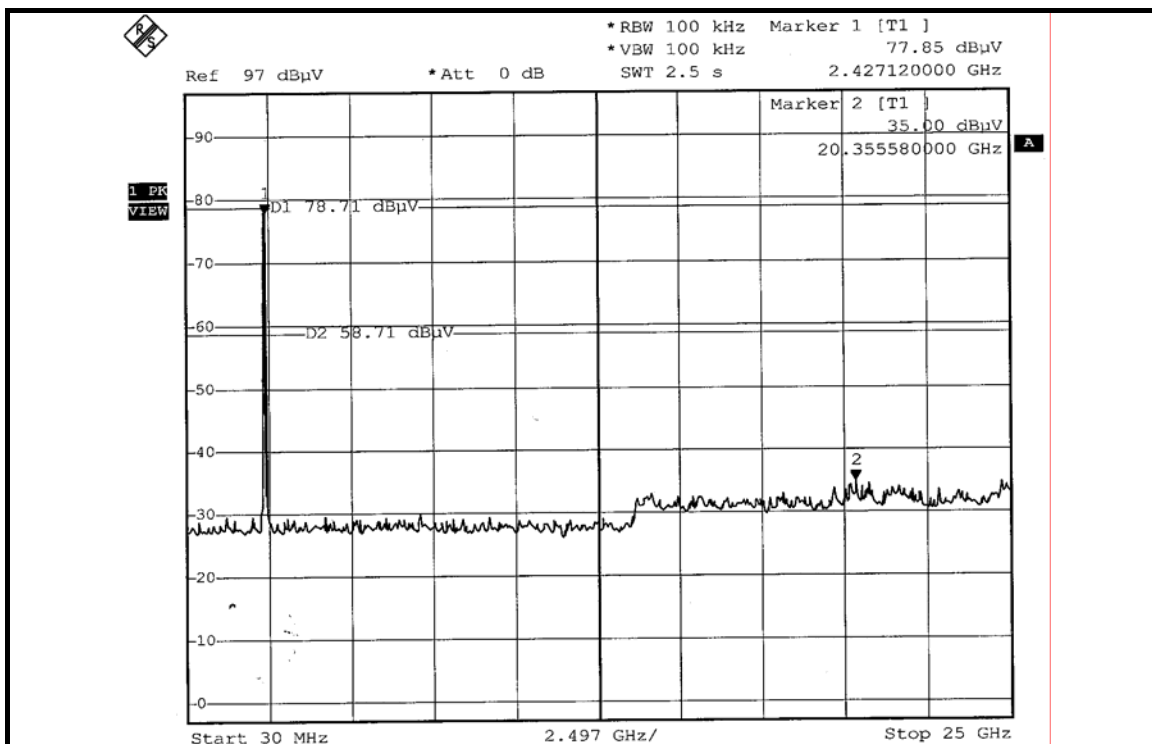

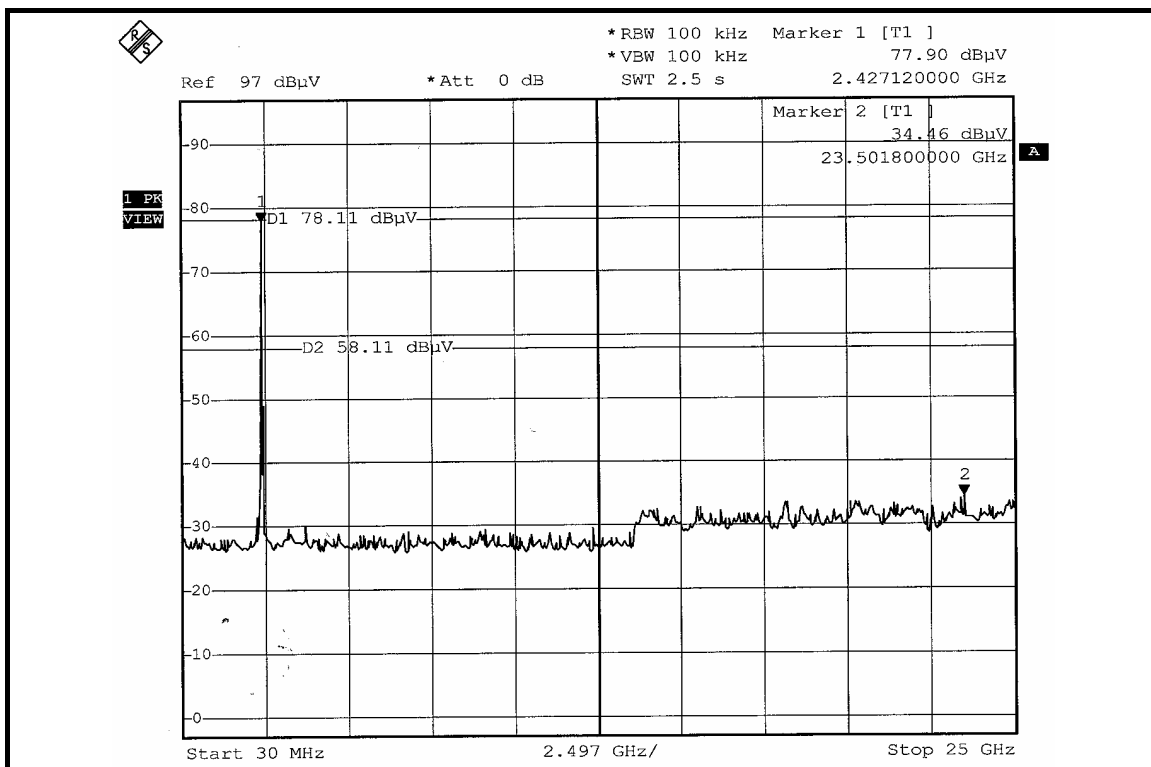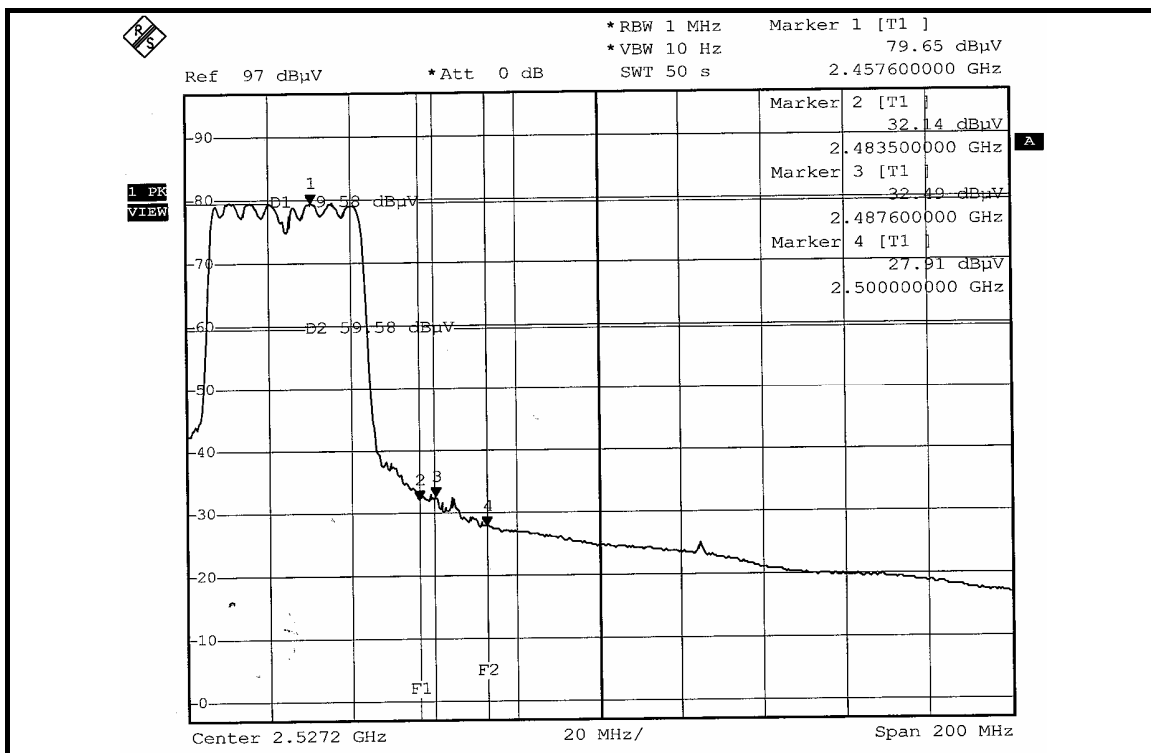

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole antenna with UFL connector. The maximum Gain of the antenna is 4dBi.

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, NCC
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab: **Web Site:** www.adt.com.tw

Tel: 886-3-3183232

Fax: 886-3-3185050

The address and road map of all our labs can be found in our web site also.

APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.