

A112~114, Qinye Business Center, Xin'an Sixth Road, 82<sup>th</sup> District,  
Bao'an, Shenzhen, China.  
Telephone: +86-755-29451282,  
Fax: +86-755-22639141

Report No.: EBO1703003-E178  
Page 1 of 62

## FCC Report (WIFI)

**Applicant:** VISUAL LAND INC.

**Address of Applicant:** 17785 Center Court Dr. Suite 670, Cerritos, CA 90703

### Equipment Under Test (EUT)

Product Name: TABLET

Band Name: VISUAL LAND

Model No.: ME-13Q

**FCC ID:** SI9-QR320B

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart B:2015

**Date of sample receipt:** February 28, 2017

**Date of Test:** February 28, 2017 To March 10, 2017

**Date of report issued:** March 10, 2017

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Kevin Yu  
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the EBO product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of EBO International Electrical Approvals or testing done by EBO International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by EBO International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

## 2 Version

Version No.	Date	Description
00	March 10, 2017	Original

Prepared By:



Project Engineer

Date:

March 10, 2017

Check By:



Reviewer

Date:

March 10, 2017

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebtek.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebtek.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

### 3 Contents

	Page
1 COVER PAGE .....	1
2 VERSION .....	2
3 CONTENTS .....	3
4 TEST SUMMARY .....	4
5 GENERAL INFORMATION .....	5
5.1 CLIENT INFORMATION .....	5
5.2 GENERAL DESCRIPTION OF EUT .....	5
5.3 TEST MODE .....	6
5.4 DESCRIPTION OF SUPPORT UNITS .....	6
5.5 TEST FACILITY .....	7
5.6 TEST LOCATION .....	7
6 TEST INSTRUMENTS LIST .....	8
7 TEST RESULTS AND MEASUREMENT DATA .....	9
7.1 ANTENNA REQUIREMENT .....	9
7.2 CONDUCTED EMISSIONS .....	10
7.3 CONDUCTED PEAK OUTPUT POWER .....	13
7.4 CHANNEL BANDWIDTH .....	14
7.5 POWER SPECTRAL DENSITY .....	19
7.6 BAND EDGES .....	24
7.6.1 Conducted Emission Method .....	24
7.6.2 Radiated Emission Method .....	27
7.7 SPURIOUS EMISSION .....	36
7.7.1 Conducted Emission Method .....	36
7.7.2 Radiated Emission Method .....	45
8 TEST SETUP PHOTO .....	60
9 EUT CONSTRUCTIONAL DETAILS .....	62

## 4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(3)	Pass
Channel Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

*Pass: The EUT complies with the essential requirements in the standard.*

*Remark: Test according to ANSI C63.4:2014 and ANSI C63.10:2013.*

### Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)

*Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.*

## 5 General Information

### 5.1 Client Information

Applicant:	VISUAL LAND INC.
Address of Applicant:	17785 Center Court Dr. Suite 670, Cerritos, CA 90703
Manufacturer/ Factory:	VISUAL LAND INC.
Address of Manufacturer/ Factory:	17785 Center Court Dr. Suite 670, Cerritos, CA 90703

### 5.2 General Description of EUT

Product Name:	TABLET
Band Name:	VISUAL LAND
Model No.:	ME-13Q
Operation Frequency:	802.11b/802.11g/802.11n(HT20): 2412MHz~2462MHz 802.11n(HT40): 2422MHz~2452MHz
Channel numbers:	802.11b/802.11g /802.11n(HT20): 11 802.11n(HT40): 7
Channel separation:	5MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum (DSSS) 802.11g/802.11n(H20)/802.11n(H40): Orthogonal Frequency Division Multiplexing (OFDM)
Antenna Type:	FPCB antenna
Antenna gain:	0.4dBi
Power supply:	DC 5V/2500mA or DC 3.7V 2*4000mAh 14.8Wh battery Power Supply: MODEL: SW-050250 INPUT: AC 100-240V,50/60Hz 0.68A max OUTPUT: DC 5V/2500mA

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz	X	

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)	
	802.11b/802.11g/802.11n(HT20)	802.11n(HT40)
Lowest channel	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz
Highest channel	2462MHz	2452MHz

### 5.3 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
<i>Remark: During the test, the dutycycle &gt;98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:										
Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.										
<table border="1"> <tr> <td>Mode</td> <td>802.11b</td> <td>802.11g</td> <td>802.11n(HT20)</td> <td>802.11n(HT40)</td> </tr> <tr> <td>Data rate</td> <td>1Mbps</td> <td>6Mbps</td> <td>6.5Mbps</td> <td>13Mbps</td> </tr> </table>	Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)	Data rate	1Mbps	6Mbps	6.5Mbps	13Mbps
Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)						
Data rate	1Mbps	6Mbps	6.5Mbps	13Mbps						

### 5.4 Description of Support Units

None.
-------

## 5.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 22, 2016.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016

## 5.6 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

## 6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July 03 2015	July 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June 29 2016	June 28 2017
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June 29 2016	June 28 2017
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June 29 2016	June 28 2017
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 29 2016	June 28 2017
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 29 2016	June 28 2017
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	June 29 2016	June 28 2017
10	Coaxial Cable	GTS	N/A	GTS211	June 29 2016	June 28 2017
11	Coaxial cable	GTS	N/A	GTS210	June 29 2016	June 28 2017
12	Coaxial Cable	GTS	N/A	GTS212	June 29 2016	June 28 2017
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June 29 2016	June 28 2017
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June 29 2016	June 28 2017
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 29 2016	June 28 2017
16	Band filter	Amindeon	82346	GTS219	June 29 2016	June 28 2017
17	Power Meter	Anritsu	ML2495A	GTS540	June 29 2016	June 28 2017
18	Power Sensor	Anritsu	MA2411B	GTS541	June 29 2016	June 28 2017


Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.16 2014	May.15 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 29 2016	June. 28 2017
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 29 2016	June. 28 2017
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June. 29 2016	June. 28 2017
5	Coaxial Cable	GTS	N/A	GTS227	June. 29 2016	June. 28 2017
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 29 2016	June. 28 2017

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	June 29 2016	June 28 2017

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotek.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotek.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

## 7 Test results and Measurement Data

### 7.1 Antenna requirement

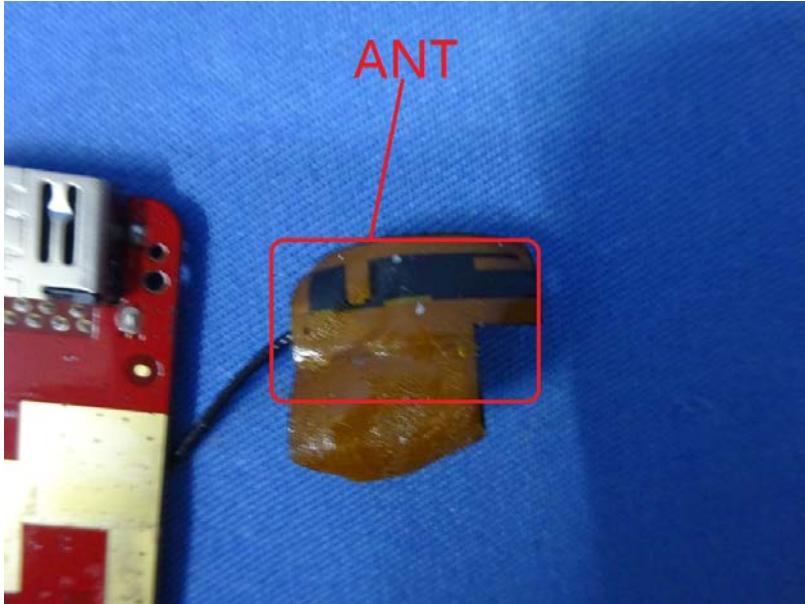
Standard requirement:	FCC Part15 C Section 15.203 /247(c)
<b>15.203 requirement:</b>	
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
<b>15.247(c) (1)(i) requirement:</b>	
(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
<b>E.U.T Antenna:</b>	
The antenna is PCB antenna, the best case gain of the antenna is 0.4dBi	
	

## 7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207																
Test Method:	ANSI C63.10:2013																
Test Frequency Range:	150KHz to 30MHz																
Class / Severity:	Class B																
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto																
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
	* Decreases with the logarithm of the frequency.																
Test setup:	<p>Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>																
Test procedure:	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.</li> </ol>																
Test Instruments:	Refer to section 6.0 for details																
Test mode:	Refer to section 5.3 for details																
Test results:	Pass																


## Measurement data

Test mode	WIFI mode	Polarization	Line
-----------	-----------	--------------	------

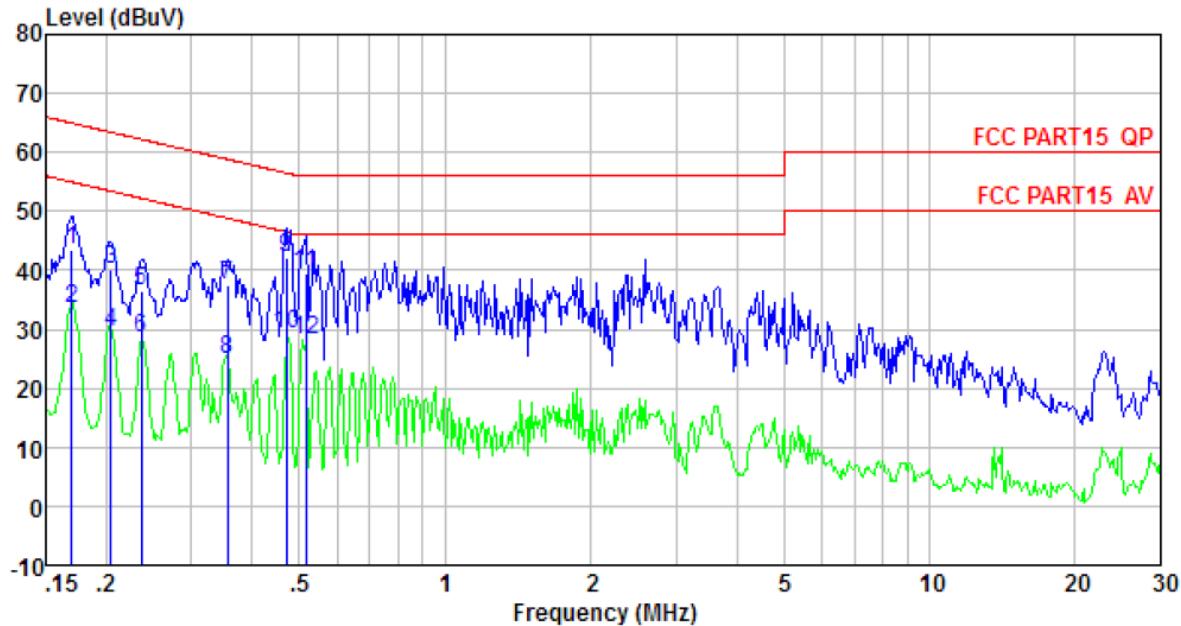

Freq MHz	Reading level dBuV	1IISN/ISN factor dB	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.169	42.87	0.42	0.12	43.41	64.99	-21.58	QP
0.169	32.94	0.42	0.12	33.48	54.99	-21.51	Average
0.204	39.51	0.43	0.13	40.07	63.45	-23.38	QP
0.204	28.85	0.43	0.13	29.41	53.45	-24.04	Average
0.237	35.85	0.44	0.12	36.41	62.22	-25.81	QP
0.237	27.93	0.44	0.12	28.49	52.22	-23.73	Average
0.356	37.03	0.43	0.10	37.56	58.83	-21.27	QP
0.356	24.27	0.43	0.10	24.80	48.83	-24.03	Average
0.471	41.70	0.39	0.11	42.20	56.49	-14.29	QP
0.471	28.65	0.39	0.11	29.15	46.49	-17.34	Average
0.516	39.13	0.37	0.11	39.61	56.00	-16.39	QP
0.516	27.86	0.37	0.11	28.34	46.00	-17.66	Average

Test mode	WIFI mode	Polarization	Neutral
-----------	-----------	--------------	---------

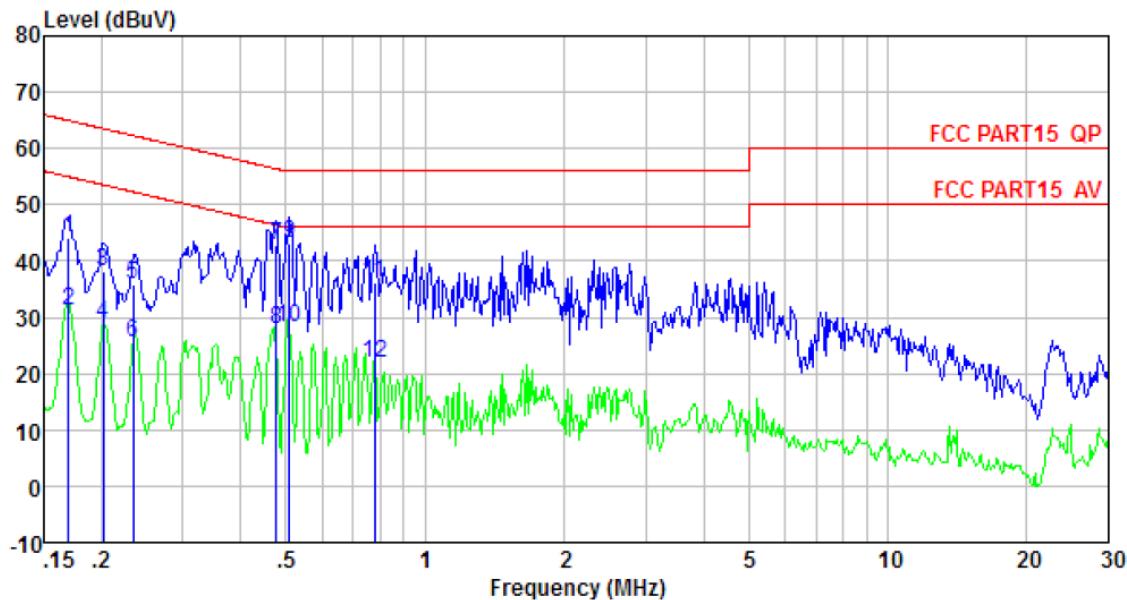


Freq MHz	Reading level dBuV	LISN/ISN factor dB	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.169	43.66	0.41	0.12	44.19	64.99	-20.80	QP
0.169	30.75	0.41	0.12	31.28	54.99	-23.71	Average
0.202	37.64	0.41	0.13	38.18	63.54	-25.36	QP
0.202	28.35	0.41	0.13	28.89	53.54	-24.65	Average
0.234	35.20	0.42	0.12	35.74	62.30	-26.56	QP
0.234	24.87	0.42	0.12	25.41	52.30	-26.89	Average
0.476	42.37	0.36	0.11	42.84	56.41	-13.57	QP
0.476	27.54	0.36	0.11	28.01	46.41	-18.40	Average
0.510	42.52	0.34	0.11	42.97	56.00	-13.03	QP
0.510	27.89	0.34	0.11	28.34	46.00	-17.66	Average
0.779	35.91	0.23	0.13	36.27	56.00	-19.73	QP
0.779	21.45	0.23	0.13	21.81	46.00	-24.19	Average

**Notes:**

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss
4. *If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.*

## 7.3 Conducted Peak Output Power

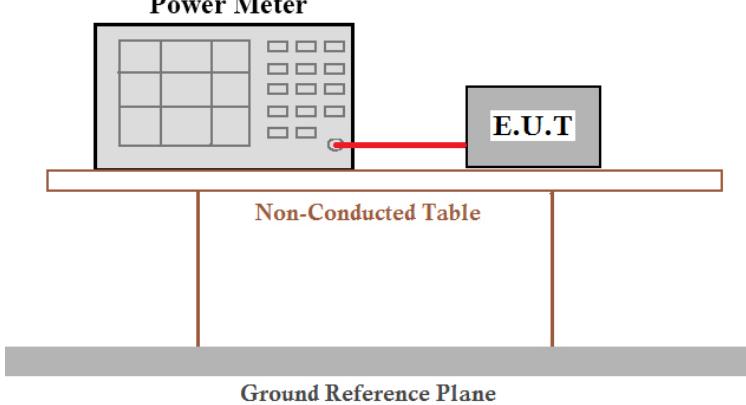
Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V03
Limit:	30dBm
Test setup:	<p style="text-align: center;"><b>Power Meter</b></p> 
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

## Measurement Data

Test CH	Peak Output Power (dBm)				Limit(dBm)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	8.68	8.36	8.49	8.62	30.00	Pass
Middle	8.83	8.52	8.47	8.57		
Highest	8.88	8.87	8.61	8.61		

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebtek.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebtek.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

## 7.4 Channel Bandwidth

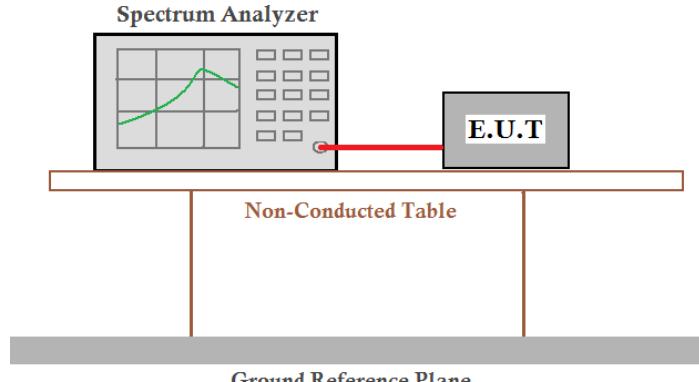Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V03
Limit:	>500KHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

## Measurement Data


Test CH	Channel Bandwidth (MHz)				Limit(KHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	9.076	16.602	17.790	36.557		
Middle	9.095	16.583	17.783	36.542	>500	Pass
Highest	9.096	16.581	17.814	36.549		

## Test plot as follows:


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebtek.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebtek.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Test mode:


802.11b

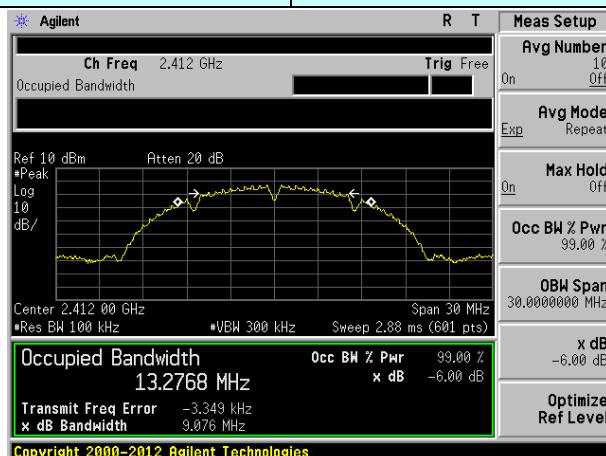

Lowest channel

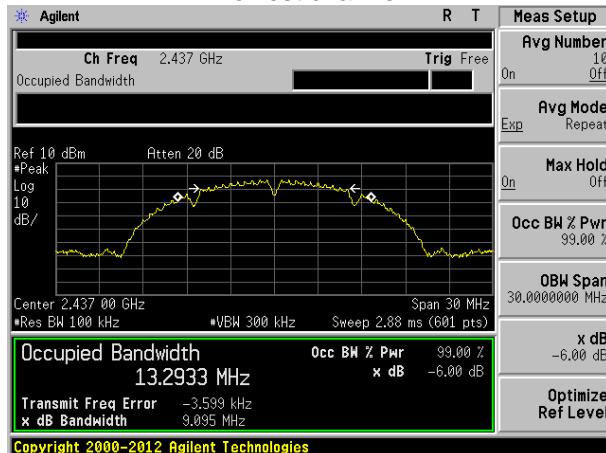

Middle channel



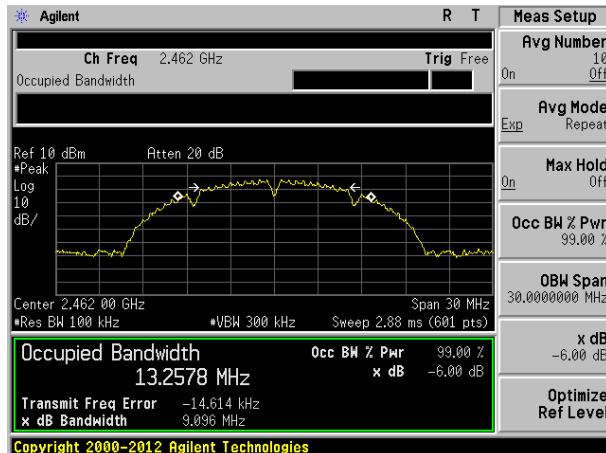


Highest channel

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebtek.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebtek.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Test mode:

802.11g

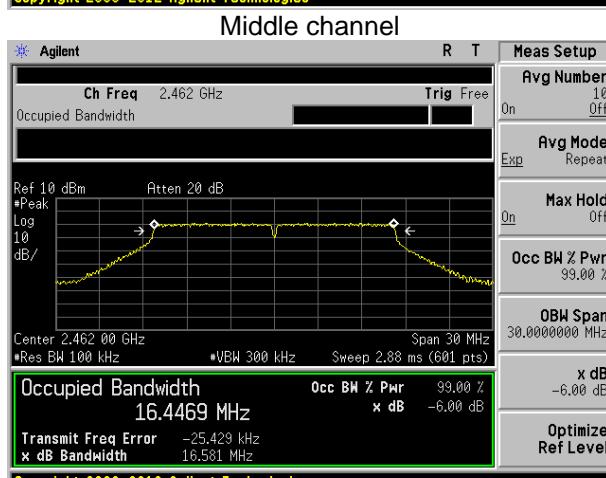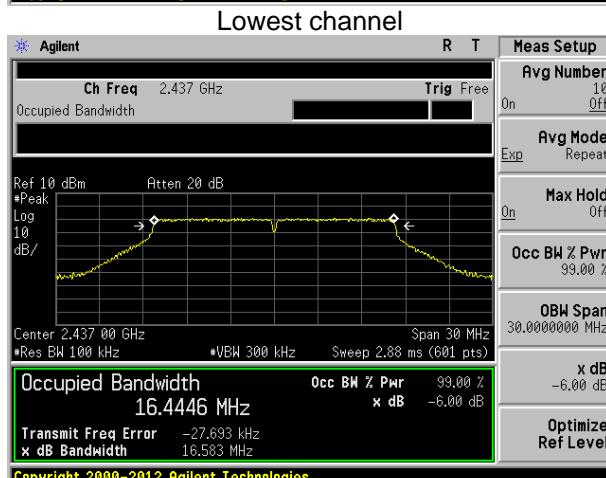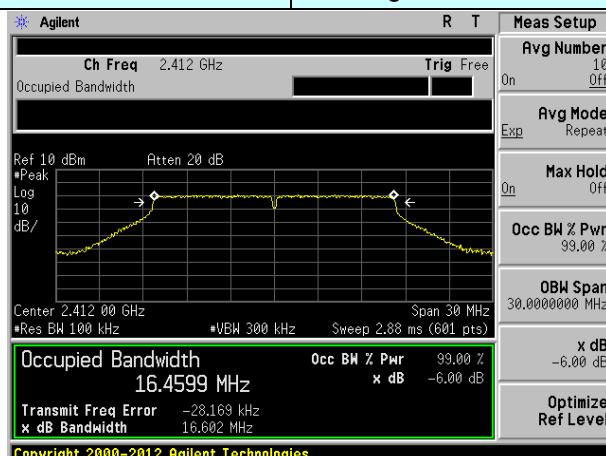


Highest channel


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebtek.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebtek.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Test mode:


802.11n(HT20)

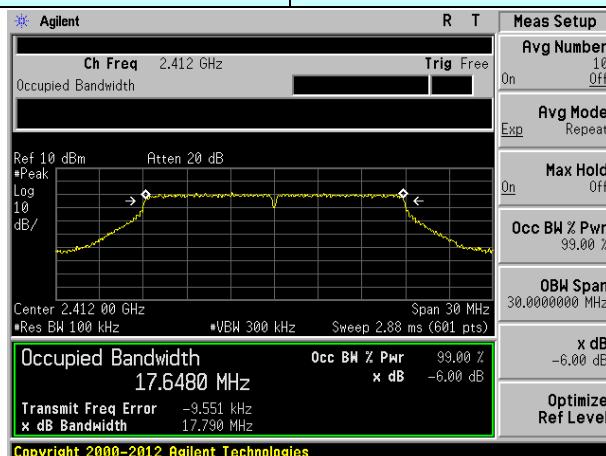

Lowest channel

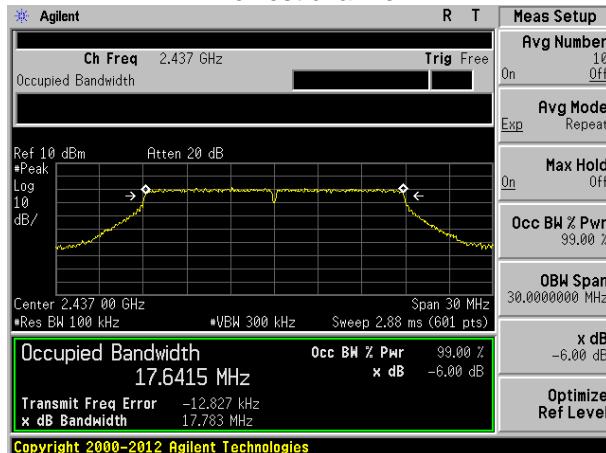

Middle channel

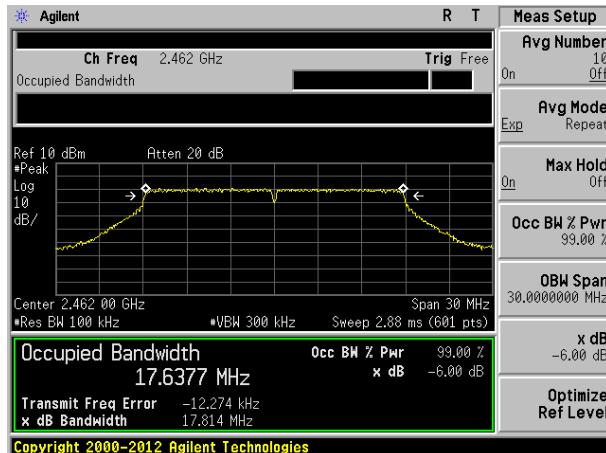

Highest channel

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebtek.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebtek.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Test mode: 802.11n(HT40)

Agilent

Ch Freq 2.422 GHz Trig Free

Occupied Bandwidth

Ref 10 dBm Atten 20 dB

#Peak Log 10 dB/

Center 2.422 0 GHz \*VBW 300 kHz Sweep 5.76 ms (601 pts)

Occupied Bandwidth 36.0215 MHz

Occ BW % Pwr 99.00 %

Transmit Freq Error -165.496 Hz

x dB Bandwidth 36.557 MHz

Copyright 2000-2012 Agilent Technologies

Meas Setup

Avg Number 10

On Off

Avg Mode

Exp Repeat

Max Hold

On Off

Occ BW % Pwr 99.00 %

OBW Span 60.000000 MHz

x dB -6.00 dB

Optimize Ref Level

Lowest channel

Agilent

Ch Freq 2.437 GHz Trig Free

Occupied Bandwidth

Ref 10 dBm Atten 20 dB

#Peak Log 10 dB/

Center 2.437 0 GHz \*VBW 300 kHz Sweep 5.76 ms (601 pts)

Occupied Bandwidth 36.0074 MHz

Occ BW % Pwr 99.00 %

Transmit Freq Error -19.913 kHz

x dB Bandwidth 36.5342 MHz

Copyright 2000-2012 Agilent Technologies

Meas Setup

Avg Number 10

On Off

Avg Mode

Exp Repeat

Max Hold

On Off

Occ BW % Pwr 99.00 %

OBW Span 60.000000 MHz

x dB -6.00 dB

Optimize Ref Level

Middle channel

Agilent

Ch Freq 2.452 GHz Trig Free

Occupied Bandwidth

Ref 10 dBm Atten 20 dB

#Peak Log 10 dB/

Center 2.452 0 GHz \*VBW 300 kHz Sweep 5.76 ms (601 pts)

Occupied Bandwidth 36.0252 MHz

Occ BW % Pwr 99.00 %

Transmit Freq Error -2.933 kHz

x dB Bandwidth 36.549 MHz

Copyright 2000-2012 Agilent Technologies

Meas Setup

Avg Number 10

On Off

Avg Mode

Exp Repeat

Max Hold

On Off

Occ BW % Pwr 99.00 %

OBW Span 60.000000 MHz


x dB -6.00 dB

Optimize Ref Level

Highest channel

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebtek.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebtek.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."


## 7.5 Power Spectral Density

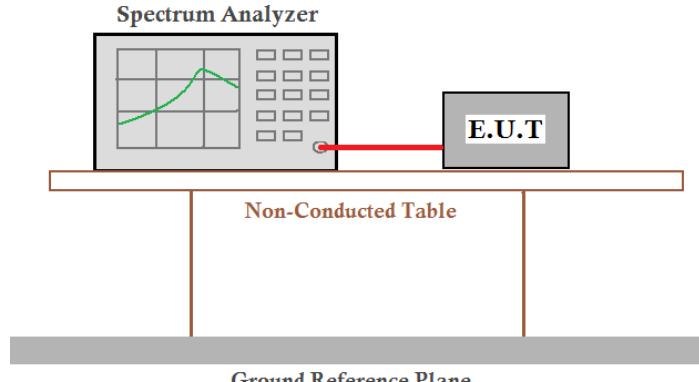Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V03
Limit:	8dBm/3KHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass


## Measurement Data

Test CH	Power Spectral Density (dBm)				Limit (dBm/3kHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	-3.22	-9.48	-8.90	-12.46	8.00	Pass
Middle	-3.03	-9.36	-8.73	-12.38		
Highest	-2.91	-9.04	-8.65	-12.26		

## Test plot as follows:

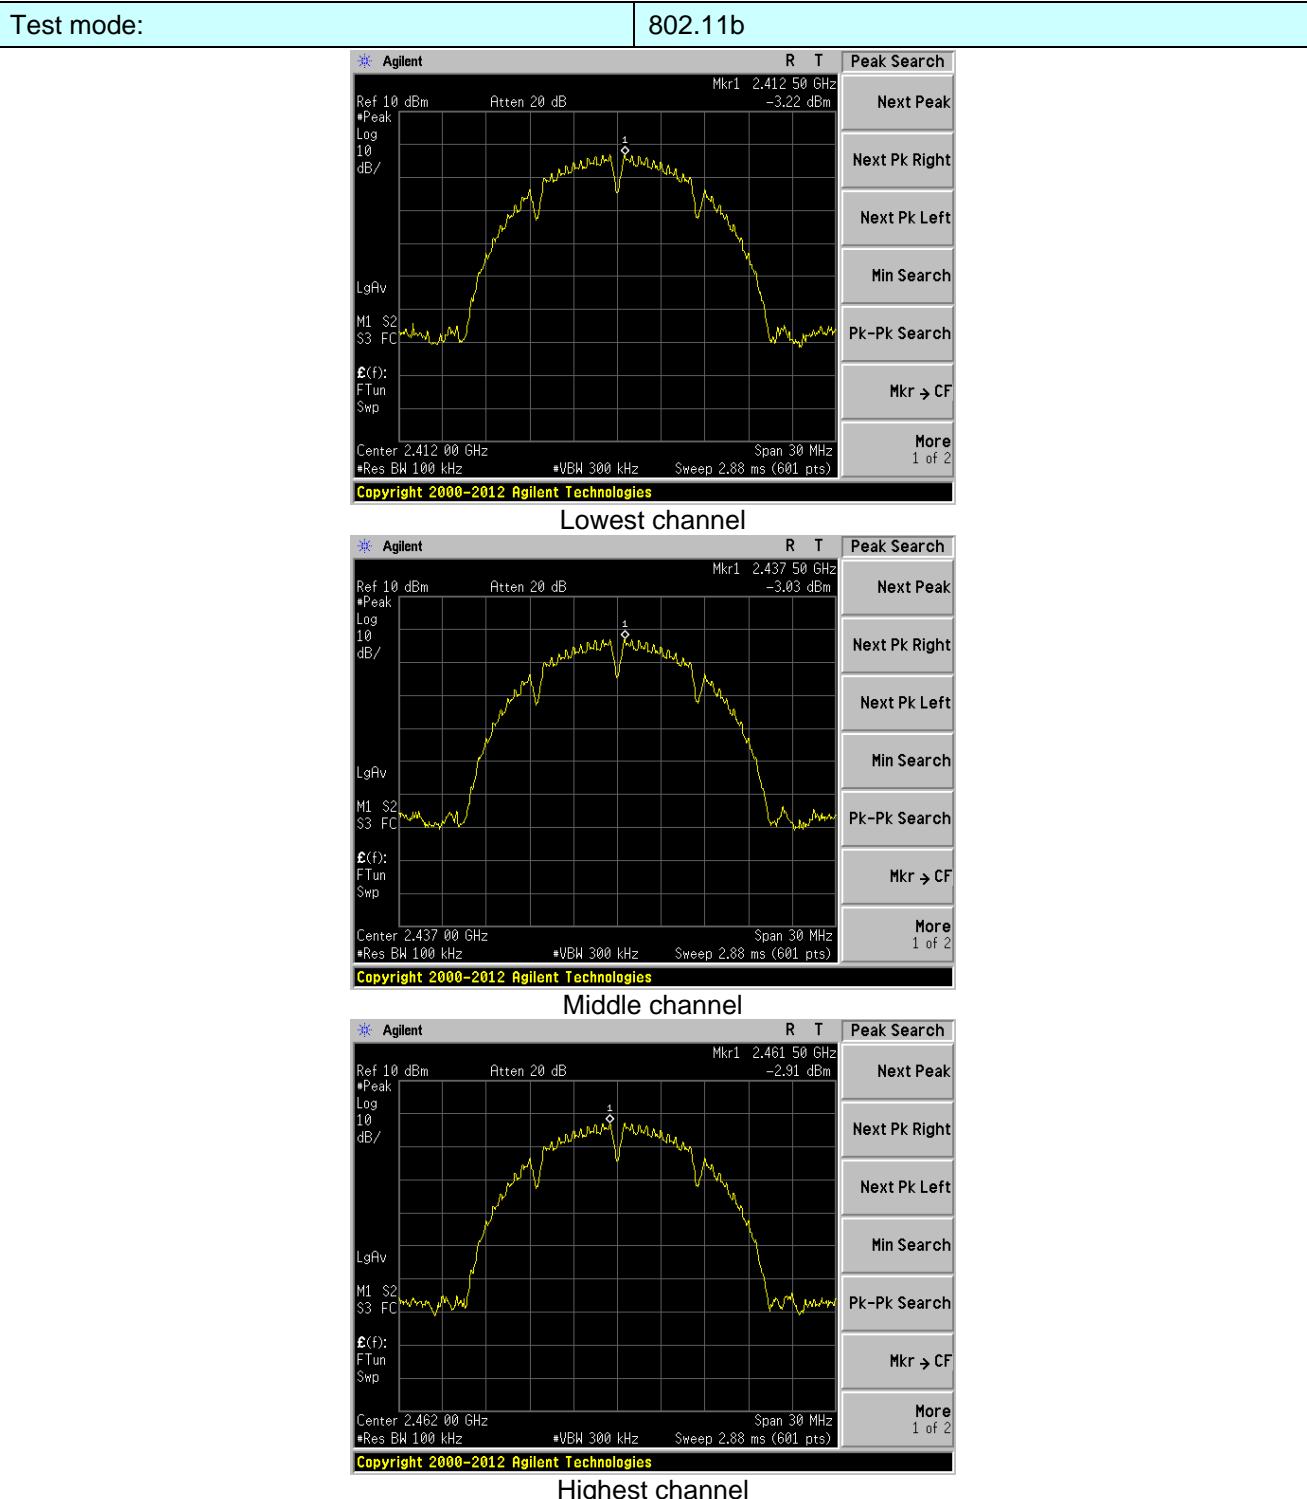


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebtek.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebtek.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

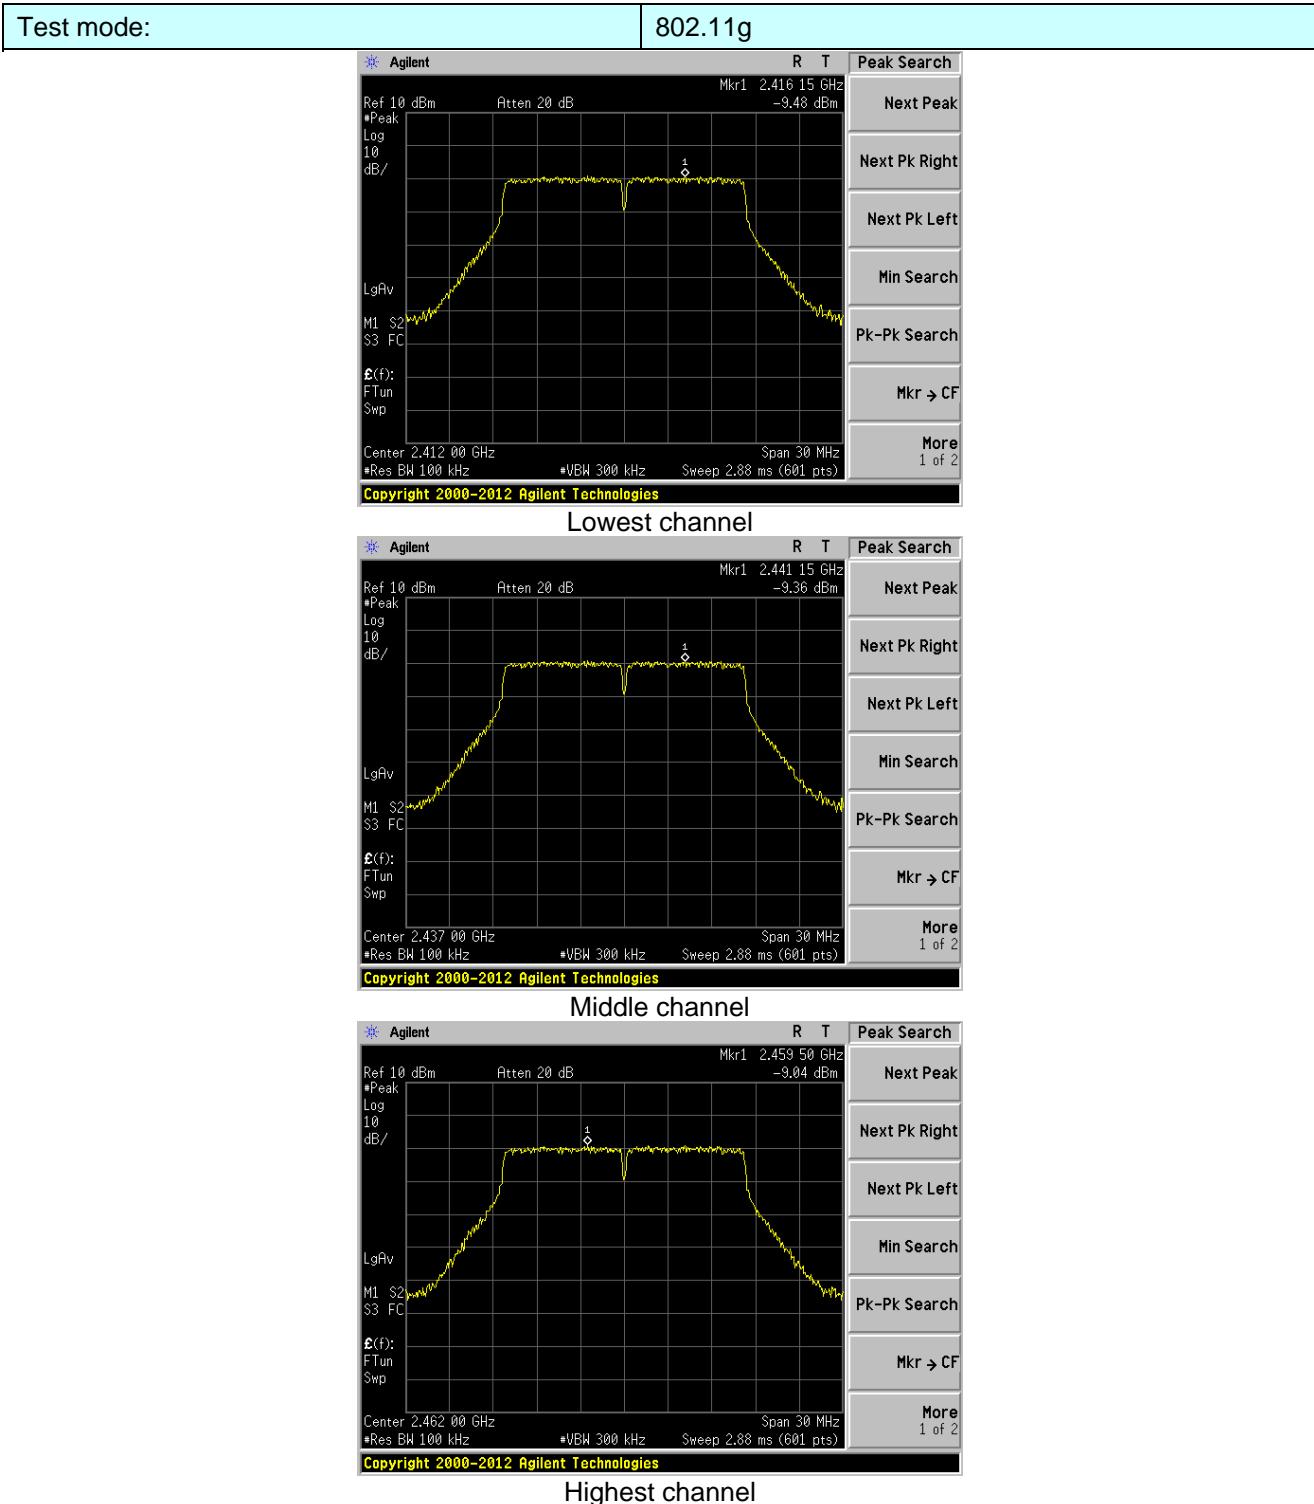


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebtek.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebtek.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Test mode:


802.11n(HT20)

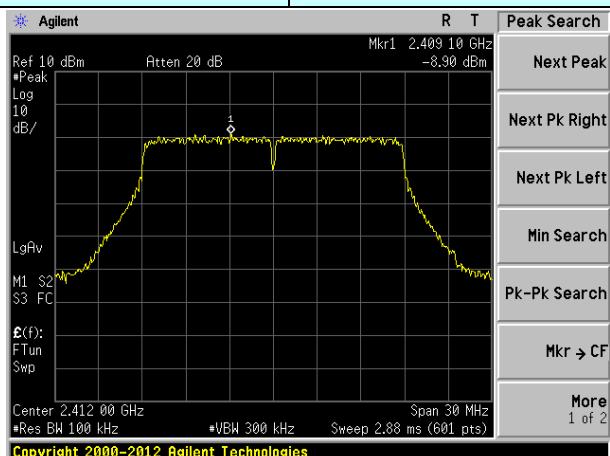

Lowest channel

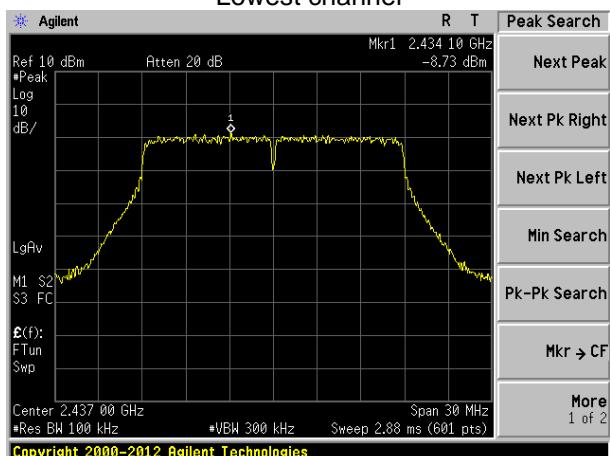

Middle channel

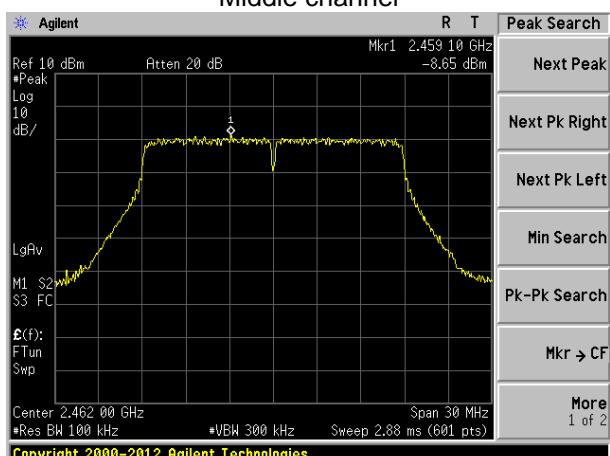


Highest channel


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebtek.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebtek.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Test mode:


802.11n(HT40)

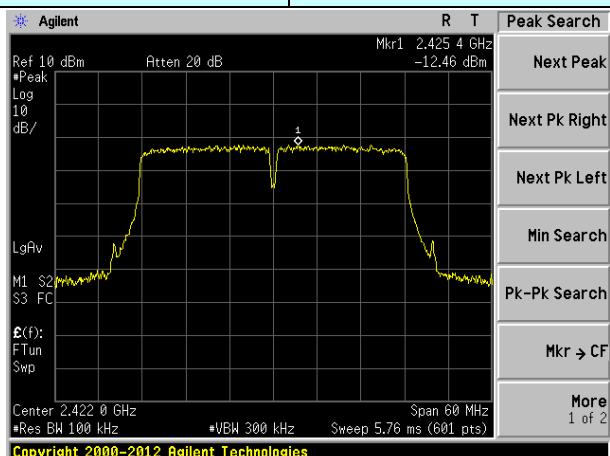

Lowest channel

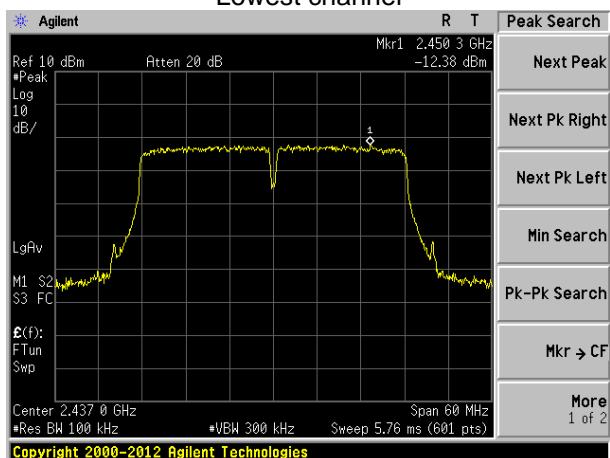

Middle channel

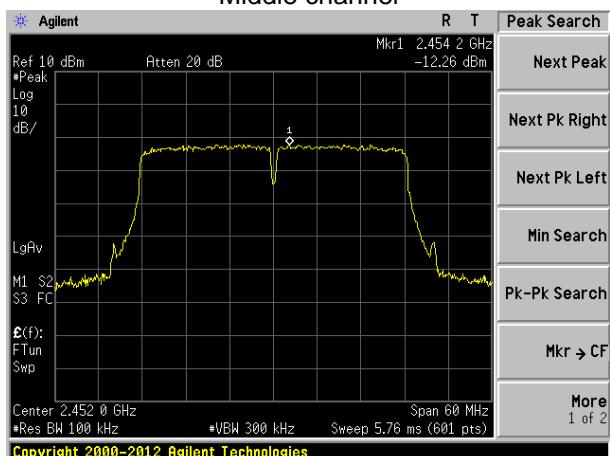


Highest channel


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotech.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotech.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

## 7.6 Band edges


### 7.6.1 Conducted Emission Method

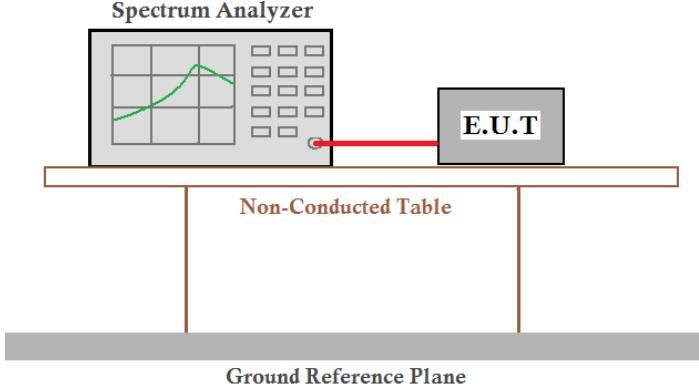Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V03
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass


## Test plot as follows:

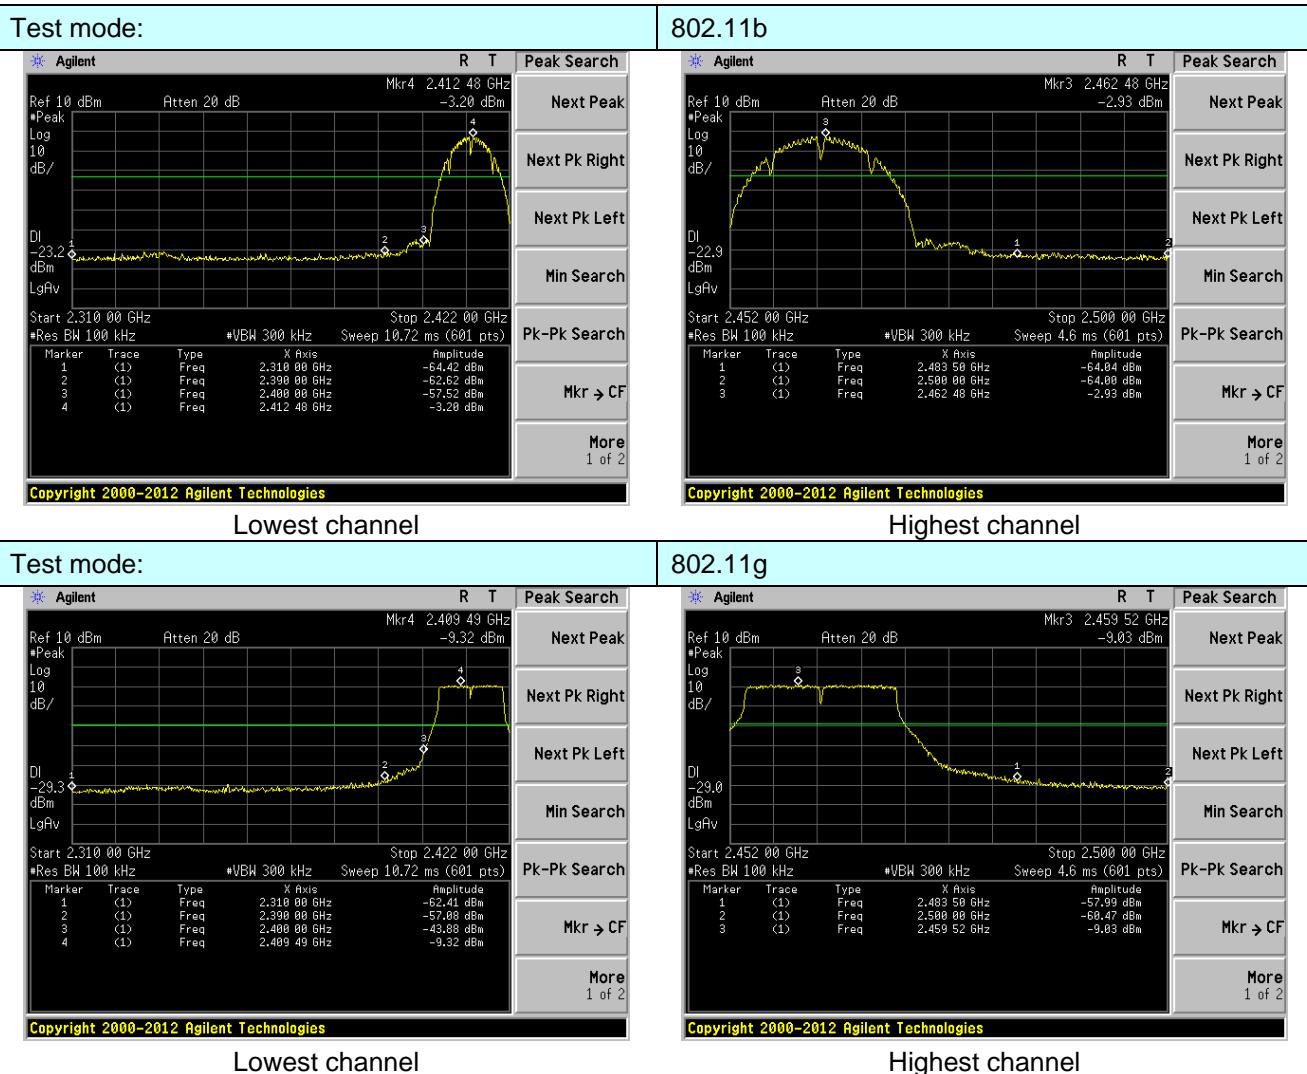

## Test mode:

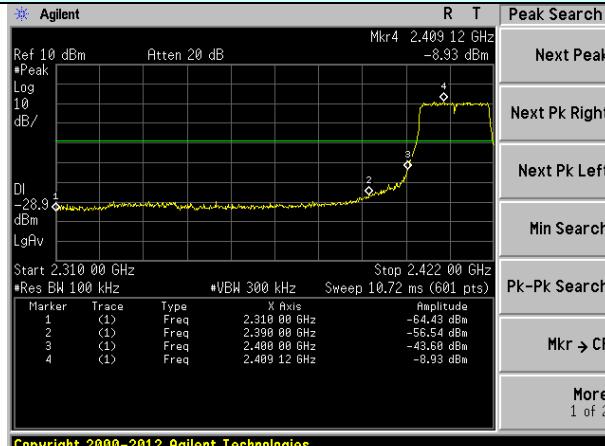


Lowest channel

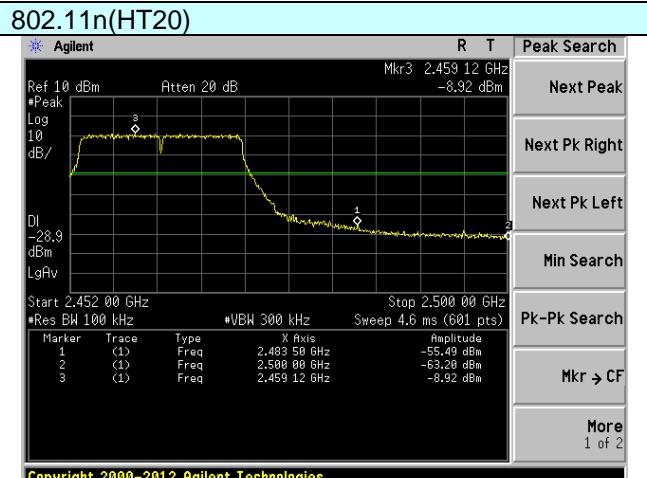


Highest channel

## Test mode:

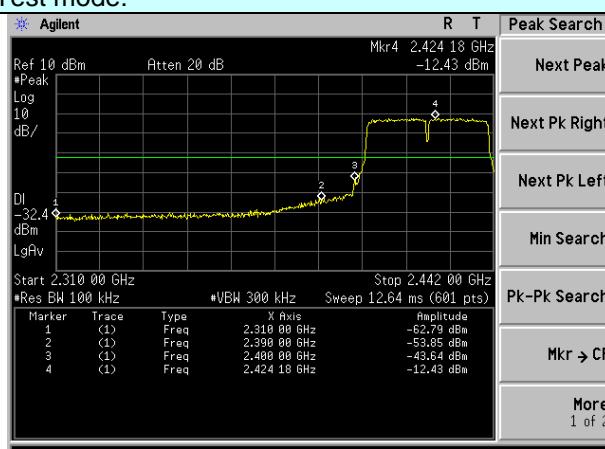


Lowest channel

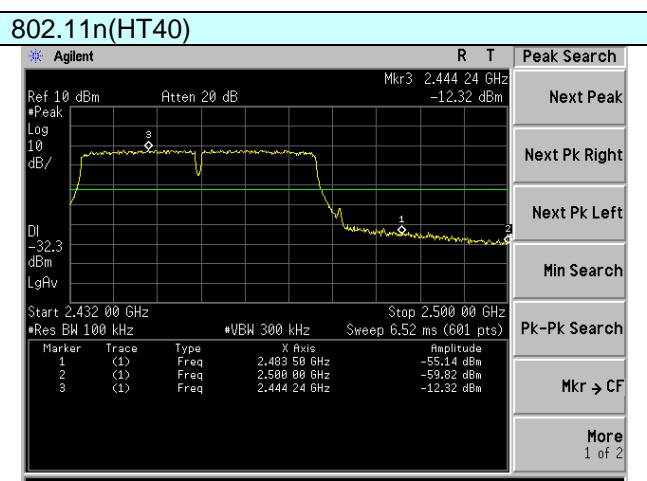

Highest channel

## 7.6.2 Radiated Emission Method

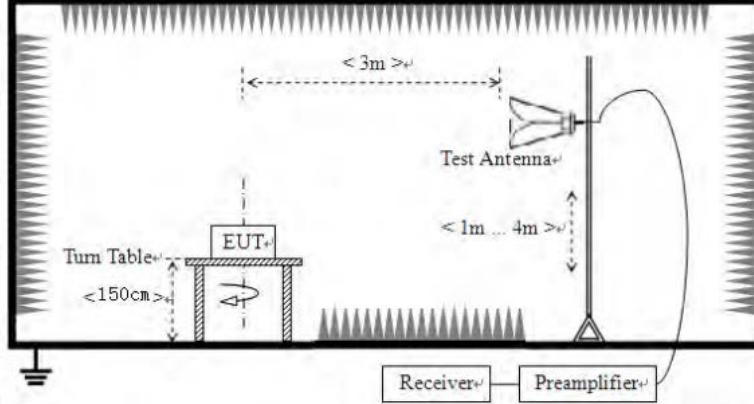Test Requirement:	FCC Part15 C Section 15.209 and 15.205							
Test Method:	ANSI C63.10:2013							
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.							
Test site:	Measurement Distance: 3m							
Receiver setup:	Frequency	Detector	RBW	VBW	Value			
	Above 1GHz	Peak	1MHz	3MHz	Peak			
		RMS	1MHz	3MHz	Average			
Limit:	Frequency	Limit (dBuV/m @3m)			Value			
	Above 1GHz	54.00			Average			
		74.00			Peak			
Test setup:								
Test Procedure:	<ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak, and average methods.</li> </ol>							

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebtek.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebtek.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

	peak or average method as specified and then reported in a data sheet. 7. The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement data:

*Remark: The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.*

Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	51.28	27.59	5.38	34.01	50.24	74.00	-23.76	Horizontal
2400.00	60.17	27.58	5.39	34.01	59.13	74.00	-14.87	Horizontal
2390.00	52.94	27.59	5.38	34.01	51.90	74.00	-22.10	Vertical
2400.00	61.87	27.58	5.39	34.01	60.83	74.00	-13.17	Vertical

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	38.15	27.59	5.38	34.01	37.11	54.00	-16.89	Horizontal
2400.00	46.40	27.58	5.39	34.01	45.36	54.00	-8.64	Horizontal
2390.00	39.94	27.59	5.38	34.01	38.90	54.00	-15.10	Vertical
2400.00	47.50	27.58	5.39	34.01	46.46	54.00	-7.54	Vertical

Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	51.78	27.53	5.47	33.92	50.86	74.00	-23.14	Horizontal
2500.00	47.72	27.55	5.49	29.93	50.83	74.00	-23.17	Horizontal
2483.50	53.96	27.53	5.47	33.92	53.04	74.00	-20.96	Vertical
2500.00	50.16	27.55	5.49	29.93	53.27	74.00	-20.73	Vertical

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	38.46	27.53	5.47	33.92	37.54	54.00	-16.46	Horizontal
2500.00	34.63	27.55	5.49	29.93	37.74	54.00	-16.26	Horizontal
2483.50	40.37	27.53	5.47	33.92	39.45	54.00	-14.55	Vertical
2500.00	36.50	27.55	5.49	29.93	39.61	54.00	-14.39	Vertical

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test mode:	802.11g	Test channel:	Lowest
------------	---------	---------------	--------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	50.57	27.59	5.38	34.01	49.53	74.00	-24.47	Horizontal
2400.00	59.22	27.58	5.39	34.01	58.18	74.00	-15.82	Horizontal
2390.00	52.17	27.59	5.38	34.01	51.13	74.00	-22.87	Vertical
2400.00	60.72	27.58	5.39	34.01	59.68	74.00	-14.32	Vertical

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	37.64	27.59	5.38	34.01	36.60	54.00	-17.40	Horizontal
2400.00	45.82	27.58	5.39	34.01	44.78	54.00	-9.22	Horizontal
2390.00	39.37	27.59	5.38	34.01	38.33	54.00	-15.67	Vertical
2400.00	46.86	27.58	5.39	34.01	45.82	54.00	-8.18	Vertical

Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	50.76	27.53	5.47	33.92	49.84	74.00	-24.16	Horizontal
2500.00	46.93	27.55	5.49	29.93	50.04	74.00	-23.96	Horizontal
2483.50	52.79	27.53	5.47	33.92	51.87	74.00	-22.13	Vertical
2500.00	49.24	27.55	5.49	29.93	52.35	74.00	-21.65	Vertical

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	37.84	27.53	5.47	33.92	36.92	54.00	-17.08	Horizontal
2500.00	34.15	27.55	5.49	29.93	37.26	54.00	-16.74	Horizontal
2483.50	39.69	27.53	5.47	33.92	38.77	54.00	-15.23	Vertical
2500.00	35.99	27.55	5.49	29.93	39.10	54.00	-14.90	Vertical

**Remark:**

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

Test mode:	802.11n(HT20)	Test channel:	Lowest
------------	---------------	---------------	--------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	50.70	27.59	5.38	34.01	49.66	74.00	-24.34	Horizontal
2400.00	59.40	27.58	5.39	34.01	58.36	74.00	-15.64	Horizontal
2390.00	52.32	27.59	5.38	34.01	51.28	74.00	-22.72	Vertical
2400.00	60.94	27.58	5.39	34.01	59.90	74.00	-14.10	Vertical

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	37.74	27.59	5.38	34.01	36.70	54.00	-17.30	Horizontal
2400.00	45.93	27.58	5.39	34.01	44.89	54.00	-9.11	Horizontal
2390.00	39.48	27.59	5.38	34.01	38.44	54.00	-15.56	Vertical
2400.00	46.98	27.58	5.39	34.01	45.94	54.00	-8.06	Vertical

Test mode:	802.11n(HT20)	Test channel:	Highest
------------	---------------	---------------	---------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	50.95	27.53	5.47	33.92	50.03	74.00	-23.97	Horizontal
2500.00	47.08	27.55	5.49	29.93	50.19	74.00	-23.81	Horizontal
2483.50	53.02	27.53	5.47	33.92	52.10	74.00	-21.90	Vertical
2500.00	49.42	27.55	5.49	29.93	52.53	74.00	-21.47	Vertical

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	37.96	27.53	5.47	33.92	37.04	54.00	-16.96	Horizontal
2500.00	34.24	27.55	5.49	29.93	37.35	54.00	-16.65	Horizontal
2483.50	39.82	27.53	5.47	33.92	38.90	54.00	-15.10	Vertical
2500.00	36.08	27.55	5.49	29.93	39.19	54.00	-14.81	Vertical

**Remark:**

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

Test mode:	802.11n(HT40)	Test channel:	Lowest
------------	---------------	---------------	--------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	50.00	27.59	5.38	34.01	48.96	74.00	-25.04	Horizontal
2400.00	58.46	27.58	5.39	34.01	57.42	74.00	-16.58	Horizontal
2390.00	51.57	27.59	5.38	34.01	50.53	74.00	-23.47	Vertical
2400.00	59.81	27.58	5.39	34.01	58.77	74.00	-15.23	Vertical

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	37.24	27.59	5.38	34.01	36.20	54.00	-17.80	Horizontal
2400.00	45.35	27.58	5.39	34.01	44.31	54.00	-9.69	Horizontal
2390.00	38.92	27.59	5.38	34.01	37.88	54.00	-16.12	Vertical
2400.00	46.35	27.58	5.39	34.01	45.31	54.00	-8.69	Vertical

Test mode:	802.11n(HT40)	Test channel:	Highest
------------	---------------	---------------	---------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	49.95	27.53	5.47	33.92	49.03	74.00	-24.97	Horizontal
2500.00	46.30	27.55	5.49	29.93	49.41	74.00	-24.59	Horizontal
2483.50	51.87	27.53	5.47	33.92	50.95	74.00	-23.05	Vertical
2500.00	48.50	27.55	5.49	29.93	51.61	74.00	-22.39	Vertical

**Average value:**


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	37.35	27.53	5.47	33.92	36.43	54.00	-17.57	Horizontal
2500.00	33.77	27.55	5.49	29.93	36.88	54.00	-17.12	Horizontal
2483.50	39.15	27.53	5.47	33.92	38.23	54.00	-15.77	Vertical
2500.00	35.58	27.55	5.49	29.93	38.69	54.00	-15.31	Vertical

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 7.7 Spurious Emission

### 7.7.1 Conducted Emission Method

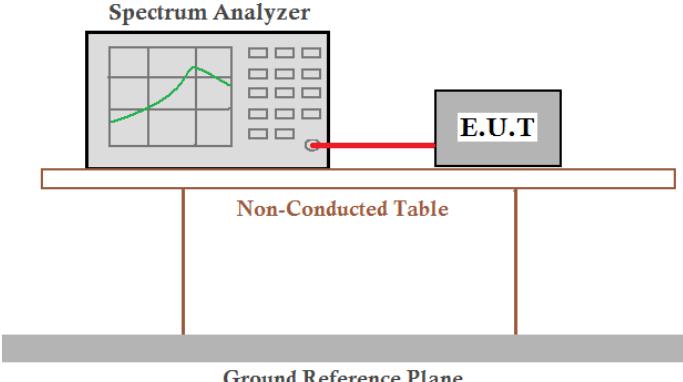Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V03
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	<p style="text-align: center;">Spectrum Analyzer</p>  <p style="text-align: center;">Non-Conducted Table</p> <p style="text-align: center;">Ground Reference Plane</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass


#### Test plot as follows:

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebtek.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebtek.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Test mode:


802.11b

Lowest channel

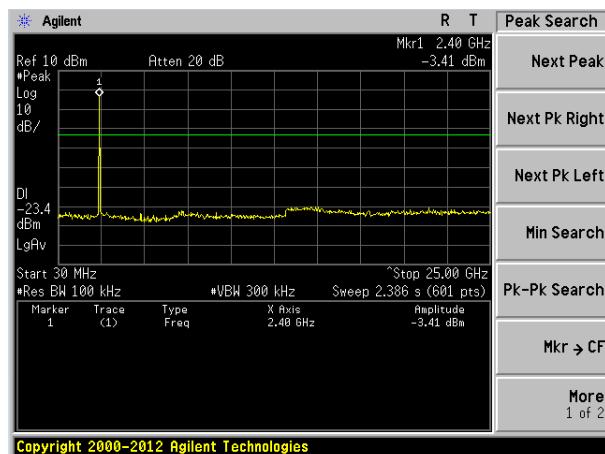


30MHz~25GHz

Middle channel

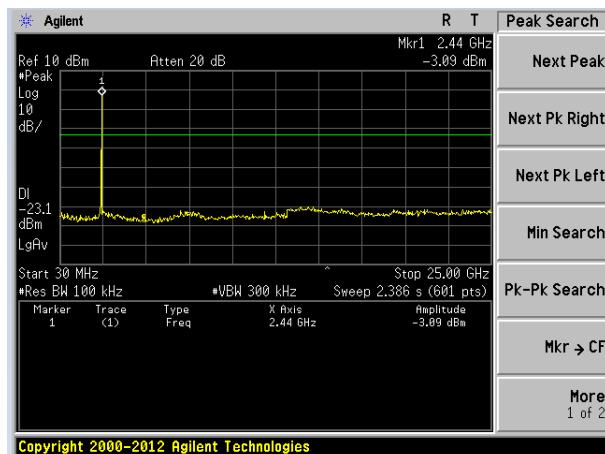

30MHz~25GHz

Highest channel

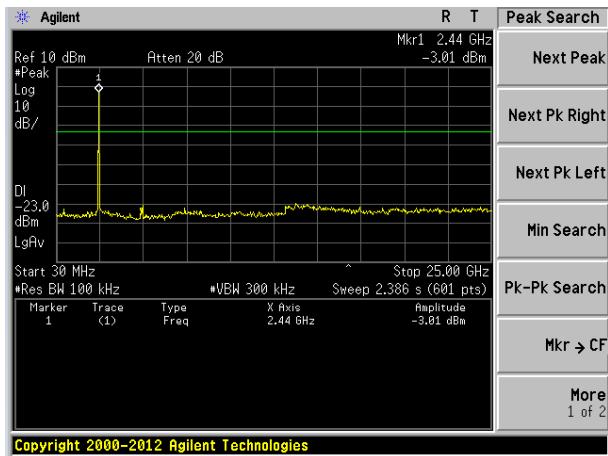


30MHz~25GHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebtek.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebtek.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Test mode:


802.11g

Lowest channel

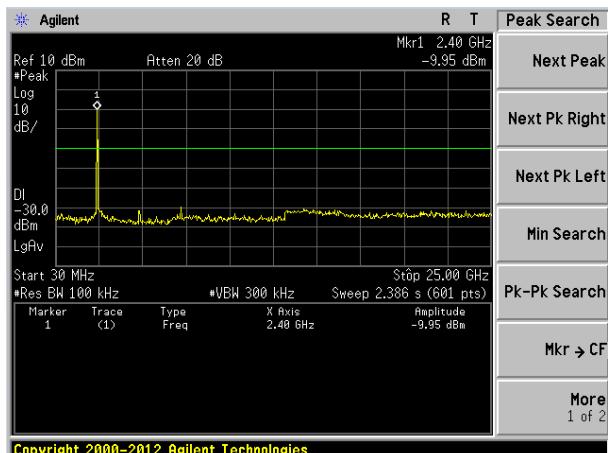


30MHz~25GHz

Middle channel

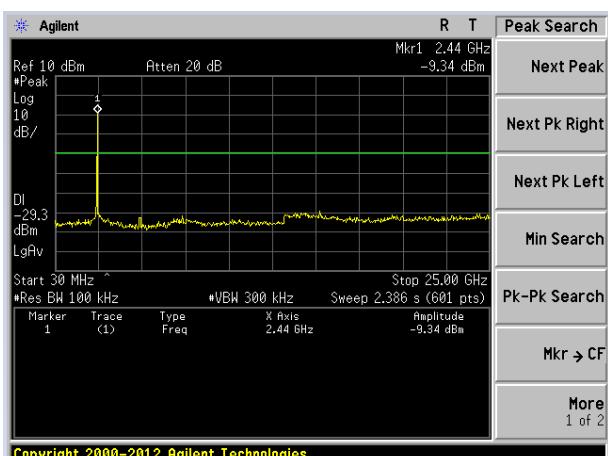

30MHz~25GHz

Highest channel

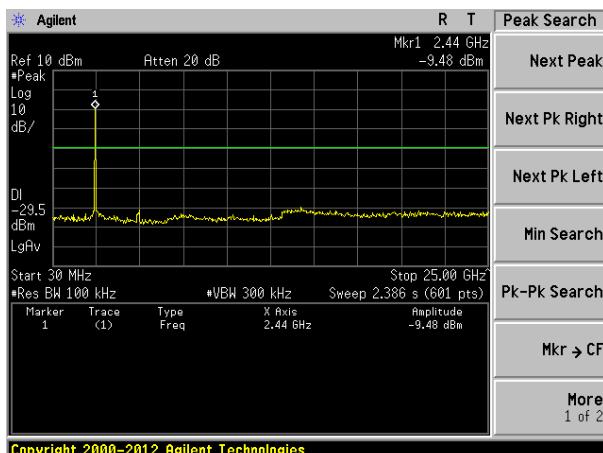


30MHz~25GHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebtek.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebtek.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Test mode:


802.11n(HT20)

Lowest channel

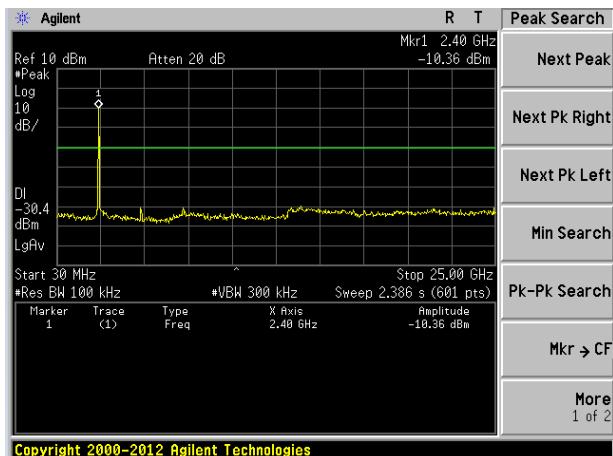

30MHz~25GHz


Middle channel

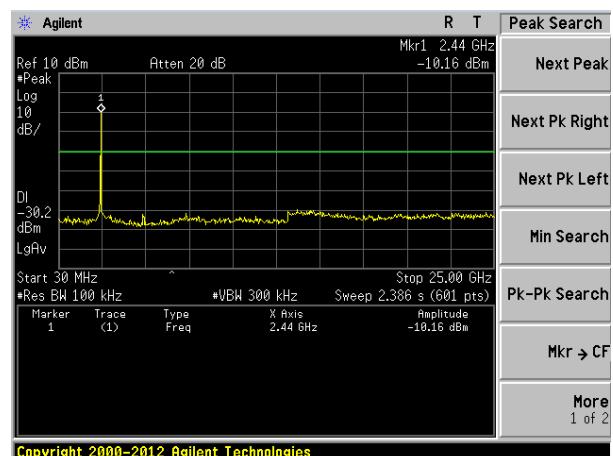

30MHz~25GHz

Highest channel

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotech.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotech.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

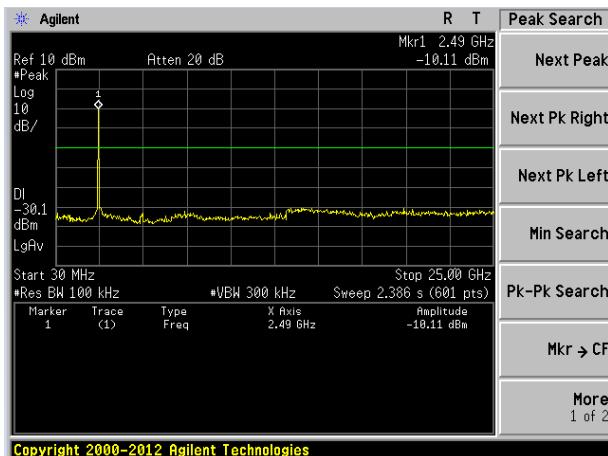


30MHz~25GHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebtek.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebtek.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

Test mode:


802.11n(HT40)

Lowest channel

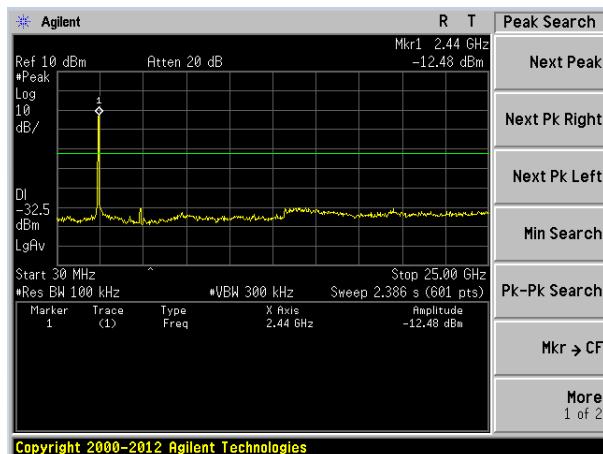


30MHz~25GHz

Middle channel

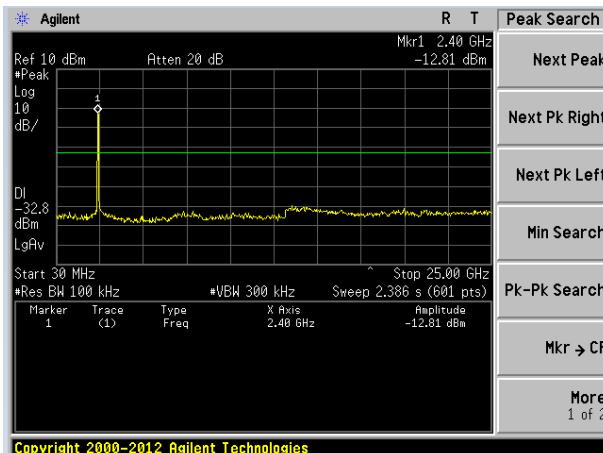

30MHz~25GHz


Highest channel

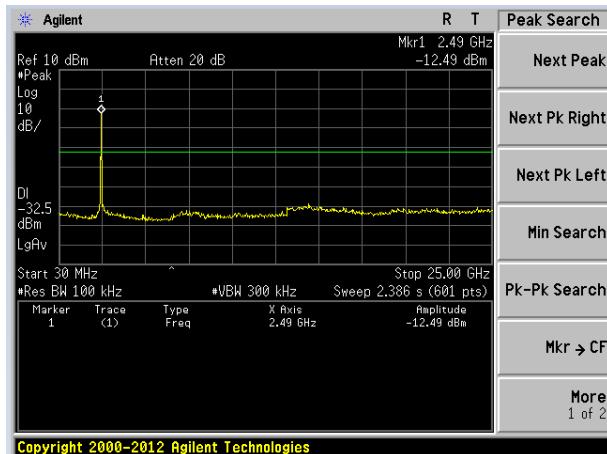


30MHz~25GHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebtek.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebtek.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

## 7.7.2 Radiated Emission Method

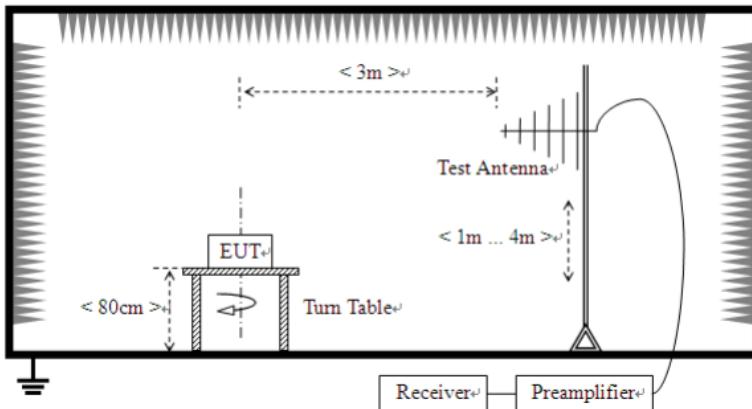Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	30MHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Limit:	RMS	1MHz	3MHz	Average	
	Frequency	Limit (dBuV/m @3m)		Value	
	30MHz-88MHz	40.00		Quasi-peak	
	88MHz-216MHz	43.50		Quasi-peak	
	216MHz-960MHz	46.00		Quasi-peak	
	960MHz-1GHz	54.00		Quasi-peak	
	Above 1GHz	54.00	Average	74.00	Peak
Test setup:	Below 1GHz				
					
	Above 1GHz				

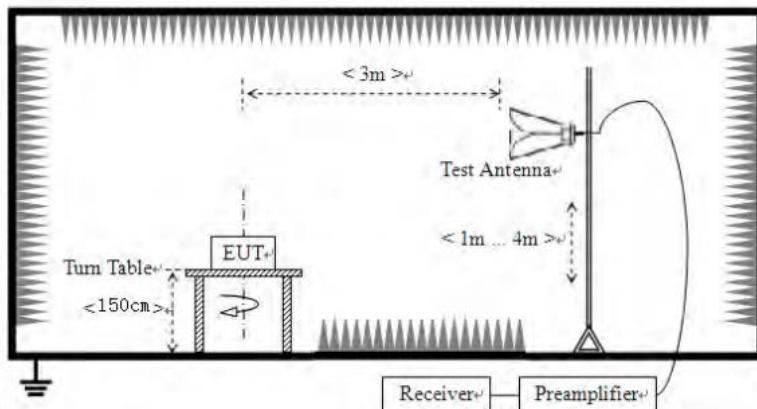

Test Procedure:	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table(0.8 meters below 1G and 1.5 meters above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> <li>7. The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report.</li> </ol>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

**Remark:**

Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

**Measurement Data****■ Below 1GHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
36.51	51.24	11.20	0.62	30.10	32.96	40.00	-7.04	Vertical
49.88	48.88	12.20	0.77	30.10	31.75	40.00	-8.25	Vertical
121.12	56.96	9.07	1.37	29.72	37.68	43.50	-5.82	Vertical
128.56	54.38	8.43	1.43	29.68	34.56	43.50	-8.94	Vertical
244.23	56.89	11.66	2.09	29.74	40.90	46.00	-5.10	Vertical
549.02	38.03	18.40	3.52	29.45	30.50	46.00	-15.50	Vertical
44.28	42.95	12.25	0.71	30.10	25.81	40.00	-14.19	Horizontal
114.92	51.23	10.00	1.32	29.74	32.81	43.50	-10.69	Horizontal
122.83	55.99	9.07	1.38	29.71	36.73	43.50	-6.77	Horizontal
174.42	52.97	8.60	1.71	29.51	33.77	43.50	-9.73	Horizontal
244.23	58.86	11.66	2.09	29.74	42.87	46.00	-3.13	Horizontal
545.18	41.87	18.29	3.50	29.45	34.21	46.00	-11.79	Horizontal

## ■ Above 1GHz

Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

## Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	39.41	31.79	8.62	32.10	47.72	74.00	-26.28	Vertical
7236.00	33.66	36.19	11.68	31.97	49.56	74.00	-24.44	Vertical
9648.00	32.32	38.07	14.16	31.56	52.99	74.00	-21.01	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	38.22	31.79	8.62	32.10	46.53	74.00	-27.47	Horizontal
7236.00	33.48	36.19	11.68	31.97	49.38	74.00	-24.62	Horizontal
9648.00	31.92	38.07	14.16	31.56	52.59	74.00	-21.41	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

## Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	28.56	31.79	8.62	32.10	36.87	54.00	-17.13	Vertical
7236.00	22.55	36.19	11.68	31.97	38.45	54.00	-15.55	Vertical
9648.00	22.68	38.07	14.16	31.56	43.35	54.00	-10.65	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4824.00	27.80	31.79	8.62	32.10	36.11	54.00	-17.89	Horizontal
7236.00	22.08	36.19	11.68	31.97	37.98	54.00	-16.02	Horizontal
9648.00	21.69	38.07	14.16	31.56	42.36	54.00	-11.64	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

## Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- “\*”, means this data is the too weak instrument of signal is unable to test.

Test mode:	802.11b	Test channel:	Middle
------------	---------	---------------	--------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	38.62	31.85	8.66	32.12	47.01	74.00	-26.99	Vertical
7311.00	33.83	36.37	11.71	31.91	50.00	74.00	-24.00	Vertical
9748.00	33.40	38.27	14.25	31.56	54.36	74.00	-19.64	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	39.21	31.85	8.66	32.12	47.60	74.00	-26.40	Horizontal
7311.00	32.53	36.37	11.71	31.91	48.70	74.00	-25.30	Horizontal
9748.00	33.32	38.27	14.25	31.56	54.28	74.00	-19.72	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	29.53	31.85	8.66	32.12	37.92	54.00	-16.08	Vertical
7311.00	22.16	36.37	11.71	31.91	38.33	54.00	-15.67	Vertical
9748.00	22.67	38.27	14.25	31.56	43.63	54.00	-10.37	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	29.36	31.85	8.66	32.12	37.75	54.00	-16.25	Horizontal
7311.00	21.63	36.37	11.71	31.91	37.80	54.00	-16.20	Horizontal
9748.00	23.04	38.27	14.25	31.56	44.00	54.00	-10.00	Horizontal
12185.00	*					54.00		Horizontal
14622.00	*					54.00		Horizontal
17059.00	*					54.00		Horizontal

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*\*”, means this data is the too weak instrument of signal is unable to test.

Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	43.62	31.90	8.70	32.15	52.07	74.00	-21.93	Vertical
7386.00	34.17	36.49	11.76	31.83	50.59	74.00	-23.41	Vertical
9848.00	36.46	38.62	14.31	31.77	57.62	74.00	-16.38	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	43.12	31.90	8.70	32.15	51.57	74.00	-22.43	Horizontal
7386.00	33.17	36.49	11.76	31.83	49.59	74.00	-24.41	Horizontal
9848.00	32.67	38.62	14.31	31.77	53.83	74.00	-20.17	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	34.64	31.90	8.70	32.15	43.09	54.00	-10.91	Vertical
7386.00	24.11	36.49	11.76	31.83	40.53	54.00	-13.47	Vertical
9848.00	24.99	38.62	14.31	31.77	46.15	54.00	-7.85	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	33.55	31.90	8.70	32.15	42.00	54.00	-12.00	Horizontal
7386.00	22.58	36.49	11.76	31.83	39.00	54.00	-15.00	Horizontal
9848.00	21.95	38.62	14.31	31.77	43.11	54.00	-10.89	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*\*”, means this data is the too weak instrument of signal is unable to test.

Test mode:	802.11g	Test channel:	lowest
------------	---------	---------------	--------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	39.68	31.79	8.62	32.10	47.99	74.00	-26.01	Vertical
7236.00	33.83	36.19	11.68	31.97	49.73	74.00	-24.27	Vertical
9648.00	32.44	38.07	14.16	31.56	53.11	74.00	-20.89	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	38.44	31.79	8.62	32.10	46.75	74.00	-27.25	Horizontal
7236.00	33.63	36.19	11.68	31.97	49.53	74.00	-24.47	Horizontal
9648.00	32.03	38.07	14.16	31.56	52.70	74.00	-21.30	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	28.81	31.79	8.62	32.10	37.12	54.00	-16.88	Vertical
7236.00	22.71	36.19	11.68	31.97	38.61	54.00	-15.39	Vertical
9648.00	22.79	38.07	14.16	31.56	43.46	54.00	-10.54	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4824.00	28.01	31.79	8.62	32.10	36.32	54.00	-17.68	Horizontal
7236.00	22.22	36.19	11.68	31.97	38.12	54.00	-15.88	Horizontal
9648.00	21.79	38.07	14.16	31.56	42.46	54.00	-11.54	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*\*”, means this data is the too weak instrument of signal is unable to test.

Test mode:	802.11g	Test channel:	Middle
------------	---------	---------------	--------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	38.84	31.85	8.66	32.12	47.23	74.00	-26.77	Vertical
7311.00	33.97	36.37	11.71	31.91	50.14	74.00	-23.86	Vertical
9748.00	33.50	38.27	14.25	31.56	54.46	74.00	-19.54	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	39.40	31.85	8.66	32.12	47.79	74.00	-26.21	Horizontal
7311.00	32.65	36.37	11.71	31.91	48.82	74.00	-25.18	Horizontal
9748.00	33.41	38.27	14.25	31.56	54.37	74.00	-19.63	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	29.73	31.85	8.66	32.12	38.12	54.00	-15.88	Vertical
7311.00	22.29	36.37	11.71	31.91	38.46	54.00	-15.54	Vertical
9748.00	22.76	38.27	14.25	31.56	43.72	54.00	-10.28	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	29.54	31.85	8.66	32.12	37.93	54.00	-16.07	Horizontal
7311.00	21.74	36.37	11.71	31.91	37.91	54.00	-16.09	Horizontal
9748.00	23.13	38.27	14.25	31.56	44.09	54.00	-9.91	Horizontal
12185.00	*					54.00		Horizontal
14622.00	*					54.00		Horizontal
17059.00	*					54.00		Horizontal

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*\*”, means this data is the too weak instrument of signal is unable to test.

Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	44.00	31.90	8.70	32.15	52.45	74.00	-21.55	Vertical
7386.00	34.41	36.49	11.76	31.83	50.83	74.00	-23.17	Vertical
9848.00	36.63	38.62	14.31	31.77	57.79	74.00	-16.21	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	43.44	31.90	8.70	32.15	51.89	74.00	-22.11	Horizontal
7386.00	33.38	36.49	11.76	31.83	49.80	74.00	-24.20	Horizontal
9848.00	32.83	38.62	14.31	31.77	53.99	74.00	-20.01	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	34.98	31.90	8.70	32.15	43.43	54.00	-10.57	Vertical
7386.00	24.34	36.49	11.76	31.83	40.76	54.00	-13.24	Vertical
9848.00	25.15	38.62	14.31	31.77	46.31	54.00	-7.69	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	33.85	31.90	8.70	32.15	42.30	54.00	-11.70	Horizontal
7386.00	22.78	36.49	11.76	31.83	39.20	54.00	-14.80	Horizontal
9848.00	22.10	38.62	14.31	31.77	43.26	54.00	-10.74	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*\*”, means this data is the too weak instrument of signal is unable to test.

Test mode:	802.11n(HT20)		Test channel:	Lowest		
------------	---------------	--	---------------	--------	--	--

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	39.41	31.79	8.62	32.10	47.72	74.00	-26.28	Vertical
7236.00	33.66	36.19	11.68	31.97	49.56	74.00	-24.44	Vertical
9648.00	32.32	38.07	14.16	31.56	52.99	74.00	-21.01	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	38.22	31.79	8.62	32.10	46.53	74.00	-27.47	Horizontal
7236.00	33.48	36.19	11.68	31.97	49.38	74.00	-24.62	Horizontal
9648.00	31.92	38.07	14.16	31.56	52.59	74.00	-21.41	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	28.56	31.79	8.62	32.10	36.87	54.00	-17.13	Vertical
7236.00	22.55	36.19	11.68	31.97	38.45	54.00	-15.55	Vertical
9648.00	22.68	38.07	14.16	31.56	43.35	54.00	-10.65	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4824.00	27.80	31.79	8.62	32.10	36.11	54.00	-17.89	Horizontal
7236.00	22.08	36.19	11.68	31.97	37.98	54.00	-16.02	Horizontal
9648.00	21.69	38.07	14.16	31.56	42.36	54.00	-11.64	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. \*\*, means this data is the too weak instrument of signal is unable to test.

Test mode:	802.11n(HT20)	Test channel:	Middle
------------	---------------	---------------	--------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	38.62	31.85	8.66	32.12	47.01	74.00	-26.99	Vertical
7311.00	33.83	36.37	11.71	31.91	50.00	74.00	-24.00	Vertical
9748.00	33.40	38.27	14.25	31.56	54.36	74.00	-19.64	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	39.21	31.85	8.66	32.12	47.60	74.00	-26.40	Horizontal
7311.00	32.53	36.37	11.71	31.91	48.70	74.00	-25.30	Horizontal
9748.00	33.32	38.27	14.25	31.56	54.28	74.00	-19.72	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	29.53	31.85	8.66	32.12	37.92	54.00	-16.08	Vertical
7311.00	22.16	36.37	11.71	31.91	38.33	54.00	-15.67	Vertical
9748.00	22.67	38.27	14.25	31.56	43.63	54.00	-10.37	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	29.36	31.85	8.66	32.12	37.75	54.00	-16.25	Horizontal
7311.00	21.63	36.37	11.71	31.91	37.80	54.00	-16.20	Horizontal
9748.00	23.04	38.27	14.25	31.56	44.00	54.00	-10.00	Horizontal
12185.00	*					54.00		Horizontal
14622.00	*					54.00		Horizontal
17059.00	*					54.00		Horizontal

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.

Test mode:	802.11n(HT20)		Test channel:	Highest		
------------	---------------	--	---------------	---------	--	--

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	43.62	31.90	8.70	32.15	52.07	74.00	-21.93	4924.00
7386.00	34.17	36.49	11.76	31.83	50.59	74.00	-23.41	7386.00
9848.00	36.46	38.62	14.31	31.77	57.62	74.00	-16.38	9848.00
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	43.12	31.90	8.70	32.15	51.57	74.00	-22.43	Horizontal
7386.00	33.17	36.49	11.76	31.83	49.59	74.00	-24.41	Horizontal
9848.00	32.67	38.62	14.31	31.77	53.83	74.00	-20.17	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	34.64	31.90	8.70	32.15	43.09	54.00	-10.91	Vertical
7386.00	24.11	36.49	11.76	31.83	40.53	54.00	-13.47	Vertical
9848.00	24.99	38.62	14.31	31.77	46.15	54.00	-7.85	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	33.55	31.90	8.70	32.15	42.00	54.00	-12.00	Horizontal
7386.00	22.58	36.49	11.76	31.83	39.00	54.00	-15.00	Horizontal
9848.00	21.95	38.62	14.31	31.77	43.11	54.00	-10.89	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

**Remark:**

- 1 Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2 “\*”, means this data is the too weak instrument of signal is unable to test.

Test mode:	802.11n(HT40)		Test channel:	Lowest		
------------	---------------	--	---------------	--------	--	--

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4844.00	39.68	31.81	8.63	32.11	48.01	74.00	-25.99	Vertical
7266.00	33.83	36.28	11.69	31.94	49.86	74.00	-24.14	Vertical
9688.00	32.44	38.13	14.21	31.52	53.26	74.00	-20.74	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4844.00	38.44	31.81	8.63	32.11	46.77	74.00	-27.23	Horizontal
7266.00	33.63	36.28	11.69	31.94	49.66	74.00	-24.34	Horizontal
9688.00	32.03	38.13	14.21	31.52	52.85	74.00	-21.15	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4844.00	28.81	31.81	8.63	32.11	37.14	54.00	-16.86	Vertical
7266.00	22.71	36.28	11.69	31.94	38.74	54.00	-15.26	Vertical
9688.00	22.79	38.13	14.21	31.52	43.61	54.00	-10.39	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4844.00	28.01	31.81	8.63	32.11	36.34	54.00	-17.66	Horizontal
7266.00	22.22	36.28	11.69	31.94	38.25	54.00	-15.75	Horizontal
9688.00	21.79	38.13	14.21	31.52	42.61	54.00	-11.39	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.

Test mode:	802.11n(HT40)		Test channel:	Middle		
------------	---------------	--	---------------	--------	--	--

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	38.84	31.85	8.66	32.12	47.23	74.00	-26.77	Vertical
7311.00	33.97	36.37	11.71	31.91	50.14	74.00	-23.86	Vertical
9748.00	33.50	38.27	14.25	31.56	54.46	74.00	-19.54	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	39.40	31.85	8.66	32.12	47.79	74.00	-26.21	Horizontal
7311.00	32.65	36.37	11.71	31.91	48.82	74.00	-25.18	Horizontal
9748.00	33.41	38.27	14.25	31.56	54.37	74.00	-19.63	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	29.73	31.85	8.66	32.12	38.12	54.00	-15.88	Vertical
7311.00	22.29	36.37	11.71	31.91	38.46	54.00	-15.54	Vertical
9748.00	22.76	38.27	14.25	31.56	43.72	54.00	-10.28	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	29.54	31.85	8.66	32.12	37.93	54.00	-16.07	Horizontal
7311.00	21.74	36.37	11.71	31.91	37.91	54.00	-16.09	Horizontal
9748.00	23.13	38.27	14.25	31.56	44.09	54.00	-9.91	Horizontal
12185.00	*					54.00		Horizontal
14622.00	*					54.00		Horizontal
17059.00	*					54.00		Horizontal

**Remark:**

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*\*”, means this data is the too weak instrument of signal is unable to test.

Test mode:	802.11n(HT40)		Test channel:	Highest		
------------	---------------	--	---------------	---------	--	--

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904.00	44.00	31.88	8.68	32.13	52.43	74.00	-21.57	Vertical
7356.00	34.41	36.45	11.75	31.86	50.75	74.00	-23.25	Vertical
9808.00	36.63	38.43	14.29	31.68	57.67	74.00	-16.33	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4904.00	43.44	31.88	8.68	32.13	51.87	74.00	-22.13	Horizontal
7356.00	33.38	36.45	11.75	31.86	49.72	74.00	-24.28	Horizontal
9808.00	32.83	38.43	14.29	31.68	53.87	74.00	-20.13	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

**Average value:**



Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904.00	34.98	31.88	8.68	32.13	43.41	54.00	-10.59	Vertical
7356.00	24.34	36.45	11.75	31.86	40.68	54.00	-13.32	Vertical
9808.00	25.15	38.43	14.29	31.68	46.19	54.00	-7.81	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4904.00	33.85	31.88	8.68	32.13	42.28	54.00	-11.72	Horizontal
7356.00	22.78	36.45	11.75	31.86	39.12	54.00	-14.88	Horizontal
9808.00	22.10	38.43	14.29	31.68	43.14	54.00	-10.86	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

**Remark:**

- 1 Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2 “\*”, means this data is the too weak instrument of signal is unable to test.

## 8 Test Setup Photo

Radiated Emission

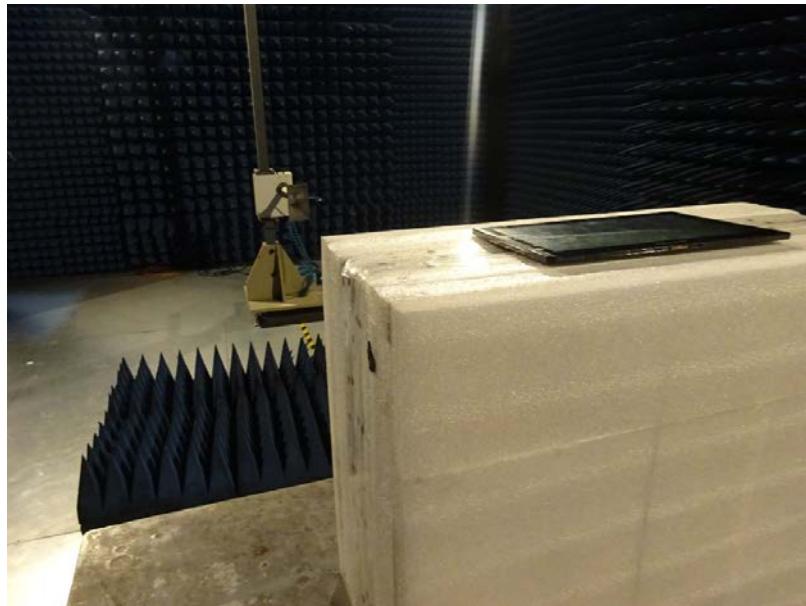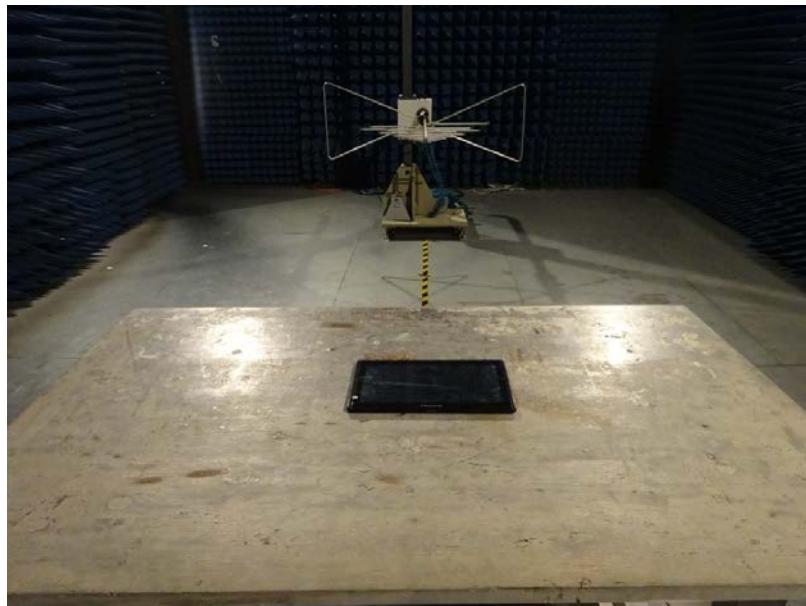

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotech.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotech.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

### Conducted Emission



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebtek.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebtek.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

## 9 EUT Constructional Details

Reference to the test report No. EBO1703003-E177.

-----End-----