



MPE Analysis:
REPORT #: MPE00007

FOR

Video King Gaming Systems, Inc.
100-1475 Chevrier Blvd.
Winnipeg, MB R3T 1Y7

Power Bingo King
RF REMOTE TRANSMITTER

FCC ID:
SKCTRANS-1

DATED:
FEBRUARY 7, 2006

IN ACCORDANCE WITH
CFR 47 PART 15.247(B)(5)
RF EXPOSURE COMPLIANCE

FCC ID: SKCTRANS-1	 ARRISTA <small>Technologies Inc.</small>
REPORT NO.: MPE000007	
FCC CFR 47 Part 15.247(b)(5)	

Test Lab Personnel:

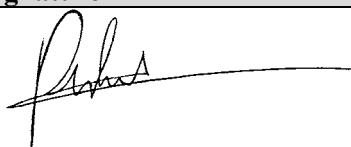
Test Performed by:	Date	Signature
Paul Eberling, CNA Electronic Technologist	February 7, 2006	

All information contained in and/or disclosed in this document is considered confidential information of Arrista Technologies. Reproduction and distribution of this document in whole or part is strictly prohibited without the written consent of Arrista Technologies.

Document Template Revision History:

Date	Name	Revision	Description
01/31/2002	Elwood Friesen	1.0	Initial Release
04/15/2002	Paul Eberling	1.2	Reviewed

Approvals:

Date	Name	Title	Signature
February 7, 2006	Roman Wroczyński	Director; Development & Test	

Company:	Video King Gaming Systems, Inc.	
Equipment:	Base RF Transmitter	Page 2

FCC ID: SKCTRANS-1	 ARRISTA <small>Technologies Inc.</small>
REPORT NO.: MPE000007	
FCC CFR 47 Part 15.247(b)(5)	

1.1. 15.247(b)(5) RF Exposure Compliance

Spread spectrum transmitters operating under Section 15.247 are categorically excluded from routine environmental evaluation for demonstrating RF exposure compliance with respect to MPE and/or SAR limits. These devices are not exempted from compliance. As indicated in Section 15.247(b)(5), these transmitters are required to operate in a manner that ensures that exposure to the public (users and nearby persons) does not exceed the Commission's RF exposure guidelines (see Sections 1.1307, 2.1091 and 2.1093).

Table 1 (b) as per OET Bulletin 65 is shown below and depicts the LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE) for both controlled and uncontrolled exposure.

Article 01-Table 1(b): MPE Limits

(A) Limits for Occupational/Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H)(A/m)	Power Density (S) (mW/cm ²)	Averaging Time S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	(900/f ²)*	6
30-300	61.4	0.163	1.0	6
300-1500	-	-	F/300	6
1500-100,000	-	-	5	6

(B) Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H)(A/m)	Power Density (S) (mW/cm ²)	Averaging Time S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	1842/f	4.89/f	(180/f ²)*	30
30-300	61.4	0.163	0.2	30
300-1500	-	-	f/1500	30
1500-100,000	-	-	1.0	30

- f = frequency in MHz

* Plane-wave equivalent power density

NOTE 1: *Occupational/controlled* limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2: *General population/uncontrolled* exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

Company:	Video King Gaming Systems, Inc.	
Equipment:	Base RF Transmitter	Page 3

FCC ID: SKCTRANS-1	 ARRISTA <small>Technologies Inc.</small>
REPORT NO.: MPE000007	
FCC CFR 47 Part 15.247(b)(5)	

Article 02-Table: MPE Calculations

Output Power of the transmitter: (at the RF test port)	0.0077 W maximum	
Antenna Gain: Maximum antenna gain allowed as described in user/install manual.	2.7dBi max	
Operational Frequency:	902-928MHz	
Minimum distance (Controlled): For personnel aware of radiofrequency equipment and who are able to limit their exposure time. (Installation Technicians)	20cm	
Minimum distance (Uncontrolled): For personnel unaware of radiofrequency equipment and who are not able to limit their exposure time. (General Public)	20cm	
Maximum Permissible Exposure (MPE): (Using f = 902MHz in calculation)	Controlled 6 min avg 3.007 mW/cm ²	Uncontrolled 30 min avg 0.6013 mW/cm ²
Calculated Power Density	0.0029 mW/cm ²	0.0029 mW/cm ²
Complies with MPE Limits	Yes	Yes

1.1.1. Calculations

The power density calculations follow the formula below. It is noted that the antenna used incorporates a forward gain of 2.7dBi expressed as a numerical gain of 1.86. This is shown as a corrected power output value.

$$S = P_T G / 4\pi R^2 \quad (1)$$

where:

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW)

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

(A) Controlled Exposure Calculation

$$S = 7.74 * 1.86 / (4\pi * 20^2)$$

$$S = 14.3964 / 5026.55$$

$$S = 0.0029 \text{ mW/cm}^2$$

(B) Uncontrolled Exposure Calculation

$$S = 7.74 * 1.86 / (4\pi * 20^2)$$

$$S = 14.3964 / 5026.55$$

$$S = 0.0029 \text{ mW/cm}^2$$

Company:	Video King Gaming Systems, Inc.	
Equipment:	Base RF Transmitter	Page 4