

FCC PART 15C TEST REPORT FOR CERTIFICATION
On Behalf of

Intrasonic Technology, Inc.
9525 Forest View Street Dallas, Texas 75243, USA

I600 Stereo Music System with Bluetooth

Model Number: I600

FCC ID: SLV-I600

Prepared for : Intrasonic Technology, Inc.
9525 Forest View Street Dallas, Texas 75243, USA.

Prepared By : EST Technology Co., Ltd.
Santun(guantai Road), Houjie Town, DongGuan City,
GuangDong, China.

Tel: 86-769-83081888-808

Report Number: ESTE-R1305002
Date of Test : Mar 14, 2013 ~ Apr 1, 2013
Date of Report : Apr 2, 2013

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT).....	5
2. SUMMARY OF TEST	6
2.1. Summary of test result.....	6
2.2. Test Facilities	7
2.3. Assistant equipment used for test.....	8
2.4. Block Diagram	8
2.5. Test mode	8
2.6. Test Equipment.....	9
3. MAXIMUM PEAK OUTPUT POWER	10
3.1. Limit	10
3.2. Test Procedure	10
3.3. Test Result.....	10
3.4. Test Data	11
4. 20 DB BANDWIDTH.....	15
4.1. Limit	15
4.2. Test Procedure	15
4.3. Test Result.....	15
4.4. Test Data	16
5. CARRIER FREQUENCY SEPARATION	20
5.1. Limit	20
5.2. Test Procedure	20
5.3. Test Result.....	20
5.4. Test Data	21
6. NUMBER OF HOPPING CHANNEL	25
6.1. Limit	25
6.2. Test Procedure	25
6.3. Test Result.....	25
6.4. Test Data	26
7. DWELL TIME.....	28
7.1. Limit	28
7.2. Test Result.....	28
7.3. Test Data	29
8. RADIATED EMISSIONS.....	35
8.1. Limit	35
8.2. Block Diagram of Test setup.....	36
8.3. Test Procedure	36
8.4. Test Result.....	36
8.5. Test Data	37
9. BAND EDGE COMPLIANCE	73

9.1. Limit 73

9.2. Block Diagram of Test setup 73

9.3. Test Procedure 73

9.4. Test Result 73

9.5. Test Data 74

10. ANTENNA REQUIREMENTS 82

10.1. Limit 85

10.2. Result 85

11. TEST SETUP PHOTO 86

12. PHOTOS OF EUT 89

Test Report Verification

Applicant:	Intrasonic Technology, Inc.		
Address:	9525 Forest View Street Dallas, Texas 75243, USA		
Manufacturer	Seveco Global Limited		
Address:	1 Jianxiang Street, Hanxishui, Charshan town, Dongguan City, China.		
E.U.T:	I600 Stereo Music System with Bluetooth		
Model Number:	I600		
Power Supply:	AC 100-240V~50/60Hz		
Test Voltage:	AC 120V/60Hz		
Trade Name:	IST	Serial No.:	-----
Date of Receipt:	Mar 14,2013	Date of Test:	Mar 16 ~ Mar 31,2013
Test Specification:	FCC Rules and Regulations Part 15 Subpart C:2012 ANSI C63.4:2003		
Test Result:	The device described above is tested by EST Technology Co., Ltd.. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the ETSI EN FCC Rules and Regulations Part 15 Subpart C requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd. Date: Apr 1,2013		
Prepared by:	Tested by:	Approved by:	
			
Ada / Assistant	Tony.Tang/ Engineer	IcemanHu / Manager	
Other Aspects:	None.		
<i>Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested</i>			
<i>This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.</i>			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product Name	: I600 Stereo Music System with Bluetooth
Model Number	: I600
FCC ID	: SLV-I600
Operation frequency	: 2402MHz~2480MHz
Number of channel	: 79
Antenna	: Internal antenna, 4.1 dBi gain
Modulation	: FHSS (GFSK, $\pi/4$ -DQPSK, 8-DPSK)
Power Supply	: AC 120V/60Hz
Sample Type	: Prototype production

2. SUMMARY OF TEST

2.1. Summary of test result


Description of Test Item	Standard	Results
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) DA 00-705	PASS
20dB Bandwidth	FCC Part 15: 15.215 DA 00-705	PASS
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) DA 00-705	PASS
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) DA 00-705	PASS
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) DA 00-705	PASS
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.4: 2003 DA 00-705	PASS
Band Edge Compliance	FCC Part 15: 15.247(d) DA 00-705	PASS
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.4: 2003 DA 00-705	PASS
Antenna requirement	FCC Part 15: 15.203	PASS

2.2. Test Facilities

EMC Lab	:	Certificated by CNAL, CHINA Registration No.: L5288 Date of registration: October 28, 2011 Certificated by FCC, USA Registration No.: 989591 Date of registration: December 07, 2010 Certificated by Industry Canada Registration No.: 46405-9405 Date of registration: December 16, 2010 Certificated by VCCI, Japan Registration No.: R-3663 & C-4103 Date of registration: July 25, 2011 Certificated by TUV Rheinland, Germany Registration No.: UA 50195514 0001 Date of registration: January 07, 2011 Certificated by TUV/PS, Shenzhen Registration No.: SCN1017 Date of registration: January 27, 2011 Certificated by Intertek ETL SEMKO Registration No.: 2011-RTL-L1-18 Date of registration: April 28, 2011 Certificated by Siemic, Inc. Registration No.: SLCN021 Date of registration: November 8, 2011 Certificated by Nemko, Hong Kong Registration No.: 175193 Date of registration: May 4, 2011
Name of Firm	:	EST Technology Co., Ltd.
Site Location	:	San Tun Management Zone, Houjie Town, Dongguan, Guangdong, China

2.3. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 meter high above ground.EUT was be set into BT test mode by software before test.



(EUT: I600 Stereo Music System with Bluetooth)

2.4. Test mode

The test software was used to control EUT work in Continuous TX mode, and select test channel, wireless mode

Mode	Channel	Frequency
GFSK	Low	2402MHz
	Middle	2441MHz
	High	2480MHz
8-DPSK	Low	2402MHz
	Middle	2441MHz
	High	2480MHz

2.5. Test Equipment

2.5.1. For conducted emission test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	832354	Mar,7,13	1 Year
Artificial Mains Networ	Rohde & Schwarz	ENV216	101260	Mar,7,13	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	101100	Aug.24,12	1 Year

2.5.2. For radiated emission test(30-1000MHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESVS10	100004	Mar,7,13	1 Year
Spectrum Analyzer	Agilent	E4411B	MY50140697	Mar,7,13	1 Year
Bilog Antenna	Teseq	CBL 6111D	25872	Mar,7,13	1 .5Year
Signal Amplifier	Agilent	310N	187037	Aug,24,12	1 Year

2.5.3. For radiated emission test(above 1GHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Temperature controller	Terchy	MHQ	120	May.08,12	1 Year
Spectrum Analyzer	Agilent	E4408B	MY44211139	May.08,12	1 Year
Vector Signal Generator	R&S	SMBV100A	1407.6004K02	May.08,12	1 Year
Double Ridged Horn Antenna	R&S	HF907	100276	Jan.16.13	2 Year
Double Ridged Horn Antenna	R&S	HF907	100268	Jan.16.13	2 Year
Log-periodic Dipole Antenna	R&S	HL223	100435	Jan.16.13	2 Year
Biconical Antenna	R&S	HK116	100431	Jan.16.13	2 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	9163-462	Jan.16.13	2 Year
Pre-amplifier	AH	PAM-0118	10008	May.08,12	1 Year
Pre-amplifier	R&S	SCU-01	10049	May.08,12	1 Year
High Pass filter	Micro	HPM50111	324455	May.08,12	1 Year
RF Cable	Hubersuhner	W10.02	534096	May.08,12	1 Year
RF Cable	Hubersuhner	W10.02	534123	May.08,12	1 Year
RF Cable	Hubersuhner	RG 214/U	513423	May.08,12	1 Year
RF Cable	Hubersuhner	RG 214/U	523455	May.08,12	1 Year

3. MAXIMUM PEAK OUTPUT POWER

3.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2. Test Procedure


The transmitter output (antenna port) was connected to the spectrum analyzer

3.3. Test Result


EUT: I600 Stereo Music System with Bluetooth			M/N:I600		
Test date: 2013-03-19		Test site: RF site		Tested by: Tony Tang	
Mode	Freq (MHz)	Result (dBm)	Limit		Margin (dB)
			dBm	W	
GFSK	2402	1.479	30.00	1	31.479
	2441	1.273	30.00	1	31.273
	2480	1.074	30.00	1	31.074
8-DPSK	2402	1.050	21.00	0.125	22.050
	2441	0.604	21.00	0.125	21.604
	2480	0.629	21.00	0.125	21.629
Conclusion: PASS					

3.4. Test Data


GFSK 2402 MHz

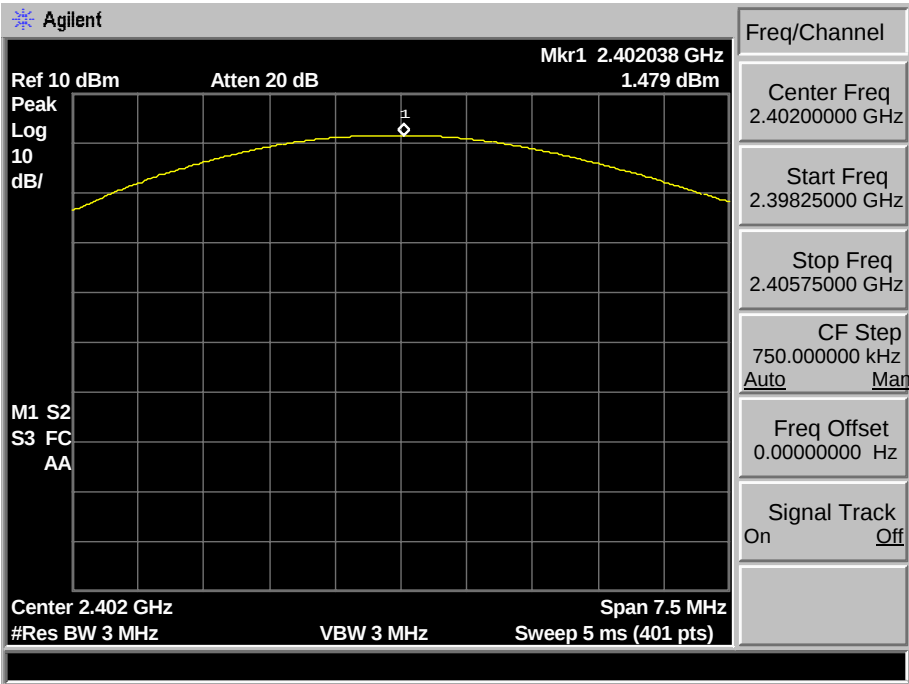


GFSK 2441 MHz

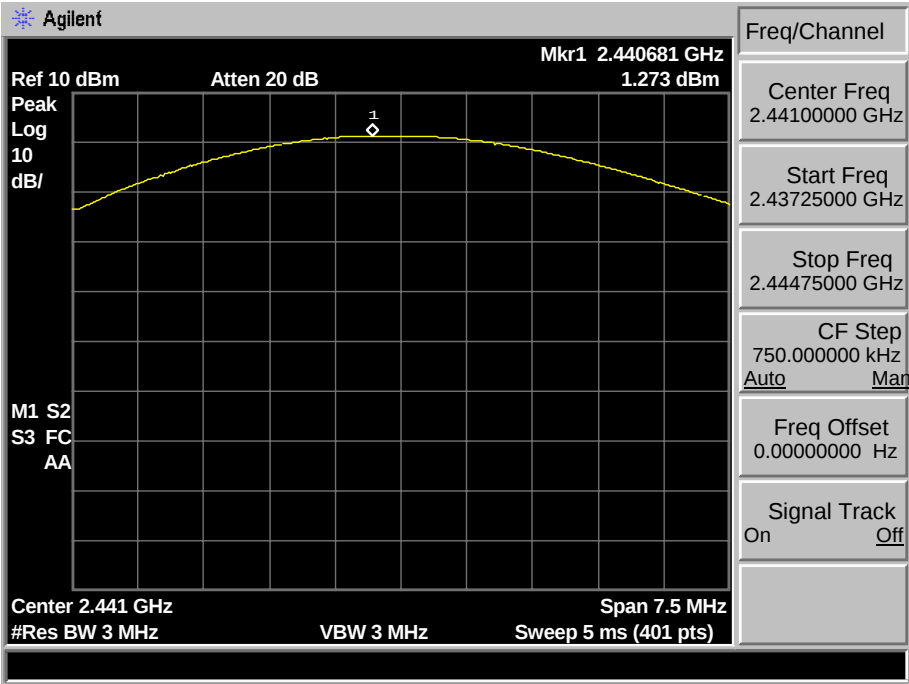


GFSK 2480 MHz

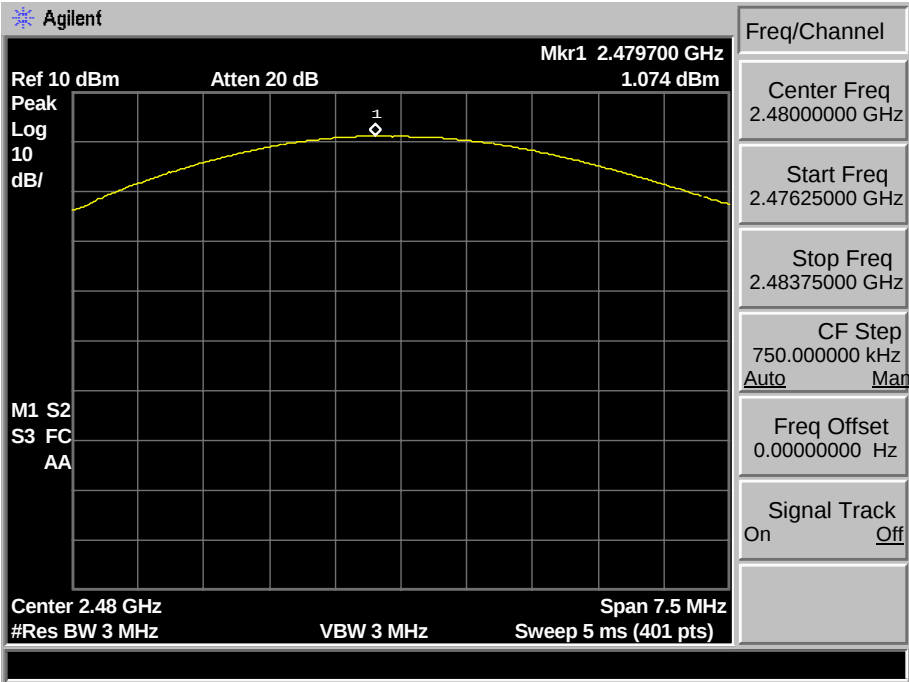


8-DPSK 2402MHz

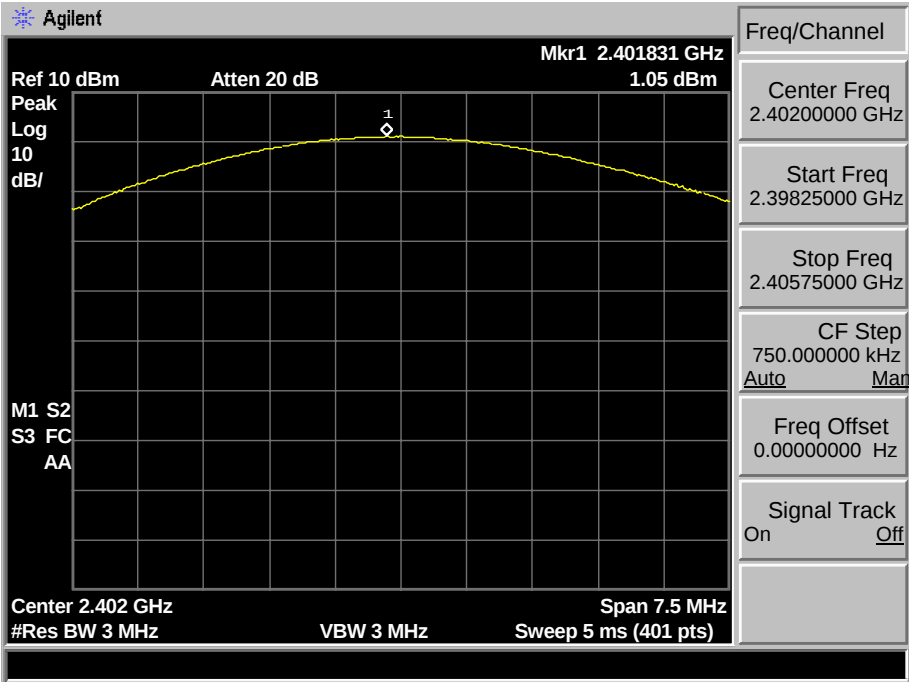

8-DPSK 2441MHz

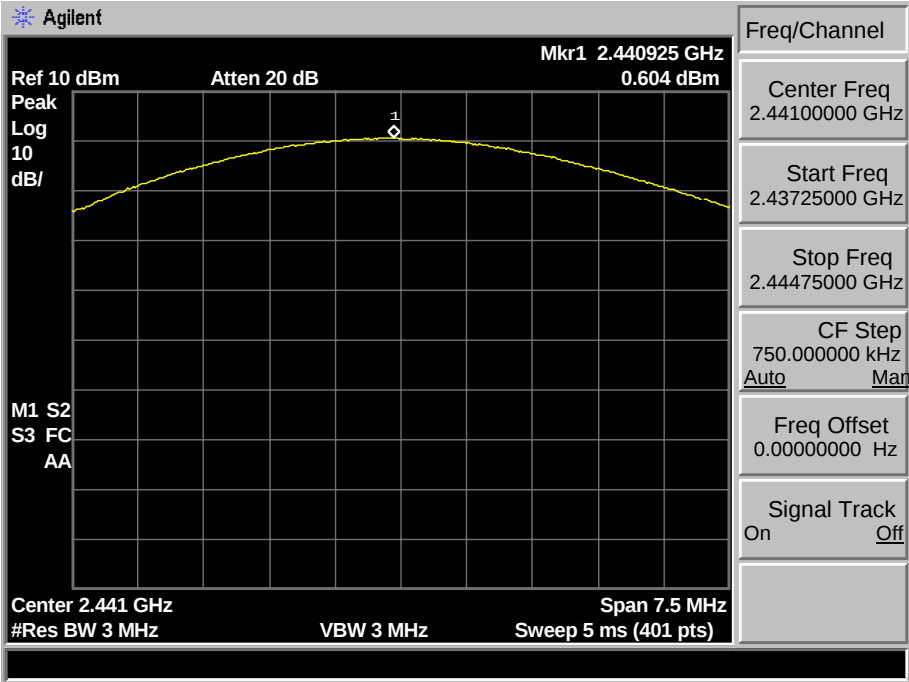

8-DPSK 2480MHz

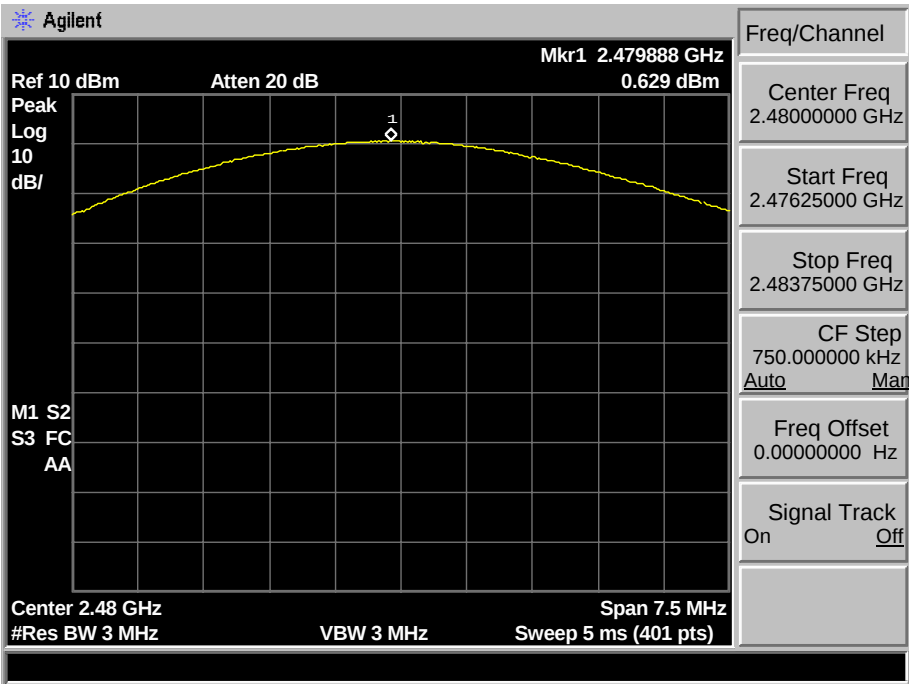

4. 20 DB BANDWIDTH

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.2. Test Procedure


The transmitter output was coupled to a spectrum analyzer via a antenna. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 300kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3. Test Result


EUT: I600 Stereo Music System with Bluetooth			M/N:I600	
Test date: 2013-03-19		Test site: RF site		Tested by: Tony Tang
Mode	Freq (MHz)	20dB Bandwidth (MHz)	Limit (kHz)	Conclusion
GFSK	2402	0.859	/	PASS
	2441	0.859	/	PASS
	2480	0.855	/	PASS
8-DPSK	2402	1.211	/	PASS
	2441	1.216	/	PASS
	2480	1.215	/	PASS

4.4. Test Data


GFSK 2402MHz

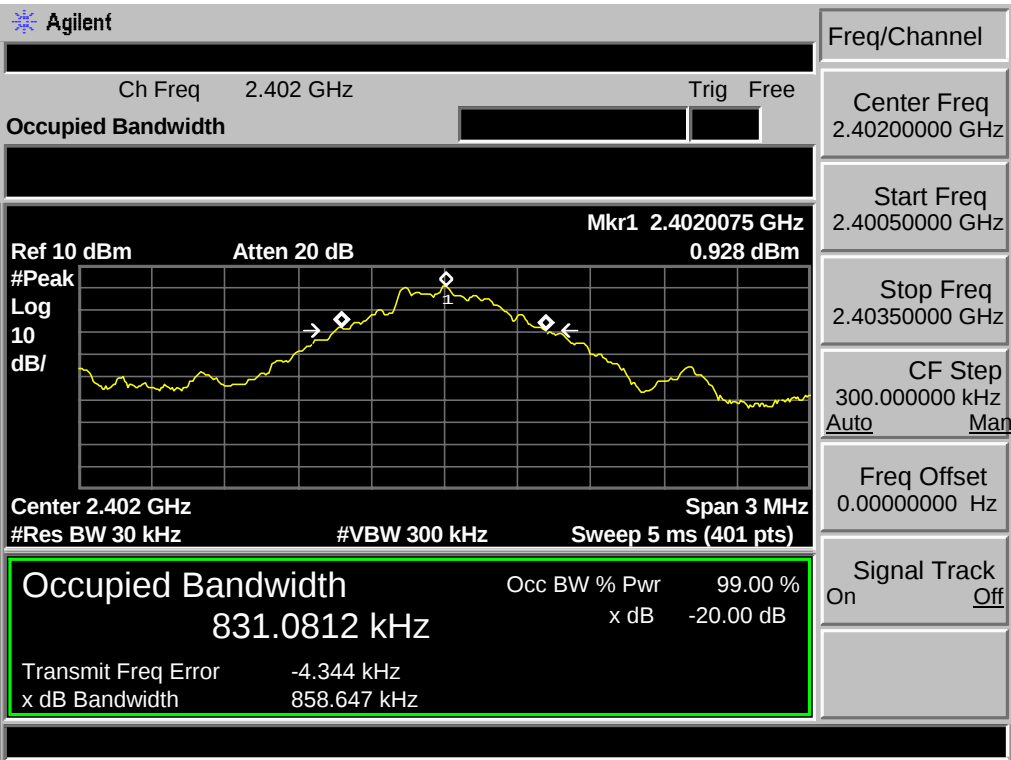


GFSK 2441MHz

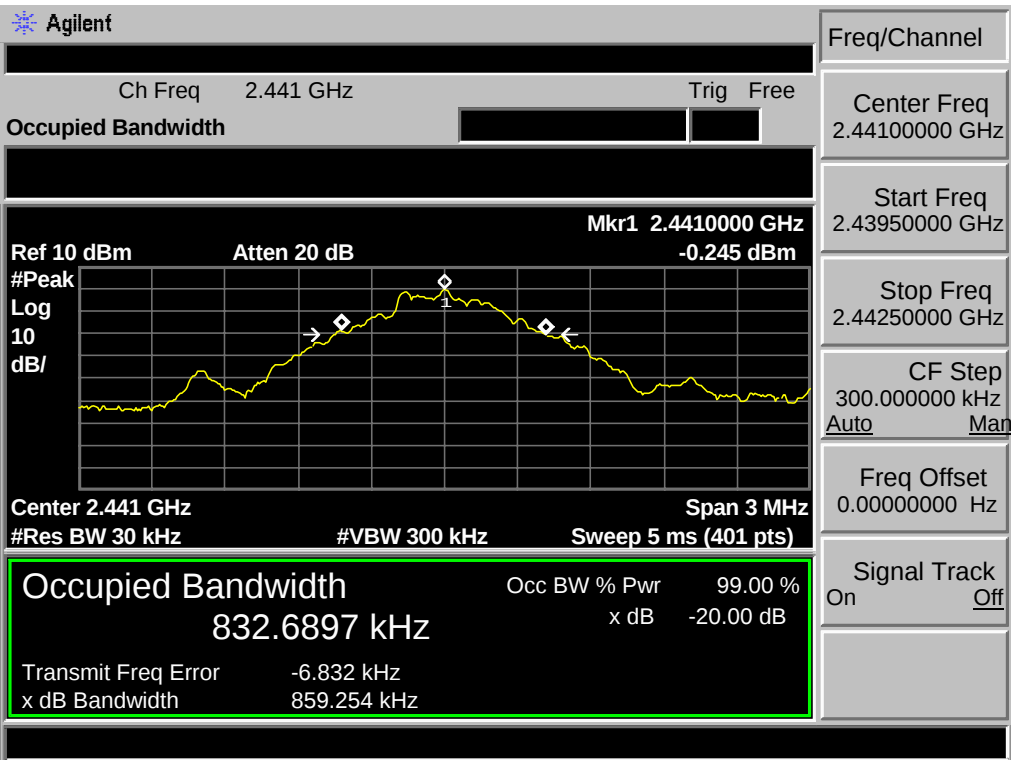


GFSK 2480MHz

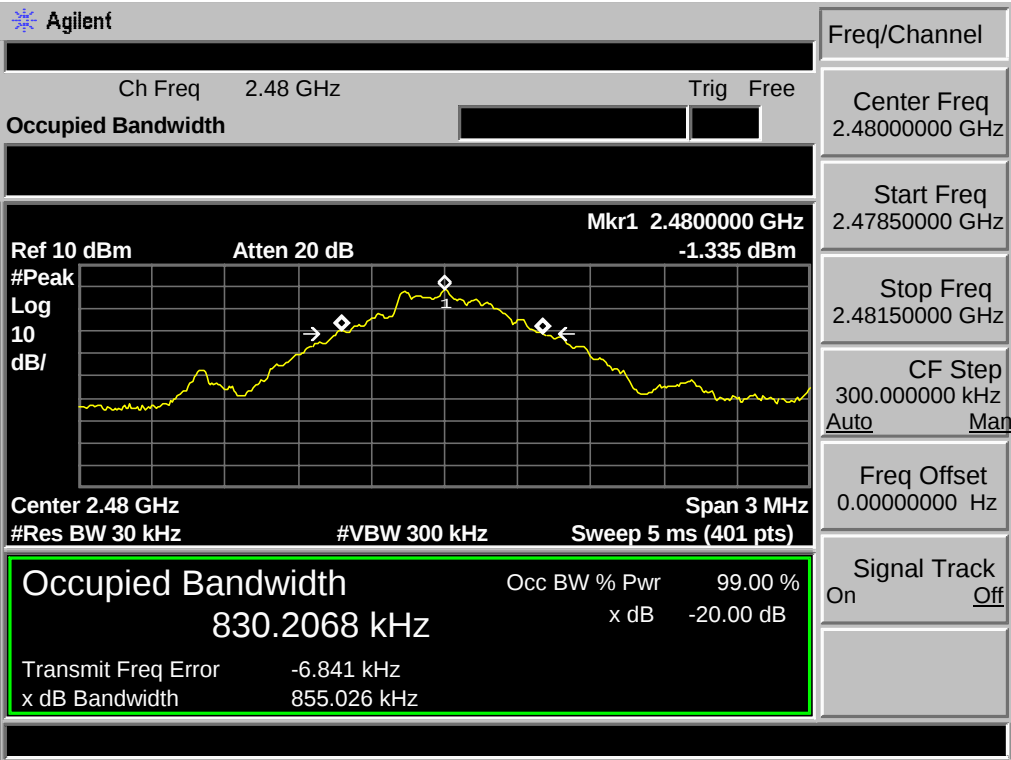


8-DPSK 2402MHz

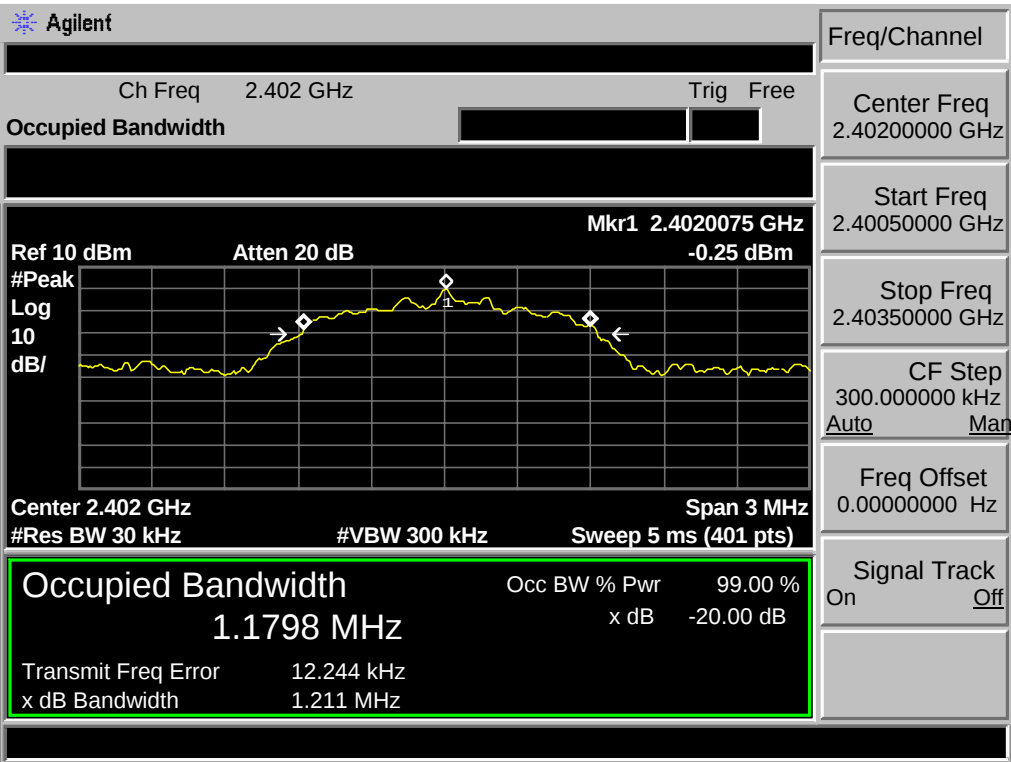

8-DPSK 2441MHz

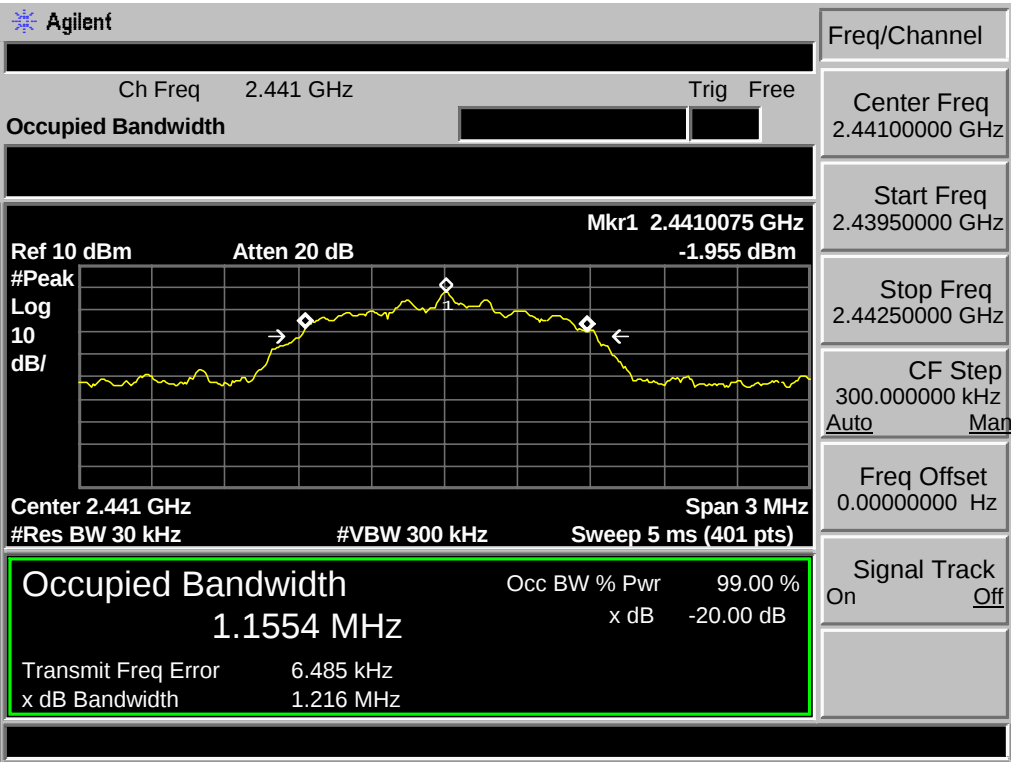

8-DPSK 2480MHz

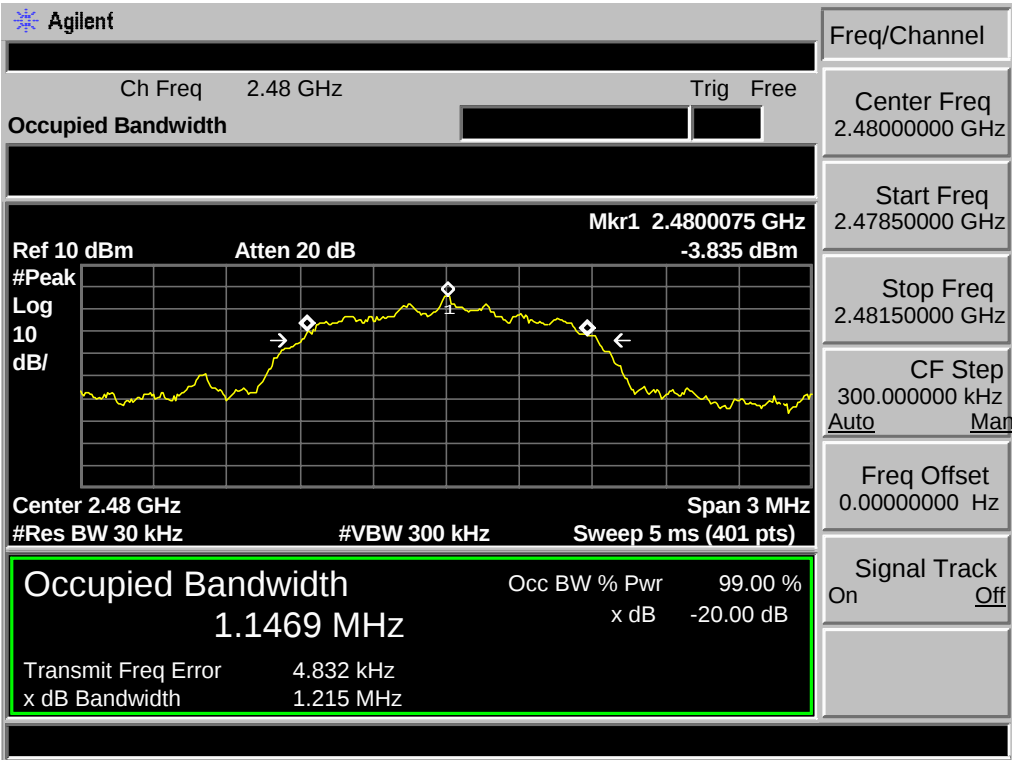

5. CARRIER FREQUENCY SEPARATION

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW

5.2. Test Procedure

The transmitter output was coupled to a spectrum analyzer via a antenna. The carrier frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW.


5.3. Test Result

EUT: I600 Stereo Music System with Bluetooth M/N:I600				
Test date: 2013-03-19			Test site: RF site	Tested by: Tony Tang
Mode	Channel	Channel separation (MHz)	Limit	Conclusion
GFSK	Low CH	1.006	0.859 MHz	PASS
	Mid CH	1.013	0.859 MHz	PASS
	High CH	1.000	0.855MHz	PASS
8-DPSK	Low CH	1.000	> 2/3 of the 20dB Bandwidth or 25[kHz](whichever is greater)	PASS
	Mid CH	1.000		PASS
	High CH	1.000		PASS


5.4. Test Data

GFSK


Low Channel

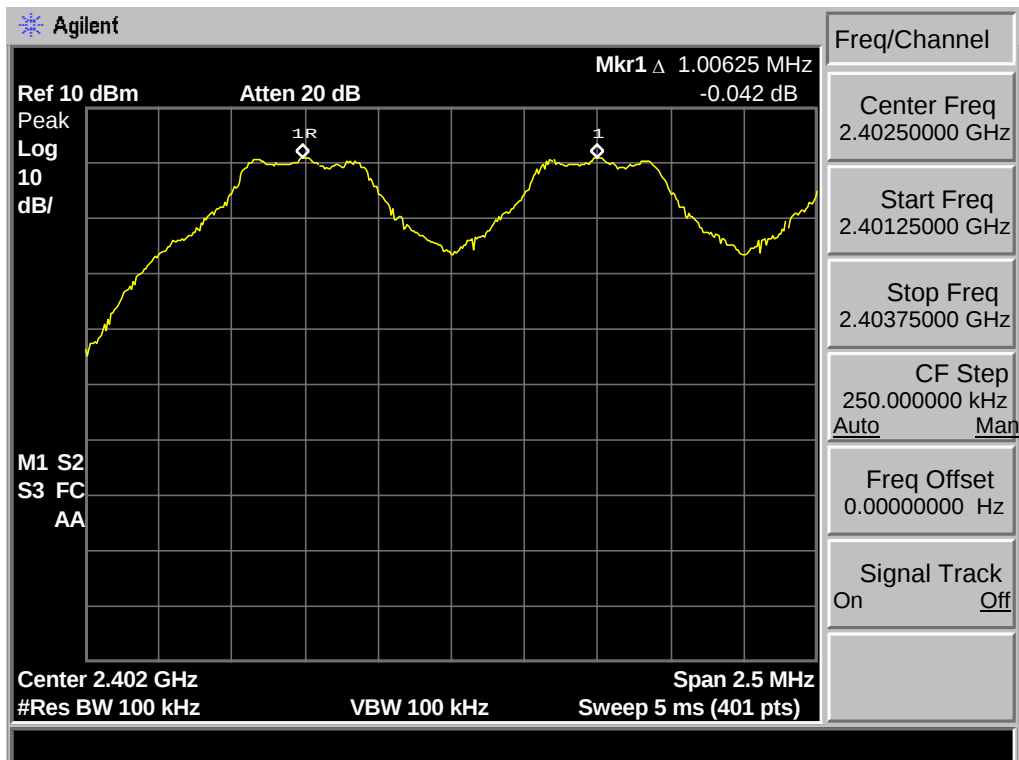

Mid Channel

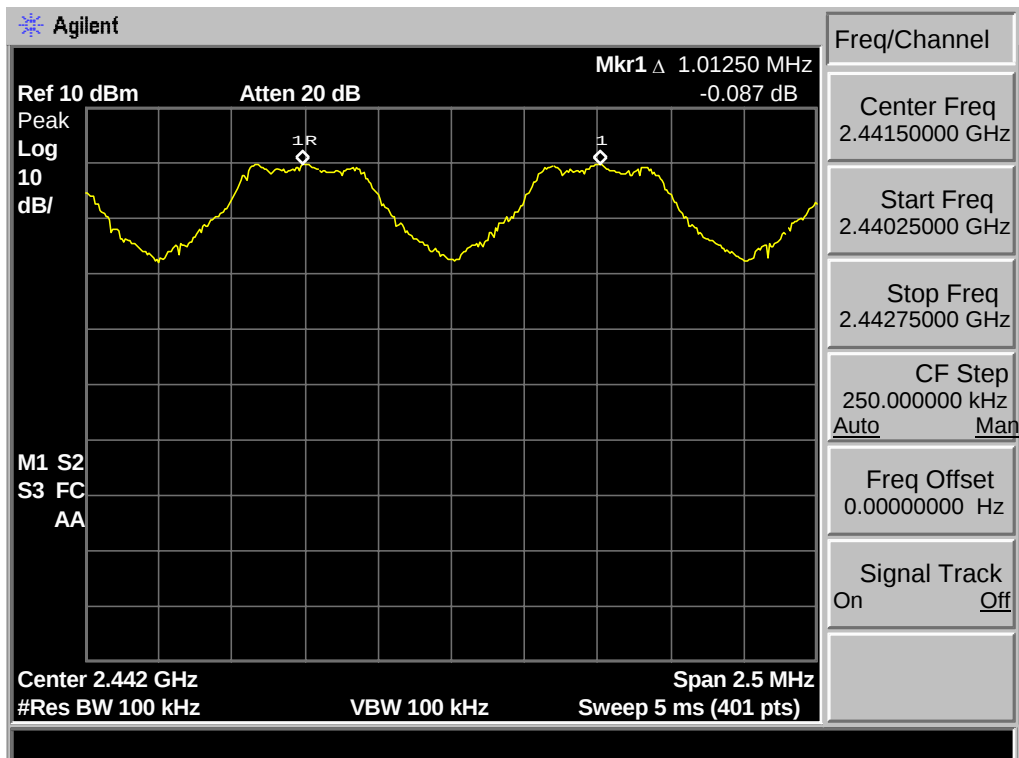


High Channel

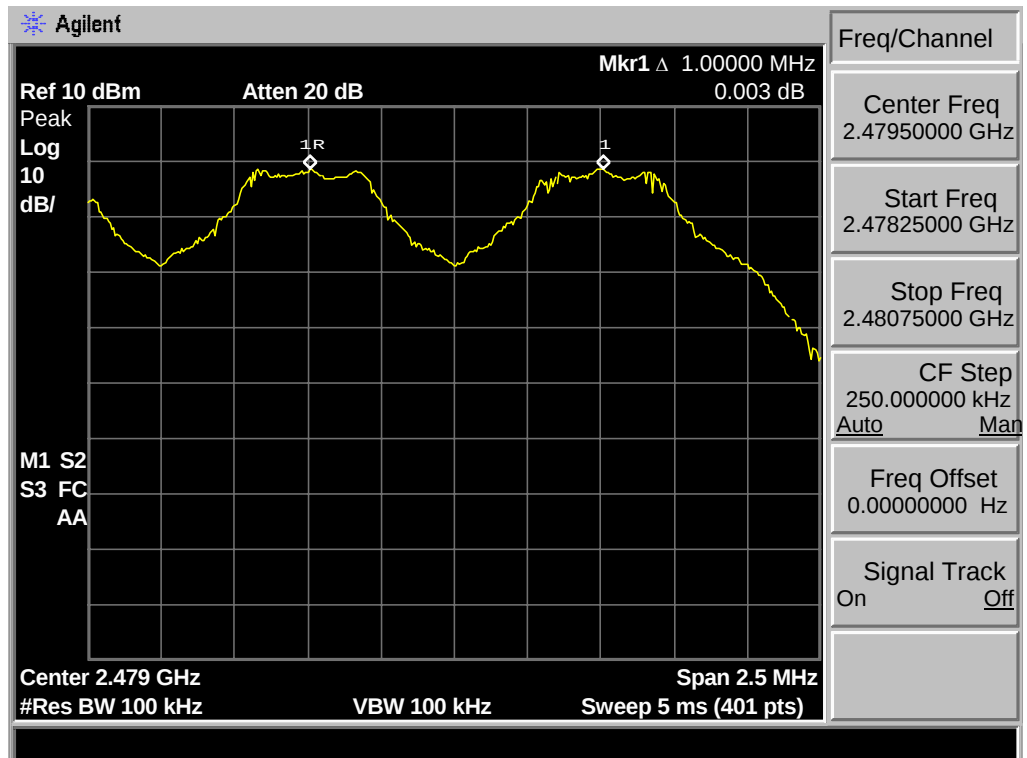


8-DPSK


Low Channel

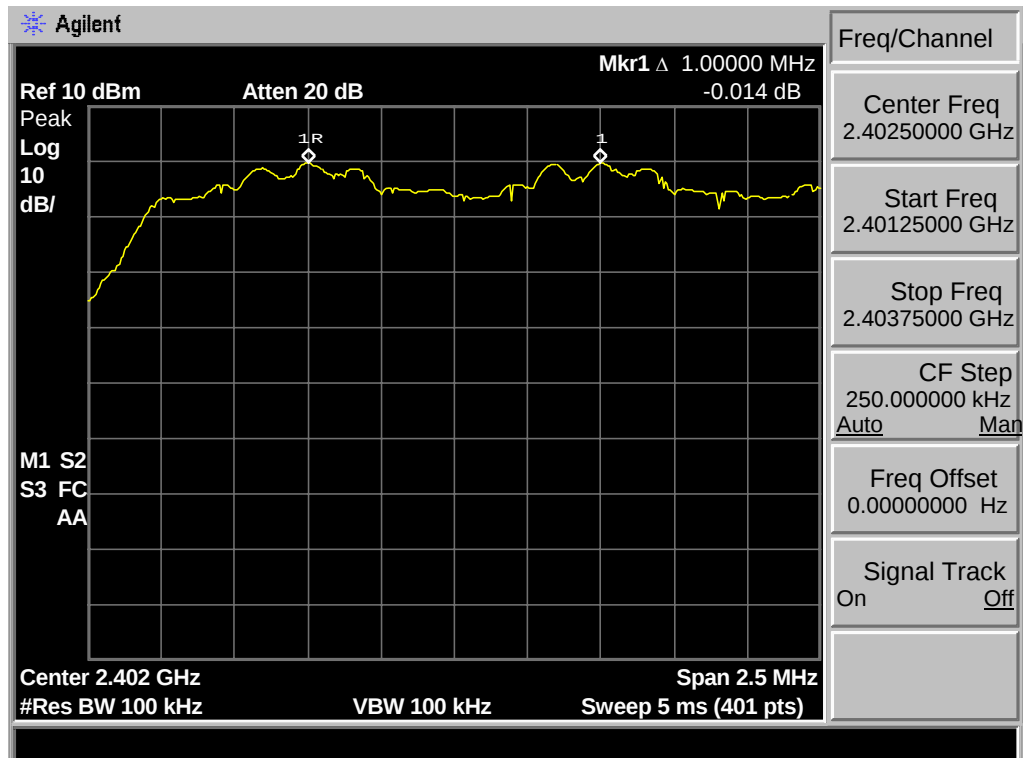

Mid Channel

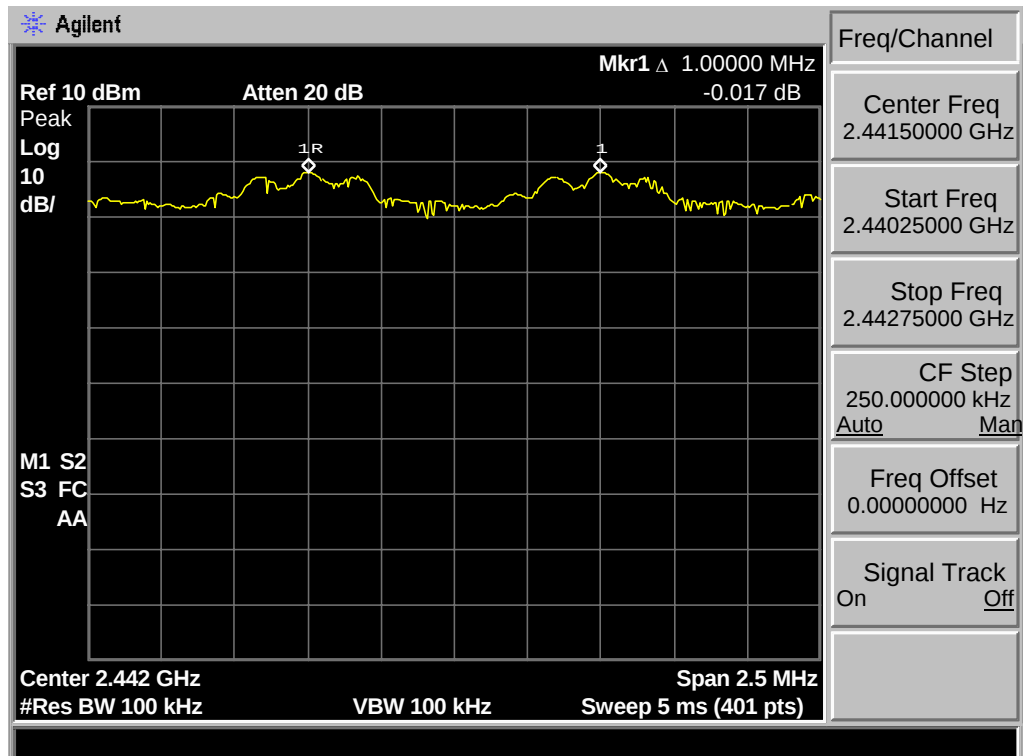

High Channel

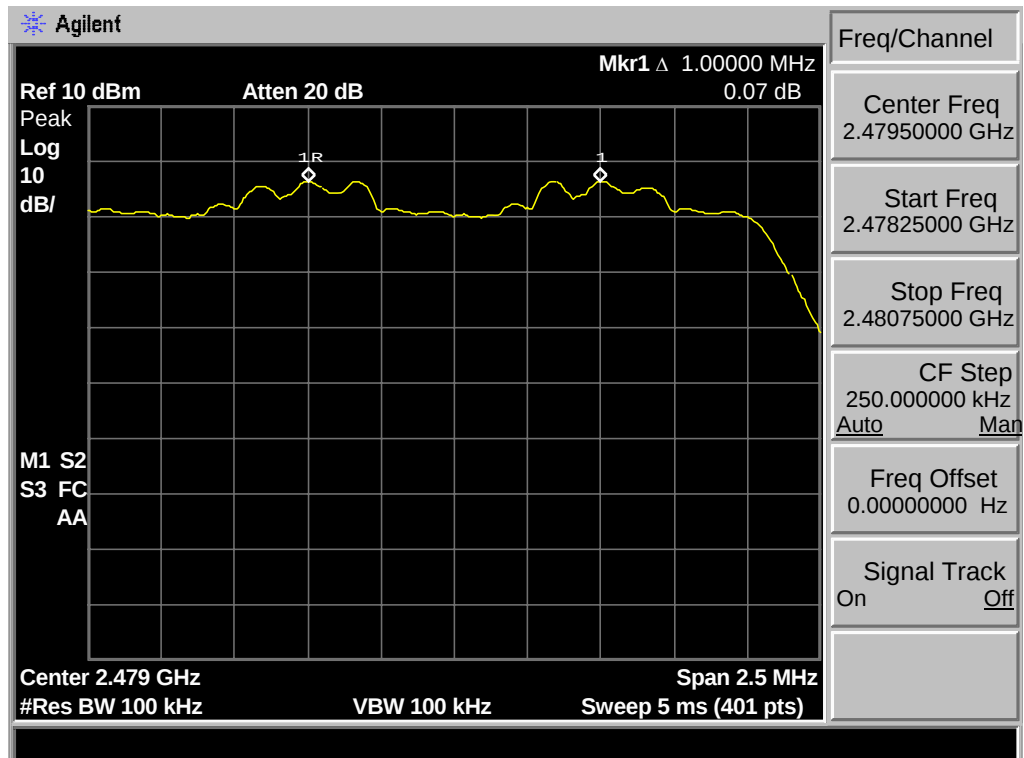

6. NUMBER OF HOPPING CHANNEL

6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

6.2. Test Procedure




The transmitter output was coupled to a spectrum analyzer via a antenna. The number of hopping channel was measured by spectrum analyzer with 300kHz RBW and 300kHz VBW.

6.3. Test Result




EUT: I600 Stereo Music System with Bluetooth		M/N:I600	
Test date: 2013-03-19		Test site: RF site	Tested by: Tony.Tang
Mode	Number of hopping channel		Conclusion
GFSK	79	>15	PASS
8-DPSK	79	>15	PASS

6.4. Test Data

GFSK

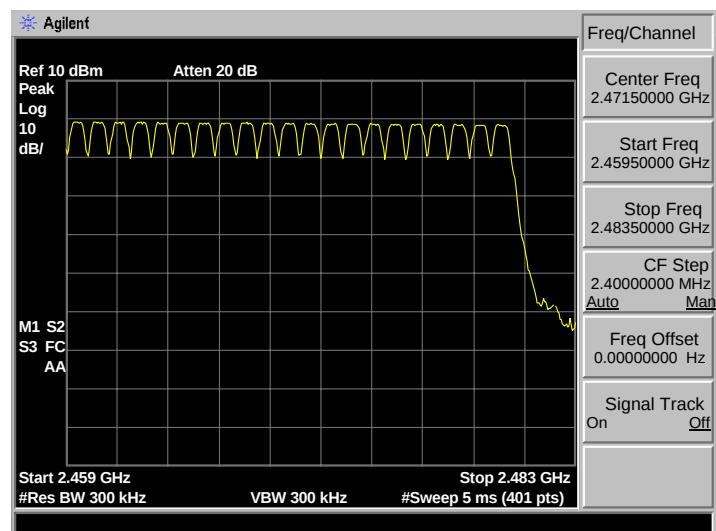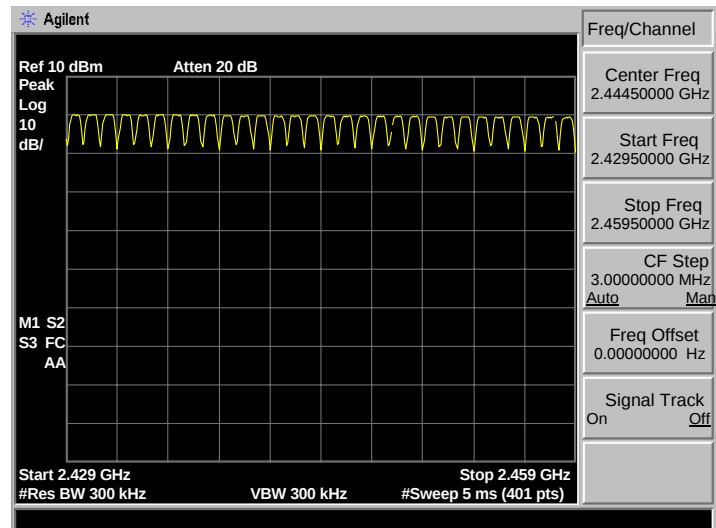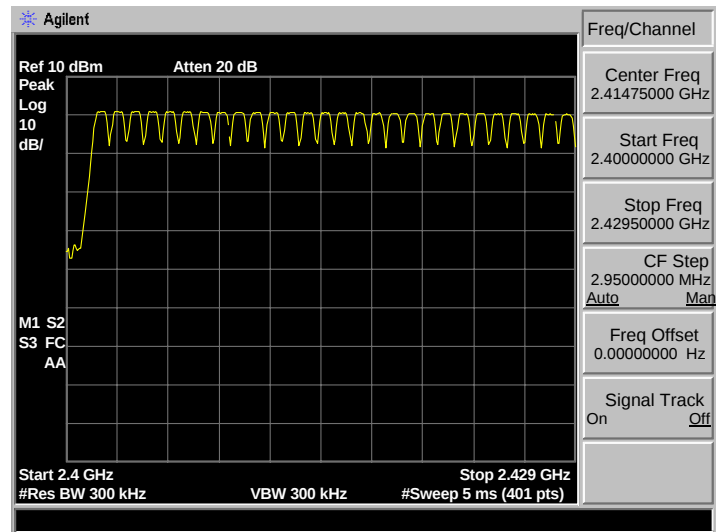

8-DPSK

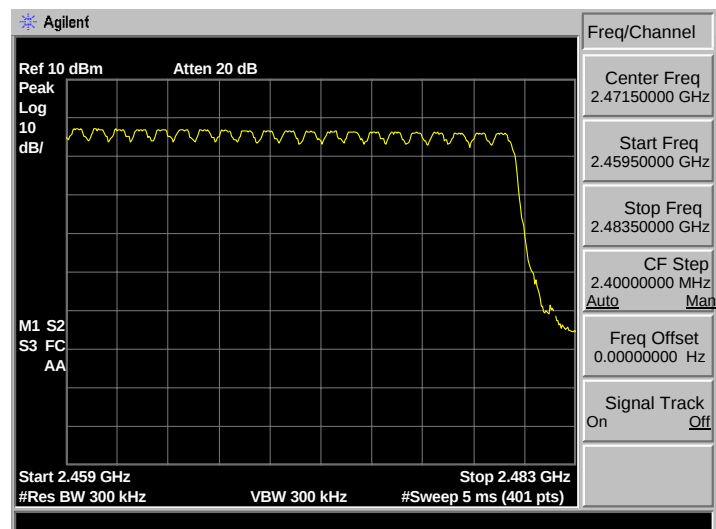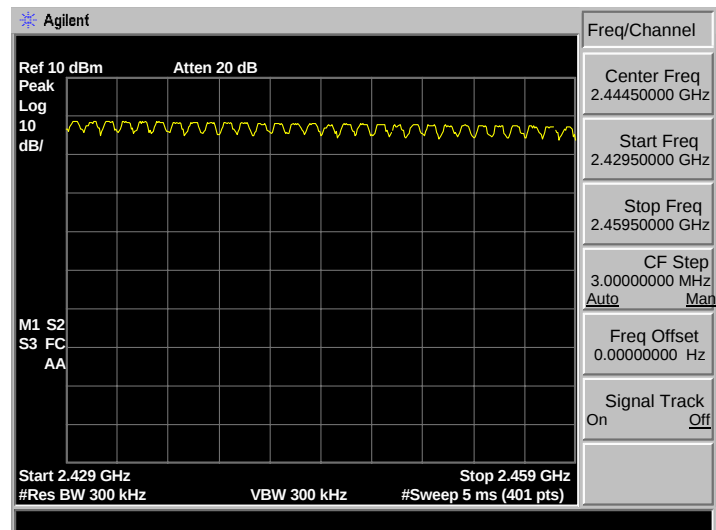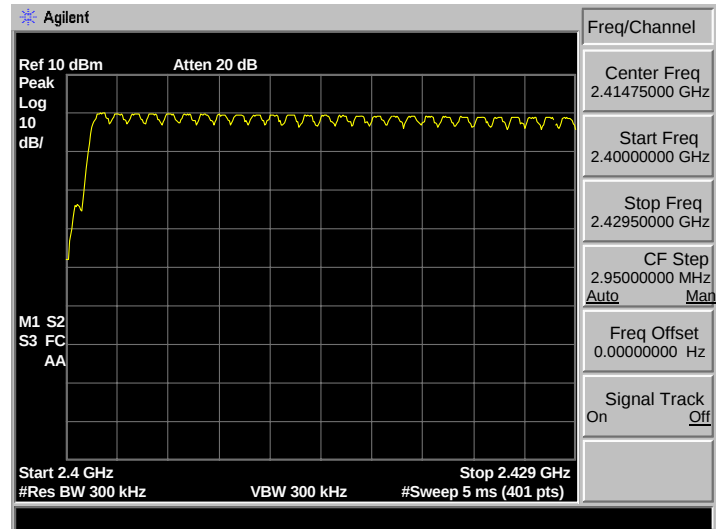

7. DWELL TIME

7.1. Limit



The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

7.2. Test Result



EUT: I600 Stereo Music System with Bluetooth M/N:I600			
Test date: 2013-03-19		Test site: RF site	Tested by: Tony Tang
Mode	Dwell time	Limit	Conclusion
GFSK DH1	180.12	<400ms	PASS
GFSK DH3	285.98	<400ms	PASS
GFSK DH5	337.36	<400ms	PASS
8-DPSK DH1	192.76	<400ms	PASS
8-DPSK DH3	295.46	<400ms	PASS
8-DPSK DH5	330.92	<400ms	PASS

7.3. Test Data



GFSK DH1 : $50\text{hop}/5\text{s} * 0.4 * 79 * 0.57\text{ms} = 180.12$

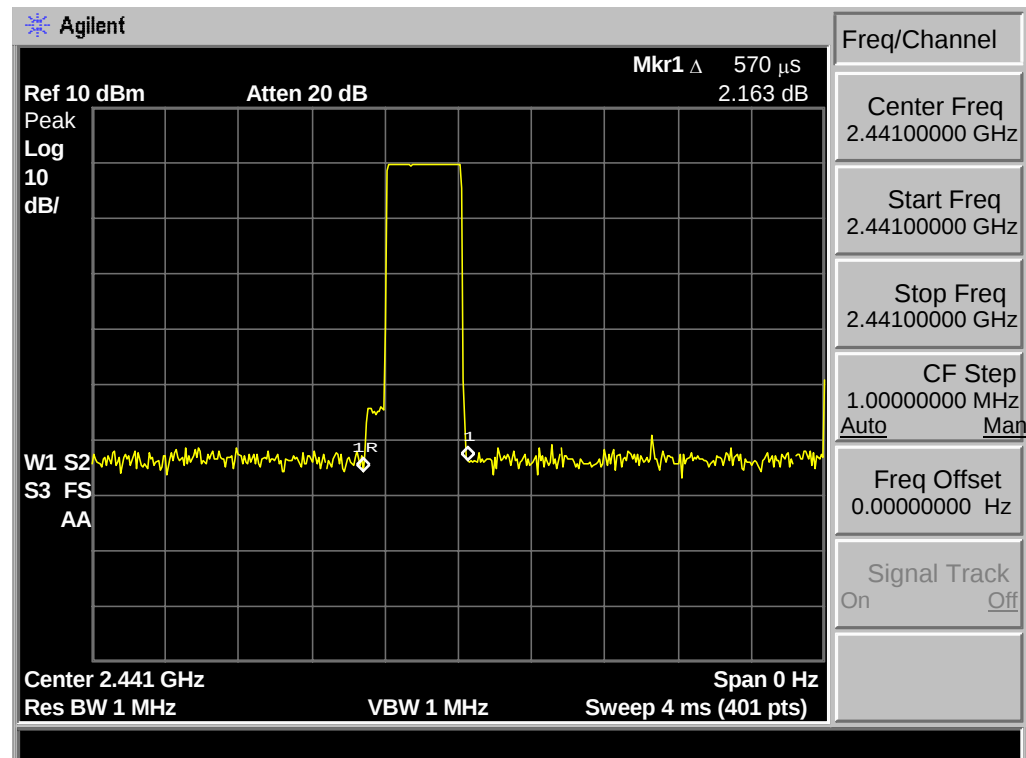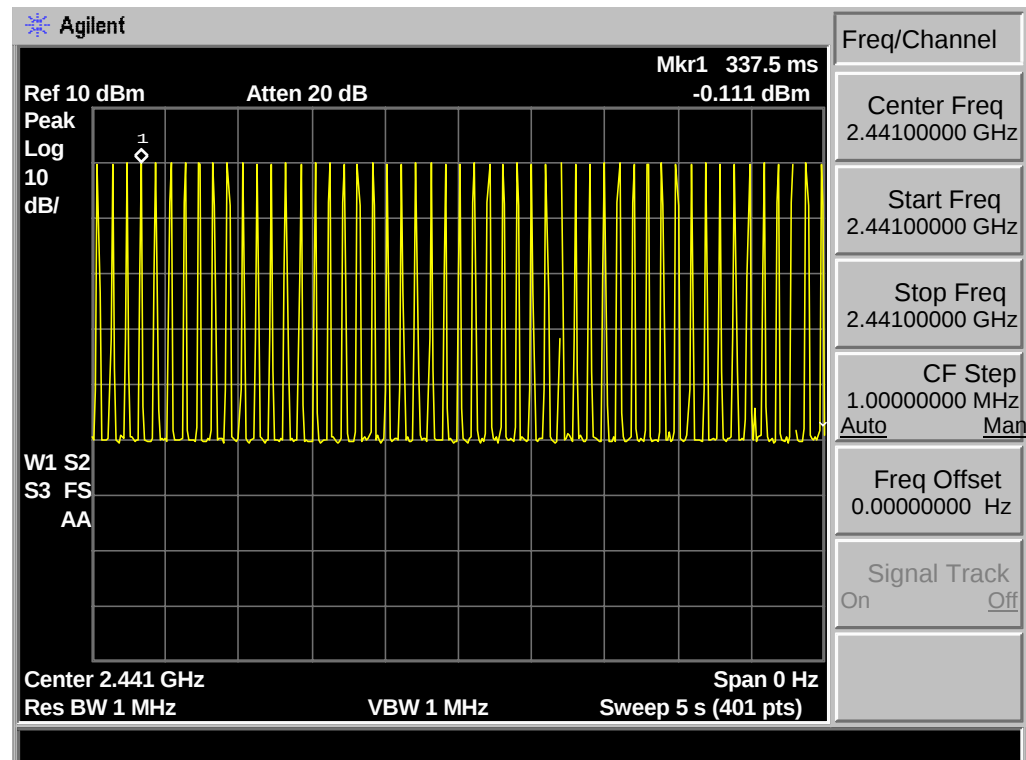



GFSK DH3 : $25\text{hop}/5\text{s} * 0.4 * 79 * 1.81\text{ms} = 285.98$

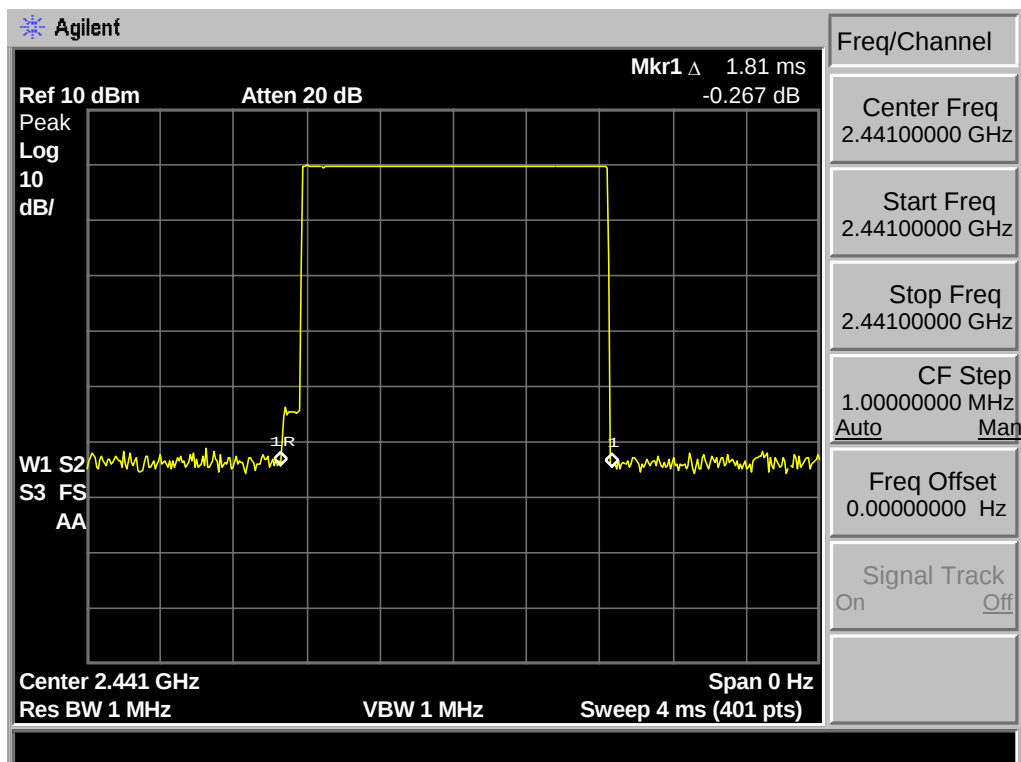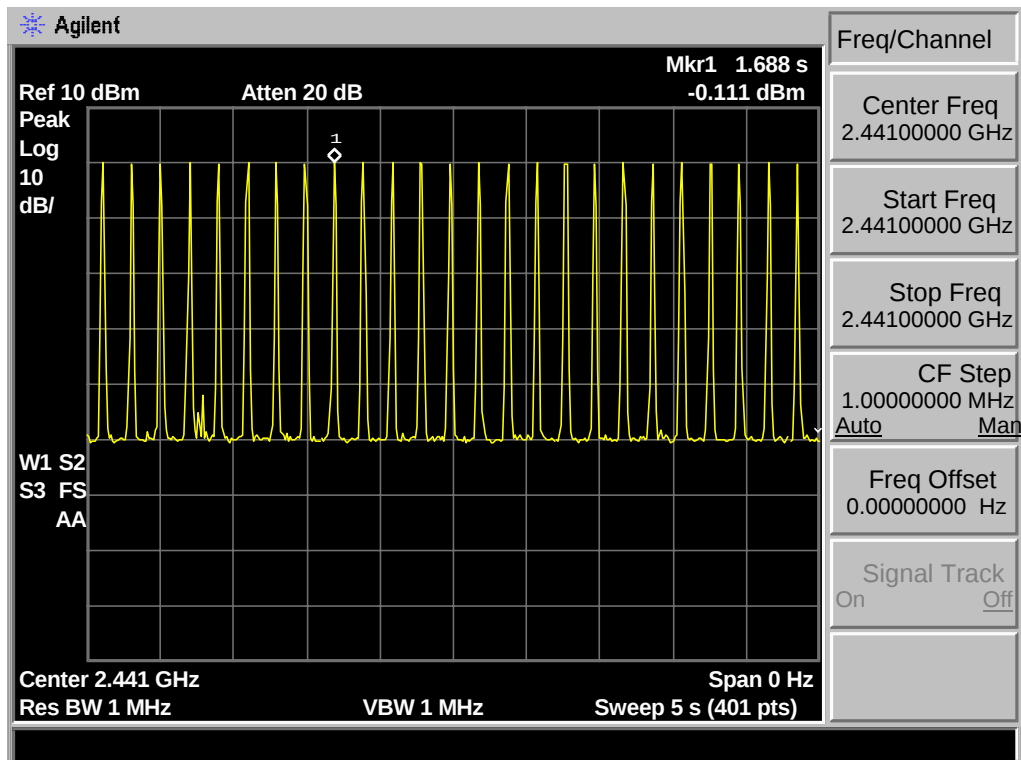



GSFK DH5 : $17\text{hop}/5\text{s} * 0.4 * 79 * 3.14\text{ms} = 337.36$

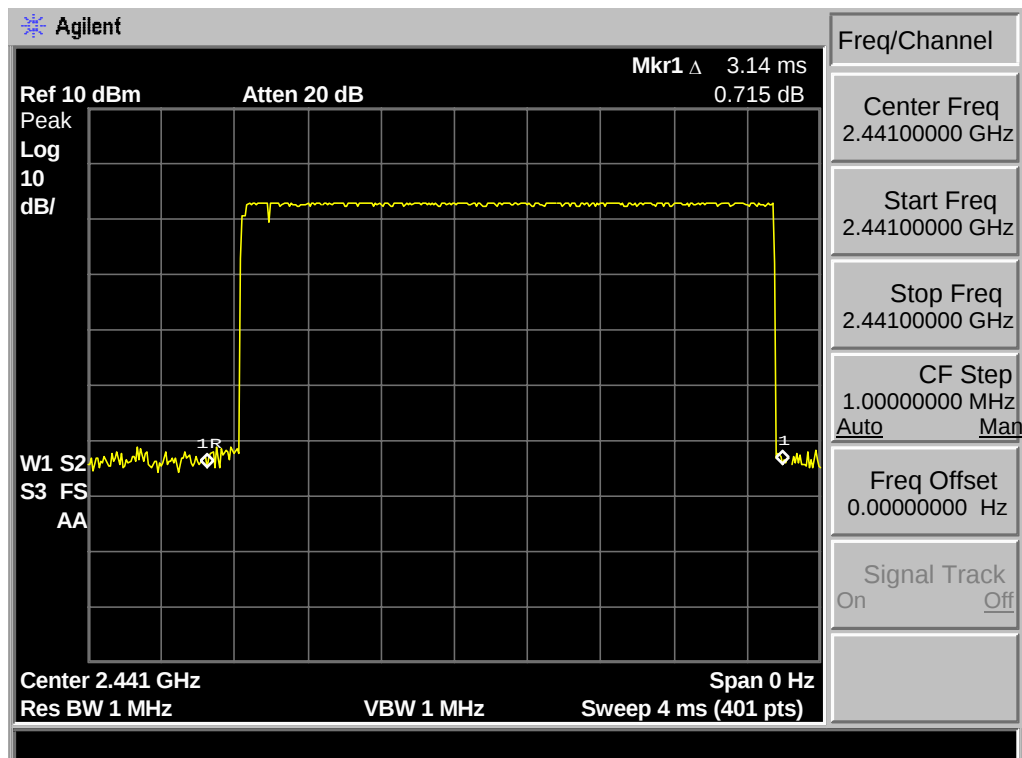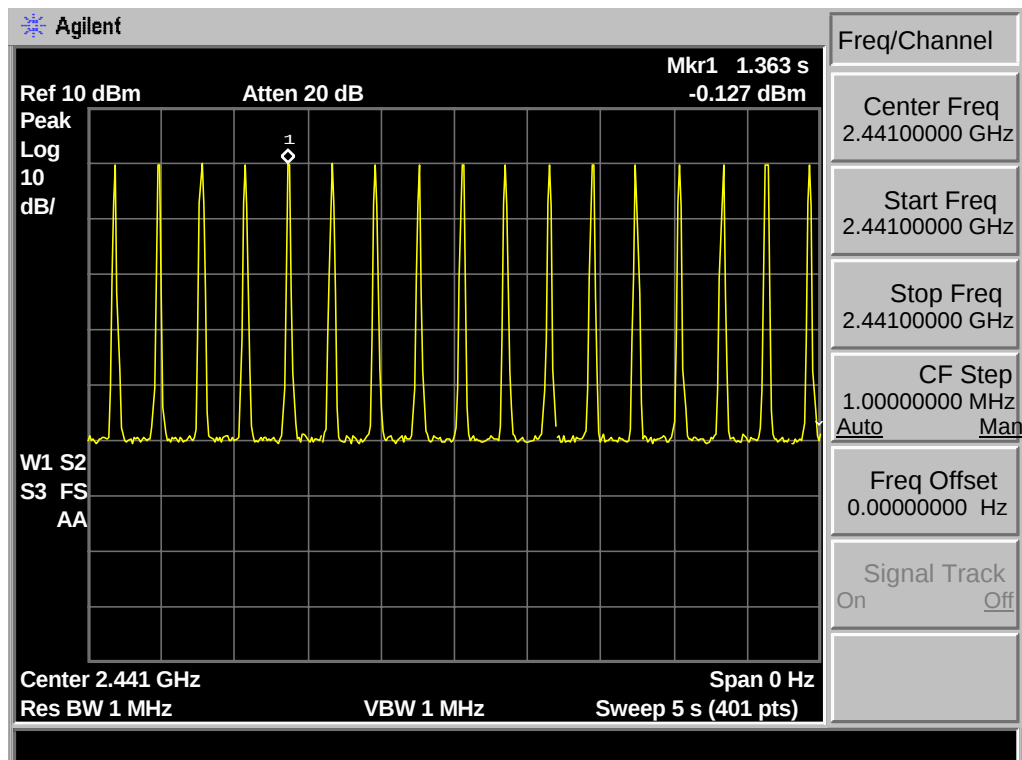



8-DPSK DH1: $50\text{hop}/5 * 0.4 * 79 * 0.61\text{ms}=192.76$

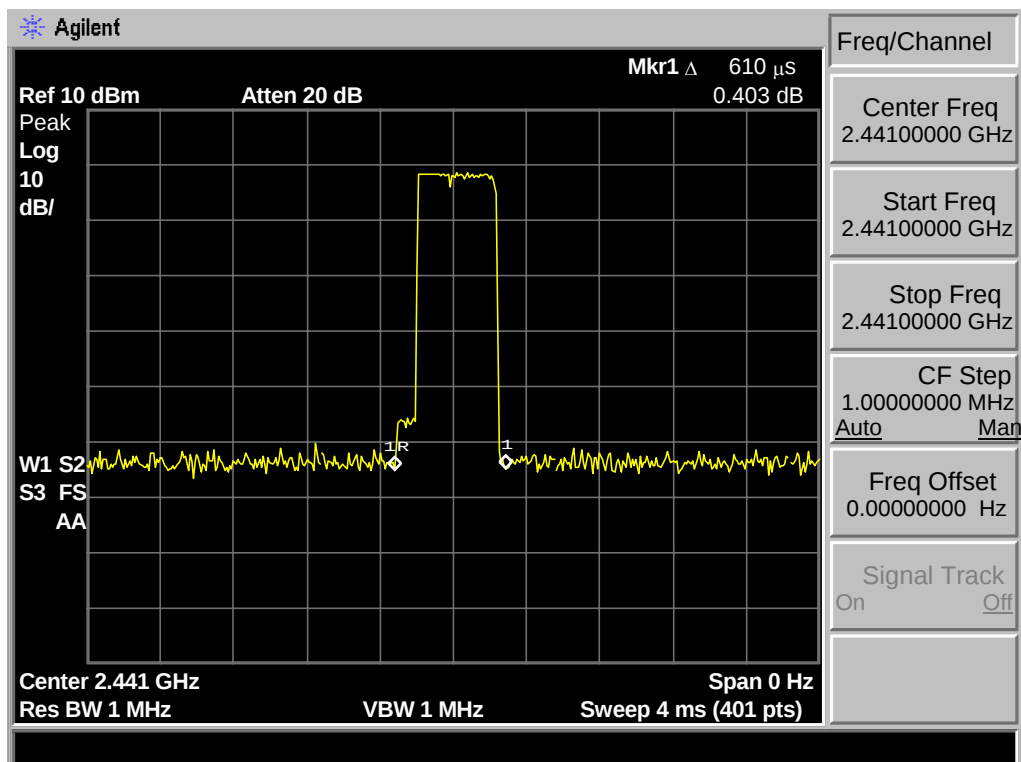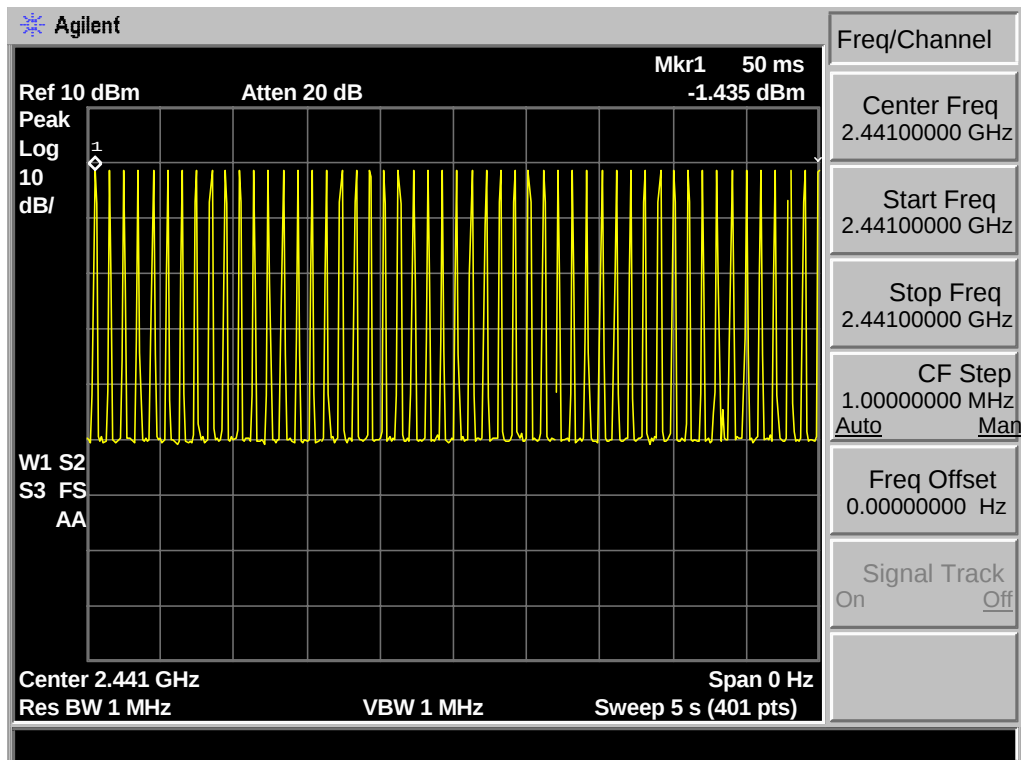

8-DPSK DH3: $25/5 * 0.4 * 79 * 1.87\text{ms} = 295.46$

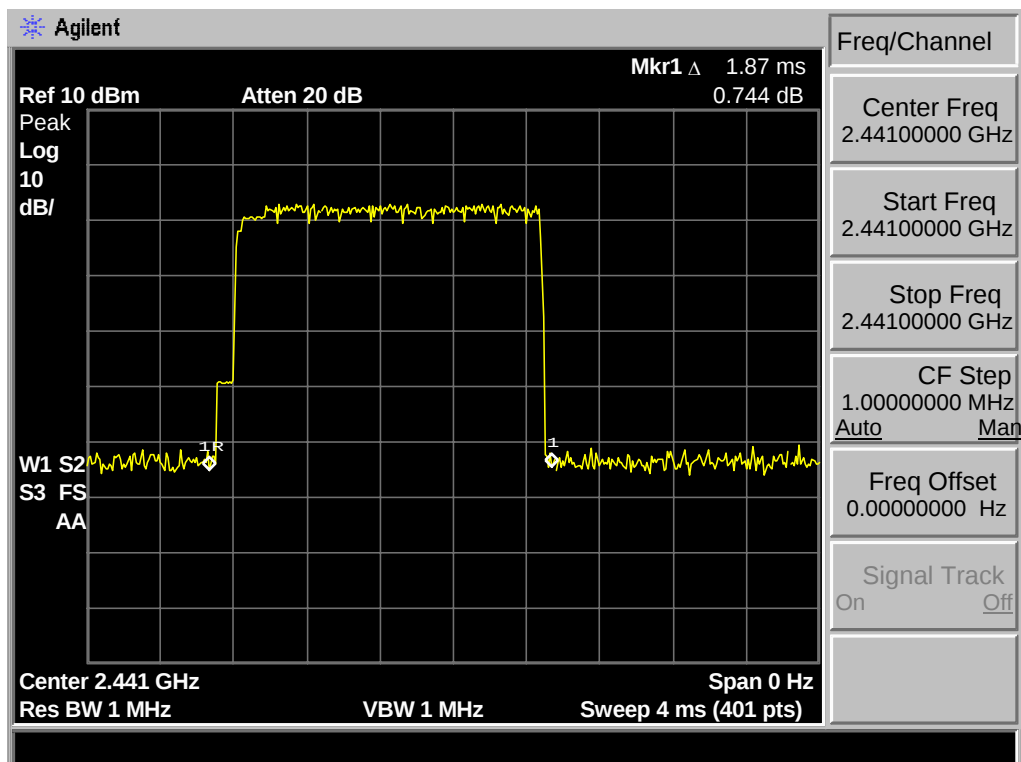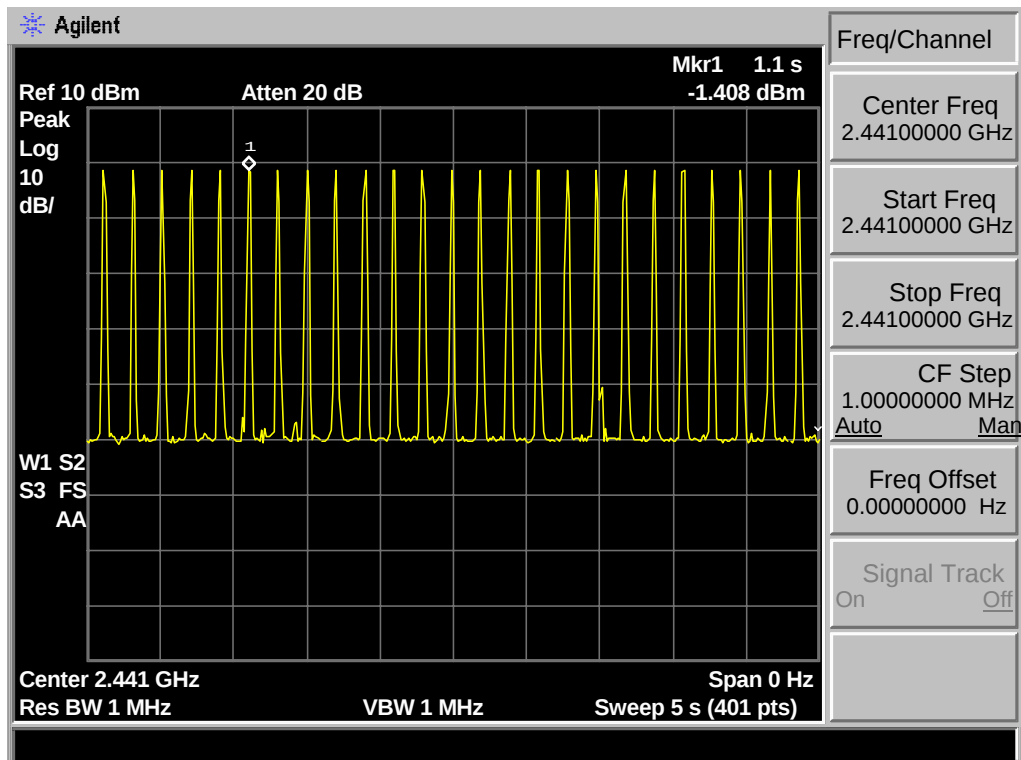

8-DPSK DH5: 17/5 * 0.4 *79 *3.08ms=330.92

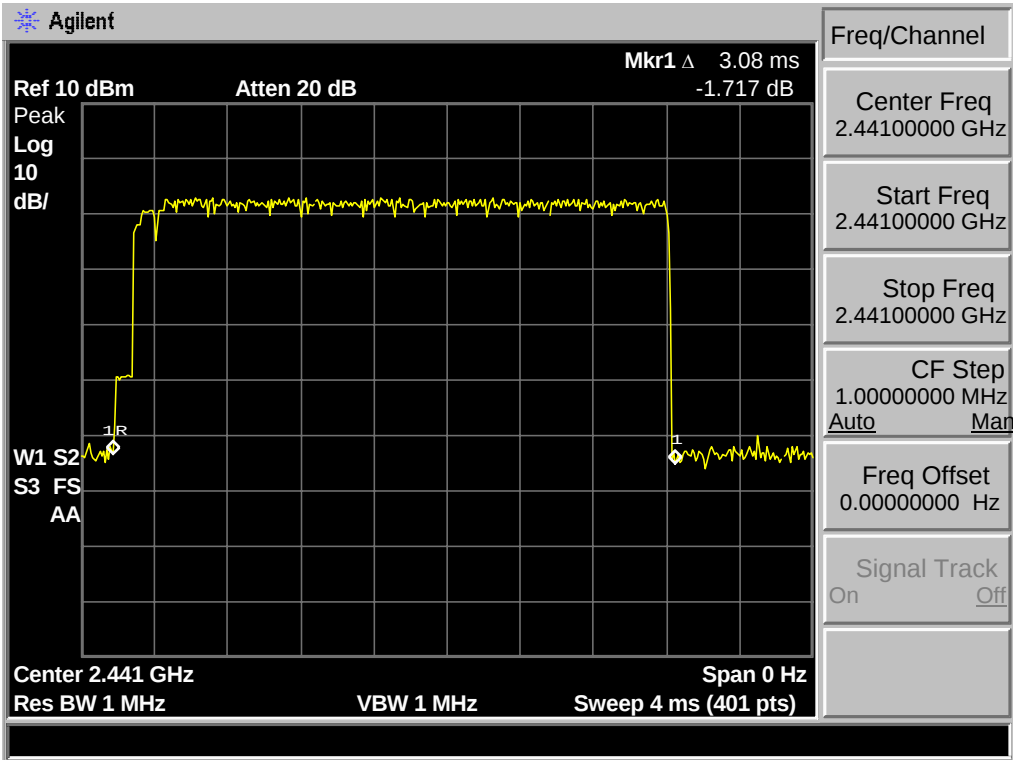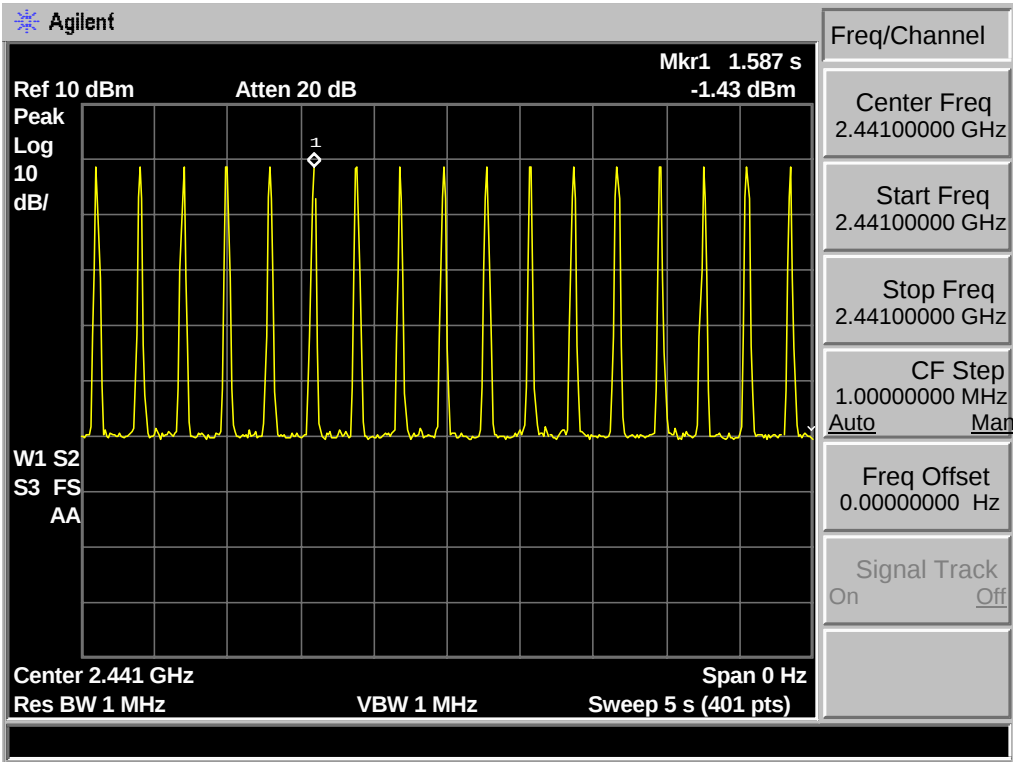

8. RADIATED EMISSIONS

8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.


15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

8.2. Block Diagram of Test setup

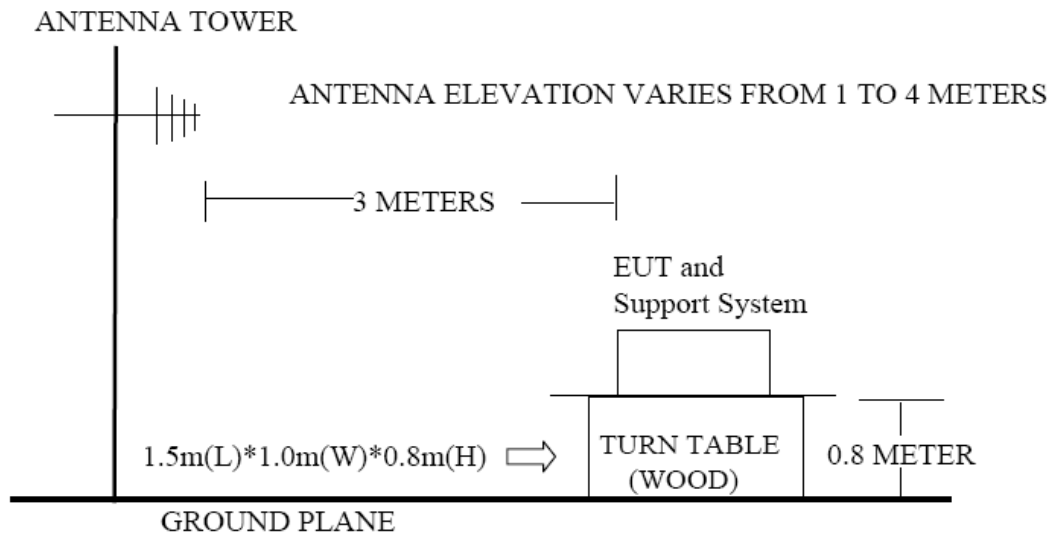

8.3. Test Procedure

EUT was placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 1MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

The frequency range from 30MHz to 10th harmonic (25GHz) are checked.

8.4. Test Result


30MHz—25GHz Radiated emission Test result	
EUT: I600 Stereo Music System with Bluetooth	M/N:I600
Power: AC 120V/60Hz	
Test date: 2013-03-25~2013-03-28 Test site: 3m Chamber Tested by: Tony Tang	
Test mode: Tx Mode	
Pass	

Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

2、 The frequency 2402MHz 、 2441MHz and 2480MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.


8.5. Test Data

30 MHz – 1000 MHz

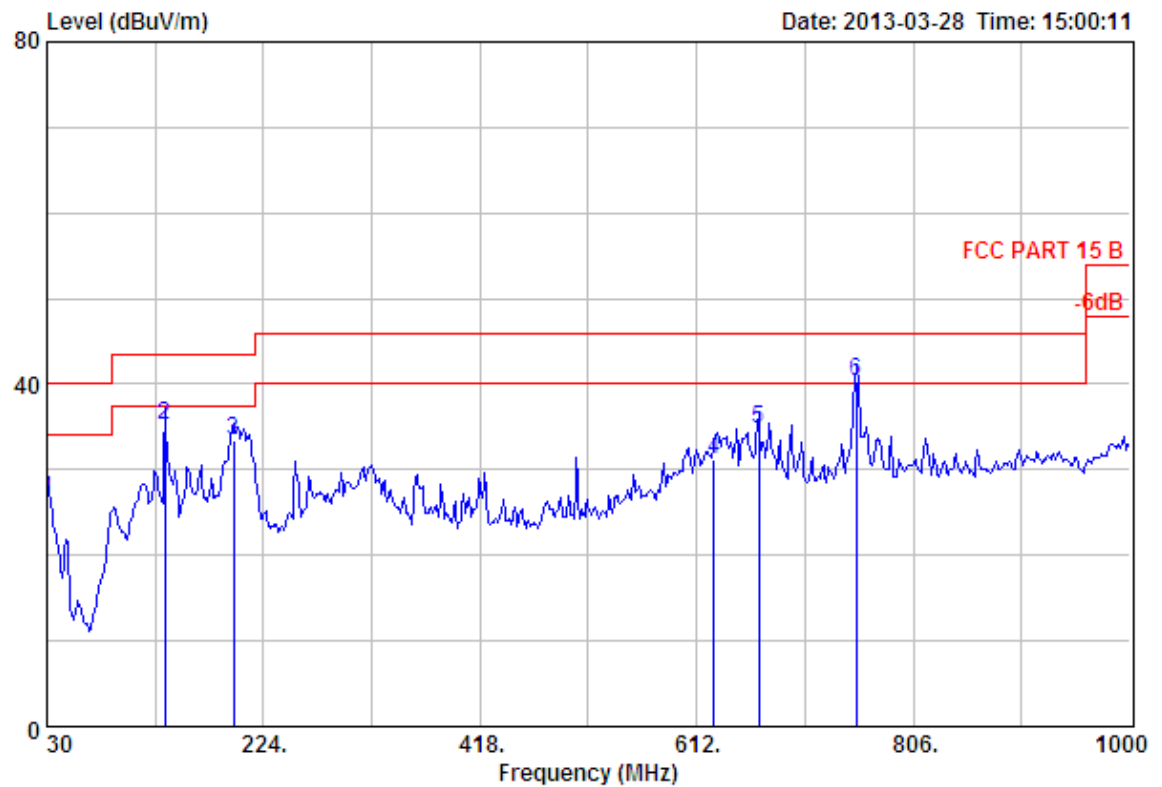


Site no. : 3m Chamber Data no. : 118
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : I600 Stereo Music System with Bluetooth
 Power : AC 120V/60Hz
 M/N : I600
 Test Mode : GFSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reamark (dB)
1	30.00	18.51	1.91	6.10	26.52	40.00	13.48	QP
2	135.73	11.38	3.60	20.13	35.11	43.50	8.39	QP
3	196.84	7.72	4.26	21.42	33.40	43.50	10.10	QP
4	627.52	20.13	7.55	3.45	31.13	46.00	14.87	QP
5	667.29	20.19	7.75	6.93	34.87	46.00	11.13	QP
6	754.59	22.12	8.32	9.94	40.38	46.00	5.62	QP

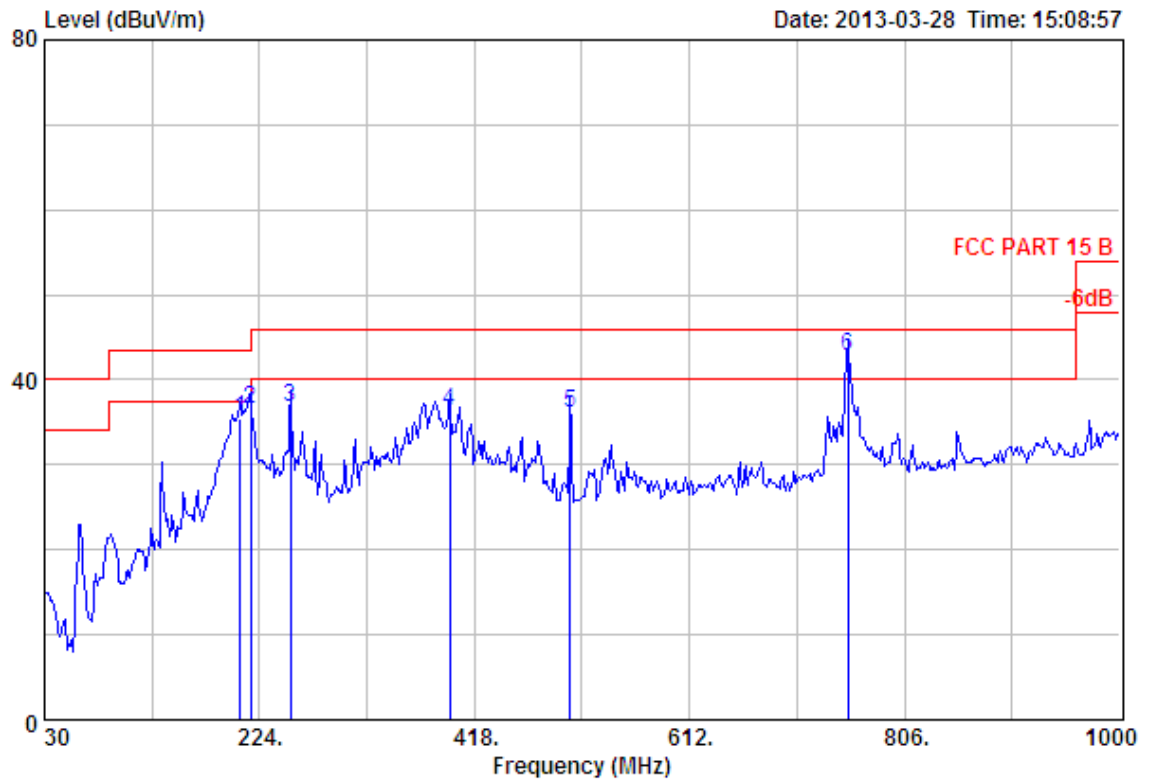


Site no. : 3m Chamber Data no. : 119
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : I600 Stereo Music System with Bluetooth
 Power : AC 120V/60Hz
 M/N : I600
 Test Mode : GFSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reamark (dB)
1	206.54	8.09	4.32	23.02	35.43	43.50	8.07	QP
2	216.24	8.80	4.40	23.36	36.56	46.00	9.44	QP
3	252.13	12.06	4.82	19.79	36.67	46.00	9.33	QP
4	395.69	15.87	5.93	14.61	36.41	46.00	9.59	QP
5	504.33	17.90	6.78	11.36	36.04	46.00	9.96	QP
6	754.59	22.12	8.32	12.36	42.80	46.00	3.20	QP

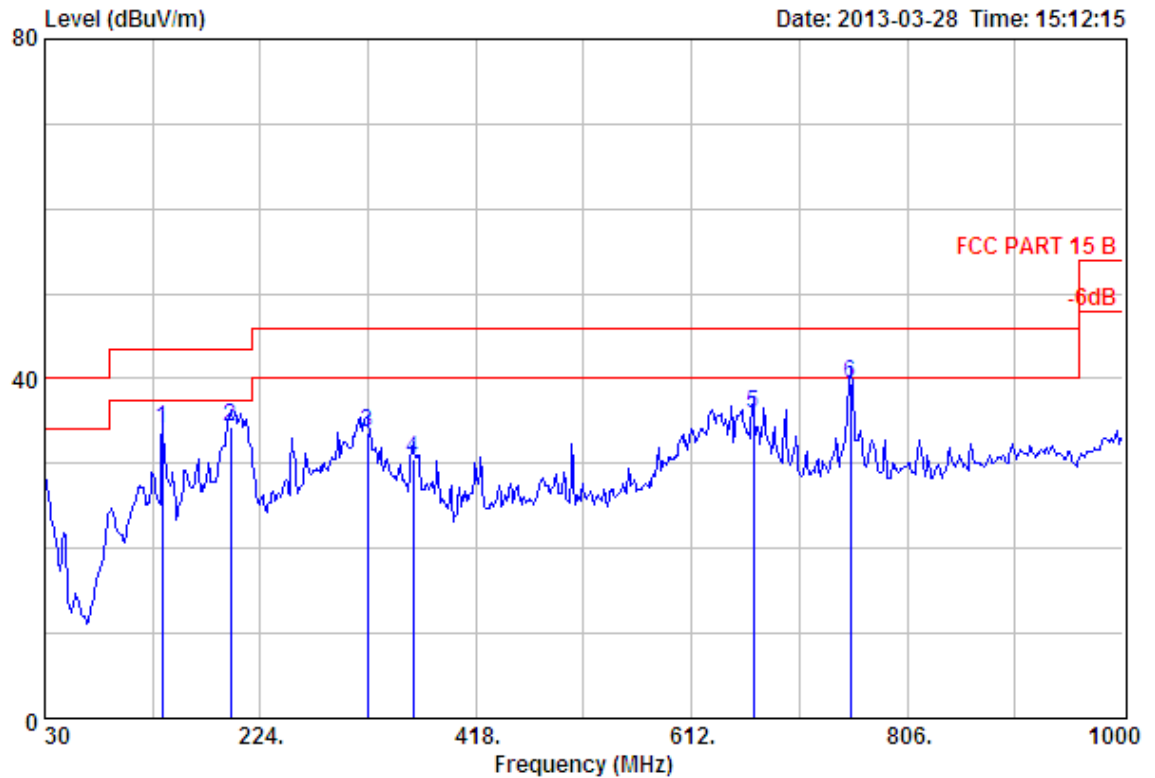


Site no. : 3m Chamber Data no. : 120
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : I600 Stereo Music System with Bluetooth
 Power : AC 120V/60Hz
 M/N : I600
 Test Mode : GFSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reamark (dB)
1	135.73	11.38	3.60	19.13	34.11	43.50	9.39	QP
2	196.84	7.72	4.26	22.42	34.40	43.50	9.10	QP
3	320.03	13.57	5.37	14.63	33.57	46.00	12.43	QP
4	361.74	14.53	5.75	10.19	30.47	46.00	15.53	QP
5	667.29	20.19	7.75	7.93	35.87	46.00	10.13	QP
6	754.59	22.12	8.32	8.94	39.38	46.00	6.62	QP

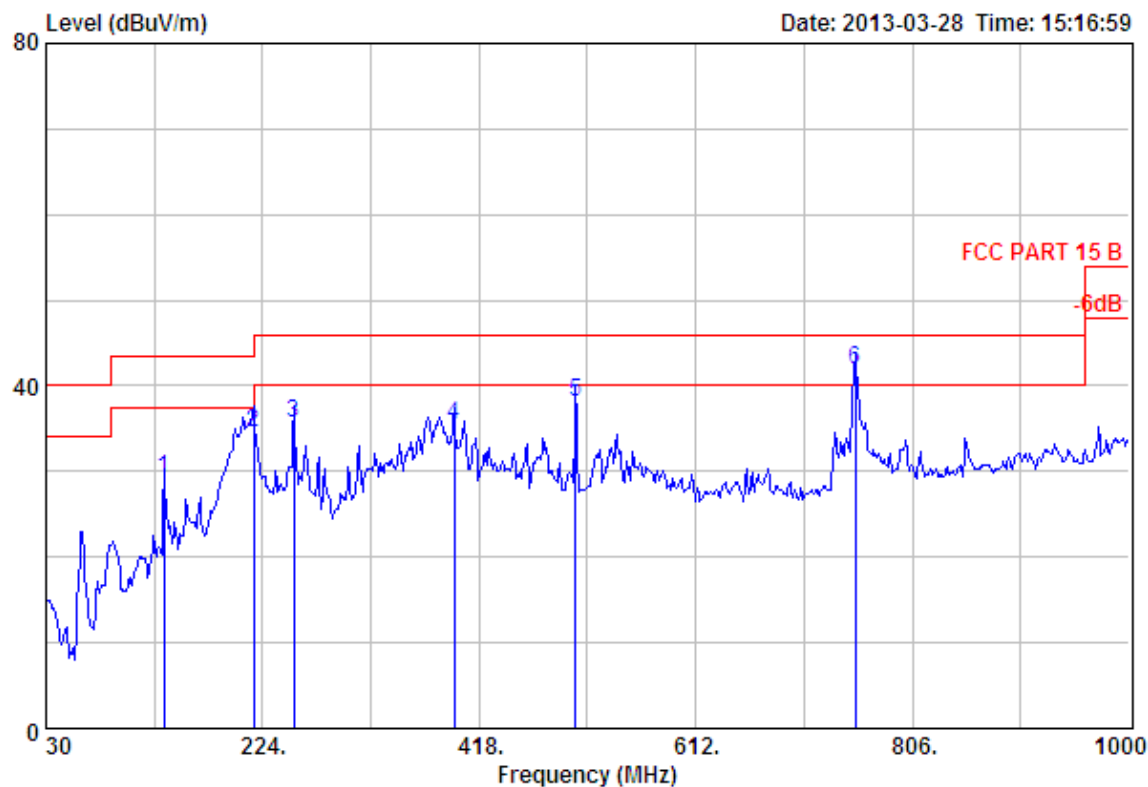


Site no. : 3m Chamber Data no. : 121
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : I600 Stereo Music System with Bluetooth
 Power : AC 120V/60Hz
 M/N : I600
 Test Mode : GFSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reamark (dB)
1	135.73	11.38	3.60	14.31	29.29	43.50	14.21	QP
2	216.24	8.80	4.40	21.36	34.56	46.00	11.44	QP
3	252.13	12.06	4.82	18.79	35.67	46.00	10.33	QP
4	395.69	15.87	5.93	13.61	35.41	46.00	10.59	QP
5	504.33	17.90	6.78	13.36	38.04	46.00	7.96	QP
6	754.59	22.12	8.32	11.36	41.80	46.00	4.20	QP

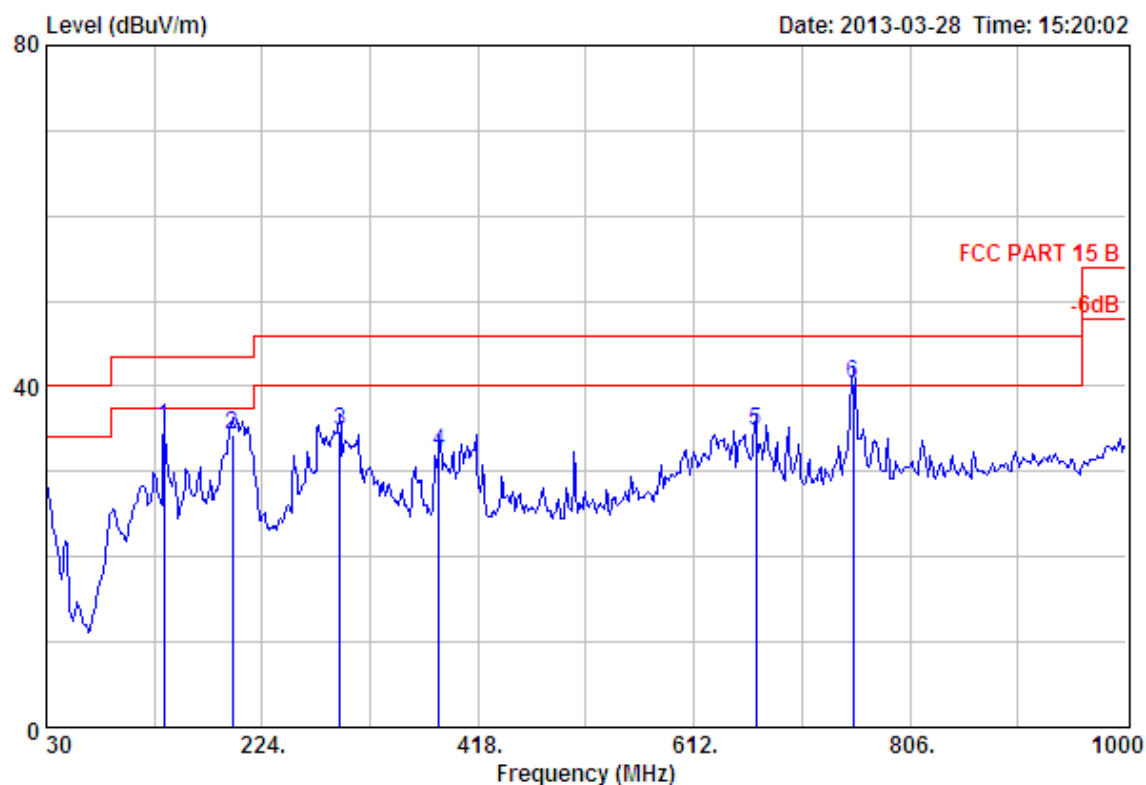


Site no. : 3m Chamber Data no. : 122
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : I600 Stereo Music System with Bluetooth
 Power : AC 120V/60Hz
 M/N : I600
 Test Mode : GFSK TX 2480MHz

	Freq.	Ant.	Cable	Emission				
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Reamark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	(dB)
1	135.73	11.38	3.60	20.13	35.11	43.50	8.39	QP
2	196.84	7.72	4.26	22.42	34.40	43.50	9.10	QP
3	293.84	12.92	5.21	16.57	34.70	46.00	11.30	QP
4	383.08	15.18	5.81	11.23	32.22	46.00	13.78	QP
5	667.29	20.19	7.75	6.93	34.87	46.00	11.13	QP
6	754.59	22.12	8.32	9.94	40.38	46.00	5.62	QP

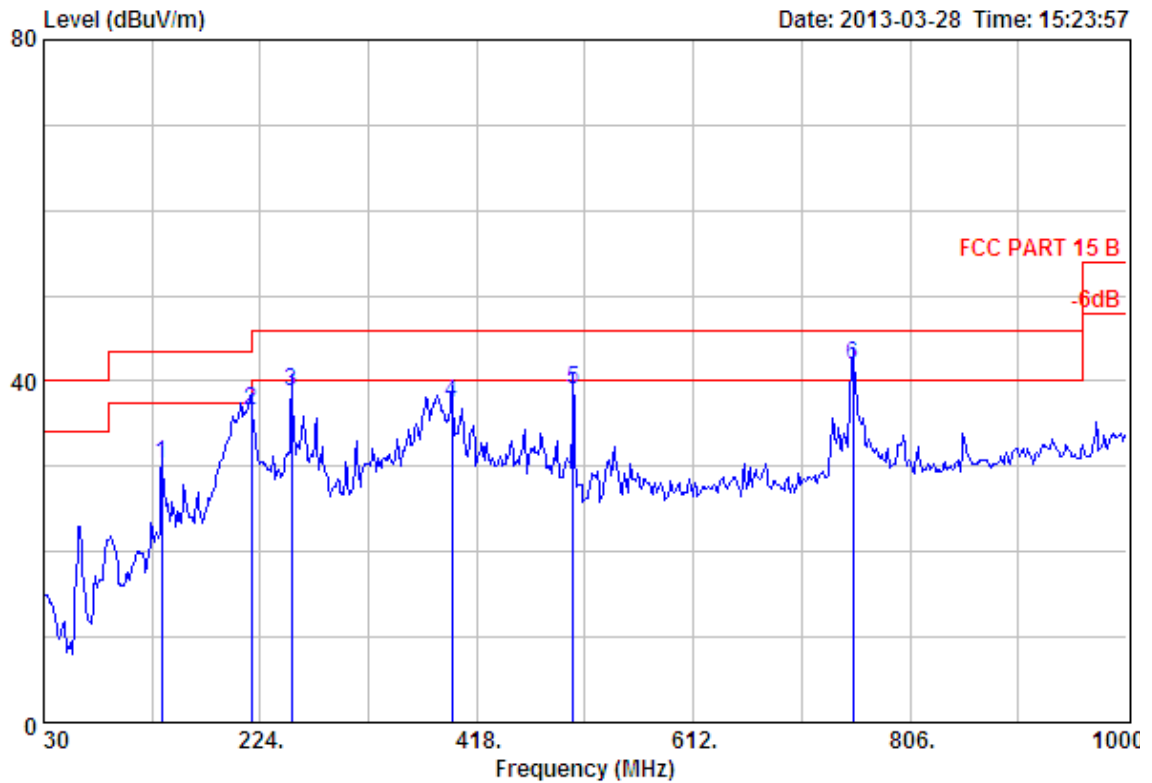


Site no. : 3m Chamber Data no. : 123
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : I600 Stereo Music System with Bluetooth
 Power : AC 120V/60Hz
 M/N : I600
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reamark (dB)
1	135.73	11.38	3.60	15.31	30.29	43.50	13.21	QP
2	216.24	8.80	4.40	23.36	36.56	46.00	9.44	QP
3	252.13	12.06	4.82	21.79	38.67	46.00	7.33	QP
4	395.69	15.87	5.93	15.61	37.41	46.00	8.59	QP
5	504.33	17.90	6.78	14.36	39.04	46.00	6.96	QP
6	754.59	22.12	8.32	11.36	41.80	46.00	4.20	QP

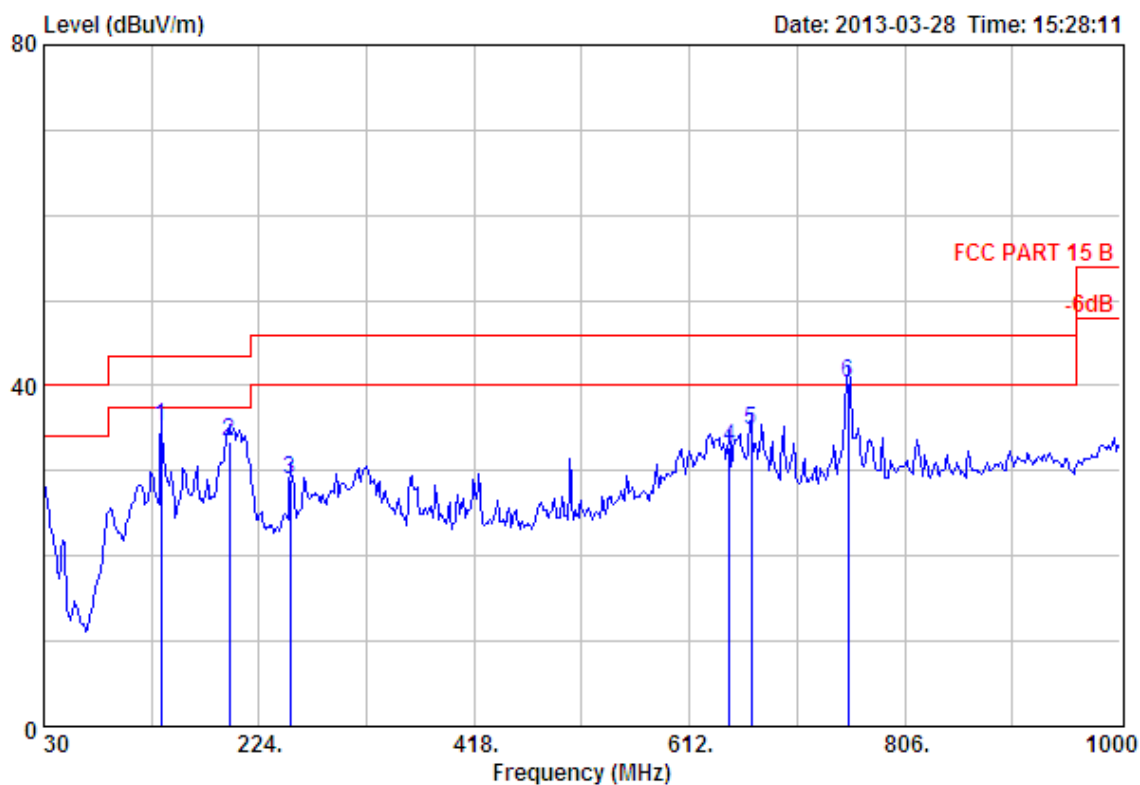


Site no. : 3m Chamber Data no. : 124
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6°;Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : I600 Stereo Music System with Bluetooth
 Power : AC 120V/60Hz
 M/N : I600
 Test Mode : 8-DPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reamark (dB)
1	135.73	11.38	3.60	20.13	35.11	43.50	8.39	QP
2	196.84	7.72	4.26	21.42	33.40	43.50	10.10	QP
3	252.13	12.06	4.82	12.02	28.90	46.00	17.10	QP
4	647.89	20.08	7.61	5.11	32.80	46.00	13.20	QP
5	667.29	20.19	7.75	6.93	34.87	46.00	11.13	QP
6	754.59	22.12	8.32	9.94	40.38	46.00	5.62	QP

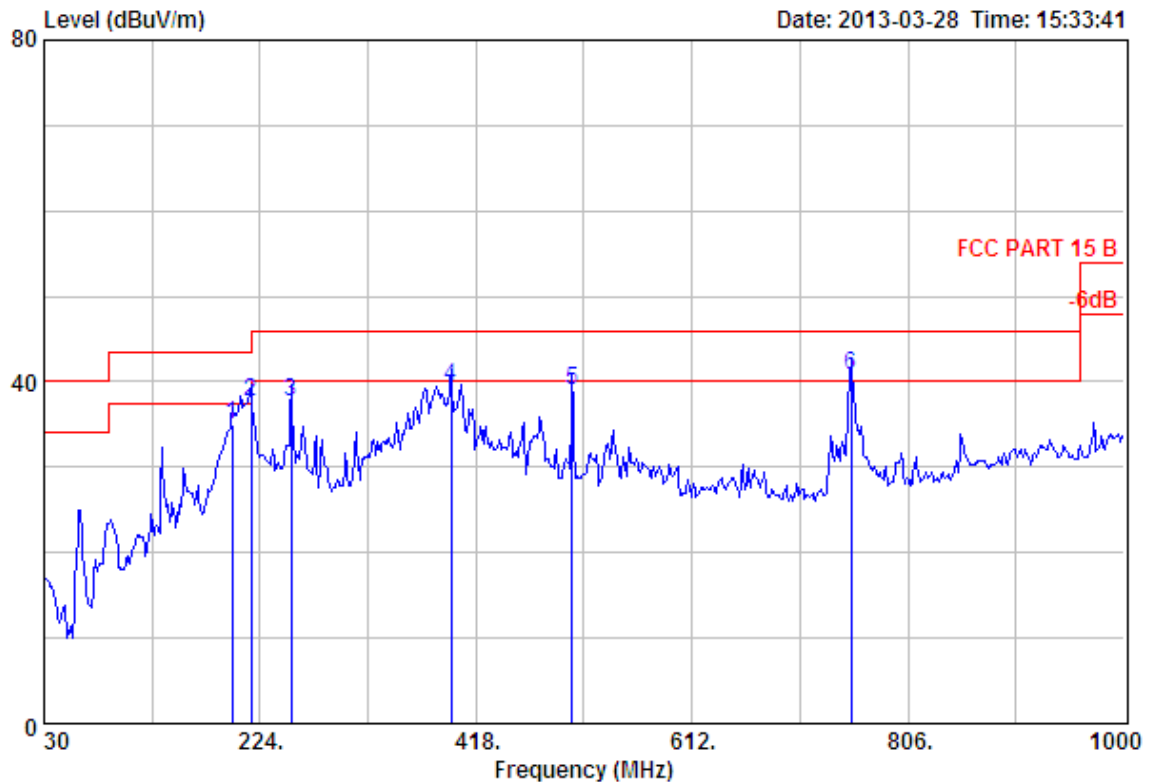


Site no. : 3m Chamber Data no. : 125
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : I600 Stereo Music System with Bluetooth
 Power : AC 120V/60Hz
 M/N : I600
 Test Mode : 8-DPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reamark (dB)
1	198.78	7.71	4.24	23.02	34.97	43.50	8.53	QP
2	216.24	8.80	4.40	24.36	37.56	46.00	8.44	QP
3	252.13	12.06	4.82	20.79	37.67	46.00	8.33	QP
4	395.69	15.87	5.93	17.61	39.41	46.00	6.59	QP
5	504.33	17.90	6.78	14.36	39.04	46.00	6.96	QP
6	754.59	22.12	8.32	10.36	40.80	46.00	5.20	QP

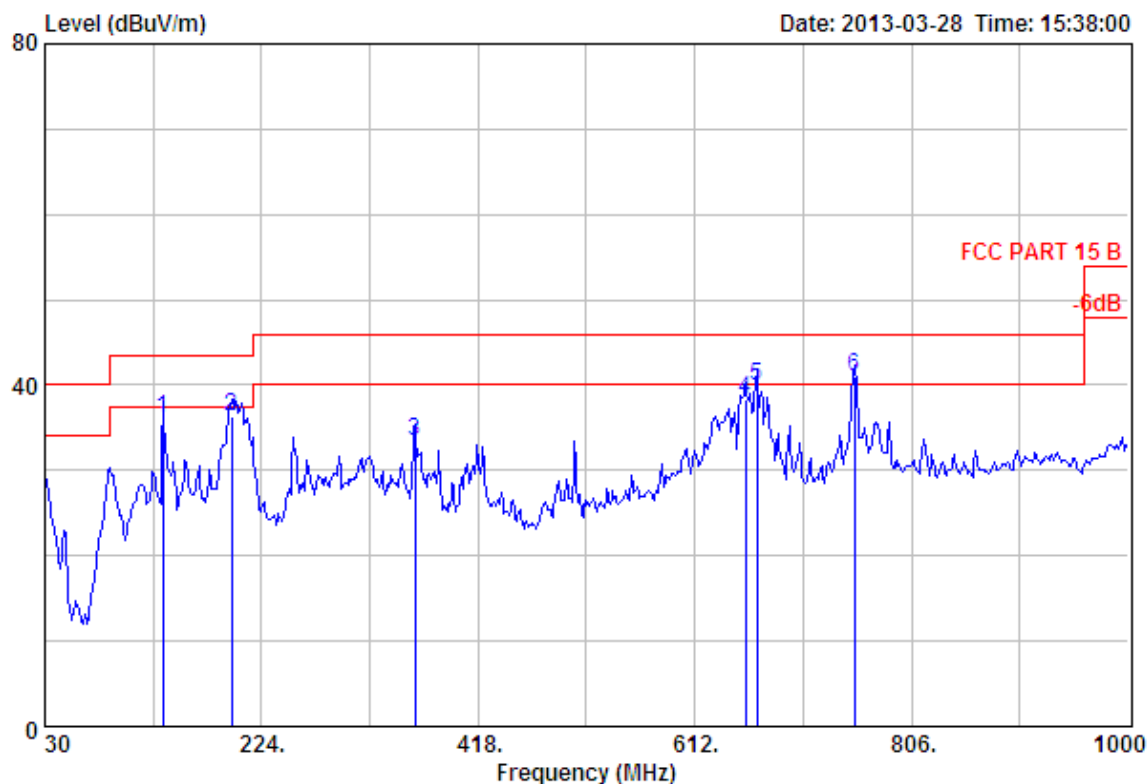


Site no. : 3m Chamber Data no. : 126
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : I600 Stereo Music System with Bluetooth
 Power : AC 120V/60Hz
 M/N : I600
 Test Mode : 8-DPSK TX 2441MHz

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Reamark
		(dB/m)	(dB)	(dBUV)	(dBUV/m)	(dBUV/m)	(dB)	(dB)
1	135.73	11.38	3.60	21.13	36.11	43.50	7.39	QP
2	196.84	7.72	4.26	24.42	36.40	43.50	7.10	QP
3	361.74	14.53	5.75	13.19	33.47	46.00	12.53	QP
4	657.59	20.07	7.67	10.55	38.29	46.00	7.71	QP
5	667.29	20.19	7.75	11.93	39.87	46.00	6.13	QP
6	754.59	22.12	8.32	10.56	41.00	46.00	5.00	QP

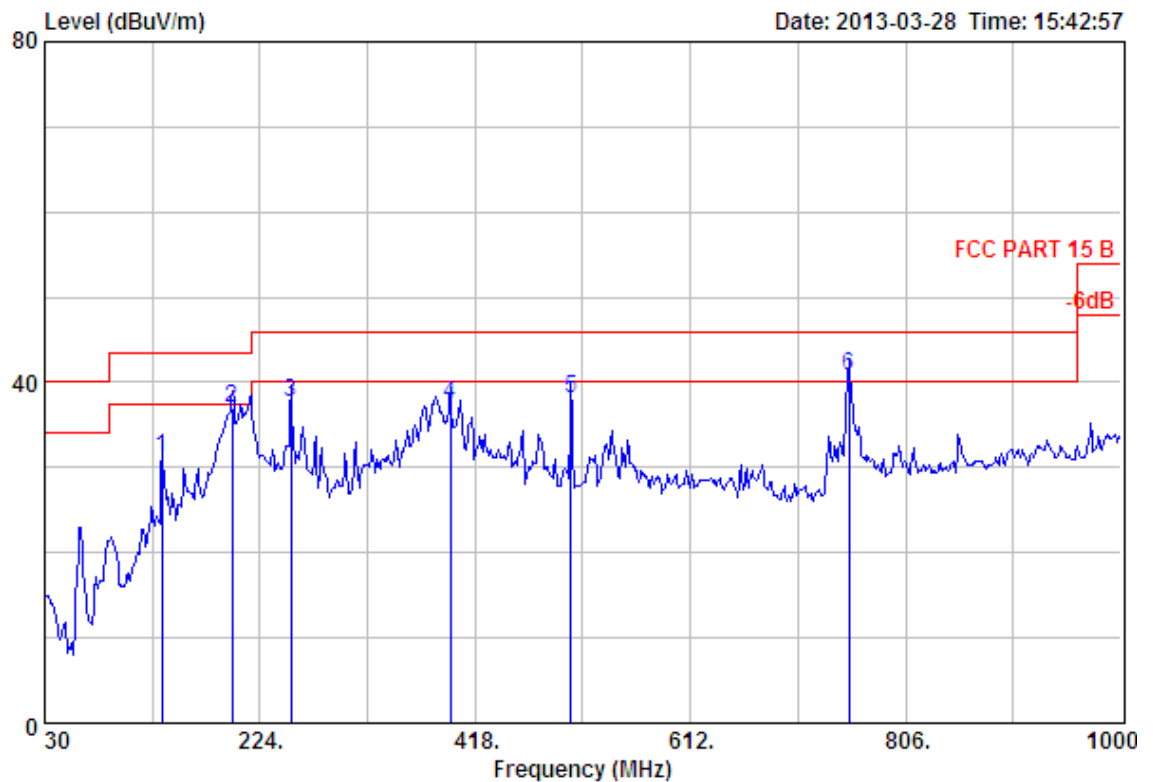


Site no. : 3m Chamber Data no. : 127
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : I600 Stereo Music System with Bluetooth
 Power : AC 120V/60Hz
 M/N : I600
 Test Mode : 8-DPSK TX 2441MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reamark (dB)
1	135.73	11.38	3.60	16.31	31.29	43.50	12.21	QP
2	198.78	7.71	4.24	25.02	36.97	43.50	6.53	QP
3	252.13	12.06	4.82	20.79	37.67	46.00	8.33	QP
4	395.69	15.87	5.93	15.61	37.41	46.00	8.59	QP
5	504.33	17.90	6.78	13.36	38.04	46.00	7.96	QP
6	754.59	22.12	8.32	10.36	40.80	46.00	5.20	QP

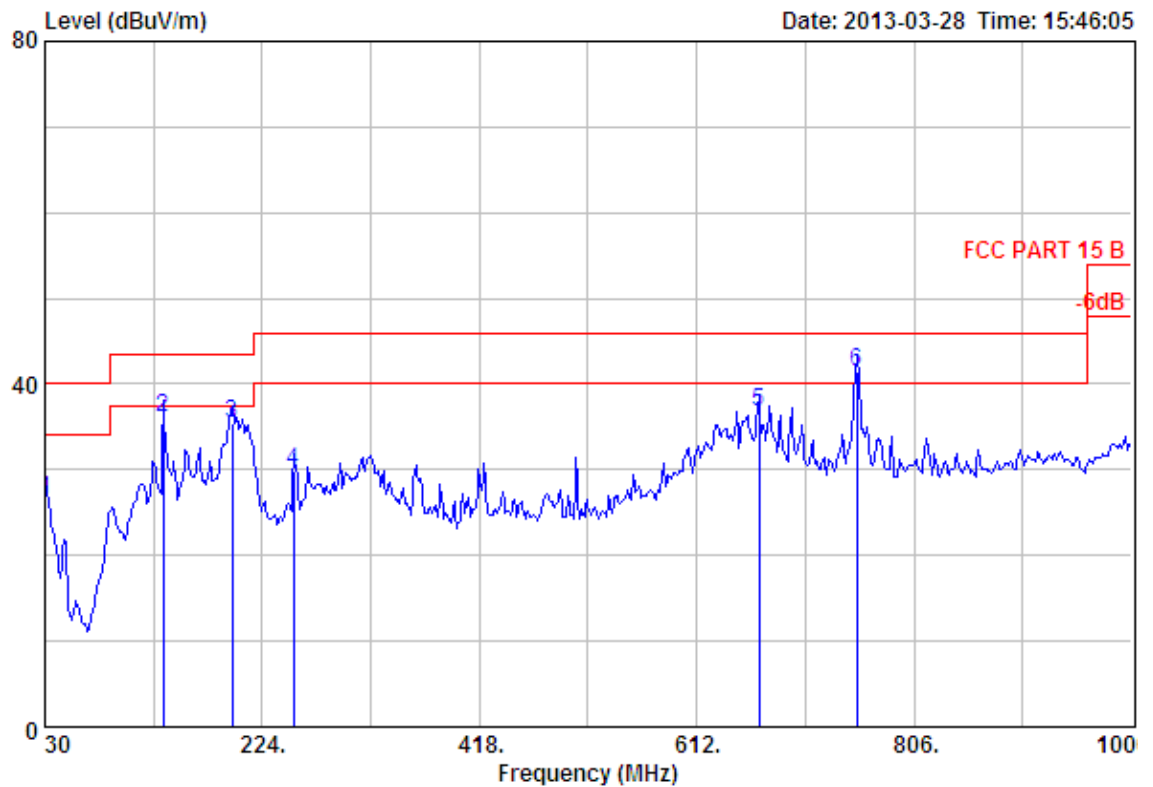

Site no. : 3m Chamber Data no. : 128
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : I600 Stereo Music System with Bluetooth
 Power : AC 120V/60Hz
 M/N : I600
 Test Mode : 8-DPSK TX 2480MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark (dB)
1	30.00	18.51	1.91	6.10	26.52	40.00	13.48	QP
2	135.73	11.38	3.60	21.13	36.11	43.50	7.39	QP
3	196.84	7.72	4.26	23.42	35.40	43.50	8.10	QP
4	252.13	12.06	4.82	13.02	29.90	46.00	16.10	QP
5	667.29	20.19	7.75	8.93	36.87	46.00	9.13	QP
6	754.59	22.12	8.32	10.94	41.38	46.00	4.62	QP

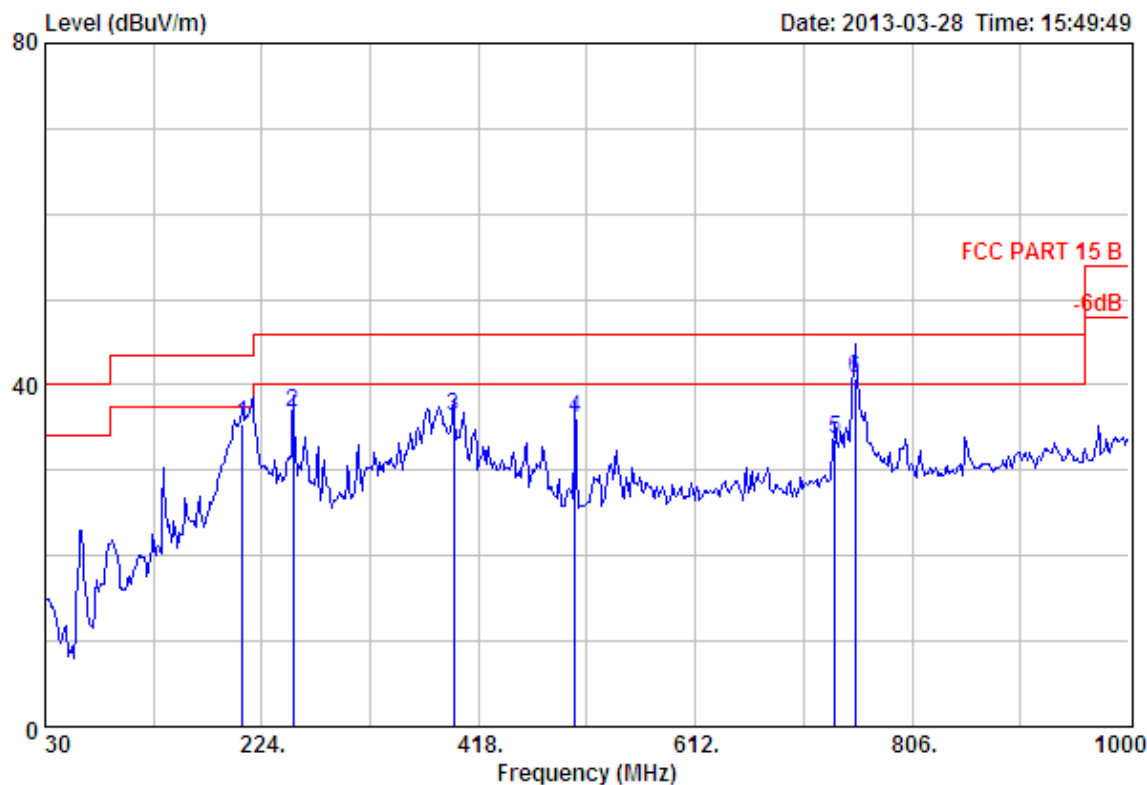

Site no. : 3m Chamber Data no. : 129
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : I600 Stereo Music System with Bluetooth
 Power : AC 120V/60Hz
 M/N : I600
 Test Mode : 8-DPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reamark (dB)
1	206.54	8.09	4.32	23.02	35.43	43.50	8.07	QP
2	252.13	12.06	4.82	19.79	36.67	46.00	9.33	QP
3	395.69	15.87	5.93	14.61	36.41	46.00	9.59	QP
4	504.33	17.90	6.78	11.36	36.04	46.00	9.96	QP
5	737.13	22.30	7.90	3.39	33.59	46.00	12.41	QP
6	754.59	22.12	8.32	10.41	40.85	46.00	5.15	QP


1000 MHz – 18000MHz

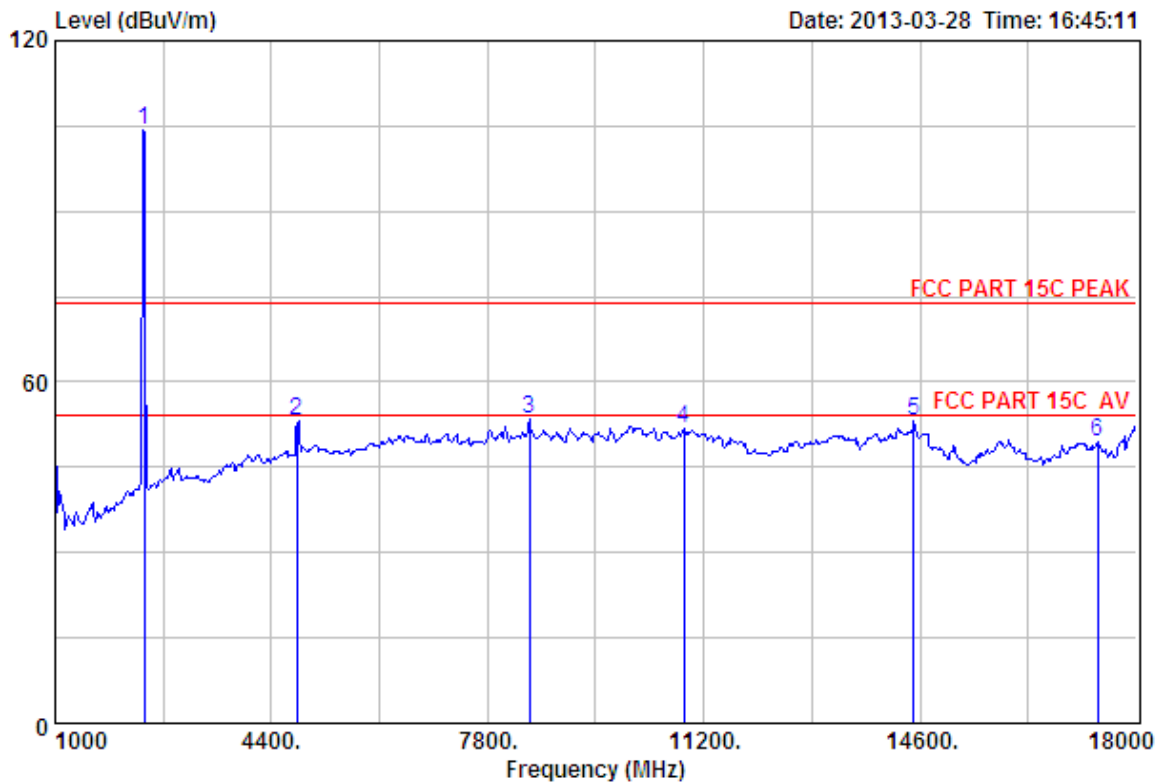

Site no. : 3m Chamber Data no. : 156
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : I600 Stereo Music System with Bluetooth
 Power : AC 120V/60Hz
 M/N : I600
 Test Mode : GFSK TX 2402MHz

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2402.00	27.61	6.62	34.18	104.22	104.27	74.00	-30.27	Peak
2	4804.00	31.25	11.77	31.81	41.92	53.13	74.00	20.87	Peak
3	8463.00	36.87	11.45	31.86	36.94	53.40	74.00	20.60	Peak
4	10894.00	39.41	11.29	33.46	34.52	51.76	74.00	22.24	Peak
5	14498.00	41.88	10.93	33.08	33.43	53.16	74.00	20.84	Peak
6	17388.00	41.17	10.84	34.50	31.94	49.45	74.00	24.55	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

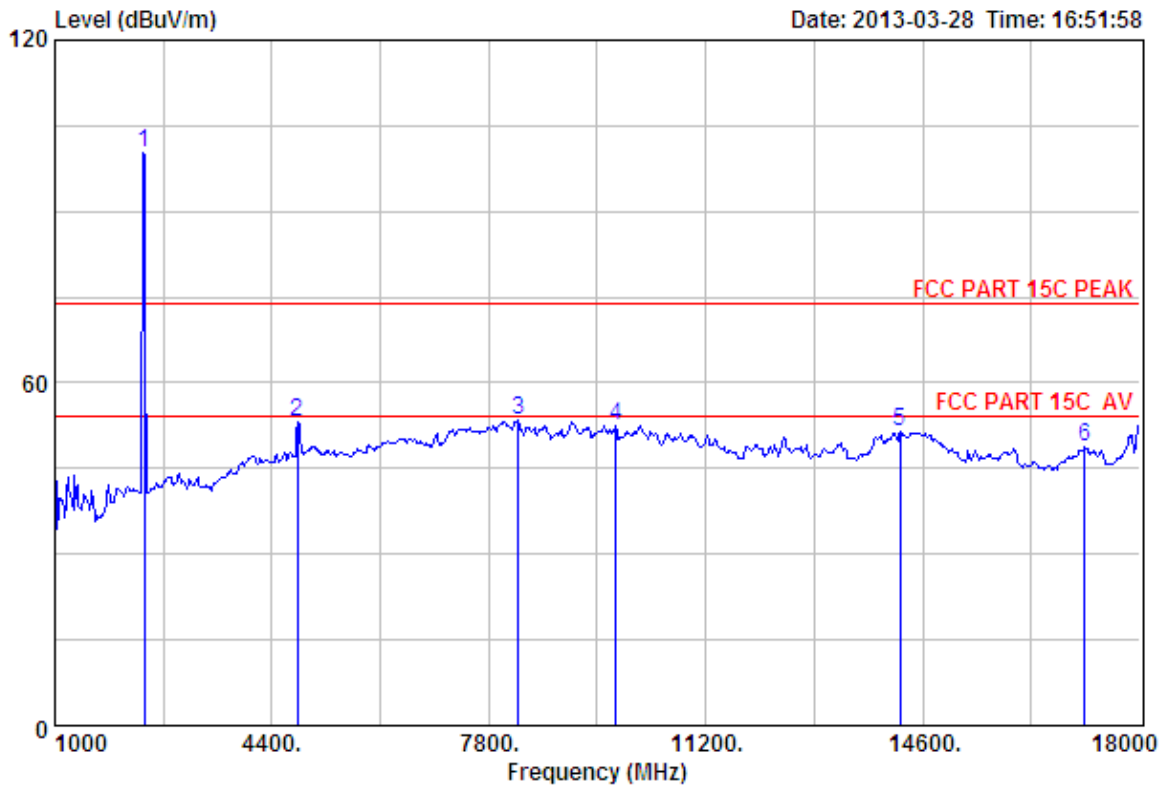

Site no. : 3m Chamber Data no. : 157
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : I600 Stereo Music System with Bluetooth
 Power : AC 120V/60Hz
 M/N : I600
 Test Mode : GFSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.18	100.11	100.16	74.00	-26.16	Peak
2	4804.00	31.25	11.77	31.81	41.94	53.15	74.00	20.85	Peak
3	8259.00	36.67	11.43	31.53	36.99	53.56	74.00	20.44	Peak
4	9789.00	38.18	11.64	31.86	34.62	52.58	74.00	21.42	Peak
5	14243.00	41.67	10.91	33.24	32.18	51.52	74.00	22.48	Peak
6	17133.00	40.26	10.94	33.03	30.50	48.67	74.00	25.33	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.