


1. Bandwidth

1.1 OBW


1.1.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
802.11a	SISO	5745	1	17.251	/	Pass
		5785	1	17.263	/	Pass
		5825	1	17.259	/	Pass
802.11n (HT20)	SISO	5745	1	17.933	/	Pass
		5785	1	17.954	/	Pass
		5825	1	17.987	/	Pass
802.11n (HT40)	SISO	5755	1	36.747	/	Pass
		5795	1	36.623	/	Pass


1.1.2 Test Graph

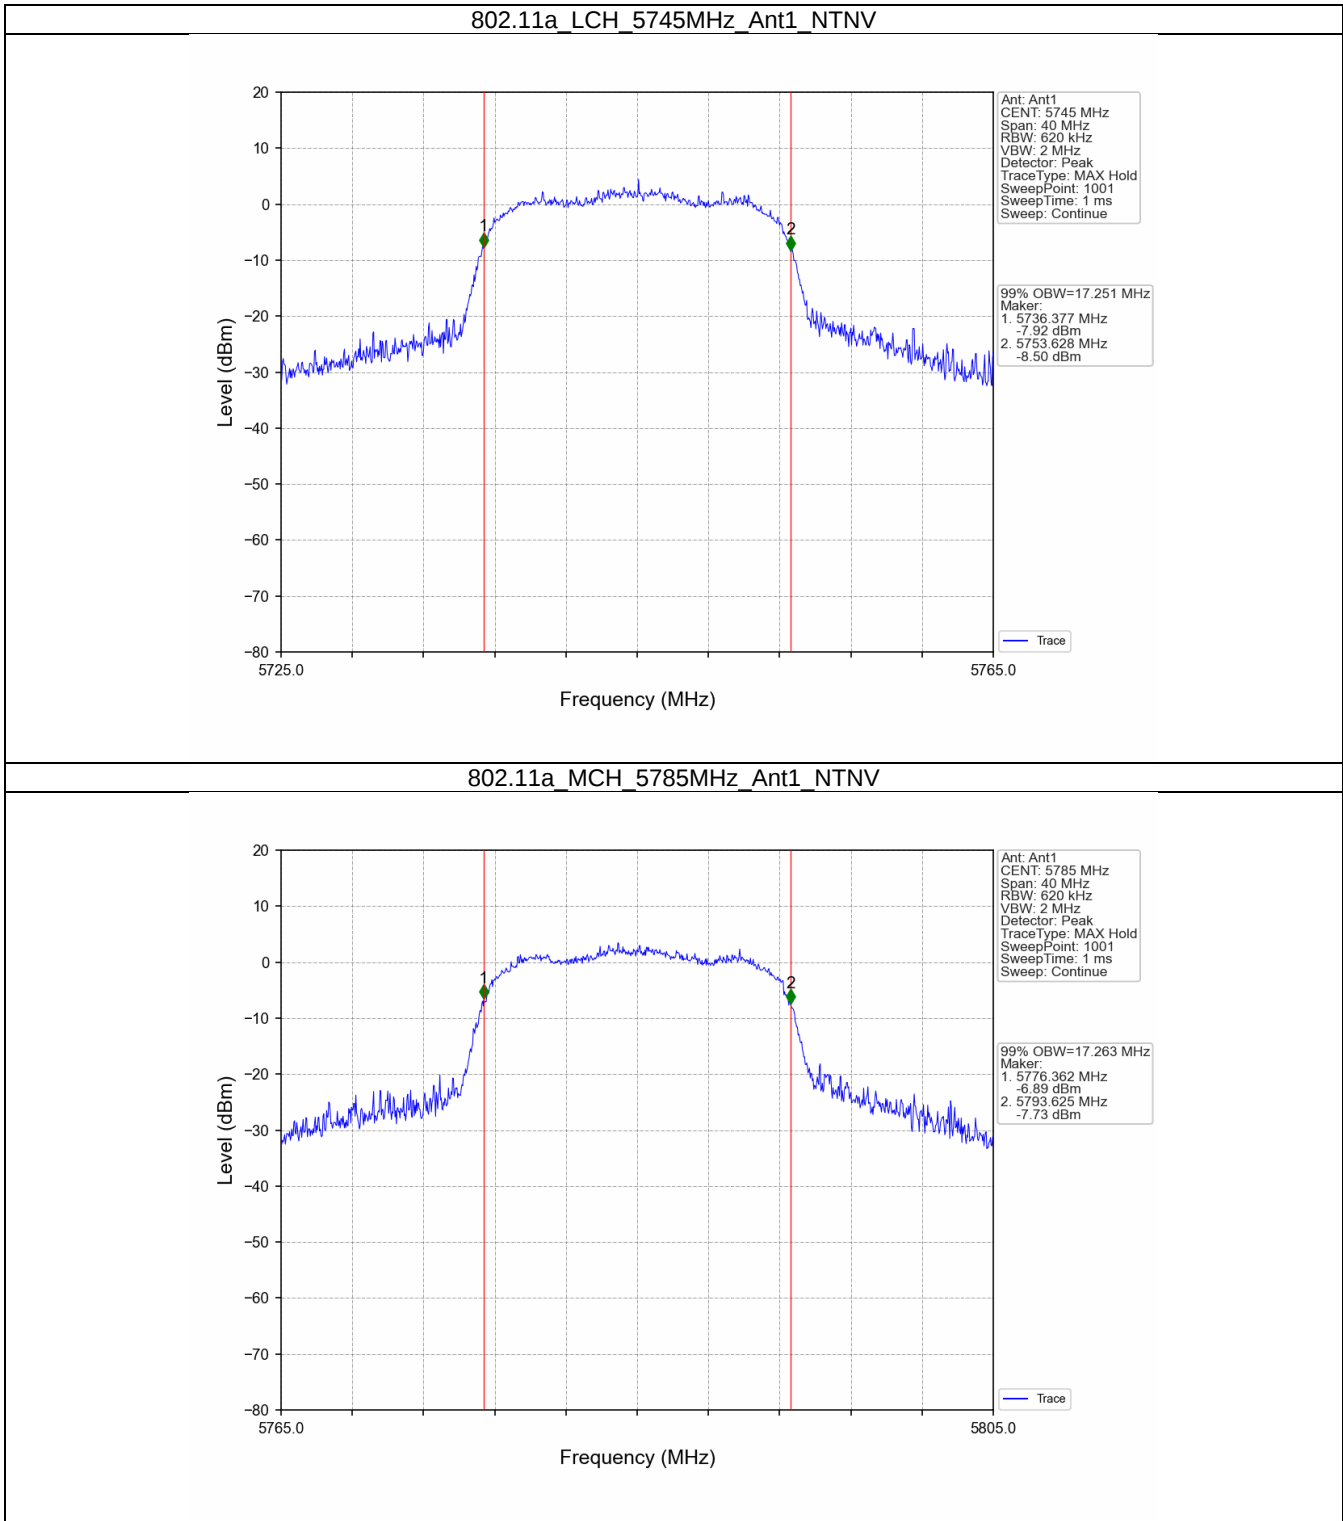


802.11a_HCH_5825MHz_Ant1_NTNV

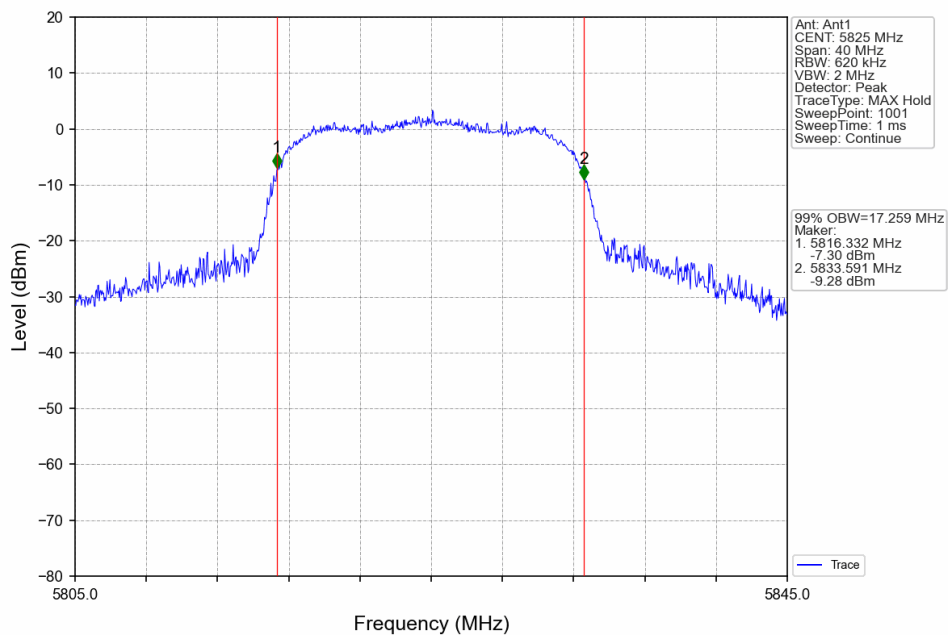


802.11n(HT20)_LCH_5745MHz_Ant1_NTNV

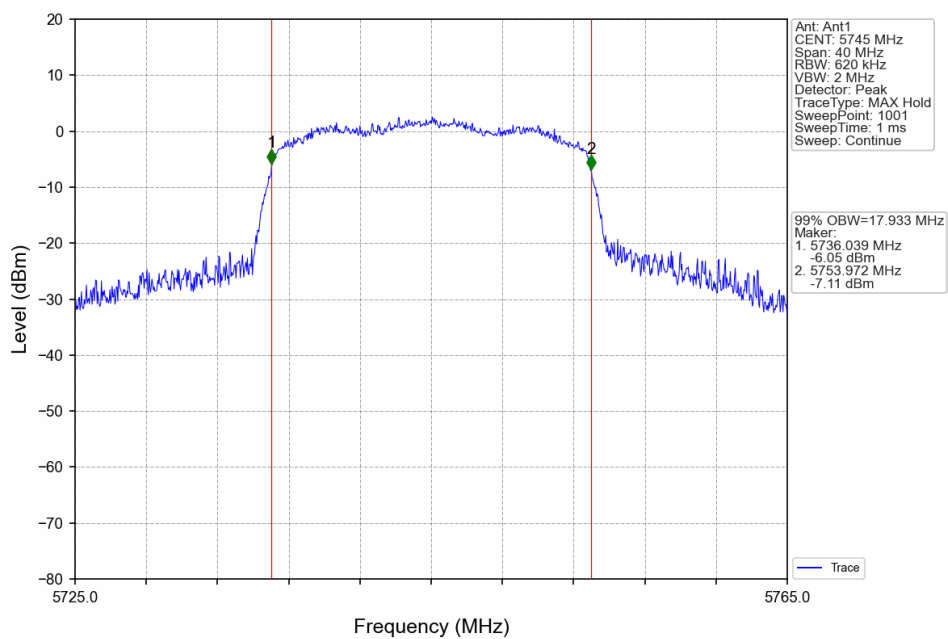


802.11n(HT20)_MCH_5785MHz_Ant1_NTNV

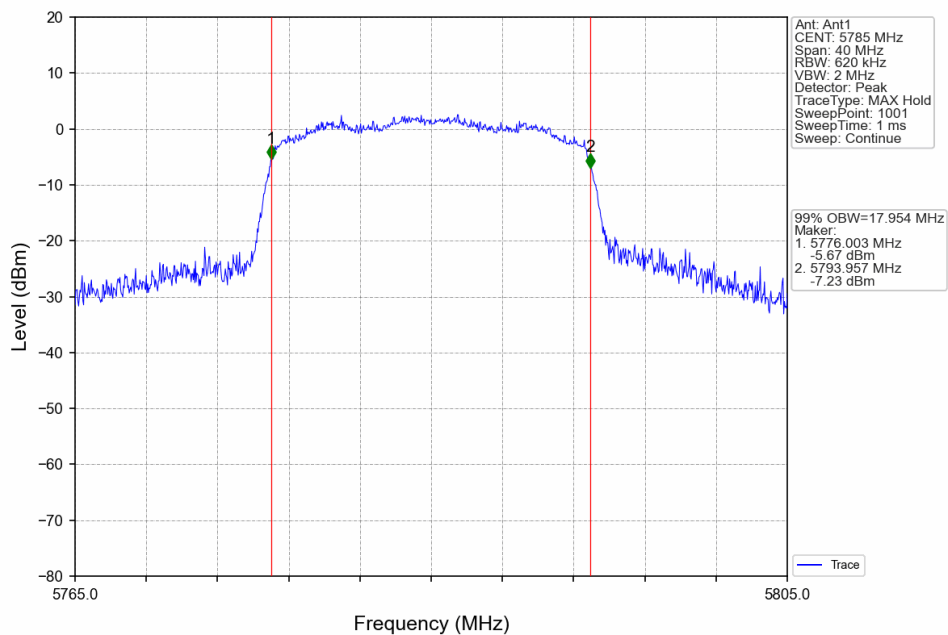


802.11n(HT20)_HCH_5825MHz_Ant1_NTNV

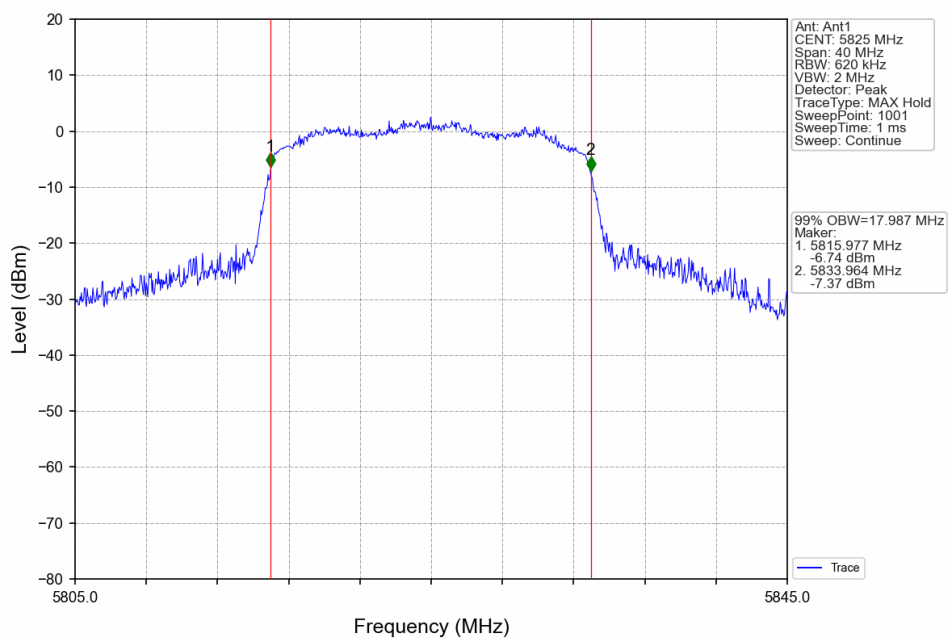

802.11n(HT40)_LCH_5755MHz_Ant1_NTNV

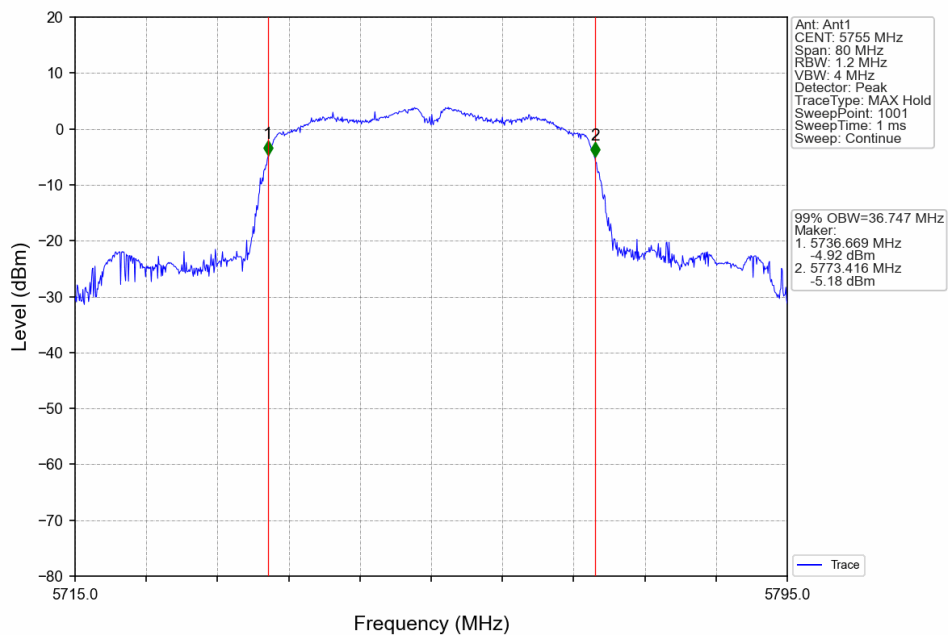

802.11n(HT40)_HCH_5795MHz_Ant1_NTNV

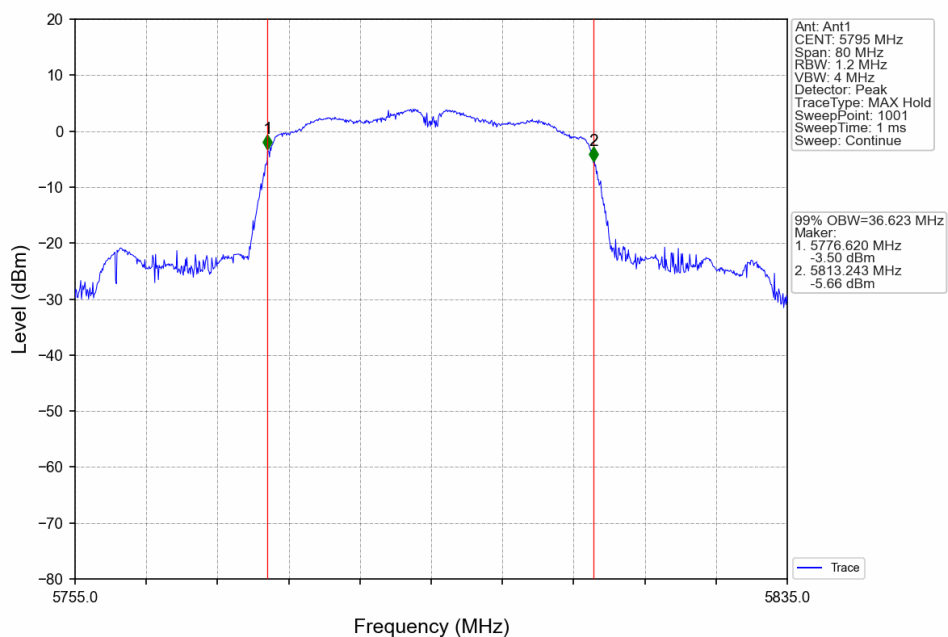


1.2 6dB BW


1.2.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
802.11a	SISO	5745	1	15.153	≥ 0.5	Pass
		5785	1	15.136	≥ 0.5	Pass
		5825	1	15.165	≥ 0.5	Pass
802.11n (HT20)	SISO	5745	1	15.138	≥ 0.5	Pass
		5785	1	15.139	≥ 0.5	Pass
		5825	1	15.062	≥ 0.5	Pass
802.11n (HT40)	SISO	5755	1	35.106	≥ 0.5	Pass
		5795	1	35.143	≥ 0.5	Pass


1.2.2 Test Graph

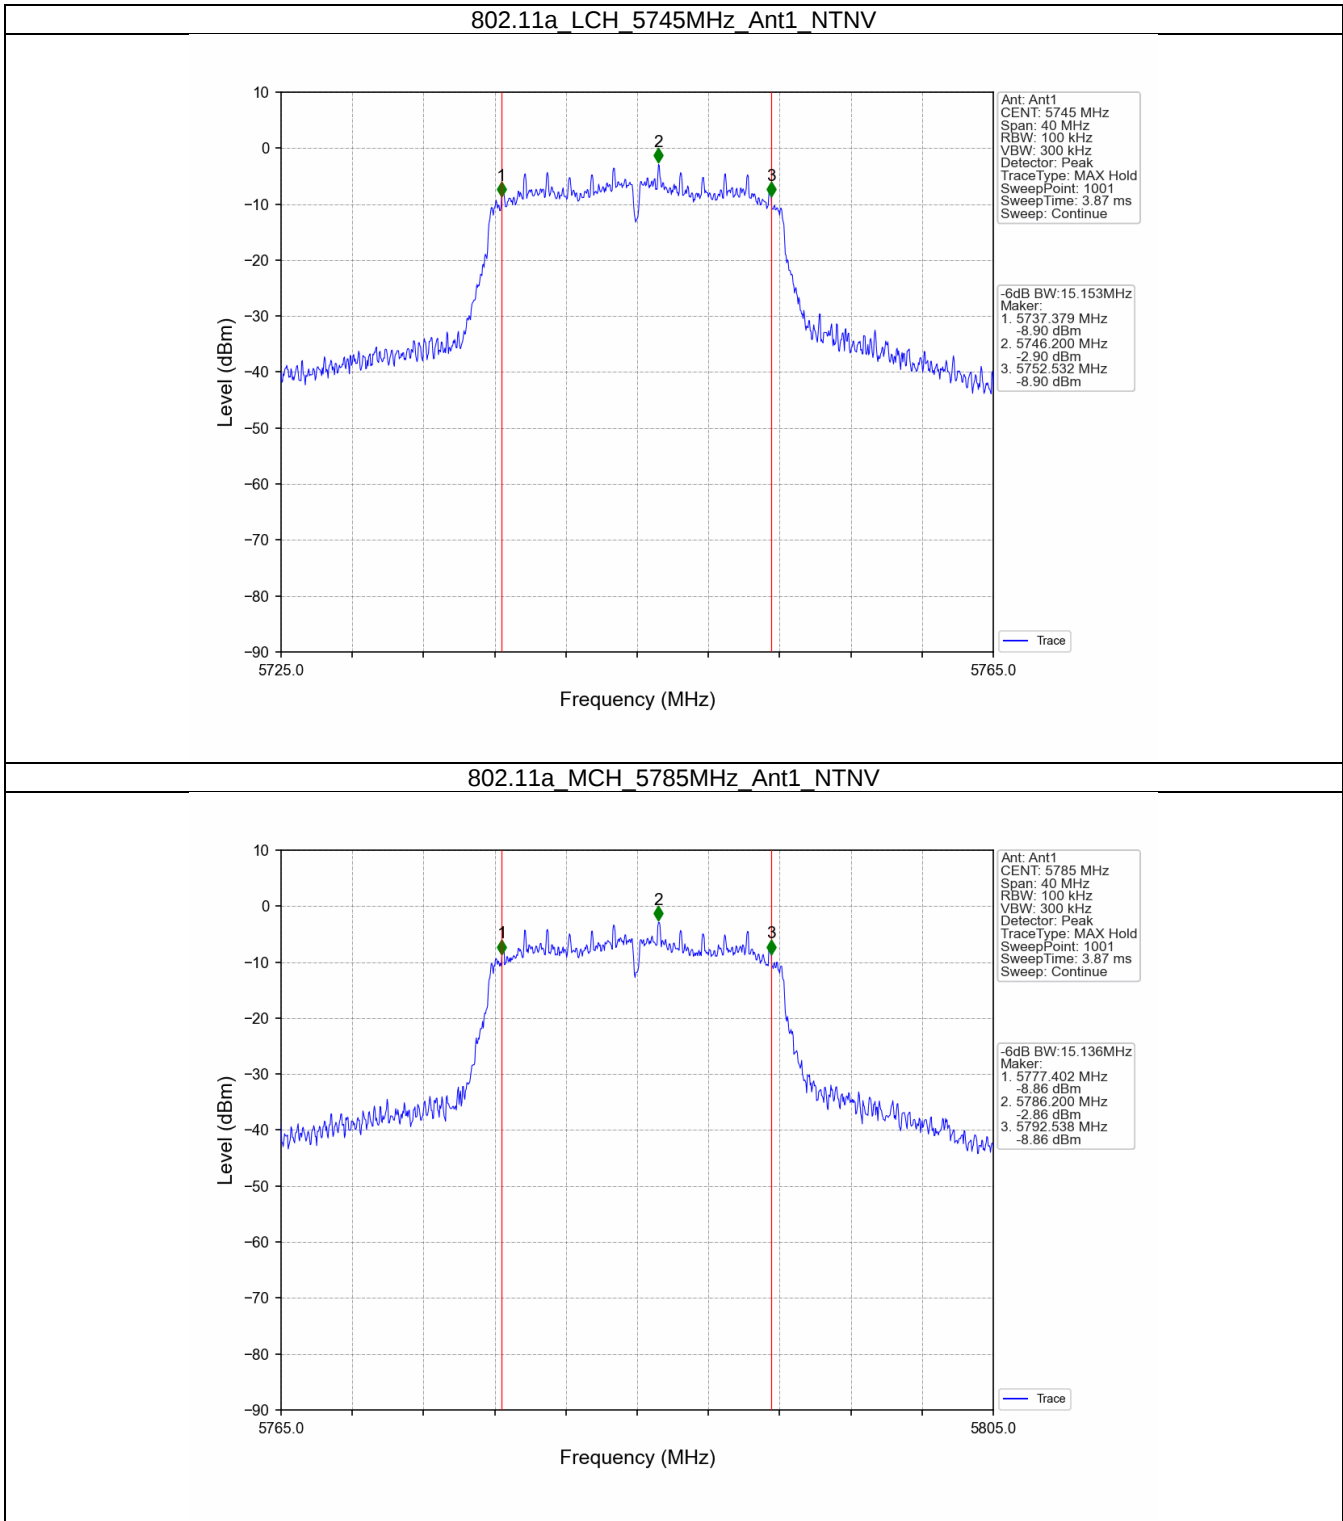


802.11a_HCH_5825MHz_Ant1_NTNV

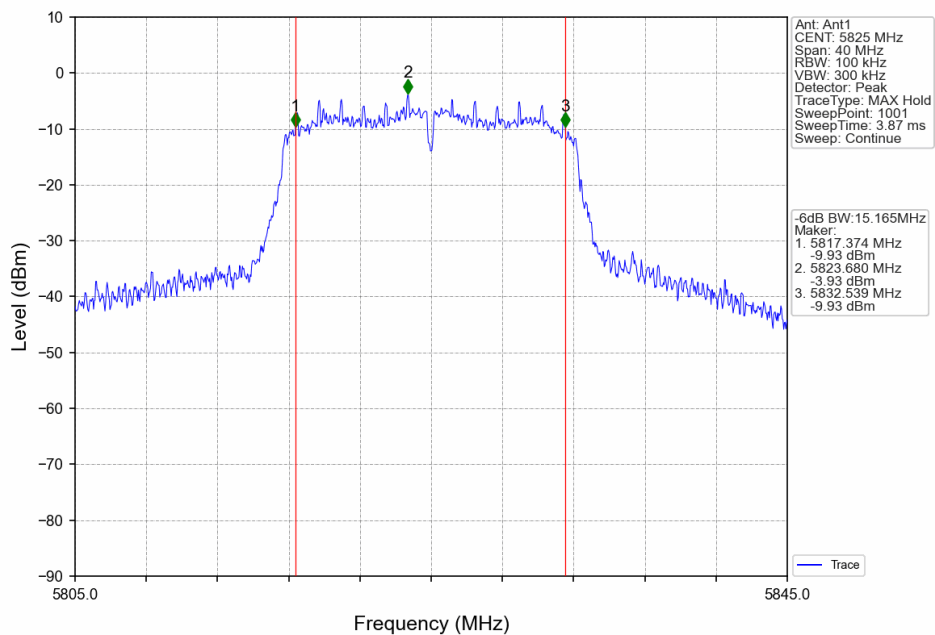


802.11n(HT20)_LCH_5745MHz_Ant1_NTNV

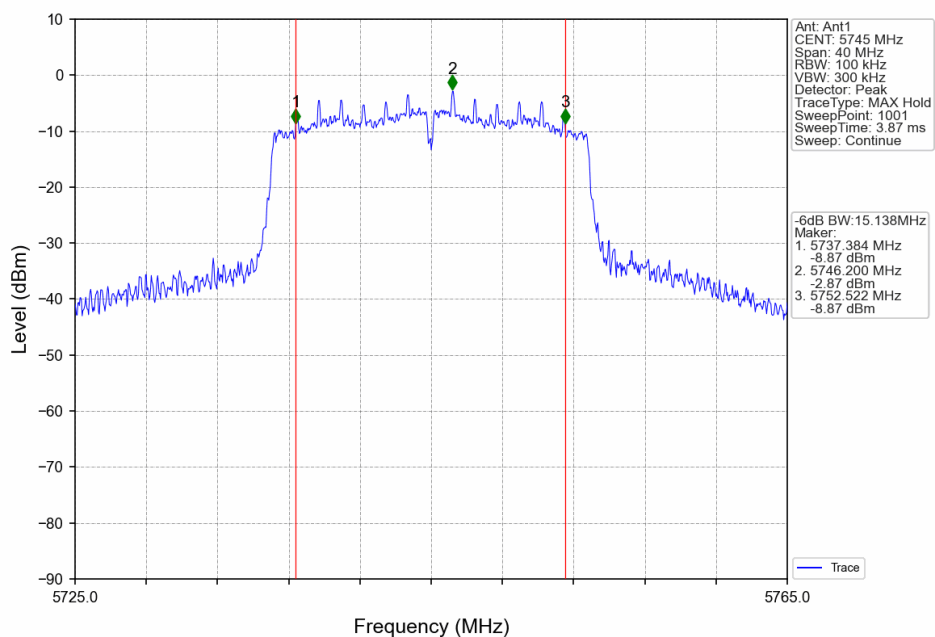


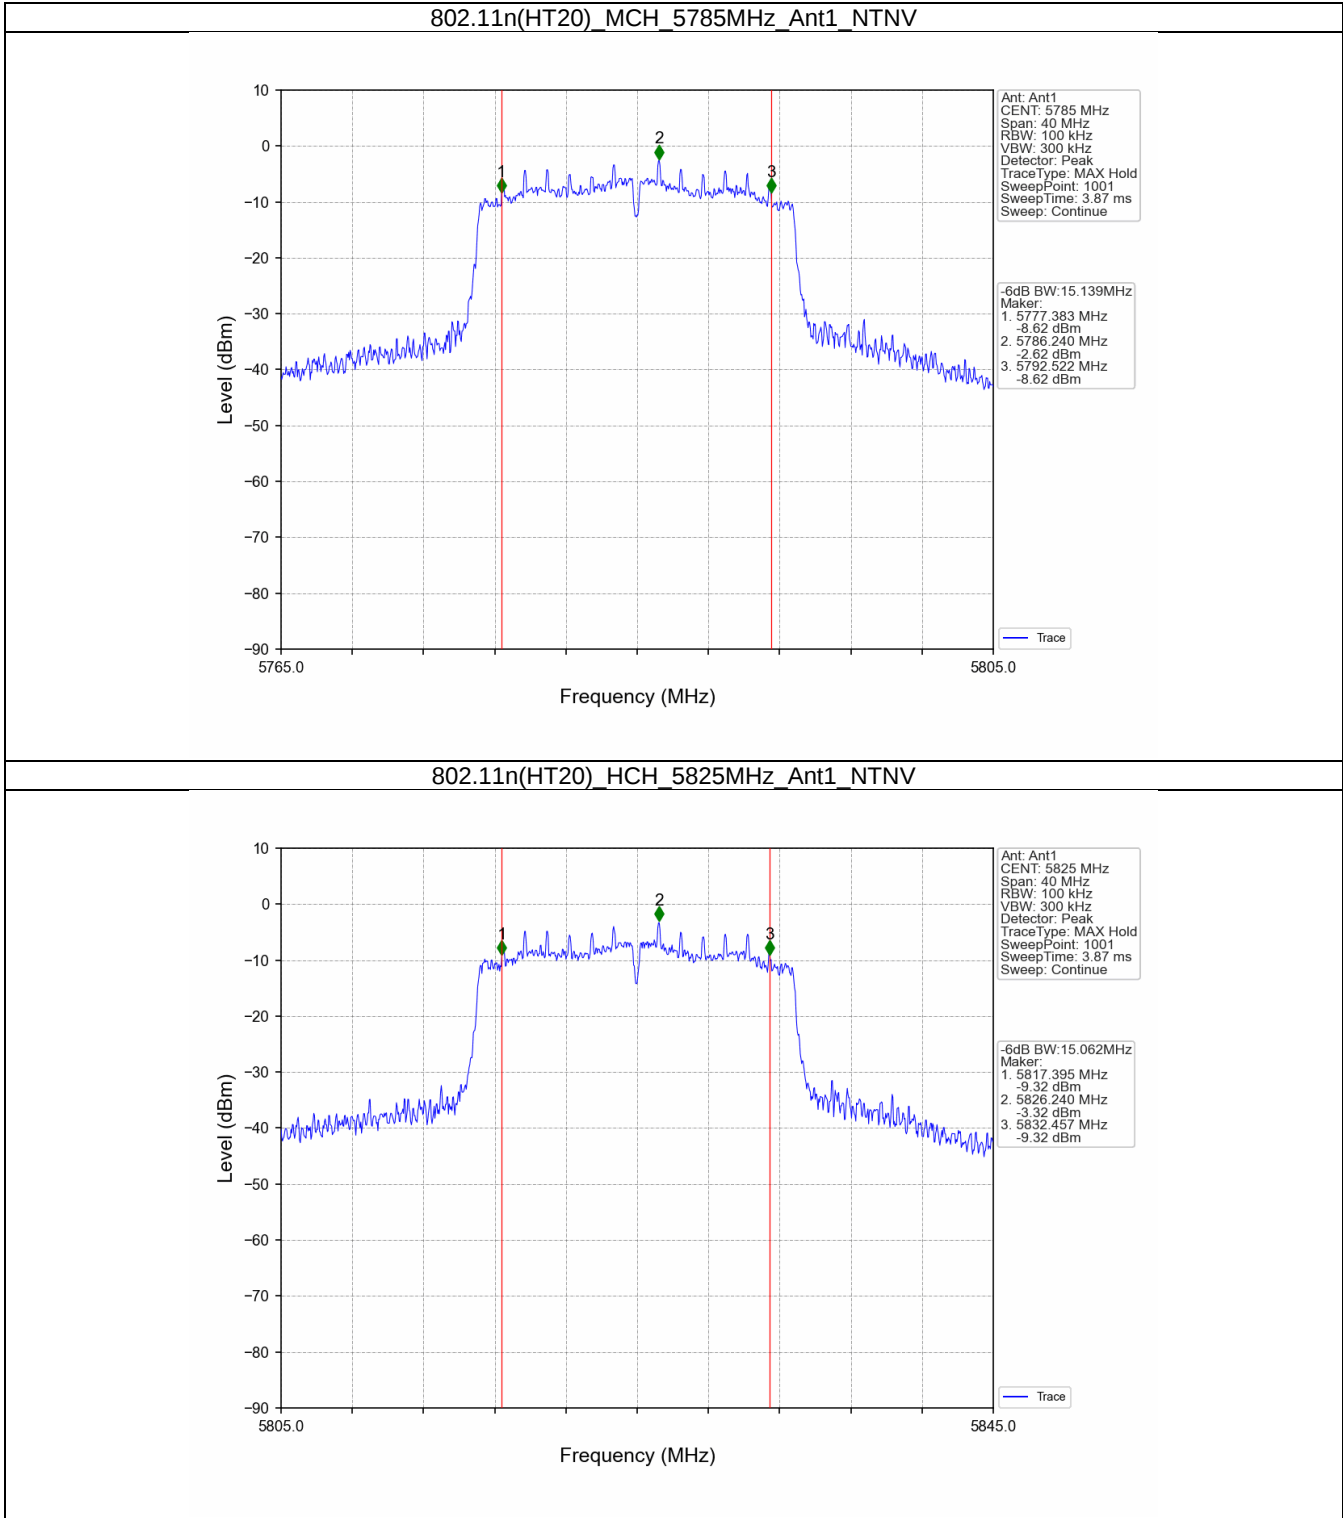

802.11n(HT40)_LCH_5755MHz_Ant1_NTNV

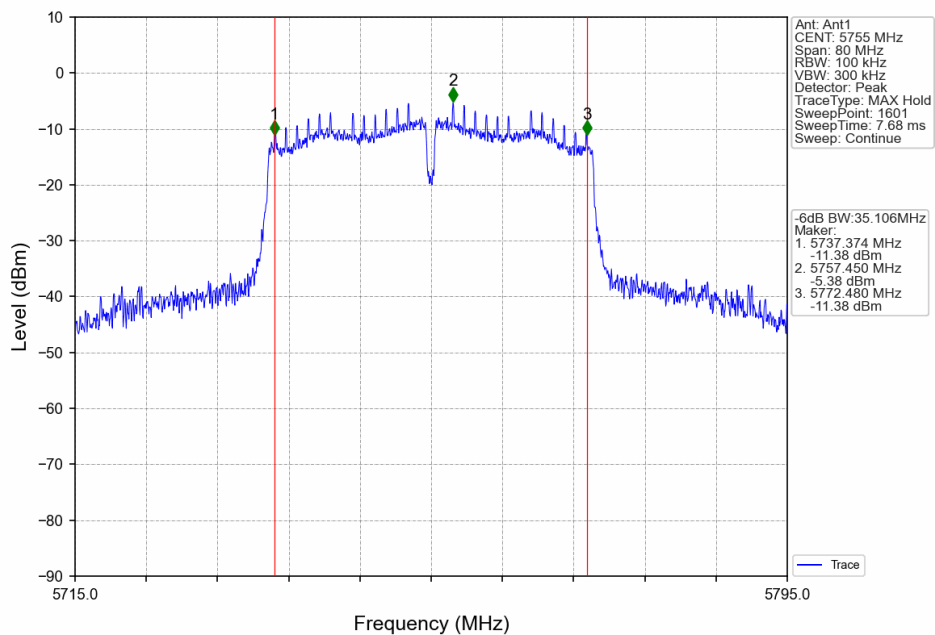

802.11n(HT40)_HCH_5795MHz_Ant1_NTNV

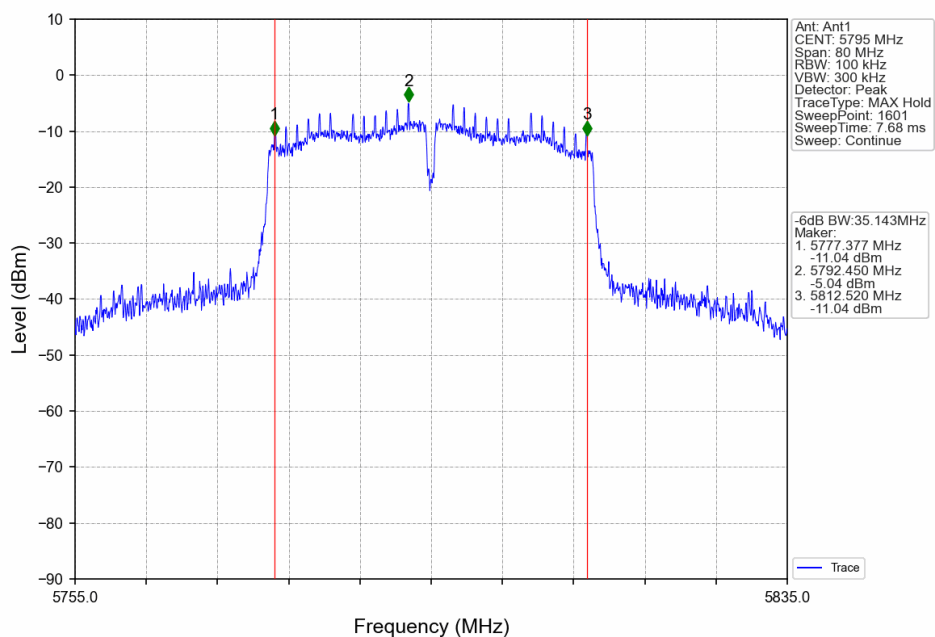

2. Maximum Conducted Output Power

2.1 Power

2.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Maximum Average Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
802.11a	SISO	5745	7.18	<=30	Pass
		5785	7.31	<=30	Pass
		5825	6.53	<=30	Pass
802.11n (HT20)	SISO	5745	7.07	<=30	Pass
		5785	7.23	<=30	Pass
		5825	6.49	<=30	Pass
802.11n (HT40)	SISO	5755	7.40	<=30	Pass
		5795	7.53	<=30	Pass
Note1: Antenna Gain: Ant1: 3.47dBi;					


3. Maximum Power Spectral Density

3.1 PSD-Band3


3.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/500kHz)		Verdict
			ANT1	Limit	
802.11a	SISO	5745	-5.58	<=30	Pass
		5785	-5.37	<=30	Pass
		5825	-6.17	<=30	Pass
802.11n (HT20)	SISO	5745	-5.61	<=30	Pass
		5785	-5.63	<=30	Pass
		5825	-6.59	<=30	Pass
802.11n (HT40)	SISO	5755	-8.41	<=30	Pass
		5795	-8.15	<=30	Pass
Note1: Antenna Gain: Ant1: 3.47dBi;					


3.1.2 Test Graph

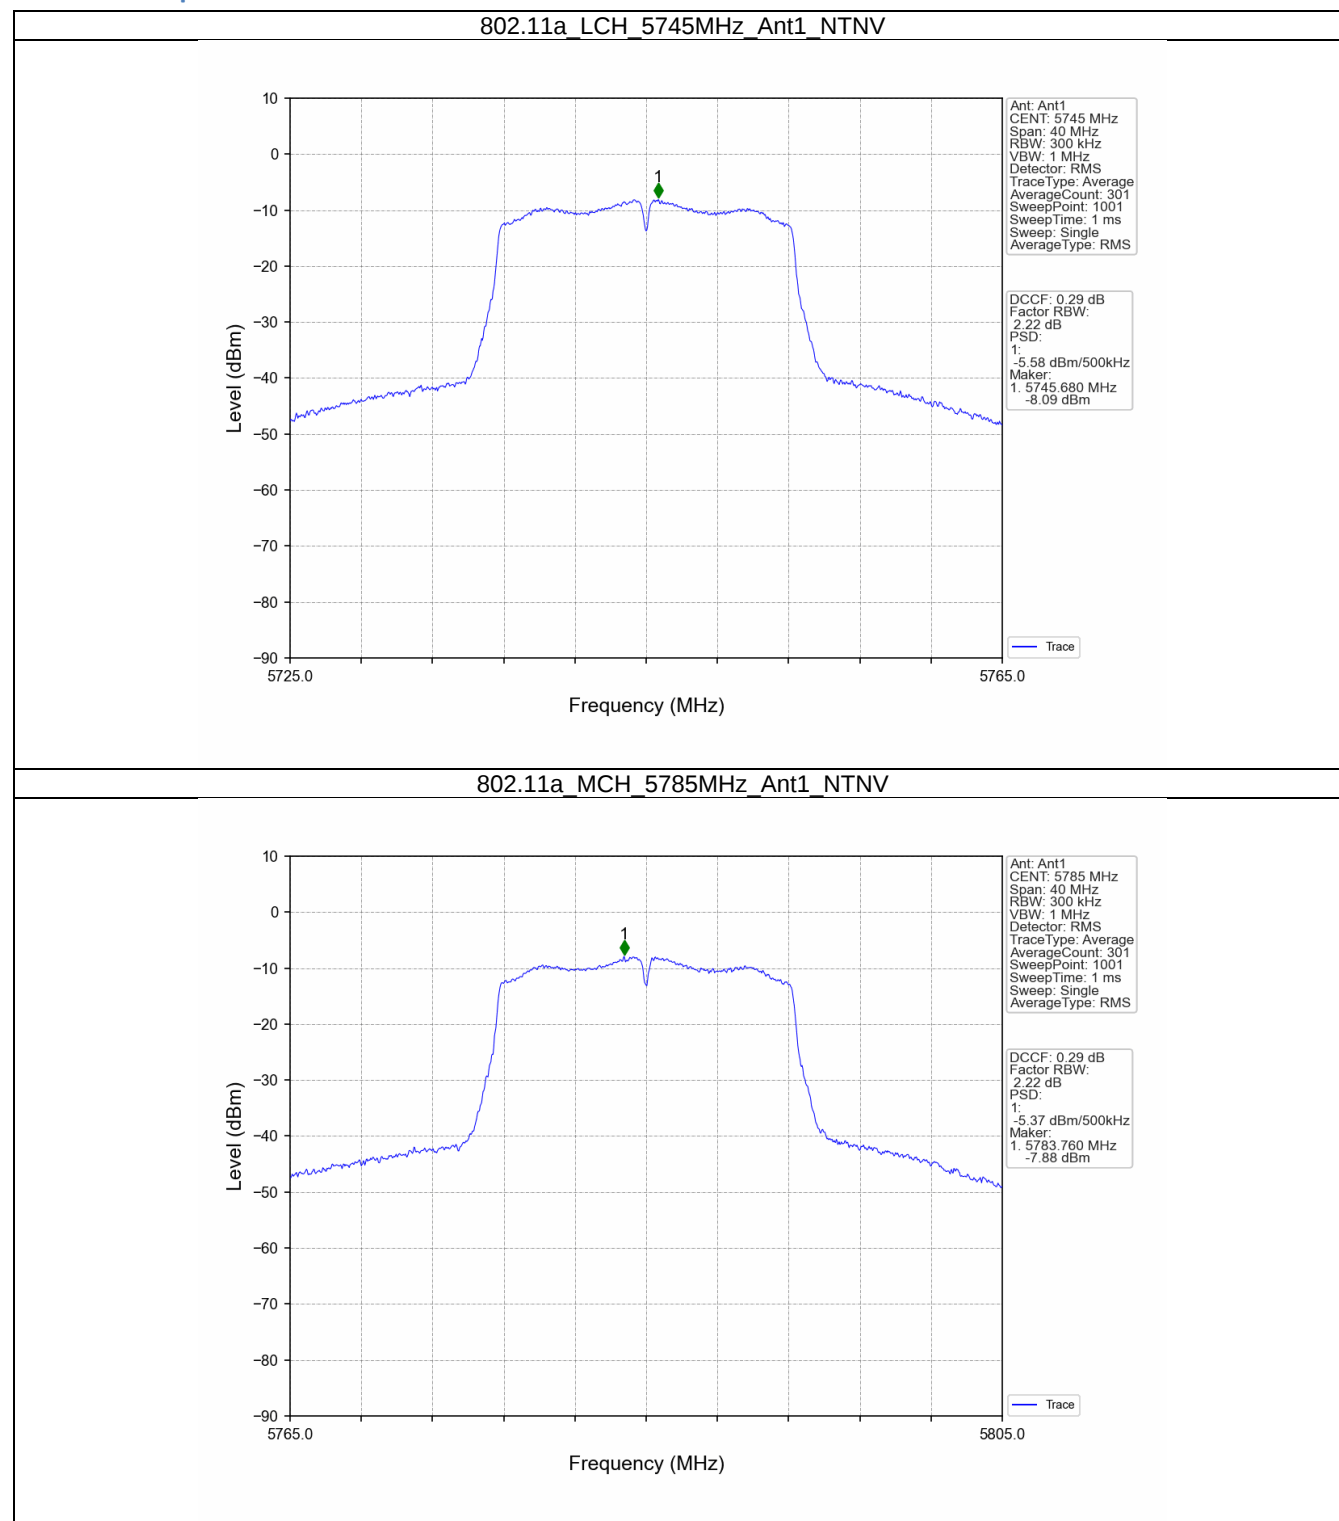


802.11a_HCH_5825MHz_Ant1_NTNV

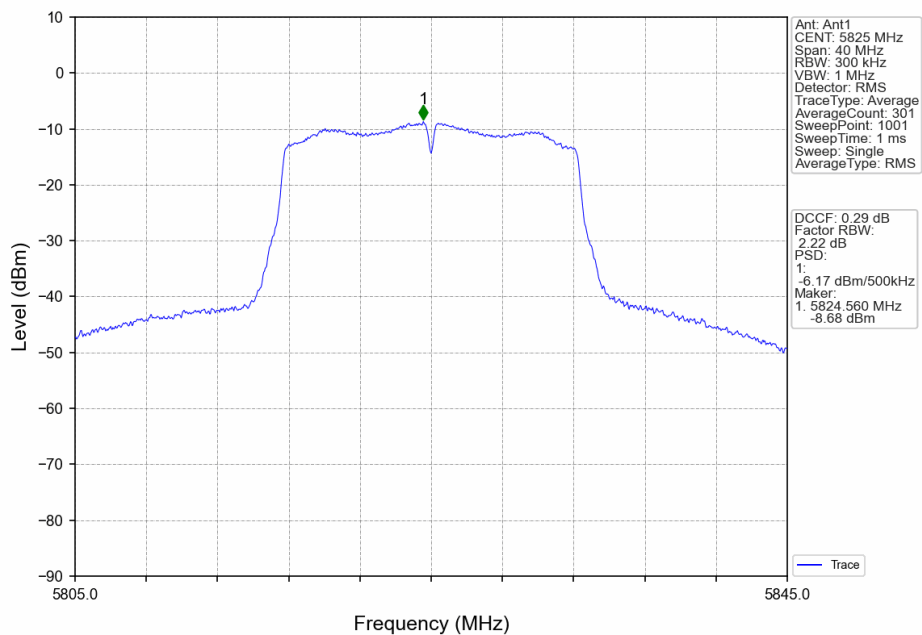


802.11n(HT20)_LCH_5745MHz_Ant1_NTNV

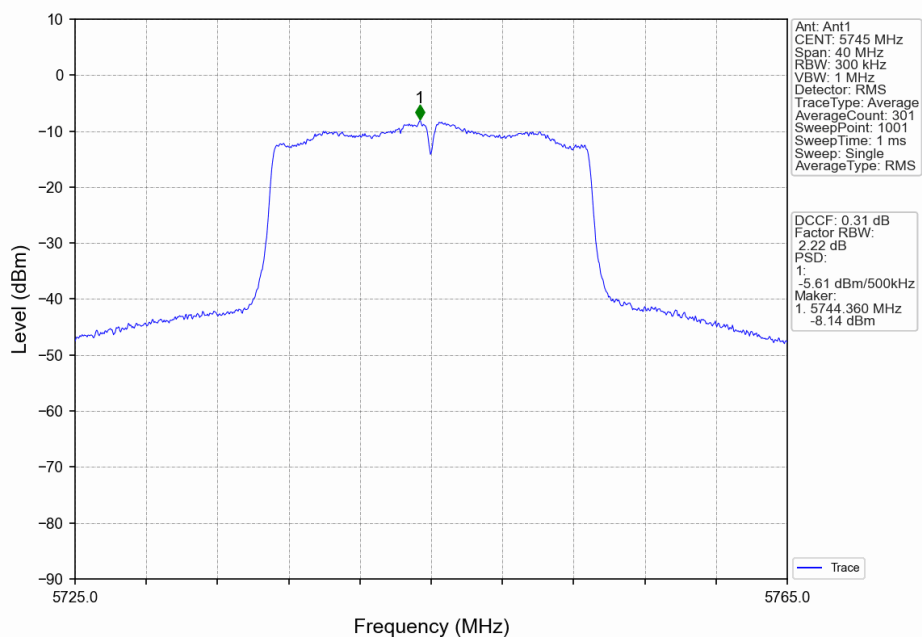


802.11n(HT20)_MCH_5785MHz_Ant1_NTNV

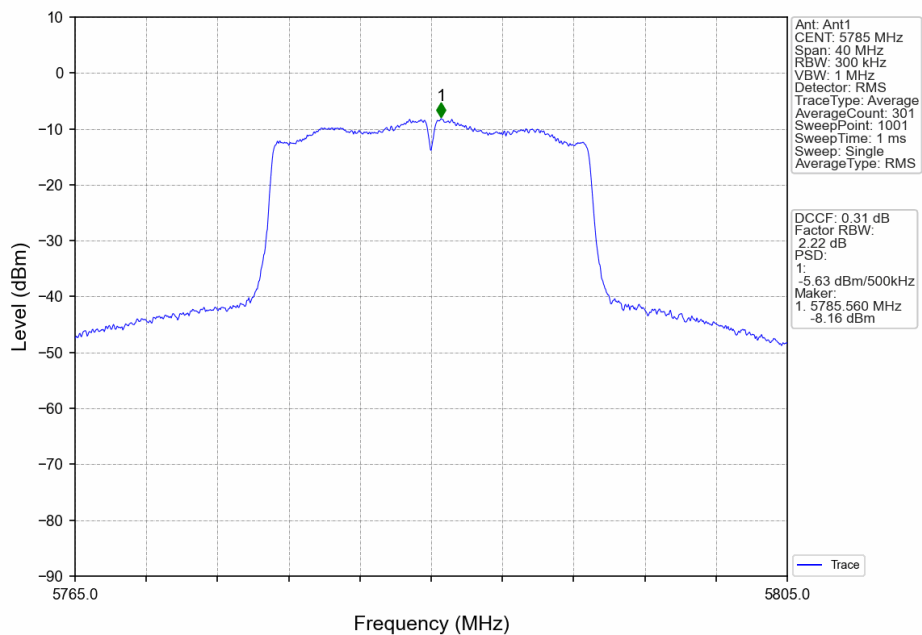


802.11n(HT20)_HCH_5825MHz_Ant1_NTNV

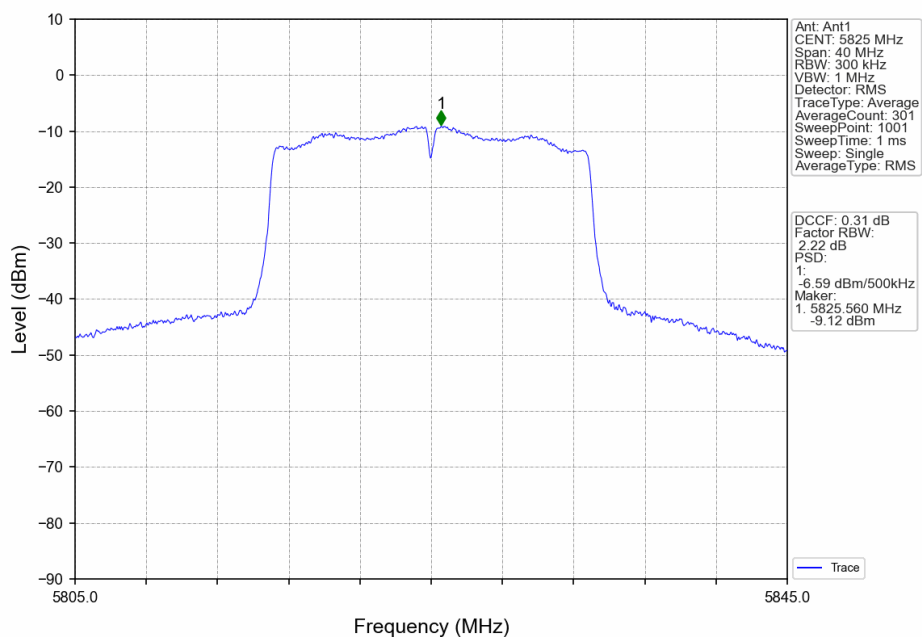

802.11n(HT40)_LCH_5755MHz_Ant1_NTNV

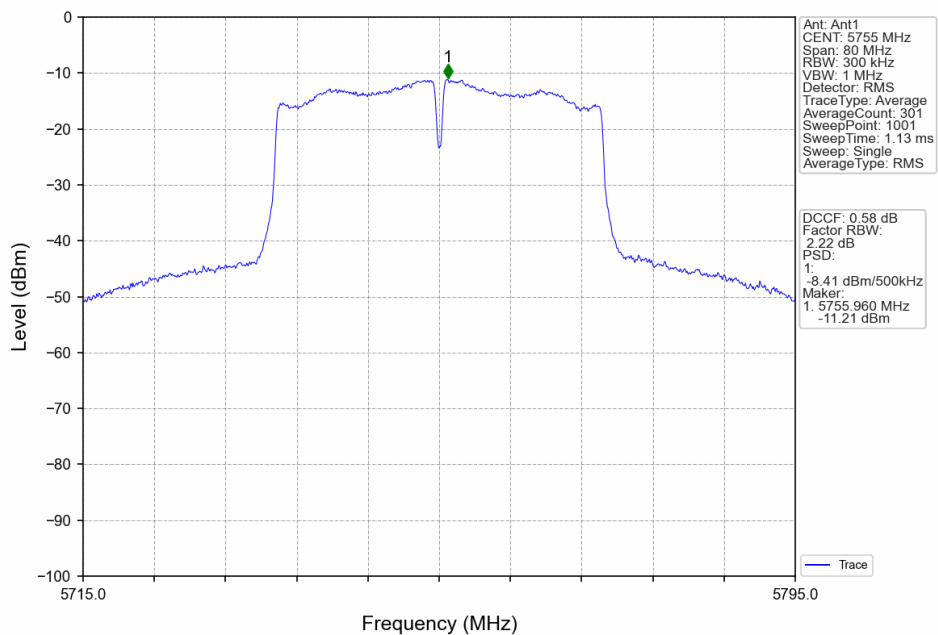

802.11n(HT40)_HCH_5795MHz_Ant1_NTNV

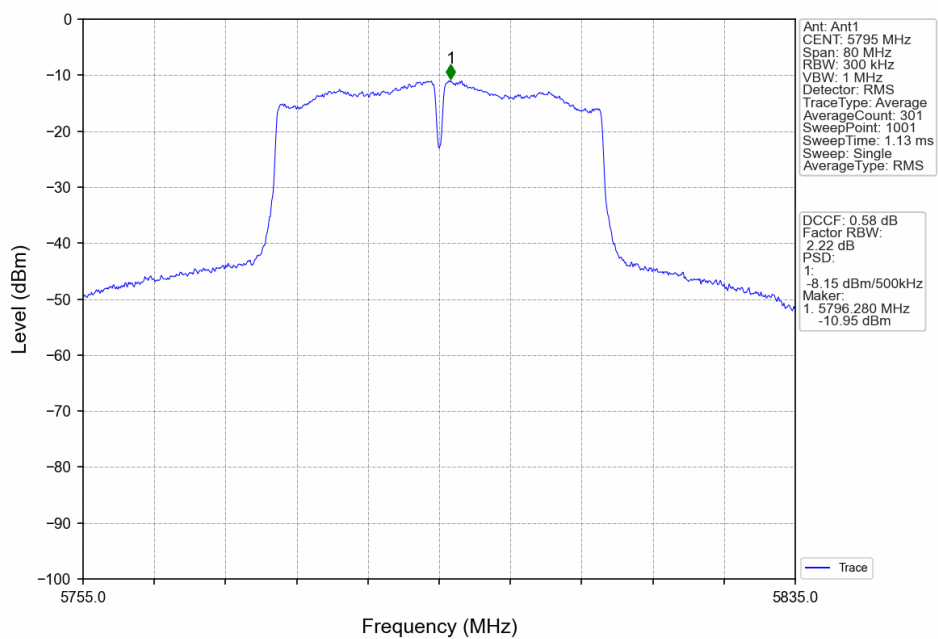

4. Frequency Stability

4.1 Ant1

4.1.1 Test Result

Ant1							
Mode	TX Type	Frequency (MHz)	Temperature (°C)	Voltage (VAC)	Measured Frequency (MHz)	Limit (MHz)	Verdict
Carrier Wave	SISO	5745	20	102	5744.944	5725 to 5850	Pass
				120	5744.944	5725 to 5850	Pass
				138	5744.944	5725 to 5850	Pass
			-30	120	5744.944	5725 to 5850	Pass
			-20	120	5744.944	5725 to 5850	Pass
			-10	120	5744.944	5725 to 5850	Pass
			0	120	5744.944	5725 to 5850	Pass
			10	120	5744.944	5725 to 5850	Pass
			30	120	5744.944	5725 to 5850	Pass
			40	120	5744.944	5725 to 5850	Pass
			50	120	5744.944	5725 to 5850	Pass
		5785	20	102	5784.943	5725 to 5850	Pass
				120	5784.943	5725 to 5850	Pass
				138	5784.943	5725 to 5850	Pass
			-30	120	5784.943	5725 to 5850	Pass
			-20	120	5784.943	5725 to 5850	Pass
			-10	120	5784.943	5725 to 5850	Pass
			0	120	5784.943	5725 to 5850	Pass
			10	120	5784.943	5725 to 5850	Pass
			30	120	5784.943	5725 to 5850	Pass
			40	120	5784.943	5725 to 5850	Pass
			50	120	5784.943	5725 to 5850	Pass
		5825	20	102	5824.942	5725 to 5850	Pass
				120	5824.942	5725 to 5850	Pass
				138	5824.942	5725 to 5850	Pass
			-30	120	5824.942	5725 to 5850	Pass
			-20	120	5824.942	5725 to 5850	Pass
			-10	120	5824.942	5725 to 5850	Pass
			0	120	5824.942	5725 to 5850	Pass
			10	120	5824.942	5725 to 5850	Pass
			30	120	5824.942	5725 to 5850	Pass
			40	120	5824.942	5725 to 5850	Pass
			50	120	5824.942	5725 to 5850	Pass
		5755	20	102	5754.943	5725 to 5850	Pass
				120	5754.943	5725 to 5850	Pass
				138	5754.943	5725 to 5850	Pass
			-30	120	5754.943	5725 to 5850	Pass
			-20	120	5754.943	5725 to 5850	Pass
			-10	120	5754.943	5725 to 5850	Pass
			0	120	5754.943	5725 to 5850	Pass
			10	120	5754.943	5725 to 5850	Pass
			30	120	5754.943	5725 to 5850	Pass
			40	120	5754.943	5725 to 5850	Pass
			50	120	5754.943	5725 to 5850	Pass
		5795	20	102	5794.942	5725 to 5850	Pass
				120	5794.942	5725 to 5850	Pass
				138	5794.942	5725 to 5850	Pass
			-30	120	5794.942	5725 to 5850	Pass
			-20	120	5794.942	5725 to 5850	Pass

			-10	120	5794.942	5725 to 5850	Pass
			0	120	5794.942	5725 to 5850	Pass
			10	120	5794.942	5725 to 5850	Pass
			30	120	5794.942	5725 to 5850	Pass
			40	120	5794.942	5725 to 5850	Pass
			50	120	5794.942	5725 to 5850	Pass