

TEST REPORT

Report No.: 13030732HKG-002

Guangdong Shifeng Toys Industrial Co., Ltd.

Application
For
Certification
(Original Grant)
(FCC ID: SNI91014R49MHZ)

Transmitter

Prepared and Checked by:

Signed On File
Lee Shui Tim, Tim
Assistant Engineer

Approved by:

Chan Chi Hung, Terry
Assistant Supervisor
Date: April 27, 2013

INTERTEK TESTING SERVICES

GENERAL INFORMATION

Guangdong Shifeng Toys Industrial Co., Ltd.
BRAND NAME: N/A, MODEL: 91014
SKU: 11863301

FCC ID: SNI91014R49MHZ

Grantee:	Guangdong Shifeng Toys Industrial Co., Ltd.
Grantee Address:	Chenghua Industrial Zone, Wenguan Road, Chenghai District, Shantou City, Guangdong Province, China.
Contact Person:	Jack Zhou
Tel:	86 754-85898699
Fax:	86 754-85897699
e-mail:	N/A
Manufacturer:	N/A
Manufacturer Address:	N/A
Brand Name:	N/A
Model:	91014
Additional model:	SKU: 11863301
Type of EUT:	Transmitter
Description of EUT:	Remote Control Car Series
Serial Number:	N/A
FCC ID:	SNI91014R49MHZ
Date of Sample Submitted:	18 Apr 2013
Date of Test:	18 Apr 2013 to 24 Apr 2013
Report No.:	13030732HKG-002
Report Date:	27 Apr 2013
Environmental Conditions:	Temperature: +10 to 40°C Humidity: 10 to 90%

INTERTEK TESTING SERVICES

SUMMARY OF TEST RESULT

Guangdong Shifeng Toys Industrial Co., Ltd.
BRAND NAME: N/A, MODEL: 91014

FCC ID: SNI91014R49MHZ

TEST SPECIFICATION	REFERENCE	RESULTS
Transmitter Field Strength and Bandwidth Requirement	15.235	Pass

The equipment under test is found to be complying with the following standards:
FCC Part 15, October 1, 2011 Edition

Note:

1. The EUT uses a permanently attached antenna which, in accordance to section 15.203, is considered sufficient to comply with the provisions of this section.
2. Pursuant to FCC part 15 Section 15.215(c), the 20 dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

INTERTEK TESTING SERVICES

Table of Contents

1.0	<u>General Description</u>	1
1.1	Product Description	1
1.2	Related Submittal(s) Grants	1
1.3	Test Methodology	1
1.4	Test Facility	2
2.0	<u>System Test Configuration</u>	3
2.1	Justification	3
2.2	EUT Exercising Software	3
2.3	Special Accessories	3
2.4	Equipment Modification	3
2.5	Measurement Uncertainty	3
2.6	Support Equipment List and Description	3
3.0	<u>Emission Results</u>	4
3.1	Field Strength Calculation	4
3.2	Radiated Emission Configuration Photograph	5
3.3	Radiated Emission Data	5
4.0	<u>Equipment Photographs</u>	7
5.0	<u>Product Labelling</u>	7
6.0	<u>Technical Specifications</u>	7
7.0	<u>Instruction Manual</u>	7
8.0	<u>Miscellaneous Information</u>	8
8.1	Measured Bandwidth / RF Output Signal	8
8.2	Discussion of Pulse Desensitization	8
8.3	Calculation of Average Factor	8
8.4	Emissions Test Procedures	9
9.0	<u>Equipment List</u>	10

INTERTEK TESTING SERVICES

1.0 General Description

1.1 Product Description

The Equipment Under Test (EUT) is a transmitter of a RC Car system, which is operating at 49.860MHz as dictated by a crystal. The EUT is powered by 2 x 1.5V AA size batteries. The EUT has a pair of control keys and a red LED indicator.

After switching ON the EUT and its corresponding receiver (i.e. car), activating the control key on the EUT can control the receiver moving forward, backward, left and right.

The Model: SKU:11863301 is the same as the Model: 91014 in hardware aspect. The difference in model number serves as marketing strategy. Only Model: 91014 is tested.

Antenna Type : Integral, External

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

1.2 Related Submittal(s) Grants

The Declaration of the Conformity procedure of receiver for this transmitter (with FCC ID: SNI91014R49MHZ) is being processed as the same time of this application.

1.3 Test Methodology

Radiated emission measurements were performed according to the procedures in ANSI C63.4 (2009). All radiated measurements were performed in an Open Area Test Site. Preliminary scans were performed in the Open Area Test Site only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the “**Justification Section**” of this Application.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located at Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong. This test facility and site measurement data have been placed on file with the FCC.

INTERTEK TESTING SERVICES

2.0 System Test Configuration

2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.4 (2009).

The device was powered by 2 *1.5V AA alkaline batteries.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The unit was operated standalone and placed in the center of the turntable.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the wooden turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

2.2 EUT Exercising Software

There was no special software to exercise the device. Once the unit is powered up, it transmits the RF signal continuously.

2.3 Special Accessories

There are no special accessories necessary for compliance of this product.

2.4 Equipment Modification

Any modifications installed previous to testing by Guangdong Shifeng Toys Industrial Co., Ltd. will be incorporated in each production model sold/leased in the United States.

No modifications were installed by Intertek Testing Services Hong Kong Ltd.

2.5 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

2.6 Support Equipment List and Description

N/A.

INTERTEK TESTING SERVICES

3.0 Emission Results

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + CF - AG - AV$$

where $FS = \text{Field Strength in } dB\mu V/m$

$RA = \text{Receiver Amplitude (including preamplifier) in } dB\mu V$

$CF = \text{Cable Attenuation Factor in } dB$

$AF = \text{Antenna Factor in } dB$

$AG = \text{Amplifier Gain in } dB$

$AV = \text{Average Factor in } dB$

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

where $FS = \text{Field Strength in } dB\mu V/m$

$RR = RA - AG - AV \text{ in } dB\mu V$

$LF = CF + AF \text{ in } dB$

Assume a receiver reading of 52.0 $dB\mu V$ is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of 27 $dB\mu V/m$. This value in $dB\mu V/m$ was converted to its corresponding level in $\mu V/m$.

$$RA = 52.0 \text{ } dB\mu V/m$$

$$AF = 7.4 \text{ dB}$$

$$RR = 18.0 \text{ } dB\mu V$$

$$CF = 1.6 \text{ dB}$$

$$LF = 9.0 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$AV = 5.0 \text{ dB}$$

$$FS = RR + LF$$

$$FS = 18 + 9 = 27 \text{ } dB\mu V/m$$

$$\text{Level in } \mu V/m = \text{Common Antilogarithm } [(27 \text{ } dB\mu V/m)/20] = 22.4 \text{ } \mu V/m$$

INTERTEK TESTING SERVICES

3.2 Radiated Emission Configuration Photograph

The worst case in radiated emission was found at 199.440 MHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgment: Passed by 9.4 dB

INTERTEK TESTING SERVICES

Applicant: Guangdong Shifeng Toys Industrial Co., Ltd. Date of Test: 18 -23 Apr 2013

Model: 91014

Worst-Case Operating Mode: Transmitting

Table 1

Radiated Emissions Pursuant to FCC Part 15 Section 235 Requirement

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp (dB)	Antenna Factor (dB)	Average Factor (dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
V	49.860	71.8	16	11.0	0.0	66.8	80.0	-13.2
H	99.720	37.6	16	12.0	-	33.6	43.5	-9.9
H	149.580	35.8	16	14.0	-	33.8	43.5	-9.7
H	199.440	34.1	16	16.0	-	34.1	43.5	-9.4
H	249.300	31.0	16	20.0	-	35.0	46.0	-11.0
H	299.160	28.2	16	22.0	-	34.2	46.0	-11.8
H	349.020	26.4	16	24.0	-	34.4	46.0	-11.6
H	398.880	24.6	16	25.0	-	33.6	46.0	-12.4
H	448.740	23.8	16	26.0	-	33.8	46.0	-12.2
H	498.600	23.5	16	26.0	-	33.5	46.0	-12.5

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.

INTERTEK TESTING SERVICES

4.0 Equipment Photographs

For electronic filing, the photographs are saved with filename: external photos.pdf and internal photos.pdf.

5.0 Product Labelling

For electronics filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

6.0 Technical Specifications

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

7.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.


INTERTEK TESTING SERVICES

8.0 Miscellaneous Information

The miscellaneous information includes details of the test procedure.

8.1 Measured Bandwidth

The plot shows the fundamental emission is confined in the specified band. The field strength of any emission appearing between the band edges and up to 10kHz above and below the band edges (49.81 and 49.91 MHz) is at least 26 dB below the carrier level. And at 49.81 & 49.91 MHz, there are at least 44.3 dB below the carrier level. It meets requirement of Section 15.235(b).

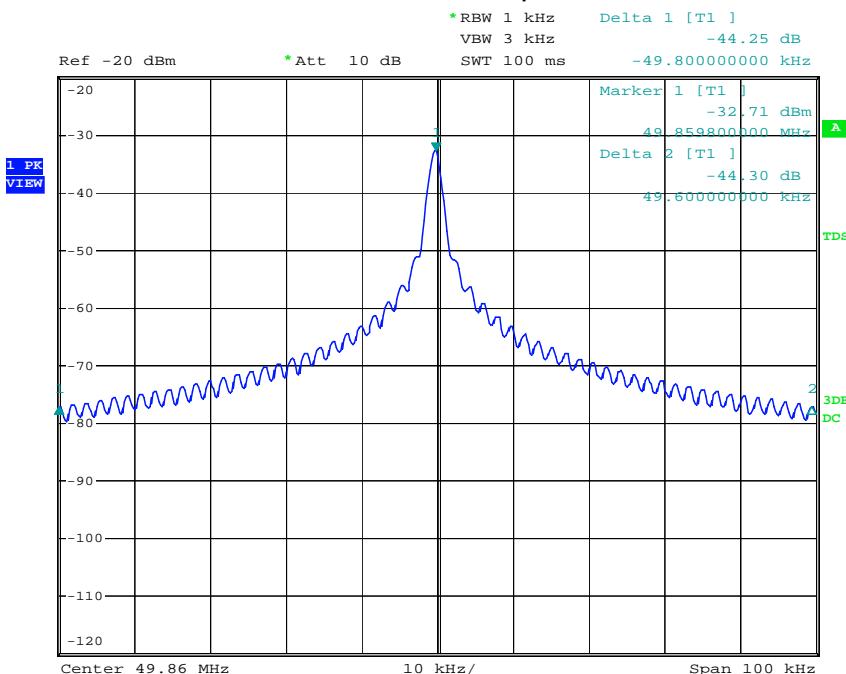

Date: 19.APR.2013 21:12:37

8.2 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. Since the transmitter transmits the RF signal continuously.

8.3 Calculation of Average Factor

The average factor is not applicable for this device as the transmitted signal is a continuously signal.

INTERTEK TESTING SERVICES

8.4 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services Hong Kong Ltd. in the measurements of transmitter operating under the Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.4 (2009).

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately one meter in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axis to obtain maximum emission levels. The antenna height and polarization are also varied during the testing to search for maximum signal levels. T

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Exhibit 8.3.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

INTERTEK TESTING SERVICES

8.4 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements were made as described in ANSI C63.4 (2009).

The IF bandwidth used for measurement of radiated signal strength was 100 kHz or greater when frequency is below 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Exhibit 8.1). Above 1000 MHz, a resolution bandwidth of 1 MHz is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the forbidden bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, unless otherwise reported. Measurements taken at a closer distance are so marked.

INTERTEK TESTING SERVICES

9.0 Equipment List

1) Radiated Emissions Test

Equipment	EMI Test Receiver	Log Periodic Antenna	Biconical Antenna
Registration No.	EW-2666	EW-0446	EW-2512
Manufacturer	R&S	EMCO	EMCO
Model No.	ESCI7	3146	3104C
Calibration Date	May 21, 2012	Oct 31, 2011	Nov 15, 2011
Calibration Due Date	May 21, 2013	Apr 30, 2013	May 15, 2013

Equipment	14m RF High Frequency Cable (1 - 18)GHz	RF Amplifiers(100MHz to 12GHz) 2 Pieces	Spectrum Analyzer
Registration No.	EW-2552	EW-1779	EW-2188
Manufacturer	RADIALL	MITEQ	AGILENTTECH
Model No.	SHF5M sma m - sma m ra	AMF-4D-001120-34-13P	E4407B
Calibration Date	Aug 29, 2012	Sep 22, 2012	Nov 05, 2012
Calibration Due Date	Aug 29, 2013	Sep 22, 2013	Nov 05, 2013

2) Bandwidth Measurement

Equipment	Spectrum Analyzer
Registration No.	EW-2329
Manufacturer	ROHDE SCHWARZ
Model No.	FSP3
Calibration Date	Jan 30, 2013
Calibration Due Date	Jan 30, 2014