

FCC PART 15 B, CLASS B TEST REPORT

For

Archos S.A.

12 rue Ampère - 91430 Igny France

FCC ID: SOVAC101BXS2

Report Type: Original Report	Product Type: 10.1 Inch Tablet
Test Engineer: Mike Hu	<i>Mike Hu</i>
Report Number: RSZ140325005-00A	
Report Date: 2014-04-28	
Reviewed By: RF Engineer	<i>Jimmy Xiao</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST FACILITY	3
SYSTEM TEST CONFIGURATION.....	4
DESCRIPTION OF TEST CONFIGURATION	4
EUT EXERCISE SOFTWARE	4
SPECIAL ACCESSORIES.....	4
EQUIPMENT MODIFICATIONS	4
SUPPORT EQUIPMENT LIST AND DETAILS	4
EXTERNAL I/O CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP	5
SUMMARY OF TEST RESULTS	6
FCC §15.107 – AC LINE CONDUCTED EMISSIONS.....	7
APPLICABLE STANDARD	7
MEASUREMENT UNCERTAINTY.....	7
EUT SETUP	7
EMI TEST RECEIVER SETUP.....	8
TEST PROCEDURE	8
TEST EQUIPMENT LIST AND DETAILS.....	8
CORRECTED FACTOR & MARGIN CALCULATION	8
TEST RESULTS SUMMARY	9
TEST DATA	9
FCC §15.109 - RADIATED SPURIOUS EMISSIONS	12
APPLICABLE STANDARD	12
MEASUREMENT UNCERTAINTY.....	12
EUT SETUP	12
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE	13
TEST EQUIPMENT LIST AND DETAILS.....	13
CORRECTED AMPLITUDE & MARGIN CALCULATION	14
TEST RESULTS SUMMARY	14
TEST DATA	14

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The Archos S.A.'s product, model number: AC101BXS2 (FCC ID: SOVAC101BXS2) or the "EUT" in this report is a 10.1 Inch Tablet, the pad was measured approximately: 27.3 cm (L) × 17.0 cm (W) × 1.1 cm (H), and its keyboard was measured approximately: 27.3 cm (L) × 17.2 cm (W) × 0.5 cm (H), rated with input voltage: DC 3.7 V rechargeable battery or DC 5.0V from adapter. The highest operating frequency is 1.4 GHz.

Adapter 1 Information: SWITCHING ADAPTER

Model: ASSA28-050200

Input: AC 100-240V, 50/60 Hz, 0.45A

Output: DC 5.0V, 2000mA

**All measurement and test data in this report was gathered from production sample serial number: 1403164 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2014-03-25.*

Objective

This test report is prepared on behalf of Archos S.A. in accordance with Part 2-Subpart J, Part 15-Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine the compliance of the EUT with FCC Part 15 B.

Related Submittal(s)/Grant(s)

Part 15.247 DSS and DTS submissions with ID: SOVAC101BXS2.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a manufacturer testing fashion.

EUT Exercise Software

“BurnIn test v5.3” exercise software was used.

Special Accessories

No special accessory.

Equipment Modifications


No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	PC	DCSCSF	127BPX2
DELL	Monitor	E178WFPC	CN-OWY564-64180-7C4-2SQH
ECOM	Modem	5600pbs	N/A
TOSHIBA	SD card	C08G	T0817CQA
DELL	Mouse	MOC5UO	G1B0096D
DELL	Keyboard	L100	CNORH656658907BL04TY
Earphone	G’Five	G201	1312232
DELL	LCD Display	ST2420LB	CN-0X0K27-74261-2AF-090U

External I/O Cable

Cable Description	Length (m)	From / Port	To
Unshielding Undetachable DC Cable	1.0	EUT	Adapter
Unshielding Detachable Audio Cable	0.8	EUT	Earphone
Unshielding Detachable AC Cable	1.0	Monitor	Main
Shielding Detachable USB Cable	0.8	EUT	PC
Unshielding Detachable AC Cable	1.0	Main	Monitor
Unshielding Detachable AC Cable	1.0	Main	PC
Shielding Detachable VGA Cable	1.5	Monitor	PC
Unshielding Detachable RS232 Cable	1.5	Modem	PC
Unshielding Undetachable DC Cable	1.0	Modem	Adapter
Unshielding Detachable AC Cable	1.0	Adapter	Main
Shielding Undetachable K/B Cable	1.5	K/B	PC
Shielding Undetachable Mouse Cable	1.5	Mouse	PC
Shielding Undetachable HDMICable	1.5	EUT	LCD Display

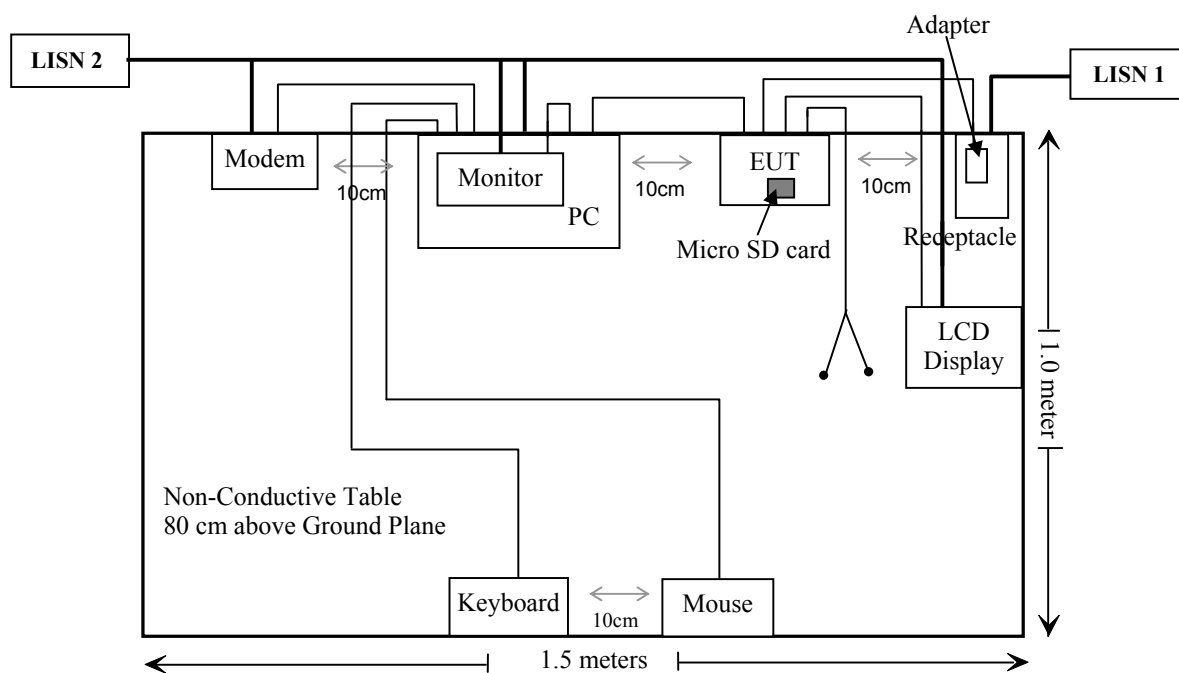Block Diagram of Test Setup

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Compliance
§15.109	Radiated Spurious Emissions	Compliance

FCC §15.107 – AC LINE CONDUCTED EMISSIONS

Applicable Standard

According to FCC §15.107


Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements maybe receiver reading, attenuation of the connection between LISN and receiver, LISN voltage division factor, LISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report

Port	Expanded Measurement uncertainty
AC Mains	3.26 dB (k=2, 95% level of confidence)
CAT 3	3.70 dB (k=2, 95% level of confidence)
CAT 5	3.86 dB (k=2, 95% level of confidence)
CAT 6	4.64 dB (k=2, 95% level of confidence)

EUT Setup

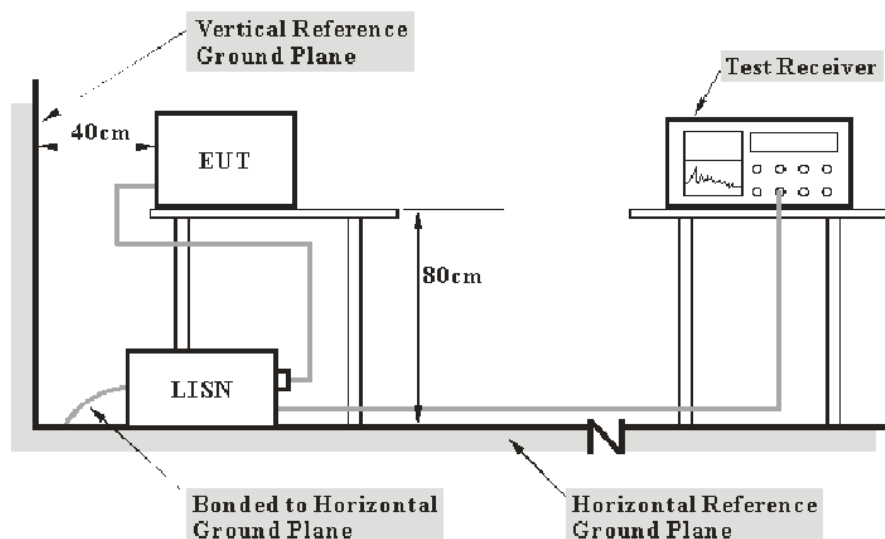

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with per ANSI C63.4-2009. The related limit was specified in FCC Part 15.107 Class B.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter of EUT was connected to the first LISN and the other relevant equipments were connected to the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2013-06-17	2014-06-17
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2013-05-07	2014-05-07
Rohde & Schwarz	LISN	ESH2-Z5	892107/021	2013-08-22	2014-08-22
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2013-10-15	2014-10-15
Rohde & Schwarz	CE Test software	EMC 32	V8.53	--	--

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.107, the worst margin reading as below:

16.2 dB at 0.734870 MHz in the Line conducted mode

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

in BACL., $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Mike Hu on 2014-04-21.


EUT Operation Mode: Charging & Downloading

AC 120V/60 Hz, Line

EMI Auto Test L

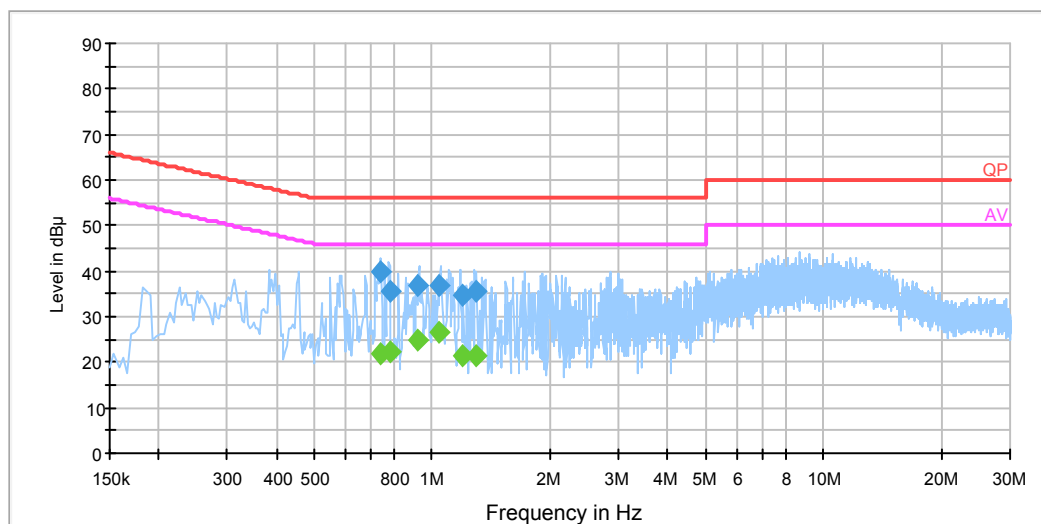

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.734870	39.8	19.6	56.0	16.2	QP
0.734870	21.7	19.6	46.0	24.3	Ave.
0.782390	35.4	19.5	56.0	20.6	QP
0.782390	22.2	19.5	46.0	23.8	Ave.
0.916110	36.7	19.5	56.0	19.3	QP
0.916110	24.9	19.5	46.0	21.1	Ave.
1.046250	37.0	19.5	56.0	19.0	QP
1.046250	26.6	19.5	46.0	19.4	Ave.
1.196270	34.9	19.5	56.0	21.1	QP
1.196270	21.4	19.5	46.0	24.6	Ave.
1.298710	35.8	19.5	56.0	20.2	QP
1.298710	21.3	19.5	46.0	24.7	Ave.

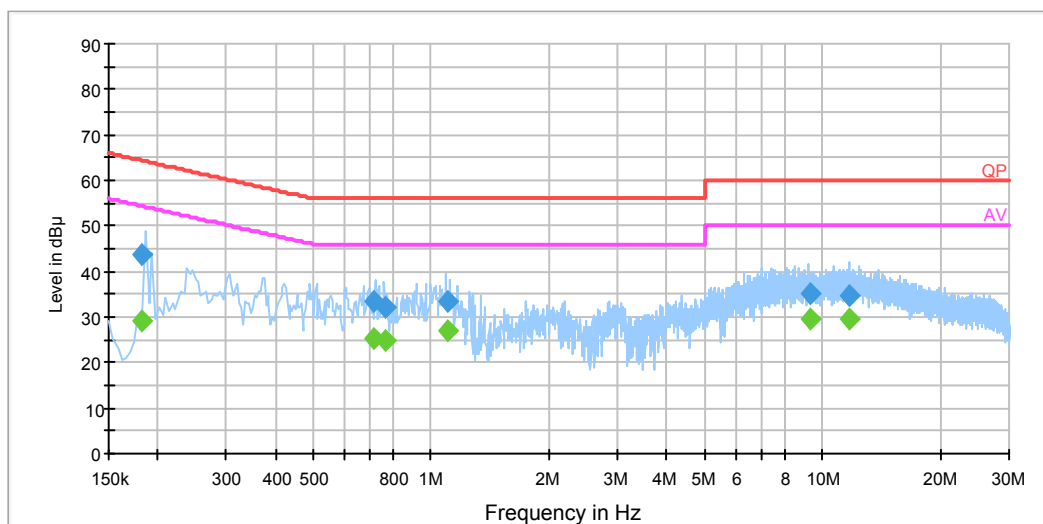AC 120V/60 Hz, Neutral**EMI Auto Test N**

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.181500	43.5	19.6	64.4	20.9	QP
0.181500	29.0	19.6	54.4	25.5	Ave.
0.711230	33.6	19.6	56.0	22.4	QP
0.711230	25.1	19.6	46.0	20.9	Ave.
0.766630	32.2	19.6	56.0	23.8	QP
0.766630	24.9	19.6	46.0	21.1	Ave.
1.097650	33.4	19.5	56.0	22.6	QP
1.097650	27.1	19.5	46.0	18.9	Ave.
9.267910	35.1	19.8	60.0	24.9	QP
9.267910	29.6	19.8	50.0	20.4	Ave.
11.689510	34.8	19.8	60.0	25.2	QP
11.689510	29.7	19.8	50.0	20.3	Ave.

Note:

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

FCC §15.109 - RADIATED SPURIOUS EMISSIONS

Applicable Standard

FCC §15.109


Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown in below table. And the uncertainty will not be taken into consideration for the test data recorded in the report

Frequency	Polarity	Measurement uncertainty
30 MHz~200 MHz	Horizontal	4.62 dB (k=2, 95% level of confidence)
	Vertical	4.54 dB (k=2, 95% level of confidence)
200 MHz~1 GHz	Horizontal	4.84 dB (k=2, 95% level of confidence)
	Vertical	5.91 dB (k=2, 95% level of confidence)
1 GHz~6 GHz	Horizontal/Vertical	4.68 dB (k=2, 95% level of confidence)
Above 6 GHz	Horizontal/Vertical	4.92 dB (k=2, 95% level of confidence)

EUT Setup

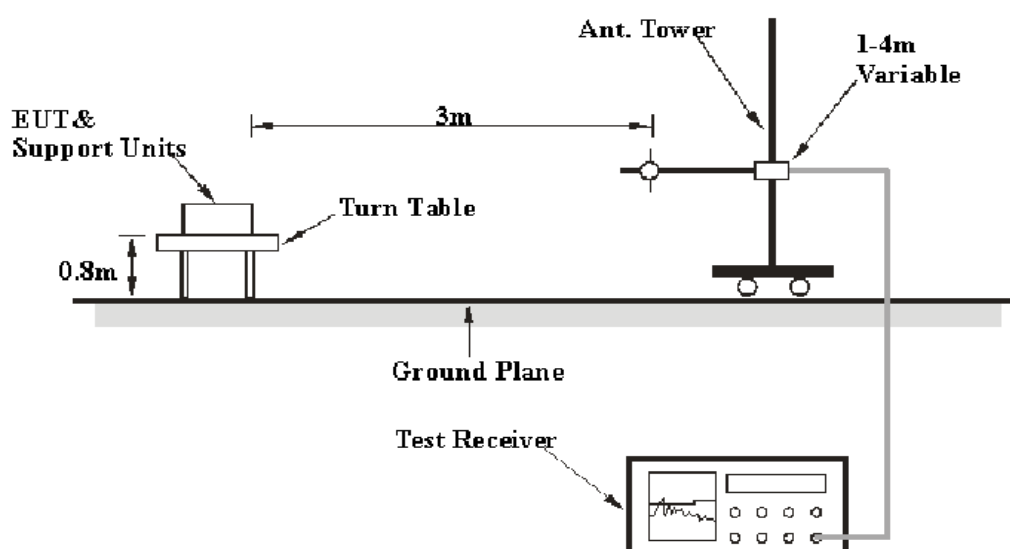

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC Part 15.109 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 7 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447E	1937A01046	2013-09-30	2014-09-30
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2013-09-25	2014-09-25
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2014-11-27
Mini	Amplifier	ZVA-183-S+	5969001149	2014-04-03	2015-04-03
A.H. System	Horn Antenna	SAS-200/571	135	2012-02-11	2015-02-10
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2013-11-12	2014-11-12
R&S	Auto test Software	EMC32	V9.10	--	--

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC §15.109 Class B, the worst margin reading as below:

8.47 dB at 44.598875 MHz in the Vertical polarization mode

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Mike Hu on 2014-04-21.

EUT Operation Mode: Charging & Downloading

30 MHz ~ 7 GHz

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15B	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
1059.8	49.48	PK	204	1.3	V	-1.2	48.28	74	25.72
1059.8	31.14	Ave.	204	1.3	V	-1.2	29.94	54	28.28
1796.6	52.26	PK	196	1.1	H	2.32	54.58	74	45.72
44.6	48.63	QP	22	1.0	V	-17.1	31.53	40	8.47
40.7	44.41	QP	107	1.2	V	-15.2	29.21	40	10.79
215	43.75	QP	0	1.6	H	-15.9	27.85	43.5	15.65
663.5	45.67	QP	192	1.5	H	-15.5	30.17	46	15.83
1796.6	30.19	Ave.	196	1.1	H	2.32	32.51	54	28.28
2435.4	48.17	PK	54	1.1	H	6.13	54.30	74	45.72
2435.4	28.26	Ave.	54	1.1	H	6.13	34.39	54	28.28
5042.9	42.14	PK	117	1.3	V	12.57	54.71	74	45.72
5042.9	23.69	Ave.	117	1.3	V	12.57	36.26	54	28.28

Note:

- 1) Correction Factor=Antenna factor (RX) + cable loss – amplifier factor
- 2) Corrected Amplitude = Correction Factor + Reading
- 3) Margin = Limit - Corrected Amplitude

***** END OF REPORT *****