



Report No.:SZ12070093W03



FCC RADIO TEST REPORT

Issued to

ARCHOS S.A

For

Internet Tablet

Model Name : AC97XEUS
Trade Name : ARCHOS
Brand Name : ARCHOS
FCC ID : SOVAC97XEUS
Standard : 47 CFR Part 15 Subpart C
Test date : 2012-8-1 to 2012-8-19
Issue date : 2012-09-03

by

Shenzhen MORLAB Communication Technology Co., Ltd.



Tested by Nie Quan

Nie Quan

Date 2012.9.3

Review by Peng Huarui

Peng Huarui

Date 2012.9.3

CTIA Authorized Test Lab
LAB CODE 20081223-00
IEEE 1725

OFTA
電訊管理局



GCF
Official Observer of
Global Certification Forum

Bluetooth
BQTF

FCC
Reg. No.
741109

The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

DIRECTORY

1. GENERAL INFORMATION	3
1.1. EUT Description	3
1.2. Test Standards and Results.....	4
1.3. Facilities and Accreditations	5
2. 47 CFR PART 15C.....	6
2.1. Number of Hopping Frequency	6
2.2. Peak Output Power.....	9
2.3. 20dB Bandwidth	11
2.4. Carried Frequency Separation.....	18
2.5. Time of Occupancy (Dwell time)	20
2.6. Conducted Spurious Emissions.....	27
2.7. Band Edge.....	43
2.8. Conducted Emission	52
2.9. Radiated Emission.....	55

Change History		
Issue	Date	Reason for change
1.0	Sep 3, 2012	First edition

1. General Information

1.1. EUT Description

EUT Type: Internet Tablet
Serial No.....: (n.a, marked #1 by test site)
Hardware Version: V0.3
Software Version: FW8935-V0.4.3.0
Applicant: ARCHOS S.A
12 rue Ampère - 91430 Igny FRANCE
Foxda Technology Industrial(Shenzhen)Co.,LTD
Manufacturer: 4/F, Fuxing Bldg, Binlang Road, Futian Free Trade Zone,
SHENZHEN,CHINA
Frequency Range.....: The frequency range used is 2402MHz - 2480MHz (79 channels, at
intervals of 1MHz);
The frequency block is 2400MHz to 2483.5MHz.
Modulation Type: Bluetooth: FHSS (GFSK(1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps),
8-DPSK(EDR 3Mbps)
Antenna: PIFA Antenna, gain: 0dBi

Note 1: The EUT is Internet Tablet, it contains Bluetooth Module operating at 2.4GHz ISM band; the frequencies allocated for the Bluetooth Module is $F(\text{MHz})=2402+1*n$ ($0 \leq n \leq 78$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 39 (2441MHz) and 78 (2480MHz).

Note 2: For the purposes of the present report, following the abbreviations are apply:

N.A Not Application

-- Not done this test

EUT Equipment under the test

Note 3: For the radiated emission test, according to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna to the intentional radiator shall be considered sufficient to comply with the provisions of this section. This product has a permanent antenna, fulfill the requirement of this section.

Note 4: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.2. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-09 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR 47	Description	Result
1	15.247(a)	Number of Hopping Frequency	PASS
2	15.247(b)	Peak Output Power	PASS
3	15.247(a)	20dB Bandwidth	PASS
4	15.247(a)	Carrier Frequency Separation	PASS
5	15.247(a)	Time of Occupancy (Dwell time)	PASS
6	15.247(c)	Conducted Spurious Emission	PASS
7	15.247(c)	Band Edge	PASS
8	15.207	Conducted Emission	PASS
9	15.209 15.247(c)	Radiated Emission	PASS

NOTE:

The tests were performed according to the method of measurements prescribed in DA-00-705.

1.3. Facilities and Accreditations

1.3.1. Facilities

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL3, Building a, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22; the FCC registration number is 741109.

1.3.2. Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR Part 15C


2.1. Number of Hopping Frequency

2.1.1. Requirement

According to FCC §15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 75 hopping frequencies.

2.1.2. Test Description

A. Test Setup:

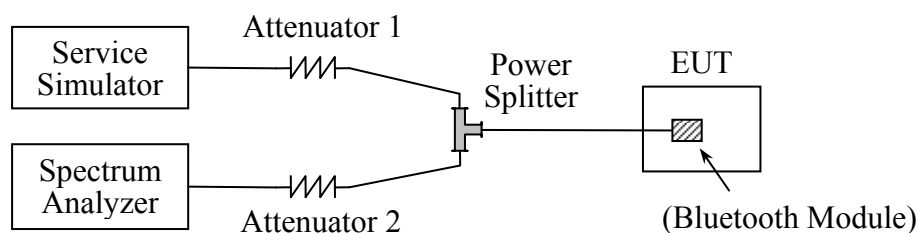

The Bluetooth Module of the EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date
System Simulator	R&S	CMU200	100448	2012.05
Spectrum Analyzer	Agilent	E7405A	US44210471	2012.05
Power Splitter	Weinschel	1506A	NW521	(n.a.)
Attenuator 1	Resnet	20dB	(n.a.)	(n.a.)
Attenuator 2	Resnet	3dB	(n.a.)	(n.a.)


2.1.3. Test Result

The Bluetooth Module operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency.



A. Test Verdict:

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Refer to Plot	Verdict
GFSK	2400 - 2483.5	79	75	Plot A	PASS
$\pi/4$ -DQPSK	2400 - 2483.5	79	75	Plot B	PASS
8-DPSK	2400 - 2483.5	79	75	Plot C	PASS

B. Test Plots:

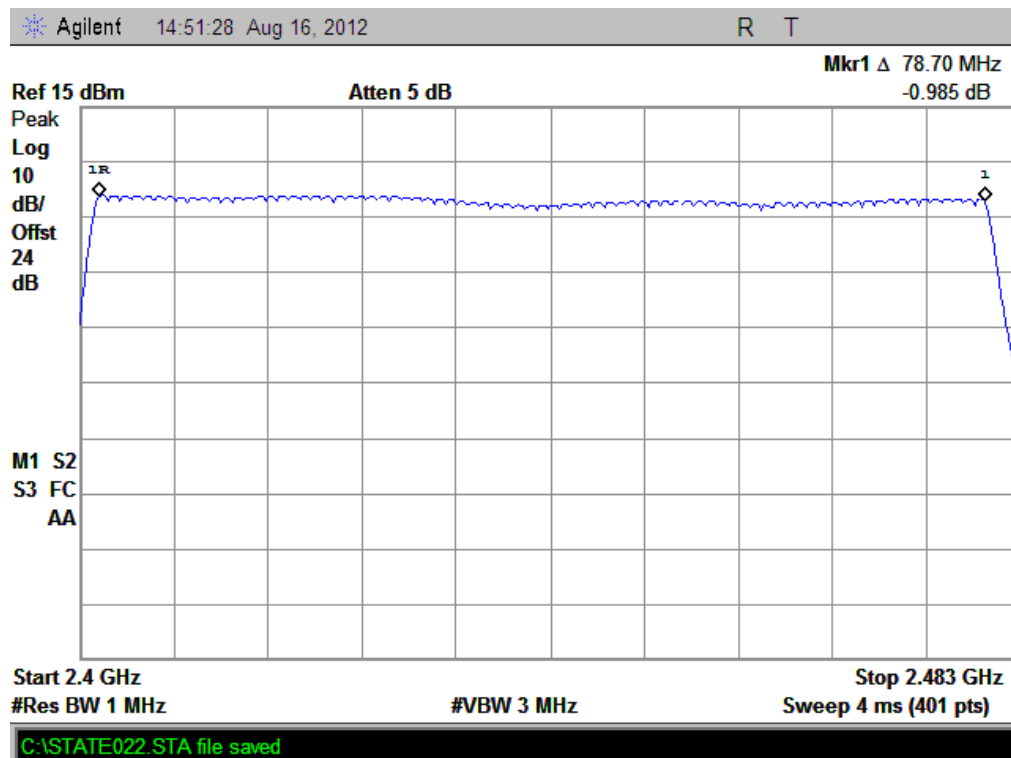

(Plot A: GFSK)

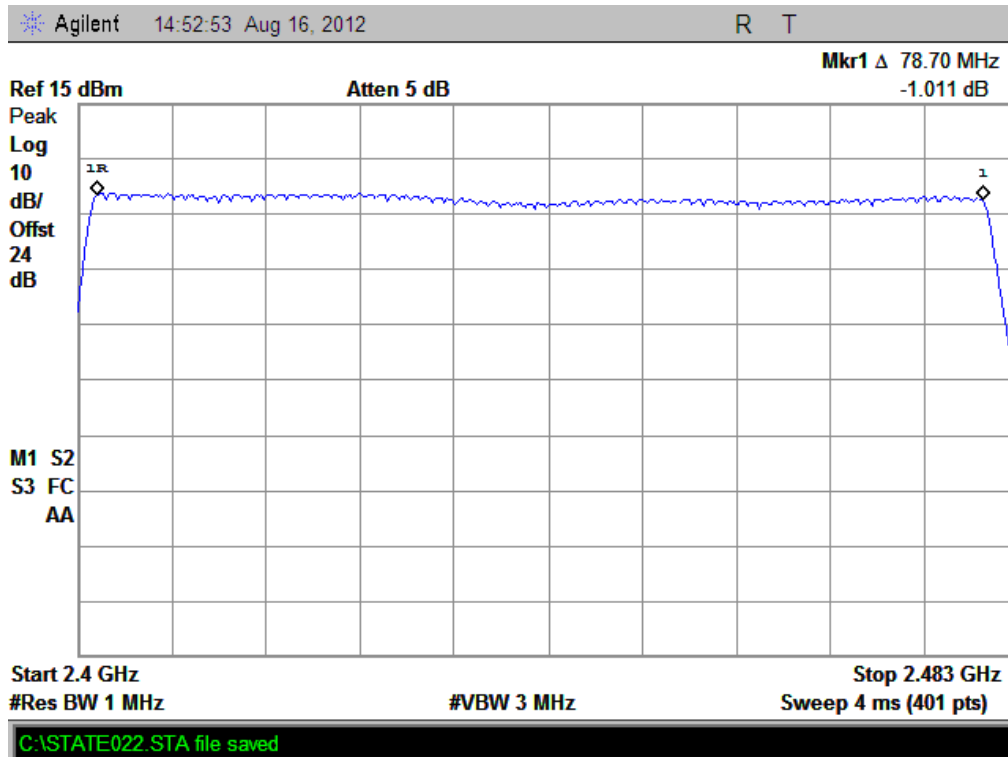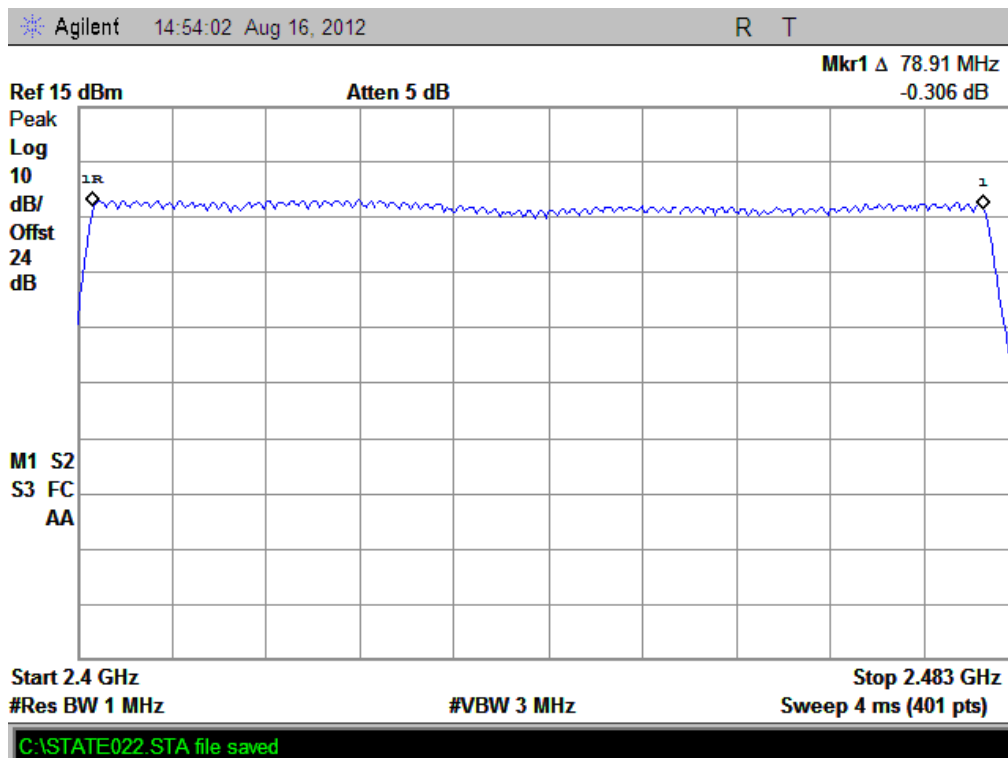
(Plot B: $\Pi/4$ -DQPSK)


(Plot C: 8- DPSK)

2.2. Peak Output Power

2.2.1. Requirement

According to FCC §15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
System Simulator	R&S	CMU200	100448	2012.05	2013.05
Power meter	Agilent	E4418B	GB44318055	2012.05	2013.05
Power Splitter	Weinschel	1506A	NW521	(n.a.)	(n.a.)
Attenuator 1	Resnet	20dB	(n.a.)	(n.a.)	(n.a.)
Attenuator 2	Resnet	3dB	(n.a.)	(n.a.)	(n.a.)

2.2.2. Test Description

See section 2.1.2 of this report.

2.2.3. Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module. The lowest, middle and highest channel were tested by Power meter.

2.2.3.1. GFSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	-1.278	0.000745	20.96	0.125	PASS
39	2441	-3.071	0.000493			PASS
78	2480	-2.036	0.000626			PASS

2.2.3.2. $\pi/4$ -DQPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	-1.578	0.000695	20.96	0.125	PASS
39	2441	-3.301	0.000468			PASS
78	2480	-2.259	0.000594			PASS

2.2.3.3. 8-DPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	-2.308	0.000588	20.96	0.125	PASS
39	2441	-4.095	0.000389			PASS
78	2480	-2.992	0.000502			PASS

2.3. 20dB Bandwidth

2.3.1. Definition

According to FCC §15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 \cdot \log 1\% = 20\text{dB}$) taking the total RF output power.

2.3.2. Test Description

See section 2.1.2 of this report.

2.3.3. Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to record the 20dB bandwidth of the Module.


2.3.3.1. GFSK Mode

A. Test Verdict:


The maximum 20dB bandwidth measured is 1.193MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.183	Plot A
39	2441	1.188	Plot B
78	2480	1.193	Plot C


B. Test Plots:

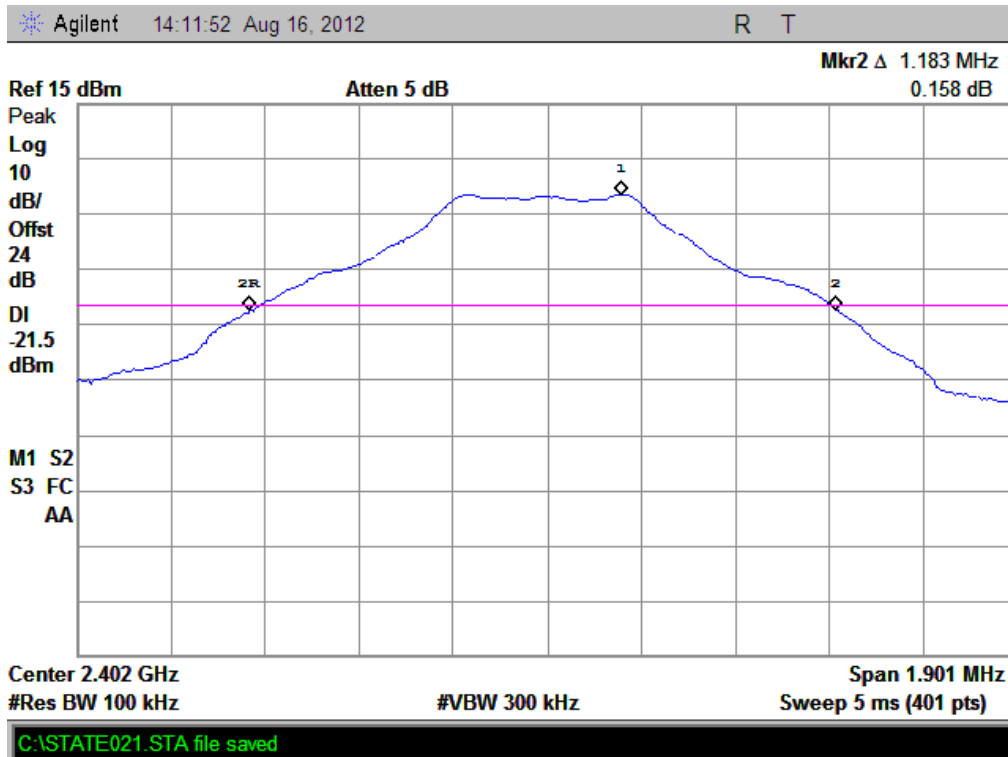

(Plot A: Channel = 2402)

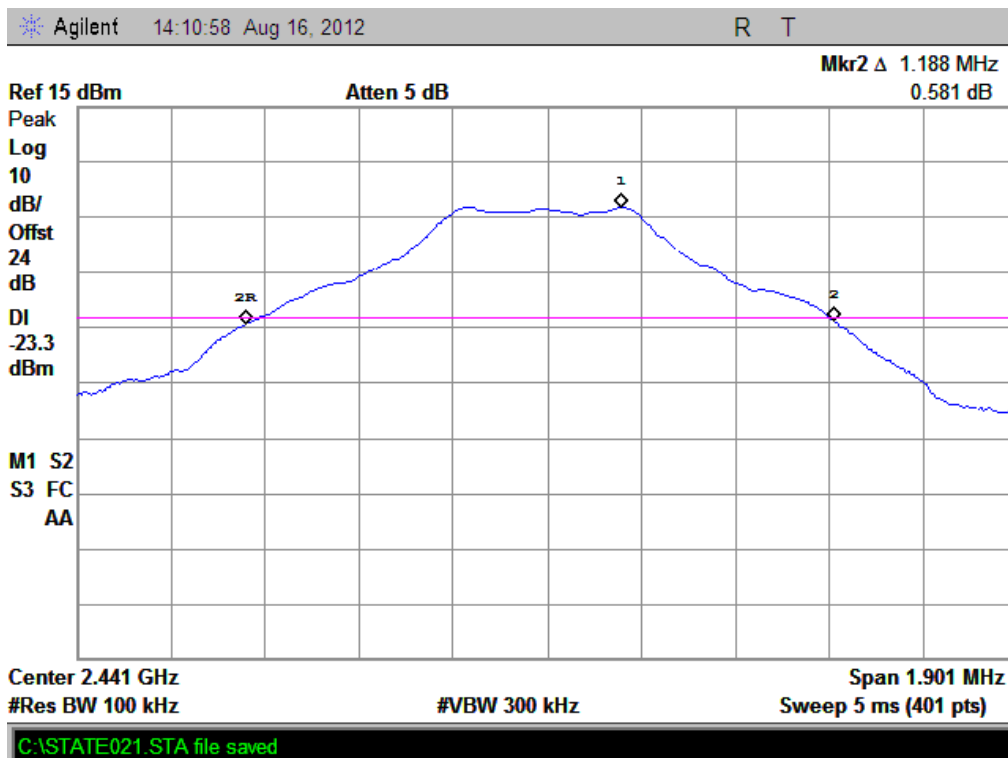

(Plot B: Channel = 2441)

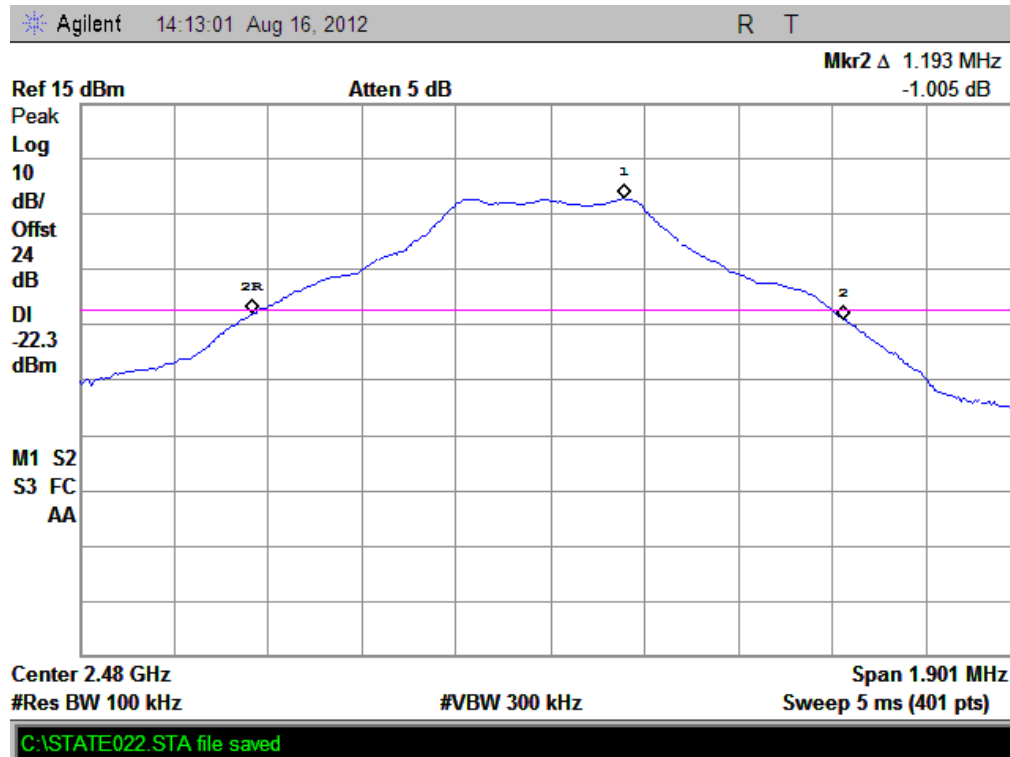

(Plot C: Channel = 2480)


2.3.3.2. $\pi/4$ -DQPSK Mode

A. Test Verdict:


The maximum 20dB bandwidth measured is 1.426MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.426	Plot D
39	2441	1.426	Plot E
78	2480	1.421	Plot F

B. Test Plots:

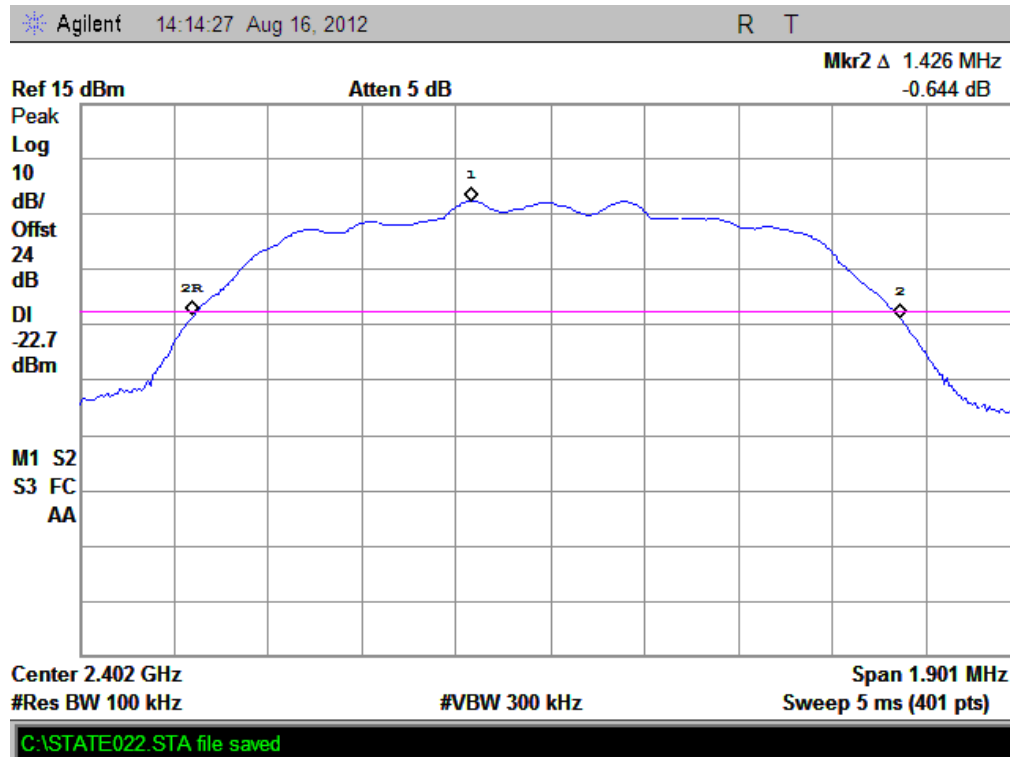

(Plot D: Channel = 2402)

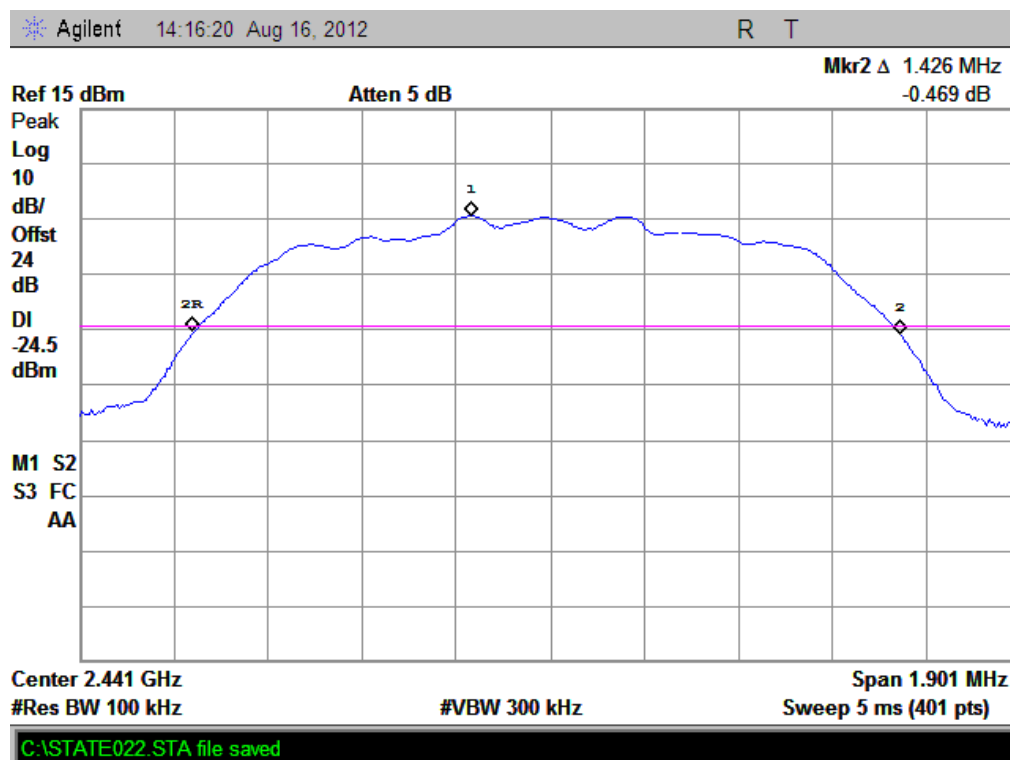

(Plot E: Channel = 2441)



(Plot F: Channel = 2480)

2.3.3.3. 8-DPSK Mode

A. Test Verdict:


The maximum 20dB bandwidth measured is 1.421MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.421	Plot G
39	2441	1.421	Plot H
78	2480	1.421	Plot I

B. Test Plots:



(Plot G: Channel = 2402)

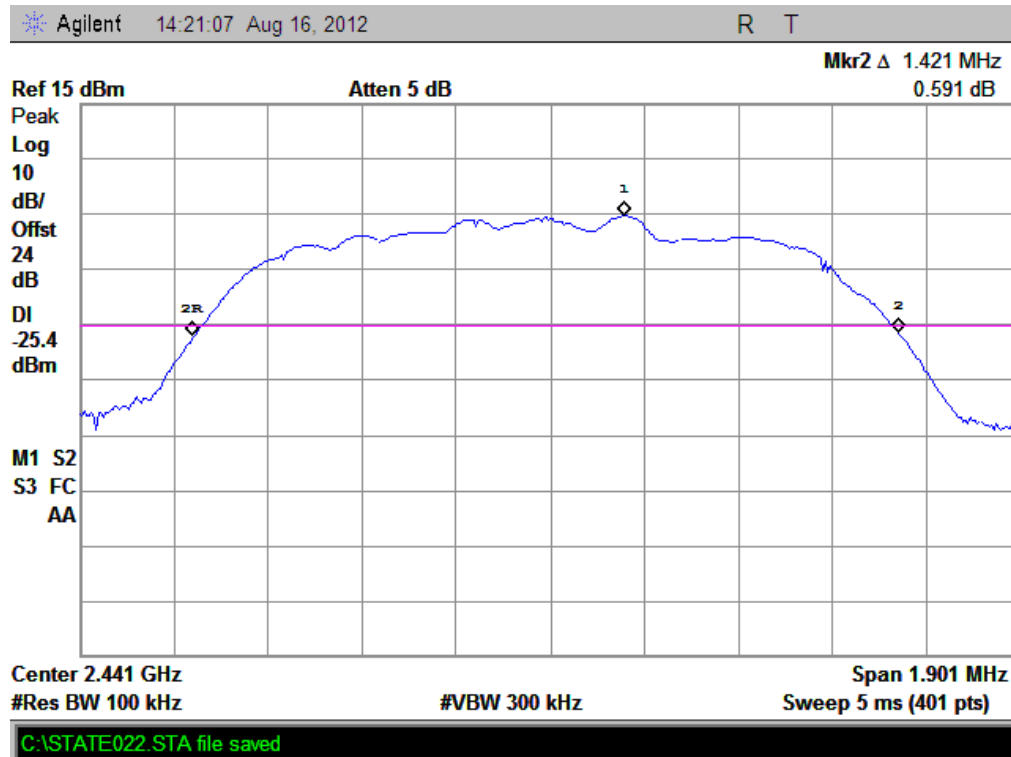

(Plot H: Channel = 2441)



(Plot I: Channel = 2480)

2.4. Carried Frequency Separation

2.4.1. Definition

According to FCC §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.


2.4.2. Test Description

See section 2.1.2 of this report.



2.4.3. Test Result

The Bluetooth Module operates at hopping-on test mode.

For any adjacent channels (e.g. the channel 39 and 40 as showed in the Plot A), the Module does have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel (1.193MHz for GFSK mode, 1.426MHz for $\pi/4$ -DQPSK mode and 1.421MHz for 8-DPSK mode, refer to section 2.3.3), whichever is greater. So, the verdict is PASSING.

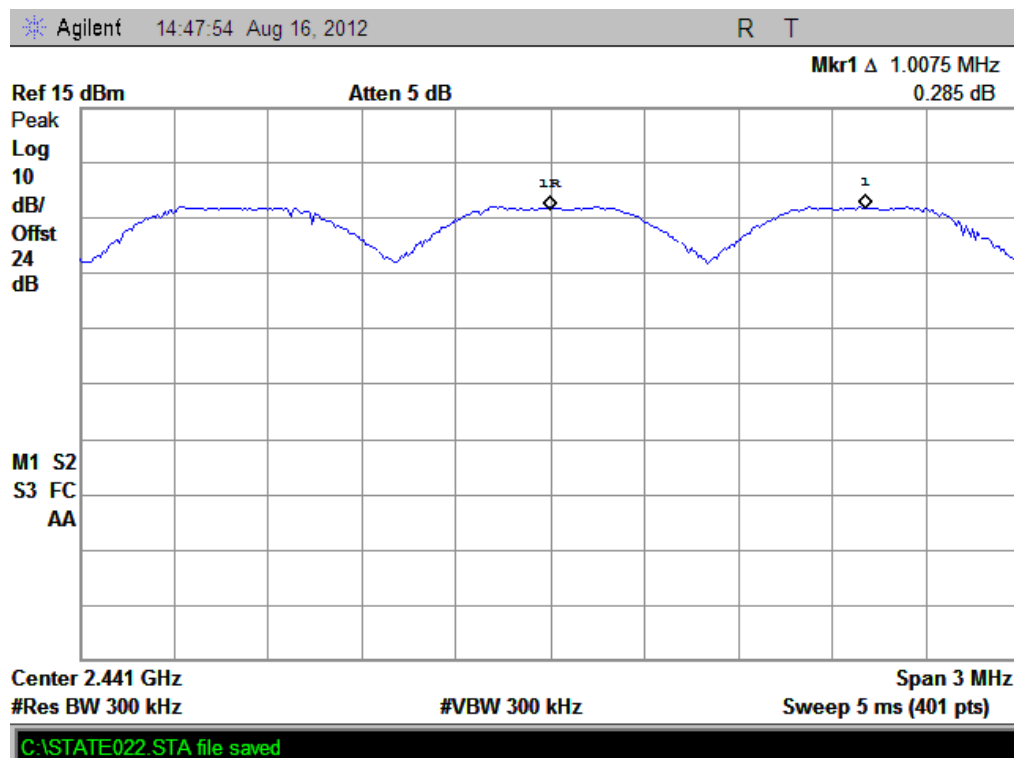

(Plot A: GFSK)

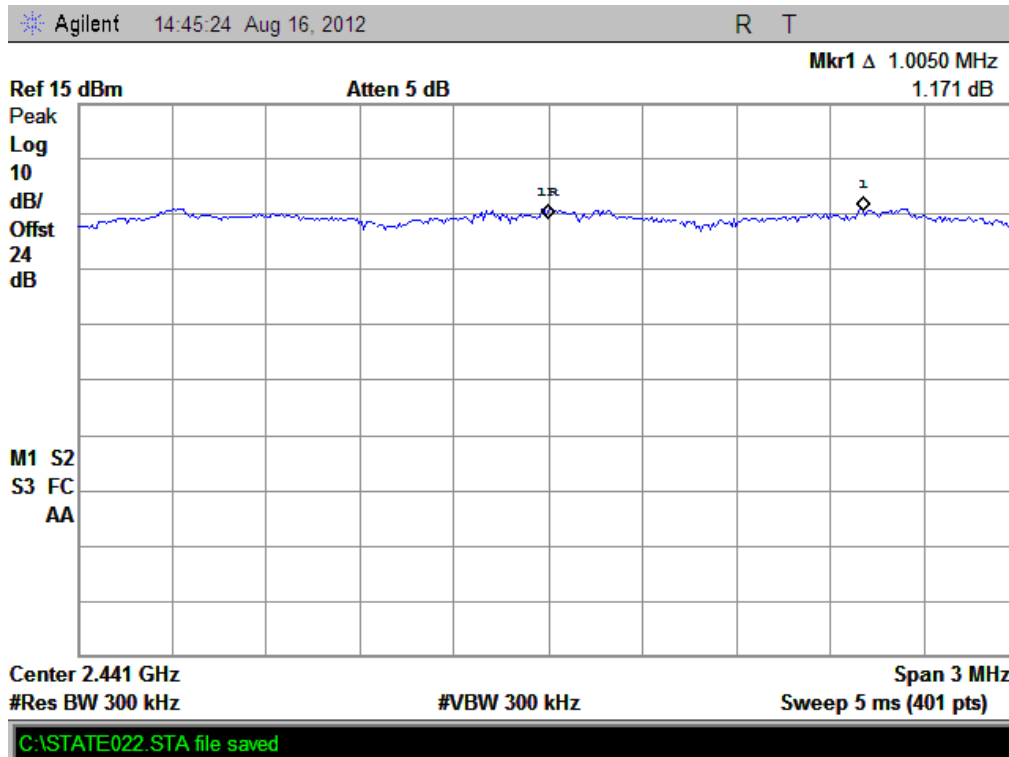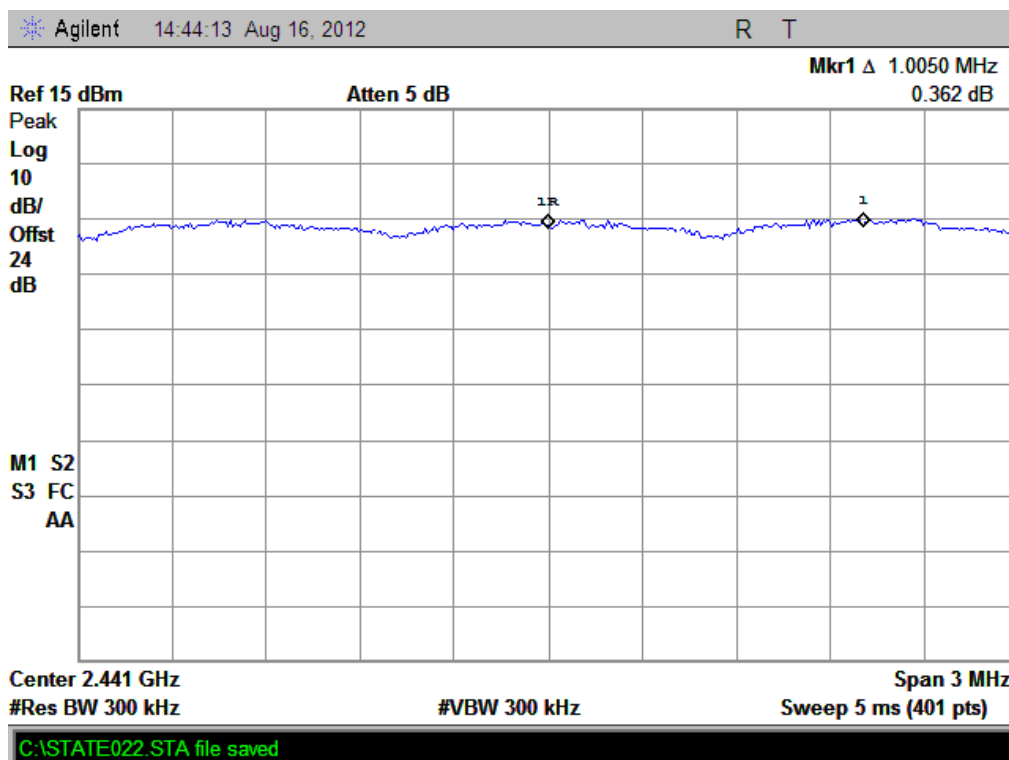
(Plot B: $\pi/4$ -DQPSK)


(Plot C: 8-DPSK)

2.5. Time of Occupancy (Dwell time)

2.5.1. Requirement

According to FCC §15.247(a)(1)(iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

2.5.2. Test Description

See section 2.1.2 of this report.

2.5.3. Test Result

The average time of occupancy on any channel within the Period can be calculated with formulas (for DH5 package type):

$$\begin{aligned}\{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4s * \{\text{Number of Hopping Frequency}\}\end{aligned}$$

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.


2.5.3.1. GFSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Pulse Time		Total of Dwell (ms)	Limit (ms)	Verdict
		ms	Refer to Plot			
0	2402	2.888	Plot A	308.053	400	PASS
39	2441	2.887	Plot B	307.947		PASS
78	2480	2.887	Plot C	307.947		PASS

B. Test Plots:


Note: the following plots record the Pulse Time of the Module carrier.

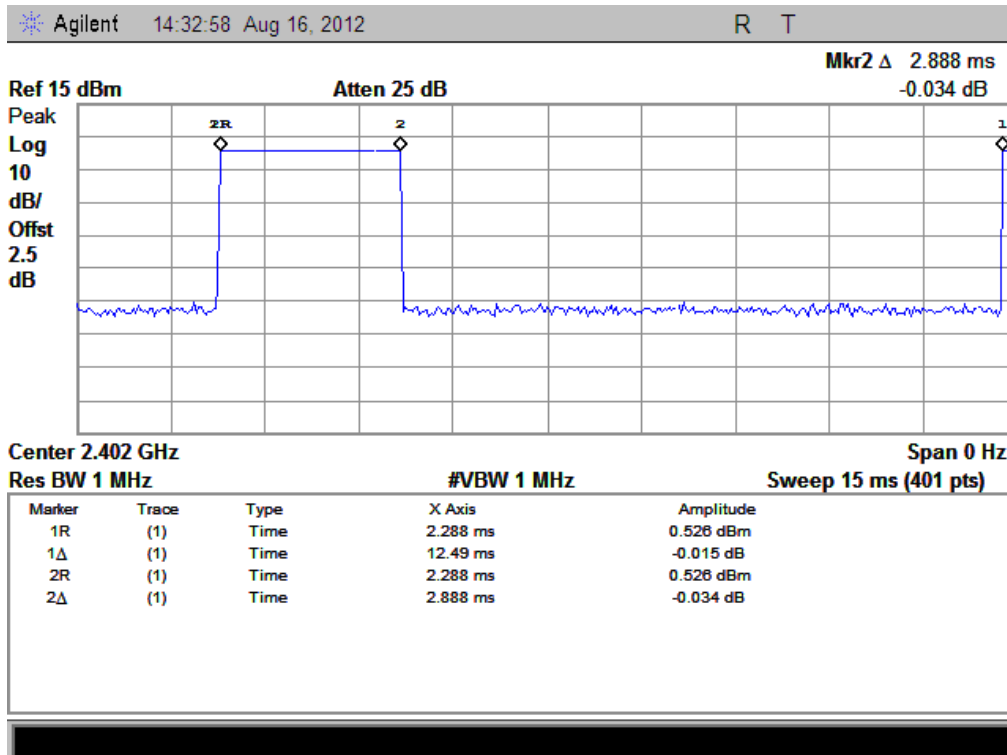

(Plot A: Channel = 2402)

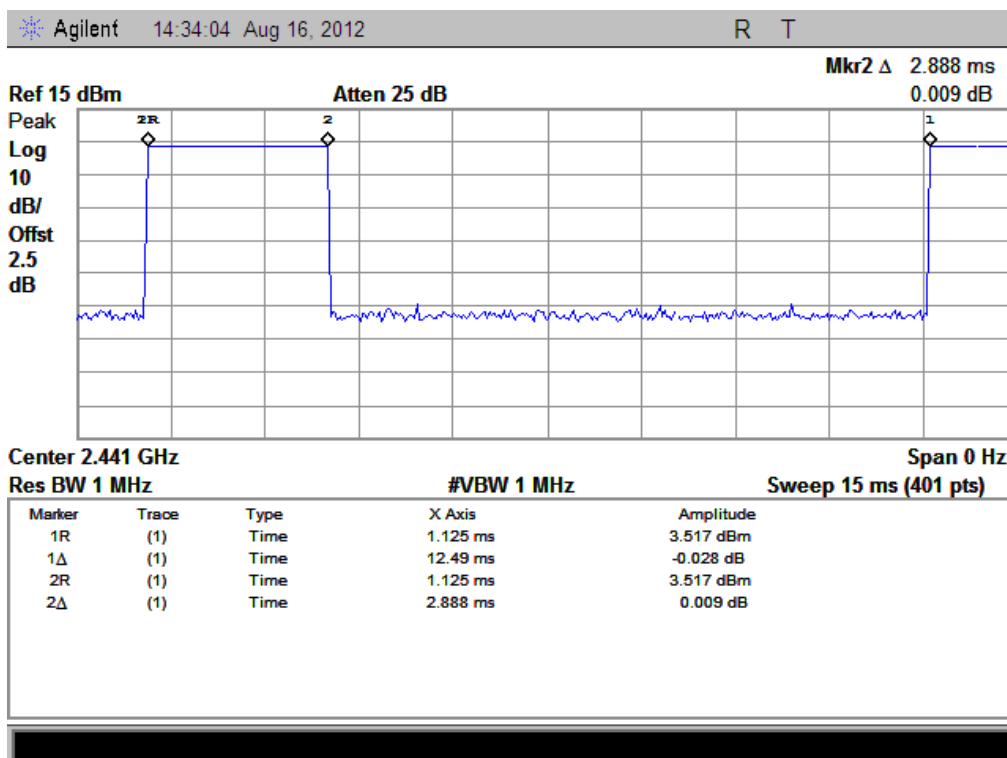

(Plot B: Channel = 2441)

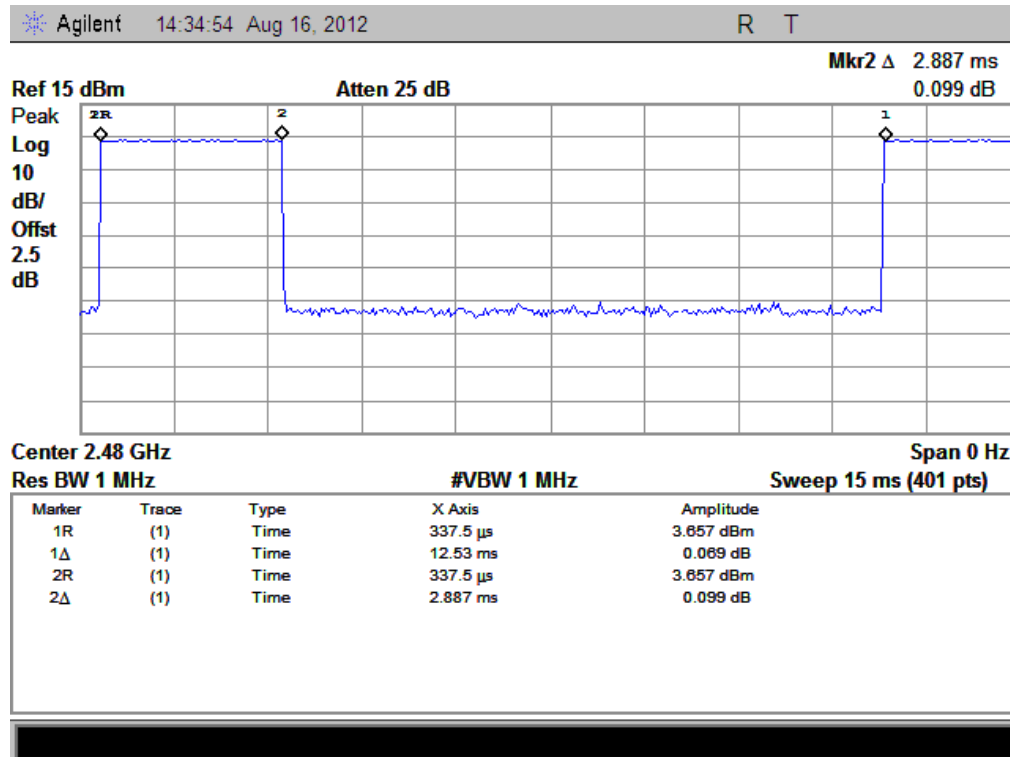

(Plot C: Channel = 2480)


2.5.3.2. $\pi/4$ -DQPSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Pulse Time		Total of Dwell (ms)	Limit (ms)	Verdict
		ms	Refer to Plot			
0	2402	2.887	Plot D	307.947	400	PASS
39	2441	2.862	Plot E	305.280		PASS
78	2480	2.862	Plot F	305.280		PASS

B. Test Plots:


Note: the following plots record the Pulse Time of the Module carrier.

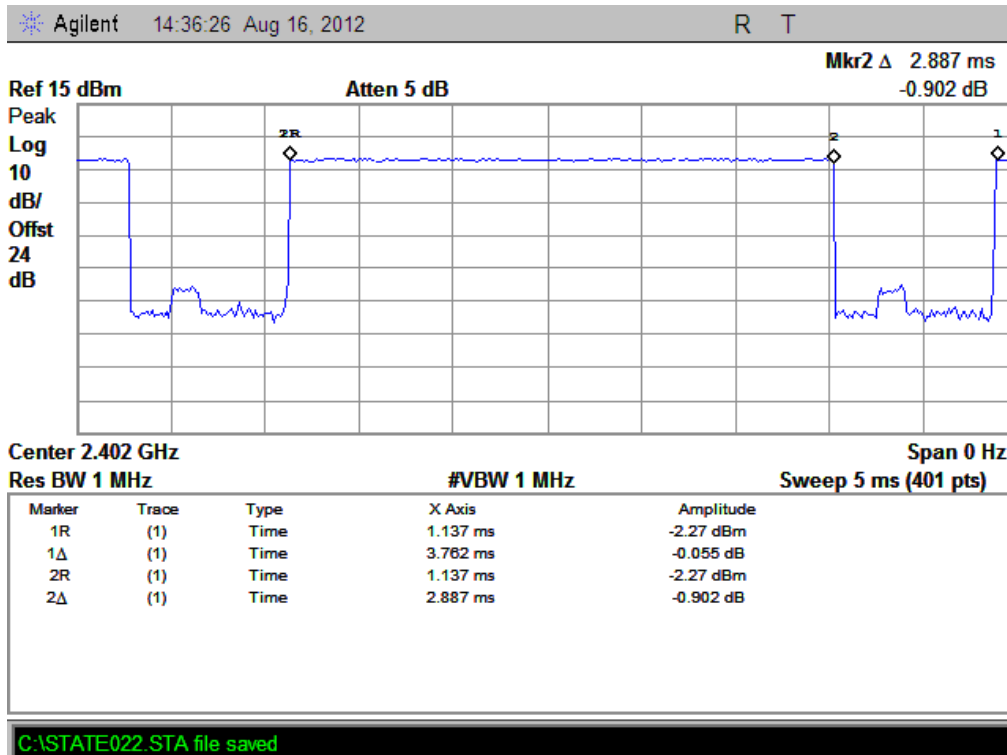

(Plot D: Channel = 2402)

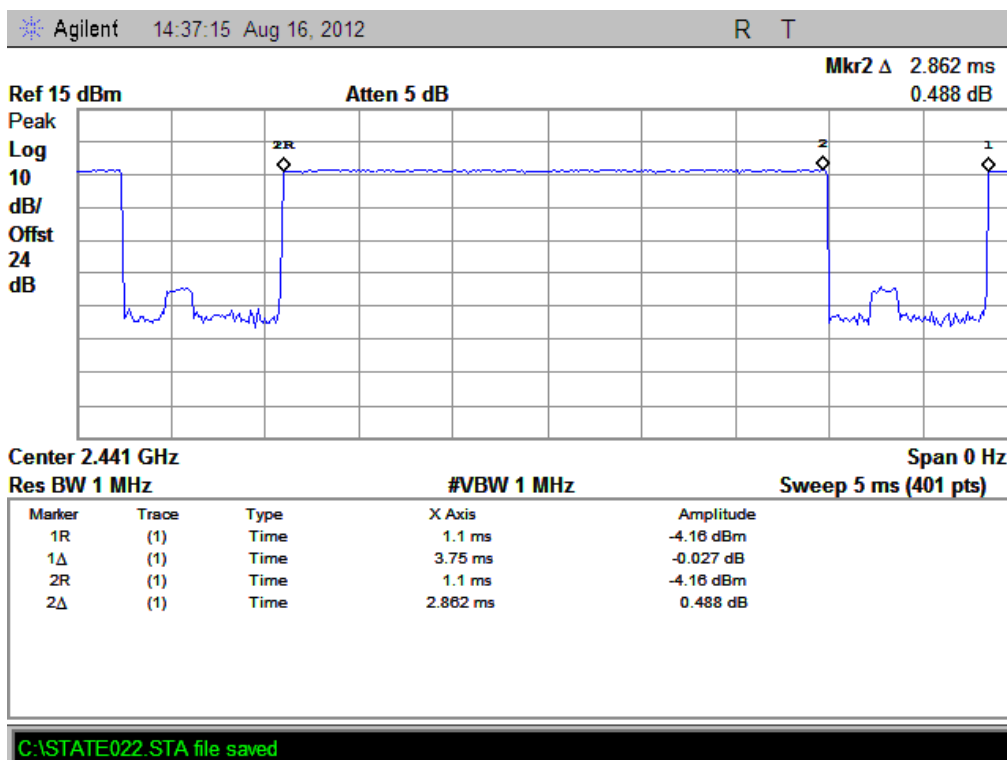

(Plot E: Channel = 2441)

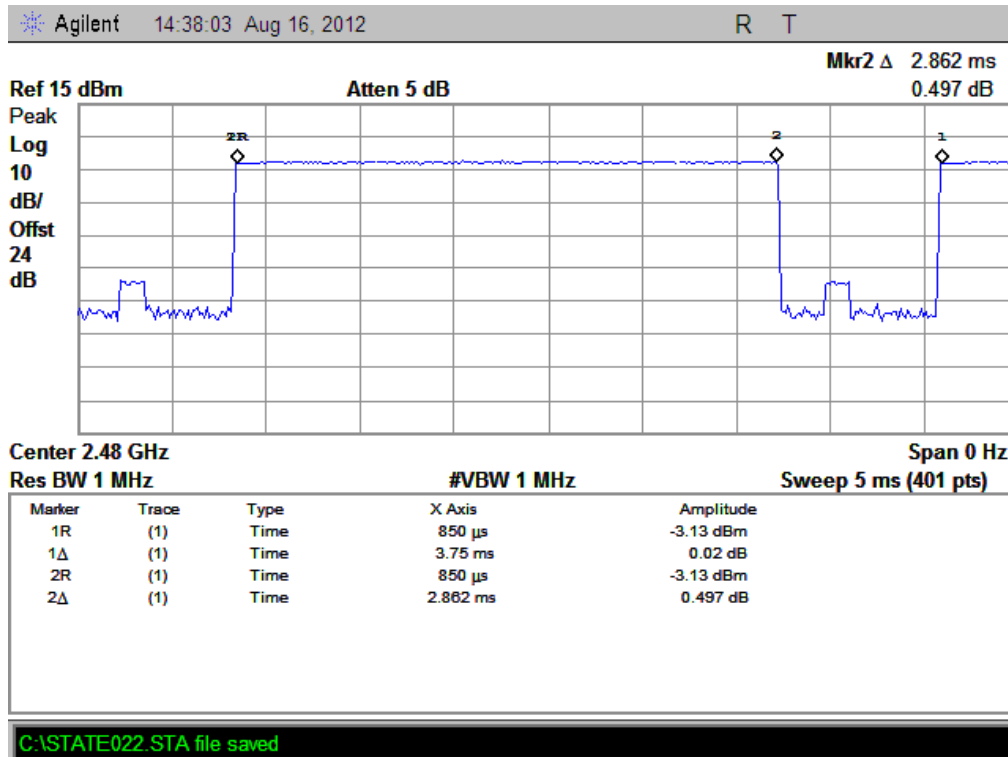

(Plot F: Channel = 2480)


2.5.3.3. 8-DPSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Pulse Time		Total of Dwell (ms)	Limit (ms)	Verdict
		ms	Refer to Plot			
0	2402	2.875	Plot G	306.667	400	PASS
39	2441	2.862	Plot H	305.280		PASS
78	2480	2.887	Plot I	307.947		PASS

B. Test Plots:


Note: the following plots record the Pulse Time of the Module carrier.

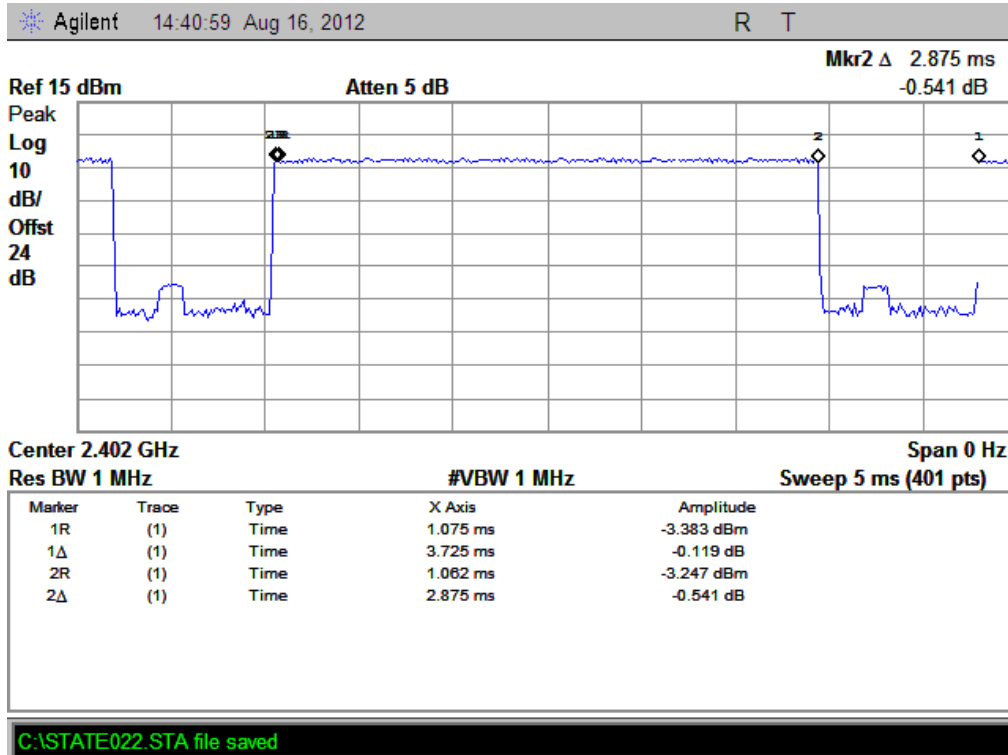

(Plot G: Channel = 2402)

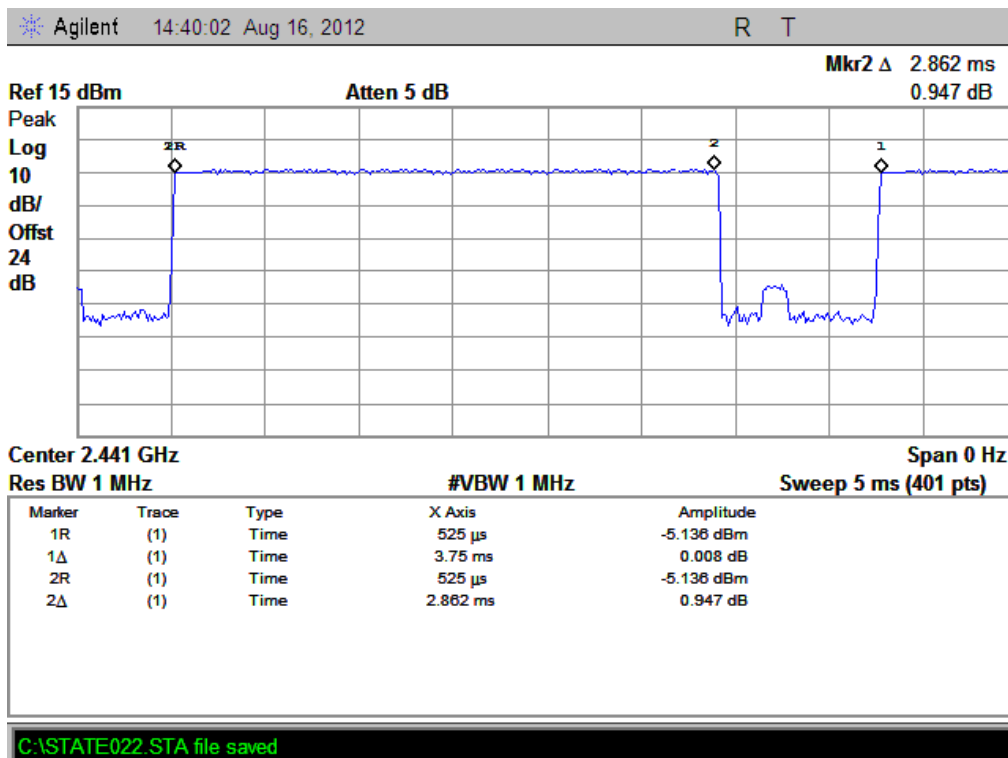

(Plot H: Channel = 2441)

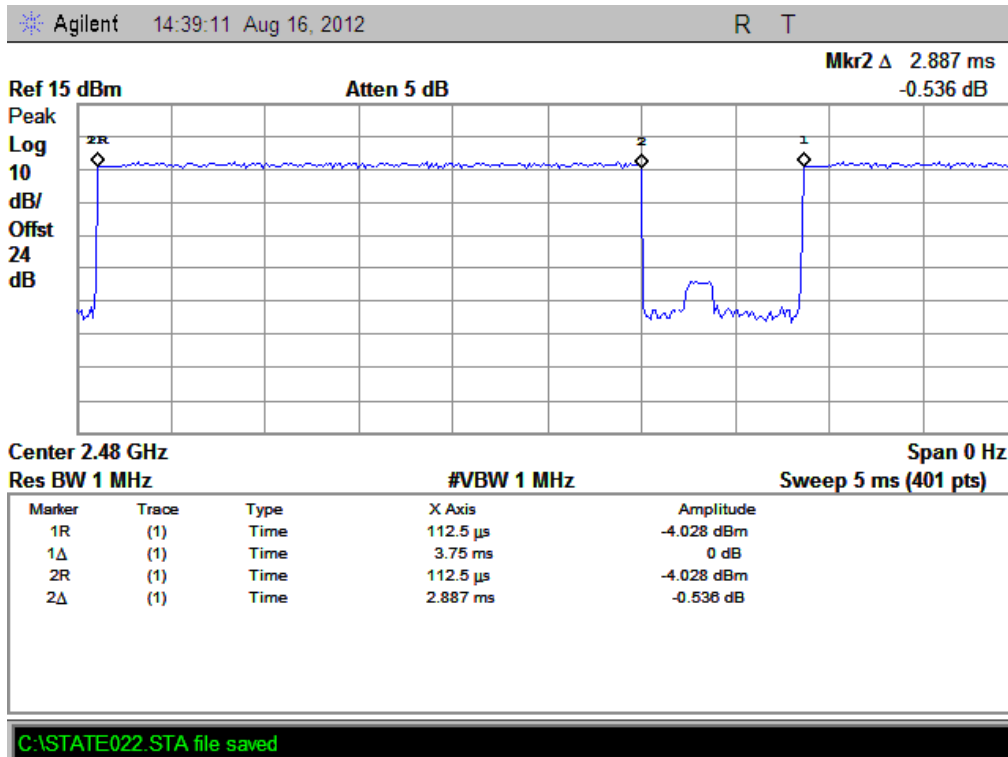

(Plot I: Channel = 2480)

2.6. Conducted Spurious Emissions

2.6.1. Requirement

According to FCC §15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.6.2. Test Description

See section 2.1.2 of this report.

2.6.3. Test Result

The Bluetooth Module operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.



2.6.3.1. GFSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-40.80	Plot A.1/A.2	-1.254	-21.3	PASS
39	2441	-40.03	Plot B.1/B.2	-2.752	-22.8	PASS
78	2480	-37.30	Plot C.1/C.2	1.807	-21.8	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

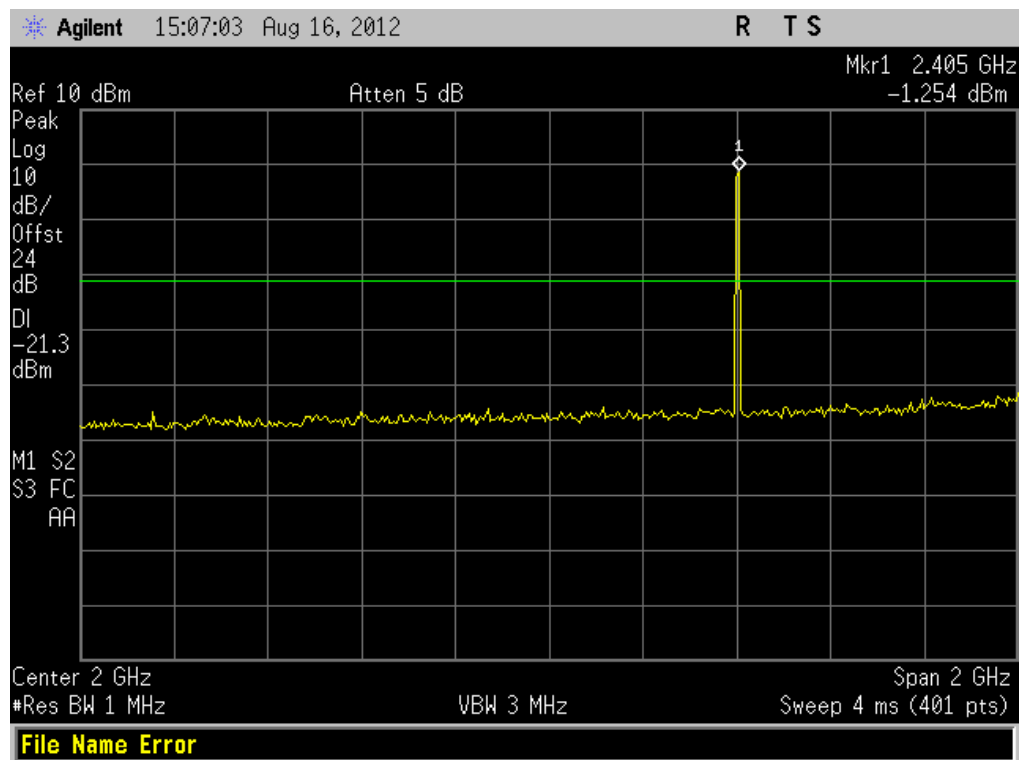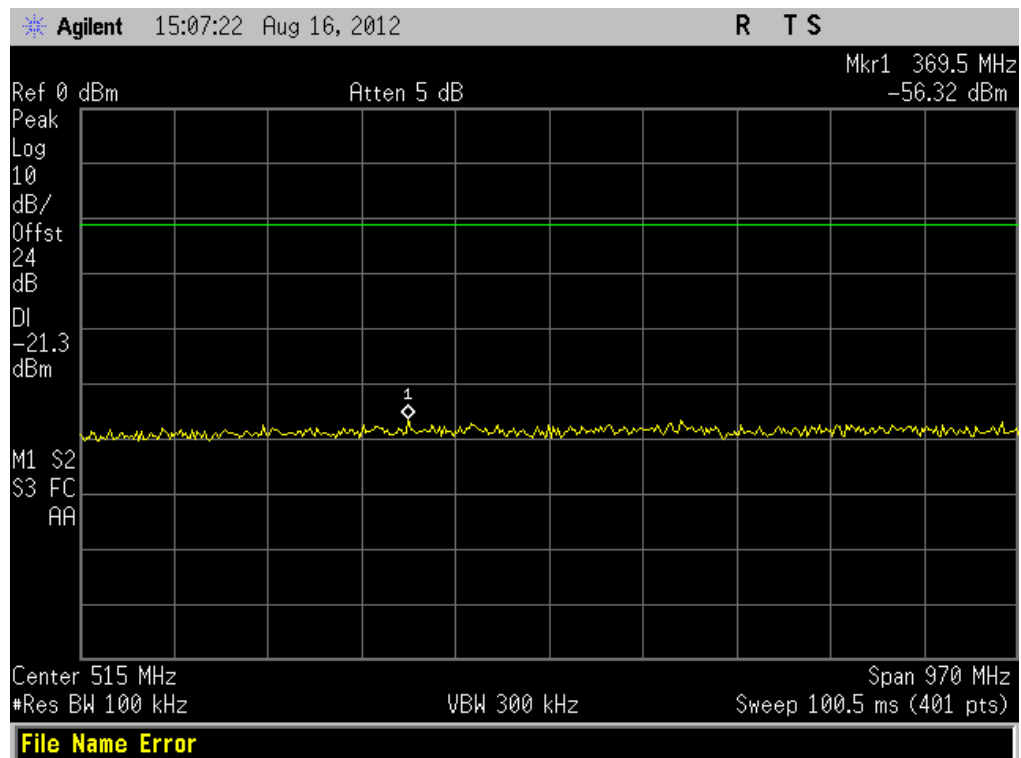


(Plot A.1: Channel = 0, 30MHz to 3GHz)

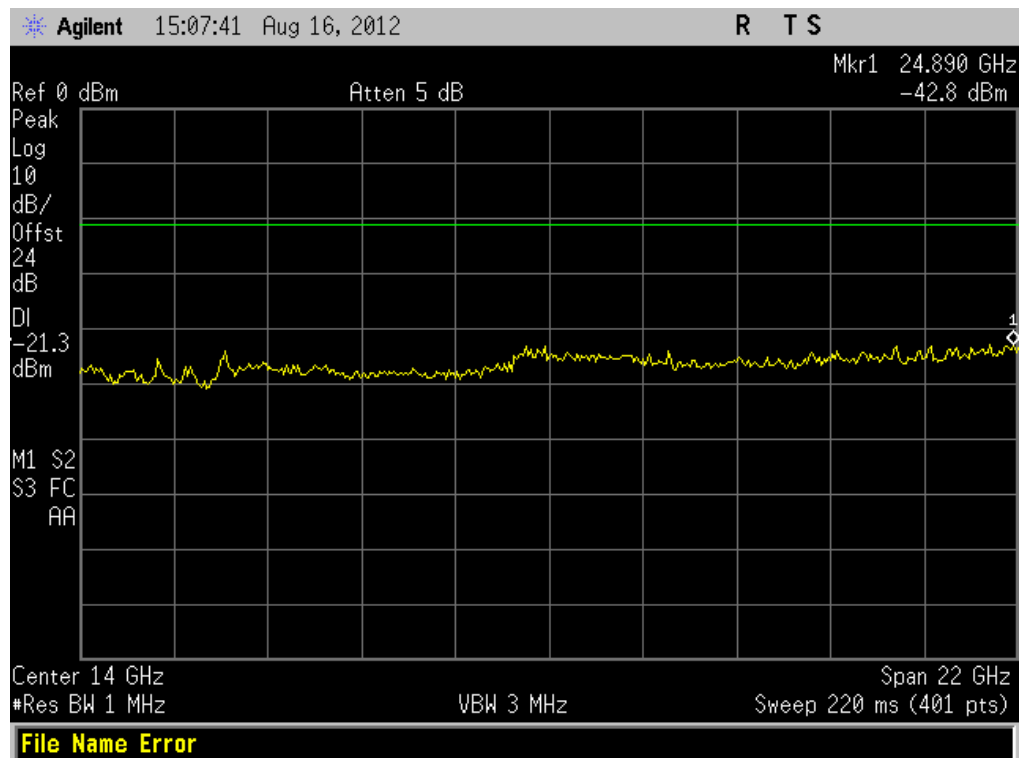


(Plot A.2: Channel = 0, 3GHz to 25GHz)


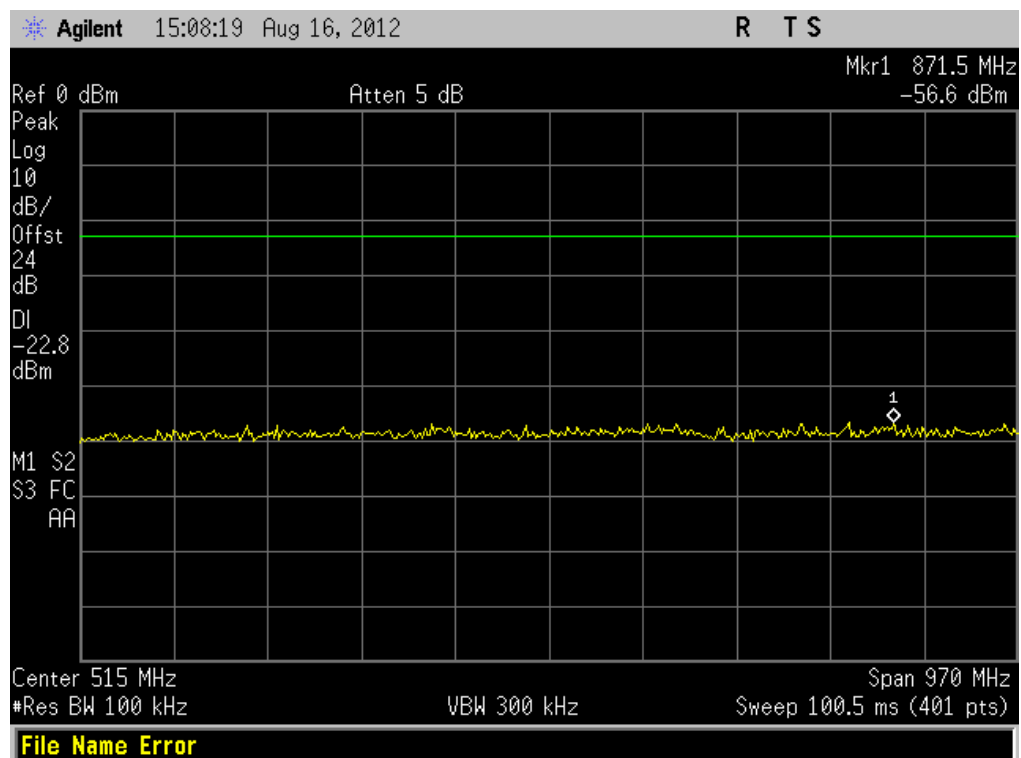


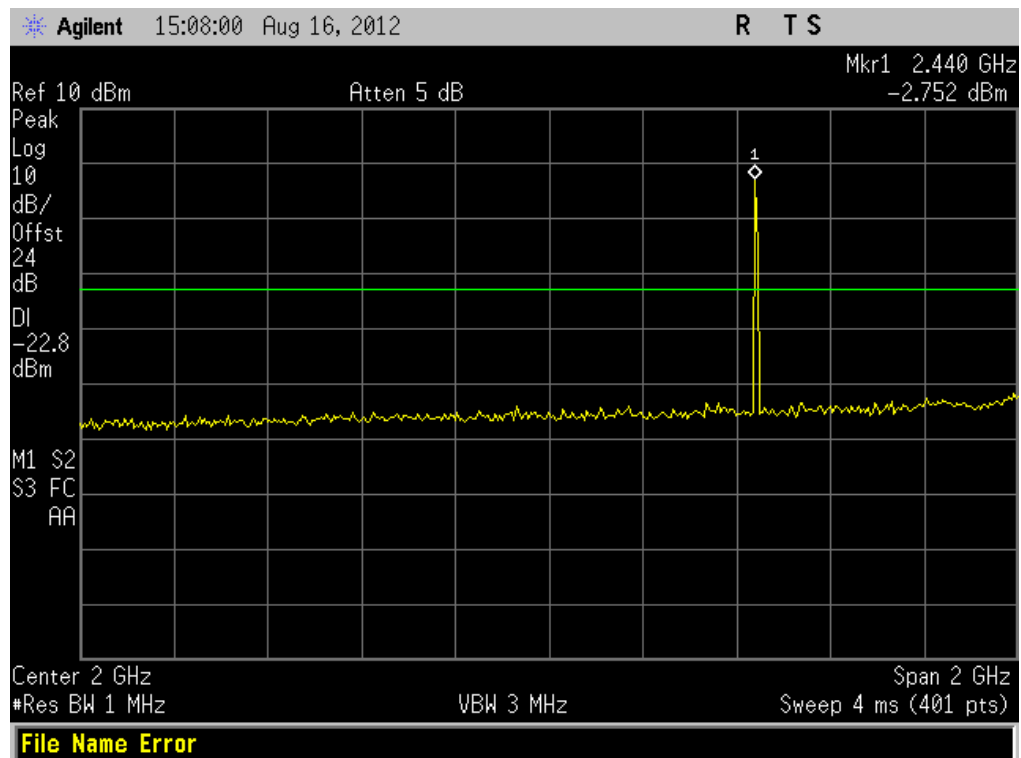


(Plot B.1: Channel = 39, 30MHz to 3GHz)

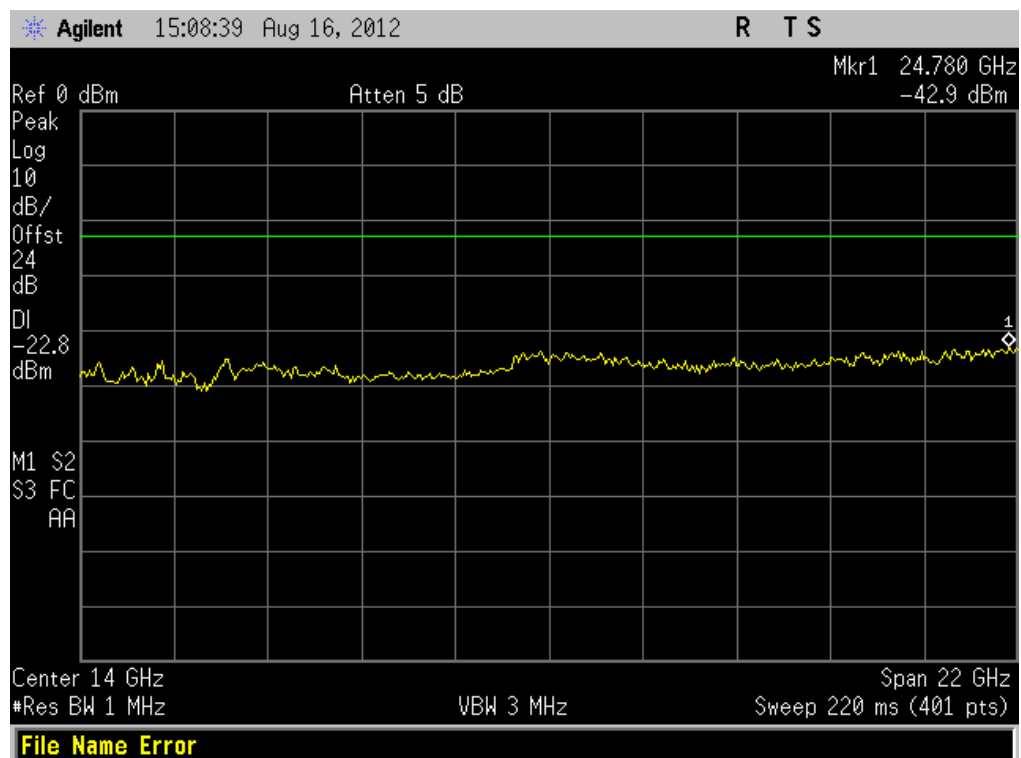

(Plot B.2: Channel = 39, 3GHz to 25GHz)

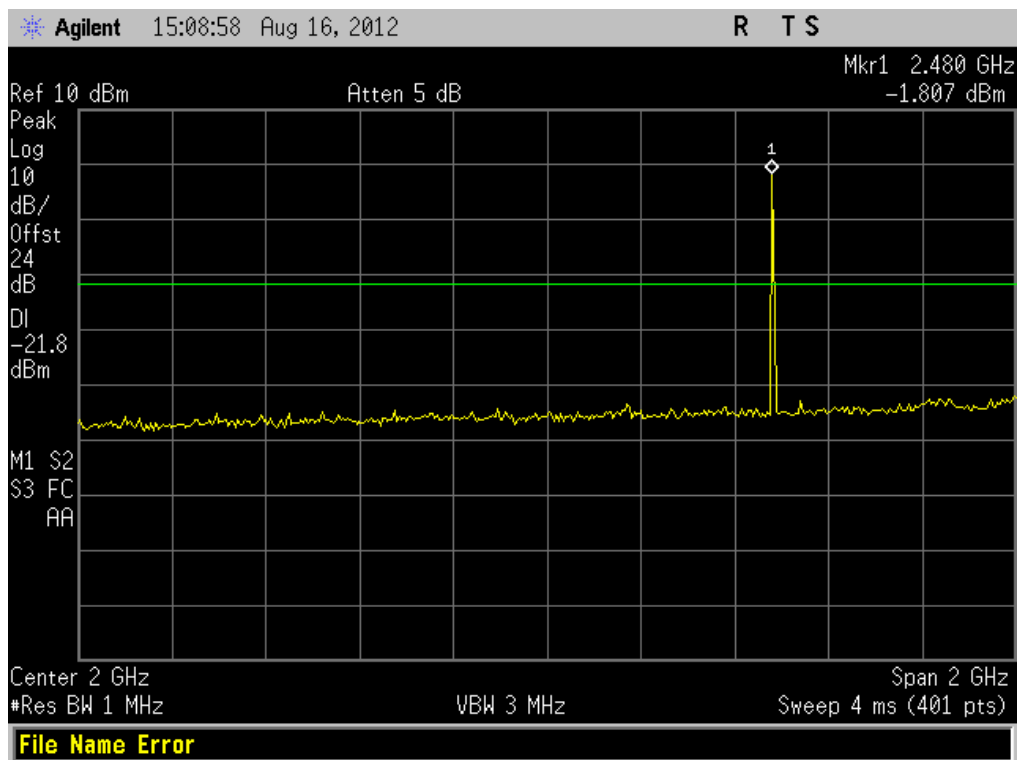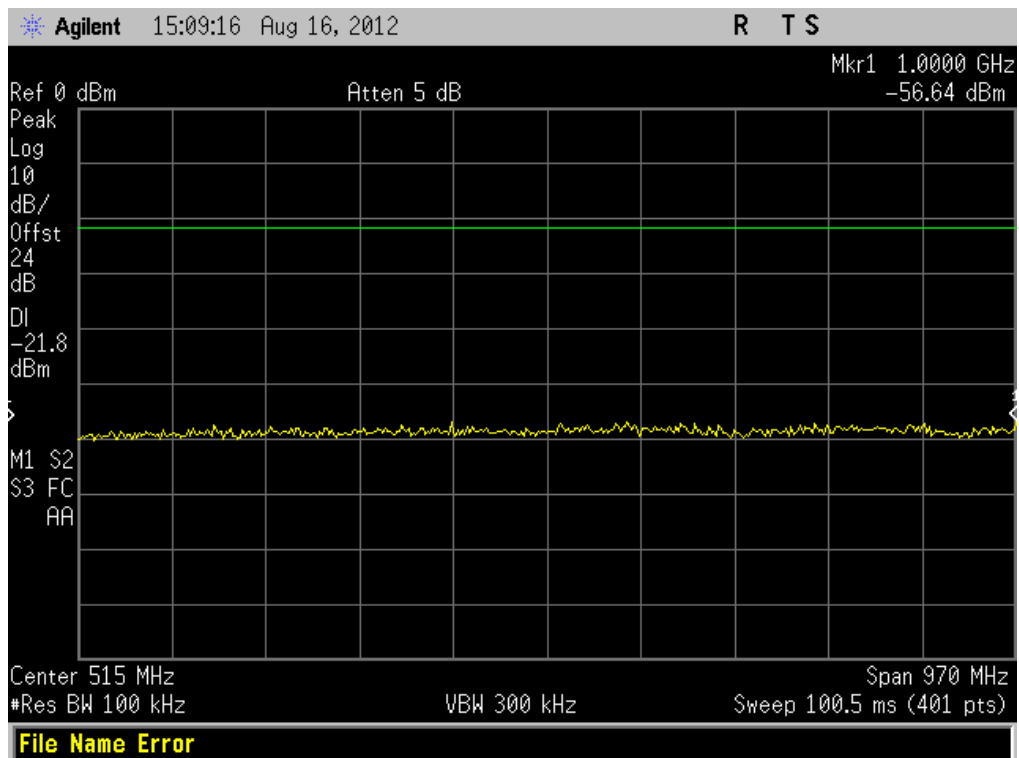

(Plot C.1: Channel = 78, 30MHz to 3GHz)

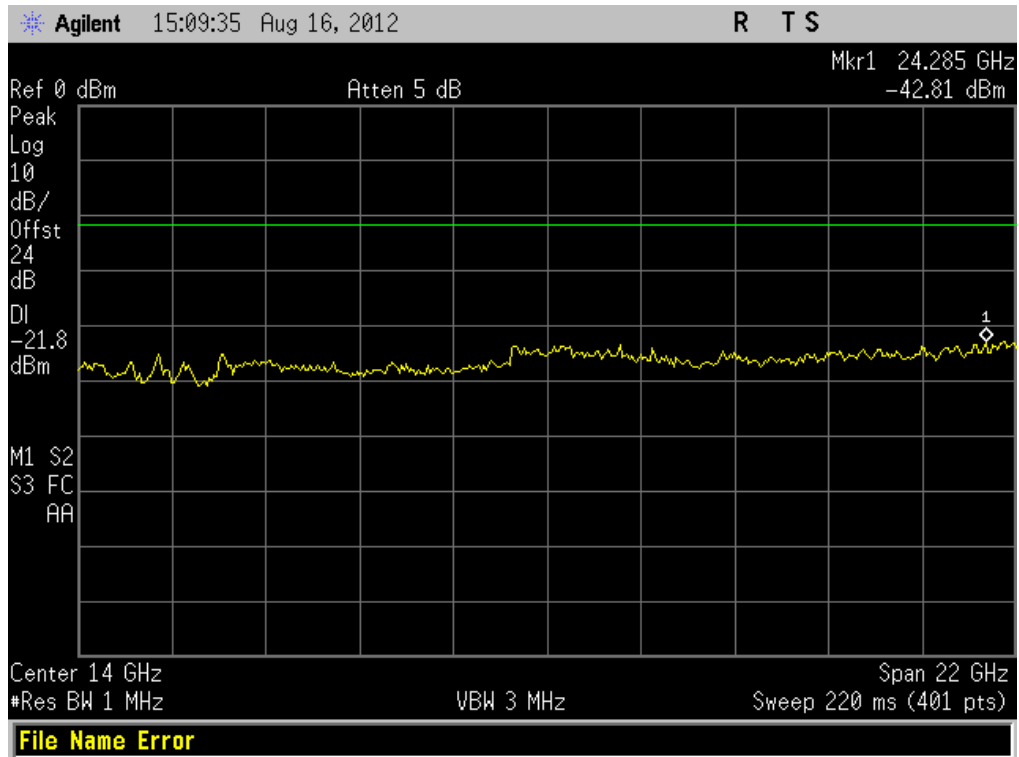

(Plot C.2: Channel = 78, 3GHz to 25GHz)



2.6.3.2. $\pi/4$ -DQPSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-40.66	Plot D.1/D.2	-1.649	-21.6	PASS
39	2441	-39.82	Plot E.1/E.2	-2.907	-22.9	PASS
78	2480	-39.73	Plot F.1/F.2	-1.999	-22.0	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

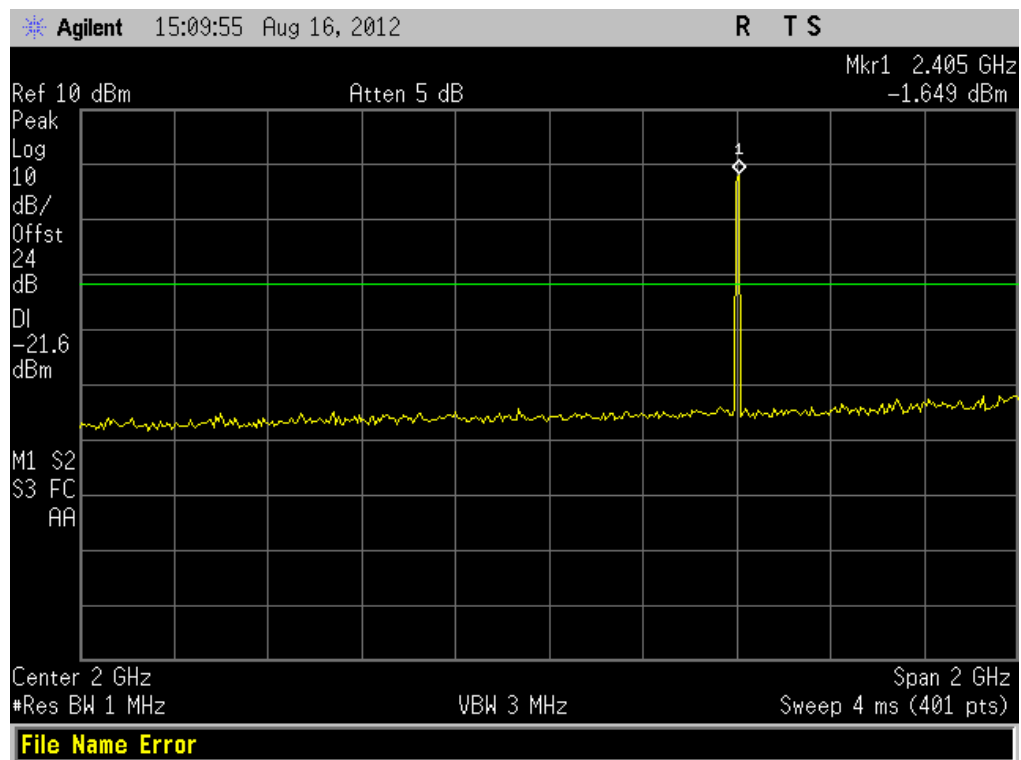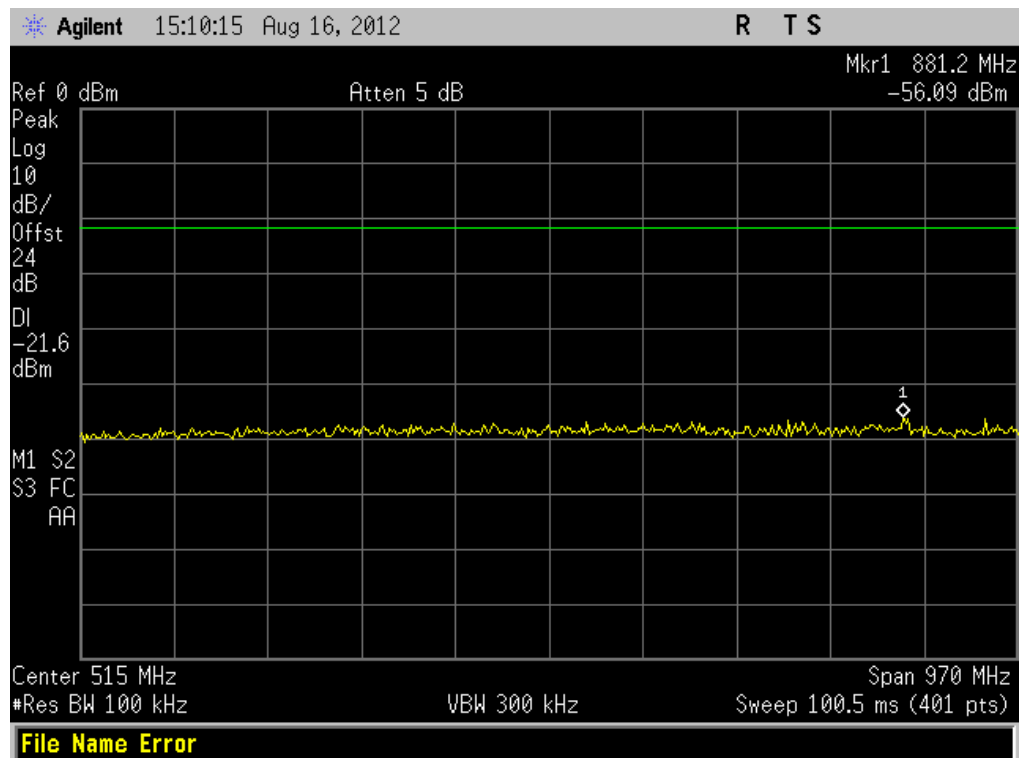


(Plot D.1: Channel = 0, 30MHz to 3GHz)

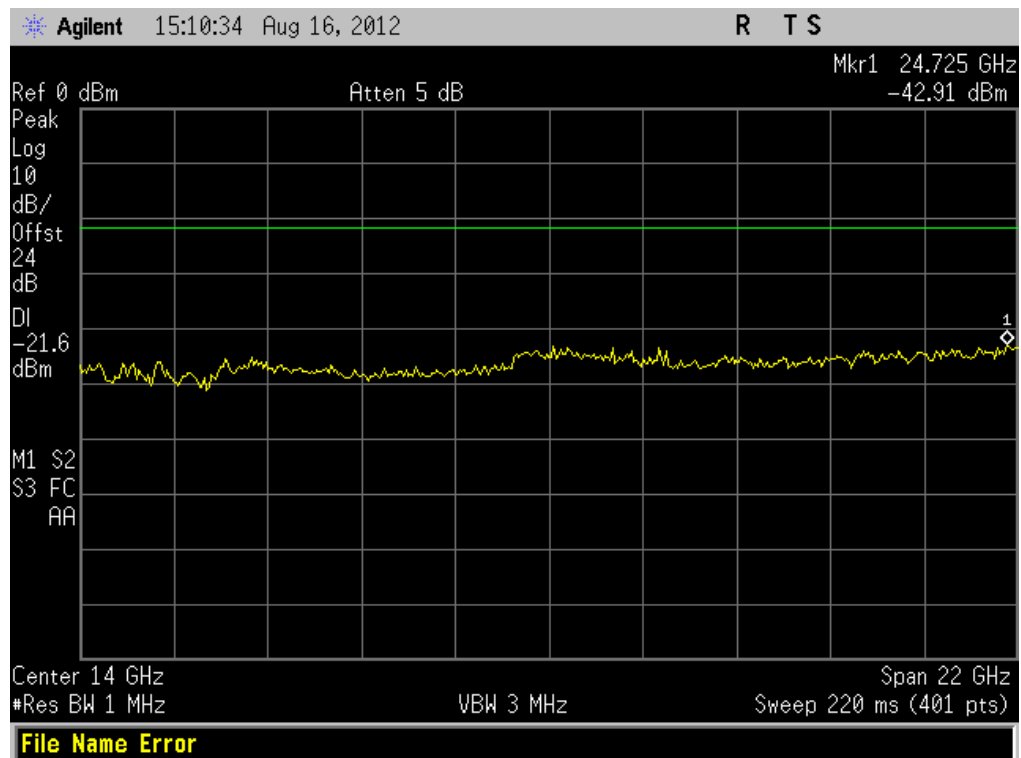


(Plot D.2: Channel = 0, 3GHz to 25GHz)


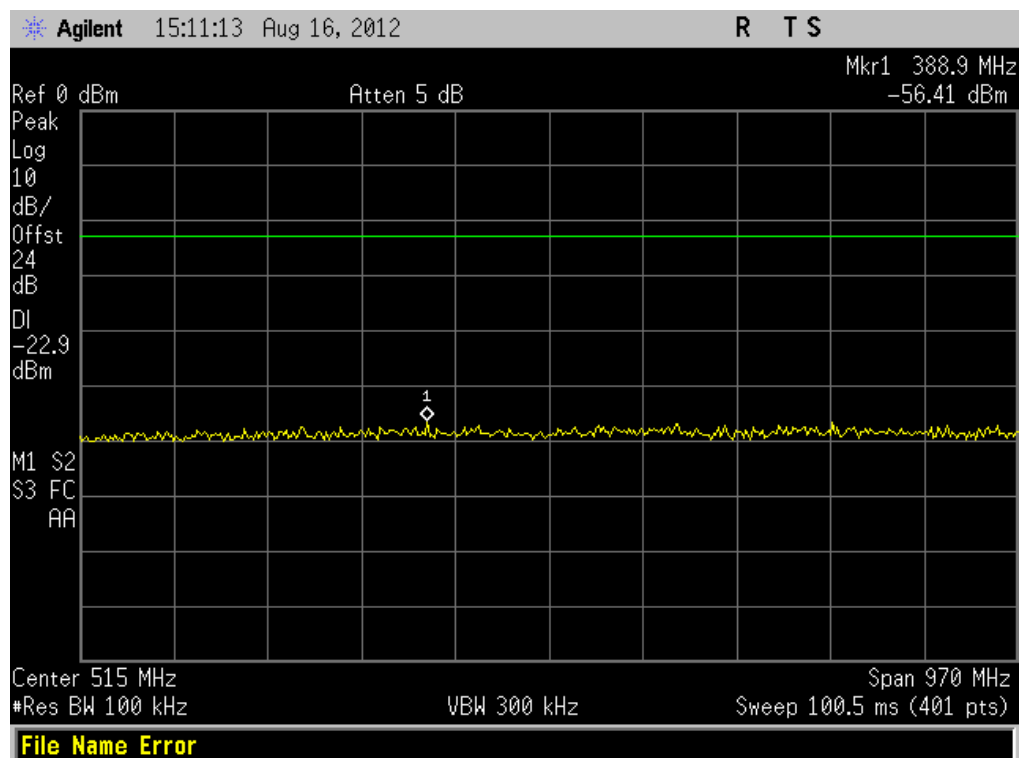


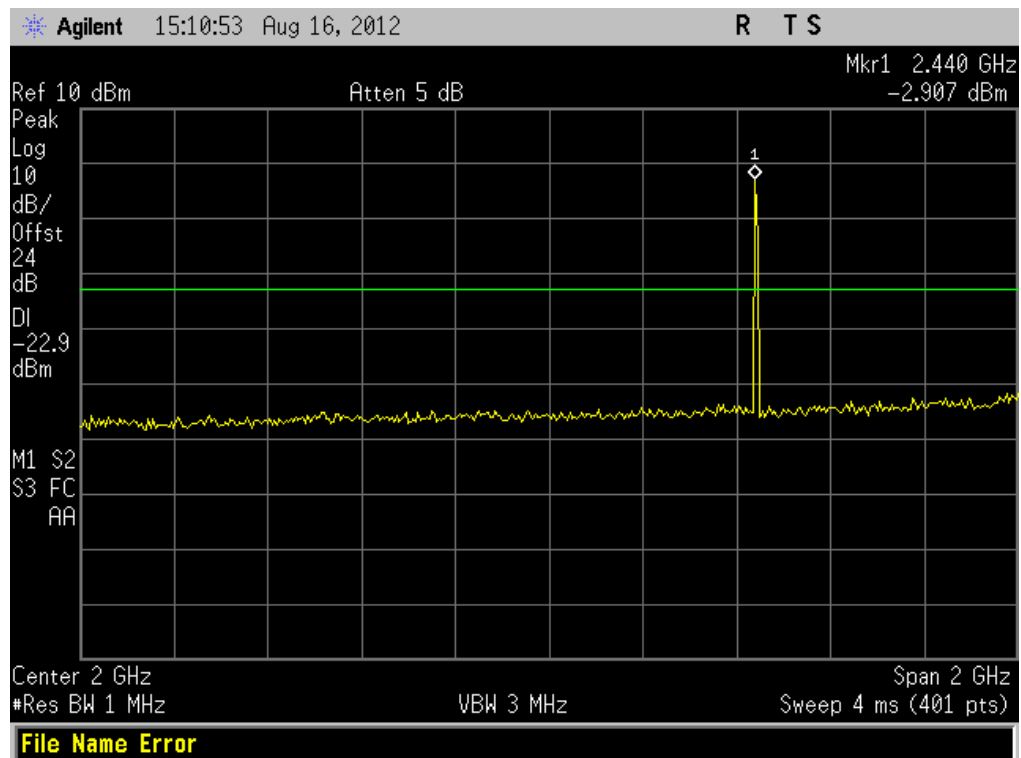


(Plot E.1: Channel = 39, 30MHz to 3GHz)

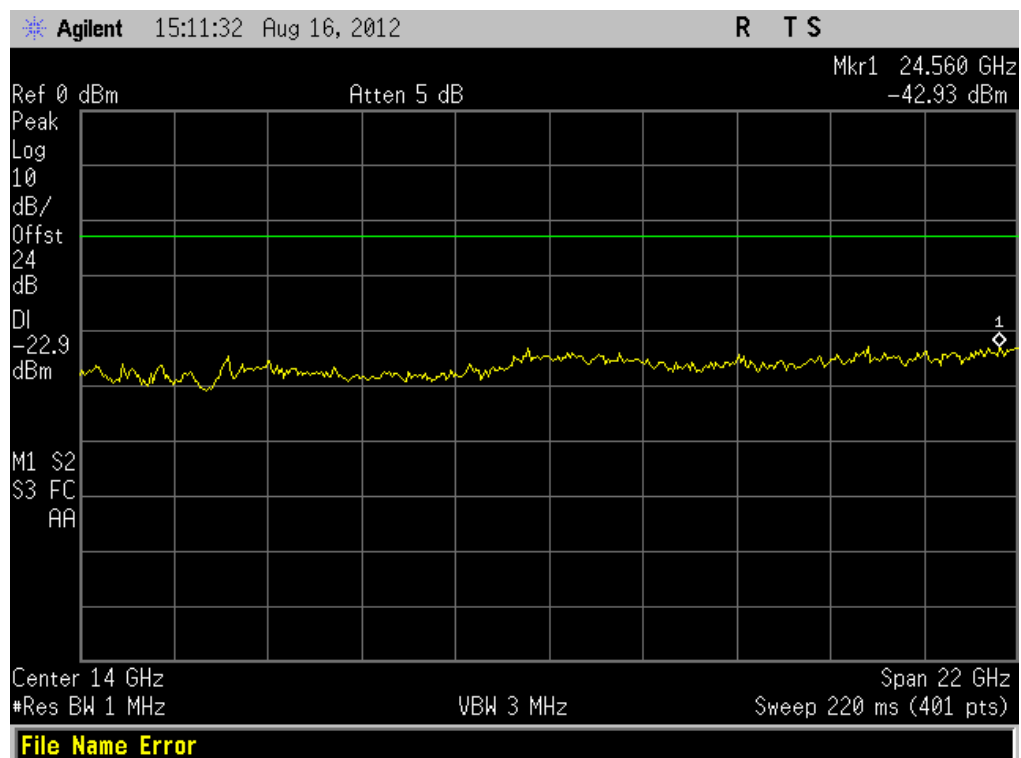

(Plot E.2: Channel = 39, 3GHz to 25GHz)

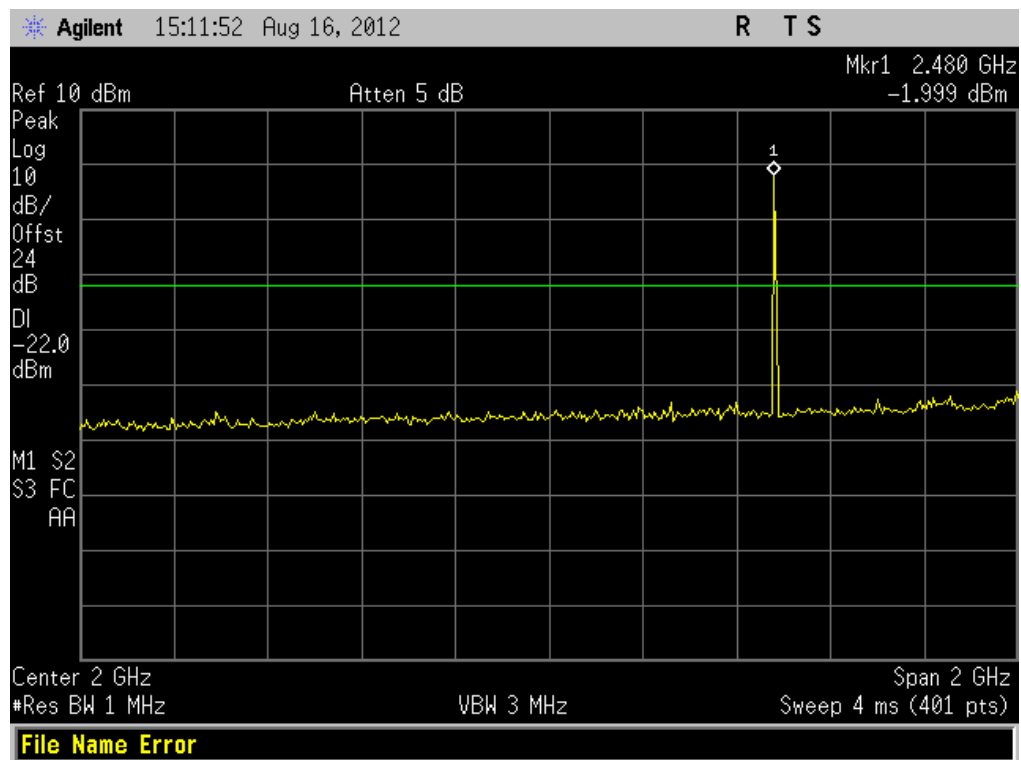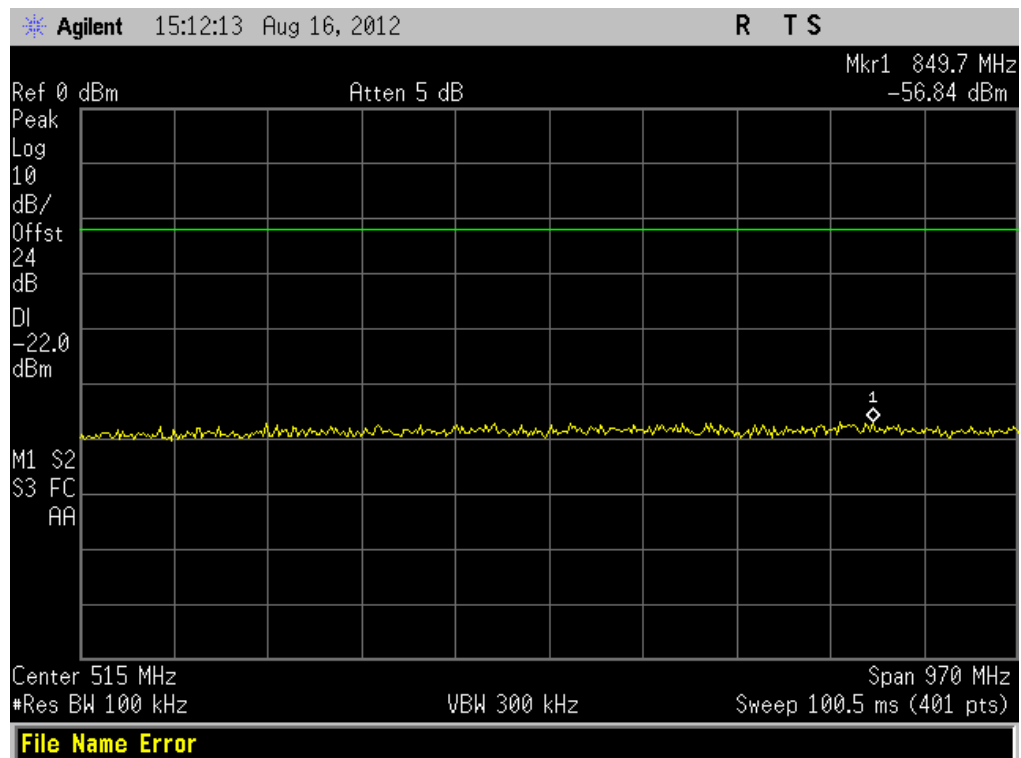

(Plot F.1: Channel = 78, 30MHz to 3GHz)

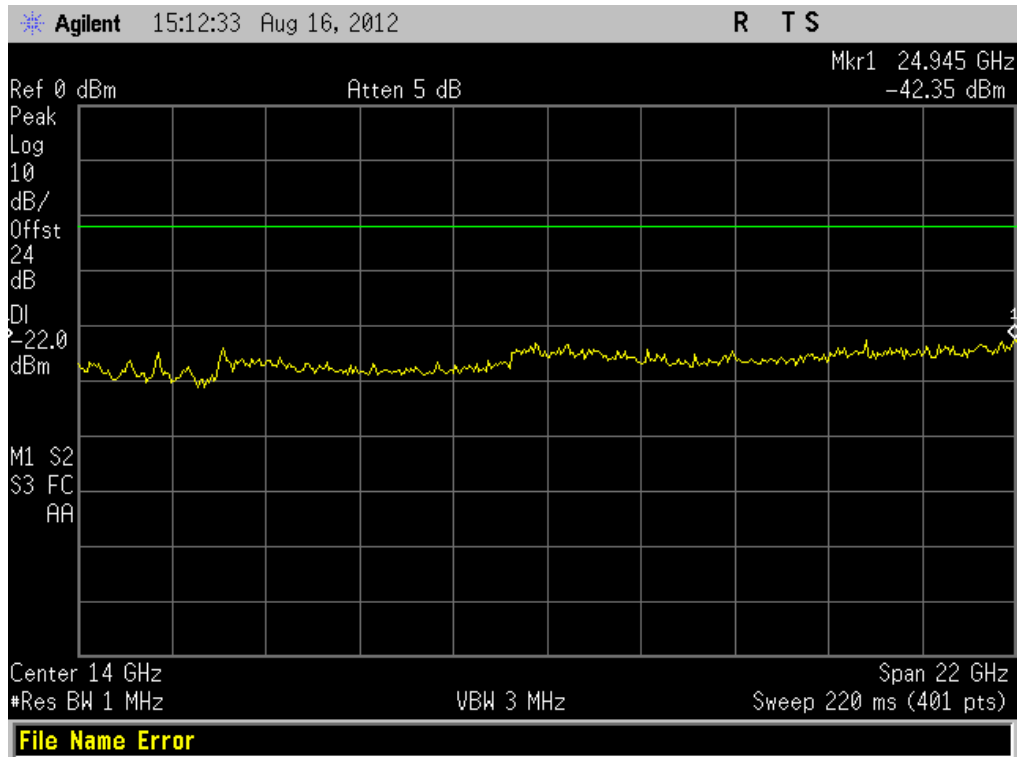

(Plot F.2: Channel = 78, 3GHz to 25GHz)



2.6.3.3. 8-DPSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-39.98	Plot G.1/G.2	-2.579	-22.6	PASS
39	2441	-40.32	Plot H.1/H.2	-3.488	-23.5	PASS
78	2480	-39.91	Plot I.1/I.2	-2.622	-22.6	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

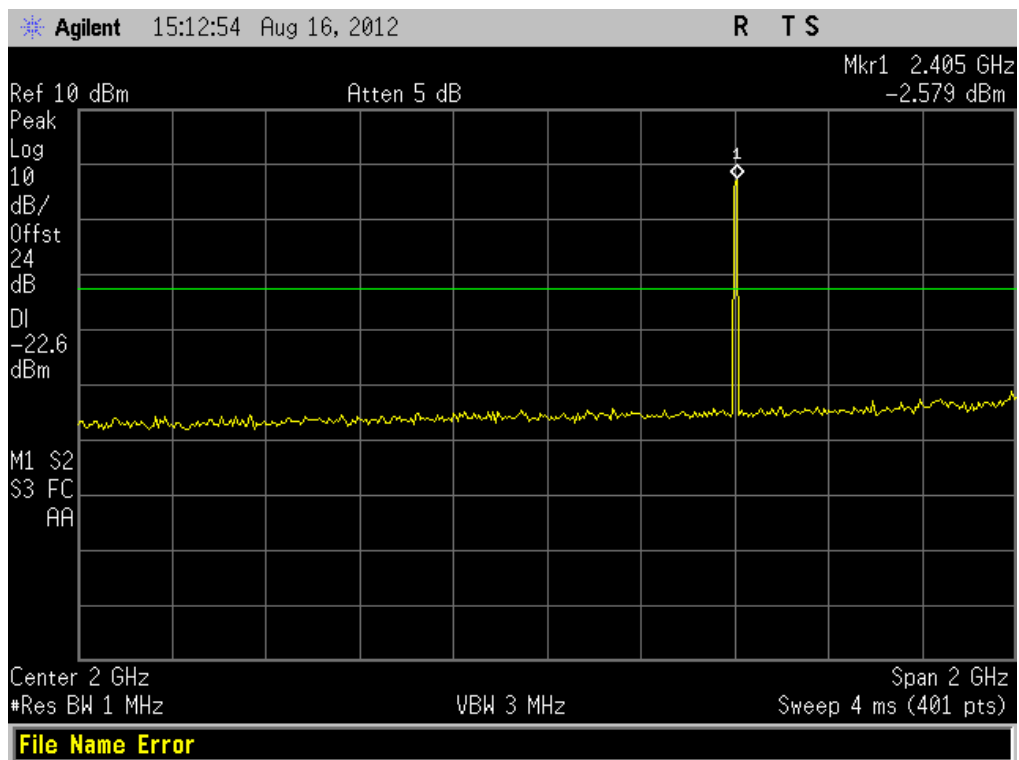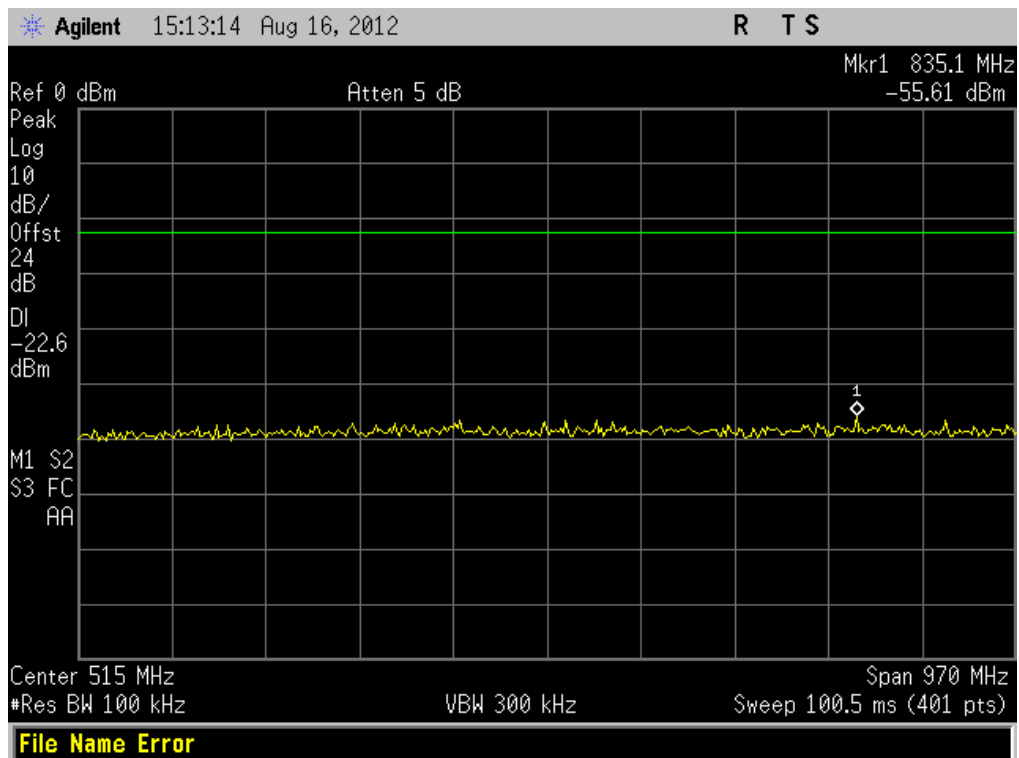


(Plot G.1: Channel = 0, 30MHz to 3GHz)

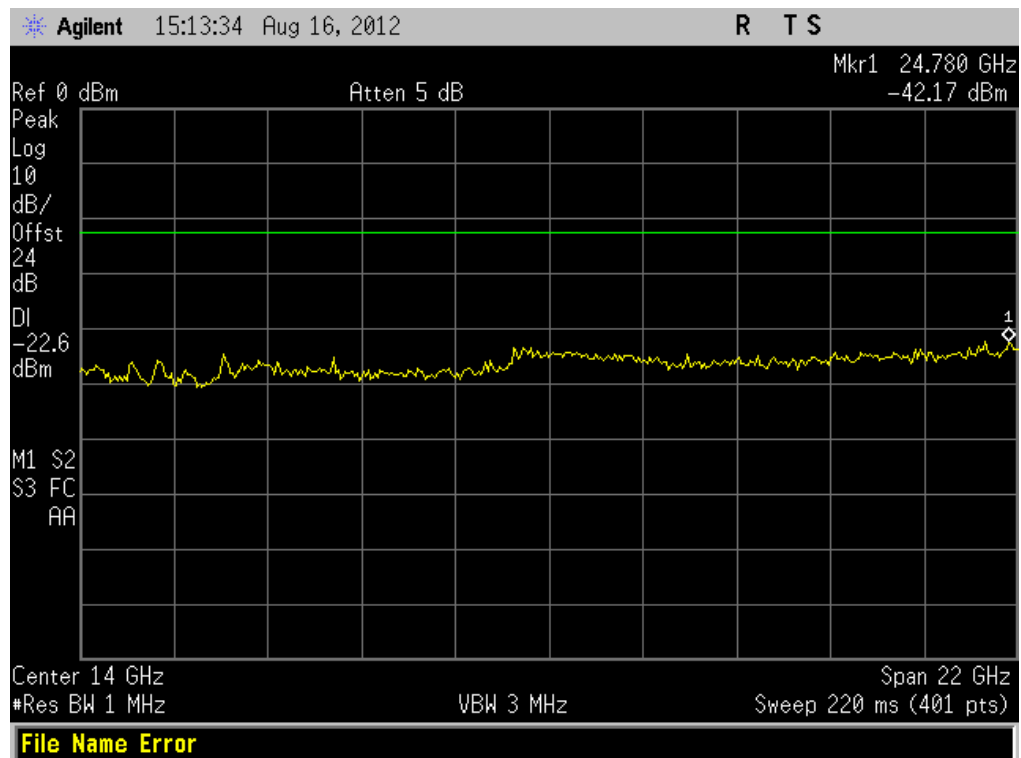


(Plot G.2: Channel = 0, 3GHz to 25GHz)


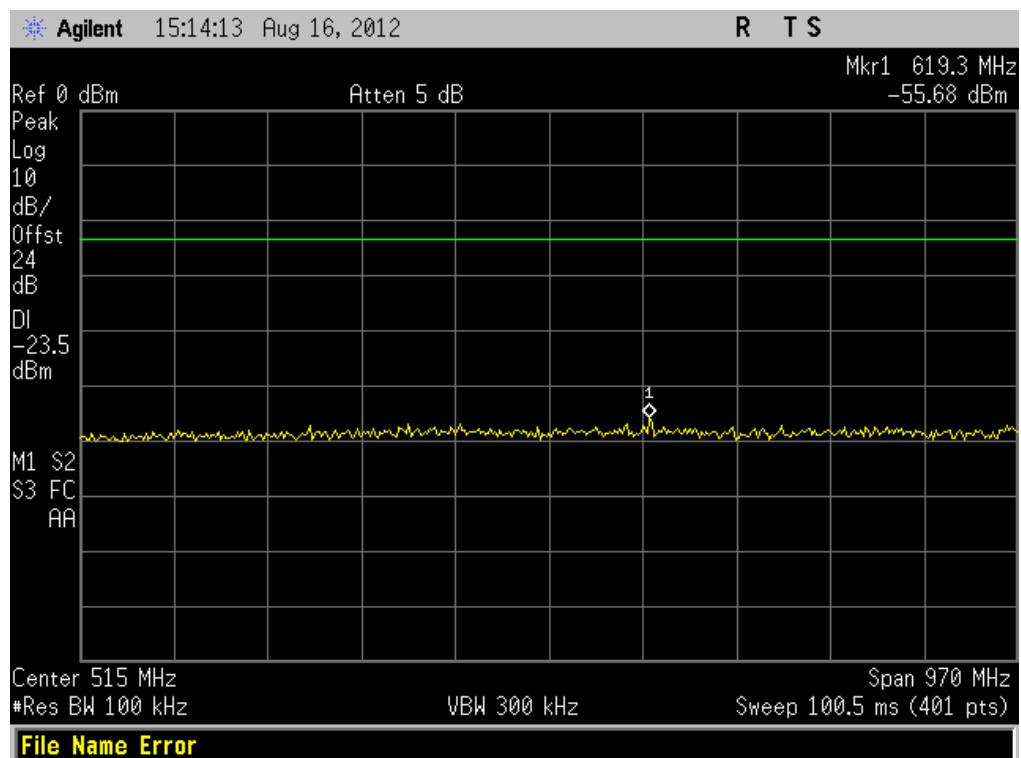


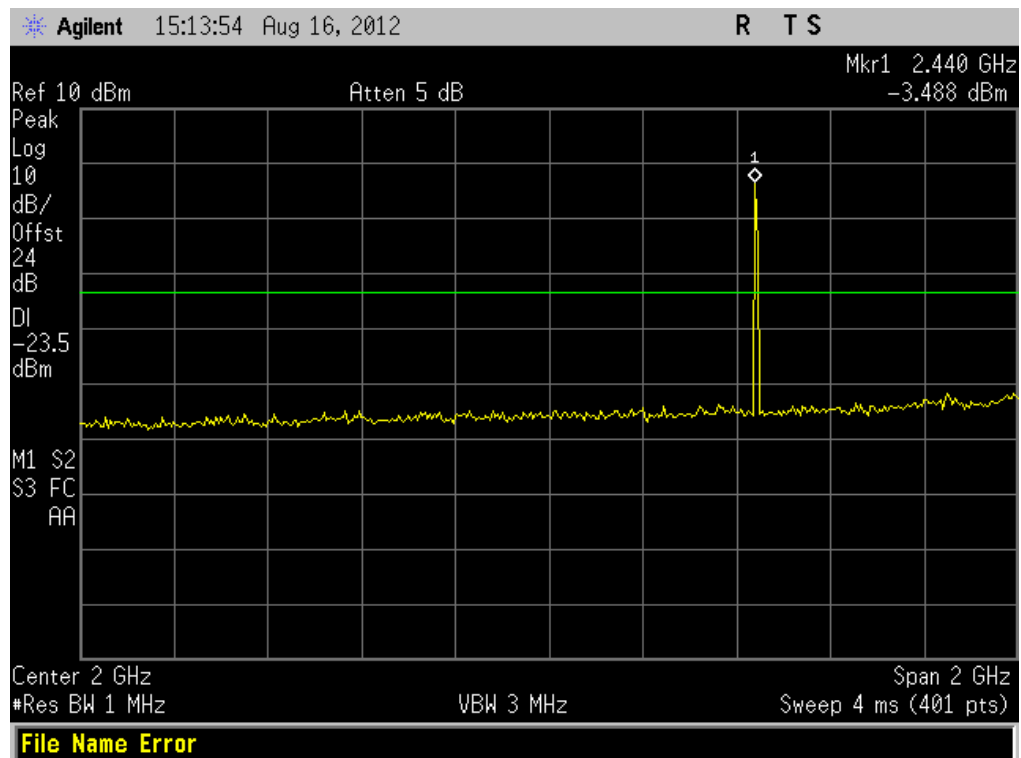


(Plot H.1: Channel = 39, 30MHz to 3GHz)

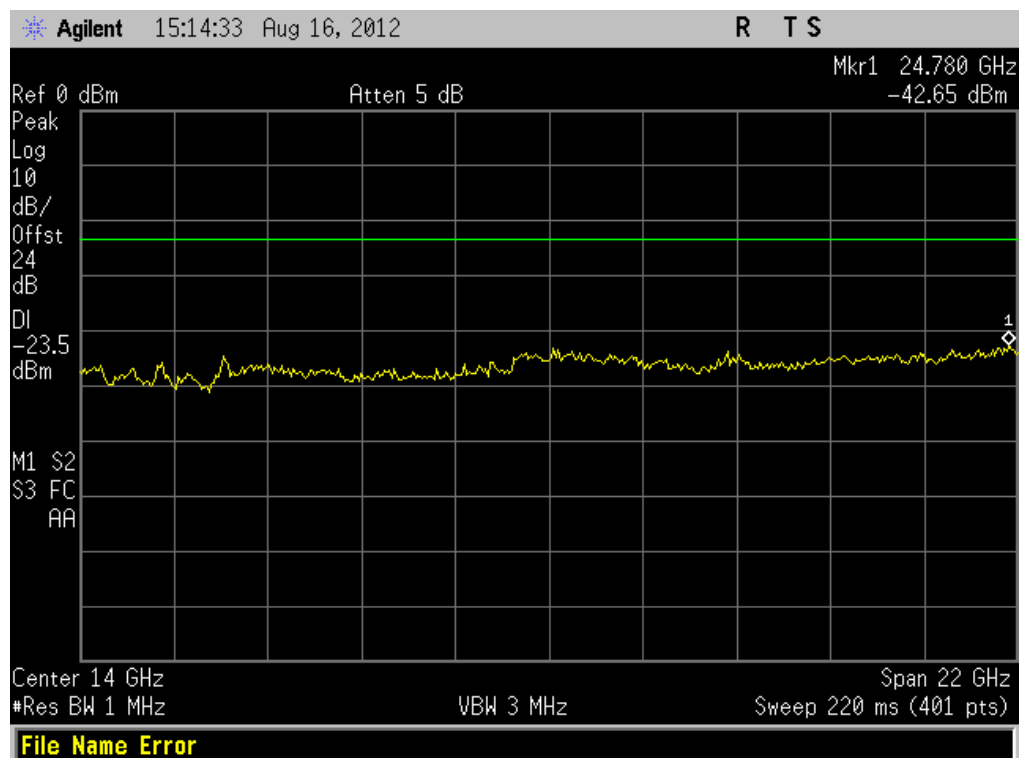

(Plot H.2: Channel = 39, 3GHz to 25GHz)

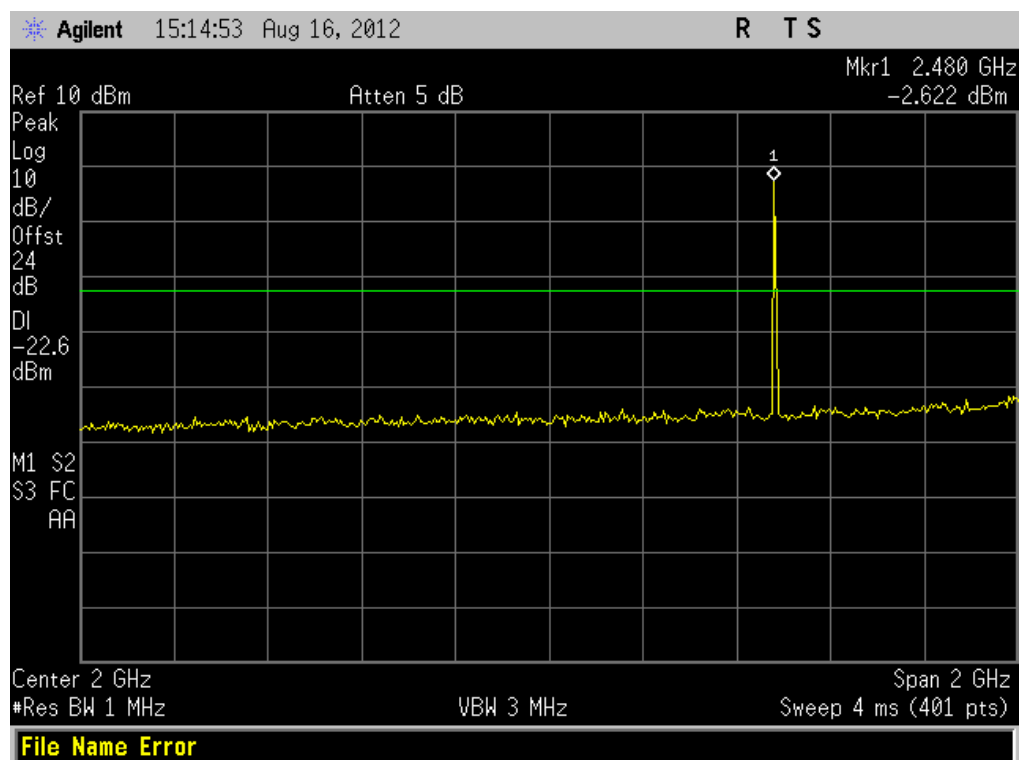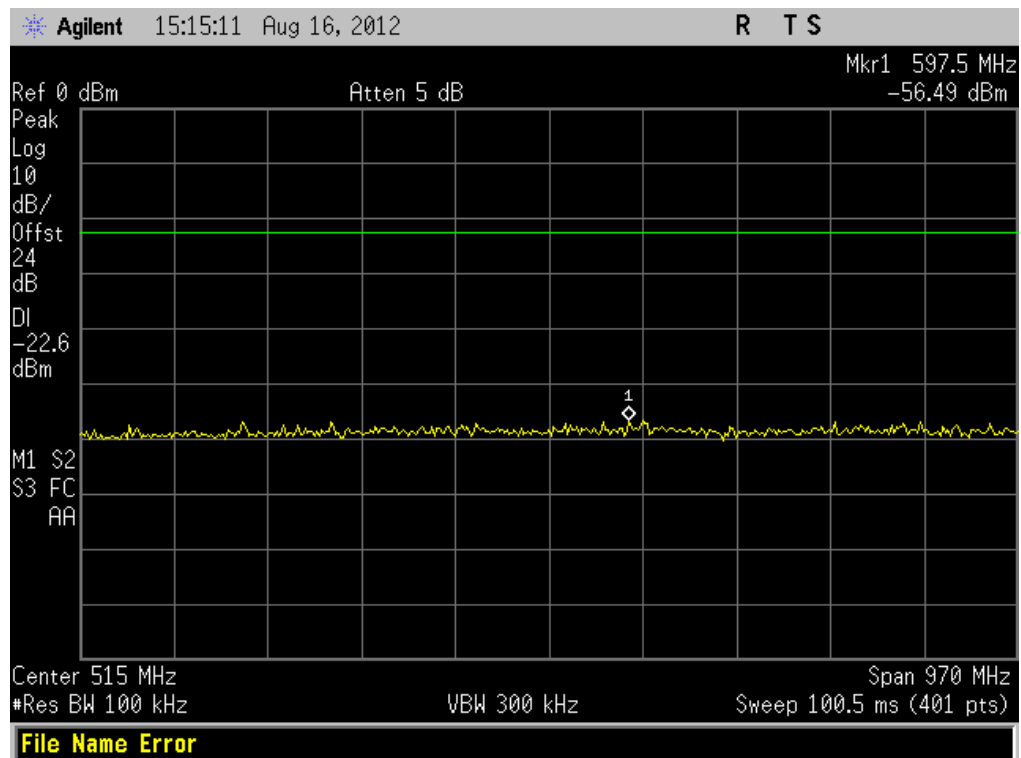

(Plot I.1: Channel = 78, 30MHz to 3GHz)

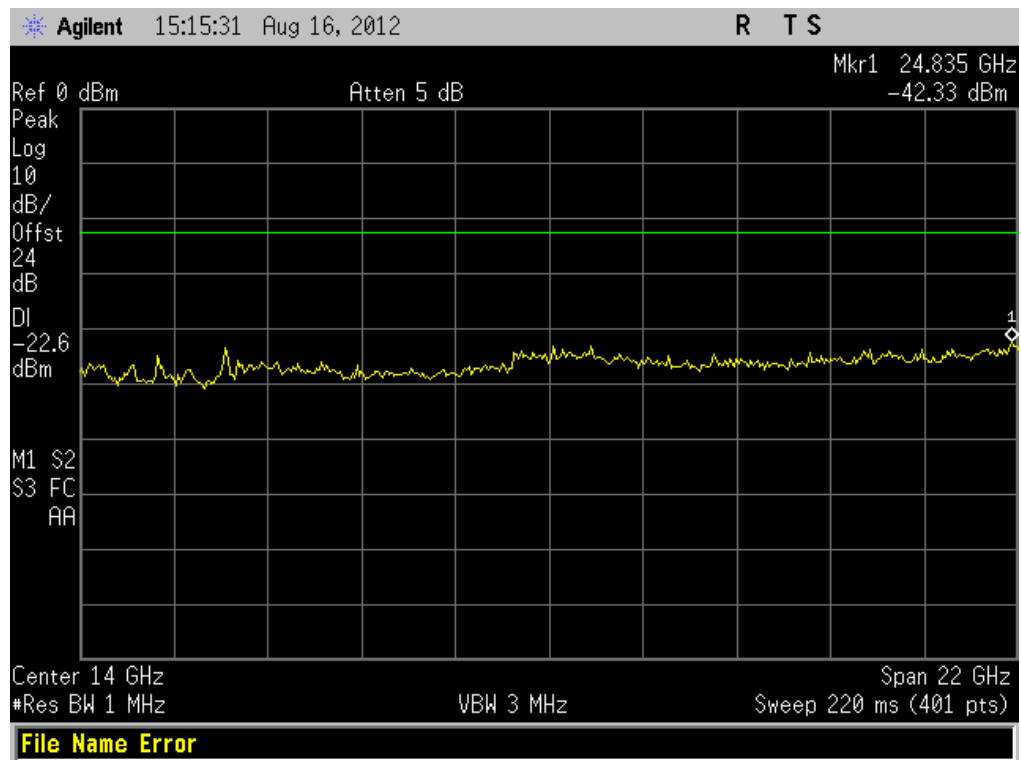

(Plot I.2: Channel = 78, 3GHz to 25GHz)


2.7. Band Edge

2.7.1. Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.7.2. Test Description

A. Test Setup:

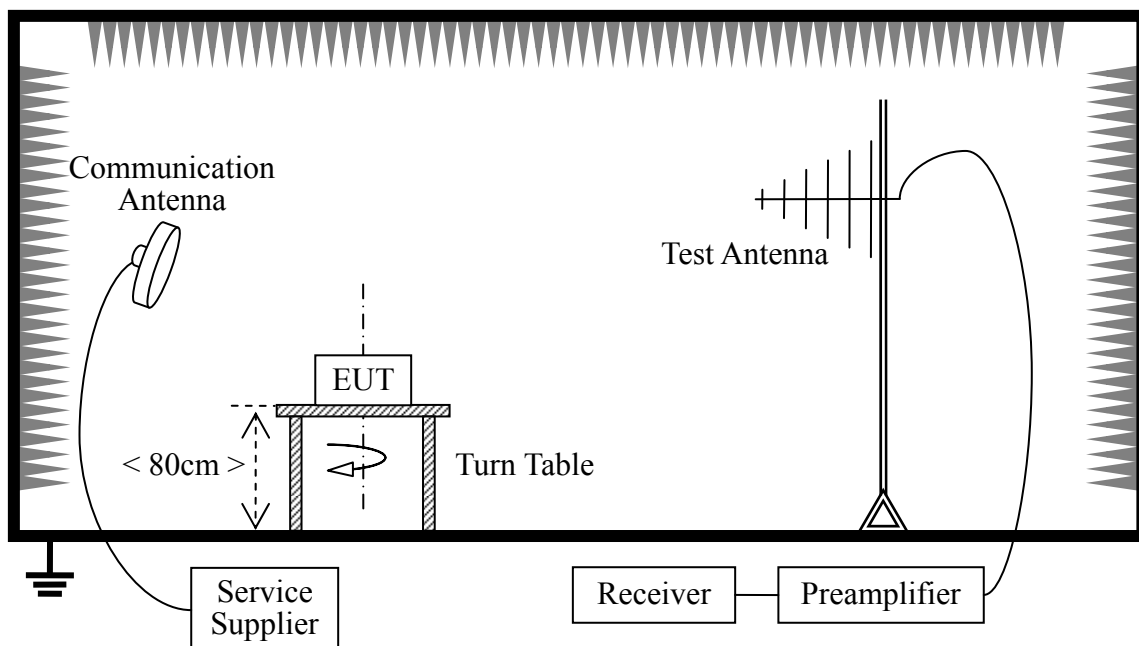

The Bluetooth Module of the EUT is powered by the Battery. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength..

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date
System Simulator	R&S	CMU200	100448	2012.05
Receiver	Agilent	E7405A	US44210471	2012.05
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2012.05

Description	Manufacturer	Model	Serial No.	Cal. Date
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2012.05

2.7.3. Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest and highest channels are tested to verify the band edge emissions.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain


A_{Factor} : Antenna Factor at 3m

2.7.3.1. GFSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Receiver Reading U_R (dBuV)		A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)		Limit (dB μ V/m)		Verdict
		PK	AV			PK	AV	PK	AV	
0	2402	40.03	36.08	-30.93	32.56	42.51	37.71	74	54	PASS
78	2480	44.68	36.41	-29.05	32.5	48.13	39.86	74	54	PASS


B. Test Plots:

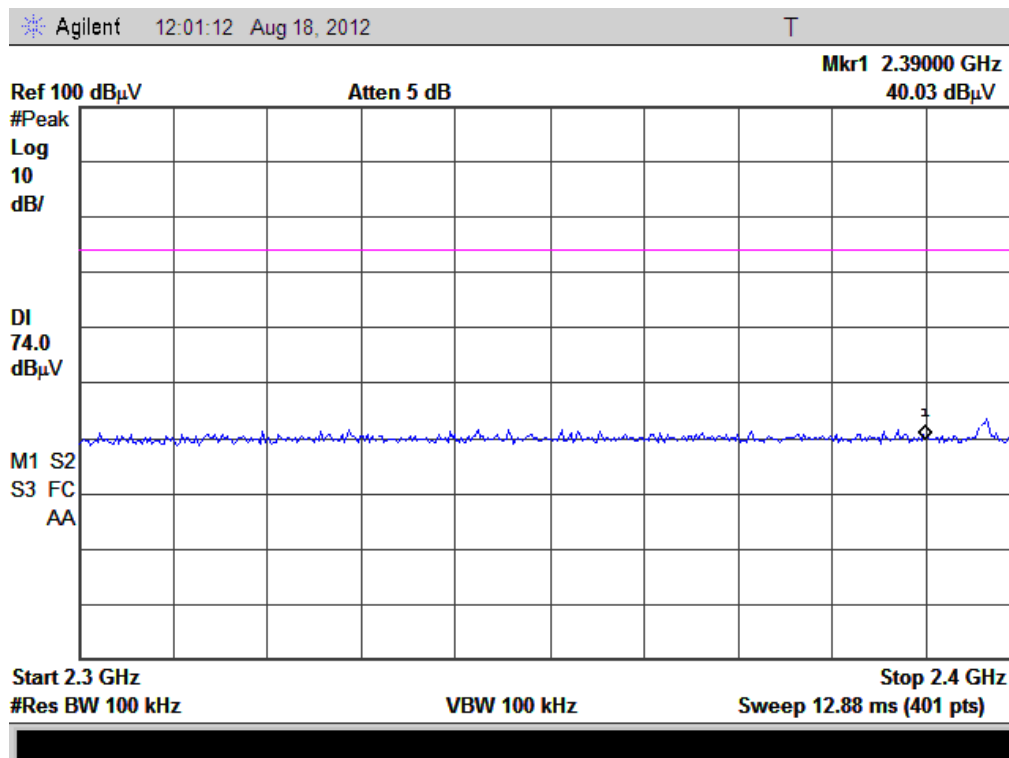


(Plot A1: Channel = 0 PEAK)

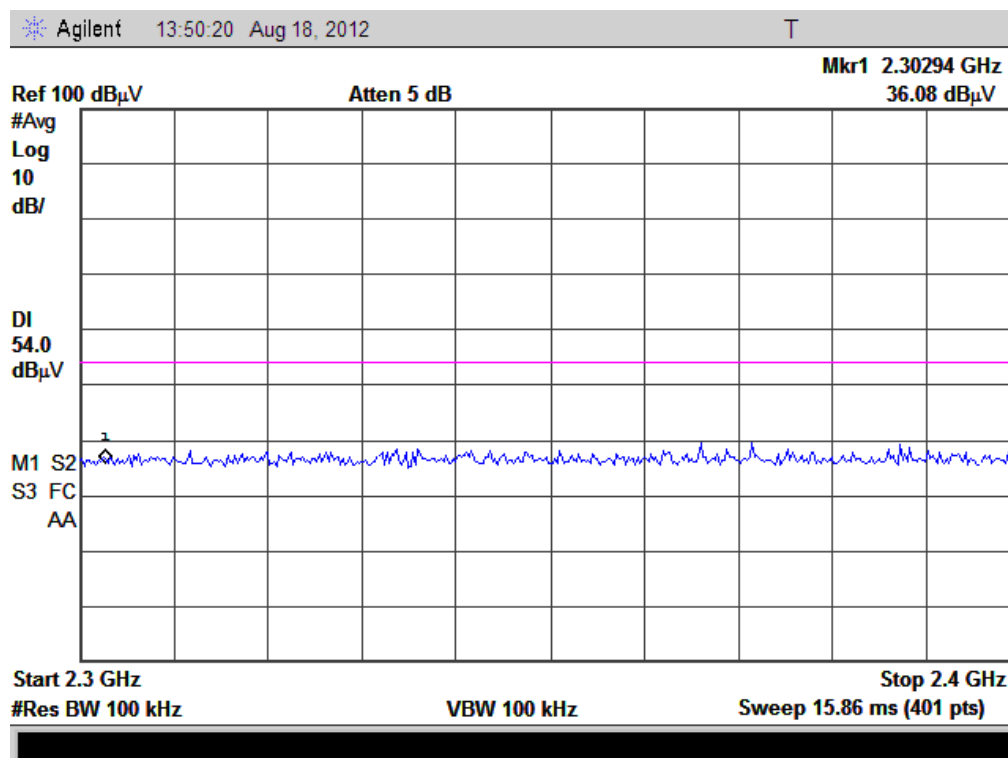

(Plot A2: Channel = 0 AVERAGE)

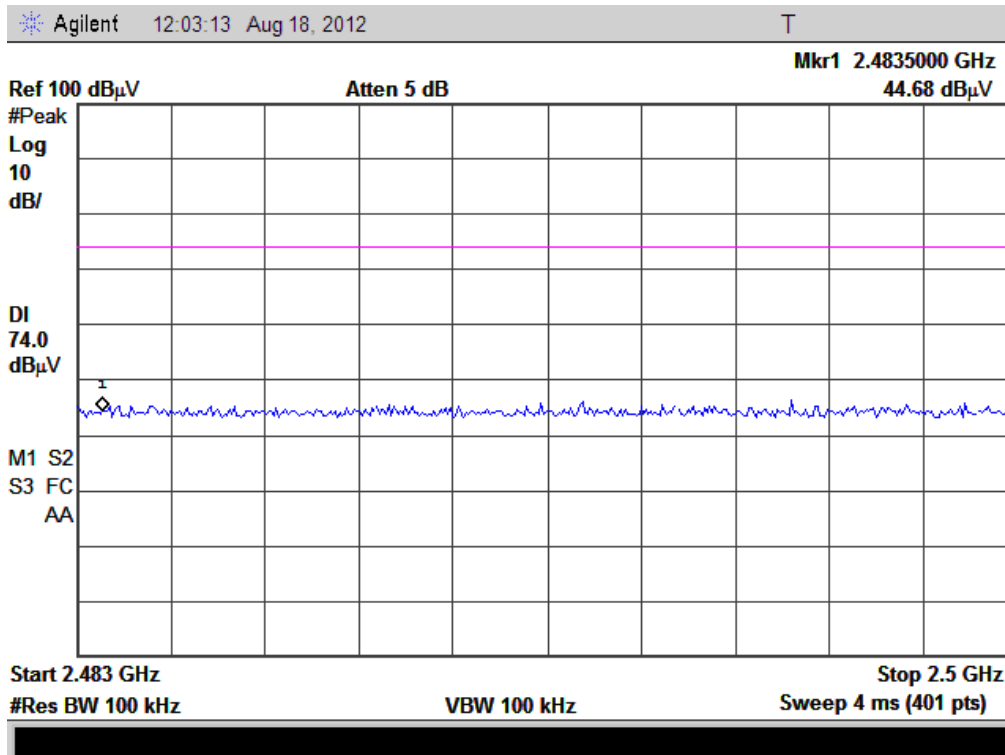

(Plot B1: Channel = 78 PEAK)

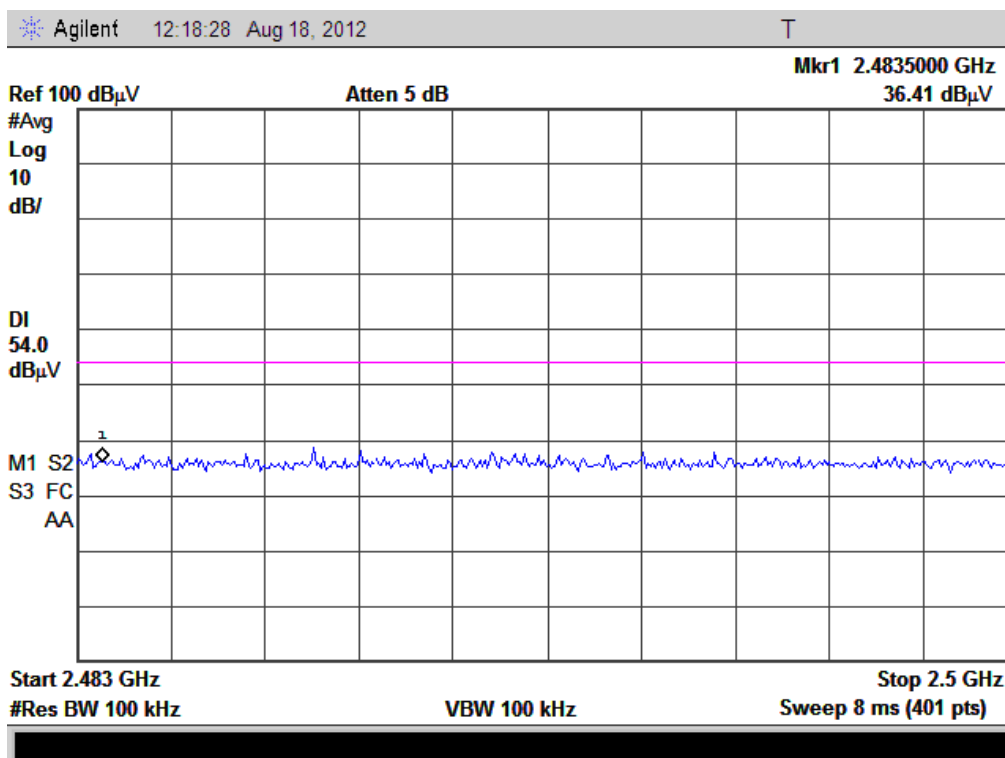


(Plot B2: Channel = 78 AVERAGE)

2.7.3.2. $\pi/4$ -DQPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Receiver Reading U_R (dBuV)		A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)		Limit (dB μ V/m)		Verdict
		PK	AV			PK	AV	PK	AV	
0	2402	39.70	37.97	-30.93	32.56	41.33	39.60	74	54	PASS
78	2480	39.43	37.07	-29.05	32.5	42.88	40.52	74	54	PASS


B. Test Plots:

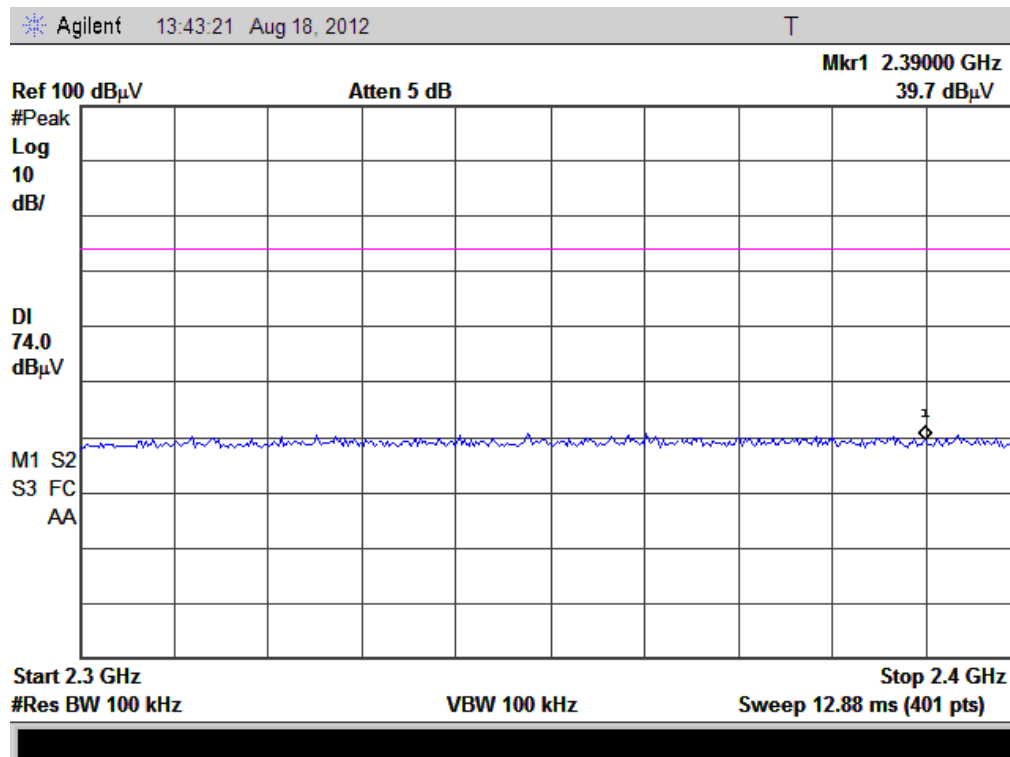


(Plot A1: Channel = 0 PEAK)

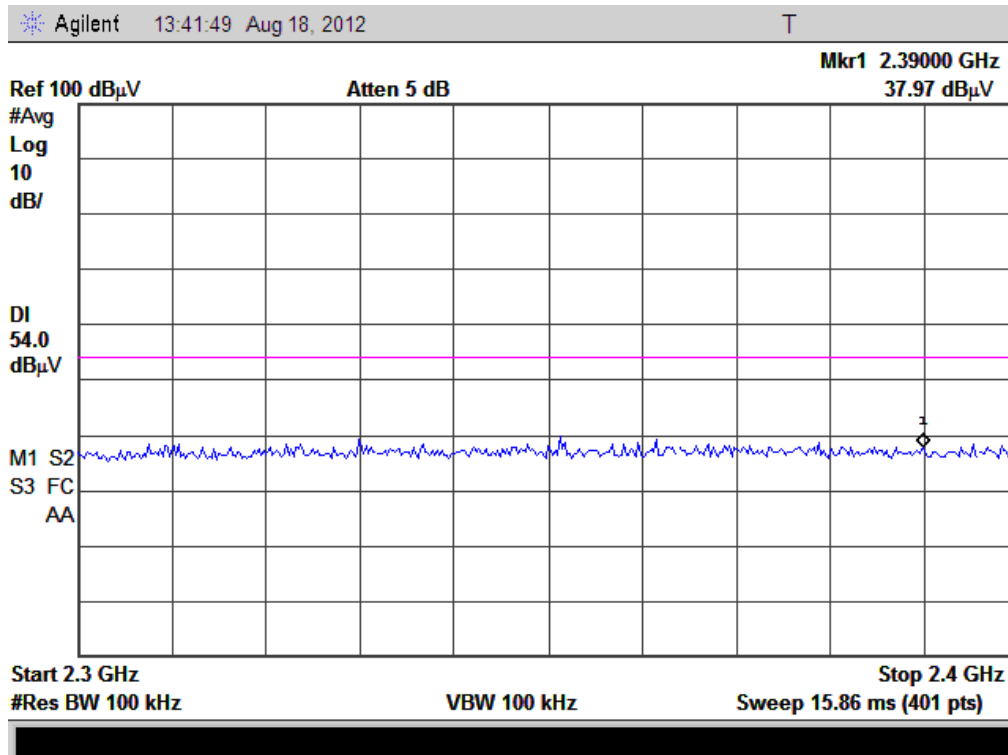

(Plot A2: Channel = 0 AVERAGE)

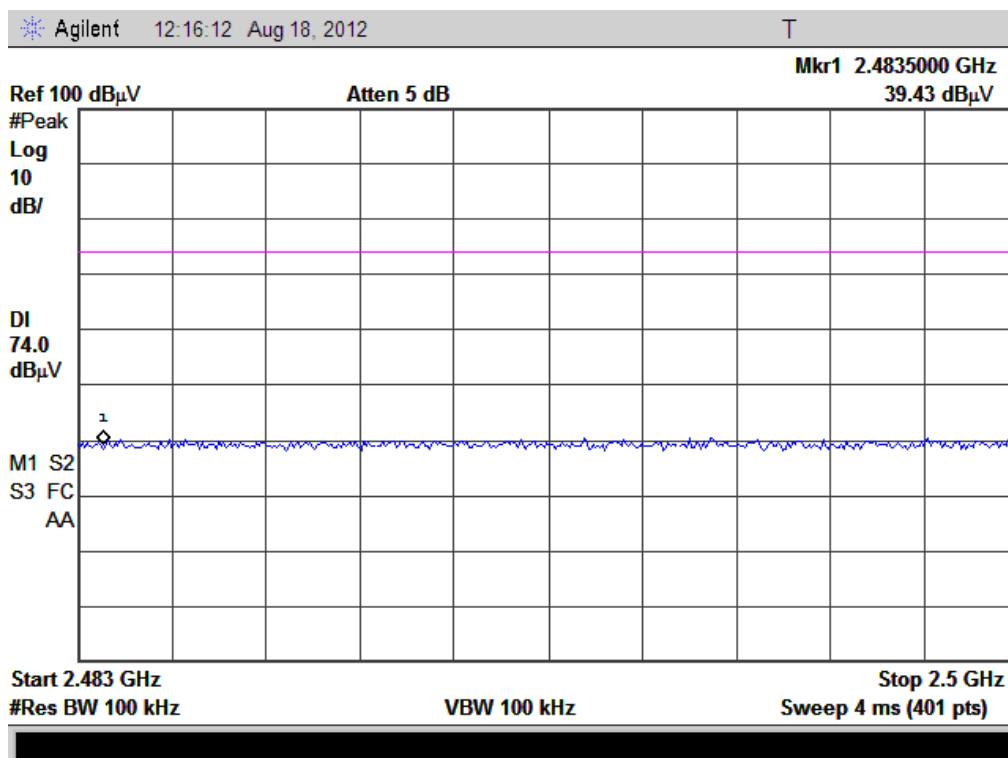

(Plot B1: Channel = 78 PEAK)

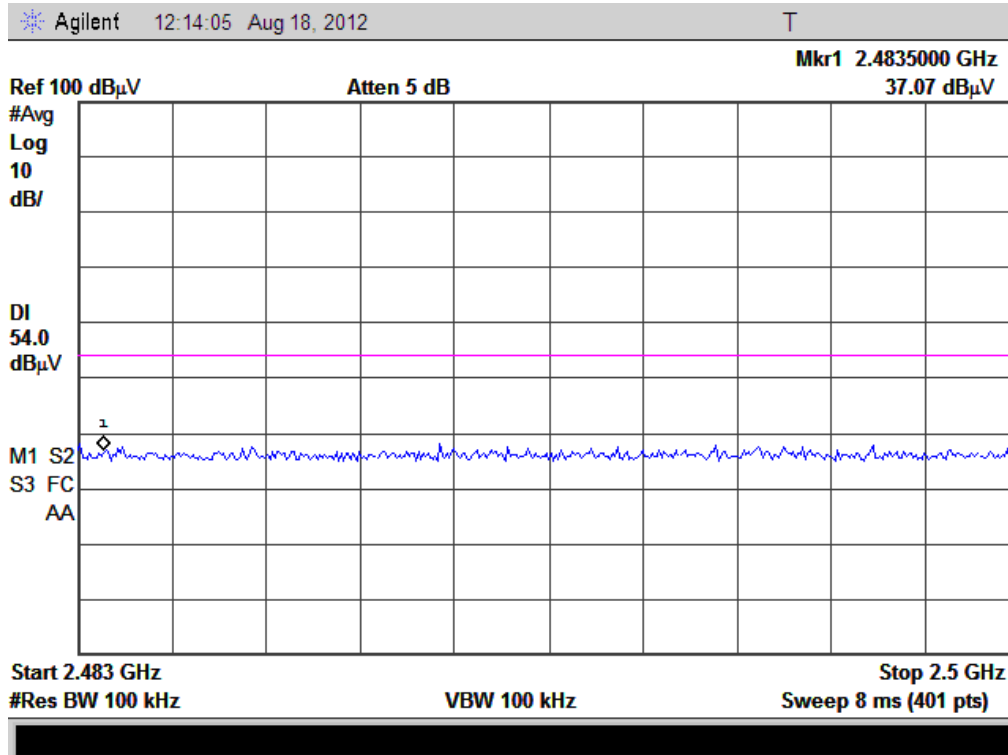


(Plot B2: Channel = 78 AVERAGE)

2.7.3.3. 8-DPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Receiver Reading U_R (dBμV)		A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)		Limit (dBμV/m)		Verdict
		PK	AV			PK	AV	PK	AV	
0	2402	38.48	36.38	-30.93	32.56	40.11	38.01	74	54	PASS
78	2480	38.92	36.75	-29.05	32.50	42.37	40.20	74	54	PASS


B. Test Plots:

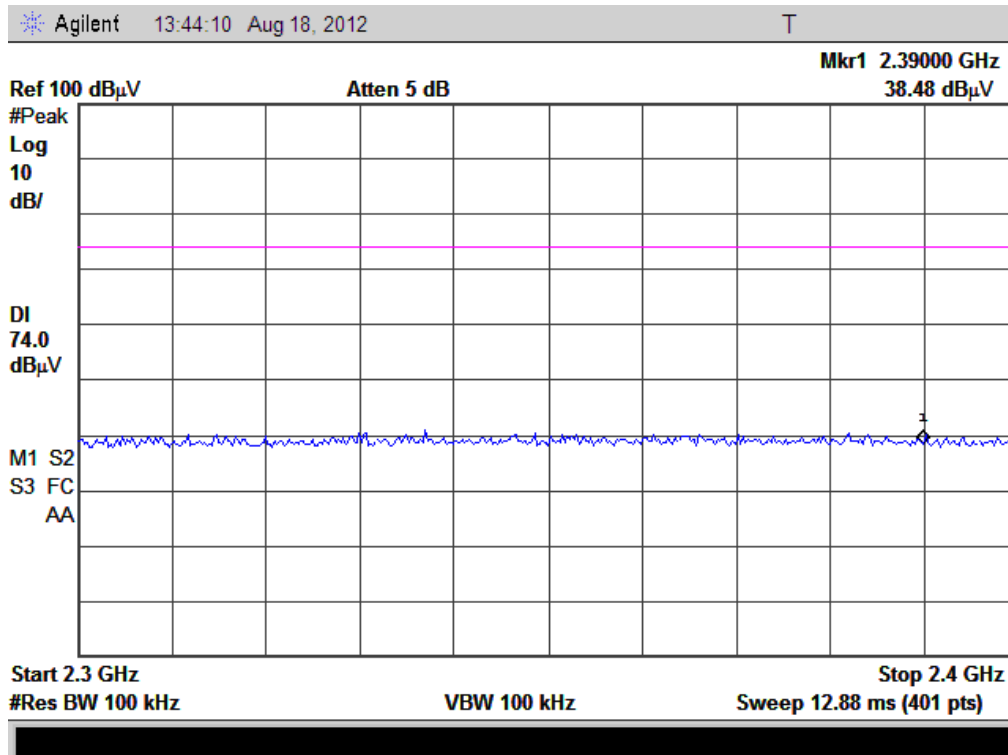


(Plot A1: Channel = 0 PEAK)

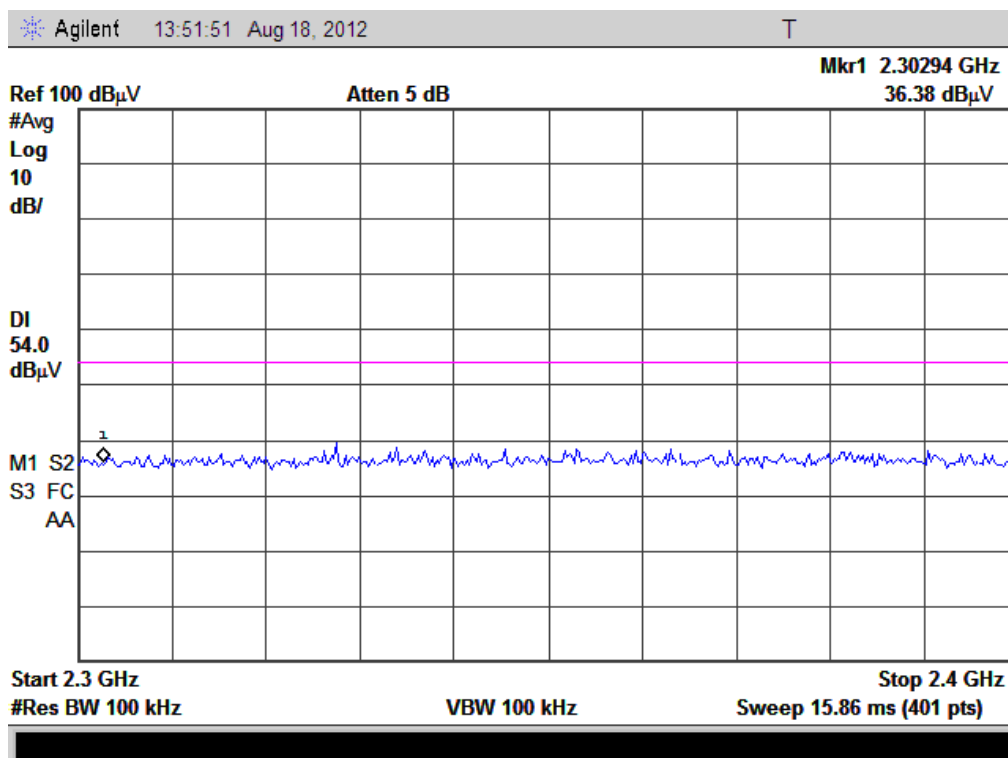

(Plot A2: Channel = 0 AVERAGE)

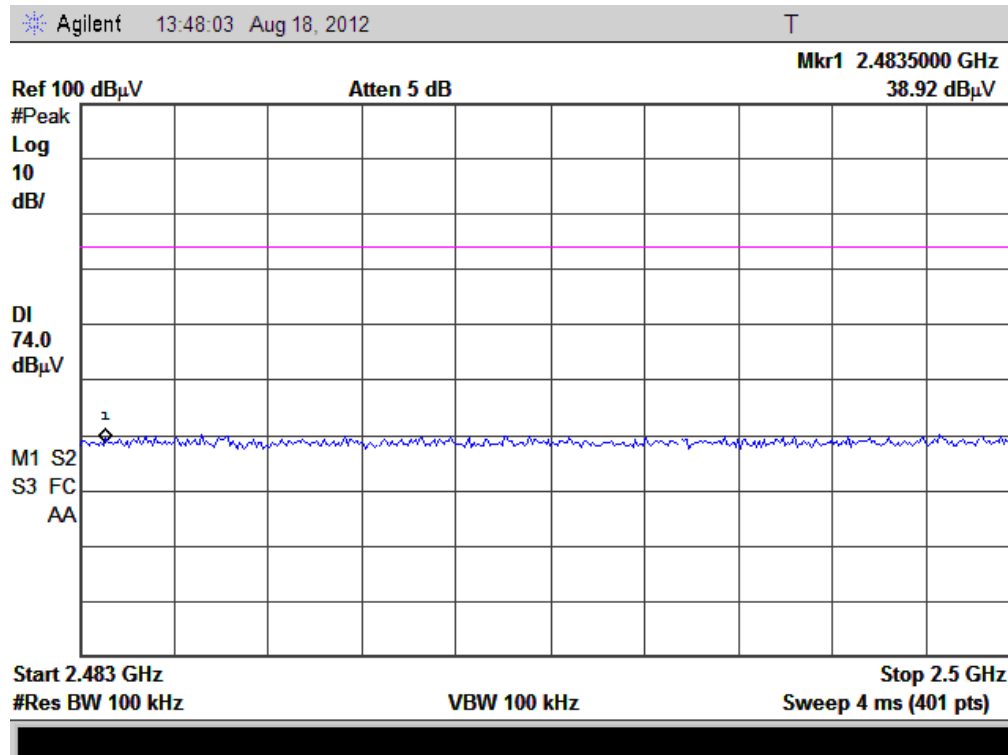

(Plot B1: Channel = 78 PEAK)

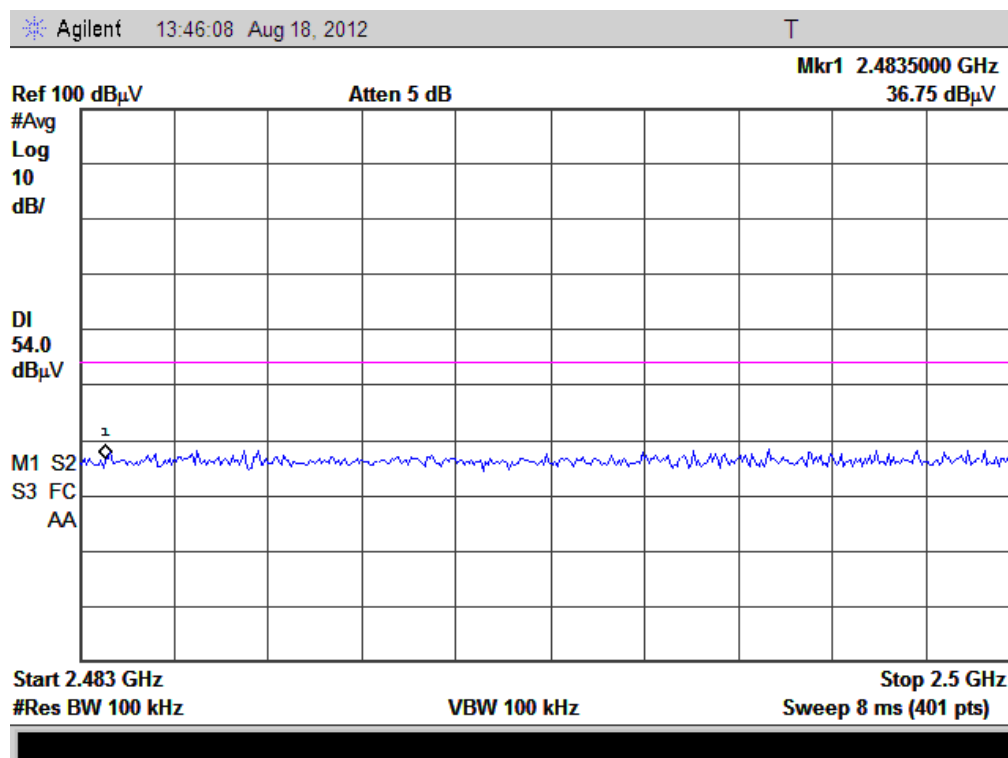

(Plot B2: Channel = 78 AVERAGE)

2.8. Conducted Emission

2.8.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.8.2. Test Description

A. Test Setup:

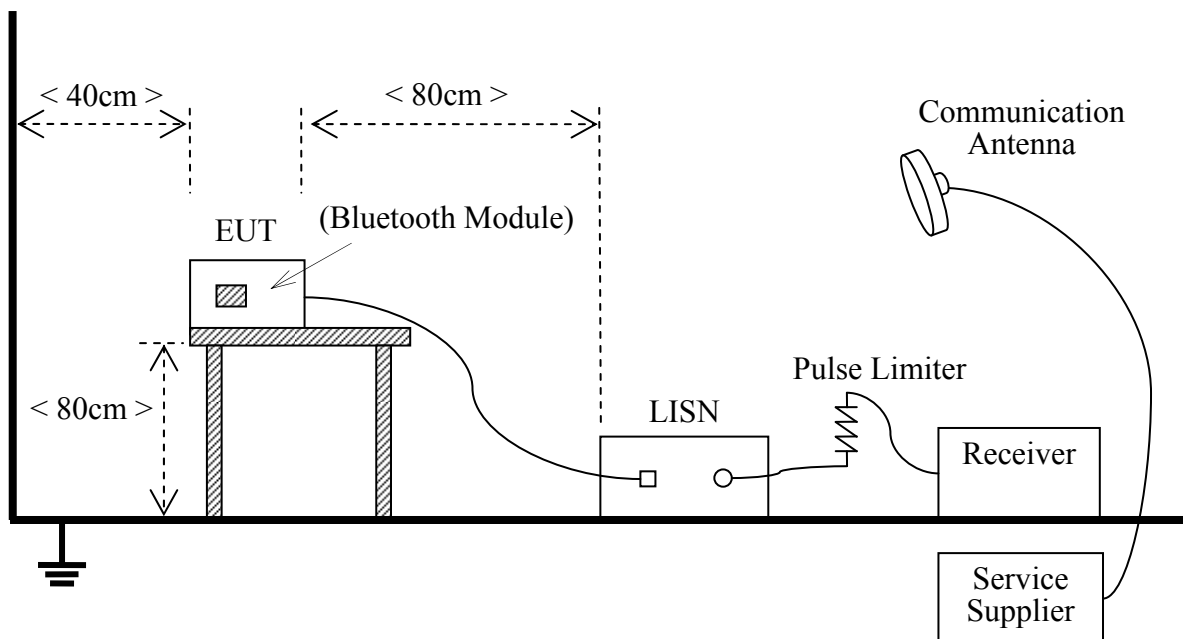

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4:2009

The Bluetooth Module of the EUT is powered by the Battery charged with the AC Adapter which is powered by 120V, 60Hz AC mains supply. The factors of the site are calibrated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting


339 bytes DH5 packages at maximum power.

B. Equipments List:


Description	Manufacturer	Model	Serial No.	Cal. Date
Receiver	Agilent	E7405A	US44210471	2012.05
LISN	Schwarzbeck	NSLK 8127	812744	2012.05
Service Supplier	R&S	CMU200	100448	2012.05
Pulse Limiter (20dB)	Schwarzbeck	VTSD 9561-D	9391	(n.a.)

2.8.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

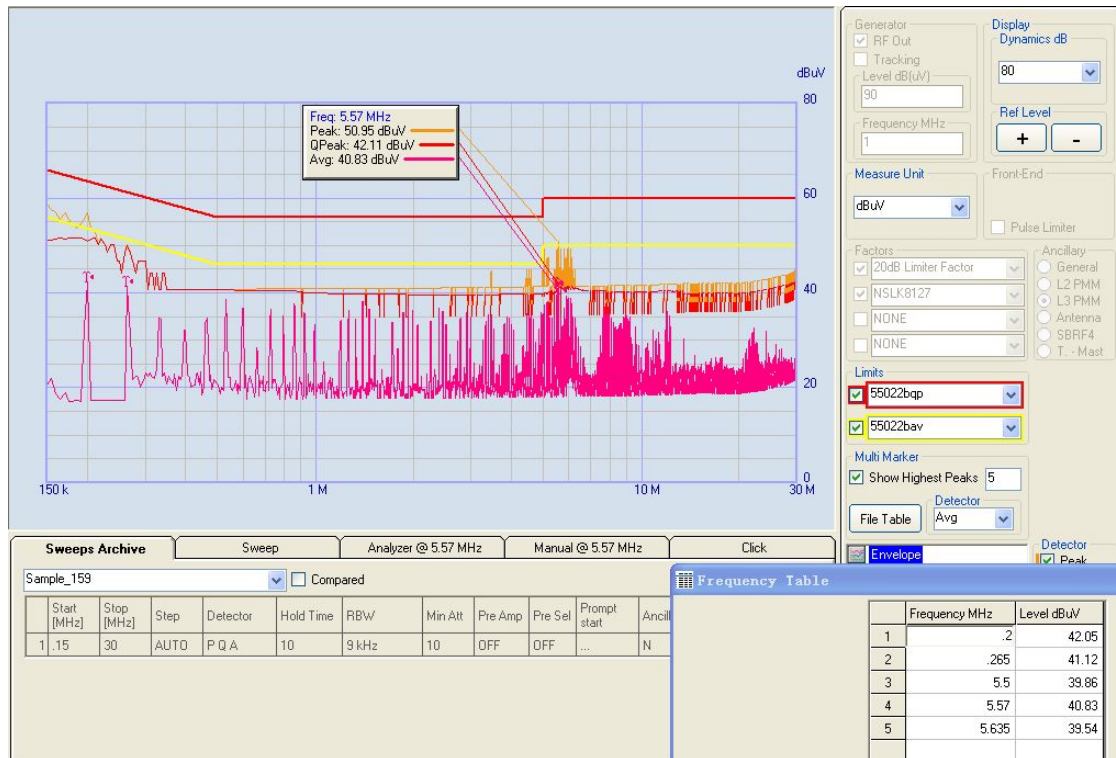

(Plot A: L Phase)

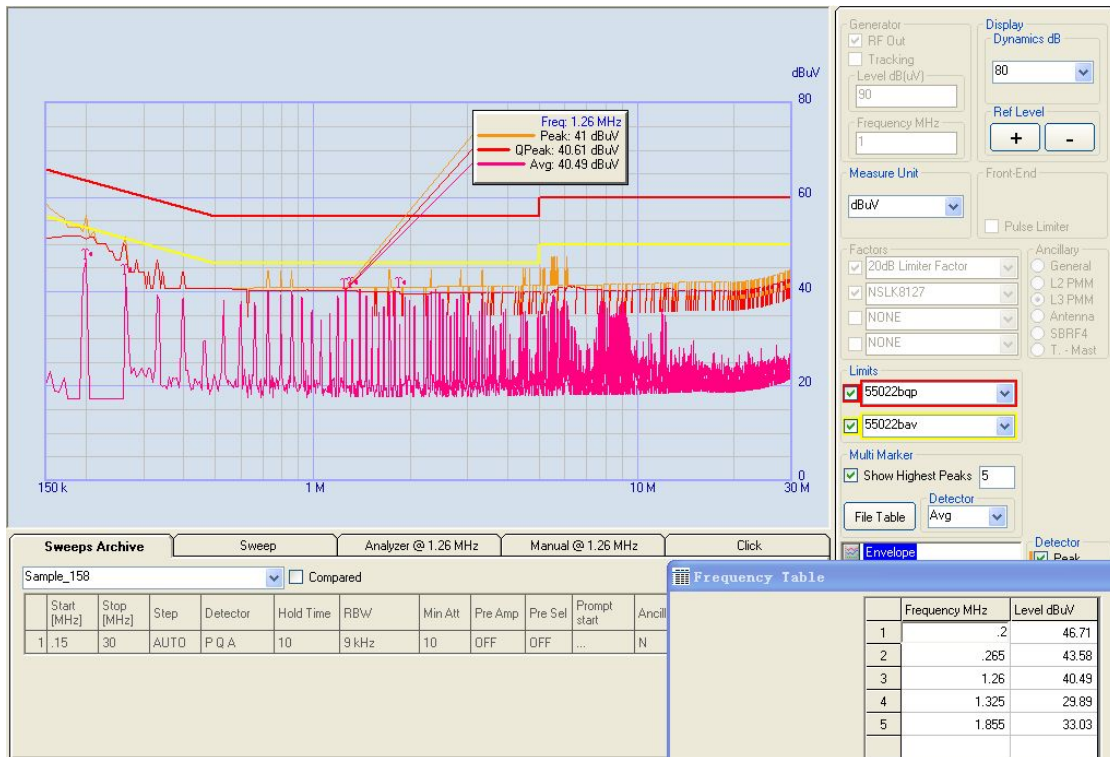

(Plot B: N Phase)

2.9. Radiated Emission

2.9.1. Requirement

According to FCC section 15.247(c), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)	Detector
0.009 - 0.490	2400/F(kHz)	300	QP
0.490 - 1.705	24000/F(kHz)	30	QP
1.705 - 30.0	30	30	QP
30 - 88	100	3	QP
88 - 216	150	3	QP
216 - 960	200	3	QP
960 - 1000	500	3	QP
Above 1000	500	3	AV


Note:

1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)

2.9.2. Test Description

A. Test Setup:

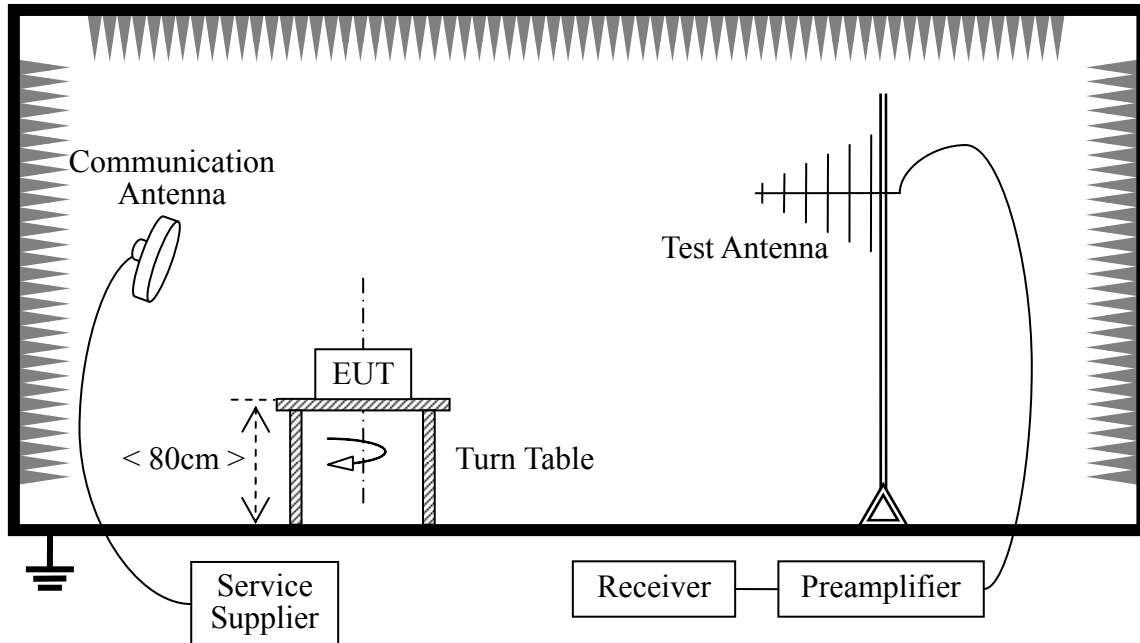

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2009). The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4.

The Bluetooth Module of the EUT is powered by the Battery. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-off test mode transmitting 339 bytes DH5 packages at maximum power.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date
System Simulator	R&S	CMU200	100448	2012.05
Receiver	Agilent	E7405A	US44210471	2012.05
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2012.05
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2012.05
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2012.05
Test Antenna - circular	R&S	AC004R1	0749.3000.03	2012.05

2.9.3. Test Result

According to ANSI C63.4 selection 4.2.2, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

2.9.3.1. GFSK Mode:

A. Test Verdict for Harmonics:


The Fundamental Emissions

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.


Channel	Frequency (MHz)	Fundamental Emission (dB μ V/m)		Antenna Polarization	Refer to Plot
		PK	AV		
0	2402	94.42	N/A	Horizontal	Plot A.1
		87.95	N/A	Vertical	Plot A.2
39	2441	90.29	N/A	Horizontal	Plot B.1
		95.89	N/A	Vertical	Plot B.2
78	2480	86.12	N/A	Horizontal	Plot C.1
		95.80	N/A	Vertical	Plot C.2

B. Test Plots for the Whole Measurement Frequency Range:


Plots for Channel = 0

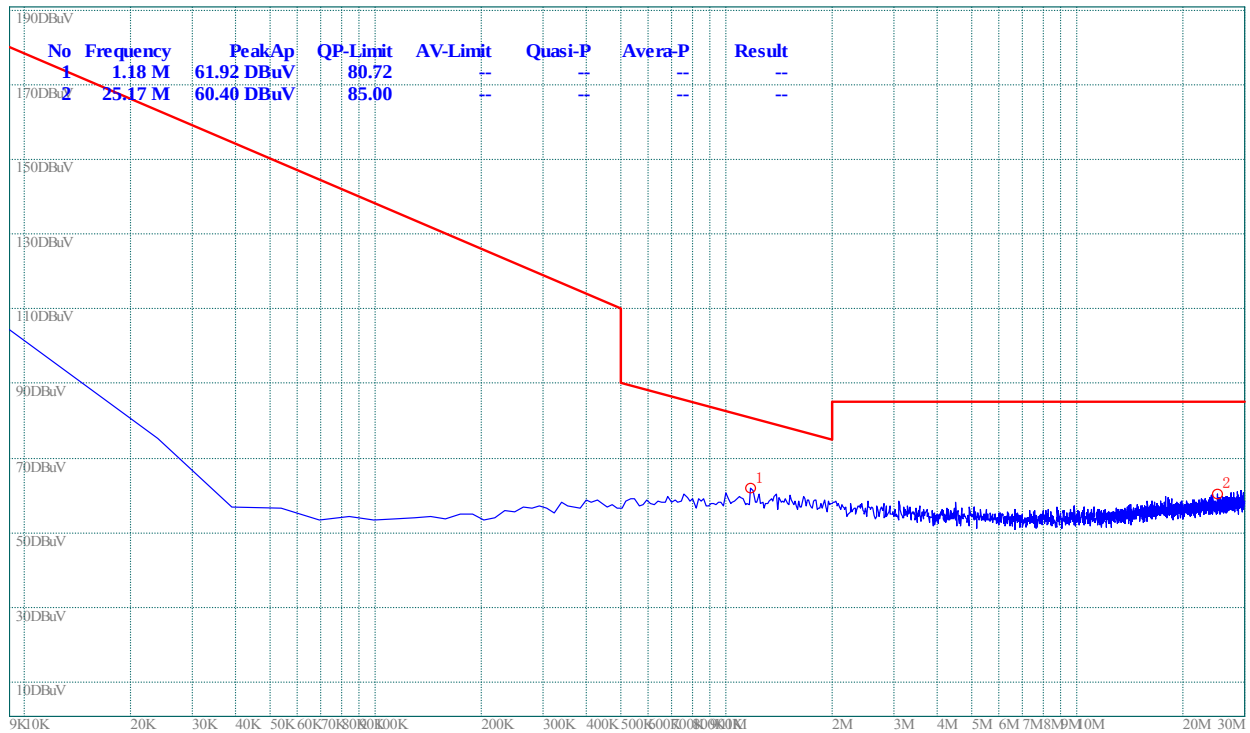

(Plot A.0: 9kHz to 30MHz)

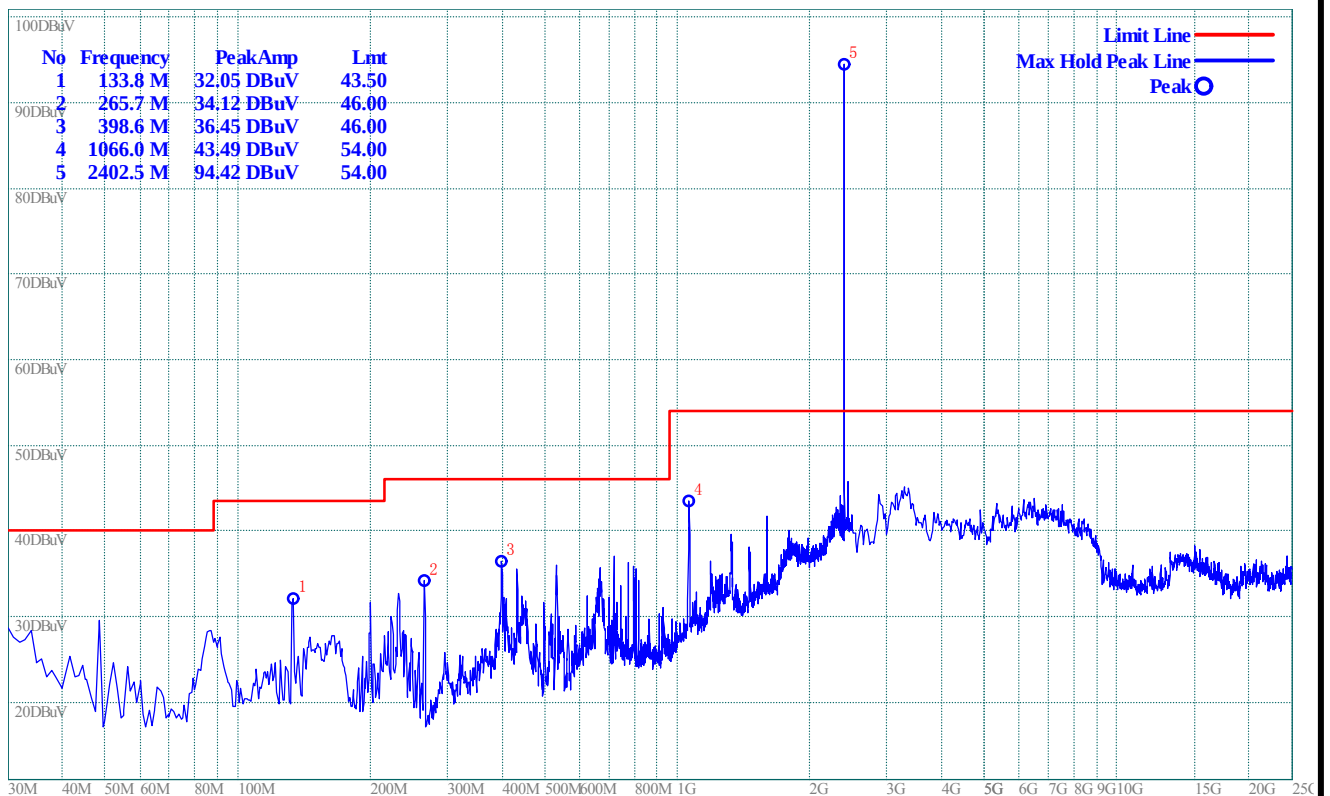


(Plot A.1: Antenna Horizontal)

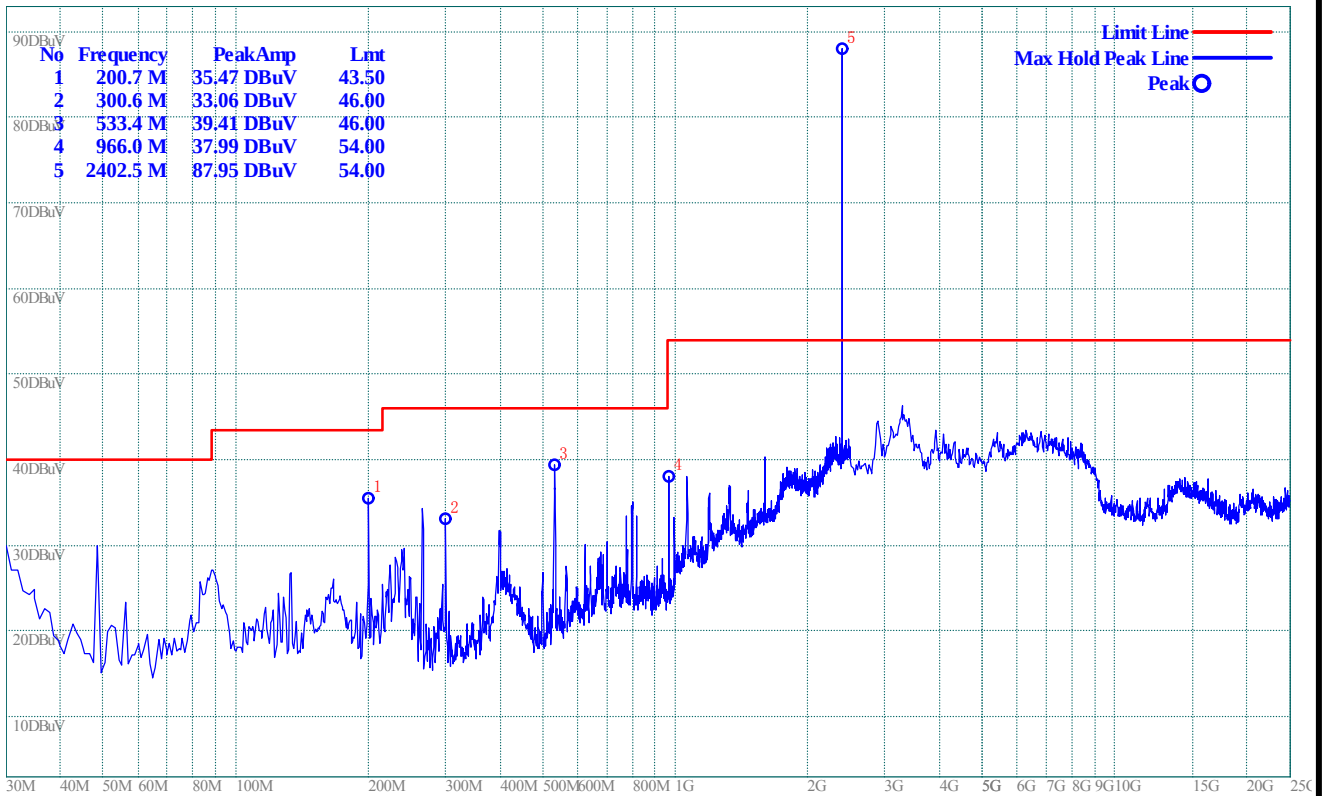


(Plot A.2: Antenna Vertical)


Plot for Channel = 39

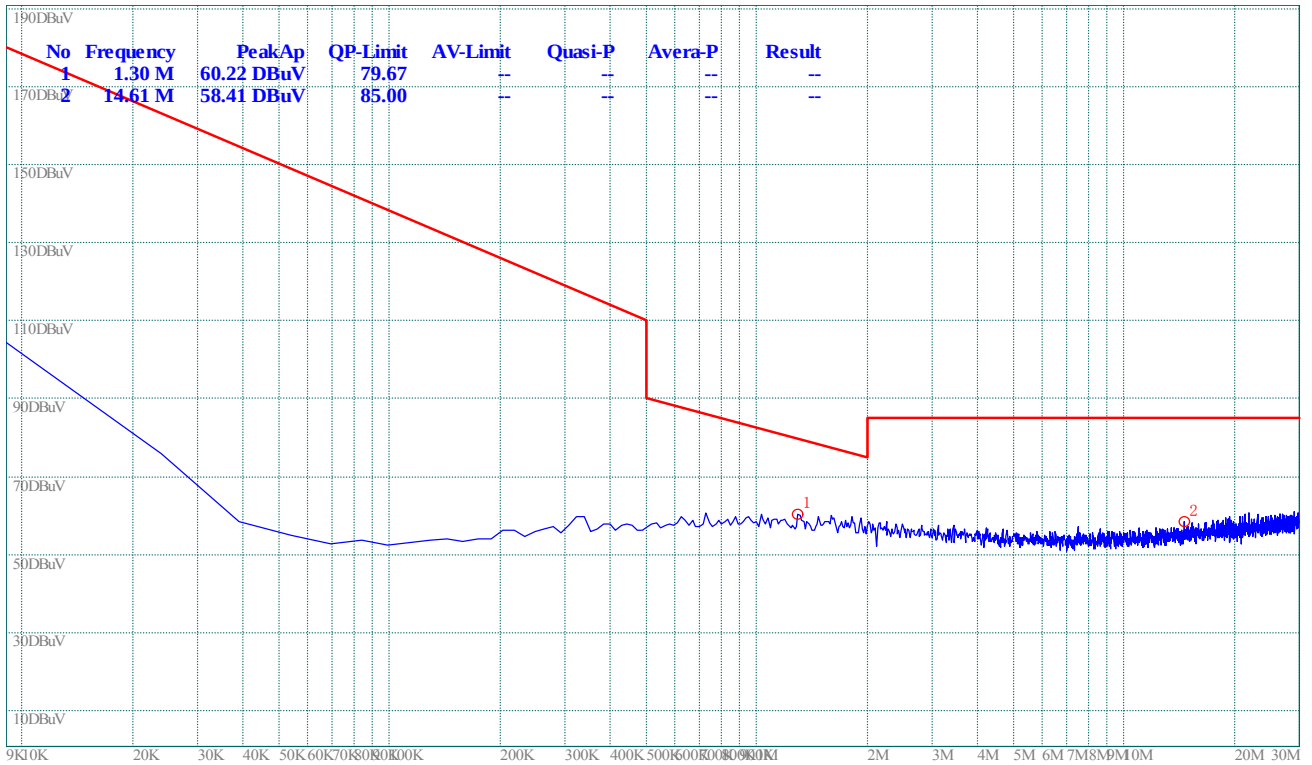

(Plot B.0: 9kHz to 30MHz)

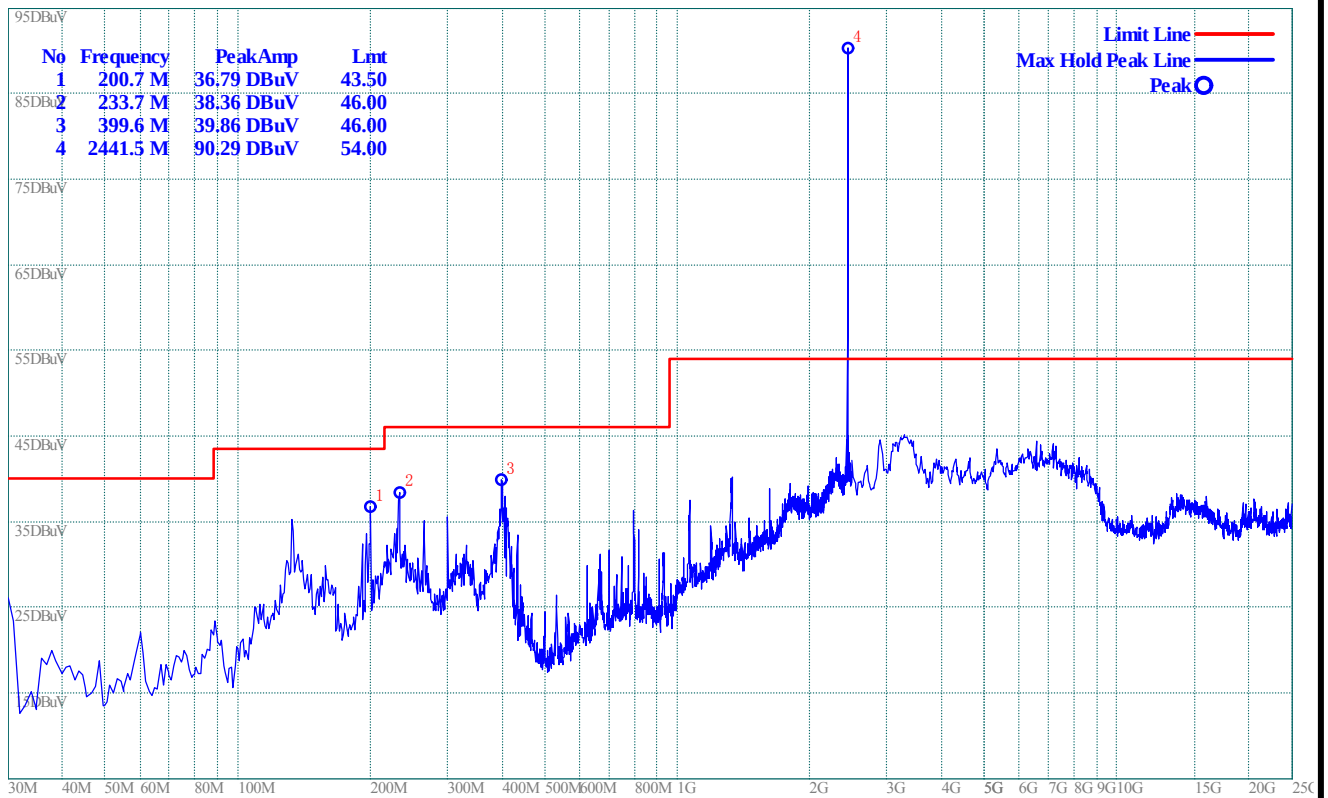


(Plot B.1: Antenna Horizontal)

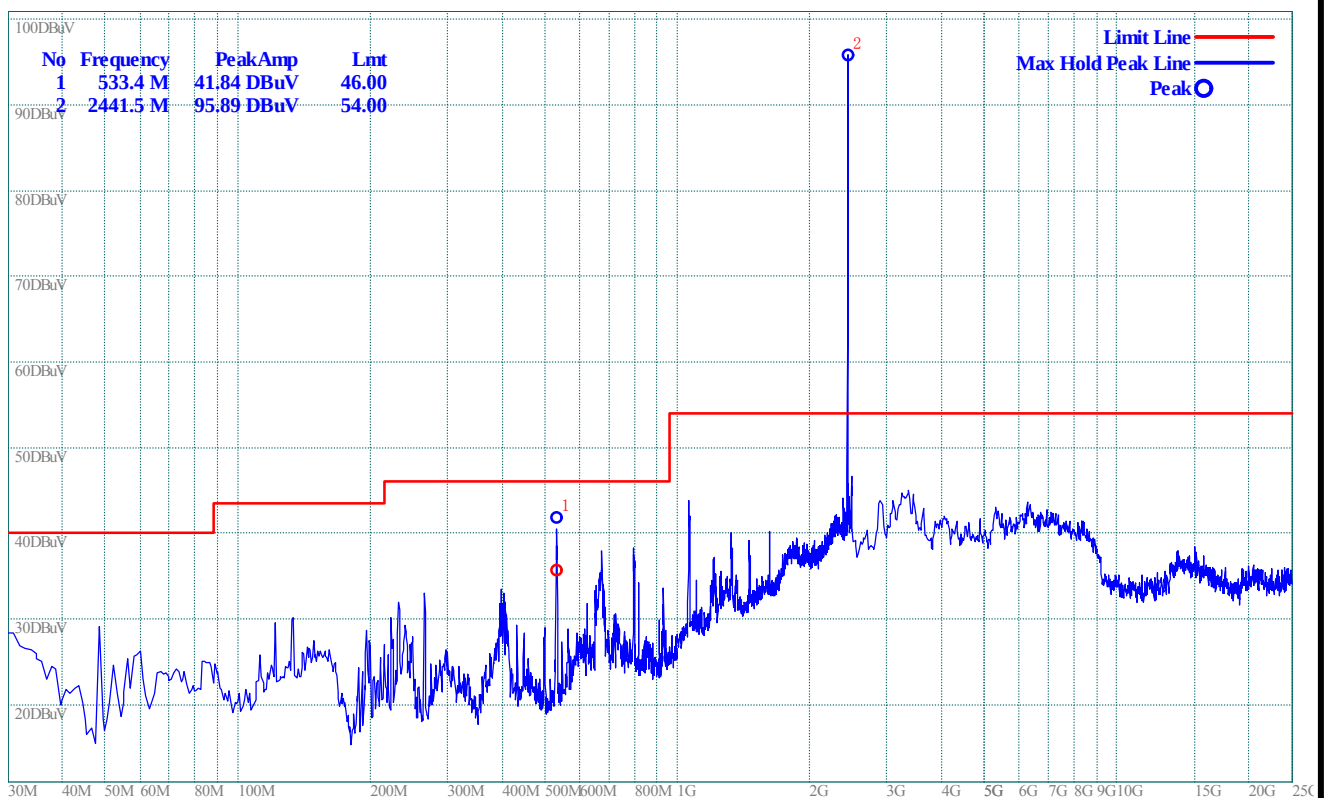


(Plot B.2: Antenna Vertical)


Plot for Channel = 78

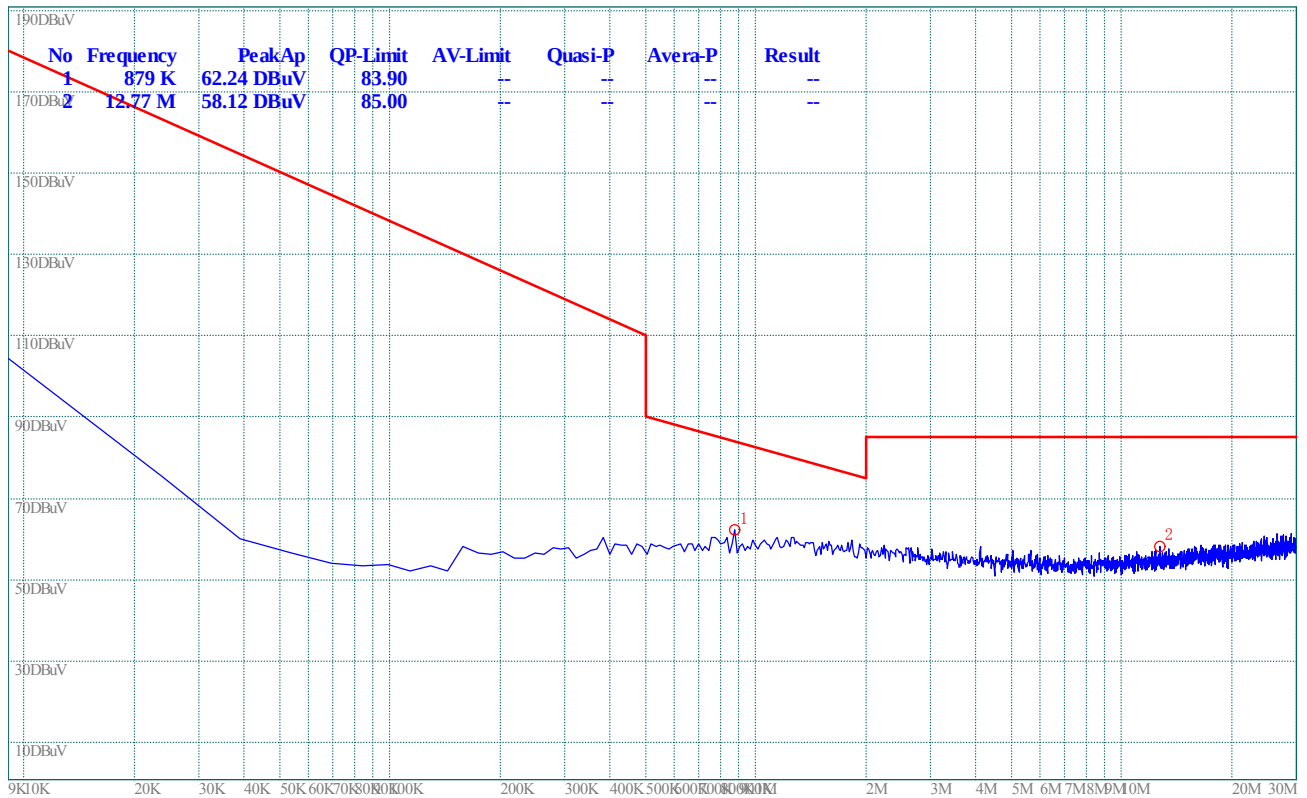

(Plot C.0: 9kHz to 30MHz)

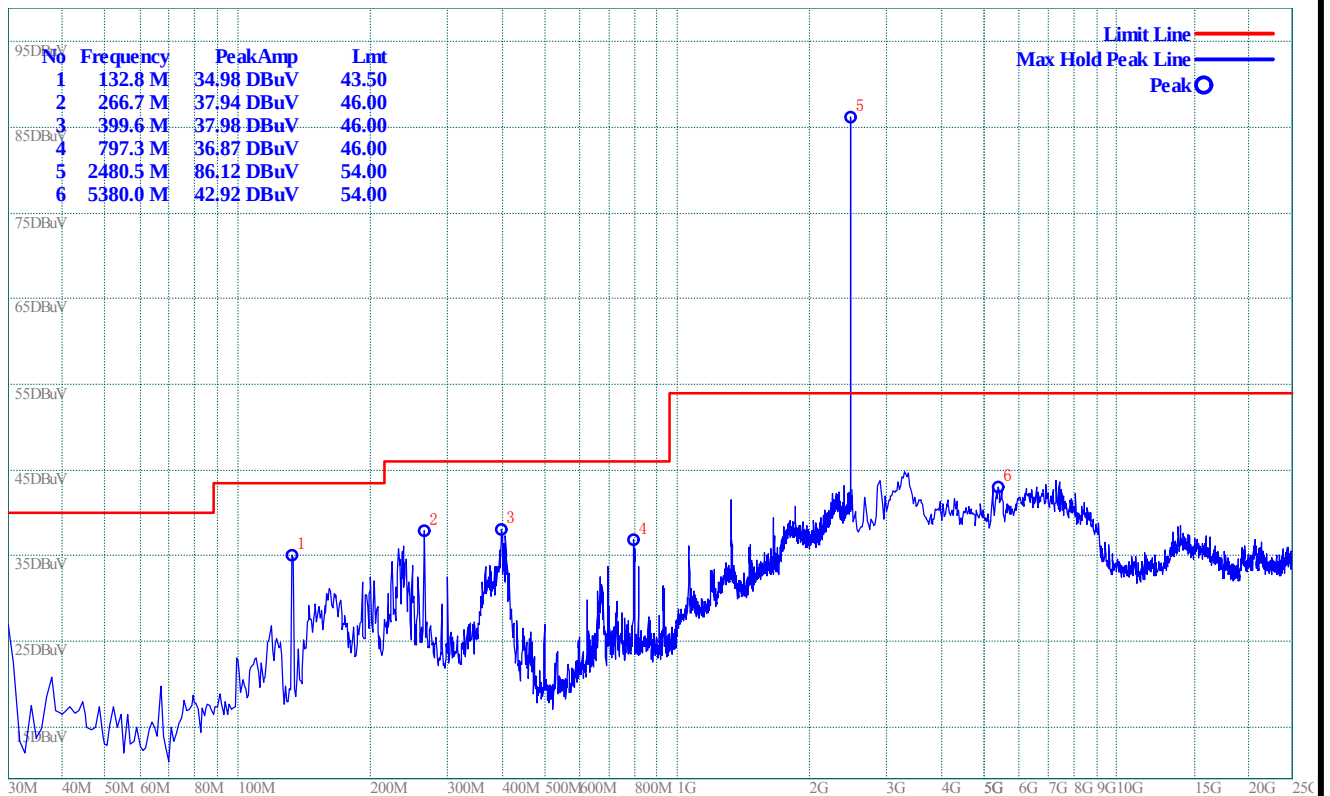

(Plot C.1: Antenna Horizontal)

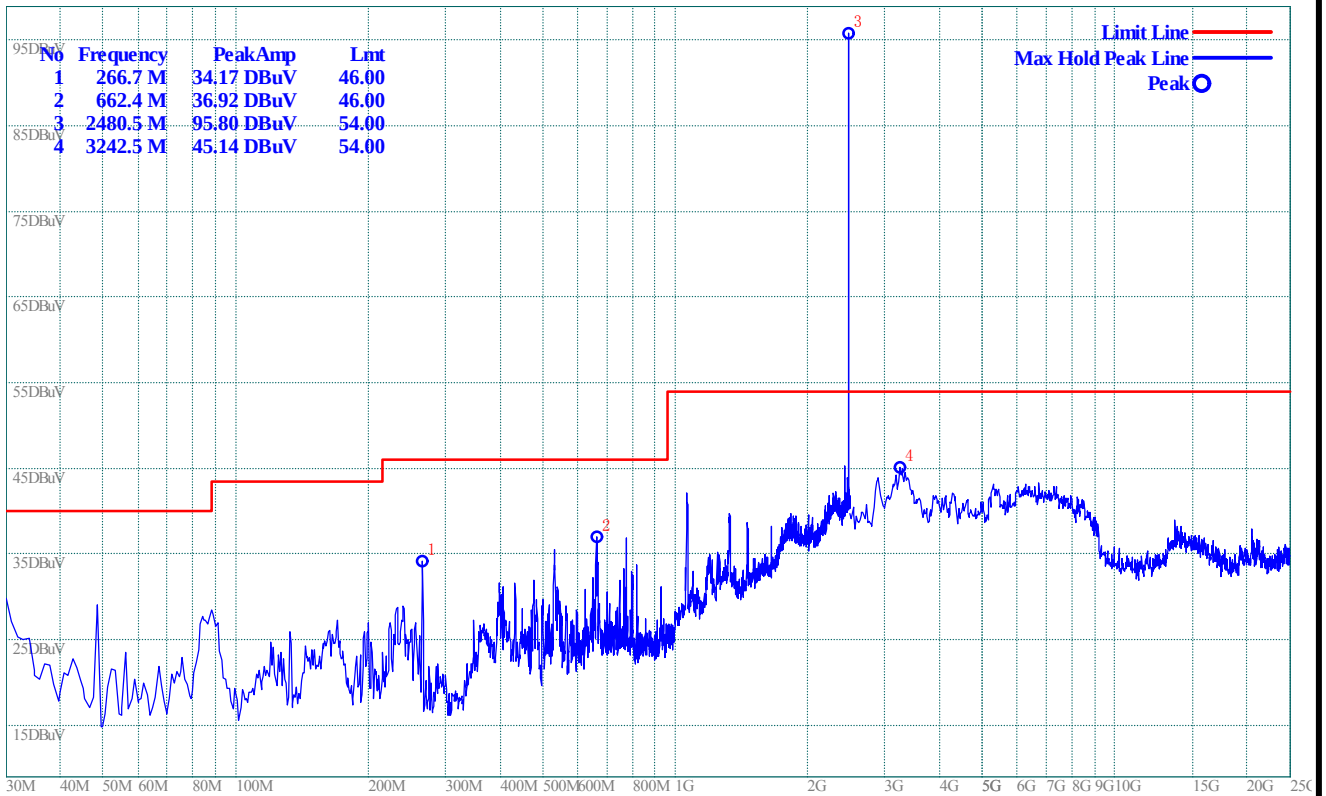

(Plot C.2: Antenna Vertical)

2.9.3.2. $\pi/4$ -DQPSK Mode:

A. Test Verdict for Harmonics:


The Fundamental Emissions

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.


Channel	Frequency (MHz)	Fundamental Emission (dB μ V/m)		Antenna Polarization	Refer to Plot
		PK	AV		
0	2402	85.64	81.23	Horizontal	Plot A.1
		89.33	85.35	Vertical	Plot A.2
39	2441	87.87	83.36	Horizontal	Plot B.1
		90.43	87.66	Vertical	Plot B.2
78	2480	83.19	82.05	Horizontal	Plot C.1
		88.49	86.51	Vertical	Plot C.2

B. Test Plots for the Whole Measurement Frequency Range:


Plots for Channel = 0

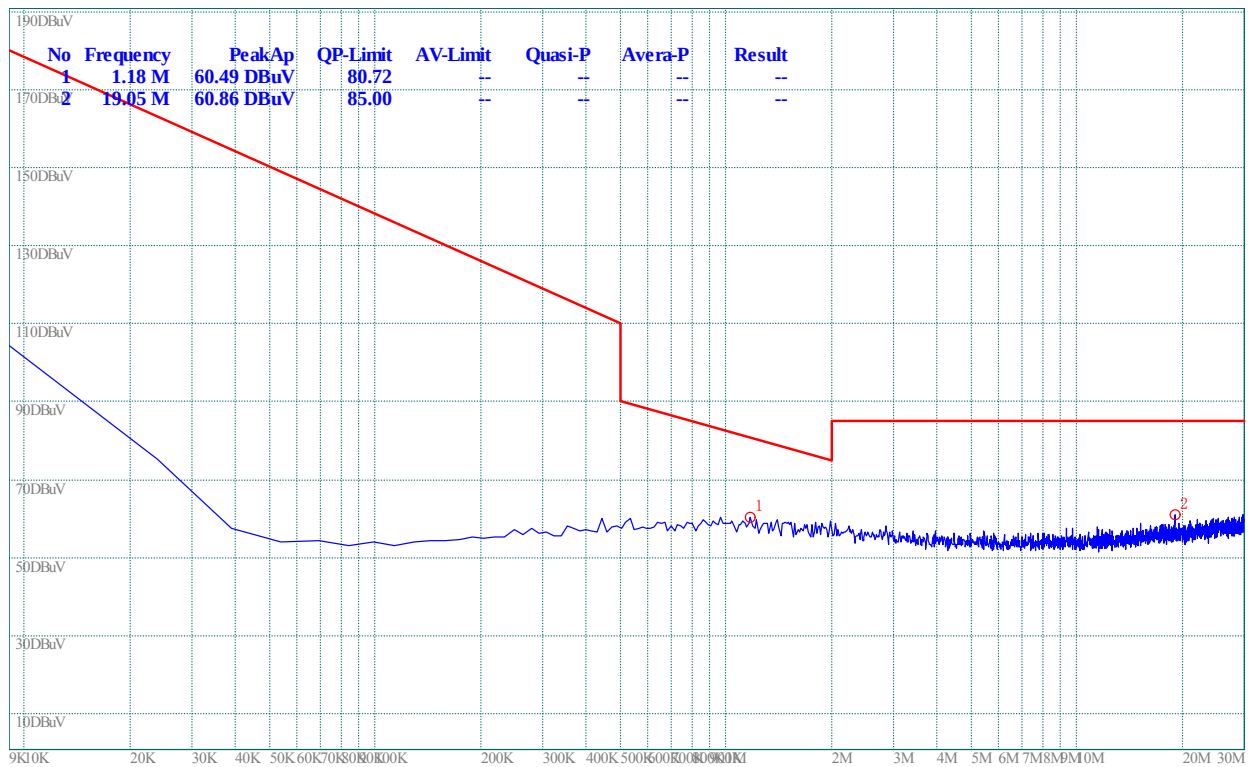

(Plot A.0: 9kHz to 30MHz)

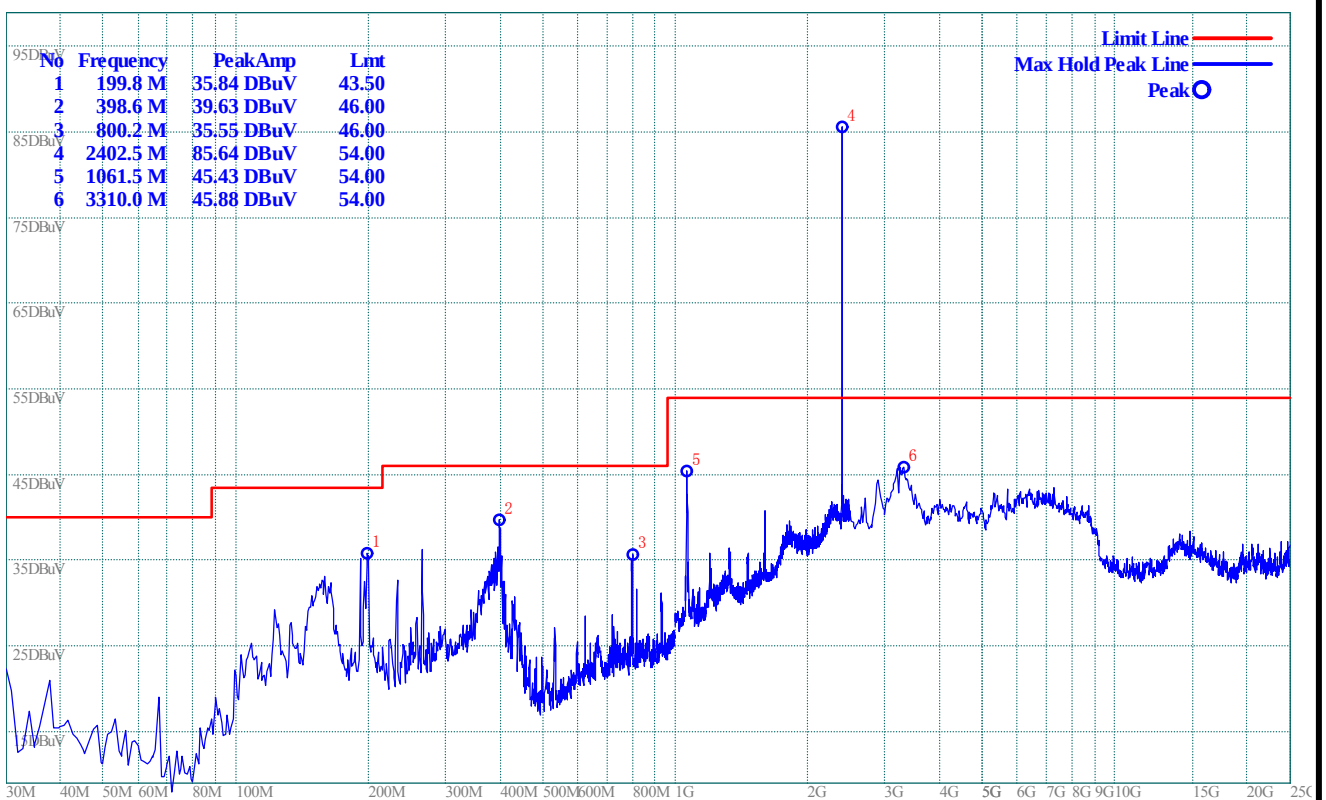


(Plot A.1: Antenna Horizontal)

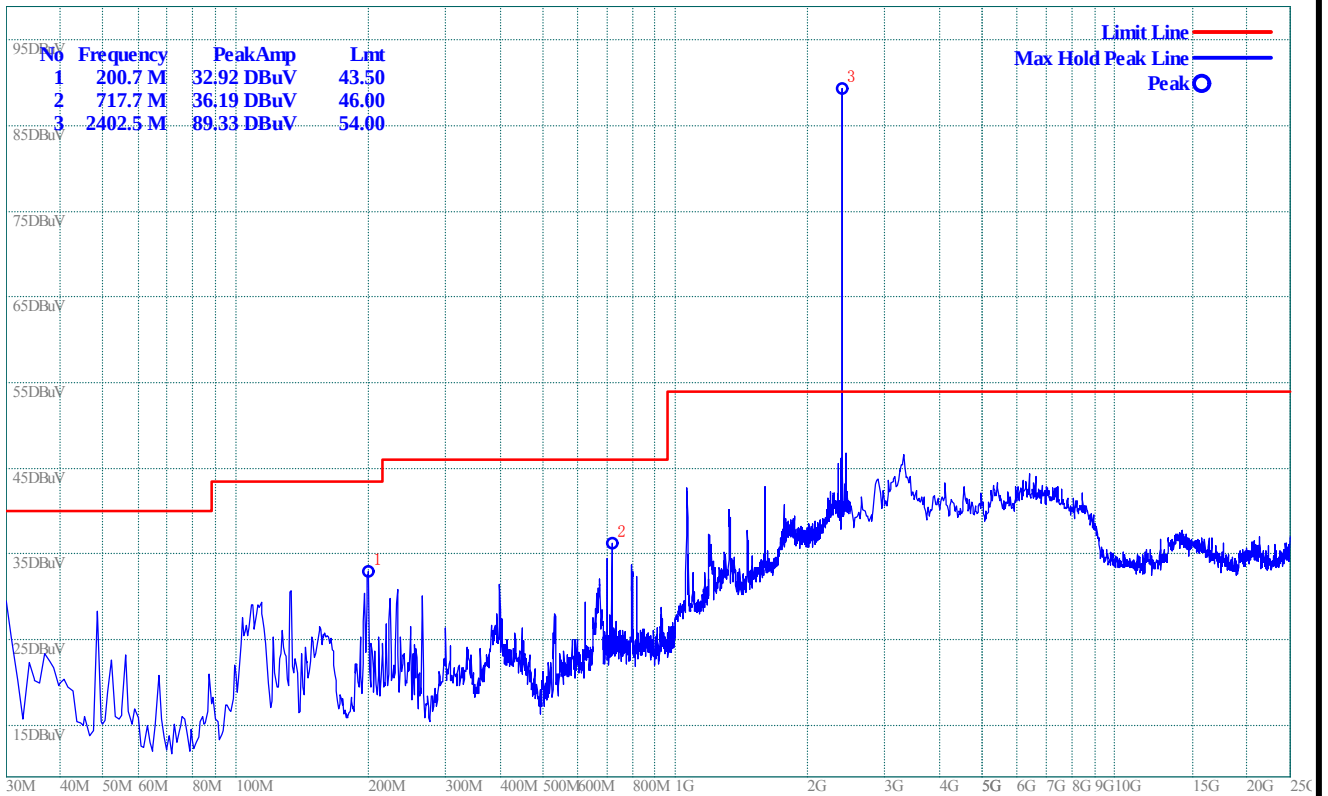


(Plot A.2: Antenna Vertical)


Plot for Channel = 39

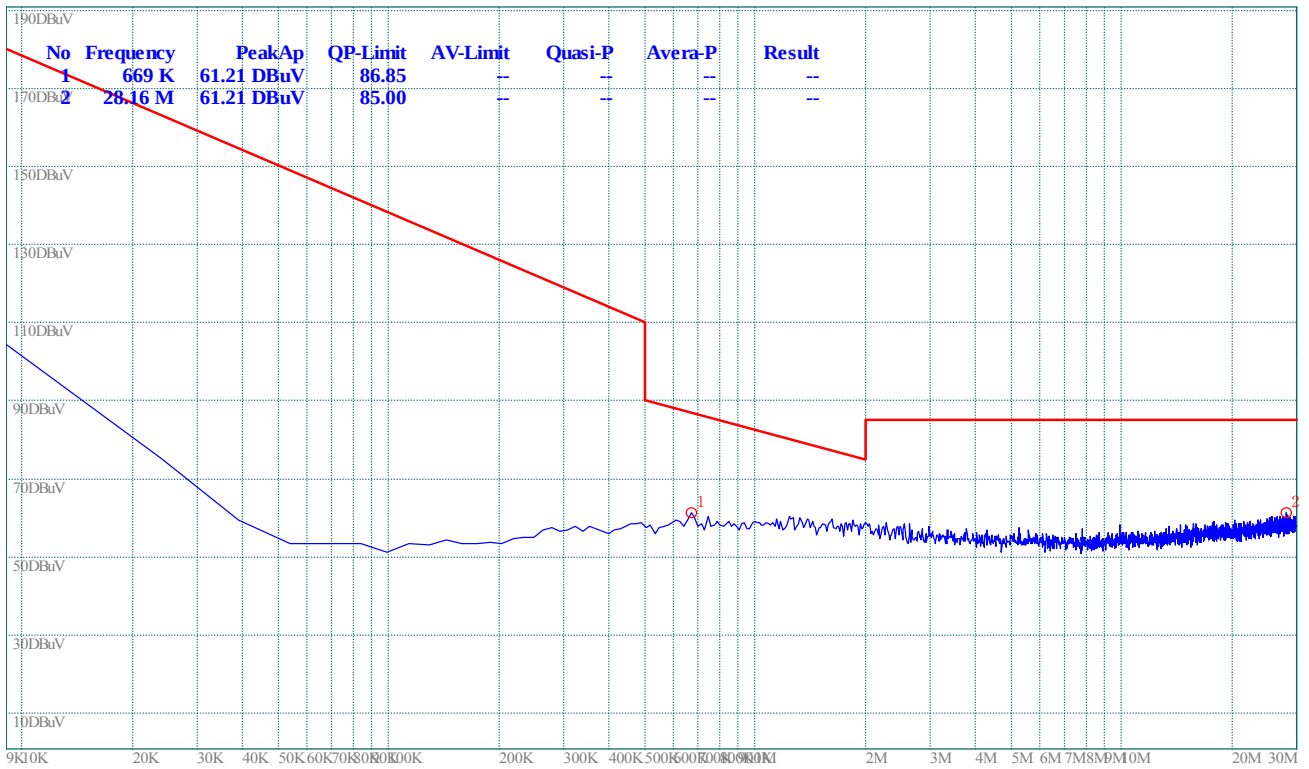

(Plot B.0: 9kHz to 30MHz)

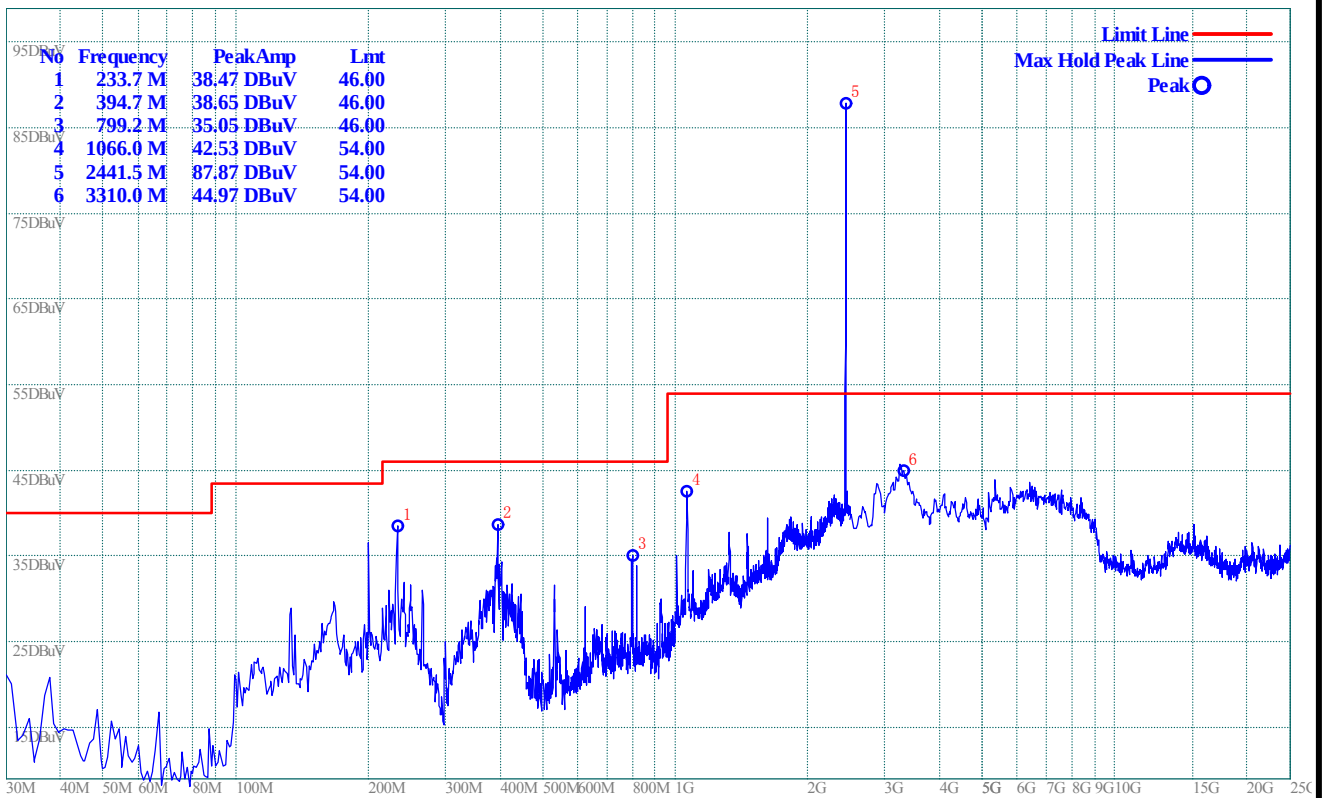


(Plot B.1: Antenna Horizontal)

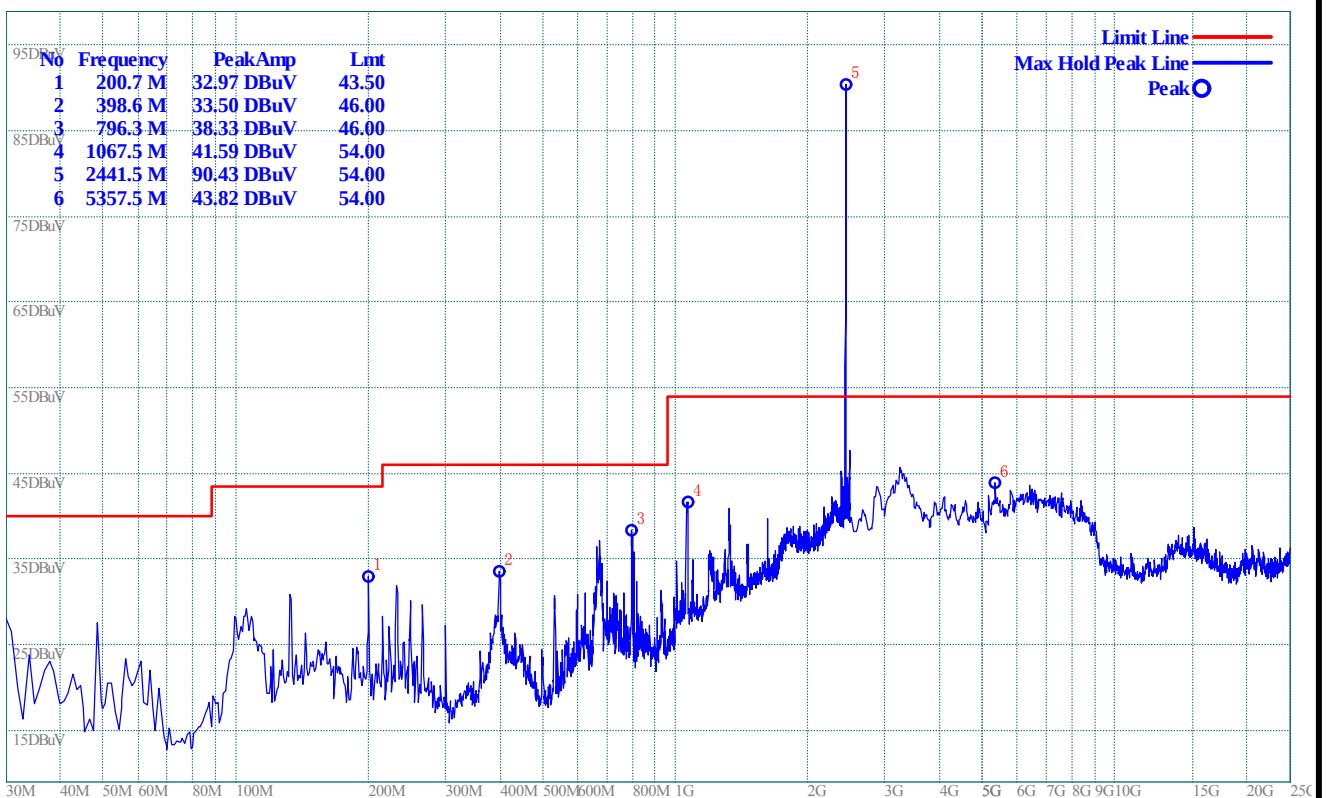


(Plot B.2: Antenna Vertical)


Plot for Channel = 78:

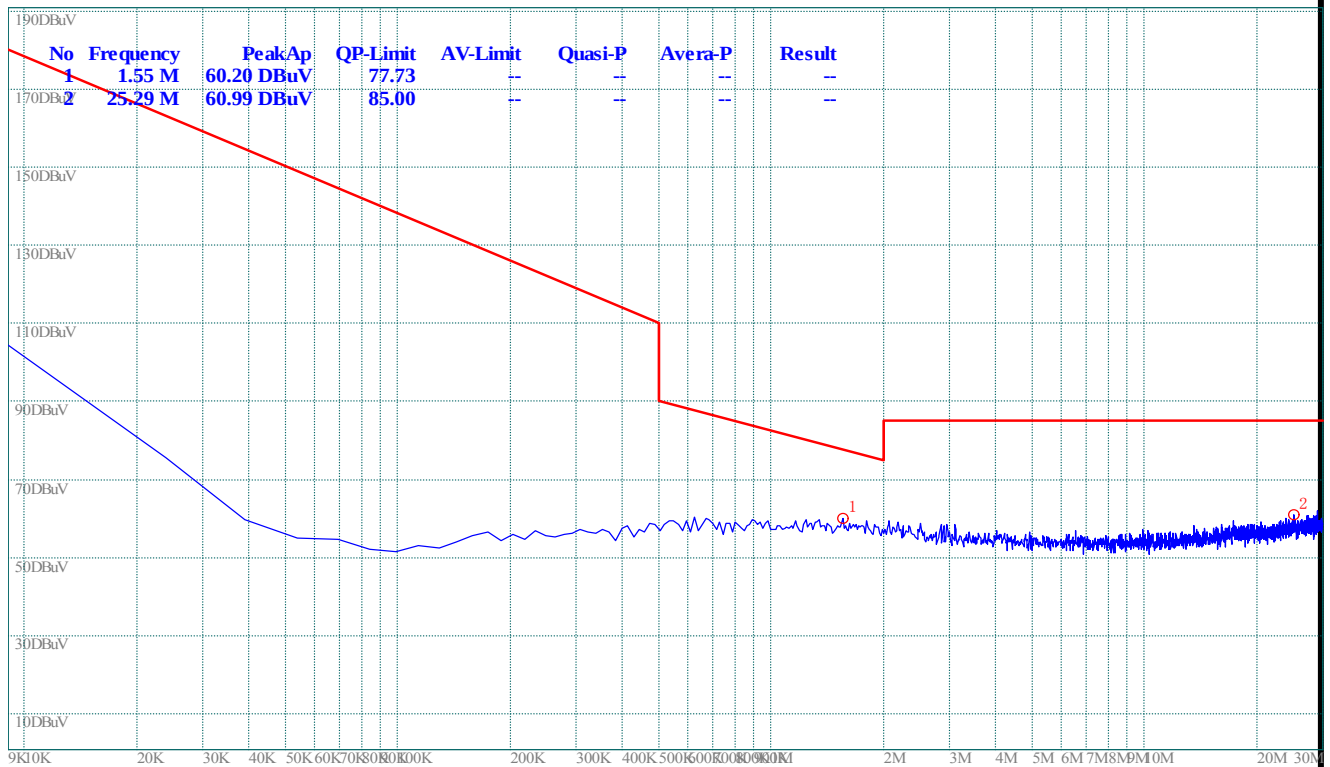

(Plot C.0: 9kHz to 30MHz)

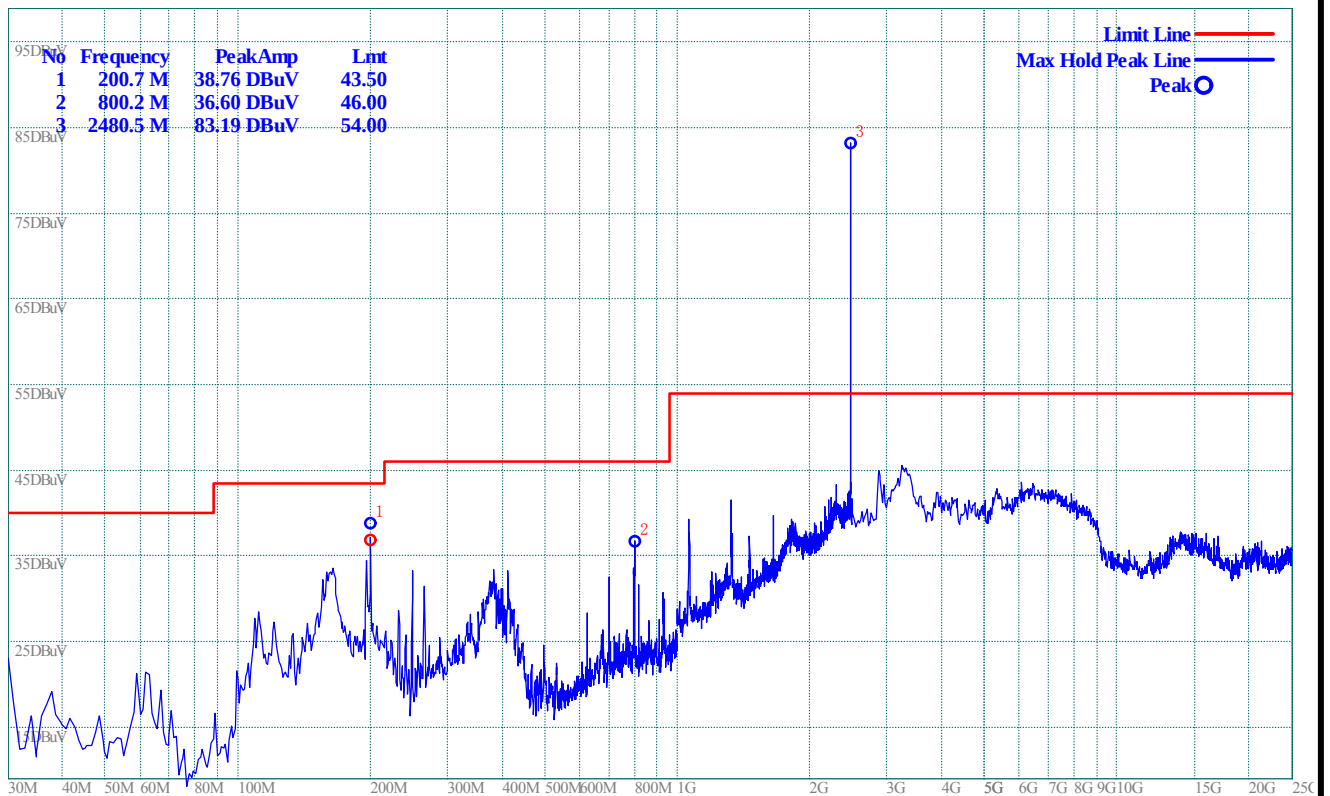

(Plot C.1: Antenna Horizontal)

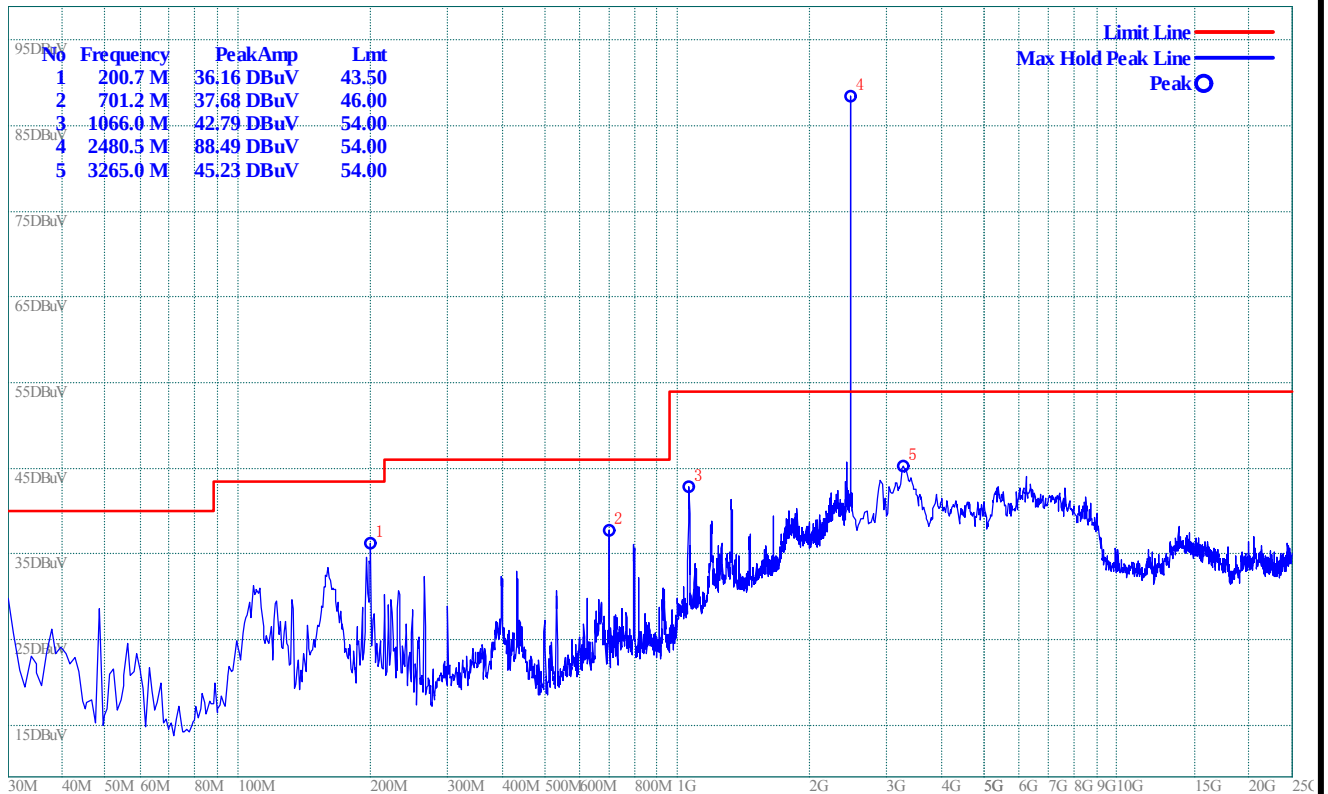

(Plot C.2: Antenna Vertical)

2.9.3.3. 8-DPSK Mode:

A. Test Verdict for Harmonics:


The Fundamental Emissions

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.


Channel	Frequency (MHz)	Fundamental Emission (dBμV/m)		Antenna Polarization	Refer to Plot
		PK	AV		
0	2402	89.01	85.66	Horizontal	Plot A.1
		85.86	82.33	Vertical	Plot A.2
39	2441	87.20	83.26	Horizontal	Plot B.1
		89.82	85.71	Vertical	Plot B.2
78	2480	85.79	83.11	Horizontal	Plot C.1
		90.19	88.69	Vertical	Plot C.2

B. Test Plots for the Whole Measurement Frequency Range:


Plots for Channel = 0

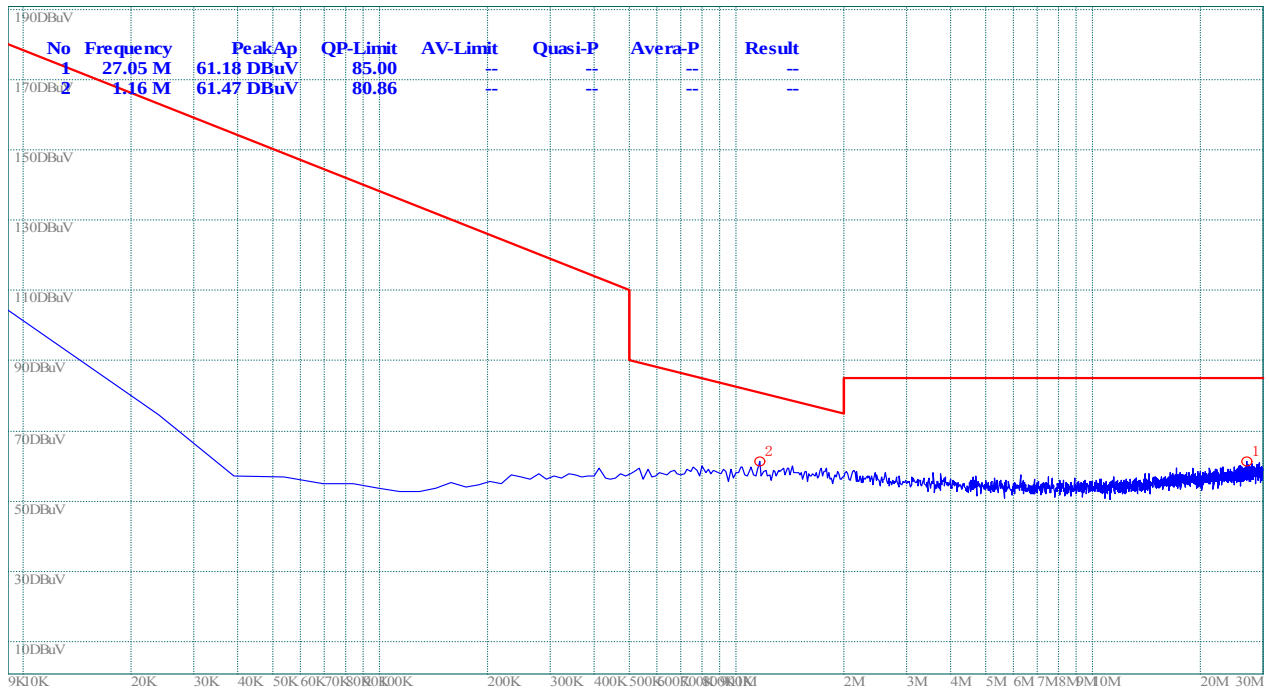

(Plot A.0: 9kHz to 30MHz)

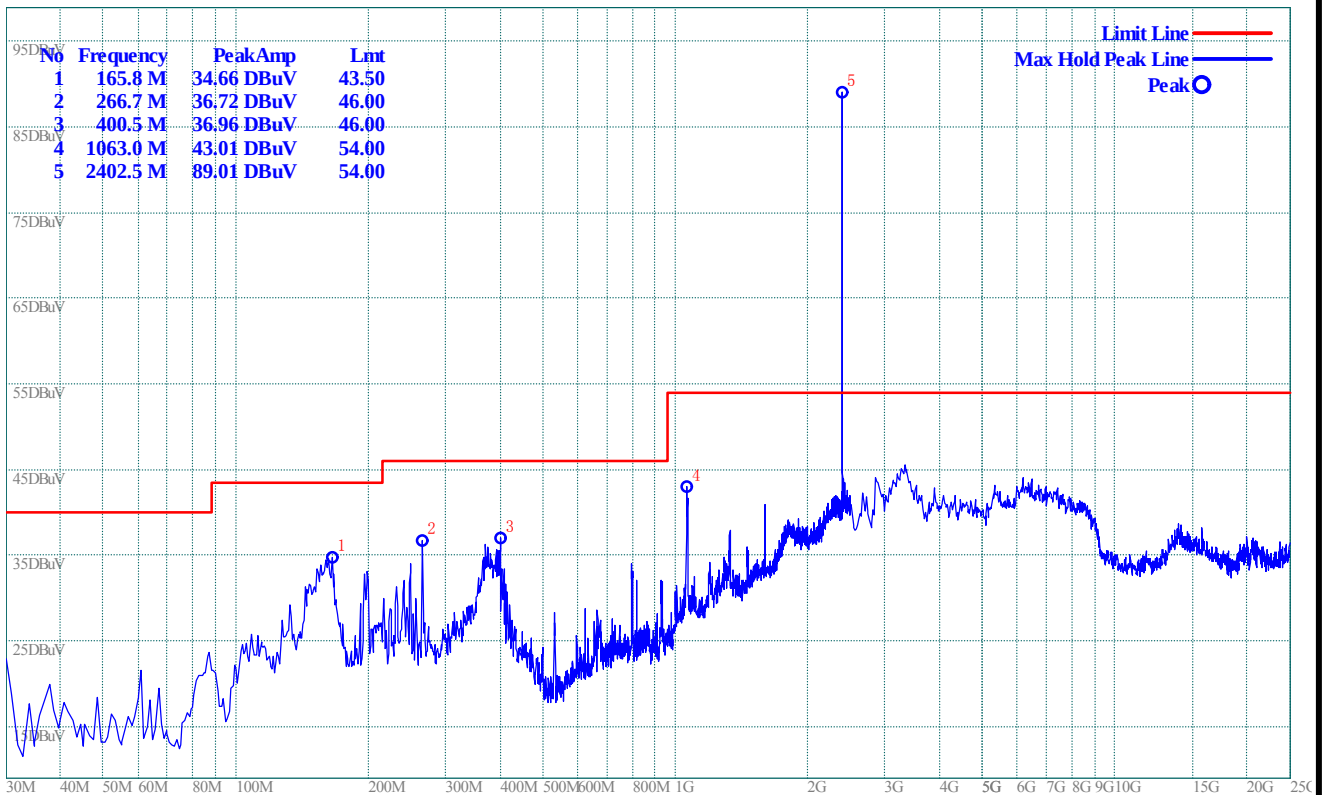


(Plot A.1: Antenna Horizontal)

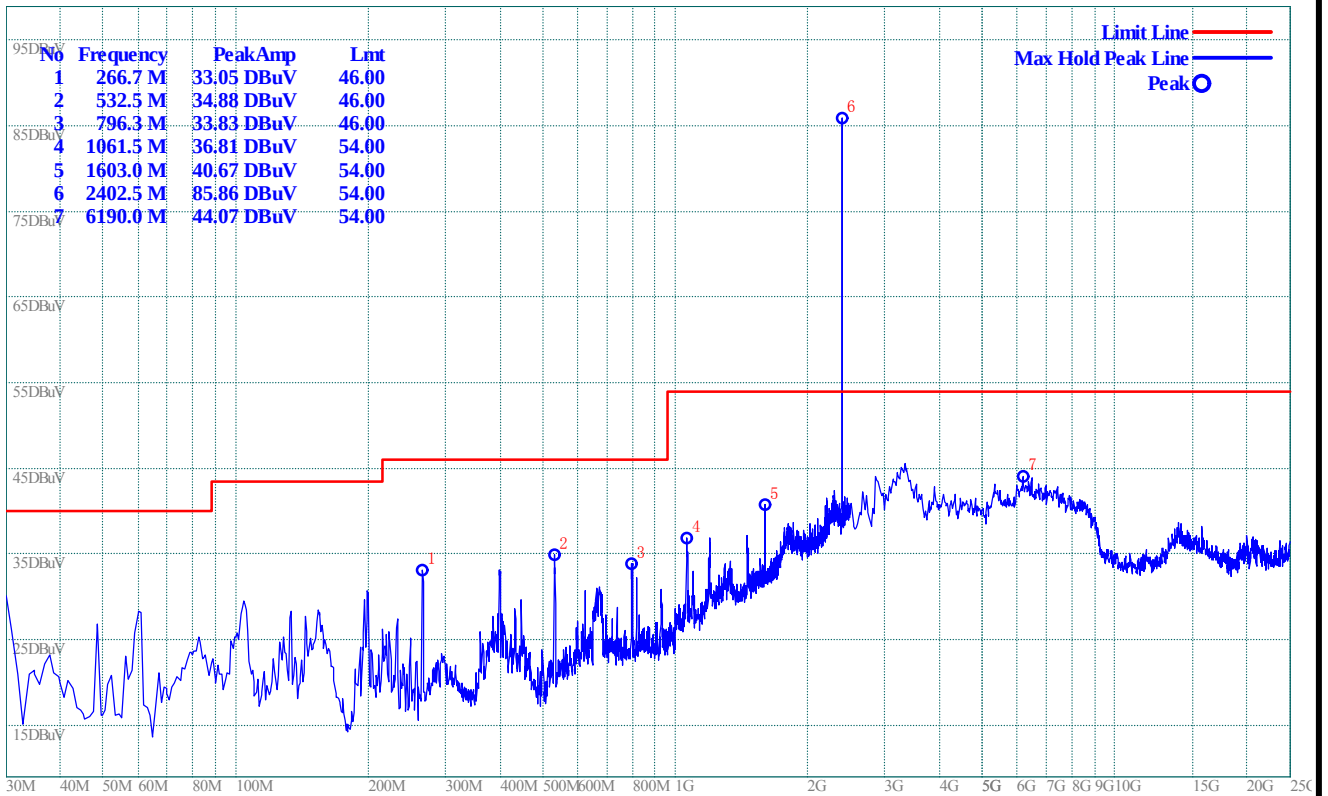


(Plot A.2: Antenna Vertical)


Plot for Channel = 39

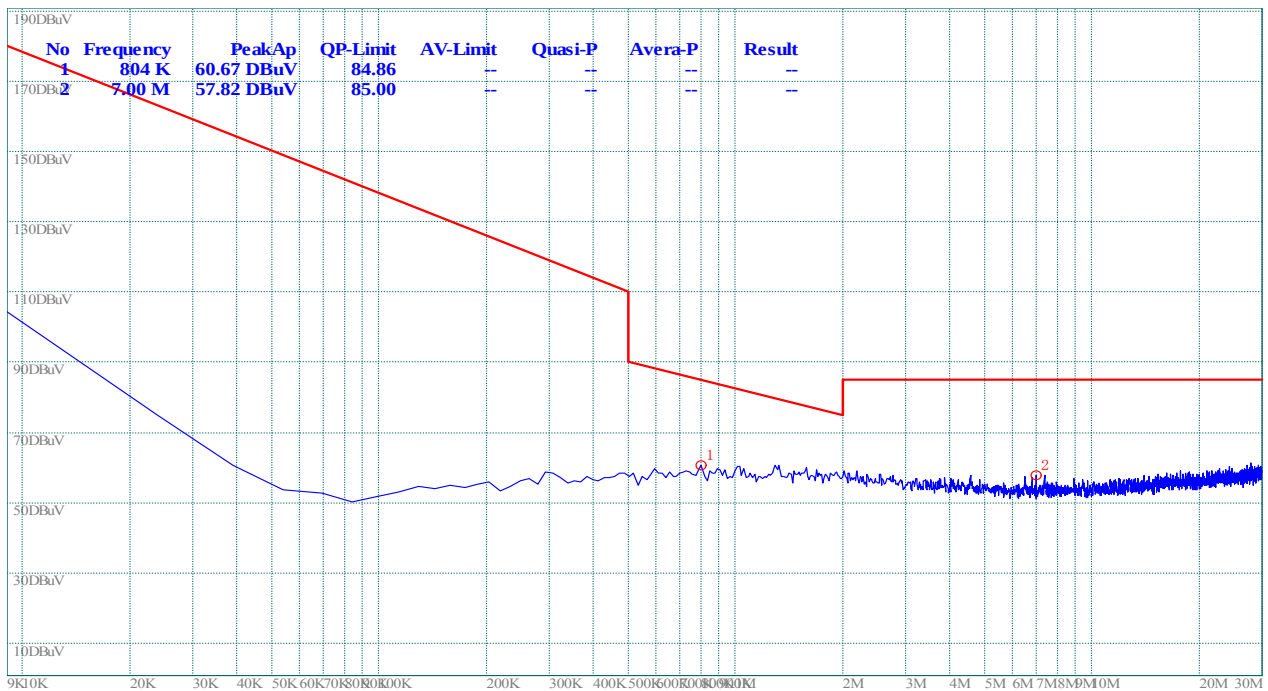

(Plot B.0: 9kHz to 30MHz)

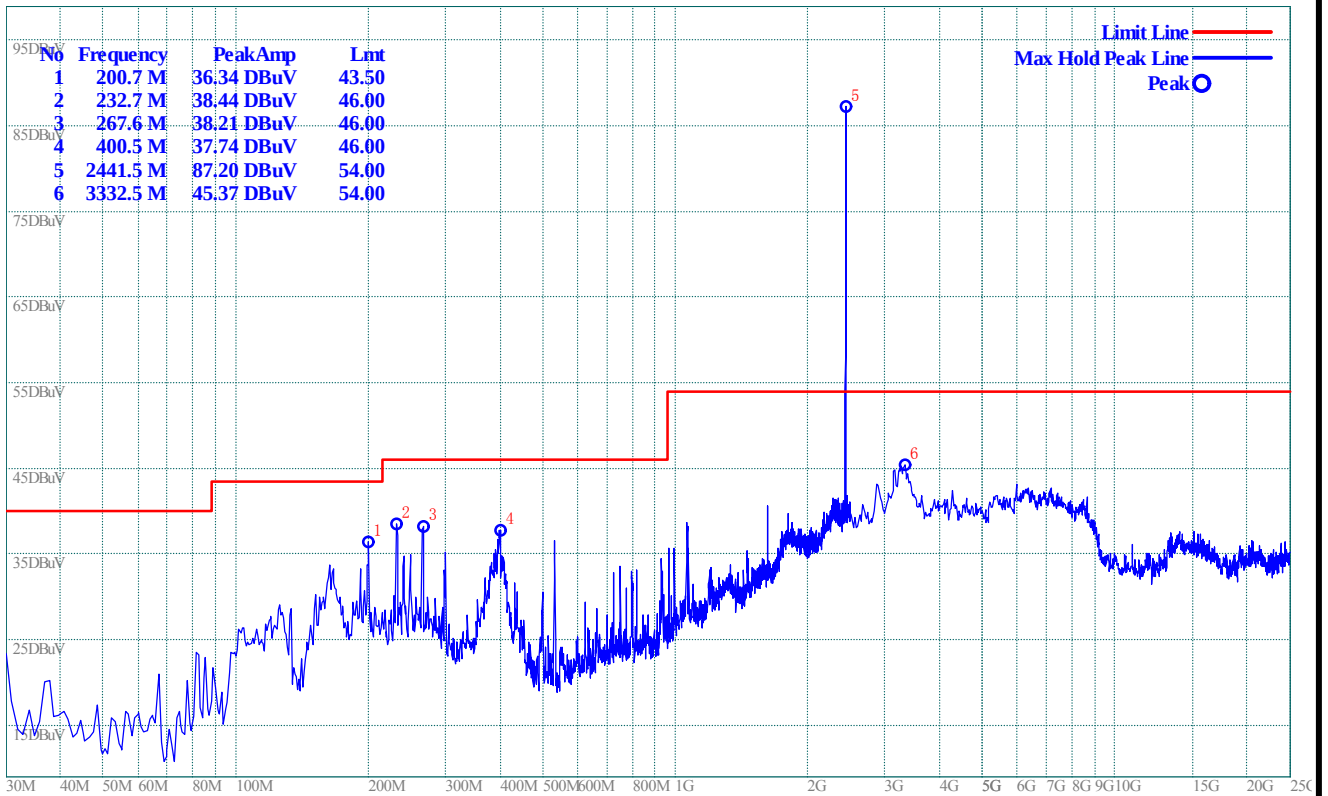


(Plot B.1: Antenna Horizontal)

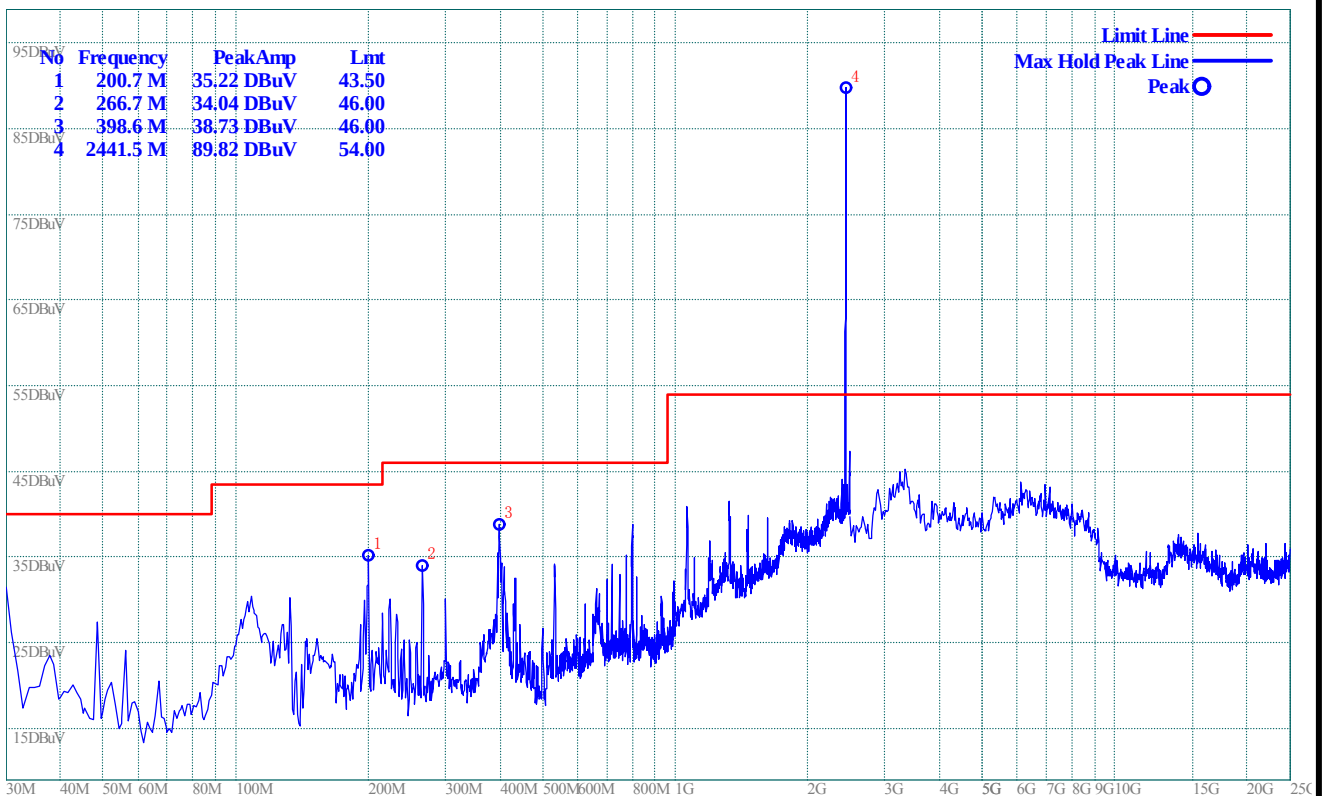


(Plot B.2: Antenna Vertical)


Plot for Channel = 78

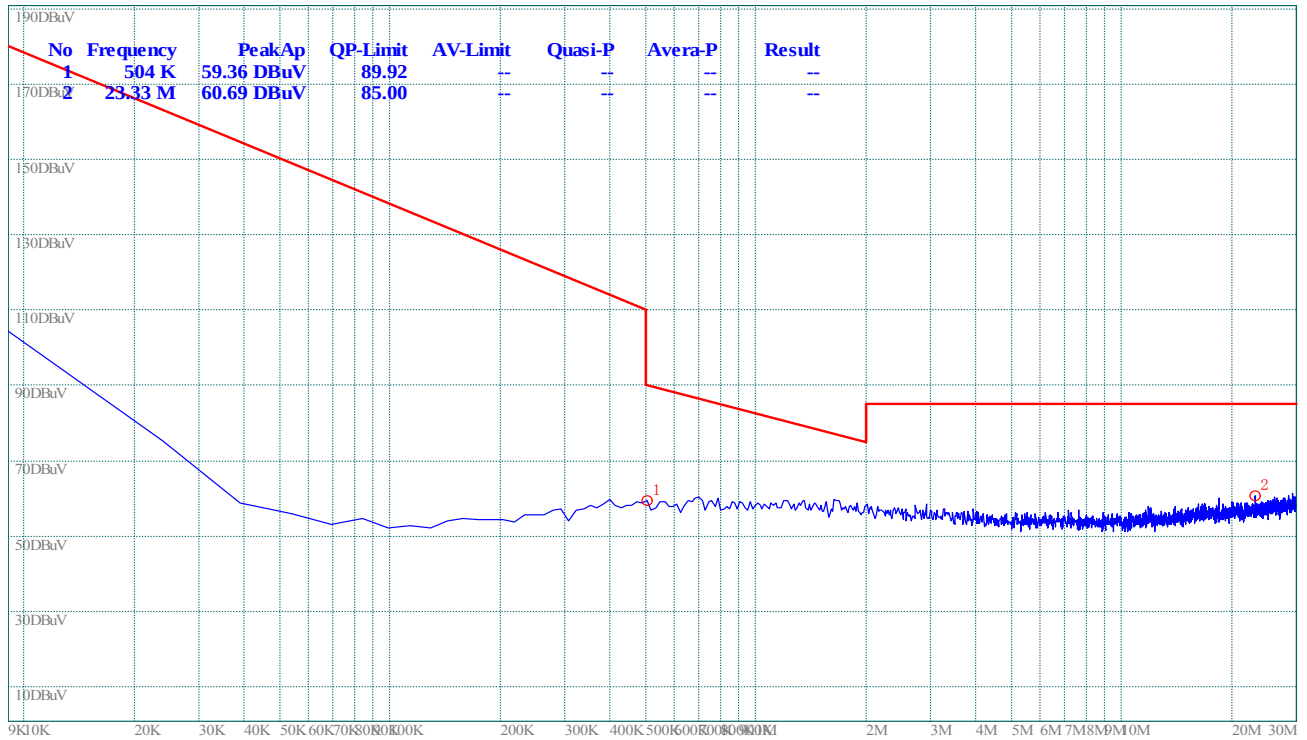

(Plot C.0: 9kHz to 30MHz)

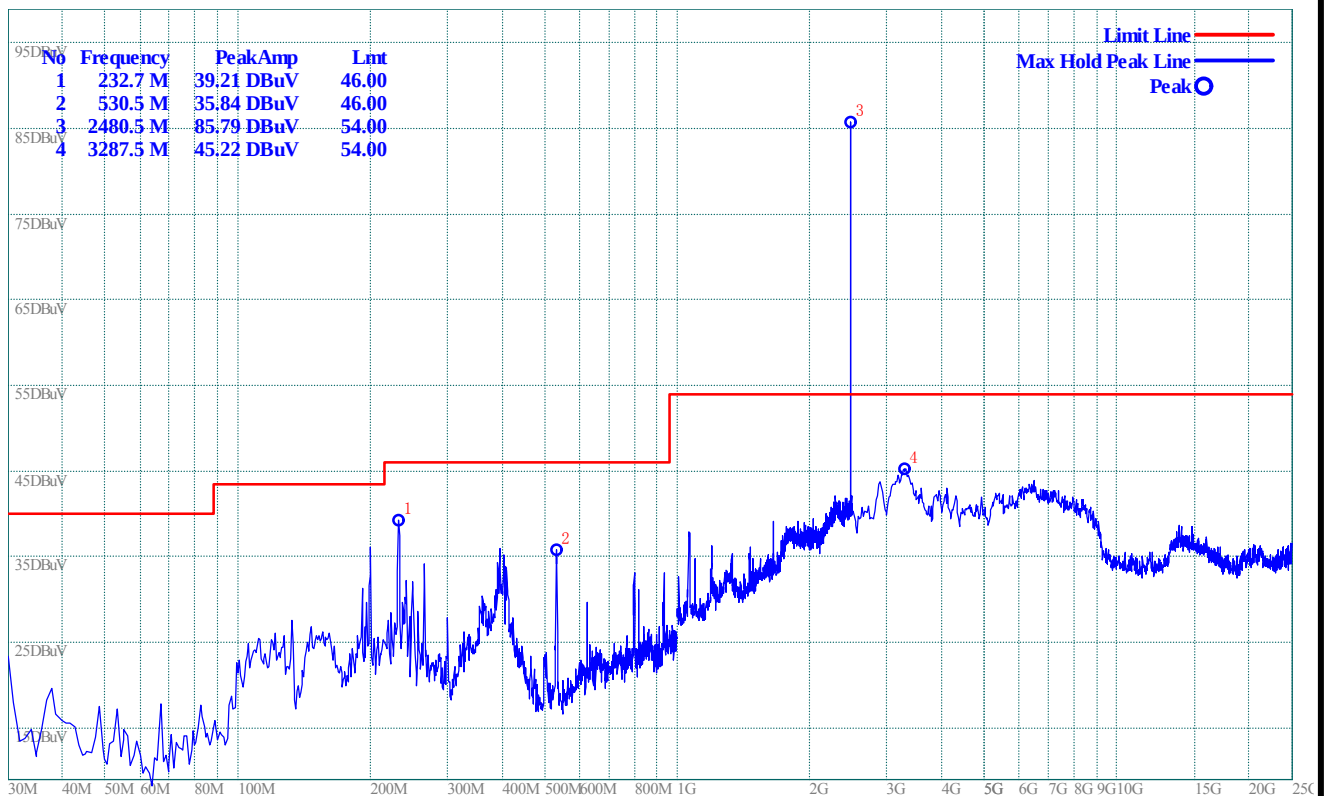

(Plot C.1: Antenna Horizontal)

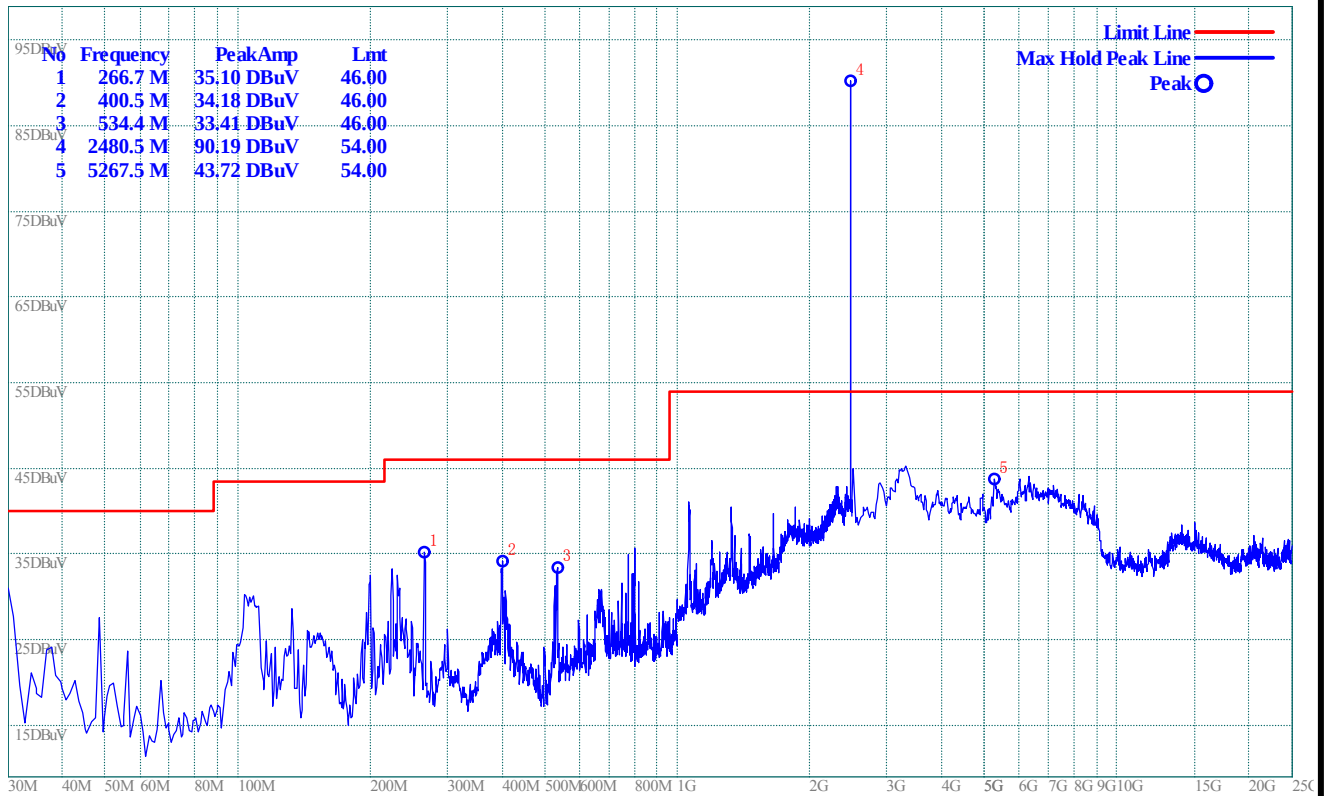

(Plot C.2: Antenna Vertical)

* END OF REPORT *