

## FCC PART 15B

## TEST REPORT

For

### Archos SA

12 Rue Ampere, Igny 91430, France

**FCC ID: SOVAN101G4**  
**Trade Name: ARNOVA**

|                                                                                                                                                                                                                                                                                 |                                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|
| <b>Report Type:</b><br>Original Report                                                                                                                                                                                                                                          | <b>Product Type:</b><br>Tablet PC |
| <b>Test Engineer:</b> Ares Liu <i>Ares Liu</i>                                                                                                                                                                                                                                  |                                   |
| <b>Report Number:</b> R2DG130506001-00B                                                                                                                                                                                                                                         |                                   |
| <b>Report Date:</b> 2013-05-29                                                                                                                                                                                                                                                  |                                   |
| <b>Reviewed By:</b> RF Leader<br>Ivan Cao <i>Ivan Cao</i>                                                                                                                                                                                                                       |                                   |
| <b>Test Laboratory:</b> Bay Area Compliance Laboratories Corp. (Dongguan)<br>No.69 Pulongcun, Puxinhu Industrial Zone,<br>Tangxia, Dongguan, Guangdong, China<br>Tel: +86-769-86858888<br>Fax: +86-769-86858891<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |                                   |

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP\*, or any agency of the Federal Government.

\* This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk "★" (Rev.2). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## **TABLE OF CONTENTS**

|                                                          |           |
|----------------------------------------------------------|-----------|
| <b>GENERAL INFORMATION.....</b>                          | <b>3</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) ..... | 3         |
| OBJECTIVE .....                                          | 3         |
| RELATED SUBMITTAL(S)/GRANT(S).....                       | 3         |
| TEST FACILITY .....                                      | 4         |
| <b>SYSTEM TEST CONFIGURATION.....</b>                    | <b>5</b>  |
| JUSTIFICATION .....                                      | 5         |
| EUT EXERCISE SOFTWARE .....                              | 5         |
| EQUIPMENT MODIFICATIONS .....                            | 5         |
| SUPPORT EQUIPMENT LIST AND DETAILS .....                 | 5         |
| EXTERNAL CABLE.....                                      | 5         |
| PRINTER .....                                            | 5         |
| KEYBOARD .....                                           | 5         |
| BLOCK DIAGRAM OF TEST SETUP .....                        | 6         |
| <b>SUMMARY OF TEST RESULTS .....</b>                     | <b>7</b>  |
| <b>FCC §15.107 – AC LINE CONDUCTED EMISSIONS.....</b>    | <b>8</b>  |
| MEASUREMENT UNCERTAINTY .....                            | 8         |
| EUT SETUP .....                                          | 8         |
| EMI TEST RECEIVER SETUP.....                             | 9         |
| TEST PROCEDURE .....                                     | 9         |
| CORRECTED AMPLITUDE & MARGIN CALCULATION .....           | 9         |
| TEST EQUIPMENT LIST AND DETAILS.....                     | 10        |
| TEST RESULTS SUMMARY .....                               | 10        |
| TEST DATA .....                                          | 10        |
| <b>FCC §15.109 - RADIATED EMISSIONS .....</b>            | <b>19</b> |
| MEASUREMENT UNCERTAINTY .....                            | 19        |
| EUT SETUP .....                                          | 19        |
| EMI TEST RECEIVER SETUP.....                             | 20        |
| TEST PROCEDURE .....                                     | 20        |
| CORRECTED AMPLITUDE & MARGIN CALCULATION .....           | 20        |
| TEST EQUIPMENT LIST AND DETAILS.....                     | 21        |
| TEST RESULTS SUMMARY .....                               | 21        |
| TEST DATA .....                                          | 21        |

---

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The Archos SA's product, model number: *A101G4 (FCC ID: SOVAN101G4)* (the "EUT") in this report was a *Tablet PC*, which was measured approximately: 27.0 cm (L) x 16.0 cm (W) x 1.0 cm (H), rated input voltage: DC 3.7 V from lithium battery or DC 5V from adapter.

1. Adapter information: HUONIU  
Model: HNC050200X  
Input: AC 100-240V, 50/60Hz, 0.35A max  
Output: DC 5V, 2.0A
2. Adapter information: HONOR  
Model: ADS-10B-06 050100  
Input: AC 100-240V, 50/60Hz, 0.3A max  
Output: DC 5V, 2.0A

*\* All measurement and test data in this report was gathered from production sample serial number: 130506001 (Assigned by BACL.Dongguan). The EUT was received on 2013-05-07.*

### Objective

This report is prepared on behalf of Archos SA in accordance with Part 2, Subpart J, Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine compliance with FCC Part 15B, Class B.

### Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: *SOVAN101G4* for Wifi.

**Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxihu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Dongguan) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 500069-0).



The current scope of accreditations can be found at <http://ts.nist.gov/standards/scopes/5000690.htm>

## SYSTEM TEST CONFIGURATION

### Justification

The system was configured for testing in a typical fashion (as normally used by a typical user). The highest operating frequency is 1000MHz.

Test mode 1: USB Downloading

Test mode 2: HDMI Playing

### EUT Exercise Software

No software was used.

### Equipment Modifications

No equipment modifications used.

### Support Equipment List and Details


| Manufacturer | Description   | Model    | Serial Number            |
|--------------|---------------|----------|--------------------------|
| HP           | Printer       | C3941A   | JPTVOB2337               |
| SAST         | Modem         | AEM-2100 | 0293                     |
| DELL         | Keyboard      | L100     | CNORH656658907BL05DC     |
| DELL         | Laptop        | PP11L    | QDS-BRCM1017             |
| DELL         | LCD Monitor   | U3011t   | CN-OPH5NY-74445-16T-290L |
| Kinston      | Micro SD Card | 4G       | N/A                      |
| N/A          | Earphone      | N/A      | N/A                      |

### External Cable


| Cable Description                  | Length (m) | From Port               | To       |
|------------------------------------|------------|-------------------------|----------|
| Shielded Detachable Printer Cable  | 1.2        | Parallel Port of Laptop | Printer  |
| Shielded Detachable Serial Cable   | 1.2        | Serial Port of Laptop   | Modem    |
| Shielded Detachable Keyboard Cable | 1.5        | Keyboard Port of Laptop | Keyboard |
| Shielded Detachable USB Cable      | 0.8        | Laptop                  | EUT      |
| Shielded Detachable HDMI Cable     | 1.5        | LCD Monitor             | EUT      |
| Un-shielded Detachable Audio Cable | 1.2        | EUT                     | Earphone |

## Block Diagram of Test Setup

USB Downloading:

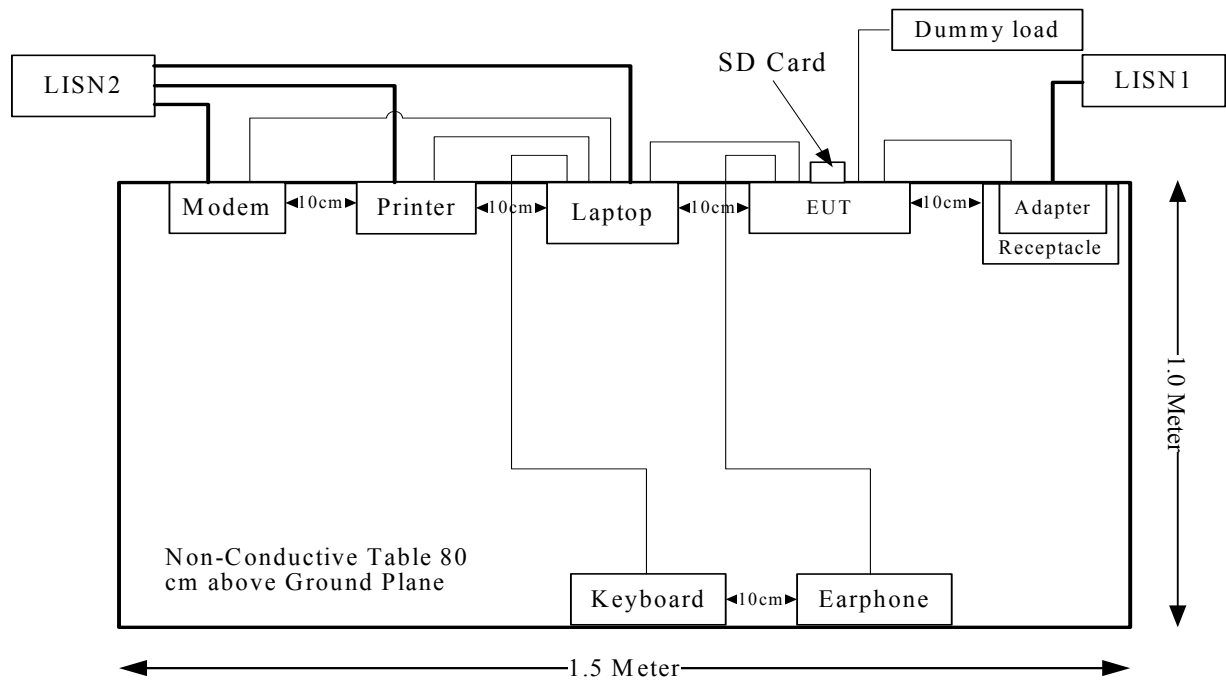

HDMI Playing:

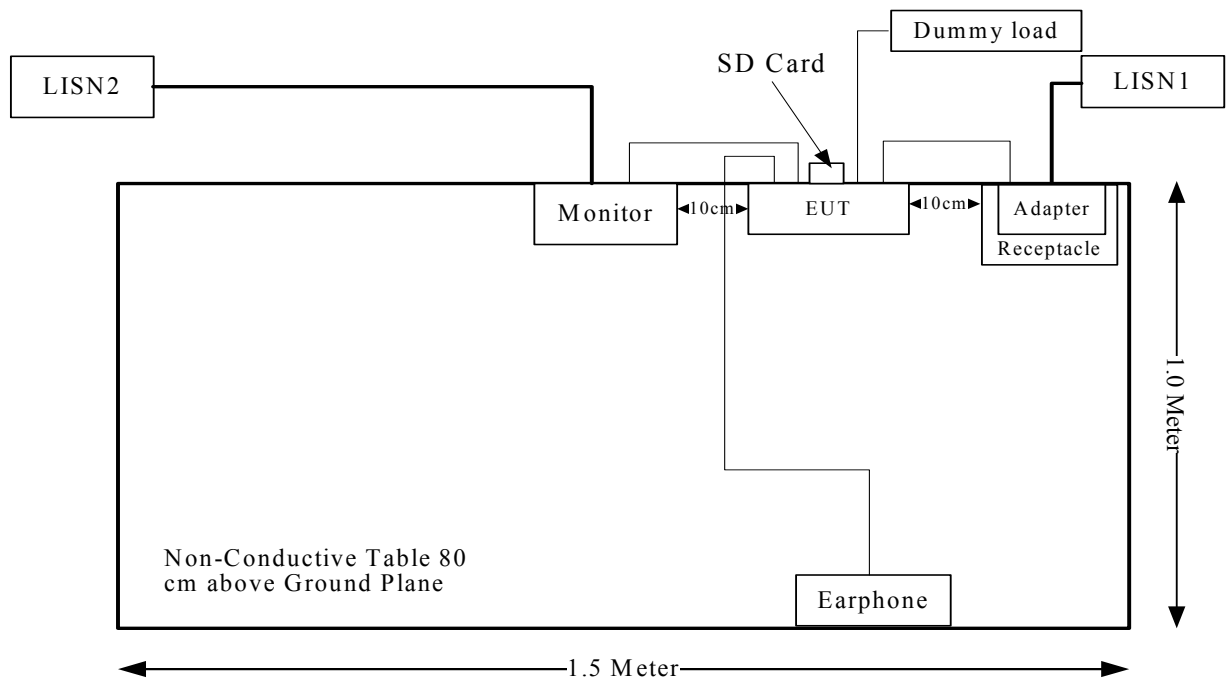

**SUMMARY OF TEST RESULTS**

| FCC Rules | Description of Test         | Results    |
|-----------|-----------------------------|------------|
| §15.107   | AC Line Conducted Emissions | Compliance |
| §15.109   | Radiated Emissions          | Compliance |

## FCC §15.107 – AC LINE CONDUCTED EMISSIONS

### Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If  $U_{lab}$  is less than or equal to  $U_{cisp}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{lab}$  is greater than  $U_{cisp}$  of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{lab} - U_{cisp})$ , exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by  $(U_{lab} - U_{cisp})$ , exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of  $U_{cisp}$

| Measurement                                                       | $U_{cisp}$ |
|-------------------------------------------------------------------|------------|
| Conducted disturbance at mains port using AMN (150 kHz to 30 MHz) | 3.4 dB     |

### EUT Setup

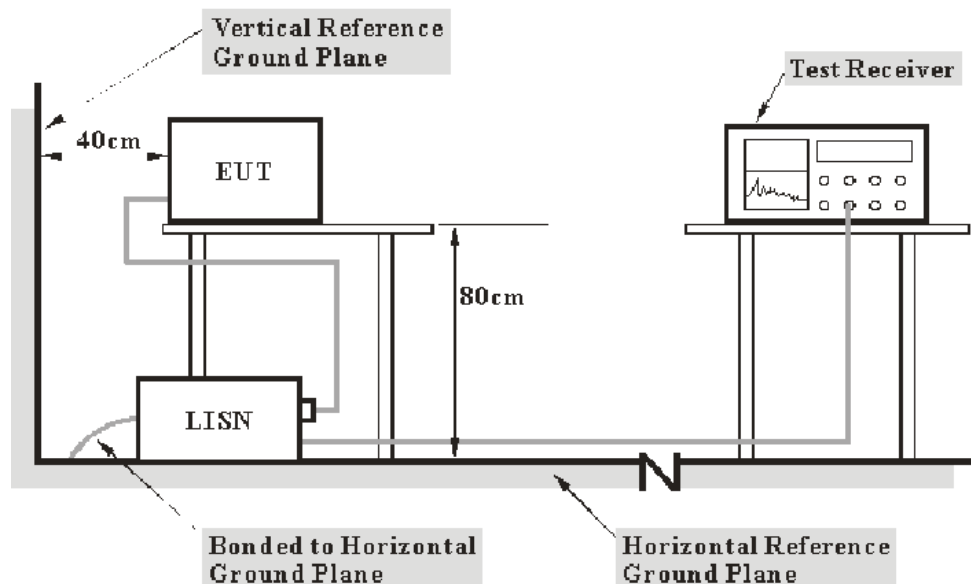

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.107 Class B limits.

The adapter was connected to a 120 VAC/60 Hz power source.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| <u>Frequency Range</u> | <u>IF B/W</u> |
|------------------------|---------------|
| 150 kHz – 30 MHz       | 9 kHz         |

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

### Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

$V_C$  (cord. Reading): corrected voltage amplitude

$V_R$ : reading voltage amplitude

$A_C$ : attenuation caused by cable loss

$VDF$ : voltage division factor of AMN

$C_f$ : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

**Test Equipment List and Details**

| Manufacturer | Description       | Model    | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|----------|---------------|------------------|----------------------|
| R&S          | EMI TEST RECIEVER | ESCS 30  | 830245/006    | 2013-1-10        | 2014-1-9             |
| R&S          | L.I.S.N           | ESH3-Z5  | 843331/015    | 2012-9-17        | 2013-9-16            |
| R&S          | L.I.S.N           | ESH3-Z5  | 100113        | 2012-11-29       | 2013-11-28           |
| BACL         | Test Software     | BACL-EMC | V1.0-2010     | N/A              | N/A                  |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

**Test Results Summary**

According to the recorded data in following table, the EUT complied with the FCC Part 15.107, with the worst margin reading of:

**3.86 dB at 0.150 MHz** in the **Neutral** conducted mode of HDMI Playing from adapter HNC050200X.

**2.66 dB at 0.380 MHz** in the **Line** conducted mode of USB Downloading from adapter ADS-10B-06 050100.

**Test Data****Environmental Conditions**


|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 26.1 °C   |
| <b>Relative Humidity:</b> | 65 %      |
| <b>ATM Pressure:</b>      | 100.3 kPa |

*The testing was performed by Ares Liu on 2013-05-09.*


Power Supply from adapter: HNC050200X

Test mode: USB Downloading

120 V, 60 Hz, Line:

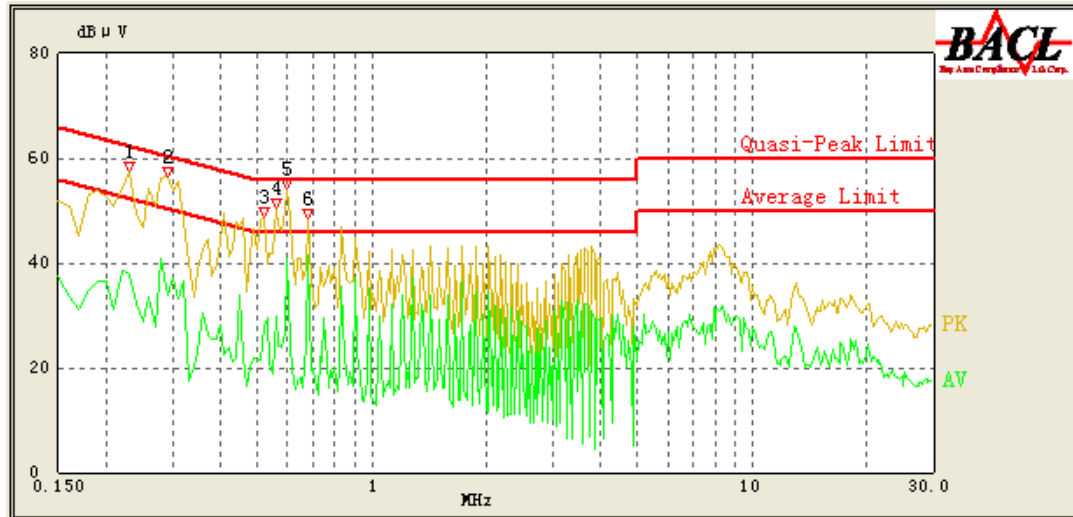


| Frequency (MHz) | Cord. Reading (dBμV) | Correction Factor (dB) | Limit (dBμV) | Margin (dB) | Detector (PK/AV/QP) |
|-----------------|----------------------|------------------------|--------------|-------------|---------------------|
| 0.230           | 47.55                | 0.93                   | 63.71        | 16.16       | QP                  |
| 0.230           | 37.84                | 0.93                   | 53.71        | 15.87       | AV                  |
| 0.290           | 51.74                | 0.83                   | 62.00        | 10.26       | QP                  |
| 0.290           | 33.90                | 0.83                   | 52.00        | 18.10       | AV                  |
| 0.520           | 38.66                | 0.52                   | 56.00        | 17.34       | QP                  |
| 0.520           | 27.83                | 0.52                   | 46.00        | 18.17       | AV                  |
| 0.560           | 42.96                | 0.50                   | 56.00        | 13.04       | QP                  |
| 0.560           | 29.96                | 0.50                   | 46.00        | 16.04       | AV                  |
| 0.600           | 48.84                | 0.49                   | 56.00        | 7.16        | QP                  |
| 0.600           | 40.67                | 0.49                   | 46.00        | 5.33        | AV                  |
| 0.680           | 44.46                | 0.45                   | 56.00        | 11.54       | QP                  |
| 0.680           | 41.36                | 0.45                   | 46.00        | 4.64        | AV                  |

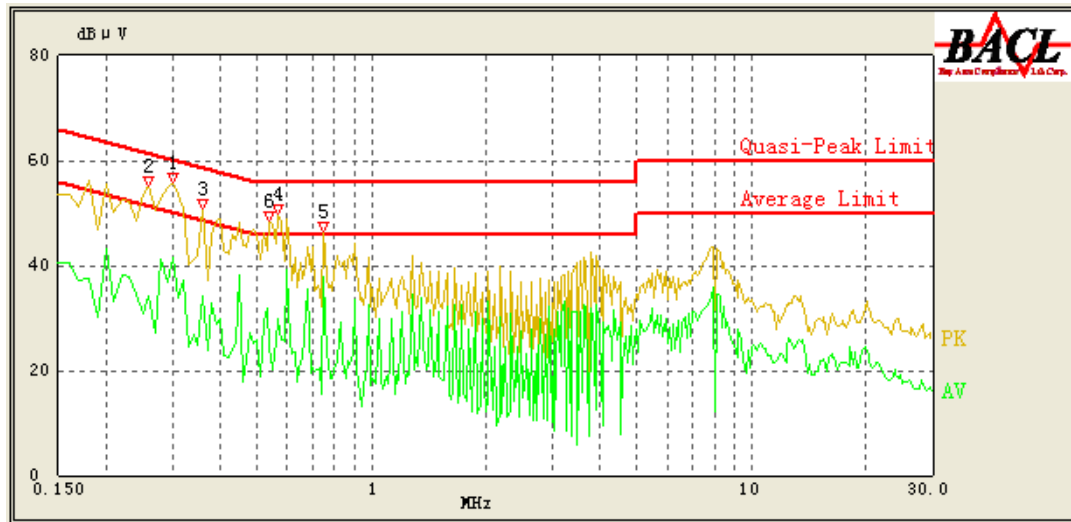**120 V, 60 Hz, Neutral:**

| Frequency (MHz) | Cord. Reading (dBμV) | Correction Factor (dB) | Limit (dBμV) | Margin (dB) | Detector (PK/AV/QP) |
|-----------------|----------------------|------------------------|--------------|-------------|---------------------|
| 0.300           | 53.40                | 1.07                   | 61.71        | 8.31        | QP                  |
| 0.300           | 41.39                | 1.07                   | 51.71        | 10.32       | AV                  |
| 0.260           | 49.42                | 1.28                   | 62.86        | 13.44       | QP                  |
| 0.260           | 34.11                | 1.28                   | 52.86        | 18.75       | AV                  |
| 0.360           | 44.85                | 0.91                   | 60.00        | 15.15       | QP                  |
| 0.360           | 34.29                | 0.91                   | 50.00        | 15.71       | AV                  |
| 0.570           | 42.83                | 0.51                   | 56.00        | 13.17       | QP                  |
| 0.570           | 29.95                | 0.51                   | 46.00        | 16.05       | AV                  |
| 0.750           | 41.59                | 0.39                   | 56.00        | 14.41       | QP                  |
| 0.750           | 37.77                | 0.39                   | 46.00        | 8.23        | AV                  |
| 0.540           | 41.12                | 0.52                   | 56.00        | 14.88       | QP                  |
| 0.540           | 24.58                | 0.52                   | 46.00        | 21.42       | AV                  |

Test mode: HDMI Playing

120 V, 60 Hz, Line:

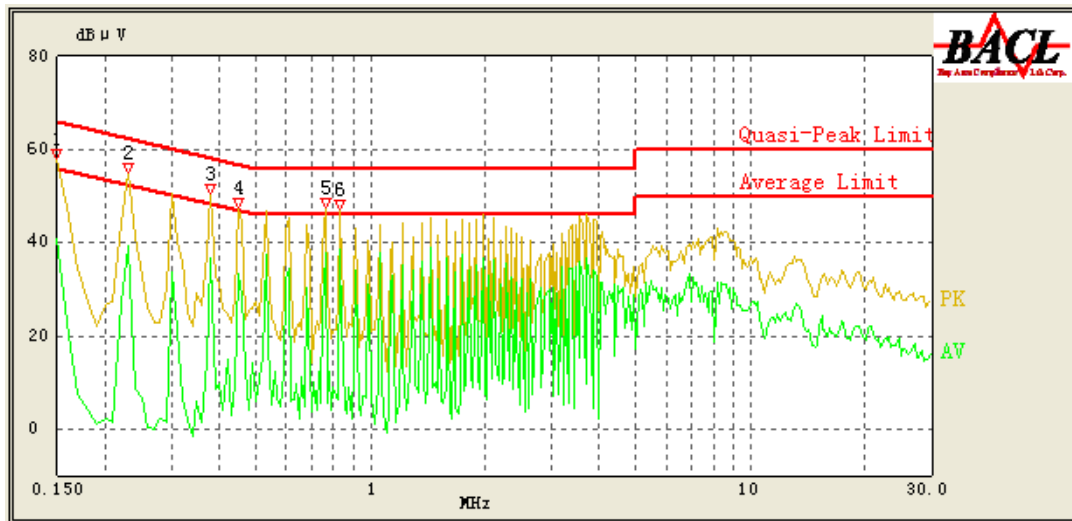

| Frequency (MHz) | Cord. Reading (dBμV) | Correction Factor (dB) | Limit (dBμV) | Margin (dB) | Detector (PK/AV/QP) |
|-----------------|----------------------|------------------------|--------------|-------------|---------------------|
| 0.150           | 55.51                | 1.06                   | 66.00        | 10.49       | QP                  |
| 0.150           | 40.85                | 1.06                   | 56.00        | 15.15       | AV                  |
| 0.230           | 52.67                | 0.93                   | 63.71        | 11.04       | QP                  |
| 0.230           | 39.25                | 0.93                   | 53.71        | 14.46       | AV                  |
| 0.380           | 48.40                | 0.70                   | 59.43        | 11.03       | QP                  |
| 0.380           | 36.76                | 0.70                   | 49.43        | 12.67       | AV                  |
| 0.450           | 43.64                | 0.60                   | 57.43        | 13.79       | QP                  |
| 0.450           | 33.48                | 0.60                   | 47.43        | 13.95       | AV                  |
| 0.760           | 45.73                | 0.42                   | 56.00        | 10.27       | QP                  |
| 0.760           | 37.82                | 0.42                   | 46.00        | 8.18        | AV                  |
| 0.830           | 43.62                | 0.39                   | 56.00        | 12.38       | QP                  |
| 0.830           | 38.47                | 0.39                   | 46.00        | 7.53        | AV                  |

**120 V, 60 Hz, Neutral:**


| Frequency (MHz) | Cord. Reading (dBμV) | Correction Factor (dB) | Limit (dBμV) | Margin (dB) | Detector (PK/AV/QP) |
|-----------------|----------------------|------------------------|--------------|-------------|---------------------|
| 0.150           | 56.92                | 1.84                   | 66.00        | 9.08        | QP                  |
| 0.150           | 52.14                | 1.84                   | 56.00        | 3.86*       | AV                  |
| 0.230           | 52.34                | 1.43                   | 63.71        | 11.37       | QP                  |
| 0.230           | 46.32                | 1.43                   | 53.71        | 7.39        | AV                  |
| 0.380           | 50.57                | 0.86                   | 59.43        | 8.86        | QP                  |
| 0.380           | 43.67                | 0.86                   | 49.43        | 5.76        | AV                  |
| 0.530           | 48.34                | 0.53                   | 56.00        | 7.66        | QP                  |
| 0.530           | 41.69                | 0.53                   | 46.00        | 4.31        | AV                  |
| 0.450           | 46.86                | 0.68                   | 57.43        | 10.57       | QP                  |
| 0.450           | 40.58                | 0.68                   | 47.43        | 6.85        | AV                  |
| 0.830           | 45.54                | 0.34                   | 56.00        | 10.46       | QP                  |
| 0.830           | 41.03                | 0.34                   | 46.00        | 4.97        | AV                  |

\*Within measurement uncertainty!

Power Supply from adapter: ADS-10B-06 050100

Test mode: USB Downloading

120 V, 60 Hz, Line:

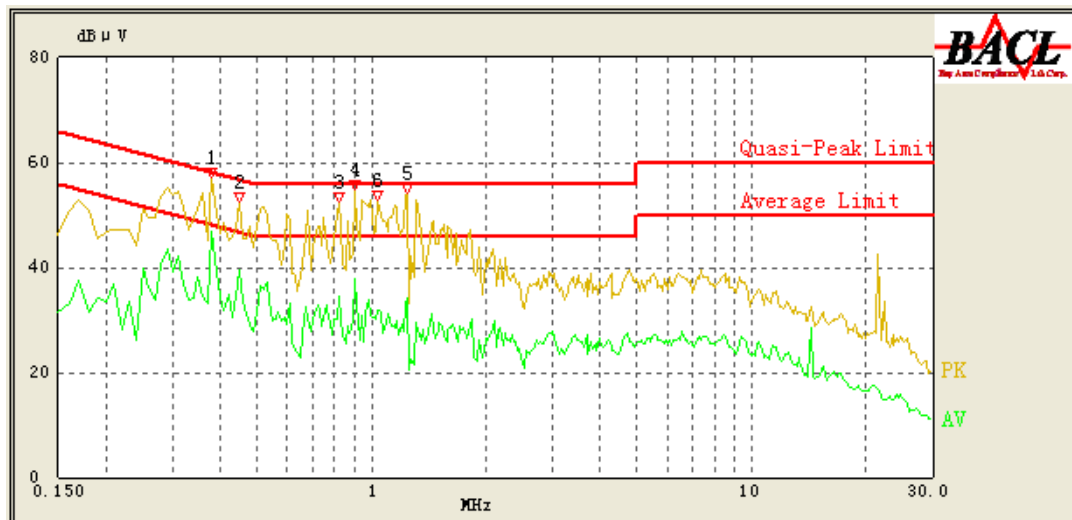

| Frequency (MHz) | Cord. Reading (dBμV) | Correction Factor (dB) | Limit (dBμV) | Margin (dB) | Detector (PK/AV/QP) |
|-----------------|----------------------|------------------------|--------------|-------------|---------------------|
| 0.380           | 53.87                | 0.70                   | 59.43        | 5.56        | QP                  |
| 0.380           | 46.77                | 0.70                   | 49.43        | 2.66*       | AV                  |
| 0.450           | 46.22                | 0.60                   | 57.43        | 11.21       | QP                  |
| 0.450           | 39.53                | 0.60                   | 47.43        | 7.90        | AV                  |
| 0.820           | 47.69                | 0.40                   | 56.00        | 8.31        | QP                  |
| 0.820           | 34.55                | 0.40                   | 46.00        | 11.45       | AV                  |
| 0.900           | 50.54                | 0.36                   | 56.00        | 5.46        | QP                  |
| 0.900           | 37.94                | 0.36                   | 46.00        | 8.06        | AV                  |
| 1.240           | 43.65                | 0.33                   | 56.00        | 12.35       | QP                  |
| 1.240           | 34.22                | 0.33                   | 46.00        | 11.78       | AV                  |
| 1.040           | 45.00                | 0.32                   | 56.00        | 11.00       | QP                  |
| 1.040           | 31.72                | 0.32                   | 46.00        | 14.28       | AV                  |


\*Within measurement uncertainty!

**120 V, 60 Hz, Neutral:**


| Frequency (MHz) | Cord. Reading (dBμV) | Correction Factor (dB) | Limit (dBμV) | Margin (dB) | Detector (PK/AV/QP) |
|-----------------|----------------------|------------------------|--------------|-------------|---------------------|
| 0.370           | 53.01                | 0.89                   | 59.71        | 6.70        | QP                  |
| 0.370           | 45.22                | 0.89                   | 49.71        | 4.49        | AV                  |
| 0.910           | 48.49                | 0.29                   | 56.00        | 7.51        | QP                  |
| 0.910           | 36.75                | 0.29                   | 46.00        | 9.25        | AV                  |
| 0.830           | 45.23                | 0.34                   | 56.00        | 10.77       | QP                  |
| 0.830           | 37.17                | 0.34                   | 46.00        | 8.83        | AV                  |
| 1.350           | 44.21                | 0.24                   | 56.00        | 11.79       | QP                  |
| 1.350           | 34.24                | 0.24                   | 46.00        | 11.76       | AV                  |
| 1.590           | 48.19                | 0.25                   | 56.00        | 7.81        | QP                  |
| 1.590           | 34.10                | 0.25                   | 46.00        | 11.90       | AV                  |
| 1.730           | 47.38                | 0.26                   | 56.00        | 8.62        | QP                  |
| 1.720           | 34.67                | 0.26                   | 46.00        | 11.33       | AV                  |

Test mode: HDMI Playing

120 V, 60 Hz, Line:

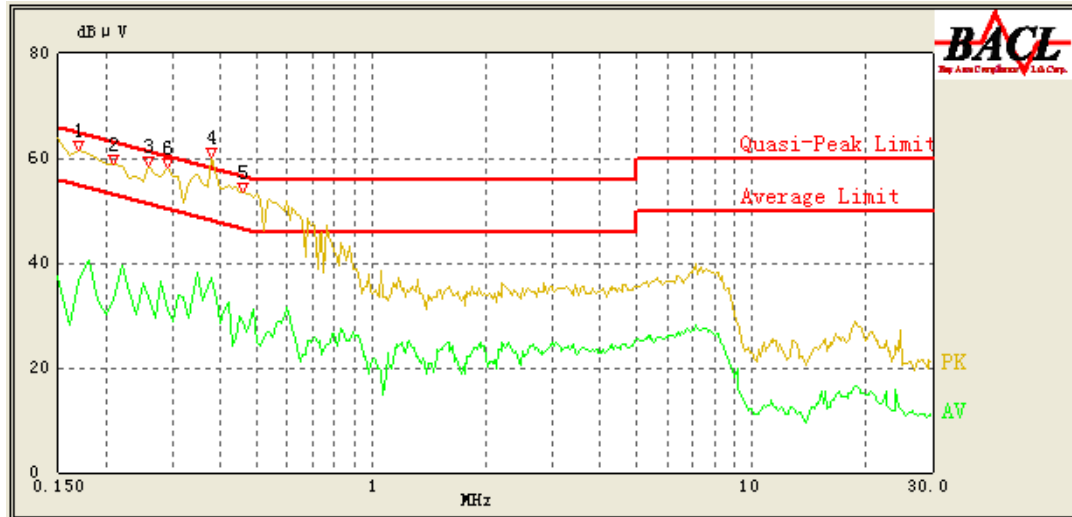

| Frequency (MHz) | Cord. Reading (dBμV) | Correction Factor (dB) | Limit (dBμV) | Margin (dB) | Detector (PK/AV/QP) |
|-----------------|----------------------|------------------------|--------------|-------------|---------------------|
| 0.170           | 54.02                | 1.03                   | 65.43        | 11.41       | QP                  |
| 0.170           | 36.38                | 1.03                   | 55.43        | 19.05       | AV                  |
| 0.210           | 53.04                | 0.96                   | 64.29        | 11.25       | QP                  |
| 0.210           | 33.15                | 0.96                   | 54.29        | 21.14       | AV                  |
| 0.260           | 52.09                | 0.88                   | 62.86        | 10.77       | QP                  |
| 0.260           | 33.64                | 0.88                   | 52.86        | 19.22       | AV                  |
| 0.380           | 53.45                | 0.70                   | 59.43        | 5.98        | QP                  |
| 0.380           | 37.29                | 0.70                   | 49.43        | 12.14       | AV                  |
| 0.460           | 45.50                | 0.59                   | 57.14        | 11.64       | QP                  |
| 0.460           | 28.68                | 0.59                   | 47.14        | 18.46       | AV                  |
| 0.290           | 51.83                | 0.83                   | 62.00        | 10.17       | QP                  |
| 0.290           | 31.30                | 0.83                   | 52.00        | 20.70       | AV                  |

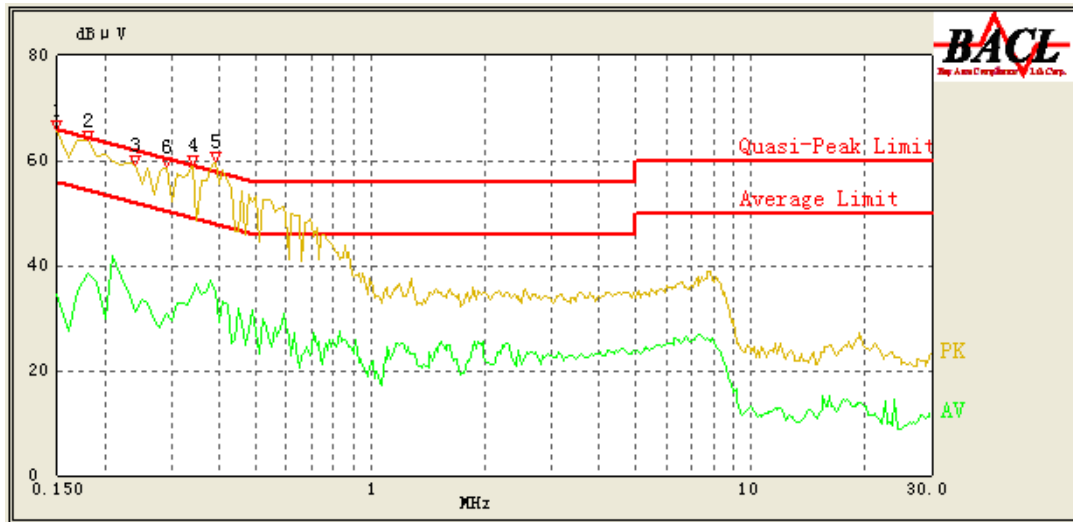**120 V, 60 Hz, Neutral:**

| Frequency (MHz) | Cord. Reading (dBμV) | Correction Factor (dB) | Limit (dBμV) | Margin (dB) | Detector (PK/AV/QP) |
|-----------------|----------------------|------------------------|--------------|-------------|---------------------|
| 0.150           | 57.34                | 1.84                   | 66.00        | 8.66        | QP                  |
| 0.150           | 34.34                | 1.84                   | 56.00        | 21.66       | AV                  |
| 0.180           | 54.95                | 1.69                   | 65.14        | 10.19       | QP                  |
| 0.180           | 38.53                | 1.69                   | 55.14        | 16.61       | AV                  |
| 0.240           | 53.53                | 1.38                   | 63.43        | 9.90        | QP                  |
| 0.240           | 31.07                | 1.38                   | 53.43        | 22.36       | AV                  |
| 0.340           | 54.26                | 0.97                   | 60.57        | 6.31        | QP                  |
| 0.340           | 34.56                | 0.97                   | 50.57        | 16.01       | AV                  |
| 0.390           | 53.25                | 0.84                   | 59.14        | 5.89        | QP                  |
| 0.390           | 35.16                | 0.84                   | 49.14        | 13.98       | AV                  |
| 0.290           | 52.45                | 1.12                   | 62.00        | 9.55        | QP                  |
| 0.290           | 30.98                | 1.12                   | 52.00        | 21.02       | AV                  |

## FCC §15.109 - RADIATED EMISSIONS

### Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If  $U_{lab}$  is less than or equal to  $U_{cisp}$  of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{lab}$  is greater than  $U_{cisp}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{lab} - U_{cisp})$ , exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by  $(U_{lab} - U_{cisp})$ , exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

30M~200MHz: 5.0 dB

200M~1GHz: 6.2 dB

1G~6GHz: 4.45 dB


6G~18GHz: 5.23 dB


Table 2 – Values of  $U_{cisp}$

| Measurement                                                                                | $U_{cisp}$ |
|--------------------------------------------------------------------------------------------|------------|
| Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz) | 6.3 dB     |
| Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)                   | 5.2 dB     |
| Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)                  | 5.5 dB     |

### EUT Setup

Below 1 GHz:

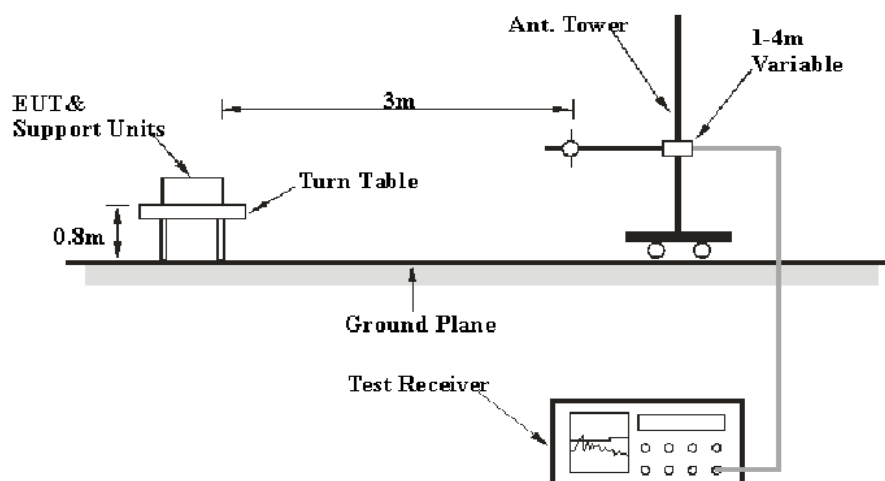

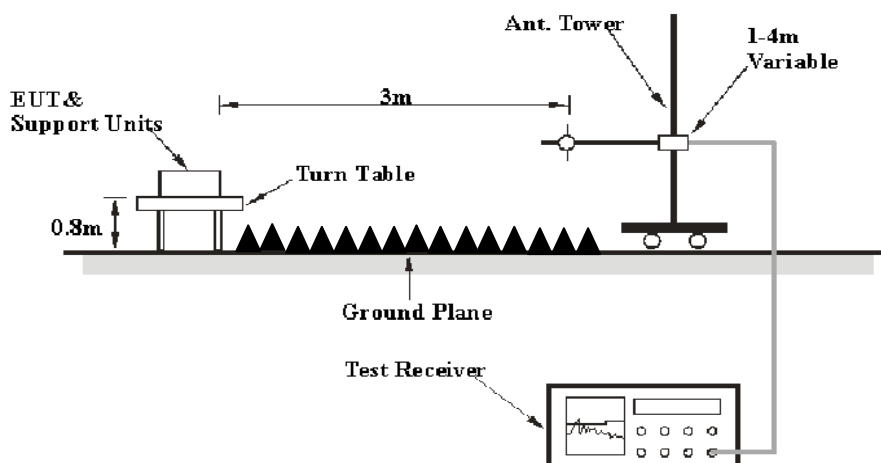**Above 1GHz:**

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC Part 15.109, Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter connected to a 120 VAC/60 Hz power source.

**EMI Test Receiver Setup**

According to FCC 15.33 requirements, the system was measured from 30 MHz to 6 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

| <b><i>Frequency Range</i></b> | <b><i>RBW</i></b> | <b><i>Video B/W</i></b> | <b><i>Detector</i></b> |
|-------------------------------|-------------------|-------------------------|------------------------|
| 30 MHz – 1000 MHz             | 120 kHz           | 300 kHz                 | QP                     |
| Above 1 GHz                   | 1MHz              | 3 MHz                   | Peak                   |
| Above 1 GHz                   | 1MHz              | 10 Hz                   | Ave                    |

**Test Procedure**

For the radiated emissions test, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in Quasi-peak detection mode for 30 MHz to 1 GHz, Peak and average detection mode above 1 GHz.

**Corrected Amplitude & Margin Calculation**

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

### Test Equipment List and Details

| Manufacturer   | Description       | Model      | Serial Number | Calibration Date | Calibration Due Date |
|----------------|-------------------|------------|---------------|------------------|----------------------|
| R&S            | EMI TEST RECEIVER | ESCI       | 100224        | 2013-5-6         | 2014-5-5             |
| Sunol Sciences | Antenna           | JB3        | A060611-1     | 2012-9-6         | 2015-9-5             |
| HP             | HP AMPLIFIER      | 8447E      | 2434A02181    | N/A              | N/A                  |
| R&S            | Spectrum analyzer | FSEM 30    | 849016/001    | 2012-9-4         | 2013-9-3             |
| ETS LINDGREN   | horn antenna      | 3115       | 000 527 35    | 2012-9-6         | 2015-9-5             |
| Mini-Circuit   | Amplifier         | ZVA-213-S+ | 54201245      | N/A              | N/A                  |
| Farad          | Test Software     | EZ-EMC     | V1.1.4.2      | N/A              | N/A                  |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

### Test Results Summary

According to the data in the following table, the EUT complied with the FCC §15.109, Class B, with the worst margin reading of:

**2.70 dB at 40.6700 MHz** in the **Vertical** polarization of USB Downloading mode from adapter HNC050200X

**3.37 dB at 73.6500 MHz** in the **Vertical** polarization of HDMI Playing mode from adapter ADS-10B-06 050100

### Test Data

#### Environmental Conditions

|                           |         |
|---------------------------|---------|
| <b>Temperature:</b>       | 26 °C   |
| <b>Relative Humidity:</b> | 69 %    |
| <b>ATM Pressure:</b>      | 100 kPa |


*The testing was performed by Ares Liu on 2013-05-27.*

Power Supply from adapter HNC050200X

**Below 1G:**

Test mode: USB Downloading


**Horizontal:**

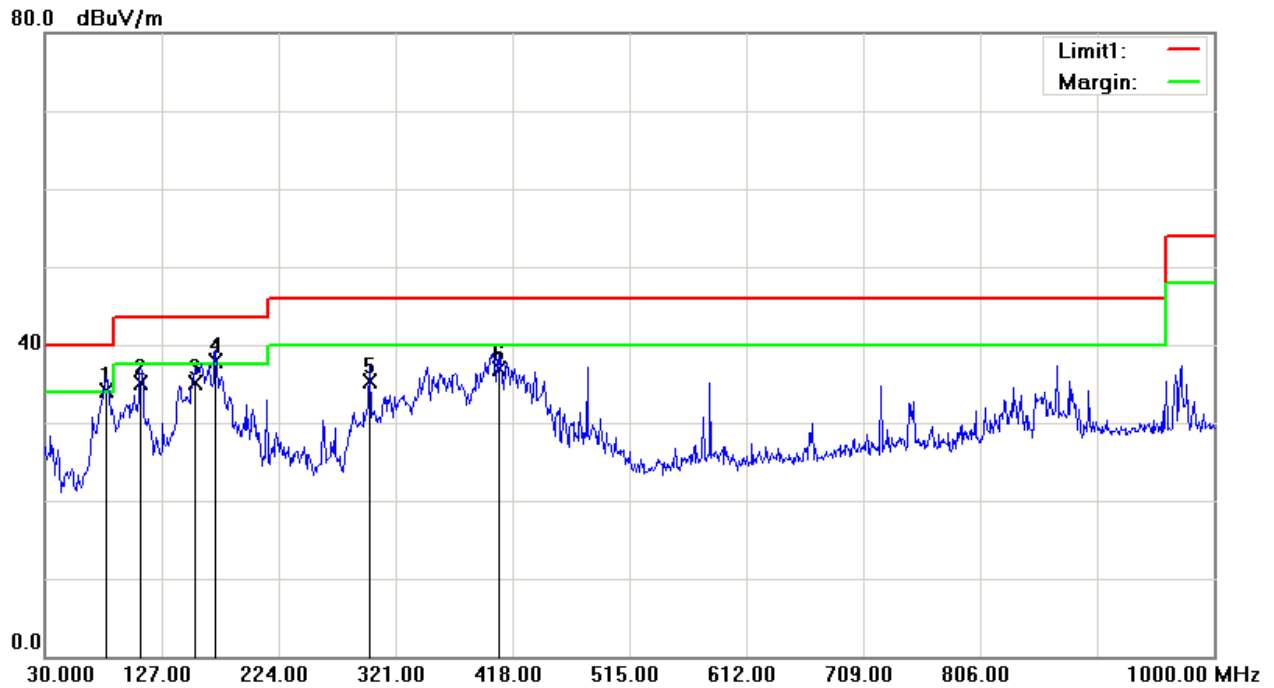

| Frequency (MHz) | Receiver Reading (dBuV/m) | Detector (PK/QP/Ave ) | Correction Factor (dB) | Cord. Amp. (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------------|-----------------------|------------------------|---------------------|----------------|-------------|
| 81.4100         | 46.85                     | QP                    | -12.75                 | 34.10               | 40.00          | 5.90        |
| 109.5400        | 42.99                     | QP                    | -7.79                  | 35.20               | 43.50          | 8.30        |
| 155.1300        | 42.76                     | QP                    | -7.66                  | 35.10               | 43.50          | 8.40        |
| 171.6200        | 46.67                     | QP                    | -8.67                  | 38.00               | 43.50          | 5.50        |
| 299.6600        | 41.50                     | QP                    | -6.20                  | 35.30               | 46.00          | 10.70       |
| 406.3600        | 40.81                     | QP                    | -3.91                  | 36.90               | 46.00          | 9.10        |

**Vertical:**

80.0 dBuV/m

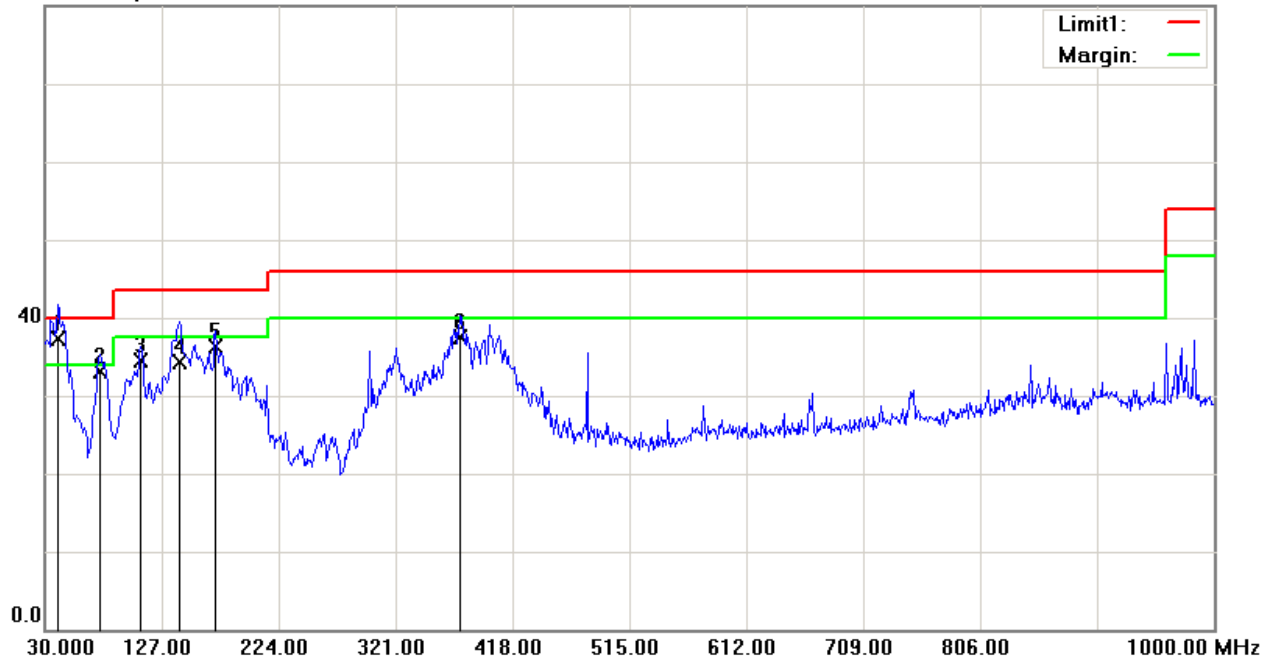


| Frequency (MHz) | Receiver Reading (dBuV/m) | Detector (PK/QP/Ave) | Correction Factor (dB) | Cord. Amp. (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------------|----------------------|------------------------|---------------------|----------------|-------------|
| 40.6700         | 44.23                     | QP                   | -6.93                  | 37.30               | 40.00          | 2.70*       |
| 75.5900         | 45.48                     | QP                   | -12.28                 | 33.20               | 40.00          | 6.80        |
| 109.5400        | 42.29                     | QP                   | -7.79                  | 34.50               | 43.50          | 9.00        |
| 141.5500        | 41.72                     | QP                   | -7.42                  | 34.30               | 43.50          | 9.20        |
| 171.6200        | 45.07                     | QP                   | -8.67                  | 36.40               | 43.50          | 7.10        |
| 374.3500        | 42.02                     | QP                   | -4.52                  | 37.50               | 46.00          | 8.50        |

\*Within measurement uncertainty!

Test mode: HDMI Playing

### Horizontal:

80.0 dBuV/m

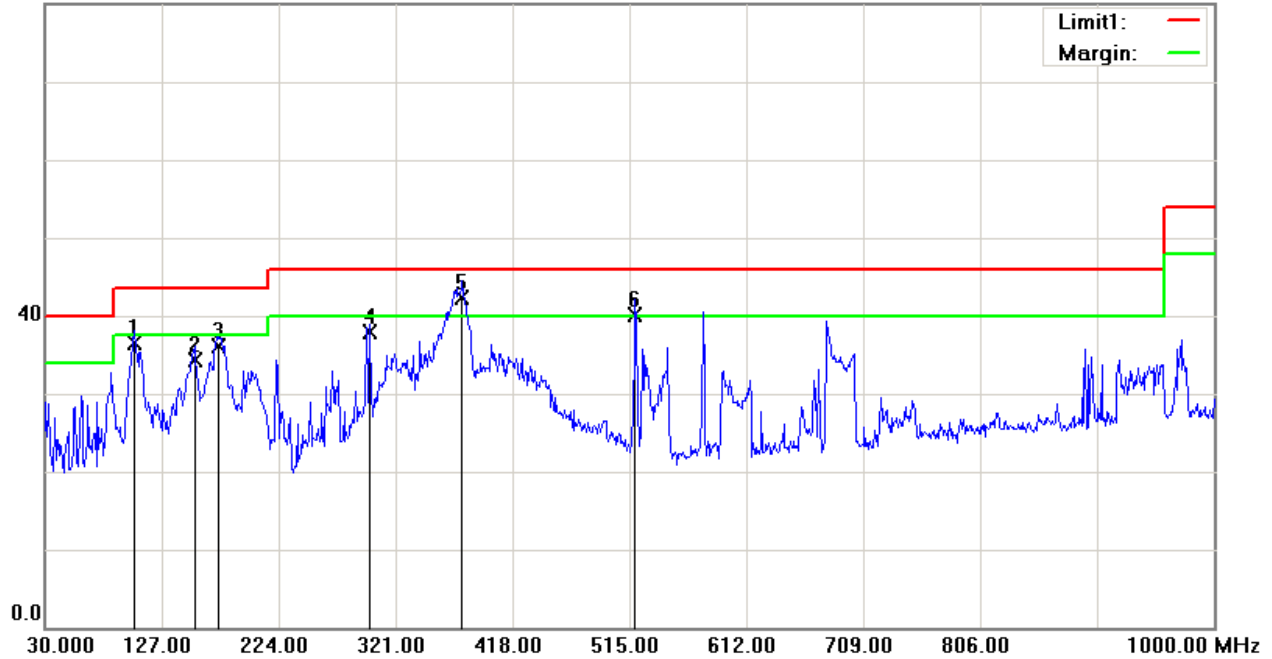


| Frequency (MHz) | Receiver Reading (dBuV/m) | Detector (PK/QP/Ave ) | Correction Factor (dB) | Cord. Amp. (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------------|-----------------------|------------------------|---------------------|----------------|-------------|
| 103.7200        | 45.61                     | QP                    | -9.11                  | 36.50               | 43.50          | 7.00        |
| 154.1600        | 41.96                     | QP                    | -7.66                  | 34.30               | 43.50          | 9.20        |
| 173.5600        | 44.94                     | QP                    | -8.84                  | 36.10               | 43.50          | 7.40        |
| 299.6600        | 44.10                     | QP                    | -6.20                  | 37.90               | 46.00          | 8.10        |
| 376.2900        | 46.80                     | QP                    | -4.50                  | 42.30               | 46.00          | 3.70*       |
| 519.8500        | 42.37                     | QP                    | -2.17                  | 40.20               | 46.00          | 5.80*       |

\*Within measurement uncertainty!

**Vertical:**

80.0 dBuV/m

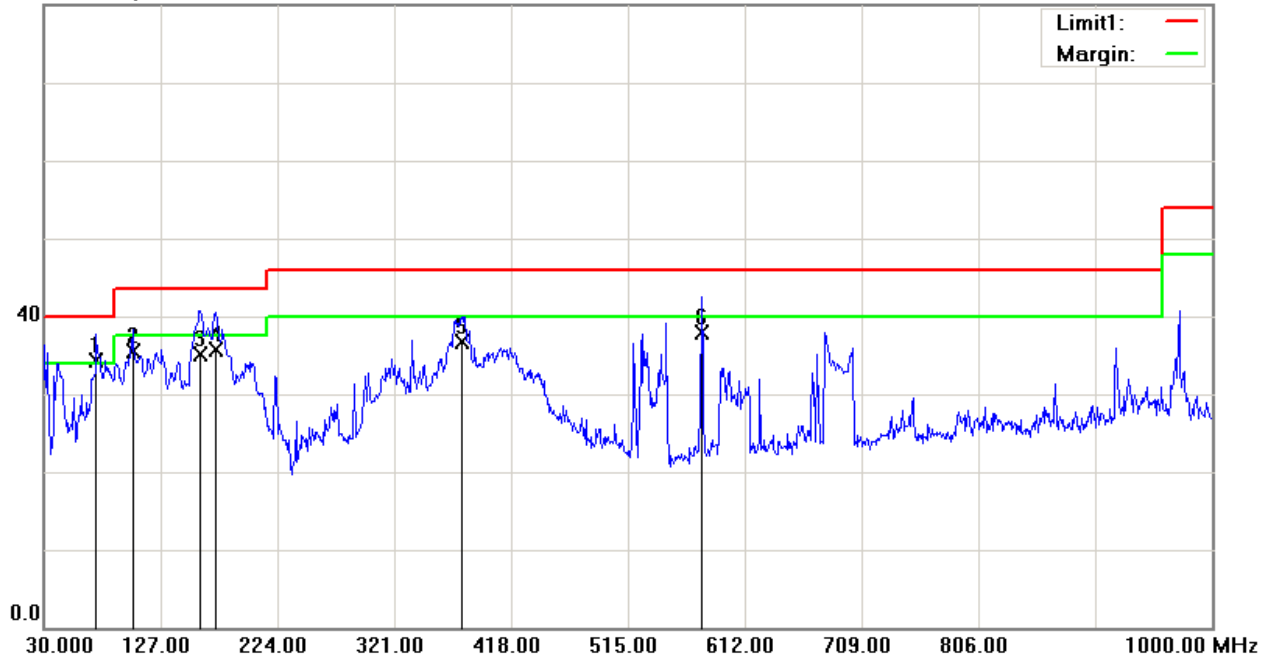


| Frequency (MHz) | Receiver Reading (dBuV/m) | Detector (PK/QP/Ave) | Correction Factor (dB) | Cord. Amp. (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------------|----------------------|------------------------|---------------------|----------------|-------------|
| 73.6500         | 46.49                     | QP                   | -12.19                 | 34.30               | 40.00          | 5.70        |
| 103.7200        | 44.71                     | QP                   | -9.11                  | 35.60               | 43.50          | 7.90        |
| 159.9800        | 42.89                     | QP                   | -7.69                  | 35.20               | 43.50          | 8.30        |
| 172.5900        | 44.56                     | QP                   | -8.76                  | 35.80               | 43.50          | 7.70        |
| 377.2600        | 41.30                     | QP                   | -4.50                  | 36.80               | 46.00          | 9.20        |
| 576.1100        | 38.90                     | QP                   | -1.00                  | 37.90               | 46.00          | 8.10        |

Power Supply from adapter ADS-10B-06 050100

Test mode: USB Downloading


### Horizontal:

80.0 dBuV/m

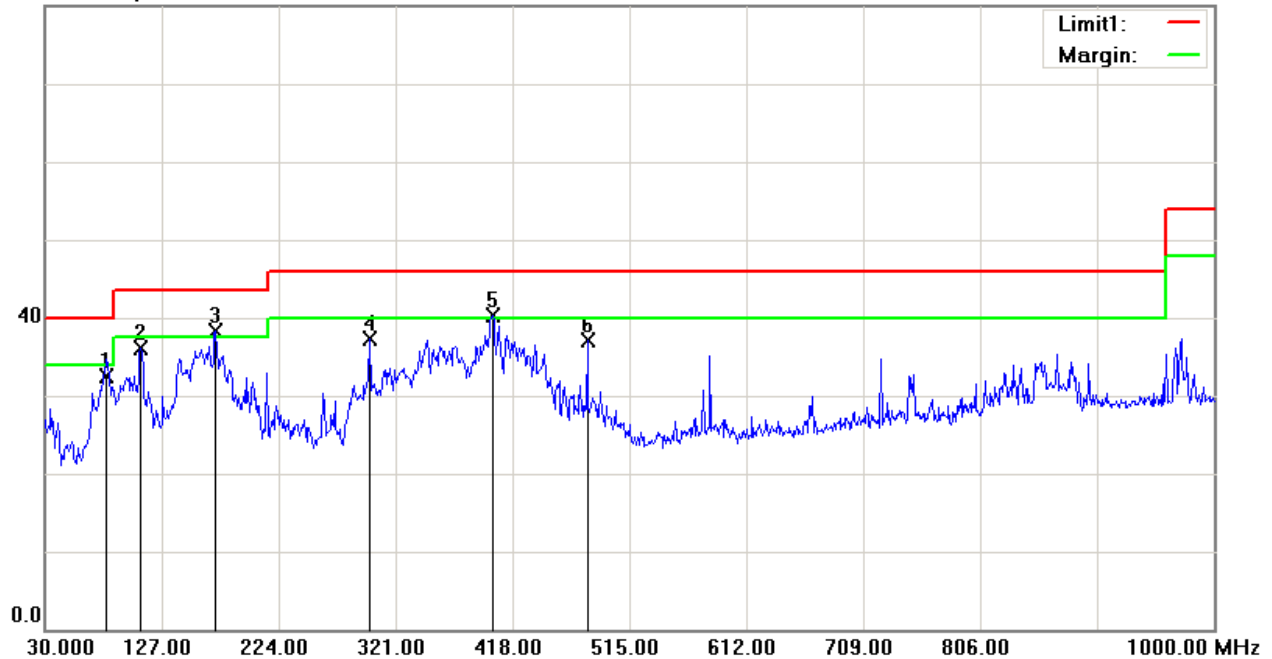

| Frequency (MHz) | Receiver Reading (dBuV/m) | Detector (PK/QP/Ave ) | Correction Factor (dB) | Cord. Amp. (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------------|-----------------------|------------------------|---------------------|----------------|-------------|
| 81.4100         | 45.35                     | QP                    | -12.75                 | 32.60               | 40.00          | 7.40        |
| 109.5400        | 43.99                     | QP                    | -7.79                  | 36.20               | 43.50          | 7.30        |
| 171.6200        | 47.06                     | QP                    | -8.67                  | 38.39               | 43.50          | 5.11        |
| 299.6600        | 43.53                     | QP                    | -6.20                  | 37.33               | 46.00          | 8.67        |
| 401.5100        | 44.43                     | QP                    | -4.05                  | 40.38               | 46.00          | 5.62*       |
| 480.0800        | 39.34                     | QP                    | -2.28                  | 37.06               | 46.00          | 8.94        |

\*Within measurement uncertainty!

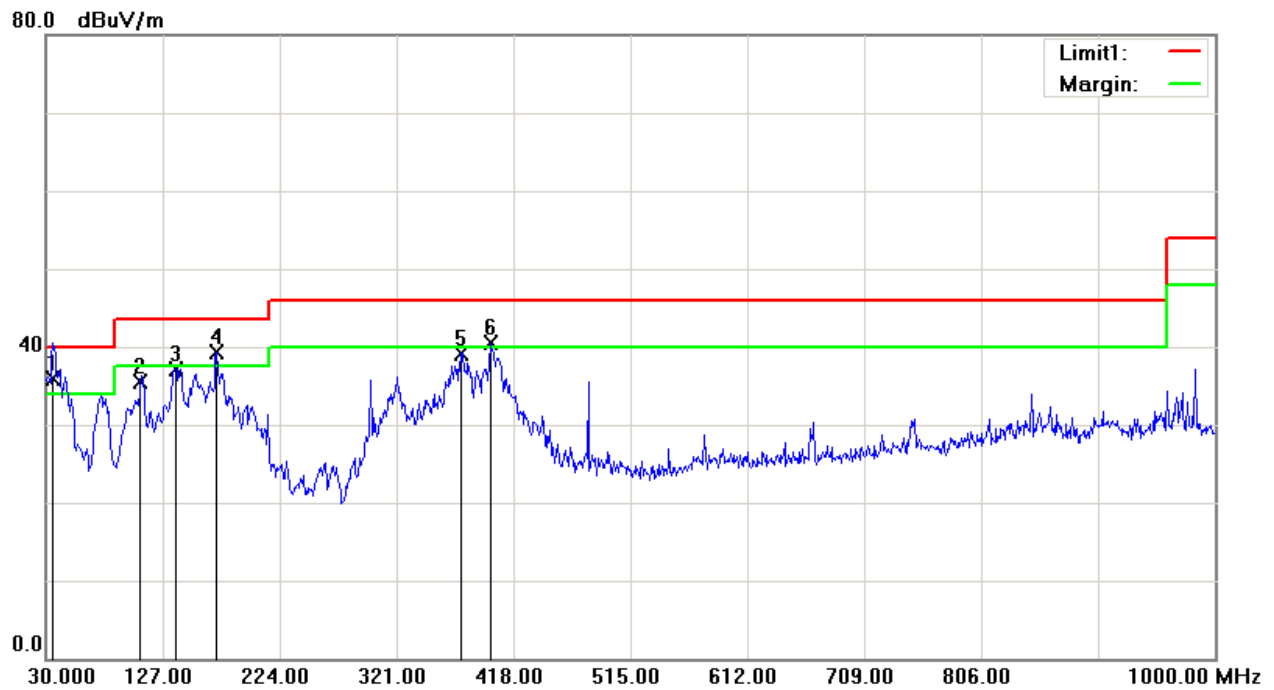**Vertical:**


| Frequency (MHz) | Receiver Reading (dBuV/m) | Detector (PK/QP/Ave) | Correction Factor (dB) | Cord. Amp. (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------------|----------------------|------------------------|---------------------|----------------|-------------|
| 35.8200         | 39.16                     | QP                   | -3.26                  | 35.90               | 40.00          | 4.10*       |
| 108.5700        | 43.51                     | QP                   | -7.96                  | 35.55               | 43.50          | 7.95        |
| 137.6700        | 44.27                     | QP                   | -7.07                  | 37.20               | 43.50          | 6.30        |
| 171.6200        | 48.01                     | QP                   | -8.67                  | 39.34               | 43.50          | 4.16*       |
| 374.3500        | 43.72                     | QP                   | -4.52                  | 39.20               | 46.00          | 6.80        |
| 398.6000        | 44.73                     | QP                   | -4.15                  | 40.58               | 46.00          | 5.42*       |

\*Within measurement uncertainty!

Test mode: HDMI Playing

### Horizontal:

80.0 dBuV/m

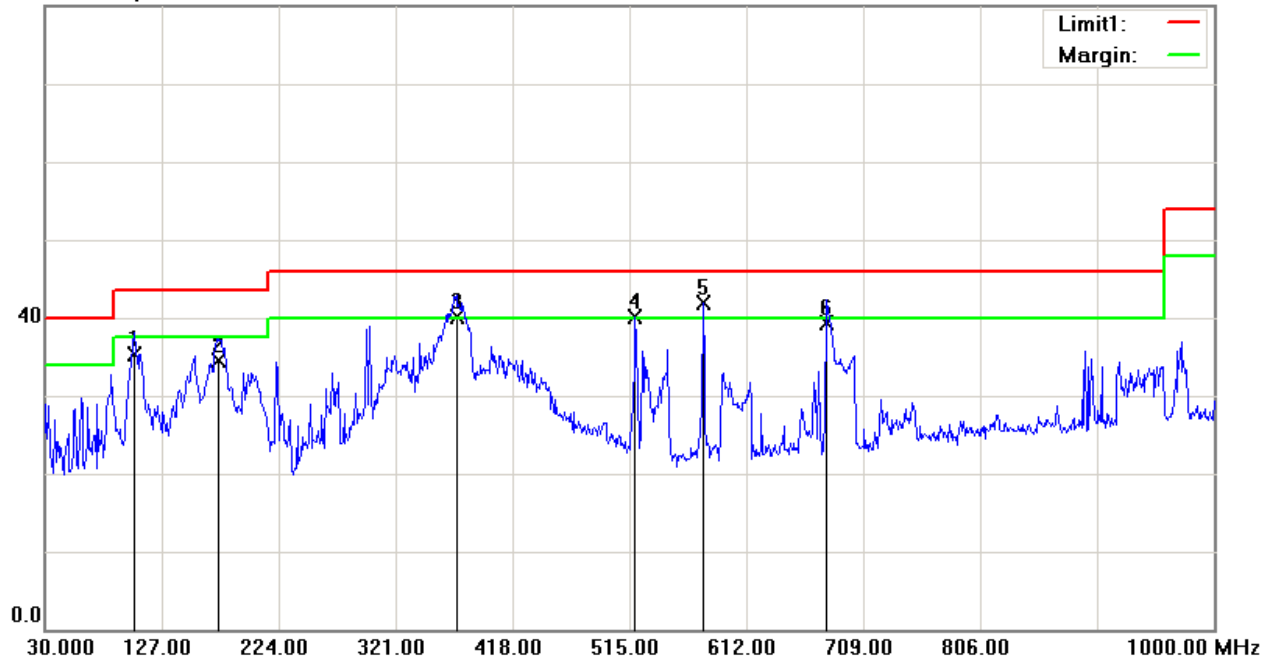


| Frequency (MHz) | Receiver Reading (dBuV/m) | Detector (PK/QP/Ave) | Correction Factor (dB) | Cord. Amp. (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------------|----------------------|------------------------|---------------------|----------------|-------------|
| 103.7200        | 44.41                     | QP                   | -9.11                  | 35.30               | 43.50          | 8.20        |
| 173.5600        | 43.44                     | QP                   | -8.84                  | 34.60               | 43.50          | 8.90        |
| 371.4400        | 44.76                     | QP                   | -4.56                  | 40.20               | 46.00          | 5.80*       |
| 519.8500        | 42.19                     | QP                   | -2.17                  | 40.02               | 46.00          | 5.98*       |
| 576.1100        | 42.95                     | QP                   | -1.00                  | 41.95               | 46.00          | 4.05*       |
| 678.9300        | 39.33                     | QP                   | -0.03                  | 39.30               | 46.00          | 6.70        |

\*Within measurement uncertainty!

**Vertical:**

80.0 dBuV/m

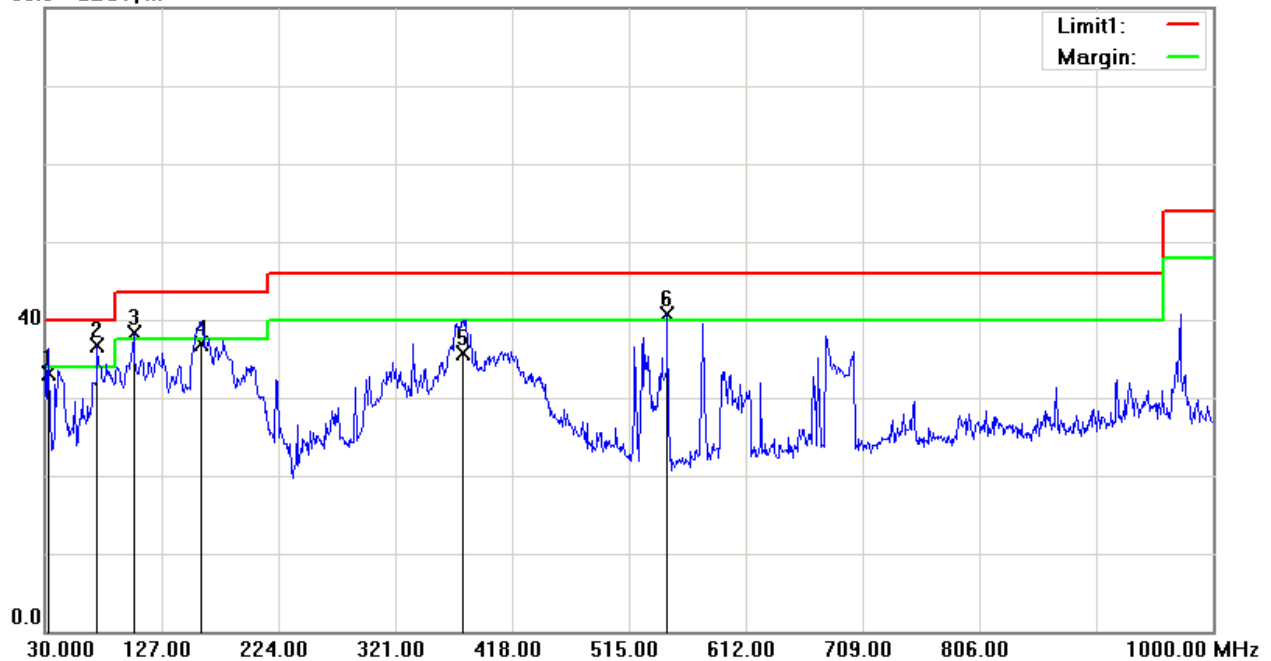

| Frequency (MHz) | Receiver Reading (dBuV/m) | Detector (PK/QP/Ave) | Correction Factor (dB) | Cord. Amp. (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------------|----------------------|------------------------|---------------------|----------------|-------------|
| 32.9100         | 34.11                     | QP                   | -0.91                  | 33.20               | 40.00          | 6.80        |
| 73.6500         | 48.82                     | QP                   | -12.19                 | 36.63               | 40.00          | 3.37*       |
| 103.7200        | 47.43                     | QP                   | -9.11                  | 38.32               | 43.50          | 5.18        |
| 159.9800        | 44.59                     | QP                   | -7.69                  | 36.90               | 43.50          | 6.60        |
| 377.2600        | 40.30                     | QP                   | -4.50                  | 35.80               | 46.00          | 10.20       |
| 547.0100        | 42.42                     | QP                   | -1.80                  | 40.62               | 46.00          | 5.38*       |


**Above 1G:**

Note: For above 1GHz, chose HNC050200X for test because the emissions not be effect by adapter

Test mode: USB Downloading

Horizontal:


100.0 dBuV/m

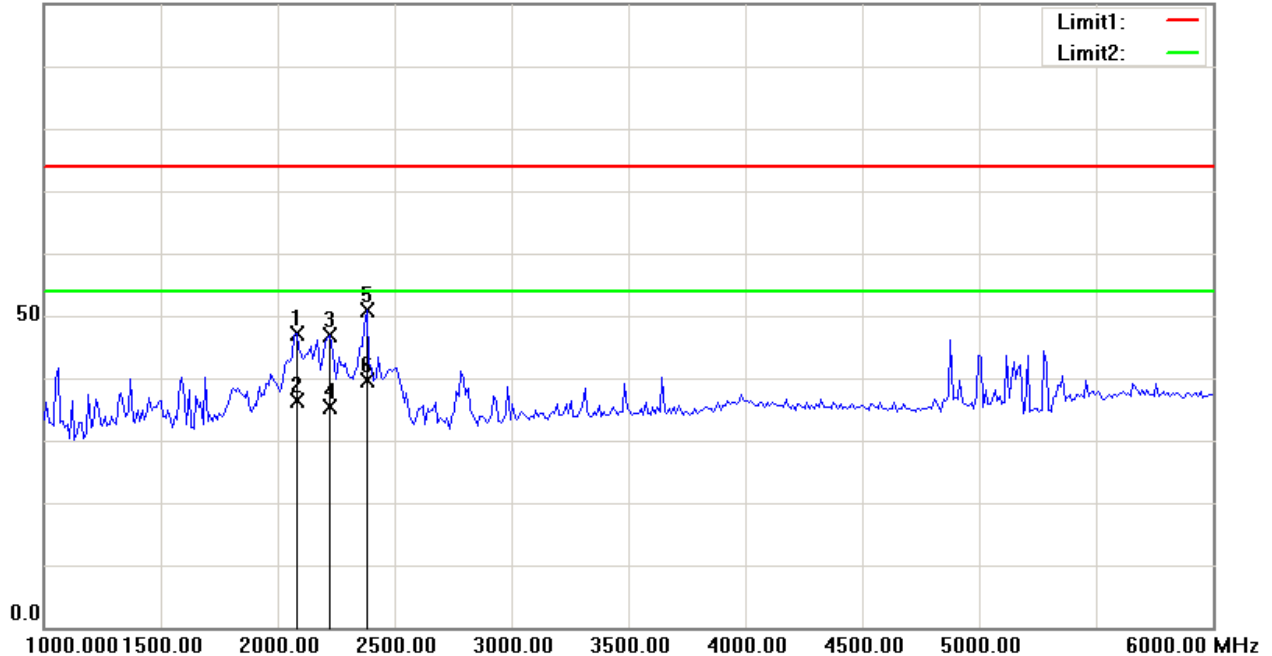

| Frequency (MHz) | Receiver Reading (dBuV/m) | Detector (PK/QP/Ave ) | Correction Factor (dB) | Cord. Amp. (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------------|-----------------------|------------------------|---------------------|----------------|-------------|
| 2082.164        | 49.49                     | peak                  | -2.37                  | 47.12               | 74.00          | 26.88       |
| 2082.164        | 38.84                     | AVG                   | -2.37                  | 36.47               | 54.00          | 17.53       |
| 2222.445        | 48.86                     | peak                  | -2.07                  | 46.79               | 74.00          | 27.21       |
| 2222.445        | 37.39                     | AVG                   | -2.07                  | 35.32               | 54.00          | 18.68       |
| 2382.765        | 52.54                     | peak                  | -1.54                  | 51.00               | 74.00          | 23.00       |
| 2382.765        | 41.10                     | AVG                   | -1.54                  | 39.56               | 54.00          | 14.44       |

**Vertical:**

100.0 dBuV/m

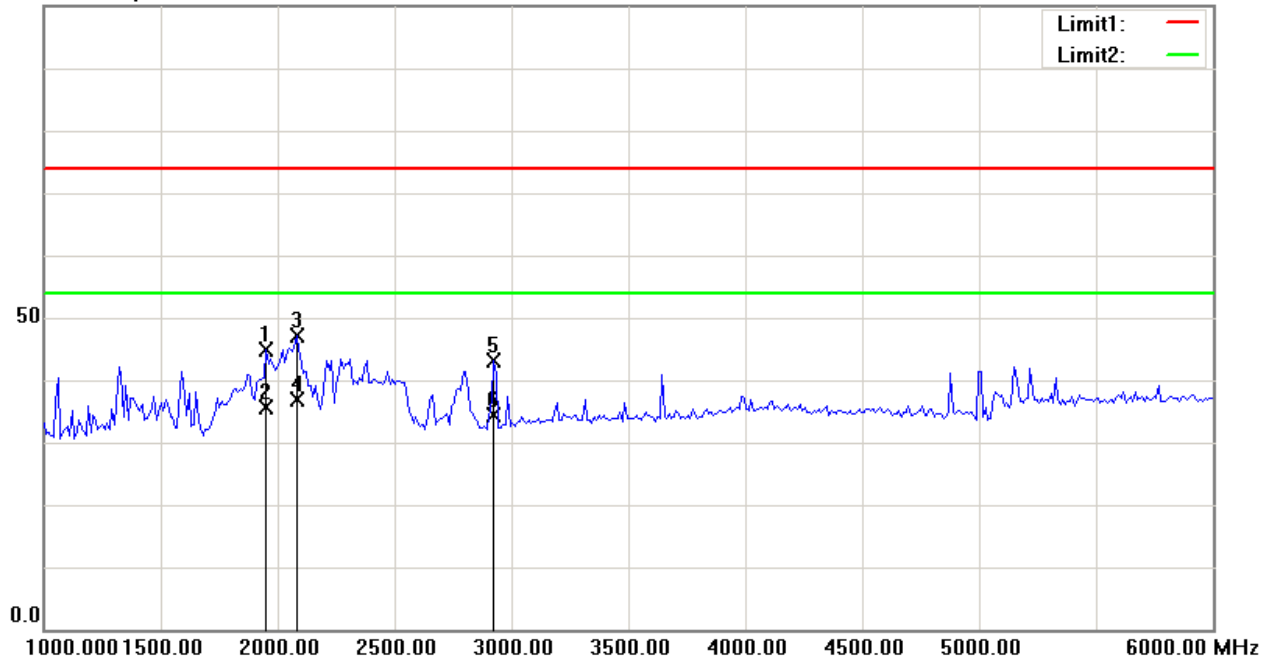


| Frequency (MHz) | Receiver Reading (dBuV/m) | Detector (PK/QP/Ave) | Correction Factor (dB) | Cord. Amp. (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------------|----------------------|------------------------|---------------------|----------------|-------------|
| 1951.904        | 47.39                     | peak                 | -2.60                  | 44.79               | 74.00          | 29.21       |
| 1951.904        | 38.27                     | AVG                  | -2.60                  | 35.67               | 54.00          | 18.33       |
| 2082.164        | 49.39                     | peak                 | -2.37                  | 47.02               | 74.00          | 26.98       |
| 2082.164        | 39.31                     | AVG                  | -2.37                  | 36.94               | 54.00          | 17.06       |
| 2923.848        | 43.68                     | peak                 | -0.43                  | 43.25               | 74.00          | 30.75       |
| 2923.848        | 34.71                     | AVG                  | -0.43                  | 34.28               | 54.00          | 19.72       |

Test mode: HDMI Playing

### Horizontal:


100.0 dBuV/m

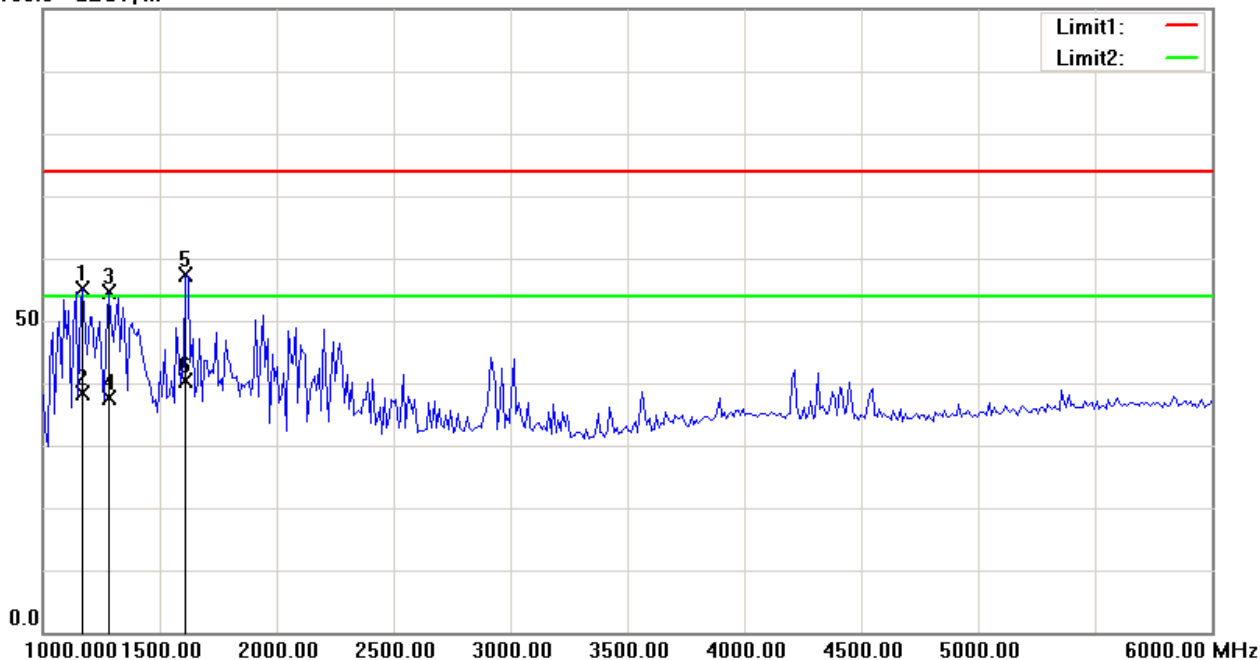

| Frequency (MHz) | Receiver Reading (dBuV/m) | Detector (PK/QP/Ave ) | Correction Factor (dB) | Cord. Amp. (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------------|-----------------------|------------------------|---------------------|----------------|-------------|
| 1170.341        | 59.53                     | peak                  | -4.50                  | 55.03               | 74.00          | 18.97       |
| 1170.341        | 42.77                     | AVG                   | -4.50                  | 38.27               | 54.00          | 15.73       |
| 1280.561        | 58.91                     | peak                  | -4.18                  | 54.73               | 74.00          | 19.27       |
| 1280.561        | 41.76                     | AVG                   | -4.18                  | 37.58               | 54.00          | 16.42       |
| 1611.222        | 60.51                     | peak                  | -3.09                  | 57.42               | 74.00          | 16.58       |
| 1611.222        | 43.42                     | AVG                   | -3.09                  | 40.33               | 54.00          | 13.67       |

**Vertical:**

100.0 dBuV/m

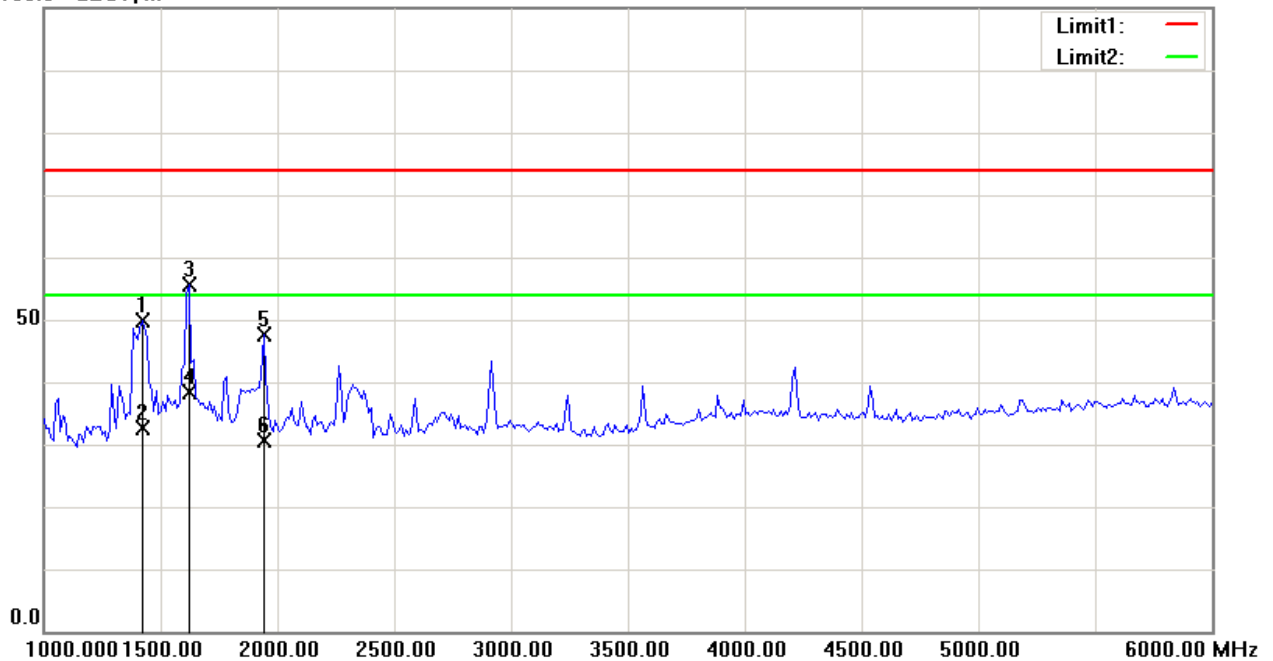

| Frequency (MHz) | Receiver Reading (dBuV/m) | Detector (PK/QP/Ave ) | Correction Factor (dB) | Cord. Amp. (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------------|-----------------------|------------------------|---------------------|----------------|-------------|
| 1420.842        | 53.68                     | peak                  | -3.72                  | 49.96               | 74.00          | 24.04       |
| 1420.842        | 36.39                     | AVG                   | -3.72                  | 32.67               | 54.00          | 21.33       |
| 1621.243        | 58.63                     | peak                  | -3.07                  | 55.56               | 74.00          | 18.44       |
| 1621.243        | 41.53                     | AVG                   | -3.07                  | 38.46               | 54.00          | 15.54       |
| 1941.884        | 50.15                     | peak                  | -2.62                  | 47.53               | 74.00          | 26.47       |
| 1941.884        | 33.34                     | AVG                   | -2.62                  | 30.72               | 54.00          | 23.28       |

\*\*\*\*\* END OF REPORT \*\*\*\*\*