



Specific Absorption Rate (SAR) Test Report
for
E-TEN Information Systems Co., Ltd.
on the
WCDMA Quad-band/Mobile Phone with GPRS,WiFi,GPS,Bluetooth

Report No. : FA761327-1-2-01
Trade Name : glofiish
Model Name : X800/X800+
FCC ID : SPUX800
Date of Testing : Jul. 5, 6, 10 and 11, 2007
Date of Report : Jul. 18, 2007
Date of Review : Jul. 18, 2007

- The test results refer exclusively to the presented test model/sample only.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- Report Version: Rev.01.

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.



Table of Contents

1. Statement of Compliance	1
2. Administration Data	2
2.1 Testing Laboratory	2
2.2 Detail of Applicant	2
2.3 Detail of Manufacturer	2
2.4 Application Detail	2
3. General Information	3
3.1 Description of Device Under Test (DUT)	3
3.2 Applied Standards:	4
3.3 Device Category and SAR Limits	4
3.4 Test Conditions:	4
3.4.1 Ambient Condition	4
3.4.2 Test Configuration	5
4. Specific Absorption Rate (SAR)	6
4.1 Introduction	6
4.2 SAR Definition	6
5. SAR Measurement Setup	7
5.1 DASY4 E-Field Probe System	8
5.1.1 ET3DV6 E-Field Probe Specification	9
5.1.2 ET3DV6 E-Field Probe Calibration	9
5.2 DATA Acquisition Electronics (DAE)	10
5.3 Robot	11
5.4 Measurement Server	11
5.5 SAM Twin Phantom	11
5.6 Device Holder for SAM Twin Phantom	13
5.7 Data Storage and Evaluation	14
5.7.1 Data Storage	14
5.7.2 Data Evaluation	14
5.8 Test Equipment List	17
6. Tissue Simulating Liquids	18
7. Uncertainty Assessment	20
8. SAR Measurement Evaluation	22
8.1 Purpose of System Performance check	22
8.2 System Setup	22
8.3 Validation Results	24
9. Description for DUT Testing Position	25
10. Measurement Procedures	27
10.1 Spatial Peak SAR Evaluation	27
10.2 Scan Procedures	28
10.3 SAR Averaged Methods	28
11. SAR Test Results	29
11.1 Right Cheek	29
11.2 Right Tilted	29
11.3 Left Cheek	30
11.4 Left Tilted	30
11.5 Keypad Up with 1.5cm Gap	31
11.6 Keypad Down with 1.5cm Gap	32
12. References	34
Appendix A - System Performance Check Data	
Appendix B - SAR Measurement Data	
Appendix C - Calibration Data	
Appendix D - WCDMA Test Mode	
Appendix E - Product Photo	
Appendix F - Test Setup Photo	



1. Statement of Compliance

The Specific Absorption Rate (SAR) maximum results found during testing for the **E-TEN Information Systems Co., Ltd. WCDMA Quad-band/Mobile Phone with GPRS,WiFi,GPS,Bluetooth glofiish X800/X800+** are as follows (with expanded uncertainty 20.6%):

	GSM850 (W/kg)	PCS1900 (W/Kg)	WCDMA Band V (W/Kg)	WCDMA Band II (W/kg)	802.11b/g (W/Kg)
Head	0.626	0.989	0.701	1.39	0.014
Body	1.45	1.04	0.892	0.685	0.011

The co-location of GSM/GPRS/EDGE/WCDMA and Bluetooth and co-location of WLAN and Bluetooth were also checked. They are in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1999 and had been tested in accordance with the measurement methods and procedures specified in OET Bulletin 65 Supplement C (Edition 01-01).

Approved by

Roy Wu
Manager



2. Administration Data

2.1 Testing Laboratory

Company Name : Sporton International Inc.
Department : Antenna Design/SAR
Address : No.52, Hwa-Ya 1st RD., Hwa Ya Technology Park, Kwei-Shan Hsiang, TaoYuan
Hsien, Taiwan, R.O.C.
Telephone Number : 886-3-327-3456
Fax Number : 886-3-328-4978

2.2 Detail of Applicant

Company Name : E-TEN Information Systems Co., Ltd.
Address : 9F, No. 256, Yangguang Street, Neihu Chiu, Taipei, Taiwan 114, R.O.C.
Telephone Number : 886-7721-0000
Fax Number : 886-7721-0123

2.3 Detail of Manufacturer

Company Name : E-TEN Information Systems Co., Ltd.
Address : 9F, No. 256, Yangguang Street, Neihu Chiu, Taipei, Taiwan 114, R.O.C.

2.4 Application Detail

Date of reception of application: Jun. 13, 2007
Start of test : Jul. 05, 2007
End of test : Jul. 11, 2007



3. General Information

3.1 Description of Device Under Test (DUT)

DUT Type :	WCDMA Quad-band/Mobile Phone with GPRS,WiFi,GPS,Bluetooth		
Trade Name :	glofish		
Model Name :	X800/X800+		
FCC ID :	SPUX800		
Tx Frequency :	GSM850 / WCDMA Band 5 : 824 ~ 849 MHz PCS1900 / WCDMA Band 2 : 1850 ~ 1910 MHz WLAN / Bluetooth : 2400 ~ 2483.5 MHz		
Rx Frequency :	GSM850 / WCDMA Band 5 : 869 ~ 894 MHz PCS1900 / WCDMA Band 2 : 1930 ~ 1990 MHz WLAN / Bluetooth : 2400 ~ 2483.5 MHz		
Number of Channels :	Bluetooth : 79 WLAN : 11		
Carrier Frequency of Each Channel :	Bluetooth : $2402+n*1$ MHz; $n=0\sim78$ WLAN : $2412+(n-1)*5$ MHz; $n=1\sim11$		
HW Version :	1.0V		
SW Version :	020		
Type of Modulation :	GSM / GPRS : GMSK EDGE : 8PSK Bluetooth : GFSK WLAN : DSSS / OFDM WCDMA : QPSK		
Maximum Output Power to Antenna :	GSM850 : 32.15 dBm (GSM) ; 31.98 dBm (GPRS10) ; 27.10 dBm (EDGE10) PCS1900 : 30.21 dBm (GSM) ; 30.18 dBm (GPRS10) ; 26.40 dBm (EDGE10) Bluetooth : 3.14 dBm ; 3.51 dBm (EDR 2Mbps) ; 3.27 dBm (EDR 3Mbps) WCDMA : 24.96 dBm (RMC12.2K) ; 24.95 dBm (RMC64K) ; 24.96 dBm (RMC144K) Band 5 ; 24.98 dBm (RMC384K) ; 23.78 dBm (RMC12.2K+ HSDPA) WCDMA : 23.26 dBm (RMC12.2K) ; 23.24 dBm (RMC64K) ; 23.26 dBm (RMC144K) Band 2 ; 23.34 dBm (RMC384K) ; 23.03 dBm (RMC12.2K+ HSDPA) WLAN : 14.81 dBm (802.11b) ; 15.01 dBm (802.11g)		
Antenna Type :	GSM850 / PCS1900: Fixed Internal Bluetooth: Chip Antenna WLAN: PIFA Antenna		
Antenna Gain :	Bluetooth : 0 dBi WLAN : -4 dBi		
DUT Stage :	Production Unit		
Power Rating :	DC 3.7V / 550mA		
Application Type :	Certification		
Accessory :	Battery : Welldone, E4ET011K1002 Earphone : Merry, DD0EN5EP004		



3.2 Applied Standards:

The Specific Absorption Rate (SAR) testing specification, method and procedure for this WCDMA Quad-band/Mobile Phone with GPRS,WiFi,GPS,Bluetooth is in accordance with the following standards:

47 CFR Part 2 (2.1093),
IEEE C95.1-1999,
IEEE C95.3-2002,
IEEE P1528-2003, and
OET Bulletin 65 Supplement C (Edition 01-01)

3.3 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user.

Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

3.4 Test Conditions:

3.4.1 Ambient Condition

Ambient Temperature (°C)	20-24					
Humidity (%)	<60 %					
Item	HSL_850 2007/7/5	HSL_1900 2007/7/5	HSL_1900 2007/7/6	MSL_1900 2007/7/6	HSL_2450 2007/7/10	MSL_2450 2007/7/10
Tissue simulating liquid temperature (°C)	21.6	21.5	21.4	21.3	21.7	21.5
Item	HSL_1900 2007/7/11	MSL_850 2007/7/11				
Tissue simulating liquid temperature (°C)	21.4	21.4				



3.4.2 Test Configuration

The device was controlled by using a base station emulator R&S CMU200. Communication between the device and the emulator was established by air link. The distance between the DUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of DUT.

Measurements were performed on the lowest, middle, and highest channel for each testing position for head SAR testing. Measurements were performed only on the middle channel if the SAR is below 3 dB of limit for SAR testing.

The DUT was set from the emulator to radiate maximum output power during all testings.

The data rates for WLAN SAR testing are 11Mbps for 802.11b and 54Mbps for 802.11g. Engineering testing software installed on the EUT can provide continuous transmitting RF signal. This RF signal utilized in SAR measurement has almost 100% duty cycle and its crest factor is 1. The measurements were performed on the lowest, middle, and highest channel, i.e. channel 1, channel 6, and channel 11 for each testing position.

In addition, EUT is in GSM, GPRS/EDGE or WCDMA link mode. In GSM link mode, its crest factor is 8.3. In GPRS/EDGE link mode, its crest factor is 4, because EUT is GPRS/EDGE class 10 device. In WCDMA link mode, its crest factor is 1.

4. Specific Absorption Rate (SAR)

4.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

4.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density. ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \frac{\delta T}{\delta t}$$

, where C is the specific heat capacity, δT is the temperature rise and δt the exposure duration,

or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

, where σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the rms electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

5. SAR Measurement Setup

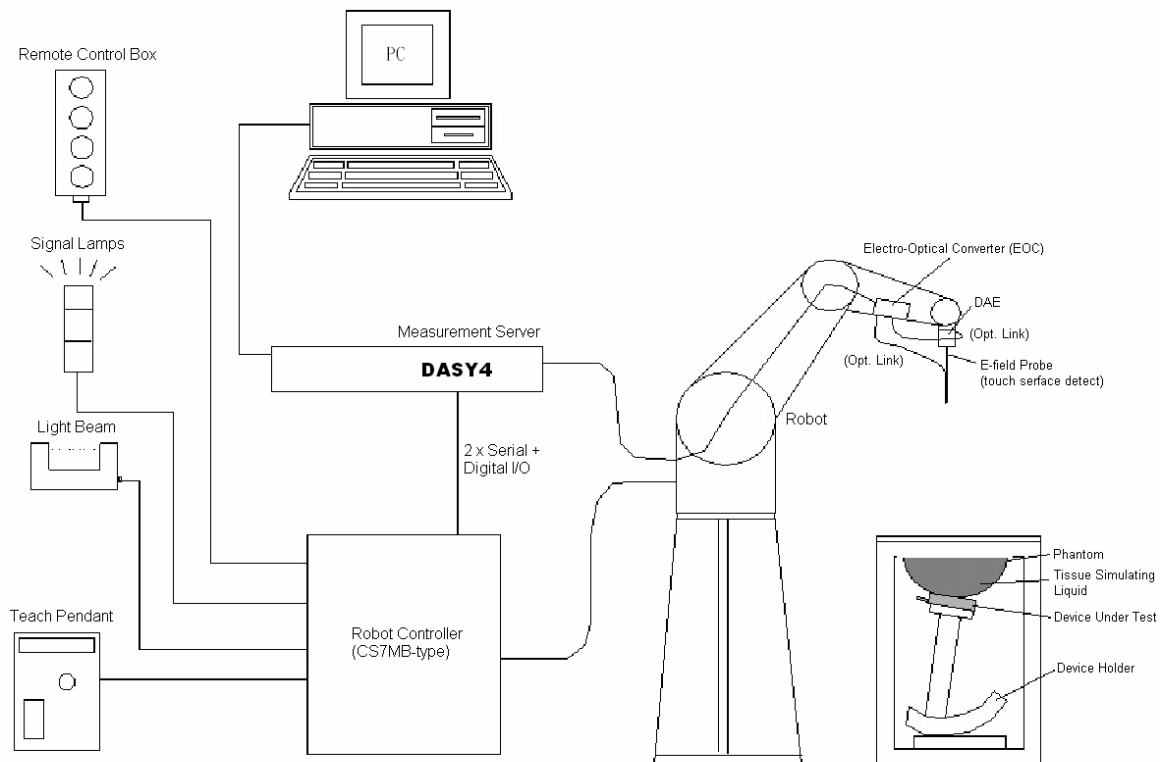


Fig. 5.1 DASY4 system



The DASY4 system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (ECO) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY4 software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Some of the components are described in details in the following sub-sections.

5.1 DASY4 E-Field Probe System

The SAR measurement is conducted with the dosimetric probe ET3DV6 (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

5.1.1 ET3DV6 E-Field Probe Specification

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents)
Calibration	Simulating tissue at frequencies of 900MHz, 1.8GHz and 2.45GHz for brain and muscle (accuracy $\pm 8\%$)
Frequency	10 MHz to > 3 GHz
Directivity	± 0.2 dB in brain tissue (rotation around probe axis) ± 0.4 dB in brain tissue (rotation perpendicular to probe axis)
Dynamic Range	5 μ W/g to > 100mW/g; Linearity: ± 0.2 dB
Surface Detection	± 0.2 mm repeatability in air and clear liquids on reflecting surface
Dimensions	Overall length: 330mm Tip length: 16mm Body diameter: 12mm Tip diameter: 6.8mm Distance from probe tip to dipole centers: 2.7mm
Application	General dosimetry up to 3GHz Compliance tests for mobile phones and Wireless LAN Fast automatic scanning in arbitrary phantoms



Fig. 5.2 Probe setup on robot

5.1.2 ET3DV6 E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data are as below:

➤ **ET3DV6 sn1788**

Sensitivity	X axis : 1.73 μ V		Y axis : 1.67 μ V	Z axis : 1.70 μ V
Diode compression point	X axis : 95 mV		Y axis : 101 mV	Z axis : 93 mV
Conversion factor (Head / Body)	Frequency (MHz)	X axis	Y axis	Z axis
	800~1000	6.60 / 6.33	6.60 / 6.33	6.60 / 6.33
	1710~1910	5.30 / 4.67	5.30 / 4.67	5.30 / 4.67
	2350~2550	4.66 / 4.11	4.66 / 4.11	4.66 / 4.11
Boundary effect (Head / Body)	Frequency (MHz)	Alpha	Depth	
	800~1000	0.49 / 0.45	1.94 / 2.12	
	1710~1910	0.48 / 0.59	2.74 / 2.89	
	2350~2550	0.68 / 0.60	1.96 / 1.70	

NOTE:

- The probe parameters have been calibrated by the SPEAG.

5.2 DATA Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of the DAE is 200M Ohm; the inputs are symmetrical and floating. Common mode rejection is above 80dB.



5.3 **Robot**

The DASY4 system uses the high precision robots RX90BL type out of the newer series from Stäubli SA (France). For the 6-axis controller DASY5 system, the CS7MB robot controller version from Stäubli is used. The RX robot series have many features that are important for our application:

- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- 6-axis controller

5.4 **Measurement Server**

The DASY4 measurement server is based on a PC/104 CPU board with
166 MHz CPU
32 MB chipset and
64 MB RAM.

Communication with
the DAE4 electronic box
the 16-bit AD-converter system for optical detection and digital I/O interface.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.

5.5 **SAM Twin Phantom**

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:

- Left head
- Right head
- Flat phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.

A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters.

On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

The phantom can be used with the following tissue simulating liquids:

*Water-sugar based liquid

*Glycol based liquids

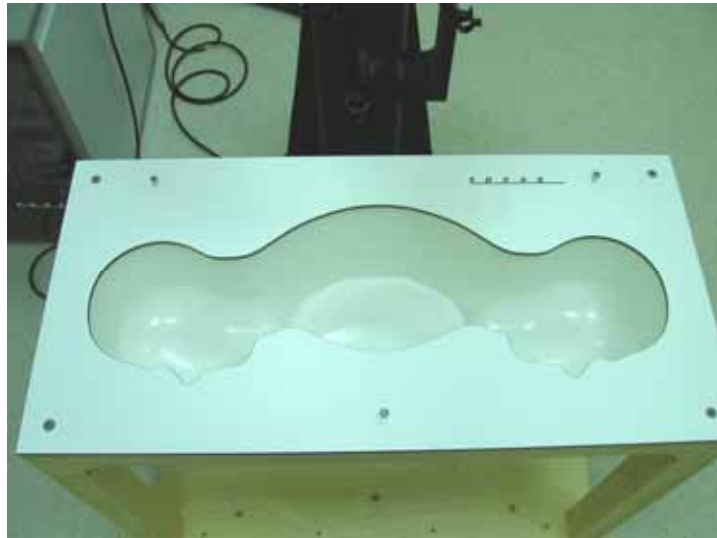


Fig. 5.3 Top view of twin phantom



Fig. 5.4 Bottom view of twin phantom

5.6 Device Holder for SAM Twin Phantom

The SAR in the Phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source in 5 mm distance, a positioning uncertainty of $\pm 0.5\text{mm}$ would produce a SAR uncertainty of $\pm 20\%$. An accurate device position is therefore crucial for accurate and repeatable measurement. The position in which the devices must be measured, are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (EPR). Thus the device needs no repositioning when changing the angles.

The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon_r=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Fig. 5.5 Device Holder



5.7 Data Storage and Evaluation

5.7.1 Data Storage

The DASY4 software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension .DA4. The postprocessing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a loseless media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

5.7.2 Data Evaluation

The DASY4 postprocessing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

Probe parameters :	- Sensitivity	$\text{Norm}_i, a_{i0}, a_{i1}, a_{i2}$
	- Conversion factor	ConvF_i
	- Diode compression point	dcp_i
Device parameters :	- Frequency	f
	- Crest factor	cf
Media parameters :	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can

be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i ($i = x, y, z$)
 U_i = input signal of channel i ($i = x, y, z$)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated :

$$\text{E-field probes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \text{ConvF}}}$$

$$\text{H-field probes : } H_i = \sqrt{V_i \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}}$$

with V_i = compensated signal of channel i ($i = x, y, z$)
 Norm_i = sensor sensitivity of channel i ($i = x, y, z$)
 $\mu \text{ V}/(\text{V}/\text{m})^2$ for E-field Probes
 ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm^3



* Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{3770} \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²
 E_{tot} = total electric field strength in V/m
 H_{tot} = total magnetic field strength in A/m

**5.8 Test Equipment List**

Manufacture	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	Dosimetric E-Filed Probe	ET3DV6	1788	Sep. 19, 2006	Sep. 18, 2007
SPEAG	835MHz System Validation Kit	D835V2	499	Mar. 15, 2006	Mar. 14, 2008
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Mar. 21, 2006	Mar. 20, 2008
SPEAG	2450MHz System Validation Kit	D2450V2	735	Apr. 24, 2007	Apr. 23, 2009
SPEAG	Data Acquisition Electronics	DAE3	577	Nov. 21, 2006	Nov. 20, 2007
SPEAG	Device Holder	N/A	N/A	NCR	NCR
SPEAG	Phantom	QD 000 P40 C	TP-1150	NCR	NCR
SPEAG	Robot	Staubli RX90BL	F03/5W15A1/A/01	NCR	NCR
SPEAG	Software	DASY4 V4.7 Build 53	N/A	NCR	NCR
SPEAG	Software	SEMCAD V1.8 Build 172	N/A	NCR	NCR
SPEAG	Measurement Server	SE UMS 001 BA	1021	NCR	NCR
Agilent	ENA Series Network Analyzer	E5071C	MY46100746	Feb. 21, 2007	Feb. 20, 2008
Agilent	Dielectric Probe Kit	85070D	US01440205	NCR	NCR
Agilent	Dual Directional Coupler	778D	50422	NCR	NCR
Agilent	Power Amplifier	8449B	3008A01917	NCR	NCR
Agilent	Power Meter	E4416A	GB41292344	Feb. 08, 2007	Feb. 07, 2008
Agilent	Power Sensor	E9327A	US40441548	Feb. 08, 2007	Feb. 07, 2008
Agilent	Signal Generator	E8247C	MY43320596	Mar. 01, 2006	Feb. 28, 2008
Agilent	Wireless Communication Test Set	E5515C	GB46311322	Dec. 22, 2006	Dec. 21, 2008

Table 5.1 Test Equipment List

6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY4, the phantom must be filled with around 25 liters of homogeneous tissue simulating liquid. The liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is (head SAR) or from the flat phantom to the liquid top surface (body SAR) is 15.2cm.

The following ingredients for tissue simulating liquid are used:

- **Water:** deionized water (pure H₂O), resistivity 16M Ω - as basis for the liquid
- **Sugar:** refined sugar in crystals, as available in food shops – to reduce relative permittivity
- **Salt:** pure NaCl – to increase conductivity
- **Cellulose:** Hydroxyethyl-cellulose, medium viscosity (75-125 mPa.s, 2% in water, 20°C), CAS#54290-to increase viscosity and to keep sugar in solution.
- **Preservative:** Preventol D-7 Bayer AG, D-51368 Leverkusen, CAS#55965-84-9- to prevent the spread of bacteria and molds.
- **DGMBE:** Deithlenglycol-monobuthyl ether (DGMBE), Fluka Chemie GmbH, CAS#112-34-5 – to reduce relative permittivity.

Table 6.1 gives the recipes for one liter of head and body tissue simulating liquid for frequency band 850 MHz, 1900 MHz and 2450 MHz.

Ingredient	HSL-850	MSL-850	HSL-1900	MSL-1900	HSL_2450	MSL-2450
Water	532.98 g	631.68 g	552.42 g	716.56 g	450.0 ml	698.3 ml
Cellulose	0 g	0 g	0 g	0 g	0 g	0 g
Salt	18.3 g	11.72 g	3.06 g	4.0 g	0 g	0 g
Preventol D-7	2.4 g	1.2 g	0 g	0 g	0 g	0 g
Sugar	766.0 g	600.0 g	0 g	0 g	0 g	0 g
DGMBE	0 g	0 g	444.52 g	300.67 g	550.0 ml	301.7 ml
Total amount	1 liter (1.3 kg)	1 liter	1 liter (1.0 kg)	1 liter (1.0 kg)	1 liter (1.0 kg)	1 liter (1.0 kg)
Dielectric Parameters at 22°	f = 835 MHz $\epsilon_r = 41.5 \pm 5\%$, $\sigma = 0.90 \pm 5\%$ S/m	f = 835 MHz $\epsilon_r = 55.2 \pm 5\%$, $\sigma = 0.97 \pm 5\%$ S/m	f = 1900 MHz $\epsilon_r = 40.0 \pm 5\%$, $\sigma = 1.4 \pm 5\%$ S/m	f = 1900 MHz $\epsilon_r = 53.3 \pm 5\%$, $\sigma = 1.52 \pm 5\%$ S/m	f = 2450MHz $\epsilon_r = 39.2 \pm 5\%$, $\sigma = 1.8 \pm 5\%$ S/m	f = 2450MHz $\epsilon_r = 52.7 \pm 5\%$, $\sigma = 1.95 \pm 5\%$ S/m

Table 6.1

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.

Table 6.2 shows the measuring results for head and muscle simulating liquid.

	Bands	Frequency(MHz)	Permittivity (ϵ_r)	Conductivity (σ)	Measurement Date
Head	GSM850 (824 ~ 849 MHz)	824.2	40.3	0.904	Jul. 05, 2007
		836.4	40.3	0.904	
		848.8	40.2	0.917	
Body	GSM850 (824 ~ 849 MHz)	824.2	54.4	0.957	Jul. 11, 2007
		836.6	54.3	0.969	
		848.8	54.1	0.983	
Head	PCS1900 (1850 ~ 1910 MHz)	1850.2	39.4	1.34	Jul. 05, 2007
		1880.0	39.3	1.37	
		1909.8	39.2	1.40	
Body	PCS1900 (1850 ~ 1910 MHz)	1850.2	53.7	1.45	Jul. 11, 2007
		1880.0	53.7	1.48	
		1909.8	53.6	1.51	
Head	WCDMA Band V (824 ~ 849 MHz)	826.4	40.5	0.895	Jul. 05, 2007
		836.4	40.3	0.904	
		846.6	40.2	0.915	
Body	WCDMA Band V (824 ~ 849 MHz)	826.4	54.4	0.959	Jul. 11, 2007
		836.4	54.3	0.969	
		846.6	54.2	0.980	
Head	WCDMA Band II (1850 ~ 1910 MHz)	1852.4	39.3	1.38	Jul. 06, 2007
		1880.0	39.2	1.41	
		1907.6	39.2	1.43	
Body	WCDMA Band II (1850 ~ 1910 MHz)	1852.4	52.7	1.45	Jul. 06, 2007
		1880.0	52.6	1.48	
		1907.6	52.6	1.51	
Head	WLAN (2450MHz)	2412	38.6	1.73	Jul. 10, 2007
		2437	38.2	1.74	
		2462	38.0	1.78	
Body	WLAN (2450MHz)	2412	51.1	1.90	Jul. 10, 2007
		2437	51.1	1.92	
		2462	51.0	1.94	

Table 6.2

The measuring data are consistent with $\epsilon_r = 41.5 \pm 5\%$ and $\sigma = 0.9 \pm 5\%$ for head GSM 850 band, $\epsilon_r = 55.2 \pm 5\%$ and $\sigma = 0.97 \pm 5\%$ for body GSM 850 band, $\epsilon_r = 40.0 \pm 5\%$, $\sigma = 1.4 \pm 5\%$ for head PCS 1900 band, $\epsilon_r = 53.3 \pm 5\%$, $\sigma = 1.52 \pm 5\%$ for body PCS 1900 band, $\epsilon_r = 39.2 \pm 5\%$, $\sigma = 1.80 \pm 5\%$ for head 2450 band, and $\epsilon_r = 52.7 \pm 5\%$, $\sigma = 1.95 \pm 5\%$ for body 2450 band.



7. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 7.1

Uncertainty Distributions	Normal	Rectangular	Triangular	U-shape
Multiplying factor ^(a)	1/ k (b)	1/ $\sqrt{3}$	1/ $\sqrt{6}$	1/ $\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) K is the coverage factor

Table 7.1

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY4 uncertainty Budget is showed in Table 7.2.



Error Description	Uncertainty Value $\pm$ %	Probability Distribution	Divisor	C_{1g}	Standard Unc. (1-g)	v_i or V_{eff}
Measurement System						
Probe Calibration	± 4.8	Normal	1	1	± 4.8	∞
Axial Isotropy	± 4.7	Rectangular	$\sqrt{3}$	$(1-C_p)^{1/2}$	± 1.9	∞
Hemispherical Isotropy	± 9.6	Rectangular	$\sqrt{3}$	$(C_p)^{1/2}$	± 3.9	∞
Boundary Effect	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.6	∞
Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7	∞
System Detection Limit	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.6	∞
Readout Electronics	± 1.0	Rectangular	1	1	± 1.0	∞
Response Time	± 0.8	Normal	$\sqrt{3}$	1	± 0.5	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	± 1.5	∞
RF Ambient Conditions	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7	∞
Probe Positioner Mech. Tolerance	± 0.4	Rectangular	$\sqrt{3}$	1	± 0.2	∞
Probe Positioning with respect to Phantom Shell	± 2.9	Rectangular	$\sqrt{3}$	1	± 1.7	∞
Extrapolation and Interpolation Algorithms for Max. SAR Evaluation	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.6	∞
Test sample Related						
Test sample Positioning	± 2.9	Normal	1	1	± 2.9	145
Device Holder Uncertainty	± 3.6	Normal	1	1	± 3.6	5
Output Power Variation-SAR drift measurement	± 2.5	Rectangular	$\sqrt{3}$	1	± 1.4	∞
Phantom and Tissue parameters						
Phantom uncertainty(Including shape and thickness tolerances)	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3	∞
Liquid Conductivity Target tolerance	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 1.8	∞
Liquid Conductivity measurement uncertainty	± 2.5	Normal	1	0.64	± 1.6	∞
Liquid Permittivity Target tolerance	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 1.7	∞
Liquid Permittivity measurement uncertainty	± 2.0	Normal	1	0.6	± 1.2	∞
Combined standard uncertainty					± 10.3	330
Coverage Factor for 95 %		K=2				
Expanded uncertainty (Coverage factor = 2)					± 20.6	

Table 7.2 Uncertainty Budget of DASY

8. SAR Measurement Evaluation

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

8.1 Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

8.2 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator at frequency 835 MHz and 1900 MHz and 2450 MHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

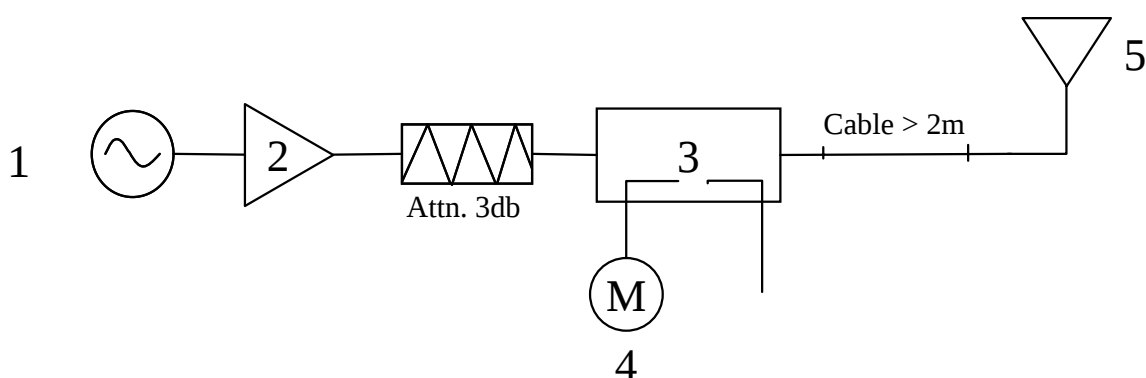


Fig. 8.1

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. 835 MHz or 1900 MHz or 2450 MHz Dipole

The output power on dipole port must be calibrated to 20dBm (100mW) before dipole is connected.



Fig 8.2 Dipole Setup

8.3 Validation Results

Comparing to the original SAR value provided by Speag, the validation data should be within its specification of 10 %. Table 8.1 shows the target SAR and measured SAR after normalized to 1W input power.

		Target (W/kg)	Measurement data (W/kg)	Variation	Measurement Date
GSM850 Band (835MHz) for head	SAR (1g)	9.24	9.82	6.3 %	Jul 05, 2007
	SAR (10g)	6.07	6.43	5.9 %	
GSM850 Band (835MHz) for body	SAR (1g)	9.91	9.56	-3.5 %	Jul. 11, 2007
	SAR (10g)	6.55	6.29	-4.0 %	
PCS Band (1900MHz) for head	SAR (1g)	38.4	39.3	2.3 %	Jul. 05, 2007
	SAR (10g)	20.5	20.3	-1.0 %	
PCS Band (1900MHz) for body	SAR (1g)	41.1	37.5	-8.8 %	Jul. 11, 2007
	SAR (10g)	21.8	20.1	-7.8 %	
WCDMA Band V (850MHz) for head	SAR (1g)	9.24	9.82	6.3 %	Jul. 05, 2007
	SAR (10g)	6.07	6.43	5.9 %	
WCDMA Band V (850MHz) for body	SAR (1g)	9.91	9.56	-3.5 %	Jul. 11, 2007
	SAR (10g)	6.55	6.29	-4.0 %	
WCDMA Band II (1900MHz) for head	SAR (1g)	38.4	37.9	-1.3 %	Jul. 06, 2007
	SAR (10g)	20.5	20.3	-1.0 %	
WCDMA Band II (1900MHz) for body	SAR (1g)	41.1	37.6	-8.5 %	Jul. 06, 2007
	SAR (10g)	21.8	20.2	-7.3 %	
WLAN (2450 MHz) for head	SAR (1g)	52.7	48.7	-7.6 %	Jul. 10, 2007
	SAR (10g)	24.5	23.3	-4.9 %	
WLAN (2450 MHz) for body	SAR (1g)	50.9	53.4	4.9 %	Jul. 10, 2007
	SAR (10g)	23.5	24.9	6.0 %	

Table 8.1

The table above indicates the system performance check can meet the variation criterion.



9. Description for DUT Testing Position

This DUT was tested in 6 different positions. They are left cheek, left tilted, right cheek, right tilted, body worn with keypad up and body worn with keypad down as illustrated below:

- 1) “Cheek Position”
 - i) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M, RE and LE) and align the center of the ear piece with the line RE-LE.
 - ii) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig. 9.1).
- 2) “Tilted Position”
 - i) To position the device in the “cheek” position described above.
 - ii) While maintaining the device the reference plane described above and pivoting against the ear, move it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig. 9.2).
- 3) “Body Worn”
 - i) To position the device parallel to the phantom surface.
 - ii) To adjust the phone parallel to the flat phantom.
 - iii) To adjust the distance between the EUT surface and the flat phantom to 1.5 cm.

Please refer to Appendix E for the test setup photo.

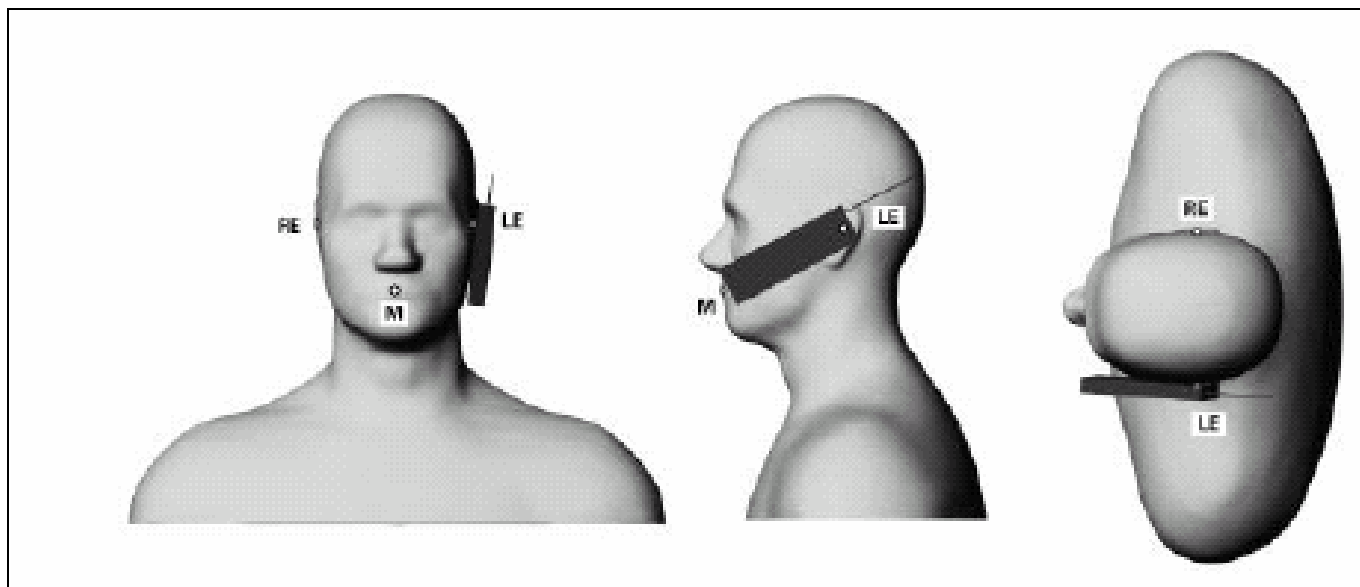


Fig. 9.1 Phone Position 1, "Cheek" or "Touch" Position. The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the plane for phone positioning, are indicated.

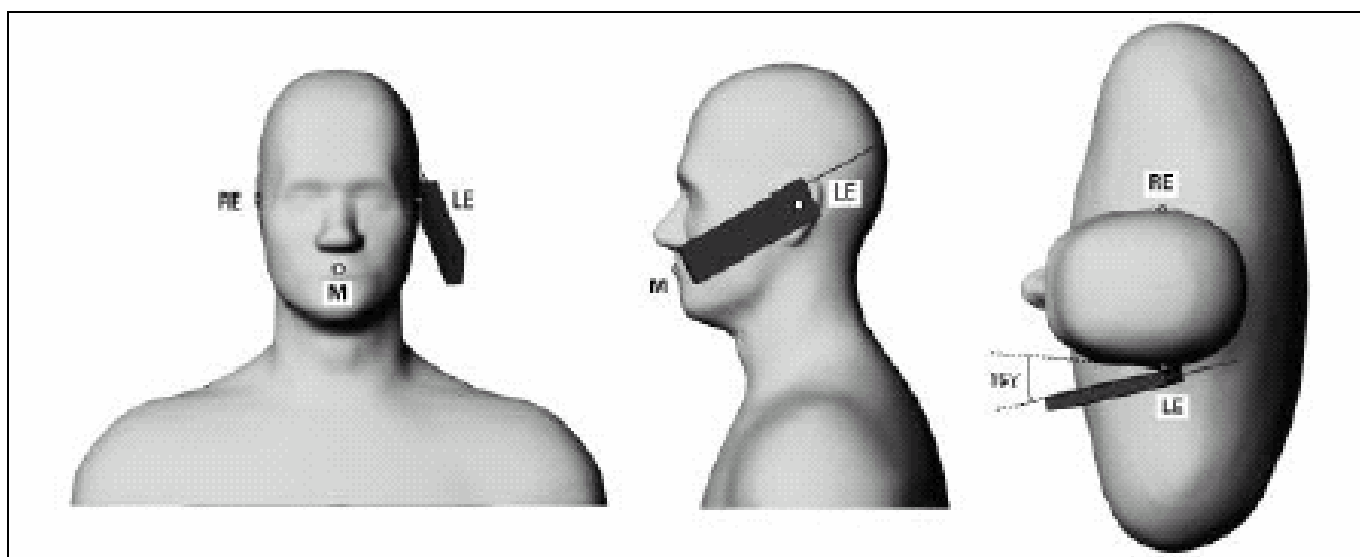


Fig. 9.2 Phone Position 2, "Tilted Position". The reference point for the right ear (RE), left ear (LE) and mouth (M), which define the plane for phone positioning, are indicated.



10. Measurement Procedures

The measurement procedures are as follows:

- Linking DUT with base station emulator CMU200 in middle channel
- Setting base station to allow DUT to radiate maximum output power
- Measuring output power through RF cable and power meter
- Placing the DUT in the positions described in the last section
- Setting scan area, grid size and other setting on the DASY4 software
- Taking data for the lowest, middle, and highest channel on each testing position

According to the IEEE P1528 draft standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Area scan
- Zoom scan
- Power reference measurement

10.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE1528-2003 standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY4 software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

Base on the Draft: SCC-34, SC-2, WG-2-Computational Dosimetry, IEEE P1528/D1.2 (Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques), a new algorithm has been implemented. The spatial-peak SAR can be computed over any required mass.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose , the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the postprocessing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:



- extraction of the measured data (grid and values) from the Zoom Scan
- calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- generation of a high-resolution mesh within the measured volume

- interpolation of all measured values from the measurement grid to the high-resolution grid
- extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- calculation of the averaged SAR within masses of 1g and 10g

10.2 Scan Procedures

First **Area Scan** is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an **Area Scan** is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, **Zoom Scan** is required. The **Zoom Scan** measures 5x5x7 points with step size 8, 8 and 5 mm. The **Zoom Scan** is performed around the highest E-field value to determine the averaged SAR-distribution over 1 g.

10.3 SAR Averaged Methods

In DASY4, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.



11. SAR Test Results

11.1 Right Cheek

Mode	Chan.	Freq (MHz)	Modulation Type	Conducted Power (dBm)	Power Drift (dB)	Measured 1g SAR (W/kg)	Limit (W/kg)	Results
GSM850	128	824.2 (Low)	GMSK	32.07	-	-	-	-
	189	836.4 (Mid)	GMSK	32.09	0.079	0.365	1.6	Pass
	251	848.8 (High)	GMSK	32.15	-	-	-	-
PCS1900	512	1850.2 (Low)	GMSK	29.75	-	-	-	-
	661	1880.0 (Mid)	GMSK	30.10	0.079	0.697	1.6	Pass
	810	1909.8 (High)	GMSK	30.21	-	-	-	-
WCDMA Band 5	4132	826.4 (Low)	QPSK	24.94	-0.12	0.394	1.6	Pass
	4182	836.4 (Mid)	QPSK	24.96	0.018	0.701	1.6	Pass
	4233	846.6 (High)	QPSK	24.36	0.032	0.589	1.6	Pass
WCDMA Band 5 with BT On	4182	836.4 (Mid)	QPSK	24.96	-0.021	0.624	1.6	Pass
WCDMA Band 2	9262	1852.4 (Low)	QPSK	23.17	0.018	1.23	1.6	Pass
	9400	1880.0 (Mid)	QPSK	23.26	-0.169	0.868	1.6	Pass
	9538	1907.6 (High)	QPSK	22.57	0.007	0.878	1.6	Pass
802.11b	1	2412(Low)	CCK	14.81	-	-	-	-
	6	2437(Mid)	CCK	14.26	-0.121	0.00863	1.6	Pass
	11	2462(High)	CCK	14.35	-	-	-	-
802.11g	1	2412(Low)	OFDM	15.01	-	-	-	-
	6	2437(Mid)	OFDM	14.31	-0.199	0.0000153	1.6	Pass
	11	2462(High)	OFDM	14.52	-	-	-	-

11.2 Right Tilted

Mode	Chan.	Freq (MHz)	Modulation Type	Conducted Power (dBm)	Power Drift (dB)	Measured 1g SAR (W/kg)	Limit (W/kg)	Results
GSM850	128	824.2 (Low)	GMSK	32.07	0.058	0.226	1.6	Pass
	189	836.4 (Mid)	GMSK	32.09	0.067	0.371	1.6	Pass
	251	848.8 (High)	GMSK	32.15	0.015	0.626	1.6	Pass
GSM850 with BT On	251	848.8 (High)	GMSK	32.15	-0.1	0.61	1.6	Pass
PCS1900	512	1850.2 (Low)	GMSK	29.75	-0.007	0.978	1.6	Pass
	661	1880.0 (Mid)	GMSK	30.10	-0.125	0.813	1.6	Pass
	810	1909.8 (High)	GMSK	30.21	-0.007	0.676	1.6	Pass
PCS1900 with BT On	512	1850.2 (Low)	GMSK	29.75	-0.099	0.989	1.6	Pass
WCDMA Band 5	4132	826.4 (Low)	QPSK	24.94	-	-	-	-
	4182	836.4 (Mid)	QPSK	24.96	-0.019	0.691	1.6	Pass
	4233	846.6 (High)	QPSK	24.36	-	-	-	-
WCDMA Band 2	9262	1852.4 (Low)	QPSK	23.17	-0.041	1.39	1.6	Pass
	9400	1880.0 (Mid)	QPSK	23.26	0.035	1.09	1.6	Pass
	9538	1907.6 (High)	QPSK	22.57	0.003	1.08	1.6	Pass
WCDMA Band 2 with BT On	9262	1852.4 (Low)	QPSK	23.17	-0.001	1.39	1.6	Pass
802.11b	1	2412(Low)	CCK	14.81	0.16	0.00769	1.6	Pass
	6	2437(Mid)	CCK	14.26	-0.189	0.00706	1.6	Pass
	11	2462(High)	CCK	14.35	-	-	-	-
802.11g	1	2412(Low)	OFDM	15.01	-	-	-	-
	6	2437(Mid)	OFDM	14.31	-	-	-	-
	11	2462(High)	OFDM	14.52	-	-	-	-



11.3 Left Cheek

Mode	Chan.	Freq (MHz)	Modulation Type	Conducted Power (dBm)	Power Drift (dB)	Measured 1g SAR (W/kg)	Limit (W/kg)	Results
GSM850	128	824.2 (Low)	GMSK	32.07	-	-	-	-
	189	836.4 (Mid)	GMSK	32.09	-0.029	0.326	1.6	Pass
	251	848.8 (High)	GMSK	32.15	-	-	-	-
PCS1900	512	1850.2 (Low)	GMSK	29.75	-	-	-	-
	661	1880.0 (Mid)	GMSK	30.10	-0.142	0.515	1.6	Pass
	810	1909.8 (High)	GMSK	30.21	-	-	-	-
WCDMA Band 5	4132	826.4 (Low)	QPSK	24.94	-	-	-	-
	4182	836.4 (Mid)	QPSK	24.96	-0.032	0.646	1.6	Pass
	4233	846.6 (High)	QPSK	24.36	-	-	-	-
WCDMA Band 2	9262	1852.4 (Low)	QPSK	23.17	-	-	-	-
	9400	1880.0 (Mid)	QPSK	23.26	-0.065	0.625	1.6	Pass
	9538	1907.6 (High)	QPSK	22.57	-	-	-	-
802.11b	1	2412(Low)	CCK	14.81	-	-	-	-
	6	2437(Mid)	CCK	14.26	0.133	0.01	1.6	Pass
	11	2462(High)	CCK	14.35	-	-	-	-
802.11g	1	2412(Low)	OFDM	15.01	-	-	-	-
	6	2437(Mid)	OFDM	14.31	-	-	-	-
	11	2462(High)	OFDM	14.52	-	-	-	-

11.4 Left Tilted

Mode	Chan.	Freq (MHz)	Modulation Type	Conducted Power (dBm)	Power Drift (dB)	Measured 1g SAR (W/kg)	Limit (W/kg)	Results
GSM850	128	824.2 (Low)	GMSK	32.07	-	-	-	-
	189	836.4 (Mid)	GMSK	32.09	-0.01	0.32	1.6	Pass
	251	848.8 (High)	GMSK	32.15	-	-	-	-
PCS1900	512	1850.2 (Low)	GMSK	29.75	-	-	-	-
	661	1880.0 (Mid)	GMSK	30.10	-0.173	0.773	1.6	Pass
	810	1909.8 (High)	GMSK	30.21	-	-	-	-
WCDMA Band 5	4132	826.4 (Low)	QPSK	24.94	-	-	-	-
	4182	836.4 (Mid)	QPSK	24.96	0.043	0.597	1.6	Pass
	4233	846.6 (High)	QPSK	24.36	-	-	-	-
WCDMA Band 2	9262	1852.4 (Low)	QPSK	23.17	0.077	1.25	1.6	Pass
	9400	1880.0 (Mid)	QPSK	23.26	-0.004	0.932	1.6	Pass
	9538	1907.6 (High)	QPSK	22.57	-0.186	0.932	1.6	Pass
802.11b	1	2412(Low)	CCK	14.81	-0.048	0.014	1.6	Pass
	6	2437(Mid)	CCK	14.26	-0.128	0.011	1.6	Pass
	11	2462(High)	CCK	14.35	-0.128	0.00647	1.6	Pass
802.11b with BT On	1	2412(Low)	CCK	14.81	-0.059	0.013	1.6	Pass
802.11g	1	2412(Low)	OFDM	15.01	-	-	-	-
	6	2437(Mid)	OFDM	14.31	-	-	-	-
	11	2462(High)	OFDM	14.52	-	-	-	-



11.5 Keypad Up with 1.5cm Gap

Mode	Chan.	Freq. (MHz)	Modulation Type	Conducted Power (dBm)	Power Drift (dB)	Measured 1g SAR (W/kg)	Limits (W/Kg)	Results
GSM850 (GPRS10)	128 (Low)	824.2	GMSK	31.91	-	-	-	-
	189 (Mid)	836.6	GMSK	31.92	0.005	0.314	1.6	Pass
	251 (High)	848.8	GMSK	31.98	-	-	-	-
GSM850 (EDGE10)	128 (Low)	824.2	8PKS	27.03	-	-	-	-
	189 (Mid)	836.6	8PKS	27.03	-	-	-	-
	251 (High)	848.8	8PKS	27.10	-	-	-	-
PCS1900 (GPRS10)	512 (Low)	1850.2	GMSK	29.74	-	-	-	-
	661 (Mid)	1880.0	GMSK	30.08	-0.182	0.473	1.6	Pass
	810 (High)	1909.8	GMSK	30.18	-	-	-	-
PCS1900 (EDGE10)	512 (Low)	1850.2	8PKS	25.92	-	-	-	-
	661 (Mid)	1880.0	8PKS	26.02	-	-	-	-
	810 (High)	1909.8	8PKS	26.40	-	-	-	-
WCDMA Band 5 (RMC 12.2K)	4132 (Low)	826.4	QPSK	24.94	-	-	-	-
	4182 (Mid)	836.4	QPSK	24.96	0.051	0.311	1.6	Pass
	4233 (High)	846.6	QPSK	24.36	-	-	-	-
WCDMA Band 5 (RMC 64K)	4132 (Low)	826.4	QPSK	24.94	-	-	-	-
	4182 (Mid)	836.4	QPSK	24.95	-	-	-	-
	4233 (High)	846.6	QPSK	24.37	-	-	-	-
WCDMA Band 5 (RMC 144K)	4132 (Low)	826.4	QPSK	24.96	-	-	-	-
	4182 (Mid)	836.4	QPSK	24.95	-	-	-	-
	4233 (High)	846.6	QPSK	24.39	-	-	-	-
WCDMA Band 5 (RMC 384K)	4132 (Low)	826.4	QPSK	24.98	-	-	-	-
	4182 (Mid)	836.4	QPSK	24.96	-	-	-	-
	4233 (High)	846.6	QPSK	24.40	-	-	-	-
WCDMA Band 5 (RMC 12.2K + HSDPA)	4132 (Low)	826.4	QPSK	23.78	-	-	-	-
	4182 (Mid)	836.4	QPSK	23.76	-	-	-	-
	4233 (High)	846.6	QPSK	23.20	-	-	-	-
WCDMA Band 2 (RMC 12.2K)	9262 (Low)	1852.4	QPSK	23.17	-	-	-	-
	9400 (Mid)	1880.0	QPSK	23.26	0.025	0.243	1.6	Pass
	9538 (High)	1907.6	QPSK	22.57	-	-	-	-
WCDMA Band 2 (RMC 64K)	9262 (Low)	1852.4	QPSK	22.40	-	-	-	-
	9400 (Mid)	1880.0	QPSK	23.24	-	-	-	-
	9538 (High)	1907.6	QPSK	23.15	-	-	-	-
WCDMA Band 2 (RMC 144K)	9262 (Low)	1852.4	QPSK	22.41	-	-	-	-
	9400 (Mid)	1880.0	QPSK	23.26	-	-	-	-
	9538 (High)	1907.6	QPSK	23.16	-	-	-	-
WCDMA Band 2 (RMC 384K)	9262 (Low)	1852.4	QPSK	23.34	-	-	-	-
	9400 (Mid)	1880.0	QPSK	23.27	-	-	-	-
	9538 (High)	1907.6	QPSK	23.16	-	-	-	-
WCDMA Band 2 (RMC 12.2K + HSDPA)	9262 (Low)	1852.4	QPSK	21.24	-	-	-	-
	9400 (Mid)	1880.0	QPSK	21.15	-	-	-	-
	9538 (High)	1907.6	QPSK	23.03	-	-	-	-
802.11b	1 (Low)	2412	CCK	14.81	-	-	-	-
	6 (Mid)	2437	CCK	14.26	-0.117	0.0000471	1.6	Pass
	11 (High)	2462	CCK	14.35	-	-	-	-
802.11g	1 (Low)	2412	OFDM	15.01	-	-	-	-
	6 (Mid)	2437	OFDM	14.31	-	-	-	-
	11 (High)	2462	OFDM	14.52	-	-	-	-



11.6 Keypad Down with 1.5cm Gap

Mode	Chan.	Freq. (MHz)	Modulation Type	Conducted Power (dBm)	Power Drift (dB)	Measured 1g SAR (W/kg)	Limits (W/Kg)	Results
GSM850 (GPRS10)	128 (Low)	824.2	GMSK	31.91	-0.015	0.908	1.6	Pass
	189 (Mid)	836.6	GMSK	31.92	-0.019	1.11	1.6	Pass
	251 (High)	848.8	GMSK	31.98	-0.107	1.45	1.6	Pass
GSM850 (GPRS10) with BT On	251 (High)	848.8	GMSK	31.98	-0.12	1.35	1.6	Pass
GSM850 (EDGE10)	128 (Low)	824.2	8PKS	27.03	-	-	-	-
	189 (Mid)	836.6	8PKS	27.03	0.018	0.455	1.6	Pass
	251 (High)	848.8	8PKS	27.10	-	-	-	-
PCS1900 (GPRS10)	512 (Low)	1850.2	GMSK	29.74	-0.157	1.04	1.6	Pass
	661 (Mid)	1880.0	GMSK	30.08	-0.124	1.04	1.6	Pass
	810 (High)	1909.8	GMSK	30.18	-0.156	0.894	1.6	Pass
PCS1900 (GPRS10) with BT On	512 (Low)	1850.2	GMSK	29.74	-0.134	1.01	1.6	Pass
PCS1900 (EDGE10)	512 (Low)	1850.2	8PKS	25.92	-	-	-	-
	661 (Mid)	1880.0	8PKS	26.02	-0.055	0.473	1.6	Pass
	810 (High)	1909.8	8PKS	26.40	-	-	-	-
WCDMA Band 5 (RMC 12.2K)	4132 (Low)	826.4	QPSK	24.94	-	-	-	-
	4182 (Mid)	836.4	QPSK	24.96	-0.009	0.666	1.6	Pass
	4233 (High)	846.6	QPSK	24.36	-	-	-	-
WCDMA Band 5 (RMC 64K)	4132 (Low)	826.4	QPSK	24.94	-	-	-	-
	4182 (Mid)	836.4	QPSK	24.95	-0.036	0.796	1.6	Pass
	4233 (High)	846.6	QPSK	24.37	-	-	-	-
WCDMA Band 5 (RMC 144K)	4132 (Low)	826.4	QPSK	24.96	-	-	-	-
	4182 (Mid)	836.4	QPSK	24.95	-0.027	0.796	1.6	Pass
	4233 (High)	846.6	QPSK	24.39	-	-	-	-
WCDMA Band 5 (RMC 384K)	4132 (Low)	826.4	QPSK	24.98	-0.158	0.749	1.6	Pass
	4182 (Mid)	836.4	QPSK	24.96	0.187	0.814	1.6	Pass
	4233 (High)	846.6	QPSK	24.40	-0.062	0.793	1.6	Pass
WCDMA Band 5 (RMC 384K) with BT On	4182 (Mid)	836.4	QPSK	24.96	-0.076	0.892	1.6	Pass
WCDMA Band 5 (RMC 12.2K + HSDPA)	4132 (Low)	826.4	QPSK	23.78	-	-	-	-
	4182 (Mid)	836.4	QPSK	23.76	-0.008	0.745	1.6	Pass
	4233 (High)	846.6	QPSK	23.20	-	-	-	-
WCDMA Band 2 (RMC 12.2K)	9262 (Low)	1852.4	QPSK	23.17	-	-	-	-
	9400 (Mid)	1880.0	QPSK	23.26	0.004	0.561	1.6	Pass
	9538 (High)	1907.6	QPSK	22.57	-	-	-	-
WCDMA Band 2 (RMC 64K)	9262 (Low)	1852.4	QPSK	22.40	-	-	-	-
	9400 (Mid)	1880.0	QPSK	23.24	0.001	0.601	1.6	Pass
	9538 (High)	1907.6	QPSK	23.15	-	-	-	-
WCDMA Band 2 (RMC 144K)	9262 (Low)	1852.4	QPSK	22.41	-	-	-	-
	9400 (Mid)	1880.0	QPSK	23.26	0.011	0.58	1.6	Pass
	9538 (High)	1907.6	QPSK	23.16	-	-	-	-
WCDMA Band 2 (RMC 384K)	9262 (Low)	1852.4	QPSK	23.34	-	-	-	-
	9400 (Mid)	1880.0	QPSK	23.27	0.048	0.578	1.6	Pass
	9538 (High)	1907.6	QPSK	23.16	-	-	-	-
WCDMA Band 2 (RMC 12.2K + HSDPA)	9262 (Low)	1852.4	QPSK	21.24	-0.014	0.685	1.6	Pass
	9400 (Mid)	1880.0	QPSK	21.15	-0.041	0.627	1.6	Pass
	9538 (High)	1907.6	QPSK	23.03	-0.044	0.654	1.6	Pass
WCDMA Band 2 (RMC 12.2K + HSDPA) with BT On	9262 (Low)	1852.4	QPSK	21.24	0.004	0.673	1.6	Pass



Mode	Chan.	Freq. (MHz)	Modulation Type	Conducted Power (dBm)	Power Drift (dB)	Measured 1g SAR (W/kg)	Limits (W/Kg)	Results
802.11b	1 (Low)	2412	CCK	14.81	0.175	0.011	1.6	Pass
	6 (Mid)	2437	CCK	14.26	0.124	0.00595	1.6	Pass
	11 (High)	2462	CCK	14.35	-0.125	0.000118	1.6	Pass
802.11b with BT On	1 (Low)	2412	CCK	14.81	-0.181	0.011	1.6	Pass
802.11g	1 (Low)	2412	OFDM	15.01	-	-	-	-
	6 (Mid)	2437	OFDM	14.31	0.192	0.0000202	1.6	Pass
	11 (High)	2462	OFDM	14.52	-	-	-	-

Remark : Software ensures that GSM and WLAN can not transmit simultaneously.

Test Engineer : John Tsai and Eric Huang and Jason Wang



12. References

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] IEEE Std. P1528-2003, “Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, April 21, 2003
- [3] Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01), “Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to RF Emissions”, June 2001
- [4] IEEE Std. C95.3-2002, “IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields-RF and Microwave”, 2002
- [5] IEEE Std. C95.1-1999, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, 1999
- [6] Robert J. Renka, “Multivariate Interpolation Of Large Sets Of Scattered Data”, University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148
- [7] DAYS4 System Handbook



Appendix A - System Performance Check Data

Test Laboratory: Sporton International Inc. SAR Testing Lab

Date: 2007/7/5

System Check_Head_835MHz_20070705

DUT: Dipole 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL_850 Medium parameters used: $f = 835$ MHz; $\sigma = 0.903$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.6, 6.6, 6.6); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection) Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Pin=100mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.07 mW/g


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 32.7 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.982 mW/g; SAR(10 g) = 0.643 mW/g

Maximum value of SAR (measured) = 1.07 mW/g

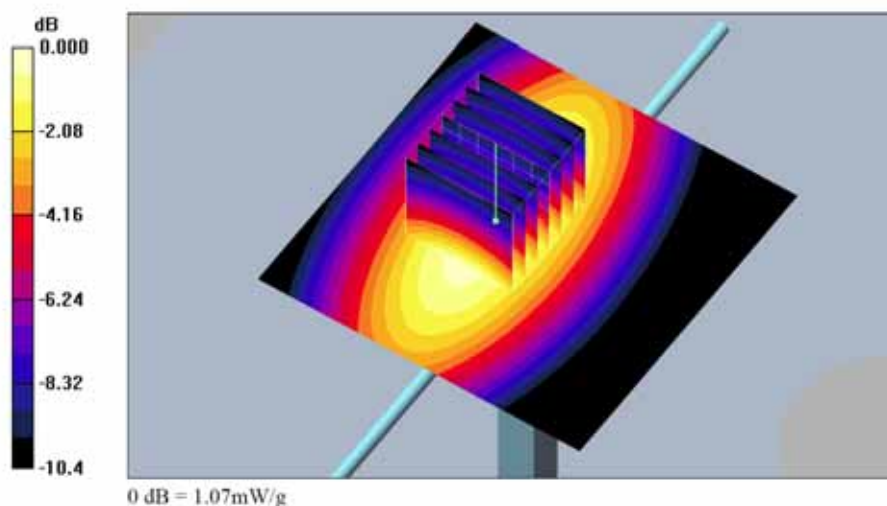



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date: 2007/7/5

System Check_Head_1900MHz_20070705

DUT: Dipole 1900 MHz

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL_1900 Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 39.2$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(5.3, 5.3, 5.3); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection) Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-B; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Pin=100mW/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 4.48 mW/g


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.2 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 7.05 W/kg

SAR(1 g) = 3.93 mW/g; SAR(10 g) = 2.03 mW/g

Maximum value of SAR (measured) = 4.49 mW/g

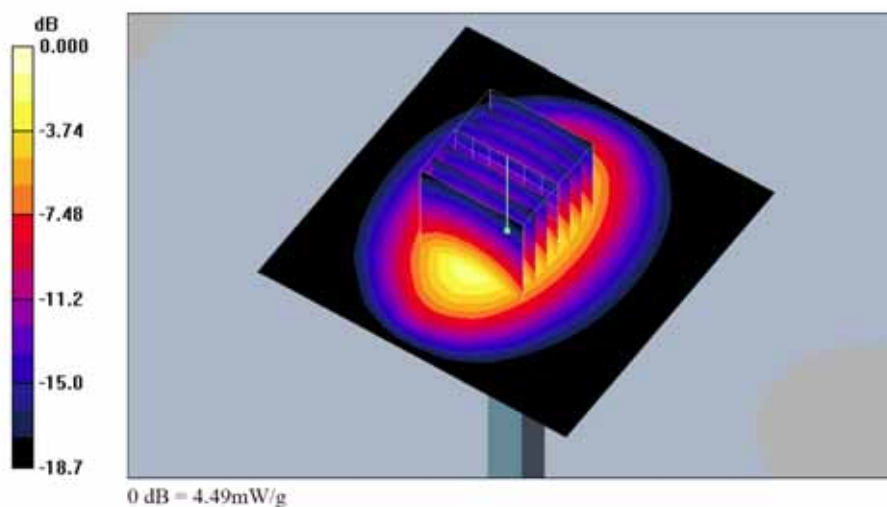



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date: 2007/7/6

System Check_Head_1900MHz_20070706

DUT: Dipole 1900 MHz

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL_1900 Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 39.1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.8 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(5.3, 5.3, 5.3); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection) Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-B; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Pin=100mW/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 4.31 mW/g


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.5 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 6.41 W/kg

SAR(1 g) = 3.79 mW/g; SAR(10 g) = 2.03 mW/g

Maximum value of SAR (measured) = 4.32 mW/g

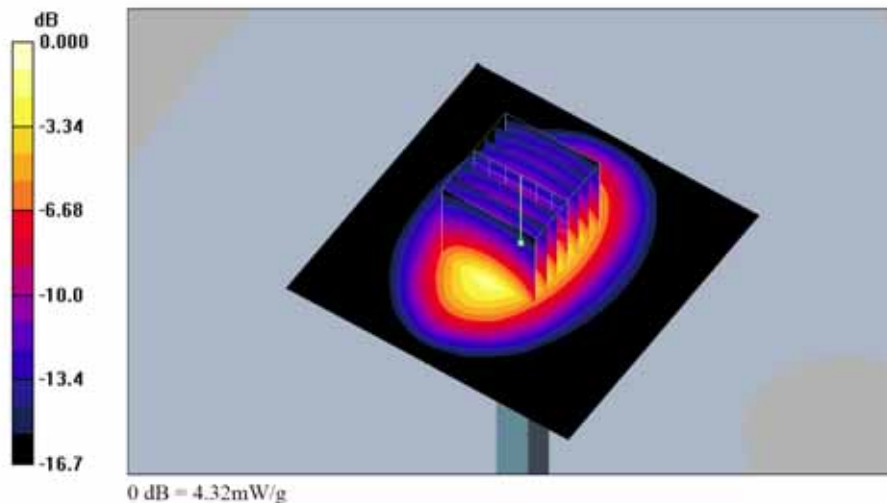



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date : 2007/7/6

System Check_Body_1900MHz_20070706

DUT: Dipole 1900 MHz

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL_1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.7 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.67, 4.67, 4.67); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection) Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Pin=100mW/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 4.43 mW/g


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.2 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 6.09 W/kg

SAR(1 g) = 3.76 mW/g; SAR(10 g) = 2.02 mW/g

Maximum value of SAR (measured) = 4.31 mW/g

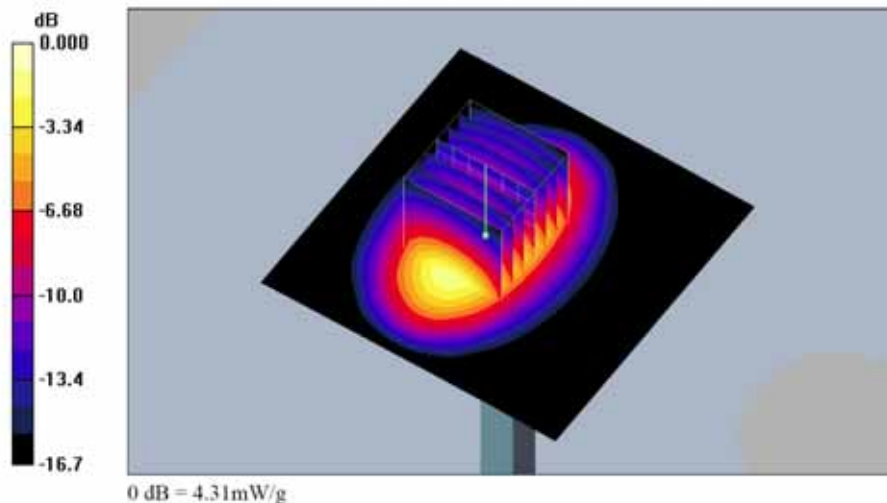



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date: 2007/7/10

System Check_Head_2450MHz_20070710

DUT: Dipole 2450 MHz

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL_2450 Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.76 \text{ mho/m}$; $\epsilon_r = 38.1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.7 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.66, 4.66, 4.66); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection) Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-B; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Pin=100mW/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 5.56 mW/g


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.6 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 10.1 W/kg

SAR(1 g) = 4.87 mW/g; SAR(10 g) = 2.33 mW/g

Maximum value of SAR (measured) = 5.52 mW/g

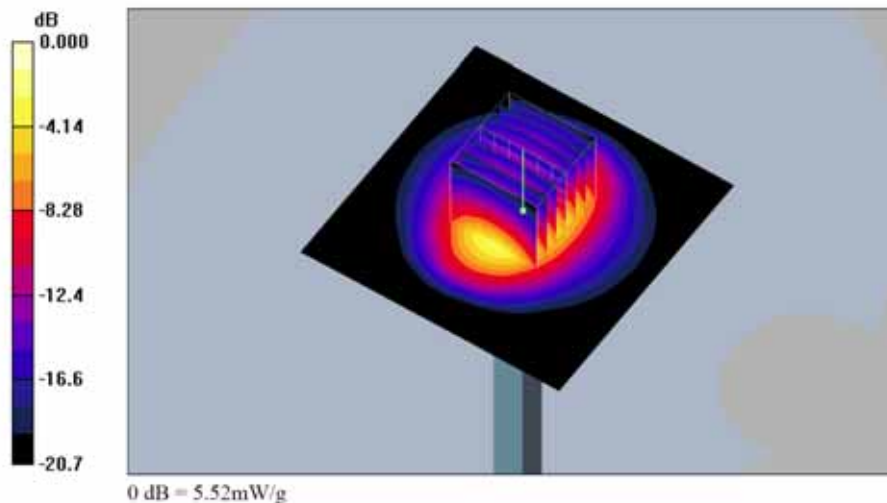



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date: 2007/7/10

System Check_Body_2450MHz_20070710

DUT: Dipole 2450 MHz

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL_2450 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.93$ mho/m; $\epsilon_r = 51$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.0 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.11, 4.11, 4.11); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection) Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Pin=100mW/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 6.27 mW/g


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.9 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 12.4 W/kg

SAR(1 g) = 5.34 mW/g; SAR(10 g) = 2.49 mW/g

Maximum value of SAR (measured) = 5.93 mW/g

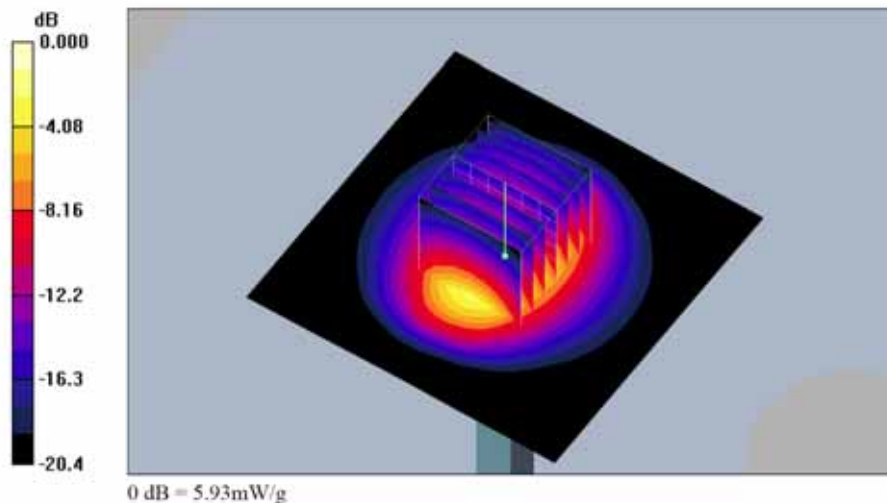



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date : 2007/7/11

System Check_Body_835MHz_20070711

DUT: Dipole 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL_850 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.968 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.8 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.33, 6.33, 6.33); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection) Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Pin=100mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.05 mW/g


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 33.8 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.956 mW/g; SAR(10 g) = 0.629 mW/g

Maximum value of SAR (measured) = 1.04 mW/g

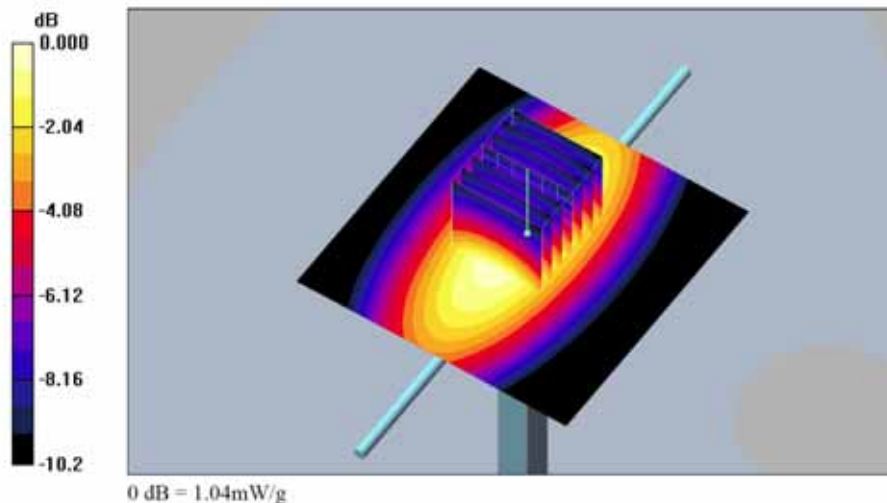



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date: 2007/7/11

System Check_Body_1900MHz_20070711

DUT: Dipole 1900 MHz

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL_1900 Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.5 \text{ mho/m}$; $\epsilon_r = 53.6$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.2 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.67, 4.67, 4.67); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection) Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-B; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Pin=100mW/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 4.42 mW/g


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.2 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 6.08 W/kg

SAR(1 g) = 3.75 mW/g; SAR(10 g) = 2.01 mW/g

Maximum value of SAR (measured) = 4.30 mW/g

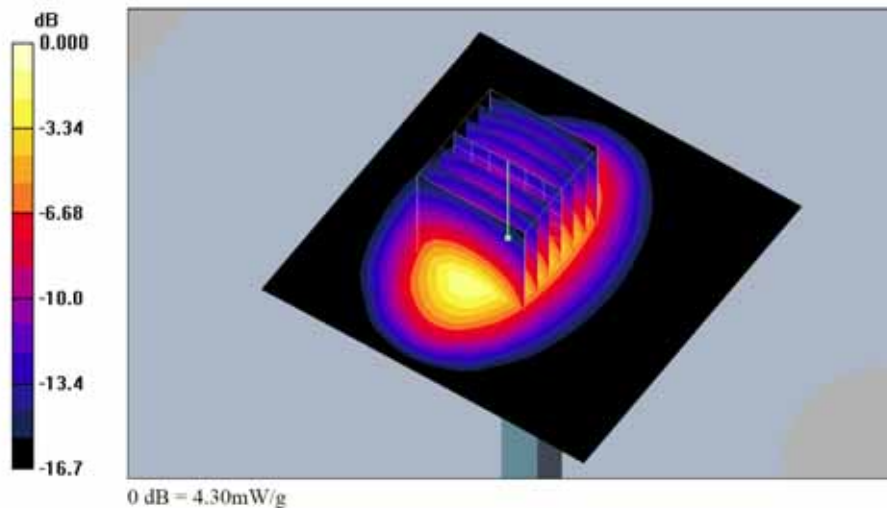



Appendix B - SAR Measurement Data

Test Laboratory: Sporton International Inc. SAR Testing Lab

Date: 2007/7/5

Right Cheek_GSM850 Ch189_20070705

DUT: 761327

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL_850 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.904$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.6, 6.6, 6.6); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch189/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.411 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.2 V/m; Power Drift = 0.079 dB

Peak SAR (extrapolated) = 0.651 W/kg

SAR(1 g) = 0.365 mW/g; SAR(10 g) = 0.230 mW/g

Maximum value of SAR (measured) = 0.388 mW/g

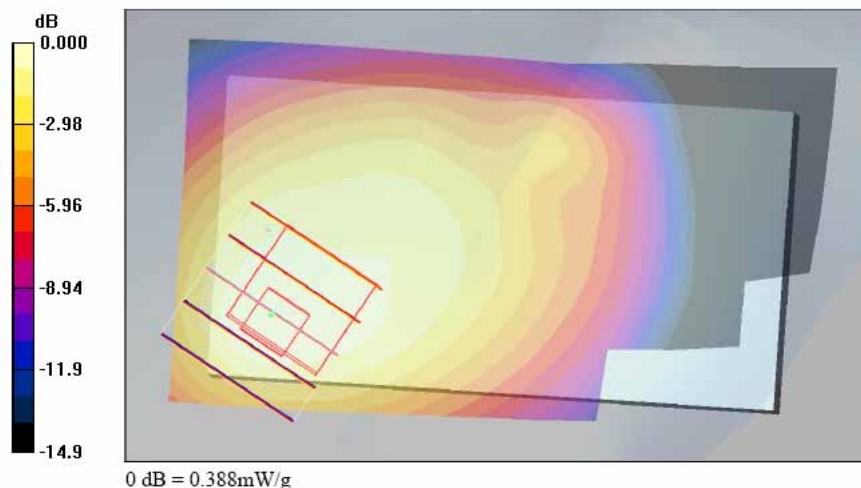



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date: 2007/7/5

Right Tilted_GSM850 Ch251_20070705

DUT: 761327

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_850 Medium parameters used: $f = 849$ MHz; $\sigma = 0.917$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.6, 6.6, 6.6); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch251/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.712 mW/g


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.1 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.626 mW/g; SAR(10 g) = 0.417 mW/g

Maximum value of SAR (measured) = 0.660 mW/g

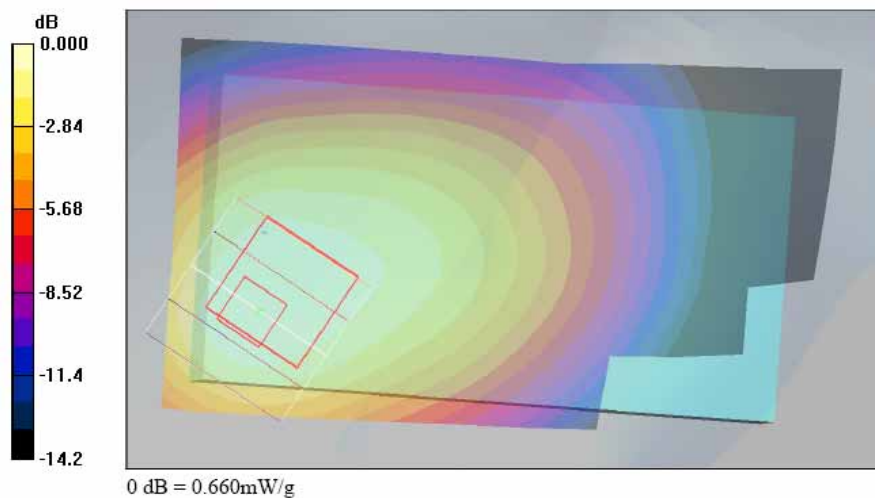



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date: 2007/7/5

Right Tilted_GSM850 Ch251_20070705_Bluetooth On

DUT: 761327

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_850 Medium parameters used: $f = 849$ MHz; $\sigma = 0.917$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.6, 6.6, 6.6); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch251/Area Scan (51x91x1); Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.716 mW/g


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.2 V/m; Power Drift = -0.100 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.610 mW/g; SAR(10 g) = 0.407 mW/g

Maximum value of SAR (measured) = 0.643 mW/g

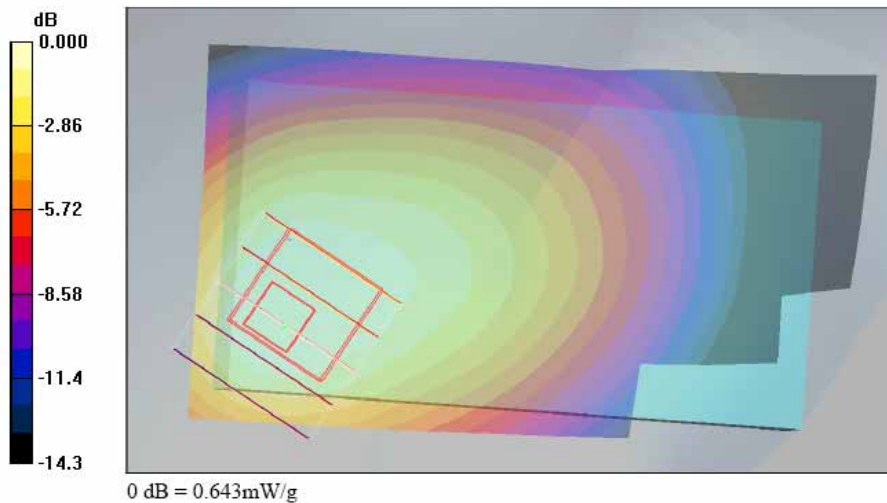



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date: 2007/7/5

Left Cheek_GSM850 Ch189_20070705

DUT: 761327

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL_850 Medium parameters used : $f = 836.4 \text{ MHz}$; $\sigma = 0.904 \text{ mho/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.4 °C; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.6, 6.6, 6.6); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch189/Area Scan (51x91x1); Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.347 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 0; Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.4 V/m; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 0.426 W/kg

SAR(1 g) = 0.326 mW/g; SAR(10 g) = 0.242 mW/g

Maximum value of SAR (measured) = 0.343 mW/g

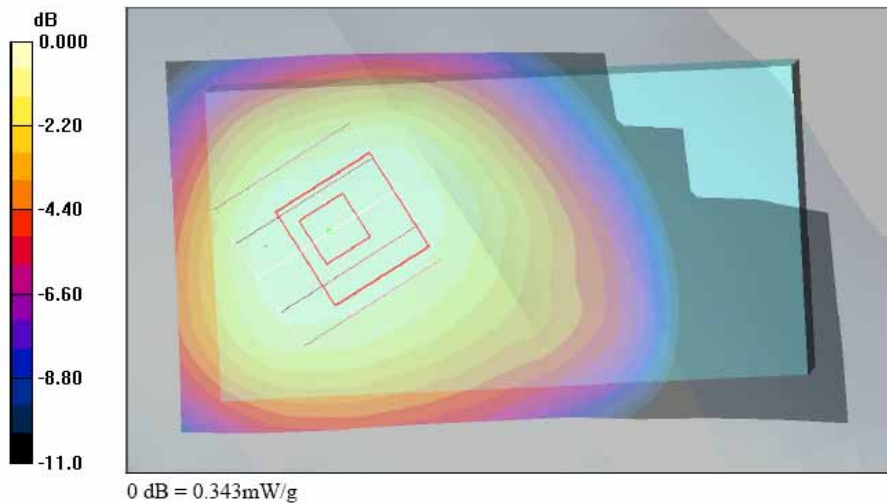



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date: 2007/7/5

Left Tilted_GSM850 Ch189_20070705

DUT: 761327

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL_850 Medium parameters used : $f = 836.4 \text{ MHz}$; $\sigma = 0.904 \text{ mho/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.4 °C; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.6, 6.6, 6.6); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch189/Area Scan (51x91x1); Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.357 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 0; Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.0 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 0.470 W/kg

SAR(1 g) = 0.320 mW/g; SAR(10 g) = 0.221 mW/g

Maximum value of SAR (measured) = 0.338 mW/g

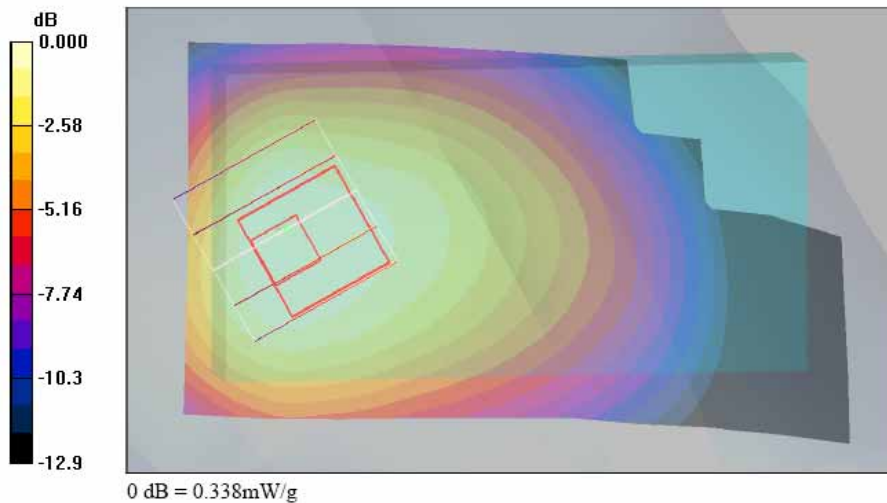



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date: 2007/7/5

Right Cheek_PCS Ch661_20070705

DUT: 761327

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(5.3, 5.3, 5.3); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-B; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch661/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.803 mW/g


Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.7 V/m; Power Drift = 0.079 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.697 mW/g; SAR(10 g) = 0.405 mW/g

Maximum value of SAR (measured) = 0.759 mW/g

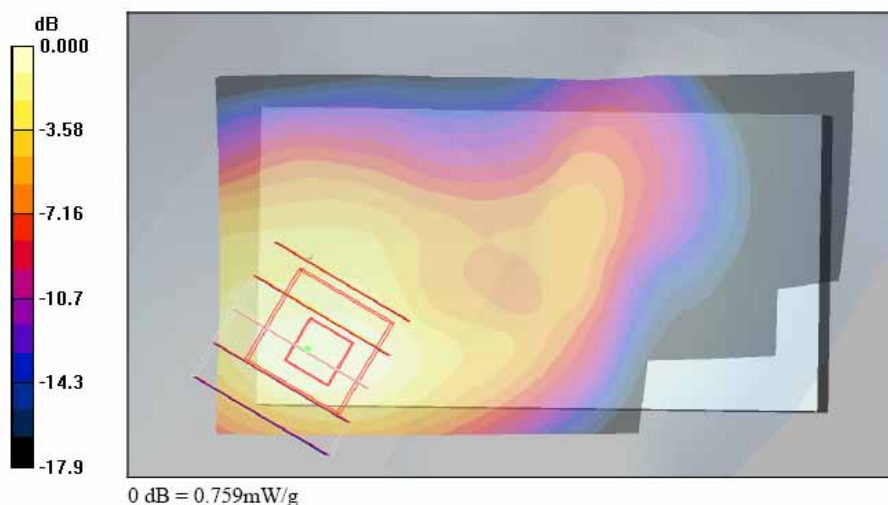



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date : 2007/7/5

Right Tilted_PCS Ch512_20070705

DUT: 761327

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.34$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(5.3, 5.3, 5.3); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-B; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch512/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.13 mW/g


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.0 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 0.978 mW/g; SAR(10 g) = 0.622 mW/g

Maximum value of SAR (measured) = 1.07 mW/g

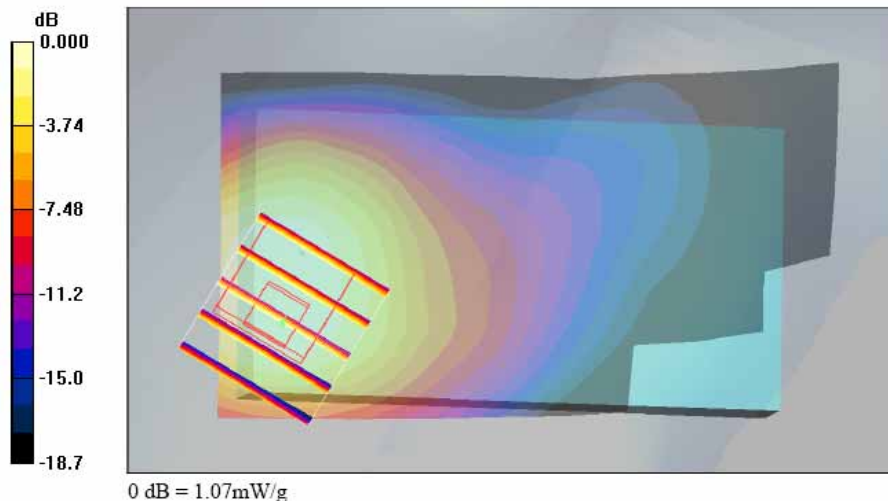



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date : 2007/7/5

Right Tilted_PCS Ch512_20070705_Bluetooth On

DUT: 761327

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.34$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(5.3, 5.3, 5.3); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-B; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch512/Area Scan (51x91x1); Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.15 mW/g


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.9 V/m; Power Drift = -0.099 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.989 mW/g; SAR(10 g) = 0.623 mW/g

Maximum value of SAR (measured) = 1.08 mW/g

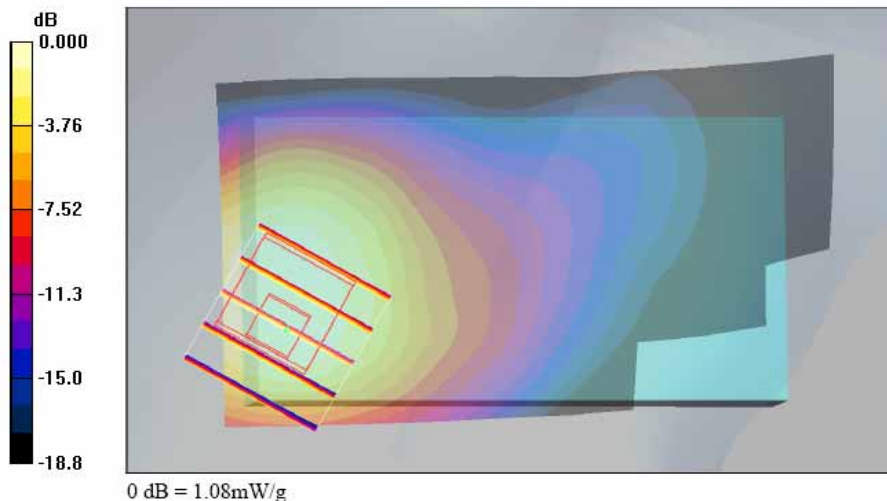



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date: 2007/7/5

Left Cheek_PCS Ch661_20070705

DUT: 761327

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(5.3, 5.3, 5.3); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-B; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch661/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.538 mW/g


Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.7 V/m; Power Drift = -0.142 dB

Peak SAR (extrapolated) = 0.721 W/kg

SAR(1 g) = 0.515 mW/g; SAR(10 g) = 0.327 mW/g

Maximum value of SAR (measured) = 0.554 mW/g

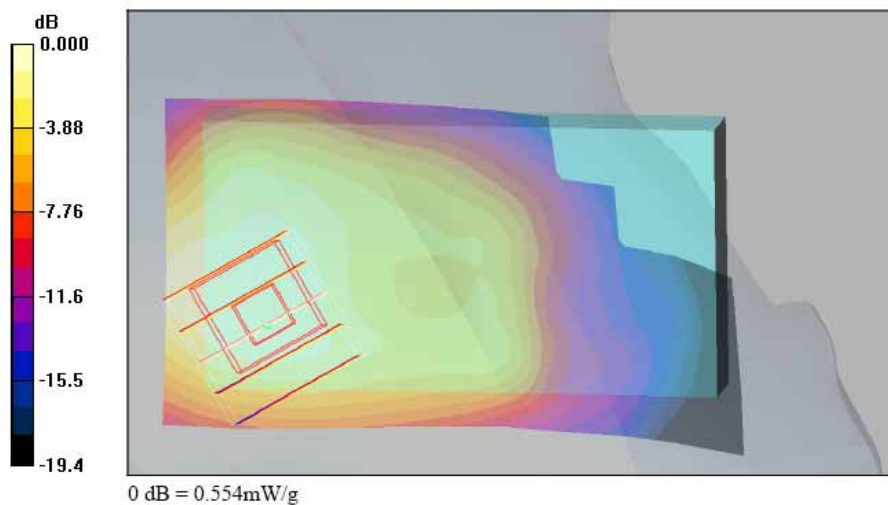



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date : 2007/7/5

Left Tilted_PCS Ch661_20070705

DUT: 761327

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.37 \text{ mho/m}$; $\epsilon_r = 39.3$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(5.3, 5.3, 5.3); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-B; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch661/Area Scan (51x91x1); Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.895 mW/g


Ch661/Zoom Scan (5x5x7)/Cube 0; Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.5 V/m; Power Drift = -0.173 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.773 mW/g; SAR(10 g) = 0.490 mW/g

Maximum value of SAR (measured) = 0.832 mW/g

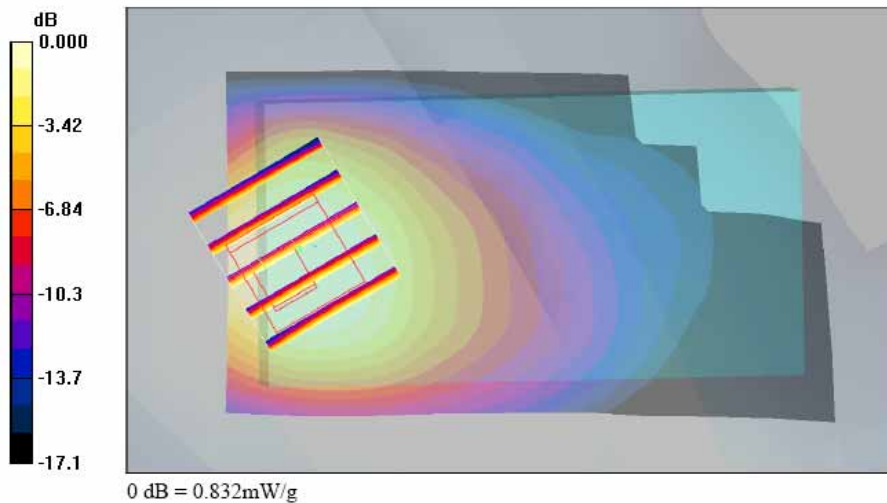



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date: 2007/7/5

Right Cheek_WCDMA Ch4182_20070705

DUT: 761327

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_850 Medium parameters used : $f = 836.4 \text{ MHz}$; $\sigma = 0.904 \text{ mho/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.6°C ; Liquid Temperature : 21.6°C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.6, 6.6, 6.6); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch4182/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.808 mW/g

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.7 V/m ; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.701 mW/g ; SAR(10 g) = 0.444 mW/g

Maximum value of SAR (measured) = 0.749 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.7 V/m ; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.646 mW/g ; SAR(10 g) = 0.449 mW/g

Maximum value of SAR (measured) = 0.724 mW/g

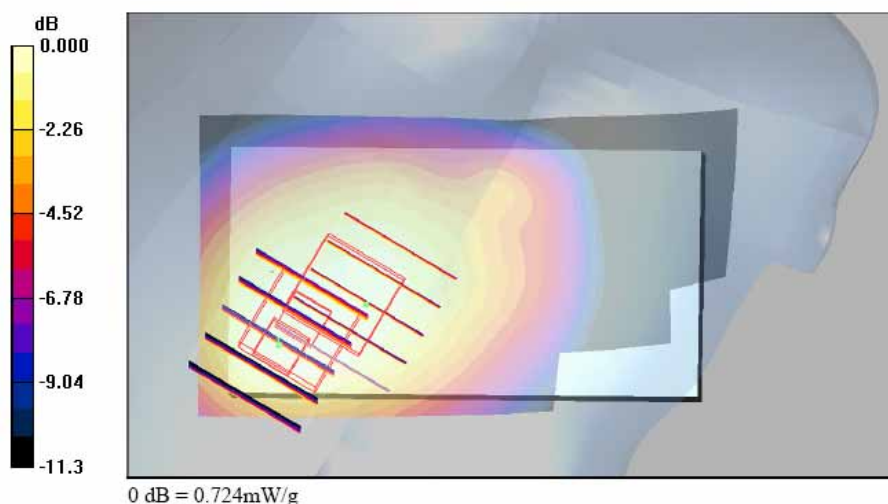



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date: 2007/7/5

Right Cheek_WCDMA Ch4182_20070705_Bluetooth On

DUT: 761327

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_850 Medium parameters used : $f = 836.4 \text{ MHz}$; $\sigma = 0.904 \text{ mho/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.6°C ; Liquid Temperature : 21.6°C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.6, 6.6, 6.6); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch4182/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.706 mW/g

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 26.0 V/m ; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.624 mW/g ; SAR(10 g) = 0.411 mW/g

Maximum value of SAR (measured) = 0.666 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 26.0 V/m ; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.938 W/kg

SAR(1 g) = 0.595 mW/g ; SAR(10 g) = 0.426 mW/g

Maximum value of SAR (measured) = 0.656 mW/g

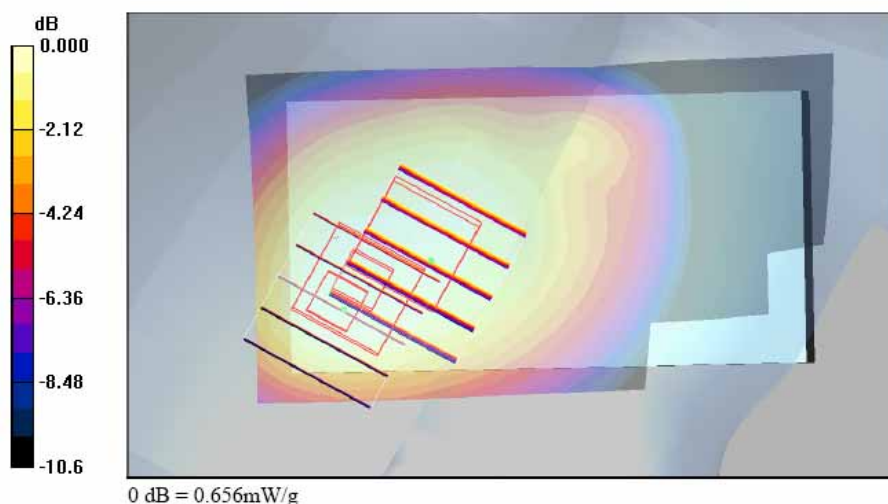



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date: 2007/7/5

Right Tilted_WCDMA Ch4182_20070705

DUT: 761327

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_850 Medium parameters used : $f = 836.4 \text{ MHz}$; $\sigma = 0.904 \text{ mho/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.6°C ; Liquid Temperature : 21.6°C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.6, 6.6, 6.6); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch4182/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.786 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 26.7 V/m ; Power Drift = -0.019 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.691 mW/g ; SAR(10 g) = 0.459 mW/g

Maximum value of SAR (measured) = 0.730 mW/g

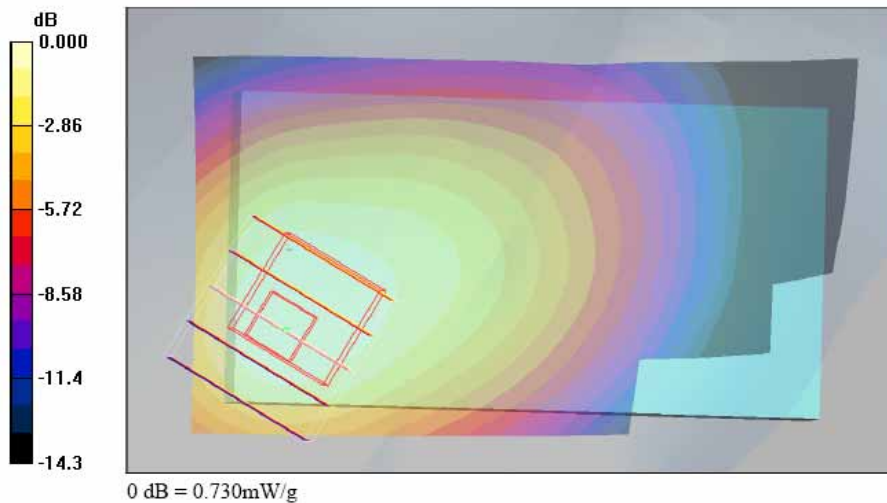



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date : 2007/7/5

Left Cheek_WCDMA Ch4182_20070705

DUT: 761327

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_850 Medium parameters used : $f = 836.4 \text{ MHz}$; $\sigma = 0.904 \text{ mho/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.6°C ; Liquid Temperature : 21.6°C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.6, 6.6, 6.6); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch4182/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.714 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 28.0 V/m ; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 0.883 W/kg

SAR(1 g) = 0.646 mW/g ; SAR(10 g) = 0.476 mW/g

Maximum value of SAR (measured) = 0.672 mW/g

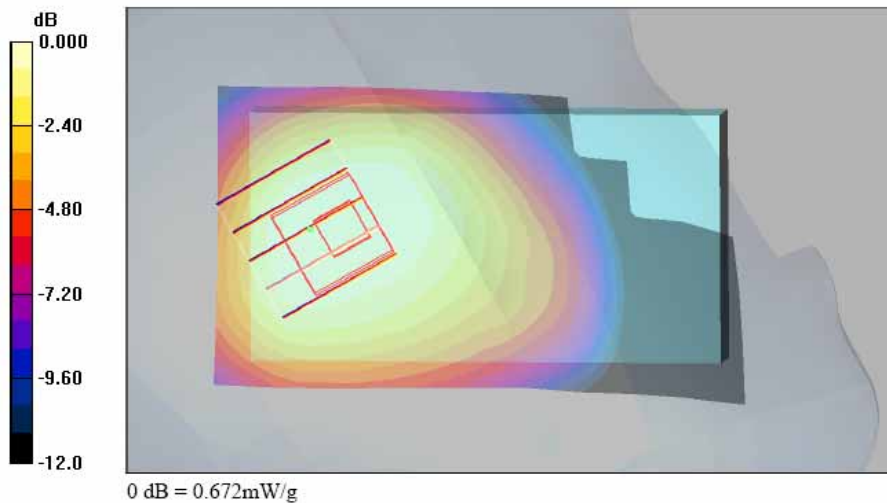



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date: 2007/7/5

Left Tilted_WCDMA Ch4182_20070705

DUT: 761327

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_850 Medium parameters used : $f = 836.4 \text{ MHz}$; $\sigma = 0.904 \text{ mho/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.6°C ; Liquid Temperature : 21.6°C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.6, 6.6, 6.6); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch4182/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.668 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.2 V/m ; Power Drift = 0.043 dB

Peak SAR (extrapolated) = 0.874 W/kg

SAR(1 g) = 0.597 mW/g ; SAR(10 g) = 0.416 mW/g

Maximum value of SAR (measured) = 0.627 mW/g

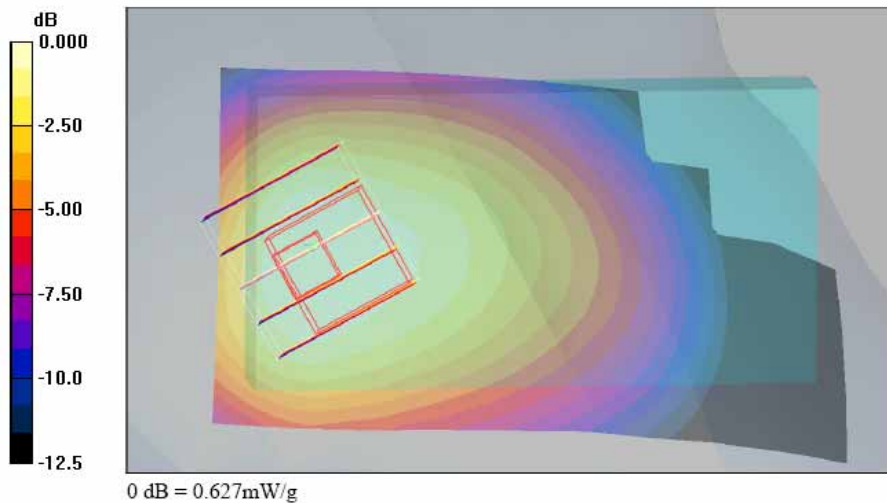



FCC SAR Test Report

Test Report No : FA761327-1-2-01

Test Laboratory: Sporton International Inc. SAR Testing Lab

Date : 2007/7/6

Right Cheek_WCDMA Ch9262_20070706

DUT: 761327

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL_1900 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.8 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(5.3, 5.3, 5.3); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-B; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch9262/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.40 mW/g


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.5 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 1.23 mW/g; SAR(10 g) = 0.708 mW/g

Maximum value of SAR (measured) = 1.36 mW/g

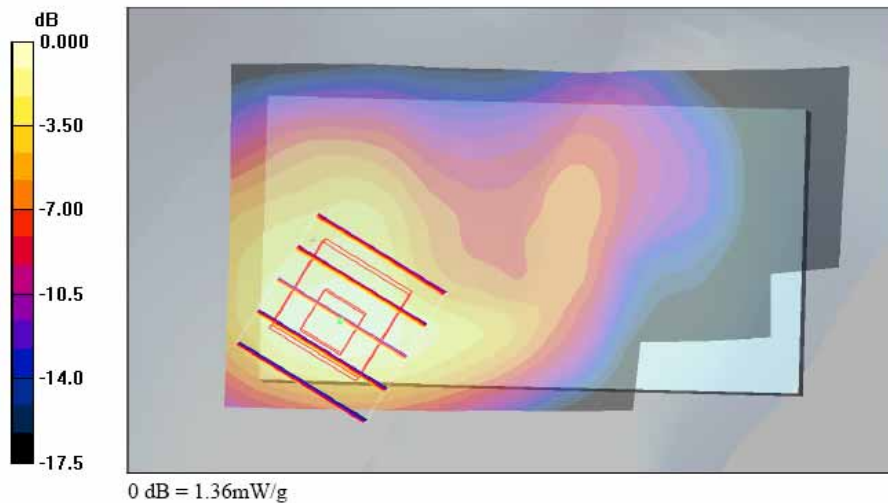



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date: 2007/7/6

Right Tilted_WCDMA Ch9262_20070706

DUT: 761327

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL_1900 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.9 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(5.3, 5.3, 5.3); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-B; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch9262/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.58 mW/g


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.4 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 2.13 W/kg

SAR(1 g) = 1.39 mW/g; SAR(10 g) = 0.872 mW/g

Maximum value of SAR (measured) = 1.51 mW/g

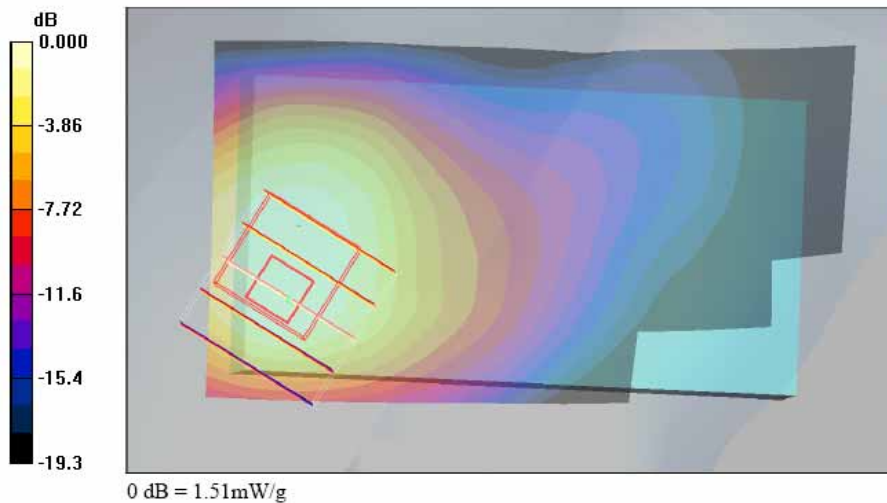



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date : 2007/7/6

Right Tilted_WCDMA Ch9262_20070706_Bluetooth On

DUT: 761327

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL_1900 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.8 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(5.3, 5.3, 5.3); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-B; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch9262/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.50 mW/g


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.1 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 2.13 W/kg

SAR(1 g) = 1.39 mW/g; SAR(10 g) = 0.857 mW/g

Maximum value of SAR (measured) = 1.49 mW/g

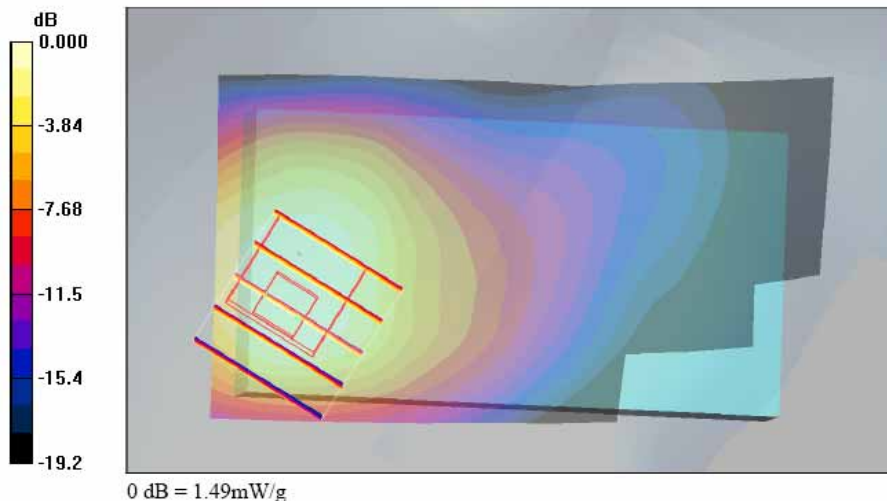



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date: 2007/7/6

Left Cheek_WCDMA Ch9400_20070706

DUT: 761327

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL_1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.9 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(5.3, 5.3, 5.3); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-B; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch9400/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.660 mW/g


Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.9 V/m; Power Drift = -0.065 dB

Peak SAR (extrapolated) = 0.886 W/kg

SAR(1 g) = 0.625 mW/g; SAR(10 g) = 0.391 mW/g

Maximum value of SAR (measured) = 0.677 mW/g

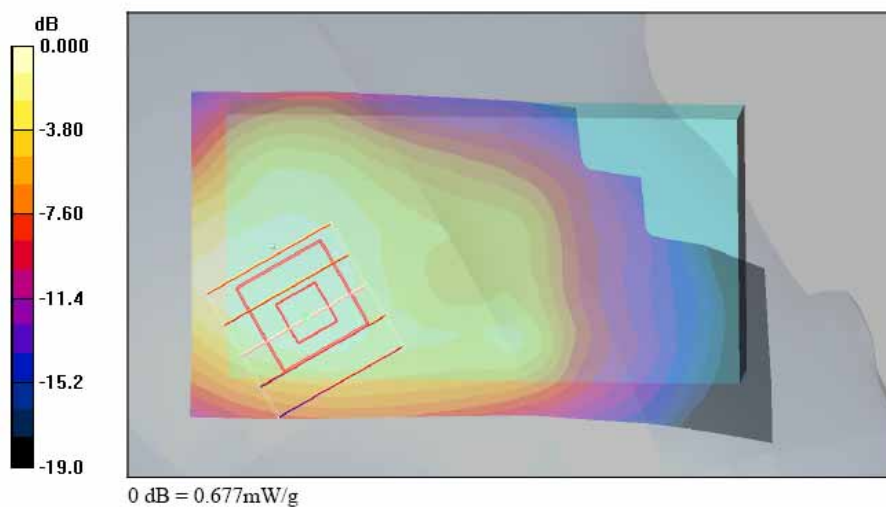



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date : 2007/7/6

Left Tilted_WCDMA Ch9262_20070706

DUT: 761327

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL_1900 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.8 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(5.3, 5.3, 5.3); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-B; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch9262/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.44 mW/g


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.4 V/m; Power Drift = 0.077 dB

Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 1.25 mW/g; SAR(10 g) = 0.804 mW/g

Maximum value of SAR (measured) = 1.32 mW/g

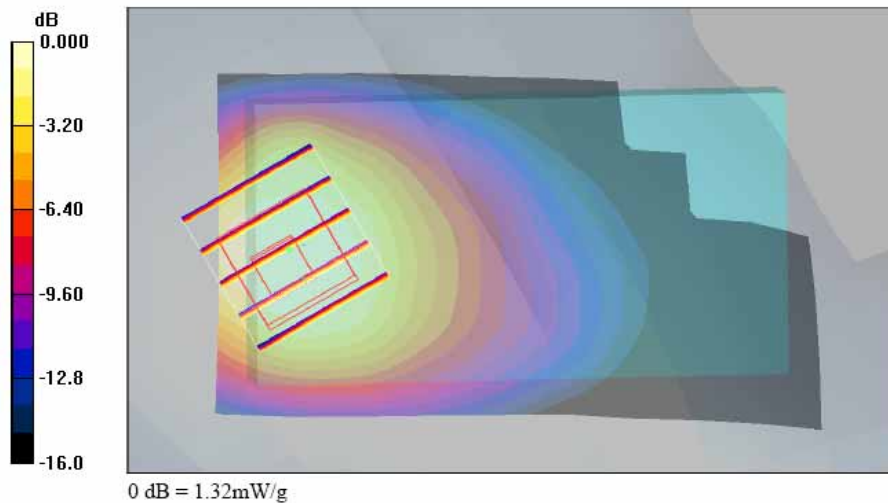



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date: 2007/7/10

Right Cheek_802.11b Ch6_20070710

DUT: 761327

Communication System: 802.11b ; Frequency: 2437 MHz;Duty Cycle: 1:1

Medium: HSL_2450 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.74$ mho/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.7 °C ; Liquid Temperature : 21.7 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.66, 4.66, 4.66); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-B; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch6/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.013 mW/g


Ch6/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.13 V/m; Power Drift = -0.121 dB

Peak SAR (extrapolated) = 0.029 W/kg

SAR(1 g) = 0.00863 mW/g; SAR(10 g) = 0.00237 mW/g

Maximum value of SAR (measured) = 0.009 mW/g

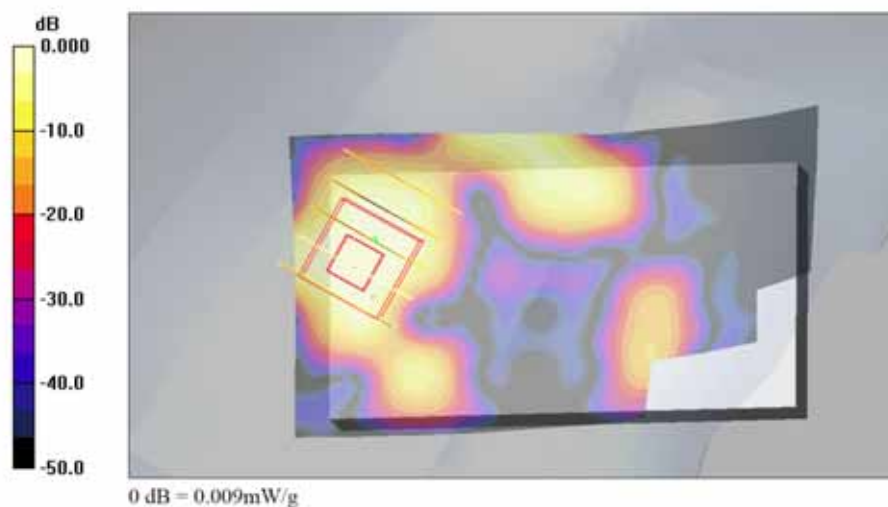



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date: 2007/7/10

Right Tilted_802.11b Ch1_20070710

DUT: 761327

Communication System: 802.11b ; Frequency: 2412 MHz;Duty Cycle: 1:1

Medium: HSL_2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.73$ mho/m; $\epsilon_r = 38.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.8 °C; Liquid Temperature : 21.7 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.66, 4.66, 4.66); Calibrated: 9/19/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 11/21/2006
- Phantom: SAM-B; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch1/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.012 mW/g


Ch1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.11 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.025 W/kg

SAR(1 g) = 0.00769 mW/g; SAR(10 g) = 0.002 mW/g

Maximum value of SAR (measured) = 0.009 mW/g

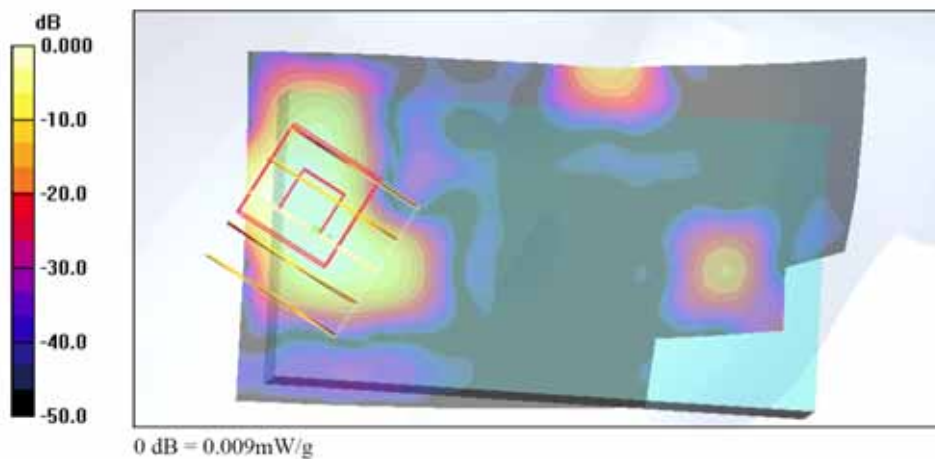



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date: 2007/7/10

Left Cheek_802.11b Ch6_20070710

DUT: 761327

Communication System: 802.11b ; Frequency: 2437 MHz;Duty Cycle: 1:1

Medium: HSL_2450 Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.74 \text{ mho/m}$; $\epsilon_r = 38.2$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.7 °C ; Liquid Temperature : 21.7 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.66, 4.66, 4.66); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-B; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch6/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.025 mW/g


Ch6/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.48 V/m; Power Drift = 0.133 dB

Peak SAR (extrapolated) = 0.019 W/kg

SAR(1 g) = 0.010 mW/g; SAR(10 g) = 0.00431 mW/g

Maximum value of SAR (measured) = 0.012 mW/g

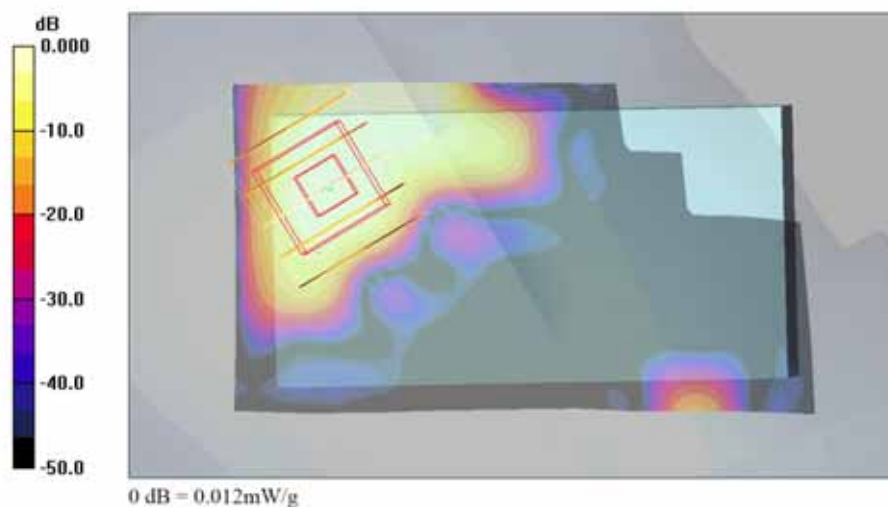



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date: 2007/7/10

Left Tilted_802.11b Ch1_20070710

DUT: 761327

Communication System: 802.11b ; Frequency: 2412 MHz;Duty Cycle: 1:1

Medium: HSL_2450 Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.73 \text{ mho/m}$; $\epsilon_r = 38.6$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.7 °C ; Liquid Temperature : 21.7 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.66, 4.66, 4.66); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-B; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch1/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.015 mW/g


Ch1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.50 V/m; Power Drift = -0.048 dB

Peak SAR (extrapolated) = 0.033 W/kg

SAR(1 g) = 0.014 mW/g; SAR(10 g) = 0.00573 mW/g

Maximum value of SAR (measured) = 0.015 mW/g

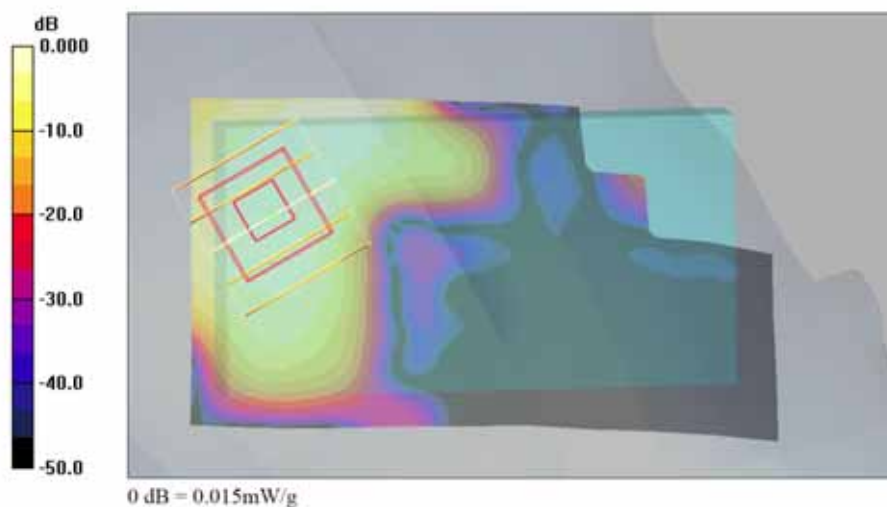



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date: 2007/7/10

Left Tilted_802.11b Ch1_20070710_Bluetooth On

DUT: 761327

Communication System: 802.11b ; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HSL_2450 Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.73 \text{ mho/m}$; $\epsilon_r = 38.6$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.9 °C ; Liquid Temperature : 21.7 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.66, 4.66, 4.66); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-B; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch1/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.017 mW/g


Ch1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.58 V/m; Power Drift = -0.059 dB

Peak SAR (extrapolated) = 0.024 W/kg

SAR(1 g) = 0.013 mW/g; SAR(10 g) = 0.00581 mW/g

Maximum value of SAR (measured) = 0.016 mW/g

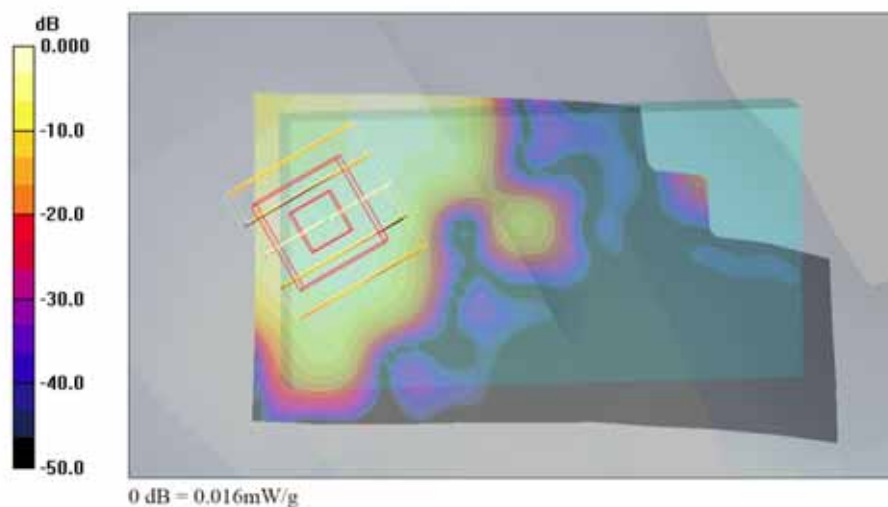



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date: 2007/7/10

Right Cheek_802.11g Ch6_20070710

DUT: 761327

Communication System: 802.11g; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HSL_2450 Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.74 \text{ mho/m}$; $\epsilon_r = 38.2$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.8 °C ; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.66, 4.66, 4.66); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-B; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch6/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.001 mW/g


Ch6/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 0.279 V/m; Power Drift = -0.199 dB

Peak SAR (extrapolated) = 0.002 W/kg

SAR(1 g) = 1.53e-005 mW/g; SAR(10 g) = 1.94e-006 mW/g

Maximum value of SAR (measured) = 0.002 mW/g

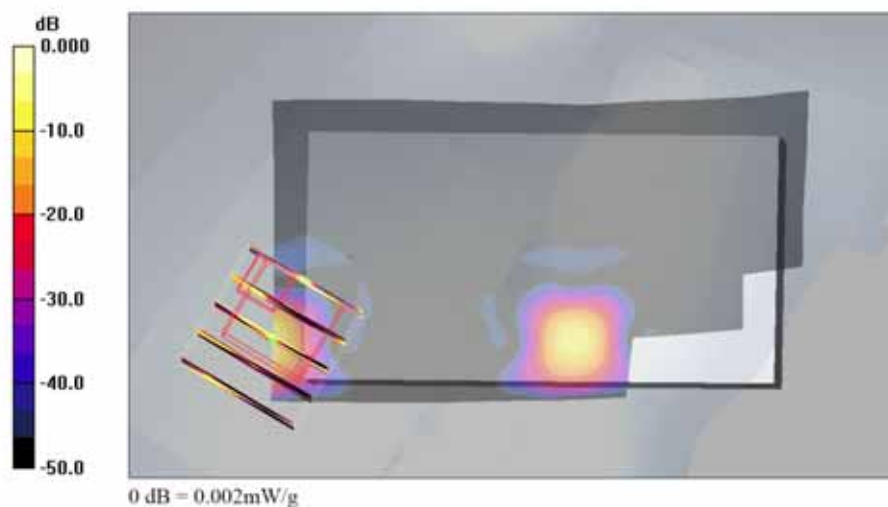



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date : 2007/7/11

Body_GSM850 Ch189_Keypad Up with 1.5cm Gap_20070711_GPRS10

DUT: 761327

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: MSL_850 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.8 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.33, 6.33, 6.33); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch189/Area Scan (51x91x1); Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.331 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.7 V/m; Power Drift = 0.005 dB

Peak SAR (extrapolated) = 0.400 W/kg

SAR(1 g) = 0.314 mW/g; SAR(10 g) = 0.236 mW/g

Maximum value of SAR (measured) = 0.332 mW/g

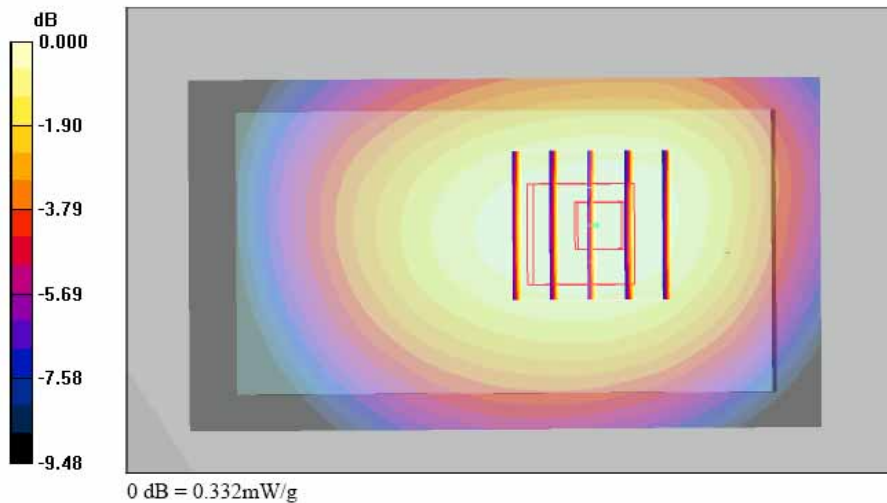



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date : 2007/7/11

Body_GSM850 Ch251_Keypad Down with 1.5cm Gap_20070711_GPRS10

DUT: 761327

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: MSL_850 Medium parameters used: $f = 849 \text{ MHz}$; $\sigma = 0.983 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.8 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.33, 6.33, 6.33); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch251/Area Scan (51x91x1); Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.52 mW/g


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.1 V/m; Power Drift = -0.107 dB

Peak SAR (extrapolated) = 1.85 W/kg

SAR(1 g) = 1.45 mW/g; SAR(10 g) = 1.07 mW/g

Maximum value of SAR (measured) = 1.54 mW/g

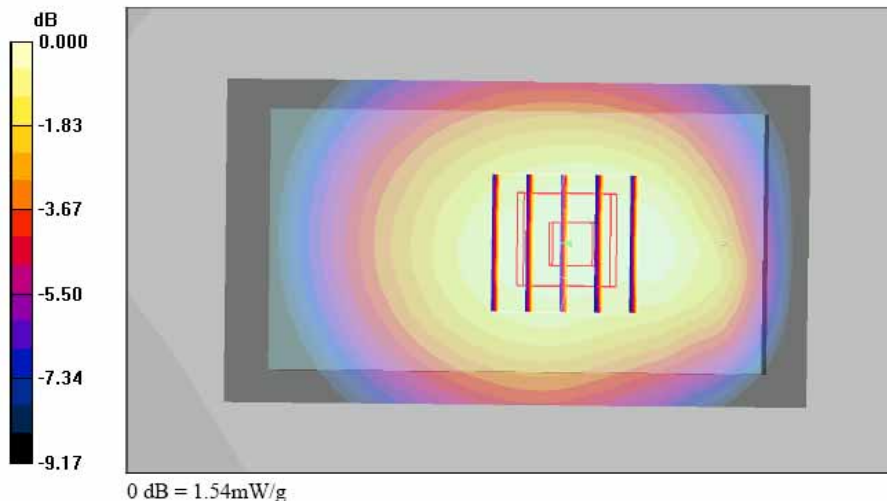



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date : 2007/7/11

Body_GSM850 Ch251_Keypad Down with 1.5cm Gap_20070711_GPRS10_Bluetooth On

DUT: 761327

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: MSL_850 Medium parameters used: $f = 849 \text{ MHz}$; $\sigma = 0.983 \text{ mho/m}$; $\epsilon_r = 54.1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.8 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.33, 6.33, 6.33); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch251/Area Scan (51x91x1); Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.41 mW/g


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.5 V/m; Power Drift = -0.120 dB

Peak SAR (extrapolated) = 1.71 W/kg

SAR(1 g) = 1.35 mW/g; SAR(10 g) = 0.994 mW/g

Maximum value of SAR (measured) = 1.43 mW/g

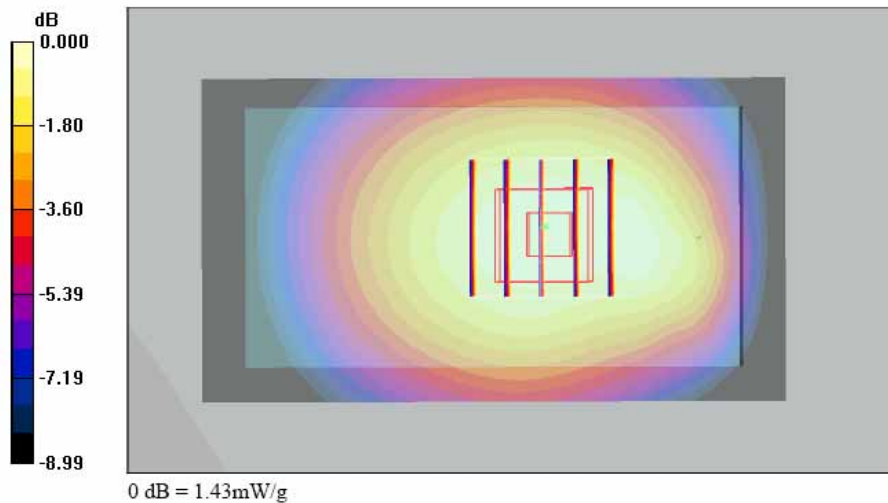



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date: 2007/7/11

Body_GSM850 Ch189_Keypad Down with 1.5cm Gap_20070711_EDGE10

DUT: 761327

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: MSL_850 Medium parameters used : $f = 836.4 \text{ MHz}$; $\sigma = 0.969 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.0°C ; Liquid Temperature : 21.4°C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.33, 6.33, 6.33); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch189/Area Scan (51x91x1); Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.479 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.3 V/m ; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 0.576 W/kg

SAR(1 g) = 0.455 mW/g ; SAR(10 g) = 0.338 mW/g

Maximum value of SAR (measured) = 0.483 mW/g

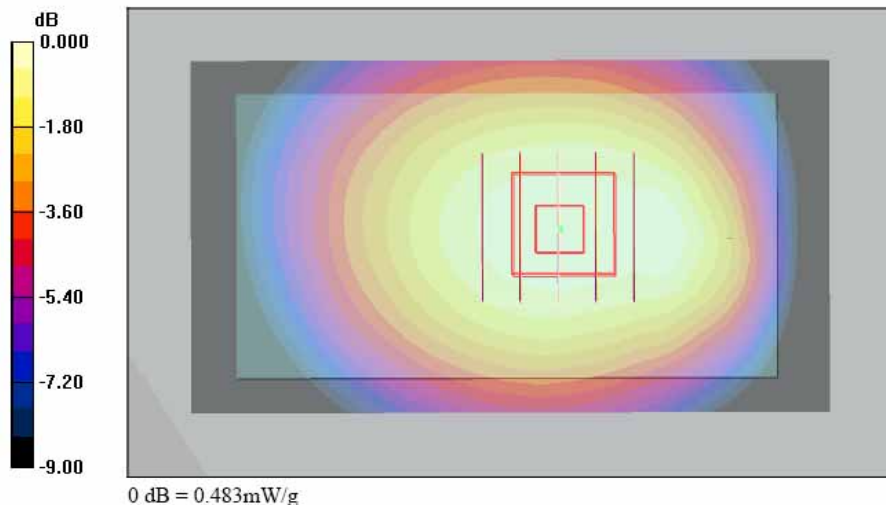



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date: 2007/7/11

Body_PCS Ch661_Keypad Up with 1.5cm Gap_20070711_GPRS10

DUT: 761327

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium: MSL_1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.48 \text{ mho/m}$; $\epsilon_r = 53.7$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.67, 4.67, 4.67); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-B; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch661/Area Scan (51x91x1); Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.521 mW/g


Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.9 V/m; Power Drift = -0.182 dB

Peak SAR (extrapolated) = 0.641 W/kg

SAR(1 g) = 0.473 mW/g; SAR(10 g) = 0.319 mW/g

Maximum value of SAR (measured) = 0.503 mW/g

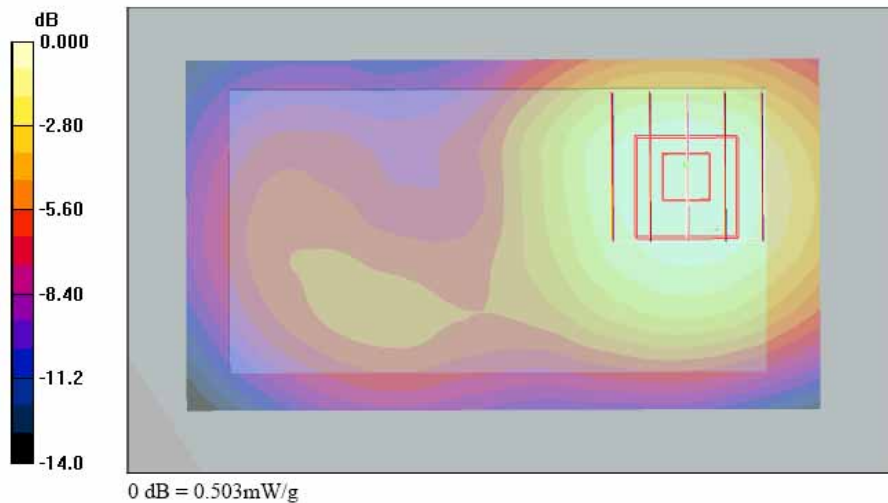



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date: 2007/7/11

Body_PCS Ch512_Keypad Down with 1.5cm Gap_20070711_GPRS10

DUT: 761327

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium: MSL_1900 Medium parameters used : $f = 1850.2$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.9 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.67, 4.67, 4.67); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-B; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch512/Area Scan (51x91x1); Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.18 mW/g


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.7 V/m; Power Drift = -0.157 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.670 mW/g

Maximum value of SAR (measured) = 1.13 mW/g

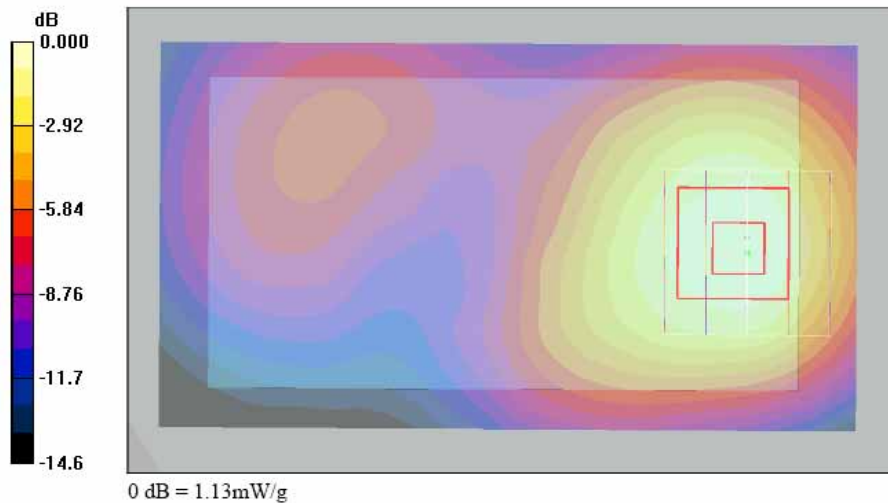



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date: 2007/7/11

Body_PCS Ch512_Keypad Down with 1.5cm Gap_20070711_GPRS10_Bluetooth On

DUT: 761327

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium: MSL_1900 Medium parameters used : $f = 1850.2$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.9 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.67, 4.67, 4.67); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-B; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch512/Area Scan (51x91x1); Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.15 mW/g


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.0 V/m; Power Drift = -0.134 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.652 mW/g

Maximum value of SAR (measured) = 1.10 mW/g

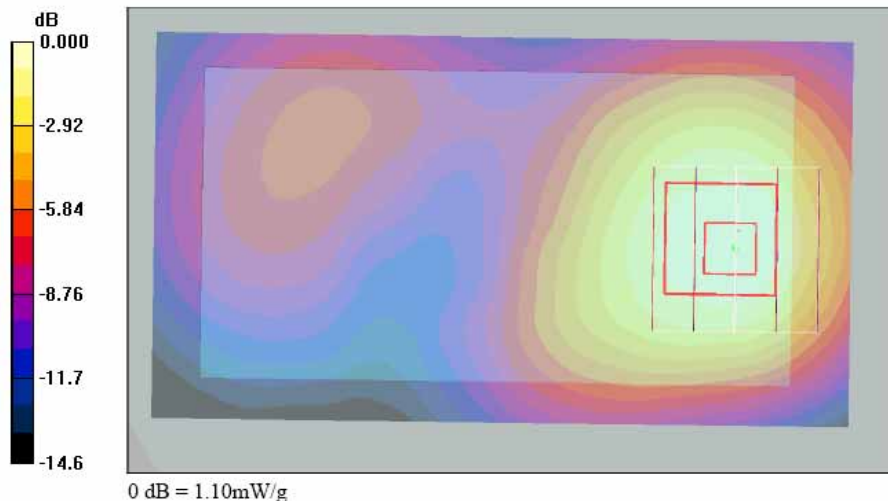



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date: 2007/7/11

Body_PCS Ch661_Keypad Down with 1.5cm Gap_20070711_EDGE10

DUT: 761327

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium: MSL_1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.9 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.67, 4.67, 4.67); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-B; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch661/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.540 mW/g


Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.0 V/m; Power Drift = -0.055 dB

Peak SAR (extrapolated) = 0.682 W/kg

SAR(1 g) = 0.473 mW/g; SAR(10 g) = 0.298 mW/g

Maximum value of SAR (measured) = 0.515 mW/g

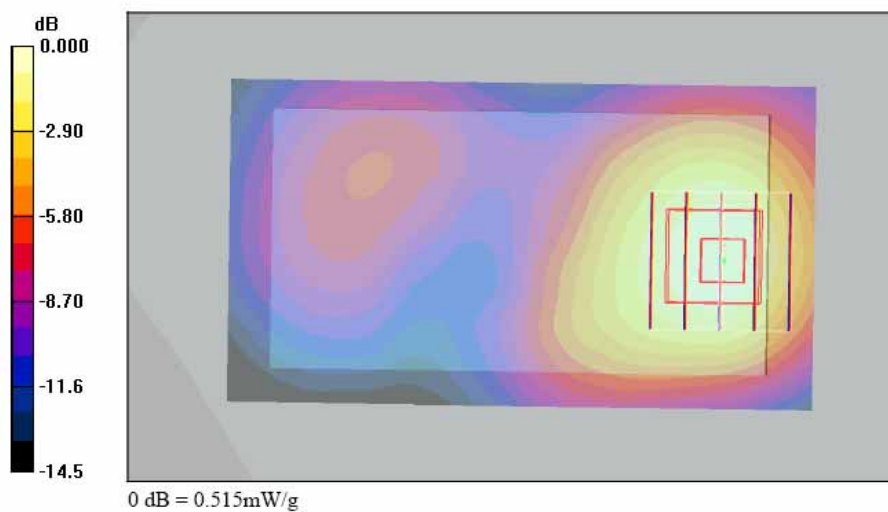



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date : 2007/7/11

Body_WCDMA Ch4182_Keypad Up with 1.5cm Gap_20070711_RMC12.2K

DUT: 761327

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_850 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.7 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.33, 6.33, 6.33); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch4182/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.326 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.2 V/m; Power Drift = 0.051 dB

Peak SAR (extrapolated) = 0.388 W/kg

SAR(1 g) = 0.311 mW/g; SAR(10 g) = 0.234 mW/g

Maximum value of SAR (measured) = 0.326 mW/g

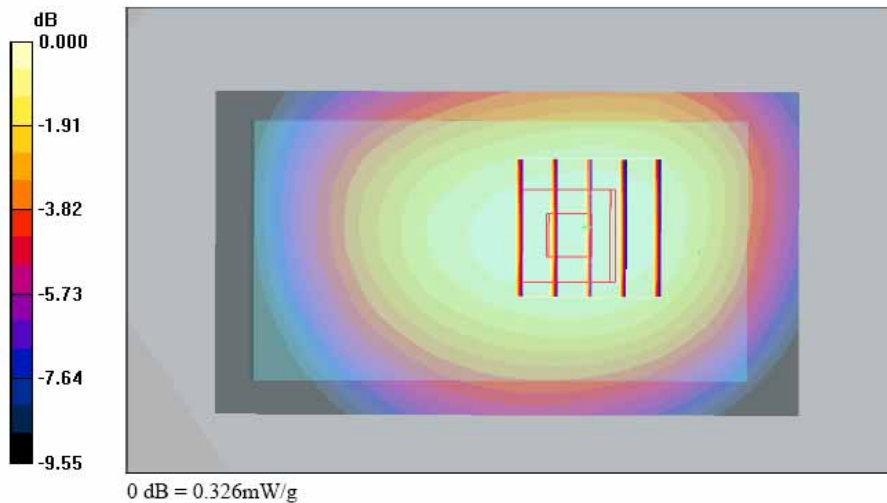



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date : 2007/7/11

Body_WCDMA Ch4182_Keypad Down with 1.5cm Gap_20070711_RMC12.2K

DUT: 761327

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_850 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.8 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.33, 6.33, 6.33); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch4182/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.698 mW/g

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.1 V/m; Power Drift = -0.009 dB

Peak SAR (extrapolated) = 0.842 W/kg

SAR(1 g) = 0.666 mW/g; SAR(10 g) = 0.494 mW/g

Maximum value of SAR (measured) = 0.700 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.1 V/m; Power Drift = -0.009 dB

Peak SAR (extrapolated) = 0.954 W/kg

SAR(1 g) = 0.641 mW/g; SAR(10 g) = 0.430 mW/g

Maximum value of SAR (measured) = 0.684 mW/g

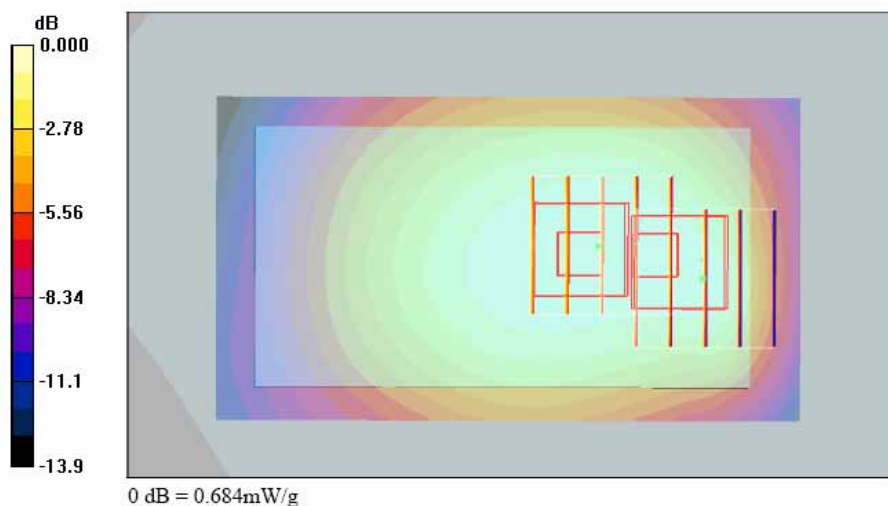



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date : 2007/7/11

Body_WCDMA Ch4182_Keypad Down with 1.5cm Gap_20070711_RMC64K

DUT: 761327

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_850 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.969 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.8 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.33, 6.33, 6.33); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch4182/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$.

Maximum value of SAR (interpolated) = 0.848 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.9 V/m; Power Drift = -0.036 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.796 mW/g; SAR(10 g) = 0.596 mW/g

Maximum value of SAR (measured) = 0.849 mW/g

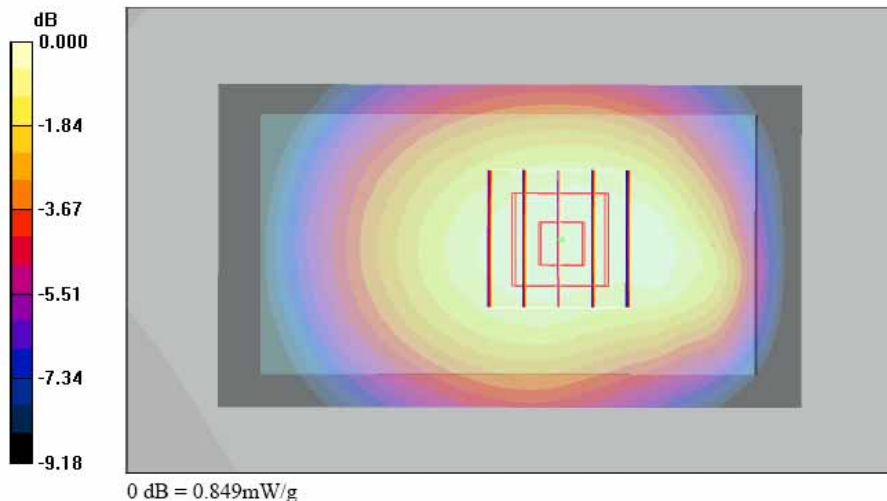



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date : 2007/7/11

Body_WCDMA Ch4182_Keypad Down with 1.5cm Gap_20070711_RMC144K

DUT: 761327

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_850 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.8 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.33, 6.33, 6.33); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch4182/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.848 mW/g

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.9 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.796 mW/g; SAR(10 g) = 0.596 mW/g

Maximum value of SAR (measured) = 0.846 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.9 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.789 mW/g; SAR(10 g) = 0.559 mW/g

Maximum value of SAR (measured) = 0.842 mW/g

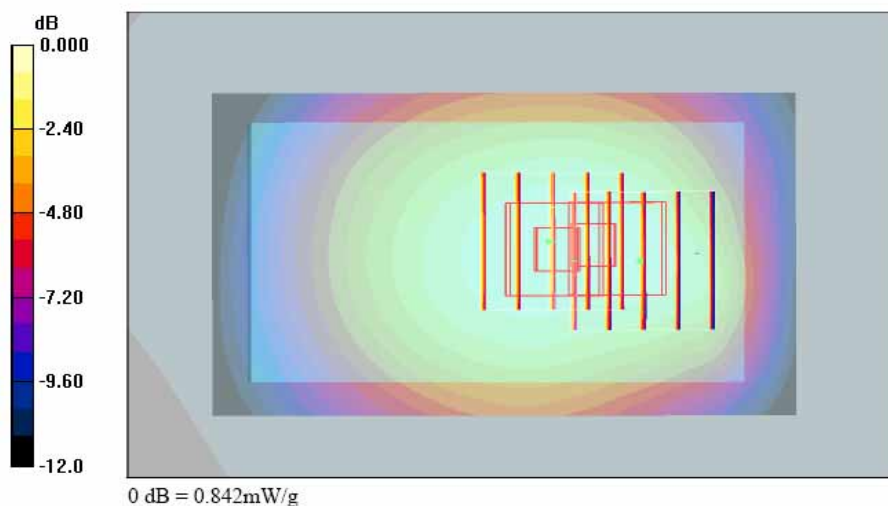



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date : 2007/7/11

Body_WCDMA Ch4182_Keypad Down with 1.5cm Gap_20070711_RMC384K

DUT: 761327

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_850 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.969 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.8 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.33, 6.33, 6.33); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch4182/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.846 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 26.2 V/m; Power Drift = 0.187 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.814 mW/g; SAR(10 g) = 0.605 mW/g

Maximum value of SAR (measured) = 0.852 mW/g

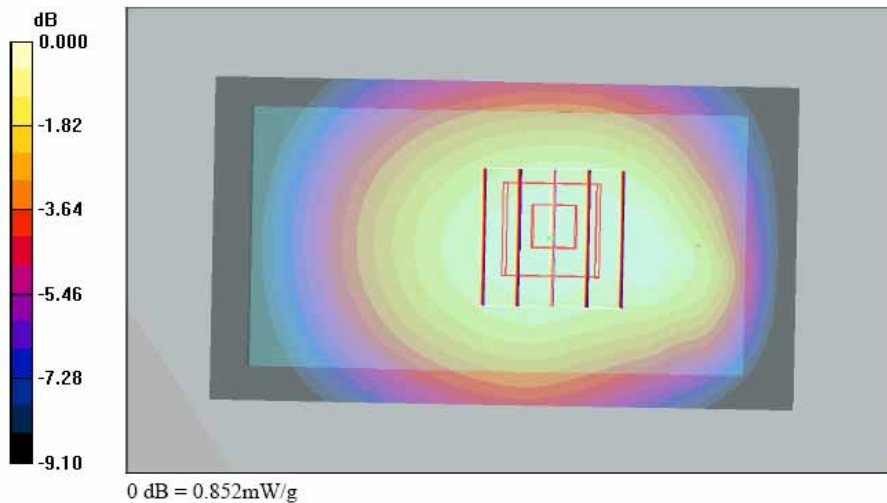



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date : 2007/7/11

Body_WCDMA Ch4182_Keypad Down with 1.5cm Gap_20070711_RMC384K_Bluetooth On

DUT: 761327

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_850 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.8 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.33, 6.33, 6.33); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch4182/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.936 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.0 V/m; Power Drift = -0.076 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.892 mW/g; SAR(10 g) = 0.661 mW/g

Maximum value of SAR (measured) = 0.939 mW/g

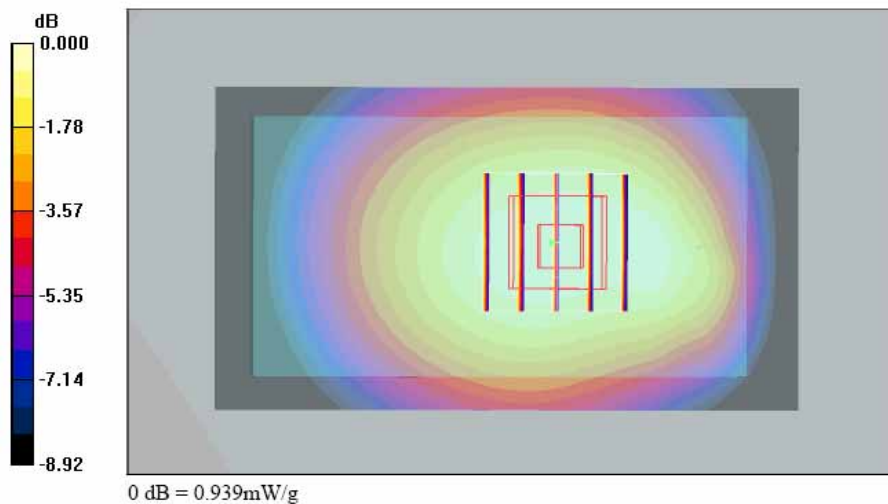



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date: 2007/7/11

Body_WCDMA Ch4182_Keypad Down with 1.5cm Gap_20070711_RMC12.2K+HSDPA

DUT: 761327

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_850 Medium parameters used : $f = 836.4 \text{ MHz}$; $\sigma = 0.969 \text{ mho/m}$; $\epsilon_r = 54.3$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.9°C ; Liquid Temperature : 21.4°C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.33, 6.33, 6.33); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch4182/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.779 mW/g

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.1 V/m ; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 0.948 W/kg

SAR(1 g) = 0.745 mW/g ; SAR(10 g) = 0.551 mW/g

Maximum value of SAR (measured) = 0.787 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.1 V/m ; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 0.966 W/kg

SAR(1 g) = 0.717 mW/g ; SAR(10 g) = 0.503 mW/g

Maximum value of SAR (measured) = 0.776 mW/g

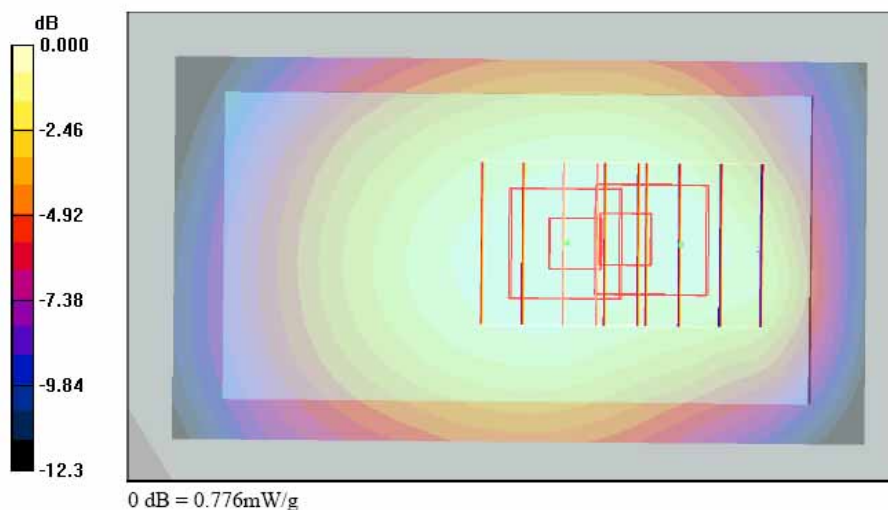



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date : 2007/7/6

Body_WCDMA Ch9400_Keypad Up with 1.5cm Gap_20070706_RMC12.2K

DUT: 761327

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL_1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.7 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.67, 4.67, 4.67); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch9400/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.264 mW/g


Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.2 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 0.335 W/kg

SAR(1 g) = 0.243 mW/g; SAR(10 g) = 0.163 mW/g

Maximum value of SAR (measured) = 0.259 mW/g

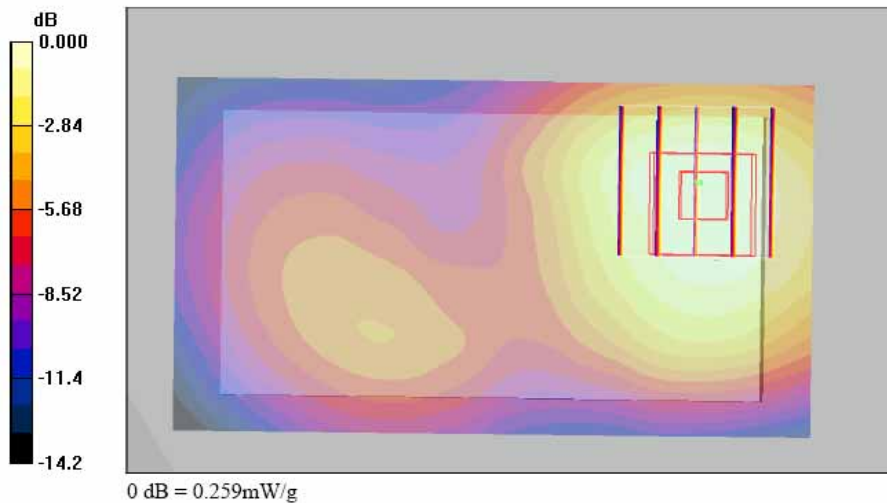



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date : 2007/7/6

Body_WCDMA Ch9400_Keypad Down with 1.5cm Gap_20070706_RMC12.2K

DUT: 761327

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL_1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.7 °C; Liquid Temperature : 21.3 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.67, 4.67, 4.67); Calibrated: 2006/9/19

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn577; Calibrated: 2006/11/21

- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch9400/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.637 mW/g


Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.6 V/m; Power Drift = 0.004 dB

Peak SAR (extrapolated) = 0.812 W/kg

SAR(1 g) = 0.561 mW/g; SAR(10 g) = 0.355 mW/g

Maximum value of SAR (measured) = 0.608 mW/g

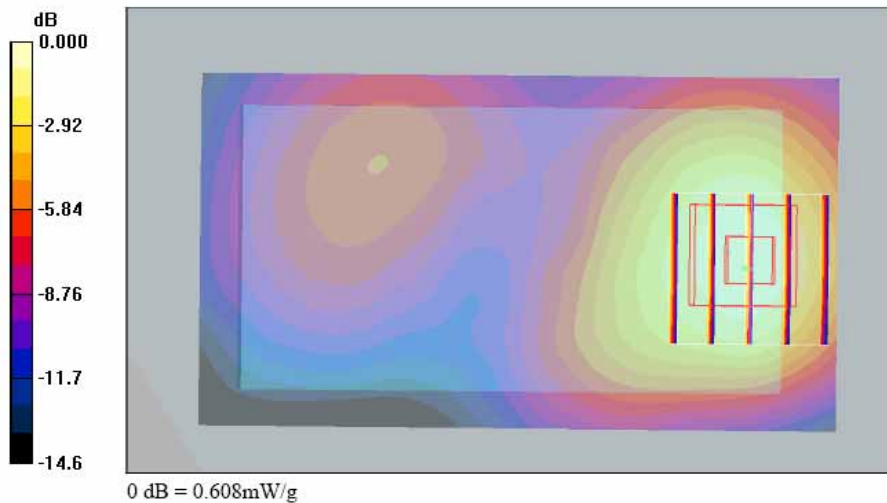



Test Laboratory: Sporton International Inc. SAR Testing Lab

Date : 2007/7/6

Body_WCDMA Ch9400_Keypad Down with 1.5cm Gap_20070706_RMC64K

DUT: 761327

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL_1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.7 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.67, 4.67, 4.67); Calibrated: 2006/9/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2006/11/21
- Phantom: SAM-A; Type: QD 000 P40 C; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Ch9400/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.648 mW/g

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.0 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.957 W/kg

SAR(1 g) = 0.601 mW/g; SAR(10 g) = 0.358 mW/g

Maximum value of SAR (measured) = 0.698 mW/g

