



中国认可
国际互认
检测
TESTING
CNAS L2264

RF TEST REPORT

Applicant ZTE Corporation
FCC ID SRQ-VFD710
Product LTE/WCDMA/GSM(GPRS) Multi-Mode Digital
Mobile Phone
Brand ZTE
Model VFD 710 / Vodafone VFD 710
Report No. RXC1702-0029RF03R1
Issue Date May 4, 2017

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2016)/ FCC CFR47 Part 27C (2016)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Xianqing Li

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

Table of Contents

1	Test Laboratory.....	4
1.1	Notes of the Test Report.....	4
1.2	Test facility.....	4
1.3	Testing Location.....	5
2	General Description of Equipment under Test.....	6
2.1	Applied Standards.....	8
3	Test Configuration.....	9
4	Test Information.....	10
4.1	RF Power Output.....	10
4.2	Effective Isotropic Radiated Power.....	13
4.3	Occupied Bandwidth.....	17
4.4	Band Edge Compliance.....	23
4.5	Peak-to-Average Power Ratio (PAPR).....	41
4.6	Frequency Stability.....	43
4.7	Spurious Emissions at Antenna Terminals.....	46
4.8	Radiates Spurious Emission.....	53
5	Main Test Instruments.....	61
ANNEX A:	EUT Appearance and Test Setup.....	62
A.1	EUT Appearance.....	62
A.2	Test Setup.....	64

Summary of Measurement Results

Number	Test Case	Clause in FCC rules	Verdict
1	RF power output	2.1046	PASS
2	Effective Isotropic Radiated power	27.50(h)(2)	PASS
3	Occupied Bandwidth	2.1049	PASS
4	Band Edge Compliance	27.53(m)	PASS
5	Peak-to-Average Power Ratio	27.50(d)/KDB971168 D01(5.7)	PASS
6	Frequency Stability	2.1055 / 27.54	PASS
7	Spurious Emissions at Antenna Terminals	2.1051 / 27.53(m)	PASS
8	Radiates Spurious Emission	2.1053 /27.53(m)	PASS
Date of Testing: February 15, 2017 ~ March 30, 2017			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard.			

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement by any government agencies.

1.2 Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (recognition number is 428261)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2 General Description of Equipment under Test

Client Information

Applicant	ZTE Corporation
Applicant address	ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R. China
Manufacturer	ZTE Corporation
Manufacturer address	ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R. China

General information

EUT Description			
Model	VFD 710 / Vodafone VFD 710		
Brand Name	ZTE		
Marketing Name	Vodafone Smart V8 VFD 710		
IMEI	SIM 1: 355705080022648 SIM 2: 355705080022945		
HW Version	VFD 710 MP		
SW Version	VFD-710_ATPB03; VFD-710_ATPB03 /EG-Open-D_B03		
Power Supply	Battery/AC adapter		
Antenna Type	Internal Antenna		
Test Mode(s)	LTE Band 7		
Maximum E.I.R.P./ E.R.P.	LTE Band 7: 24.65dBm		
Rated Power Supply Voltage	3.85V		
Extreme Voltage	Minimum: 3.5V Maximum: 4.4V		
Extreme Temperature	Lowest: -10°C Highest: +55°C		
Operating Frequency Range(s)	Mode	Tx (MHz)	Rx (MHz)
	LTE Band 7	2500 ~ 2570	2620 ~ 2690
EUT Accessory			
Adapter	Manufacturer: RUIJING Model: STC-A515A-Z Input power:100-240VAC 50-60Hz 300mA Output power:5V DC 1500mA		
Battery 1	Manufacturer: SCUD (FUJIAN) Electronics Co., Ltd. Model: Li3930T44P6h816437		
Battery 2	Manufacturer: Harbin Coslight Power Co., Ltd. Model: Li3930T44P6h816437		
Earphone	Manufacturer: GoerTek Inc. Model: HA3-6		
USB Extend Cable	100cm Cable, Shielded		



Note: 1. The information of the EUT is declared by the manufacturer. Please refer to the specifications or user manual for details.

Difference Configuration Statement		
Configuration	Configuration 1	Configuration 2
Software Version	VFD-710_ATPB03	VFD-710_ATPB03 /EG-Open-D_B03
SIM Card Slot	SIM 1	SIM 1, SIM 2
Others	The same	The same

The difference between the two EUT is only the Software Version and the quantity of SIM Card Slot, however, only the Software Version of VFD-710_ATPB03 /EG-Open-D_B03 (with 2 SIM Card Slots) is refer to this report.



2.1 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

FCC CFR47 Part 2 (2016)

FCC CFR47 Part 27C (2016)

ANSI/TIA-603-D (2010)

KDB 971168 D01 Power Meas License Digital Systems v02r02

3 Test Configuration

There is more than one SIM card slot, each one should be applied throughout the compliance test respectively, and however, only the worst case (SIM 1) will be recorded in this report

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (Z axis, vertical polarization) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated. Subsequently, only the worst case emissions are reported.

The following testing in LTE is set based on the maximum RF Output Power.

The following testing in different Bandwidth is set to detail in the following table:

Test modes are chosen to be reported as the worst case configuration below for LTE Band 7:

Test items	Modes	Bandwidth (MHz)						Modulation		RB			Test Channel			
		1.4	3	5	10	15	20	QPSK	16QAM	1	50%	100%	L	M	H	
RF power output	LTE 7	-	-	O	O	O	O	O	O	O	O	O	O	O	O	O
Occupied Bandwidth	LTE 7	-	-	O	O	O	O	O	O	-	-	O	O	O	O	
Band Edge Compliance	LTE 7	-	-	O	O	O	O	O	O	O	-	O	O	-	O	
Peak-to-Average Power Ratio	LTE 7	-	-	O	O	O	O	O	O	-	-	O	O	O	O	
Frequency Stability	LTE 7	-	-	O	O	O	O	O	O	-	-	O	-	O	-	
Spurious Emissions at Antenna Terminals	LTE 7	-	-	O	O	O	O	O	-	O	-	-	O	O	O	
Radiates Spurious Emission	LTE 7	-	-	O	O	O	O	O	-	O	-	-	O	O	O	
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.															

4 Test Information

4.1 RF Power Output


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

Test Setup

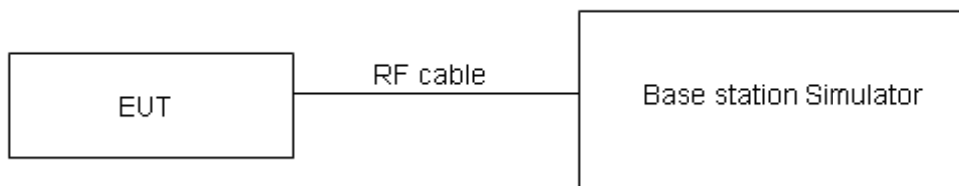

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

Limits

No specific RF power output requirements in part 2.1046.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=0.4$ dB.

Test Results

LTE FDD Band 7				Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20775/2502.5	21100/2535	21425/2567.5
5MHz	QPSK	1	0	23.21	22.90	23.17
		1	13	23.04	23.10	23.00
		1	24	23.11	23.14	23.01
		12	0	22.23	22.12	22.34
		12	6	22.11	22.18	22.23
		12	13	22.19	22.22	22.23
		25	0	22.23	22.23	22.16
	16QAM	1	0	22.43	22.28	22.36
		1	13	22.29	22.27	22.25
		1	24	22.28	22.37	22.18
		12	0	21.21	21.01	21.10
		12	6	20.99	21.09	21.20
		12	13	20.89	21.27	21.06
		25	0	20.87	21.12	21.11
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20800/2505	21100/2535	21400/2565
10MHz	QPSK	1	0	23.23	22.91	23.20
		1	25	23.07	23.15	23.04
		1	49	23.13	23.18	23.04
		25	0	22.26	22.17	22.38
		25	13	22.14	22.23	22.27
		25	25	22.21	22.26	22.28
		50	0	22.31	22.25	22.20
	16QAM	1	0	22.45	22.31	22.38
		1	25	22.32	22.31	22.28
		1	49	22.31	22.39	22.21
		25	0	21.24	21.06	21.14
		25	13	21.01	21.13	21.23
		25	25	20.92	21.32	21.10
		50	0	20.90	21.17	21.15
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20825/2507.5	21100/2535	21375/2562.5
15MHz	QPSK	1	0	23.22	22.87	23.18
		1	38	23.05	23.14	23.01
		1	74	23.10	23.13	23.00
		36	0	22.24	22.13	22.35
		36	18	22.11	22.18	22.23
		36	39	22.18	22.23	22.24
		75	0	22.29	22.21	22.15



Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20850/2510	21100/2535	21350/2560
	16QAM	1	0	22.40	22.29	22.36
		1	38	22.30	22.28	22.26
		1	74	22.28	22.35	22.18
		36	0	21.21	21.04	21.11
		36	18	20.98	21.08	21.19
		36	39	20.90	21.28	21.07
		75	0	20.87	21.12	21.11
20MHz	QPSK	1	0	23.29	22.93	23.25
		1	50	23.14	23.20	23.09
		1	99	23.18	23.22	23.07
		50	0	22.31	22.18	22.41
		50	25	22.19	22.24	22.30
		50	50	22.25	22.28	22.30
		100	0	22.36	22.26	22.21
	16QAM	1	0	22.48	22.35	22.41
		1	50	22.36	22.36	22.32
		1	99	22.36	22.42	22.26
		50	0	21.28	21.10	21.18
		50	25	21.05	21.16	21.26
		50	50	20.97	21.33	21.13
		100	0	20.95	21.18	21.18

4.2 Effective Isotropic Radiated Power

Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Methods of Measurement

The measurement procedures in TIA- 603-D are used.

1. The EUT was placed on a turntable with 1.5 meter height in a fully anechoic chamber.
2. The EUT was set at 3 meters from the receiving antenna, which was mounted on the antennatower.
3. UMTS operating modes: Set RBW= 100 KHz, VBW= 300 KHz, RMS detector over frame, and use channel power option with bandwidth=5MHz, per section 4.0 of KDB 971168 D01.
4. The table was rotated 360 degrees to determine the position of the highest radiated power.
5. The height of the receiving antenna is adjusted to look for the maximum ERP/EIRP.
6. Taking the record of maximum ERP/EIRP.
7. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
8. The conducted power at the terminal of the dipole antenna is measured.
9. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.

$$10. \text{ERP/EIRP} = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$$

P_s (dBm) : Input power to substitution antenna.

G_s (dBi or dBd) : Substitution antenna Gain.

$$E_t = R_t + AF$$

$$E_s = R_s + AF$$


AF (dB/m) : Receive antenna factor

R_t : The highest received signal in spectrum analyzer for EUT.

R_s : The highest received signal in spectrum analyzer for substitution antenna.

$$\text{EIRP} = \text{E.R.P} + 2.15$$

Test Setup

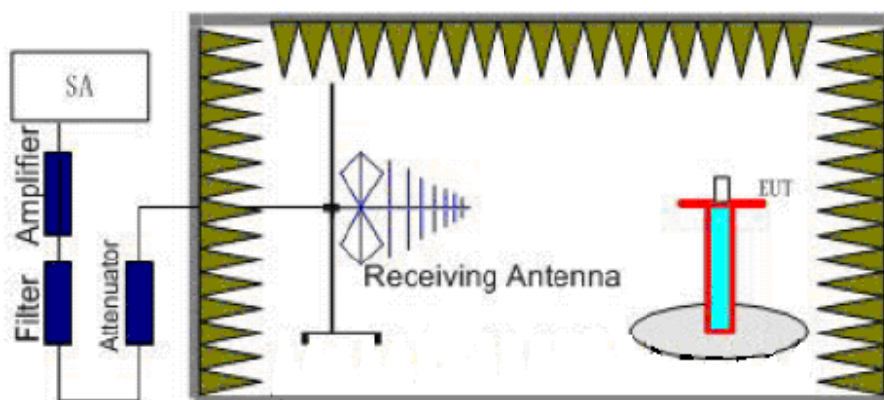

**Limits**

Rule Part 27.50(h) (2) specifies that “Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.”

Part 27.50(h)(2) Limit (EIRP)-LTE 7	$\leq 2 \text{ W}$ (33 dBm)
-------------------------------------	-----------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 1.19 \text{ dB}$

Test Results

LTE Band 7								
Band width	Frequency (MHz)	Ant Pot (H/V)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	Conclusion
5MHz (QPSK)	2502.5	H	-37.86	-59.64	0.00	1.81	22.29	Pass
	2535	H	-38.97	-59.72	0.00	1.81	22.84	Pass
	2567.5	H	-39.83	-59.98	0.00	1.83	23.68	Pass
	2502.5	V	-42.22	-59.31	0.00	1.81	18.30	Pass
	2535	V	-43.04	-59.11	0.00	1.81	17.14	Pass
	2567.5	V	-44.31	-59.59	0.00	1.83	19.31	Pass
5MHz (16QAM)	2502.5	H	-38.13	-59.64	0.00	1.81	22.46	Pass
	2535	H	-39.24	-59.72	0.00	1.81	23.02	Pass
	2567.5	H	-40.10	-59.98	0.00	1.83	23.82	Pass
	2502.5	V	-42.49	-59.31	0.00	1.81	18.65	Pass
	2535	V	-43.31	-59.11	0.00	1.81	17.45	Pass
	2567.5	V	-44.58	-59.59	0.00	1.83	19.58	Pass
10MHz (QPSK)	2505	H	-38.94	-59.61	0.00	1.82	23.54	Pass
	2535	H	-38.78	-59.72	0.00	1.81	24.08	Pass
	2565	H	-38.11	-60.02	0.00	1.81	24.14	Pass
	2505	V	-43.66	-59.33	0.00	1.82	19.26	Pass
	2535	V	-42.79	-59.11	0.00	1.81	18.31	Pass
	2565	V	-42.48	-59.59	0.00	1.81	19.13	Pass
10MHz (16QAM)	2505	H	-39.34	-59.61	0.00	1.82	23.69	Pass
	2535	H	-39.18	-59.72	0.00	1.81	24.35	Pass
	2565	H	-38.51	-60.02	0.00	1.81	24.65	Pass
	2505	V	-44.06	-59.33	0.00	1.82	19.35	Pass
	2535	V	-43.19	-59.11	0.00	1.81	18.35	Pass
	2565	V	-42.88	-59.59	0.00	1.81	19.67	Pass
15MHz (QPSK)	2507.5	H	-38.11	-59.71	0.00	1.80	22.82	Pass
	2535	H	-39.27	-59.72	0.00	1.81	23.49	Pass
	2562.5	H	-39.82	-60.08	0.00	1.82	23.88	Pass
	2507.5	V	-42.92	-59.29	0.00	1.80	18.41	Pass
	2535	V	-43.74	-59.72	0.00	1.81	18.01	Pass
	2562.5	V	-44.11	-59.46	0.00	1.82	18.62	Pass
15MHz (16QAM)	2507.5	H	-38.68	-59.71	0.00	1.80	23.01	Pass
	2535	H	-39.84	-59.72	0.00	1.81	23.89	Pass
	2562.5	H	-40.39	-60.08	0.00	1.82	23.98	Pass
	2507.5	V	-43.49	-59.29	0.00	1.80	18.61	Pass
	2535	V	-44.31	-59.72	0.00	1.81	18.21	Pass
	2562.5	V	-44.68	-59.46	0.00	1.82	18.78	Pass
20MHz (QPSK)	2510	H	-38.03	-59.52	0.00	1.77	22.94	Pass
	2535	H	-39.27	-59.72	0.00	1.81	23.42	Pass
	2560	H	-39.78	-60.01	0.00	1.82	23.89	Pass



	2510	V	-41.35	-59.09	0.00	1.77	18.25	Pass
	2535	V	-42.70	-59.72	0.00	1.81	17.75	Pass
	2560	V	-43.19	-59.52	0.00	1.82	18.38	Pass
20MHz (16QAM)	2510	H	-38.82	-59.52	0.00	1.77	23.21	Pass
	2535	H	-40.06	-59.72	0.00	1.81	23.69	Pass
	2560	H	-40.57	-60.01	0.00	1.82	23.94	Pass
	2510	V	-42.14	-59.09	0.00	1.77	18.41	Pass
	2535	V	-43.49	-59.72	0.00	1.81	17.87	Pass
	2560	V	-43.98	-59.52	0.00	1.82	18.54	Pass

Note: 1. EIRP= E.R.P+2.15

4.3 Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement


The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 100 kHz, VBW is set to 300 kHz for LTE Band 7 (5MHz).

RBW is set to 300 kHz, VBW is set to 1MHz for LTE Band 7 (10MHz/15MHz/20MHz).

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

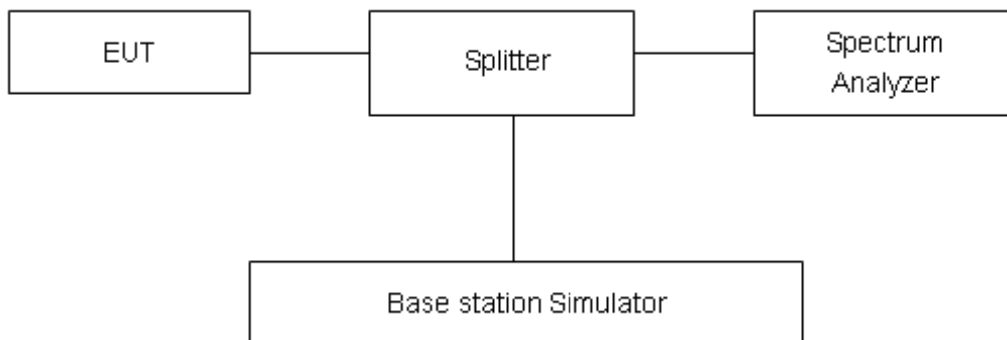

Limits







No specific occupied bandwidth requirements in part 2.1049.






Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=624\text{Hz}$.

Test Result

LTE Band 7						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	5	20775	2502.5	4.4994	5.017
			21100	2535	4.5134	5.009
			21425	2567.5	4.5308	5.040
		10	20800	2505	9.0219	10.07
			21100	2535	9.0355	10.02
			21400	2565	9.0638	10.14
		15	20825	2507.5	13.473	14.72
			21100	2535	13.441	14.67
			21375	2562.5	13.537	14.76
		20	20850	2510	17.914	19.31
			21100	2535	17.908	19.59
			21350	2560	17.975	19.35
	16QAM	5	20775	2502.5	4.5253	5.060
			21100	2535	4.5225	5.038
			21425	2567.5	4.5306	5.038
		10	20800	2505	9.0304	10.10
			21100	2535	9.0233	10.02
			21400	2565	9.0617	10.16
		15	20825	2507.5	13.480	14.75
			21100	2535	13.491	14.77
			21375	2562.5	13.516	14.80
		20	20850	2510	17.981	19.61
			21100	2535	17.926	19.28
			21350	2560	17.981	19.44

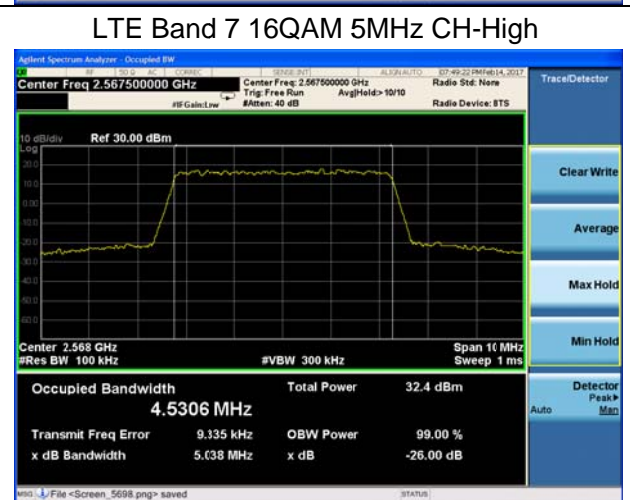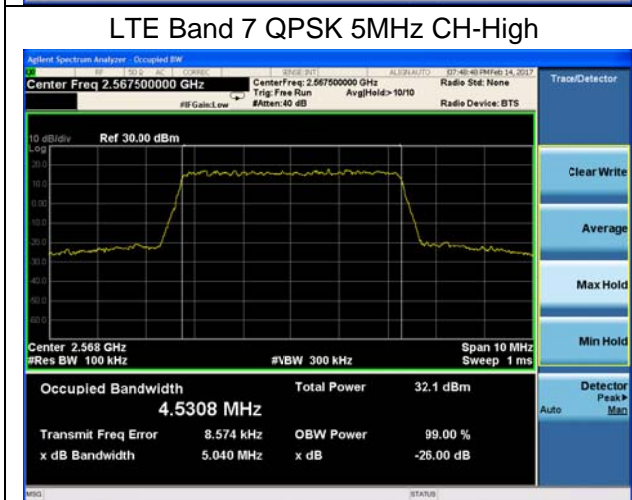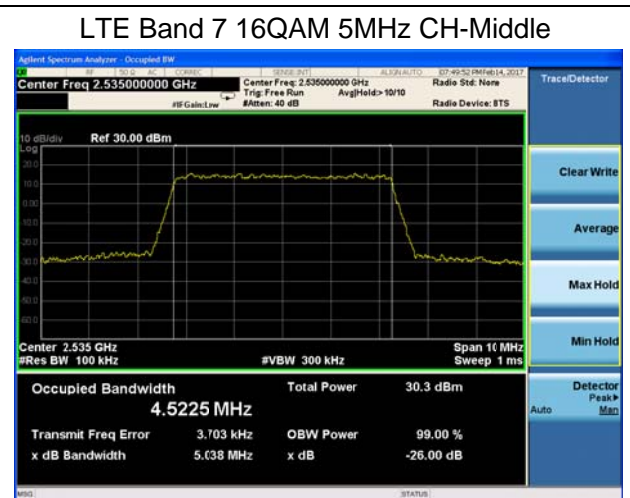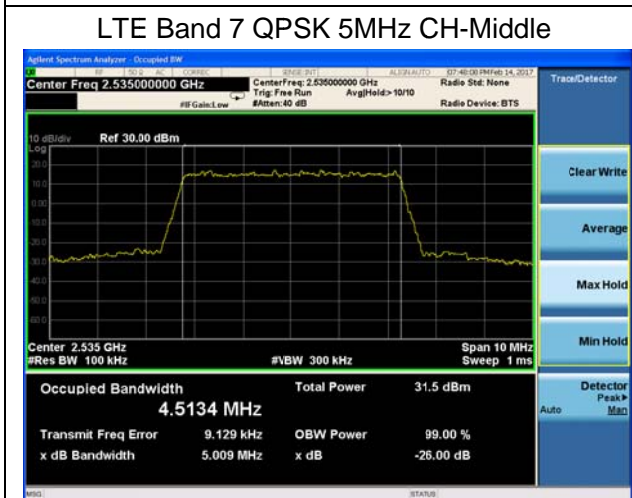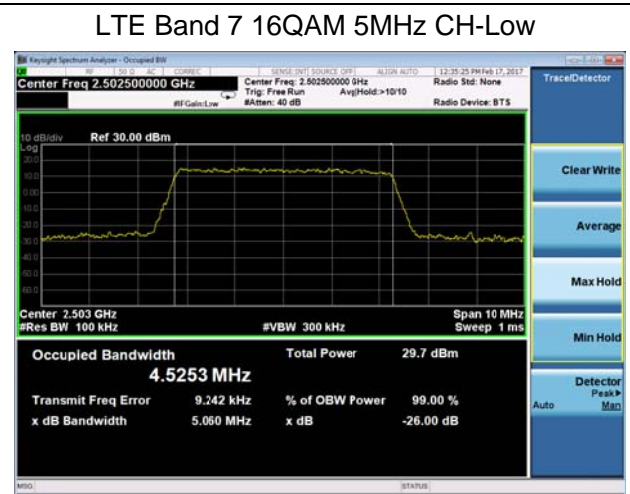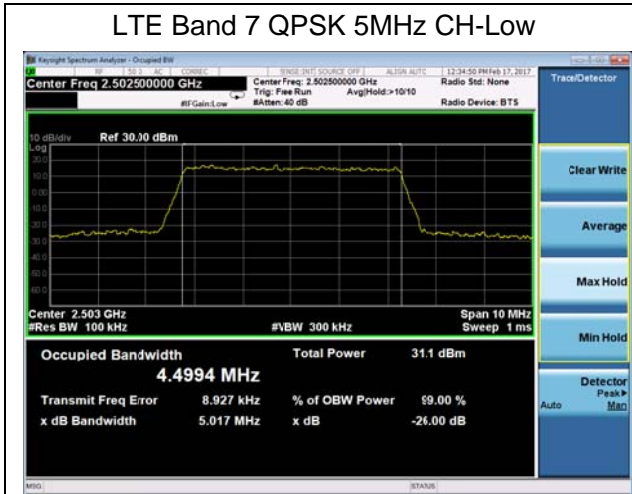

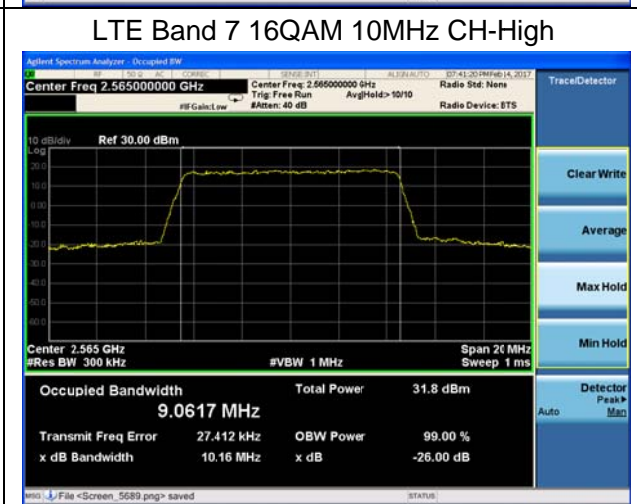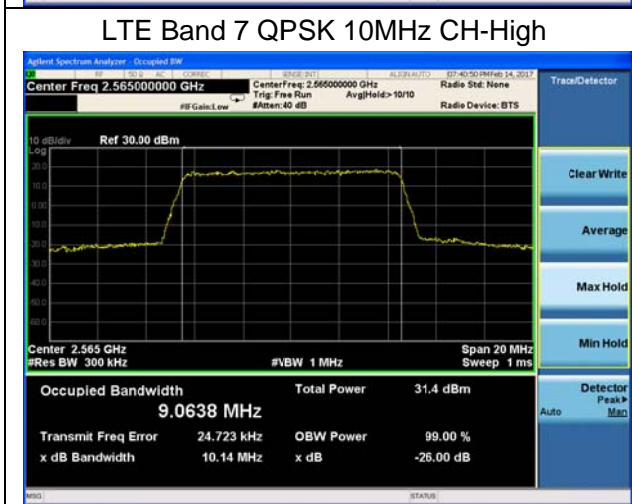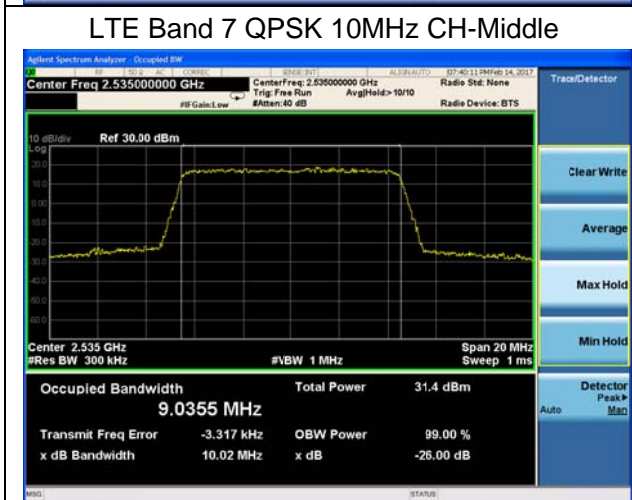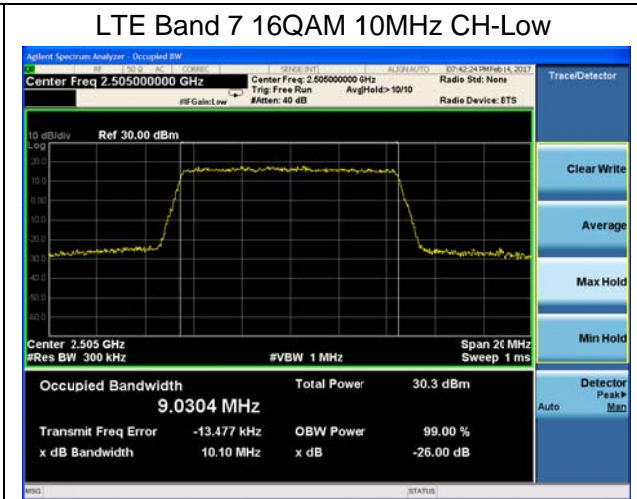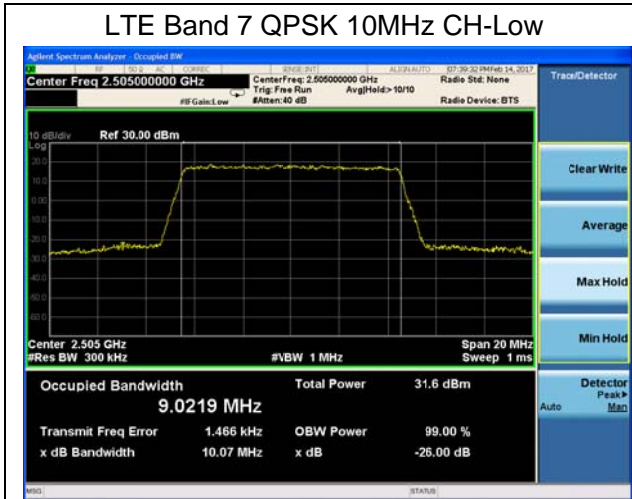




LTE Band 7 QPSK 15MHz CH-Low




LTE Band 7 16QAM 15MHz CH-Low




LTE Band 7 QPSK 15MHz CH-Middle

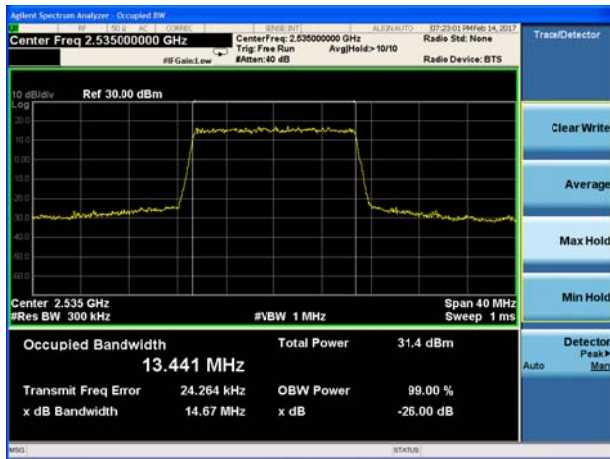


LTE Band 7 16QAM 15MHz CH-Middle






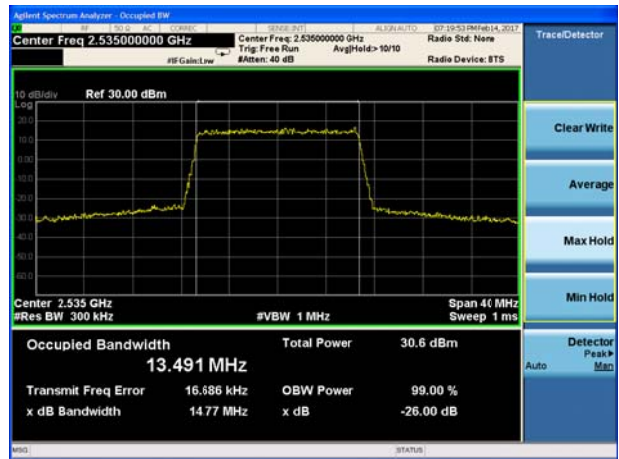


LTE Band 7 QPSK 15MHz CH-High

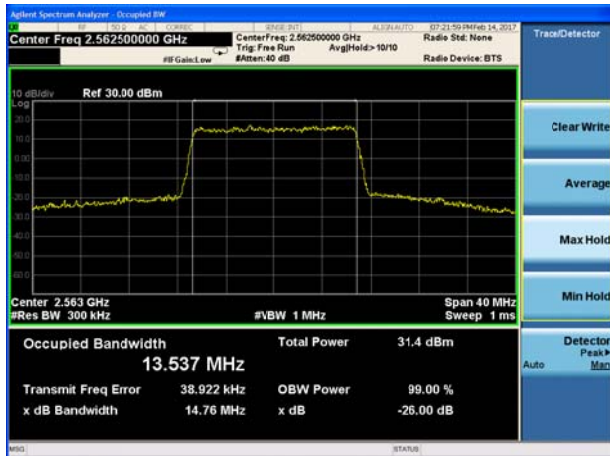

LTE Band 7 16QAM 15MHz CH-High

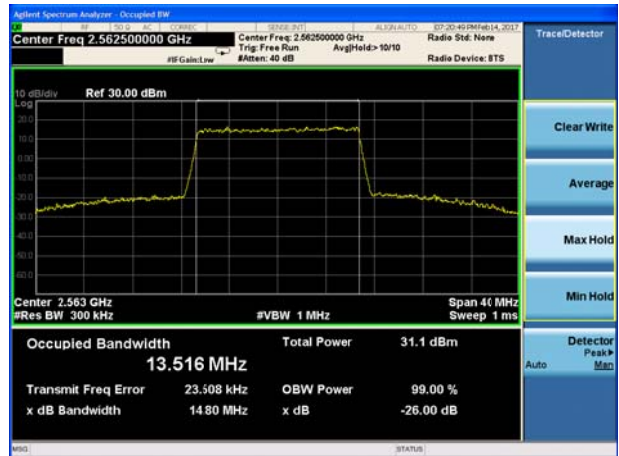

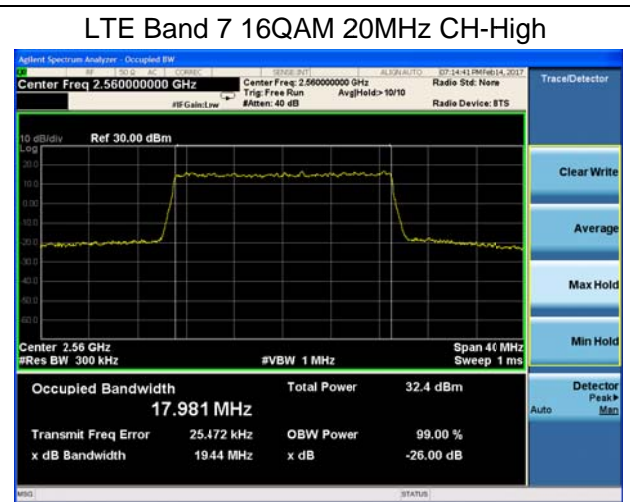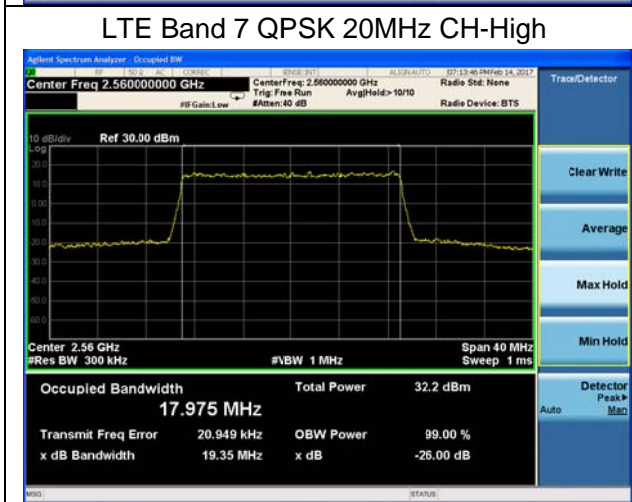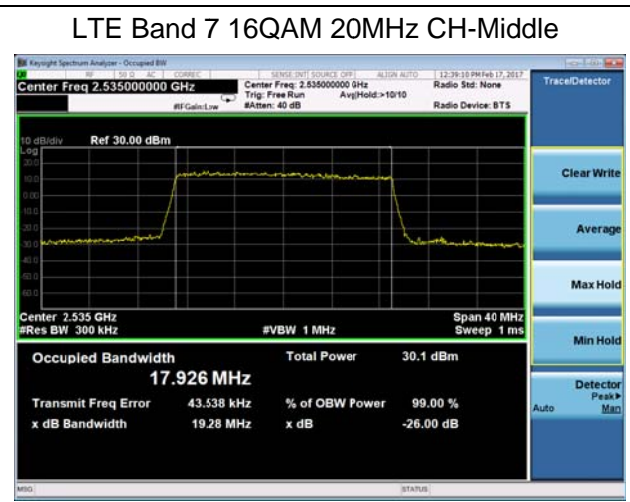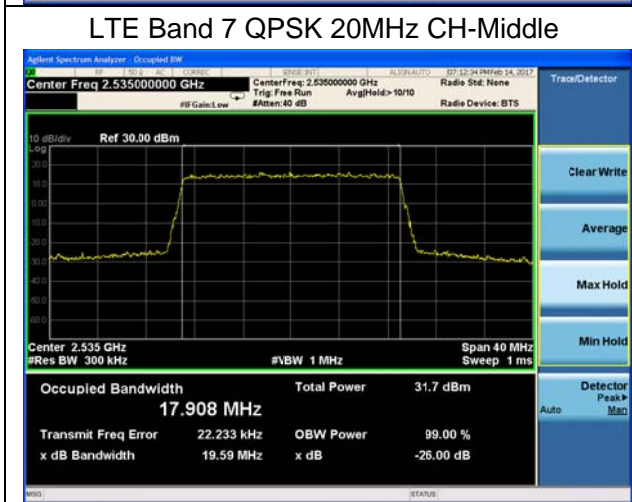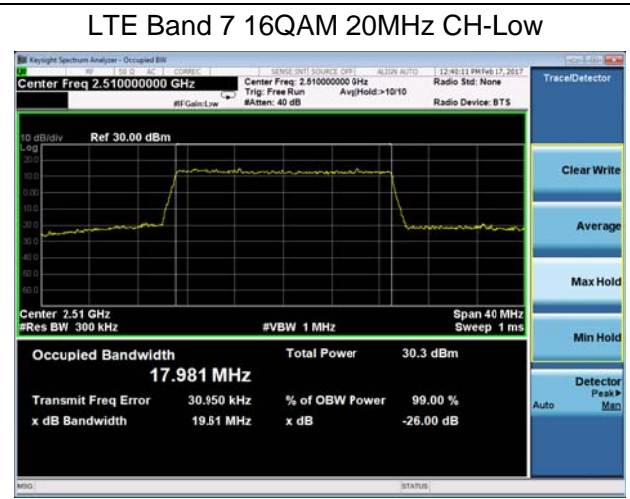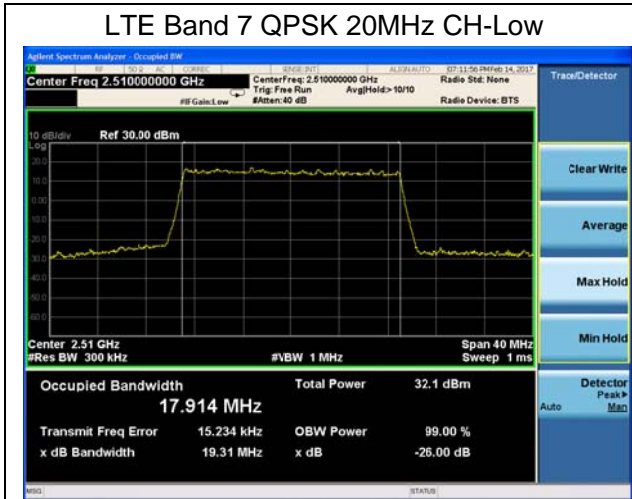

4.4 Band Edge Compliance

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured.

The testing follows KDB 971168 v02r02 Section 6.0

- 1.The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. For LTE Band 41 Set RBW \geq 1% EBW in the 1MHz band immediately outside and adjacent to the band edge. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 7 (5MHz).
RBW is set to 100 kHz, VBW is set to 300kHz for LTE Band 7 (10MHz).
RBW is set to 150 kHz, VBW is set to 510 kHz for LTE Band 7 (15MHz).
RBW is set to 200 kHz, VBW is set to 620 kHz for LTE Band 7 (20MHz) on spectrum analyzer.
4. Set spectrum analyzer with RMS detector.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. Checked that all the results comply with the emission limit line.

Test Setup

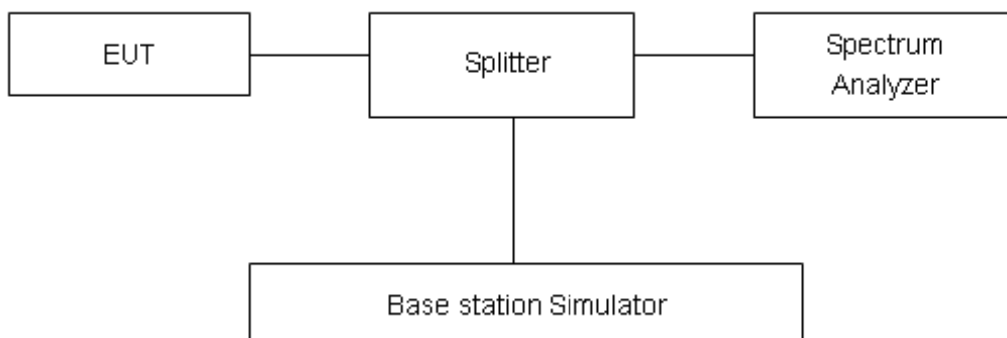

Limits

Part 27.53(m) (4)/ specifies that “for BRS and EBS stations. For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(4) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Example:

The limit line is derived from $43 + 10 \log (P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10 \log(P)] \text{ (dB)}$$

$$= [30 + 10 \log (P)] \text{ (dBm)} - [43 + 10 \log(P)] \text{ (dB)} = -13 \text{ dBm.}$$


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684$ dB.




Test Result

All the test traces in the plots shows the test results clearly.

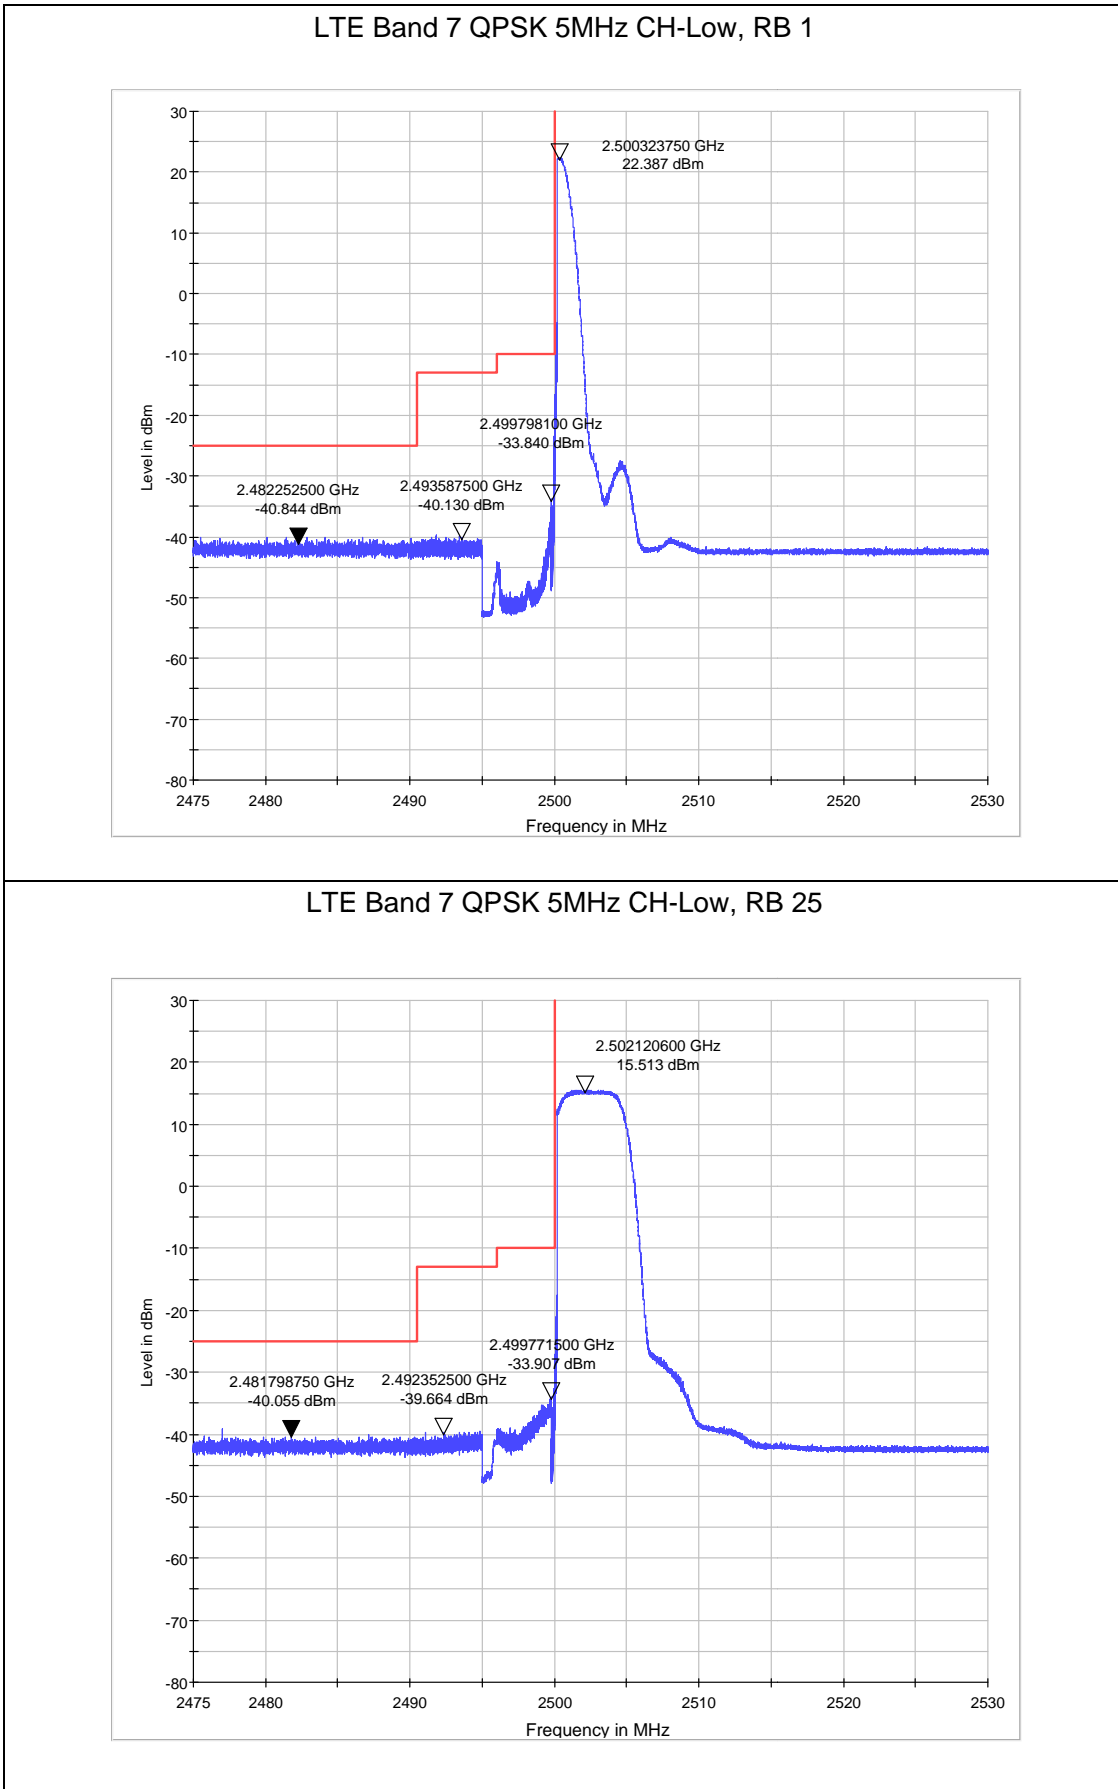




LTE Band 7 16QAM 5MHz CH-Low, RB 1

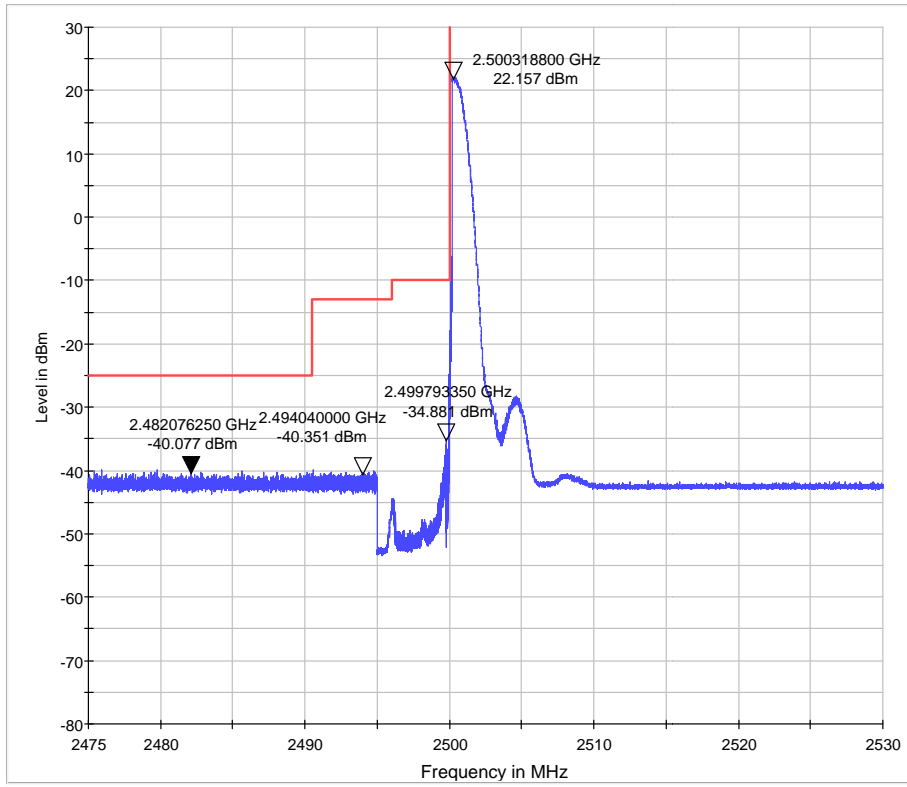


LTE Band 7 16QAM 5MHz CH-Low, RB 25

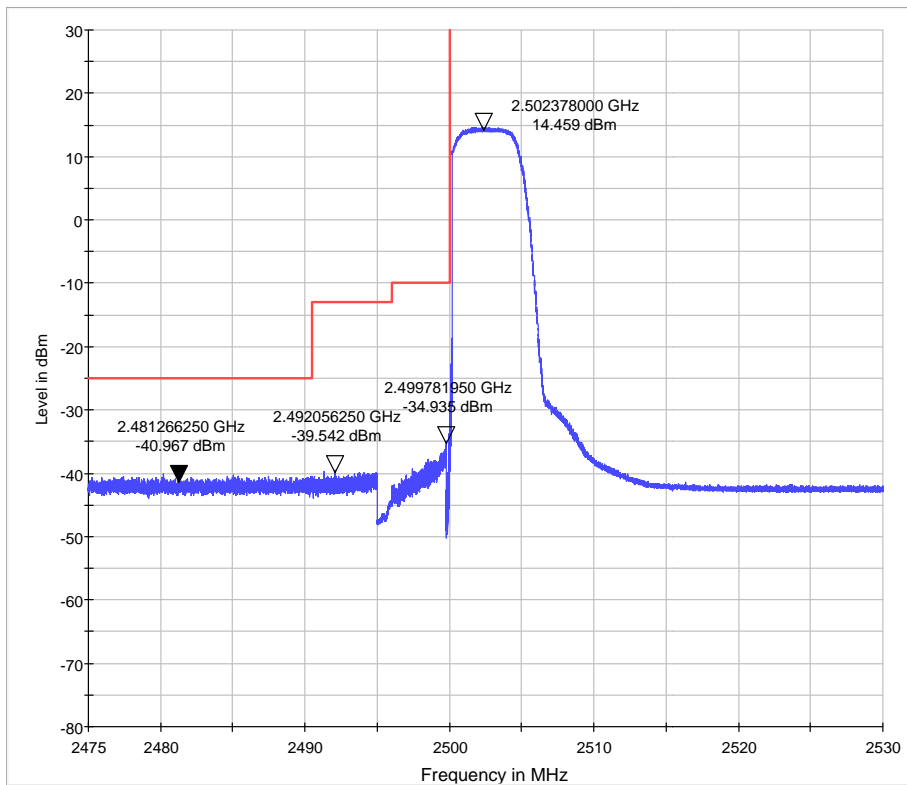




LTE Band 7 QPSK 10MHz CH-Low, RB 1

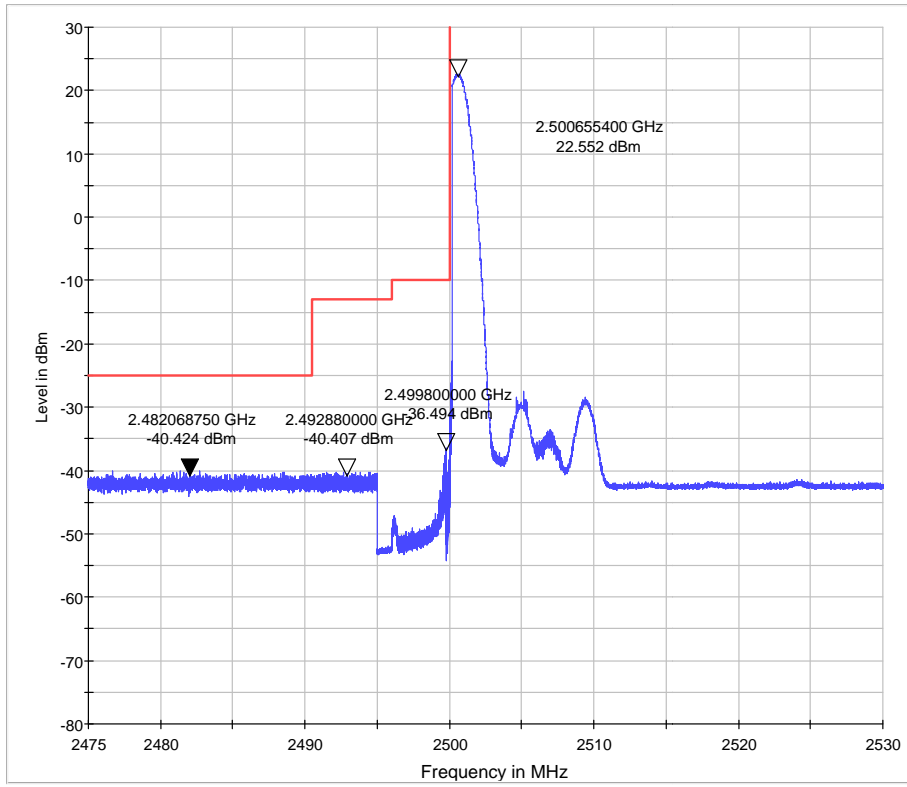


LTE Band 7 QPSK 10MHz CH-Low, RB 50

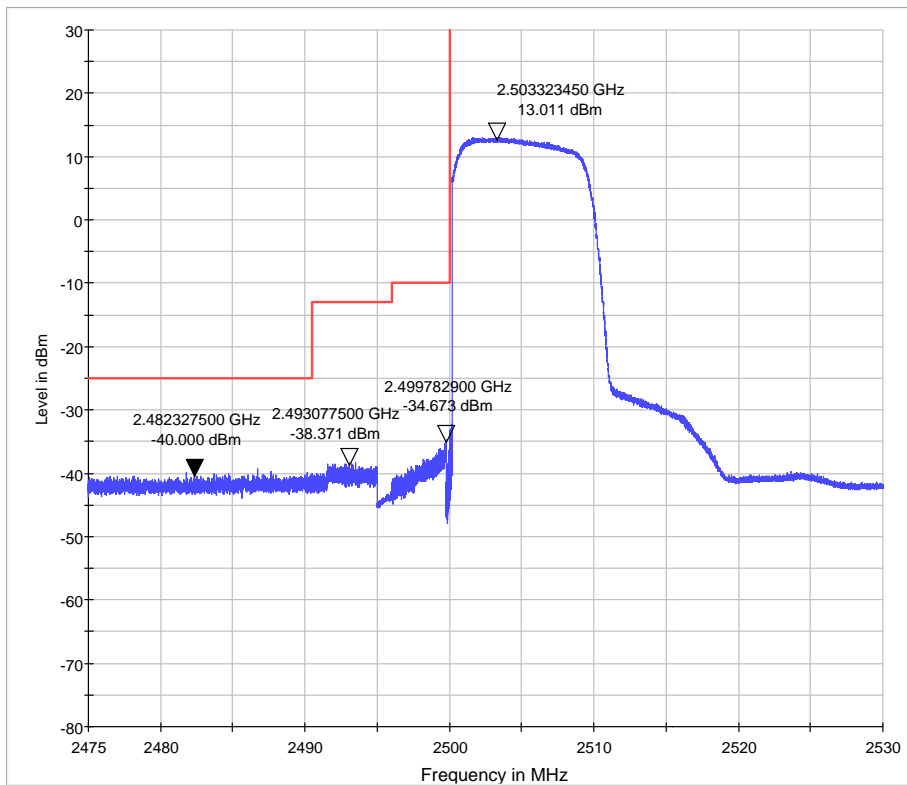




LTE Band 7 16QAM 10MHz CH-Low, RB 1

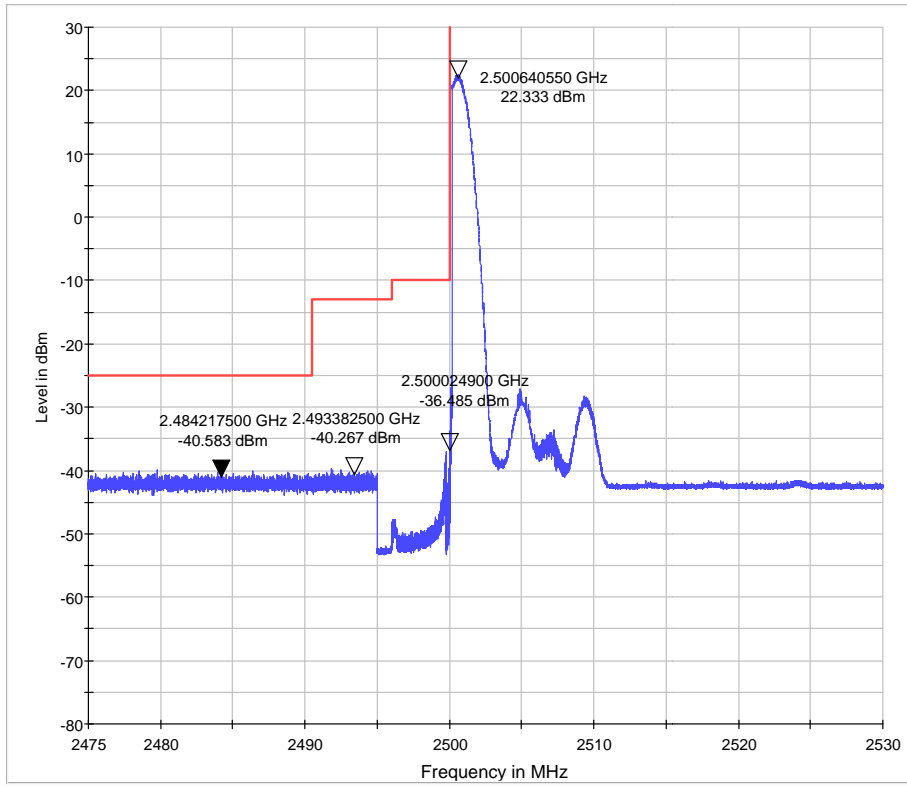


LTE Band 7 16QAM 10MHz CH-Low, RB 50

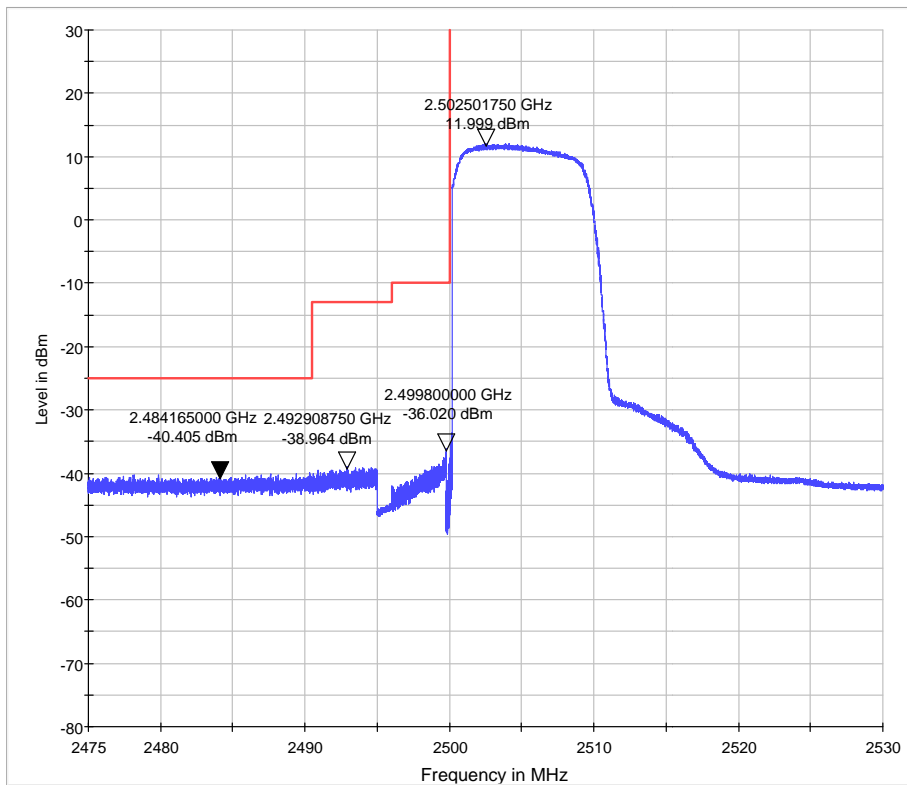




LTE Band 7 QPSK 15MHz CH-Low, RB 1

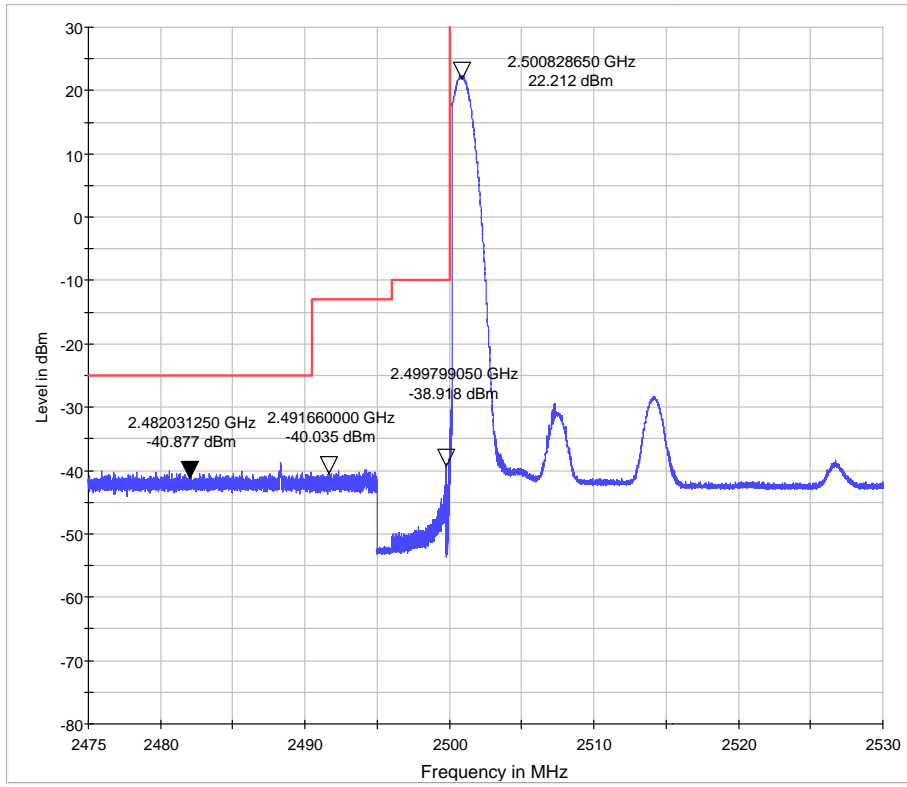


LTE Band 7 QPSK 15MHz CH-Low, RB 75

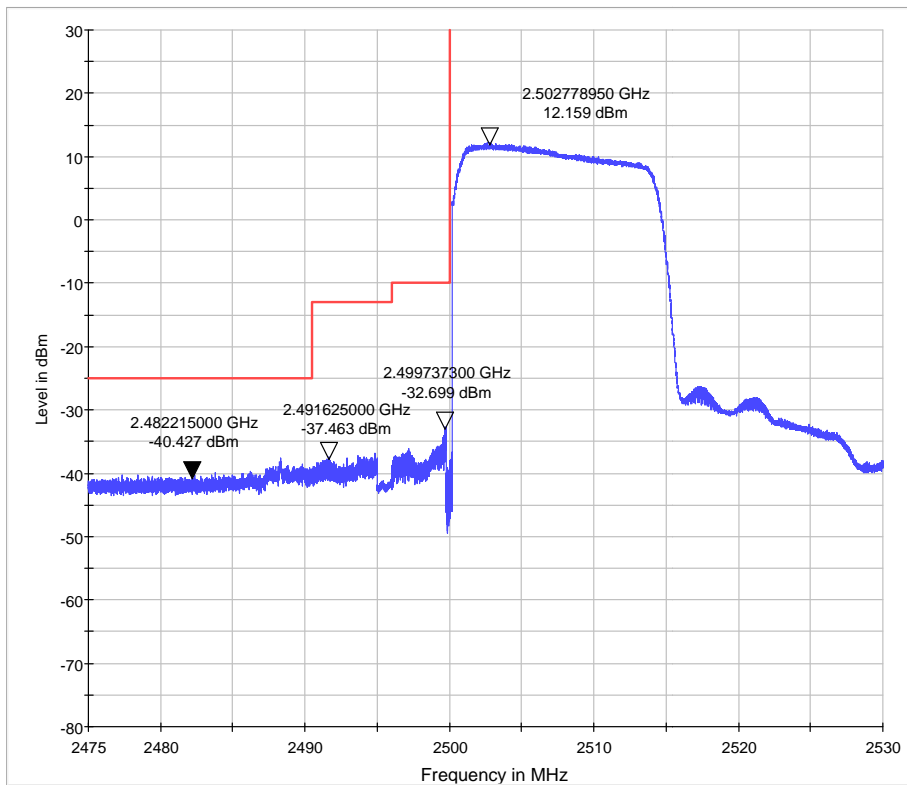




LTE Band 7 16QAM 15MHz CH-Low, RB 1

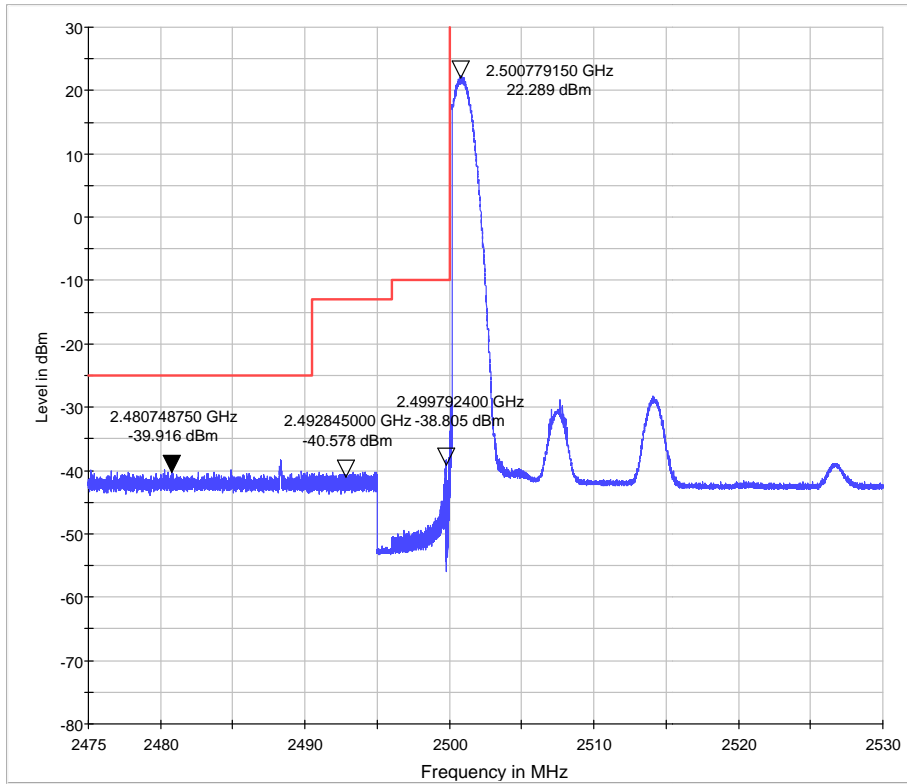


LTE Band 7 16QAM 15MHz CH-Low, RB 75

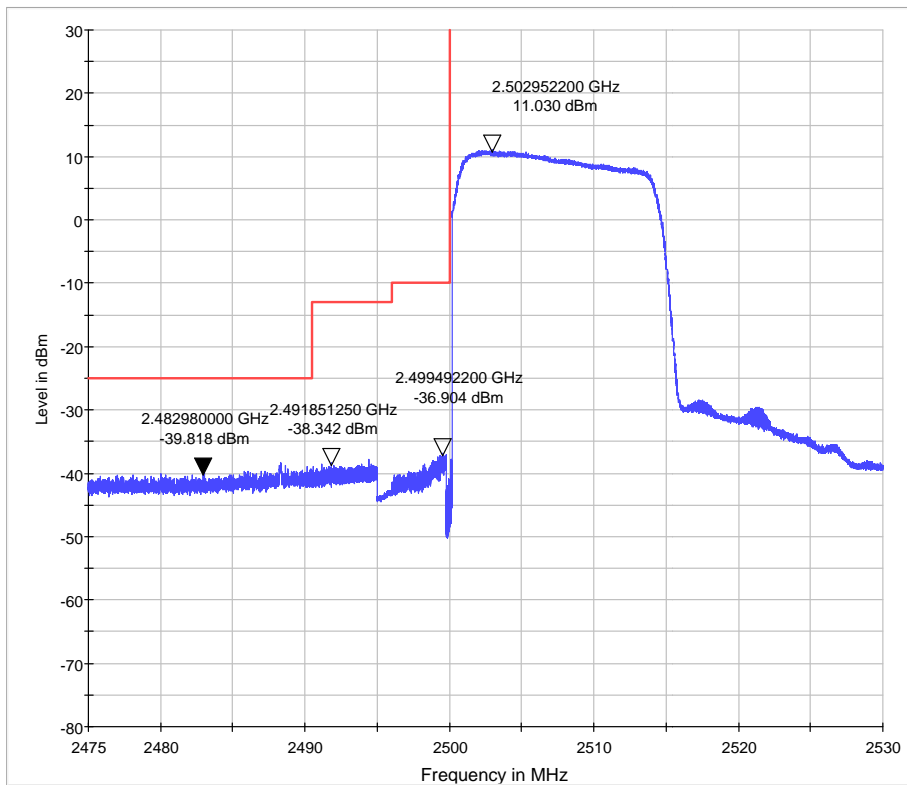




LTE Band 7 QPSK 20MHz CH-Low, RB 1

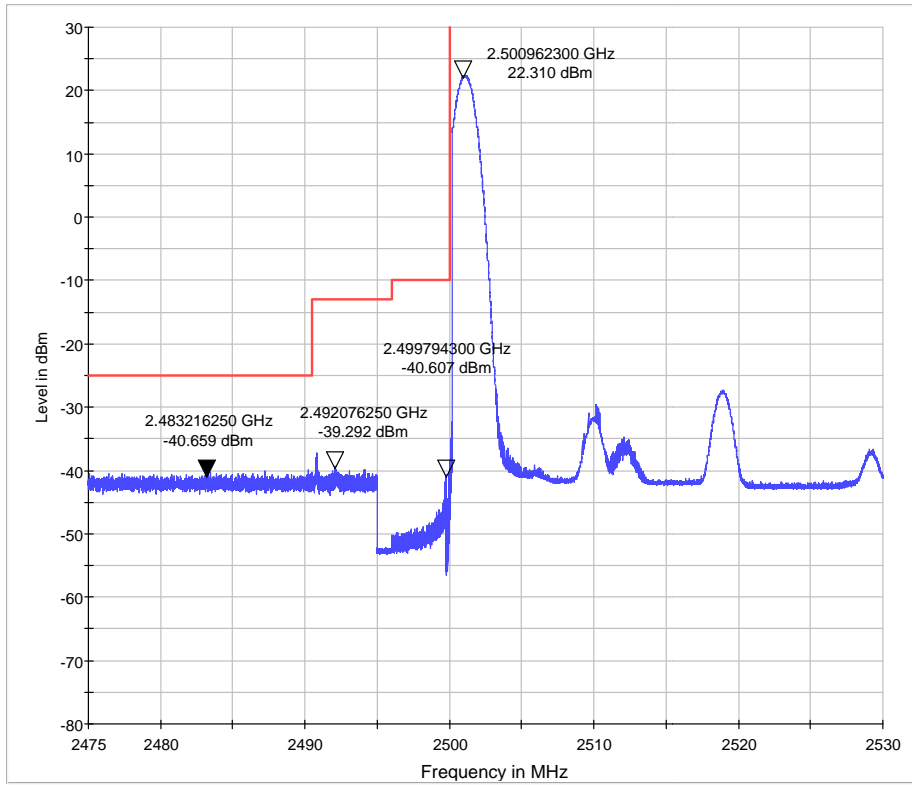


LTE Band 7 QPSK 20MHz CH-Low, RB 100

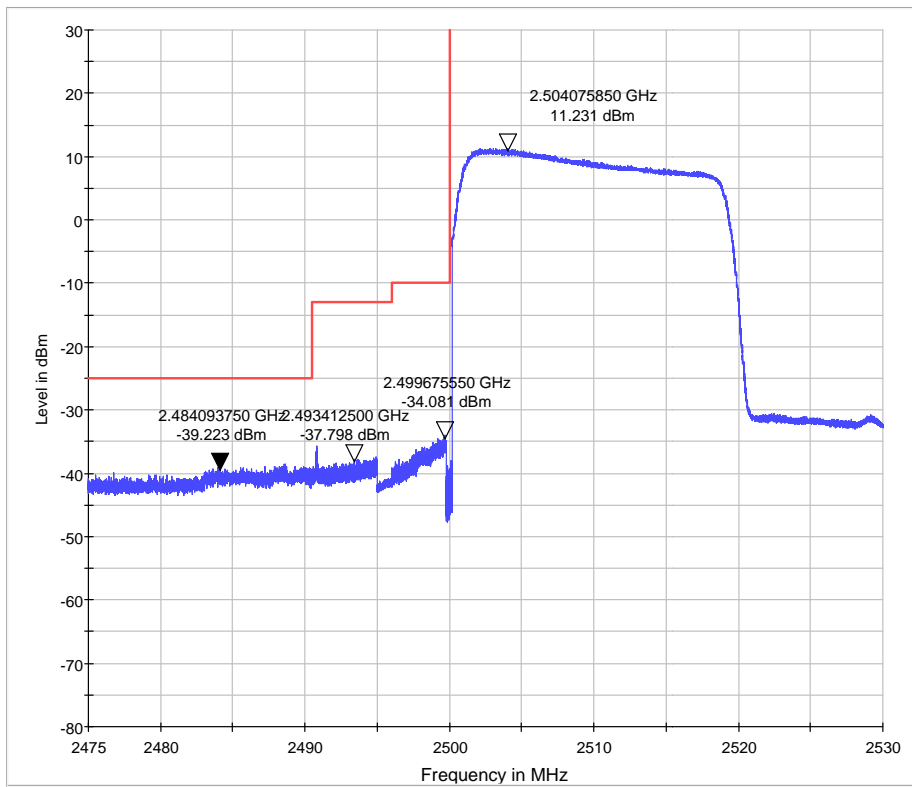





LTE Band 7 16QAM 20MHz CH-Low, RB 1

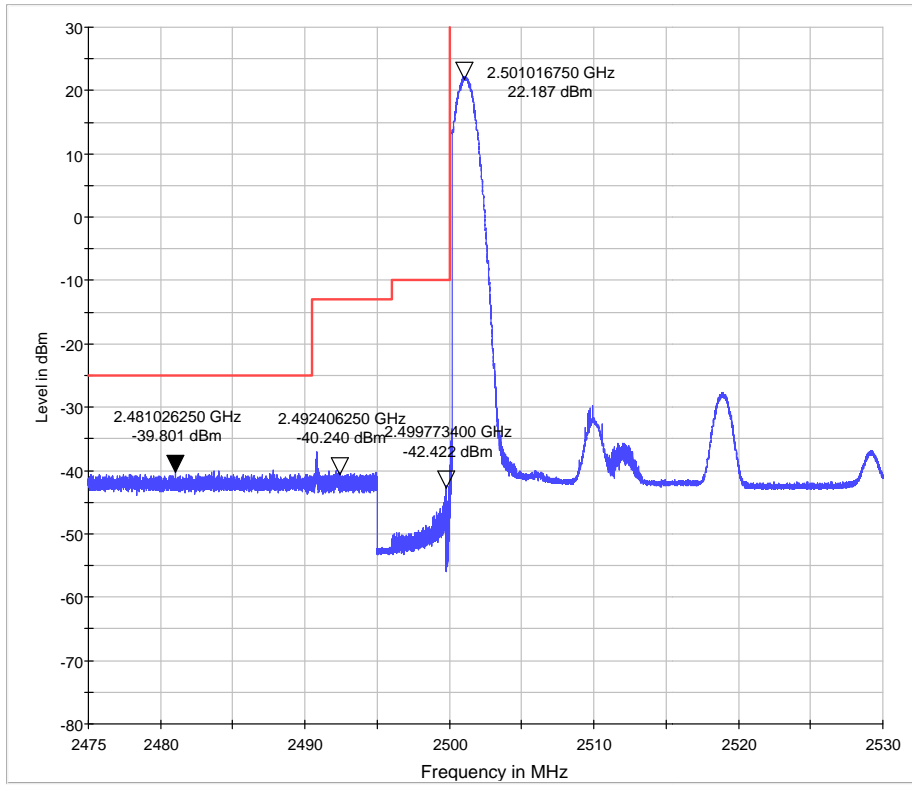


LTE Band 7 16QAM 20MHz CH-Low, RB 100

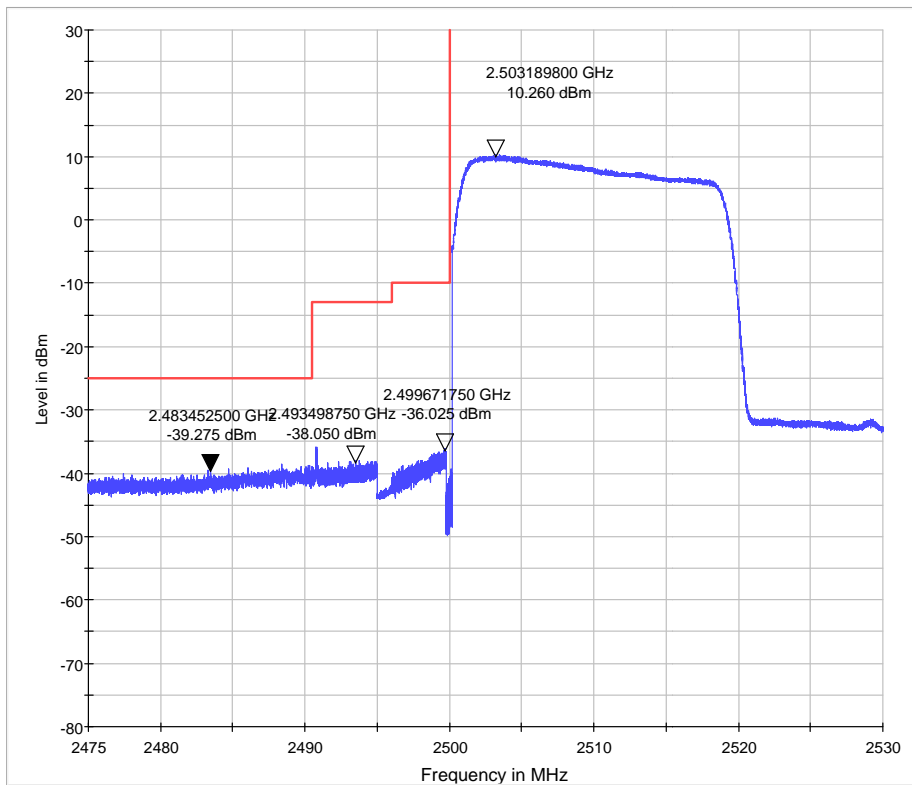

LTE Band 7 QPSK 5MHz CH-High, RB 1

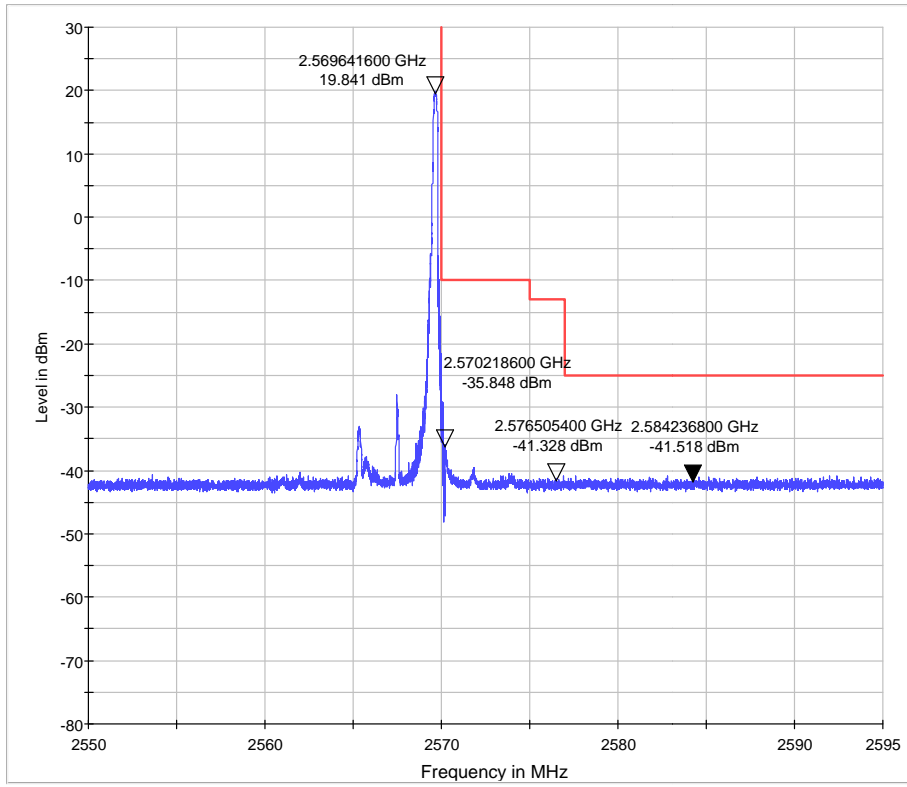


LTE Band 7 QPSK 5MHz CH-High, RB 25

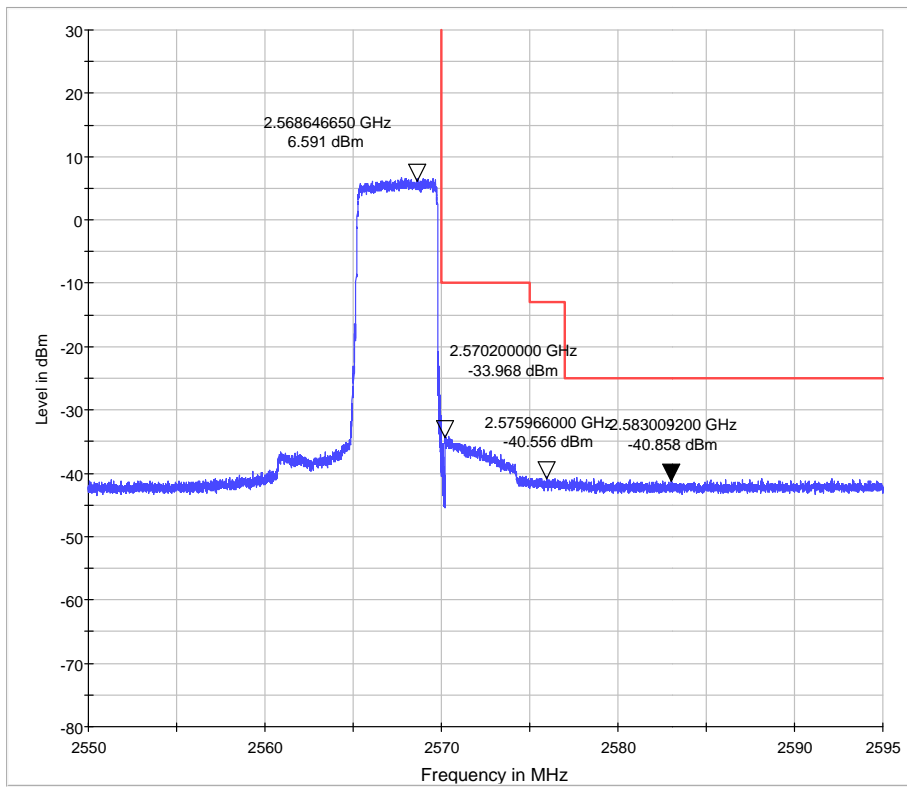




LTE Band 7 16QAM 5MHz CH-High, RB 1

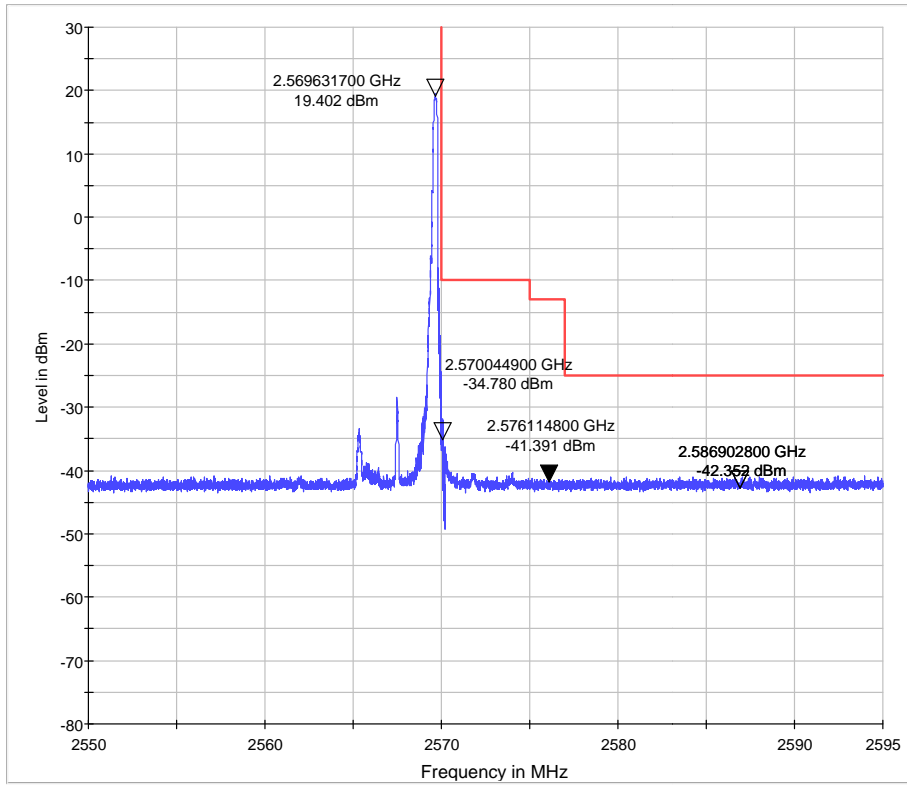


LTE Band 7 16QAM 5MHz CH-High, RB 25

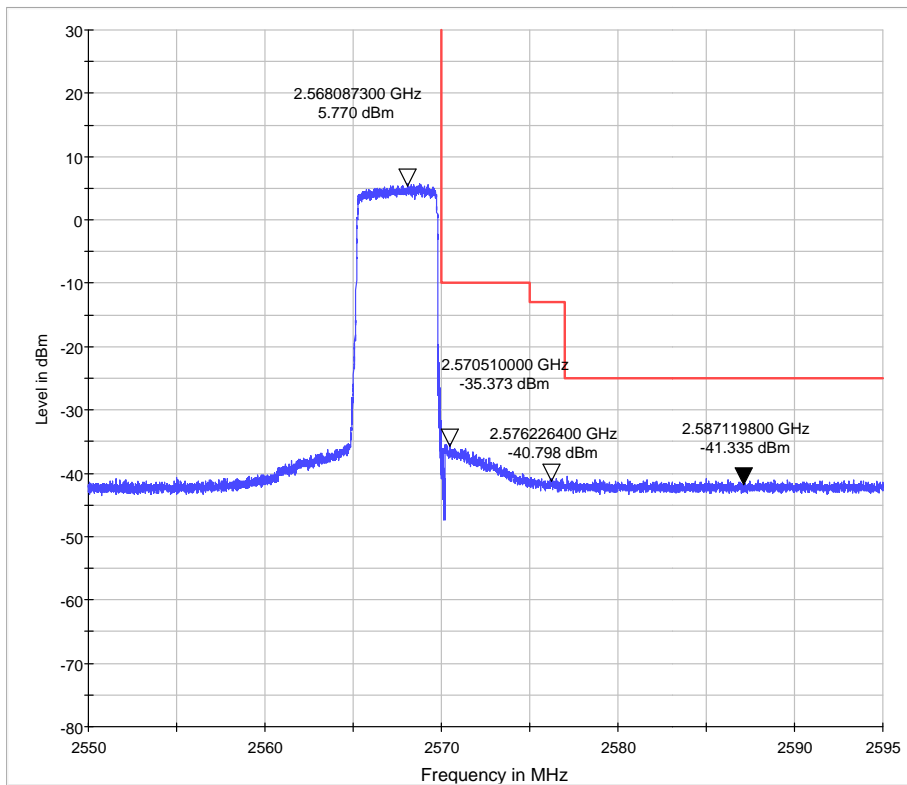




LTE Band 7 QPSK 10MHz CH-High, RB 1

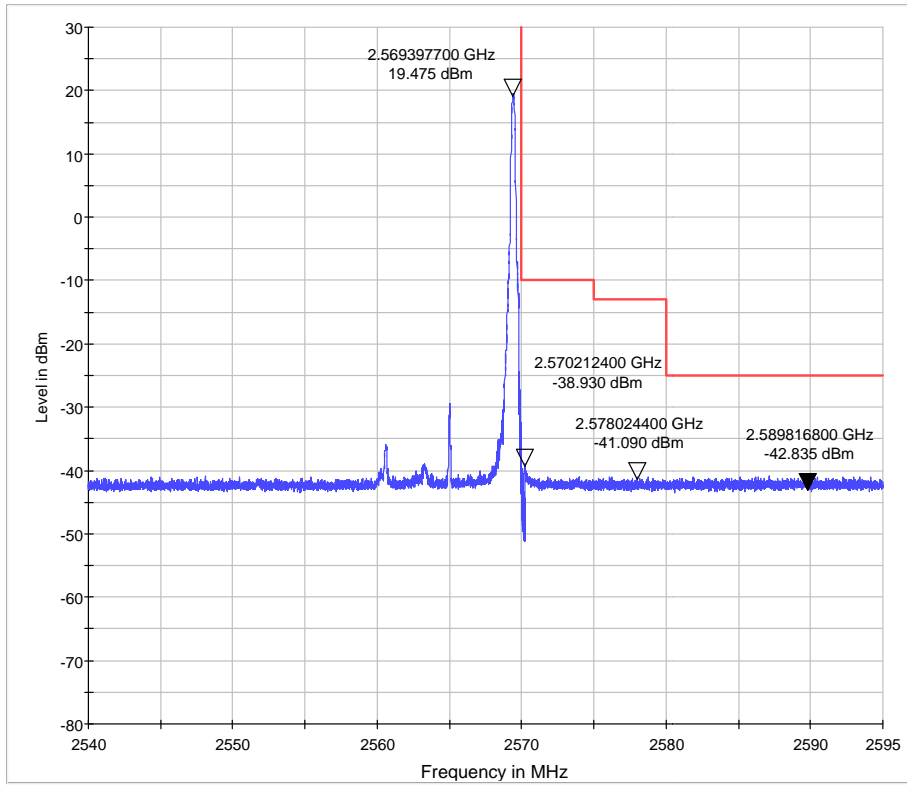


LTE Band 7 QPSK 10MHz CH-High, RB 50

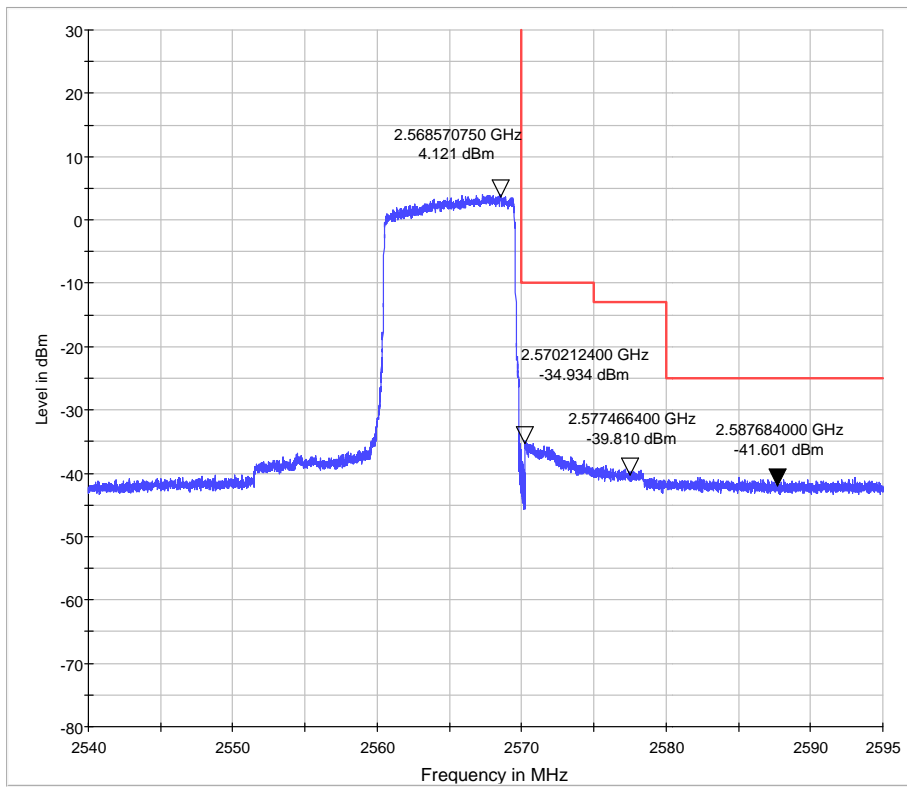





LTE Band 7 16QAM 10MHz CH-High, RB 1

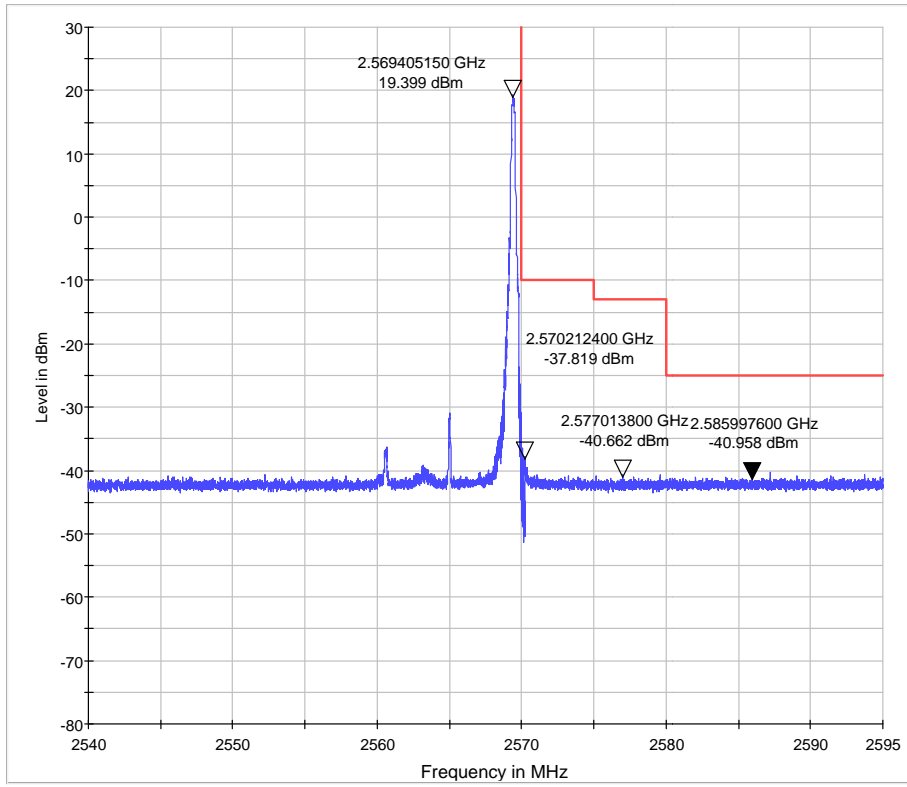


LTE Band 7 16QAM 10MHz CH-High, RB 50

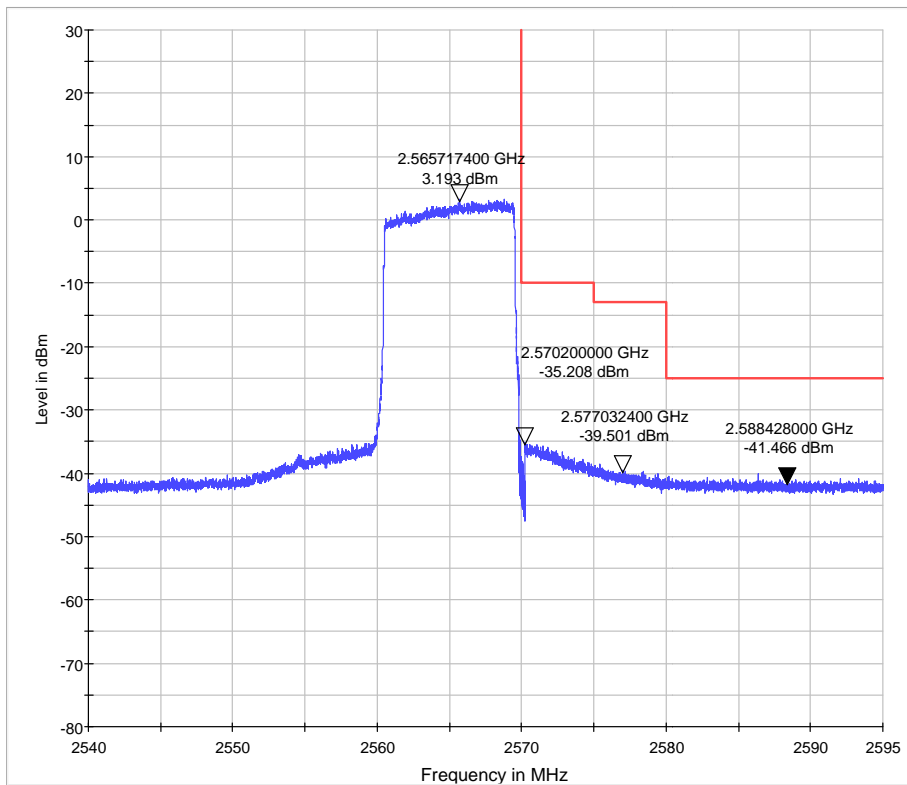


LTE Band 7 QPSK 15MHz CH-High, RB 1

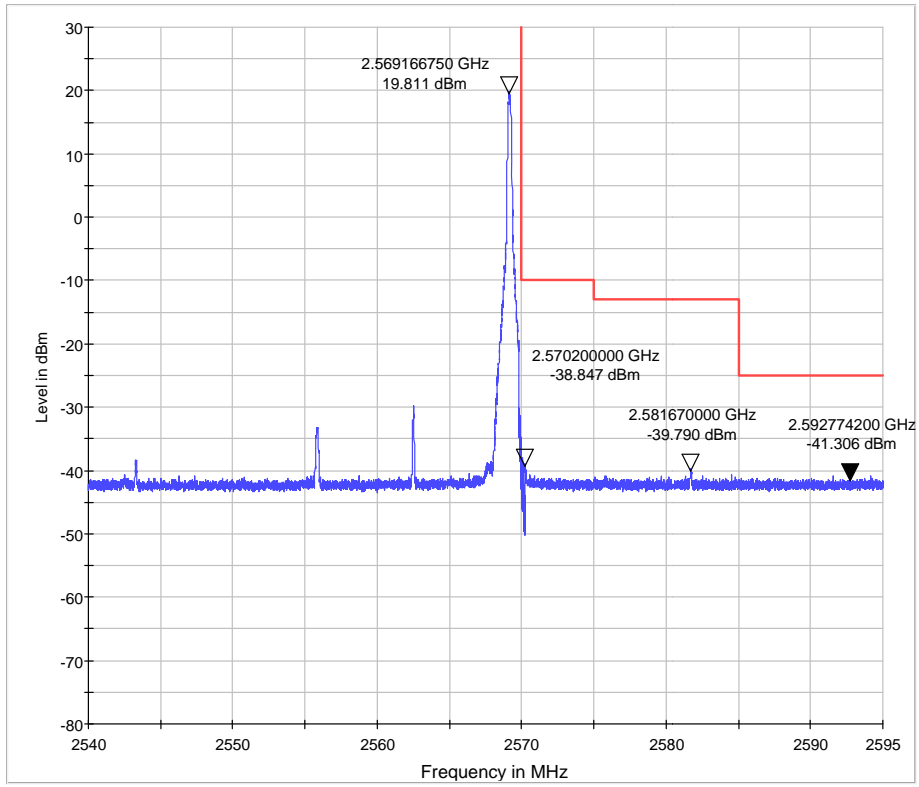


LTE Band 7 QPSK 15MHz CH-High, RB 75

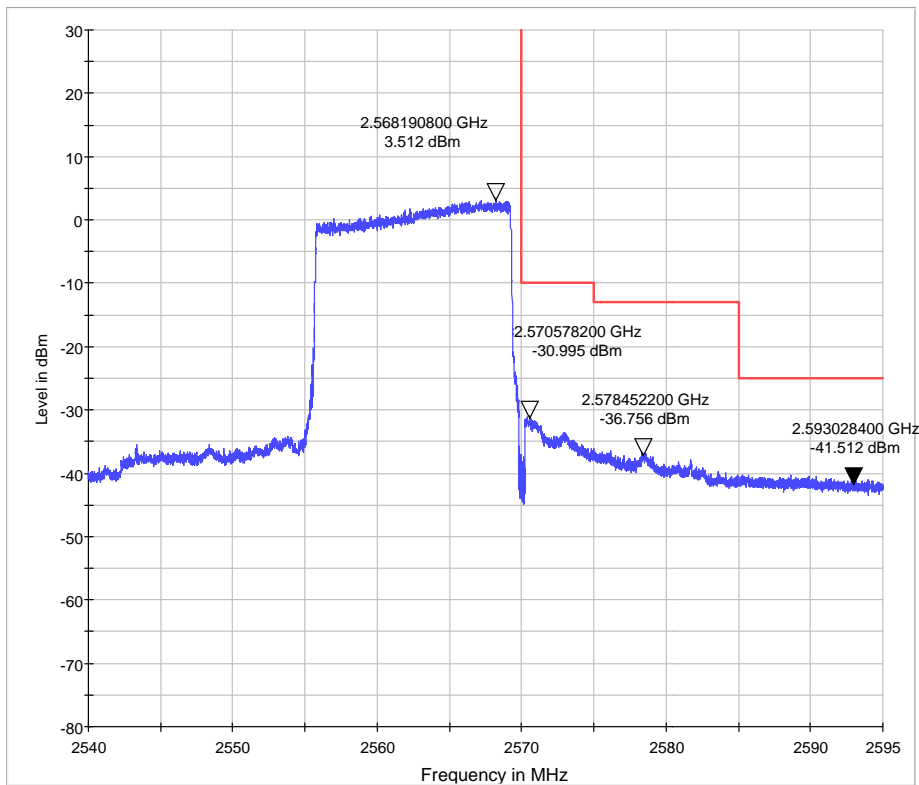


LTE Band 7 16QAM 15MHz CH-High, RB 1

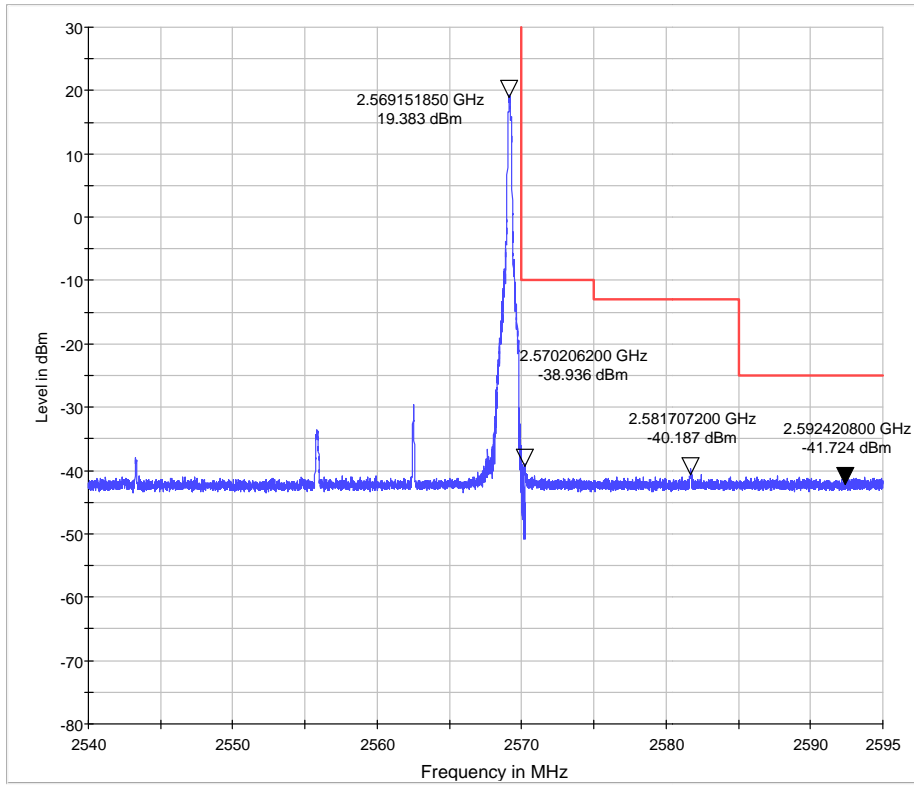


LTE Band 7 16QAM 15MHz CH-High, RB 75

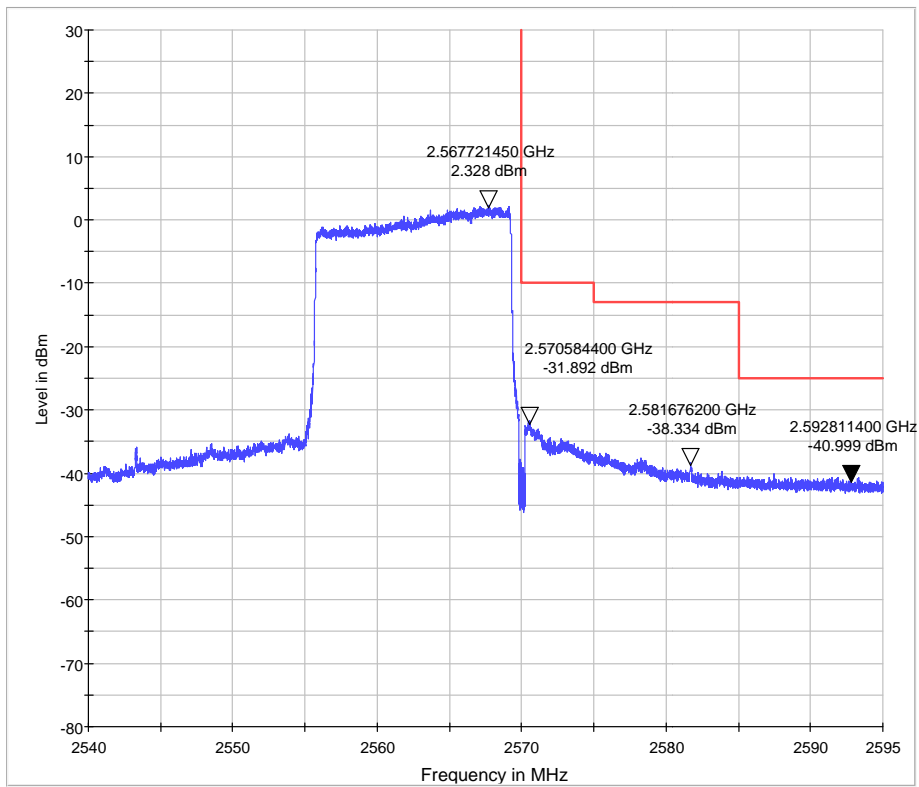

LTE Band 7 QPSK 20MHz CH-High, RB 1

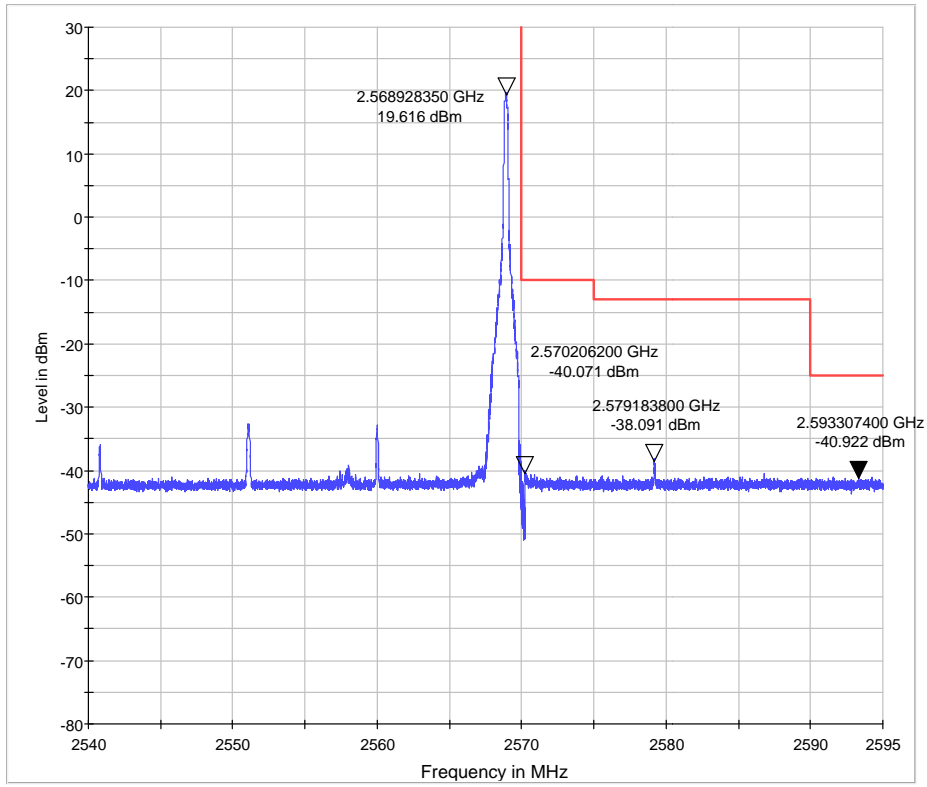


LTE Band 7 QPSK 20MHz CH-High, RB 100

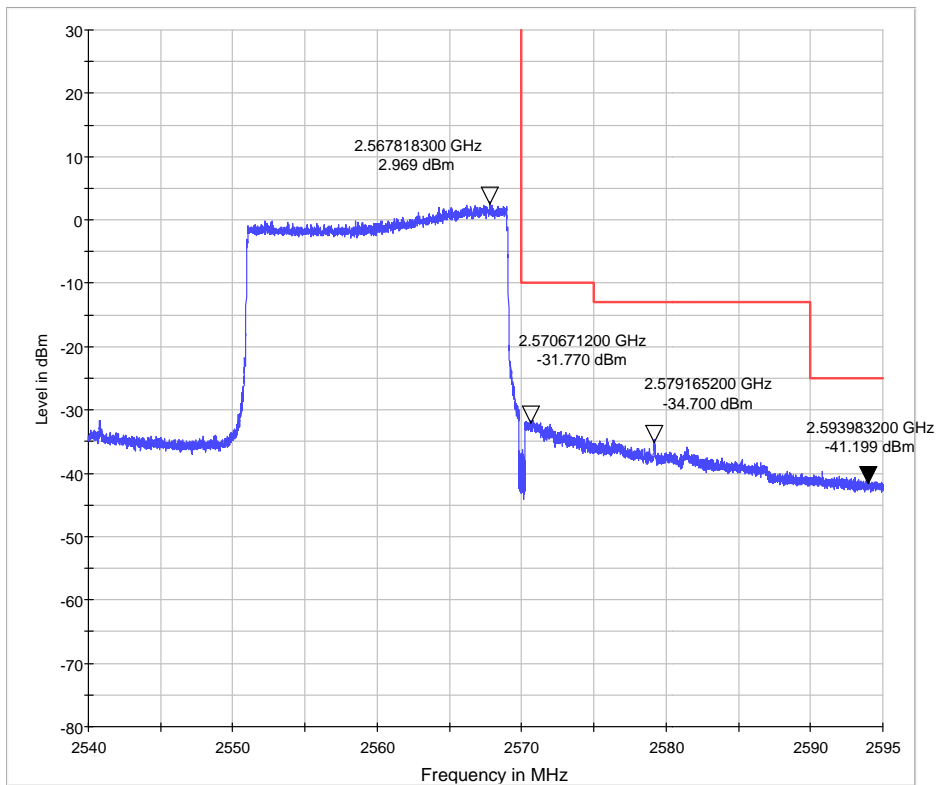




LTE Band 7 16QAM 20MHz CH-High, RB 1

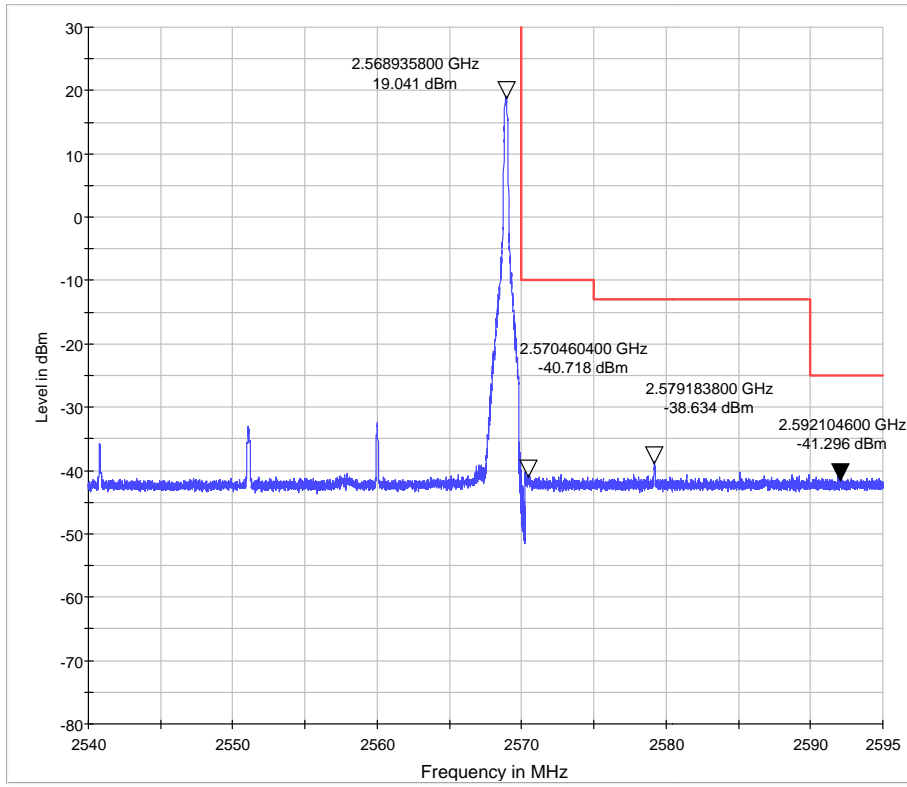

LTE Band 7 16QAM 20MHz CH-High, RB 100

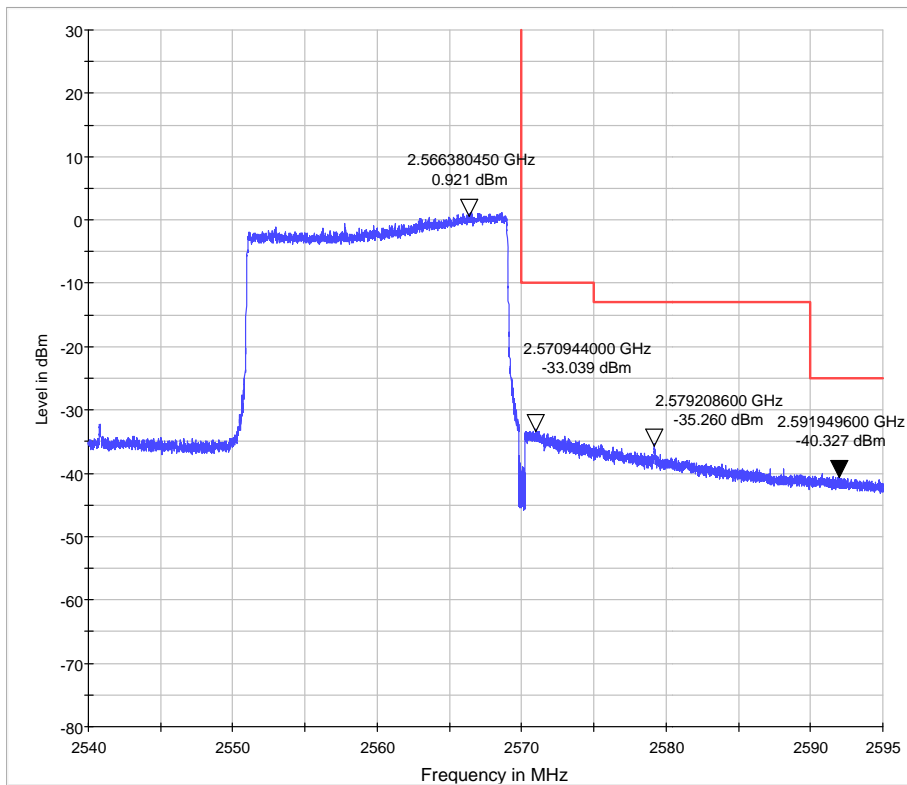

4.5 Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity
21°C ~25°C	40%~60%

Methods of Measurement

Measure the total peak power and record as PPk. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$\text{PAPR (dB)} = \text{PPk (dBm)} - \text{PAvg (dBm)}.$$

Test Setup

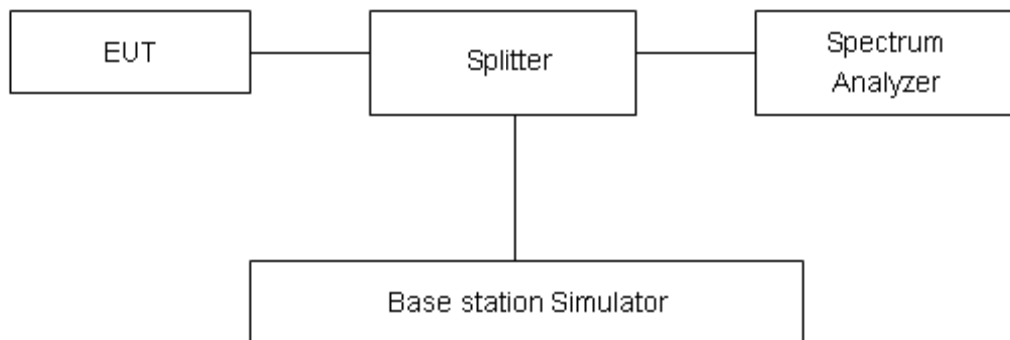

Limits

Rule Part 27.50(d)(5) Equipment employed must be authorized in accordance with the provisions of 24.51. Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (d)(6) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

Test Results

LTE Band 7							
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Conclusion
QPSK	5	20775	2502.5	27.35	22.23	5.12	PASS
		21100	2535	27.60	22.23	5.37	PASS
		21425	2567.5	27.54	22.16	5.38	PASS
	10	20800	2505	27.44	22.31	5.13	PASS
		21100	2535	27.58	22.25	5.33	PASS
		21400	2565	27.59	22.20	5.39	PASS
	15	20825	2507.5	27.58	22.29	5.29	PASS
		21100	2535	27.70	22.21	5.49	PASS
		21375	2562.5	27.66	22.15	5.51	PASS
	20	20850	2510	27.48	22.26	5.22	PASS
		21100	2535	27.42	22.16	5.26	PASS
		21350	2560	27.45	22.11	5.34	PASS
16QAM	5	20775	2502.5	26.84	20.87	5.97	PASS
		21100	2535	27.30	21.12	6.18	PASS
		21425	2567.5	27.08	21.11	5.97	PASS
	10	20800	2505	26.85	20.90	5.95	PASS
		21100	2535	27.35	21.17	6.18	PASS
		21400	2565	27.44	21.15	6.29	PASS
	15	20825	2507.5	26.90	20.87	6.03	PASS
		21100	2535	27.38	21.12	6.26	PASS
		21375	2562.5	27.38	21.11	6.27	PASS
	20	20850	2510	26.89	20.85	6.04	PASS
		21100	2535	27.22	21.08	6.14	PASS
		21350	2560	27.28	21.08	6.20	PASS

4.6 Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +50°C in 10°C step size.

(1)With all power removed, the temperature was decreased to -10°C and permitted to stabilize for three hours.

(2)Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

2. Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.5 V and 4.4 V, with a nominal voltage of 3.85V.

Test setup

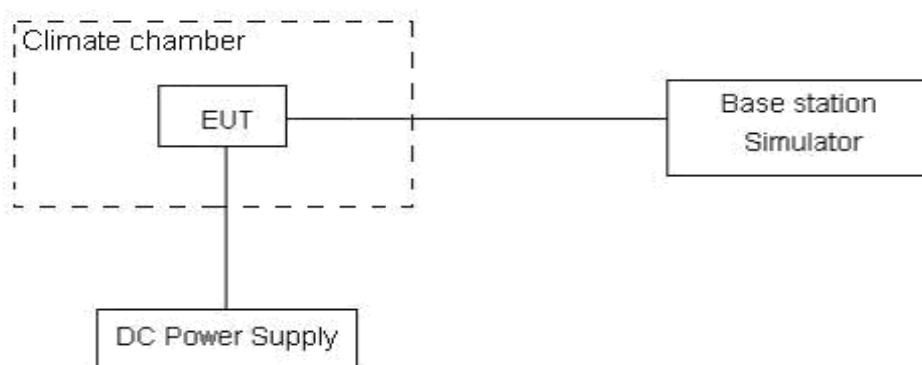

Limits

No specific frequency stability requirements in part 27.54

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3, U=0.01\text{ppm}$.

Test Result

Bandwidth	Test status	LTE Band 7 Channel 21100 Test Results (ppm)		
		QPSK	16QAM	Conclusion
5MHz	50°C/Normal Voltage	-0.00215	-0.00087	PASS
	40°C/Normal Voltage	0.00009	-0.00189	PASS
	30°C/Normal Voltage	0.00125	-0.00254	PASS
	20°C/Normal Voltage	0.00062	-0.00097	PASS
	10°C/Normal Voltage	0.00176	-0.00081	PASS
	0°C/Normal Voltage	-0.00081	-0.00236	PASS
	-10°C/Normal Voltage	0.00162	0.00054	PASS
	-20°C/Normal Voltage	0.00200	0.00168	PASS
	-30°C/Normal Voltage	0.00049	-0.00089	PASS
	20°C/Maximum Voltage	0.00210	0.00154	PASS
	20°C/Minimum Voltage	0.00191	0.00193	PASS
10MHz	50°C/Normal Voltage	0.00019	-0.00310	PASS
	40°C/Normal Voltage	0.00037	-0.00342	PASS
	30°C/Normal Voltage	-0.00078	0.00097	PASS
	20°C/Normal Voltage	0.00024	-0.00060	PASS
	10°C/Normal Voltage	0.00101	-0.00271	PASS
	0°C/Normal Voltage	-0.00270	-0.00112	PASS
	-10°C/Normal Voltage	-0.00237	-0.00312	PASS
	-20°C/Normal Voltage	0.00052	-0.00344	PASS
	-30°C/Normal Voltage	0.00166	0.00095	PASS
	20°C/Maximum Voltage	-0.00090	-0.00062	PASS
	20°C/Minimum Voltage	0.00153	0.00214	PASS
15MHz	50°C/Normal Voltage	-0.00147	0.00002	PASS
	40°C/Normal Voltage	-0.00188	-0.00114	PASS
	30°C/Normal Voltage	0.00064	-0.00130	PASS
	20°C/Normal Voltage	0.00194	0.00123	PASS
	10°C/Normal Voltage	0.00202	0.00113	PASS
	0°C/Normal Voltage	-0.00153	-0.00065	PASS
	-10°C/Normal Voltage	0.00221	-0.00151	PASS
	-20°C/Normal Voltage	0.00203	-0.00193	PASS
	-30°C/Normal Voltage	0.00194	0.00060	PASS
	20°C/Maximum Voltage	0.00105	0.00190	PASS
	20°C/Minimum Voltage	0.00058	0.00084	PASS
20MHz	50°C/Normal Voltage	0.00126	0.00118	PASS
	40°C/Normal Voltage	-0.00056	-0.00084	PASS
	30°C/Normal Voltage	0.00045	0.00170	PASS



	20°C/Normal Voltage	0.00105	0.00224	PASS
	10°C/Normal Voltage	0.00097	0.00171	PASS
	0°C/Normal Voltage	-0.00114	0.00083	PASS
	-10°C/Normal Voltage	0.00003	0.00172	PASS
	-20°C/Normal Voltage	0.00127	0.00103	PASS
	-30°C/Normal Voltage	0.00126	0.00149	PASS
	20°C/Maximum Voltage	-0.00095	0.00186	PASS
	20°C/Minimum Voltage	-0.00184	0.00224	PASS

4.7 Spurious Emissions at Antenna Terminals

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. RBW and VBW are set to 100 kHz for the carrier frequency, or RBW and VBW are set to 1MHz (other frequency), Sweep is set to ATUO.

Of those disturbances below (limit – 20 dB), the mark is not required for the EUT.

Test setup

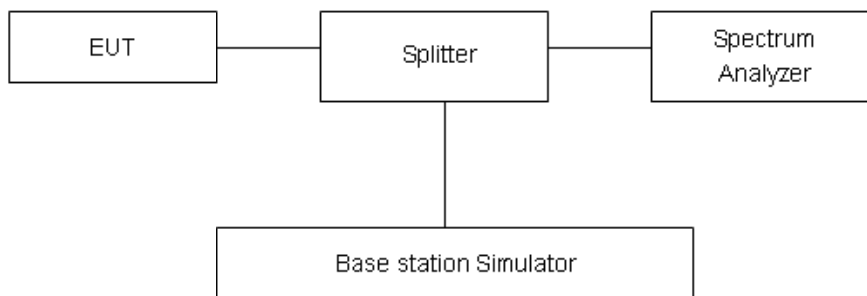

Limits

LTE -7 Rule Part 27.53(m) 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(4) of this section.

LTE -7 Limit	-25 dBm
--------------	---------


Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-12.75GHz	1.407 dB


Test Result: PASS

26.5GHz-30GHz were found more than 20dB below limit line, the mark is not required for the EUT. The signal beyond the limit is carrier in the following plots.

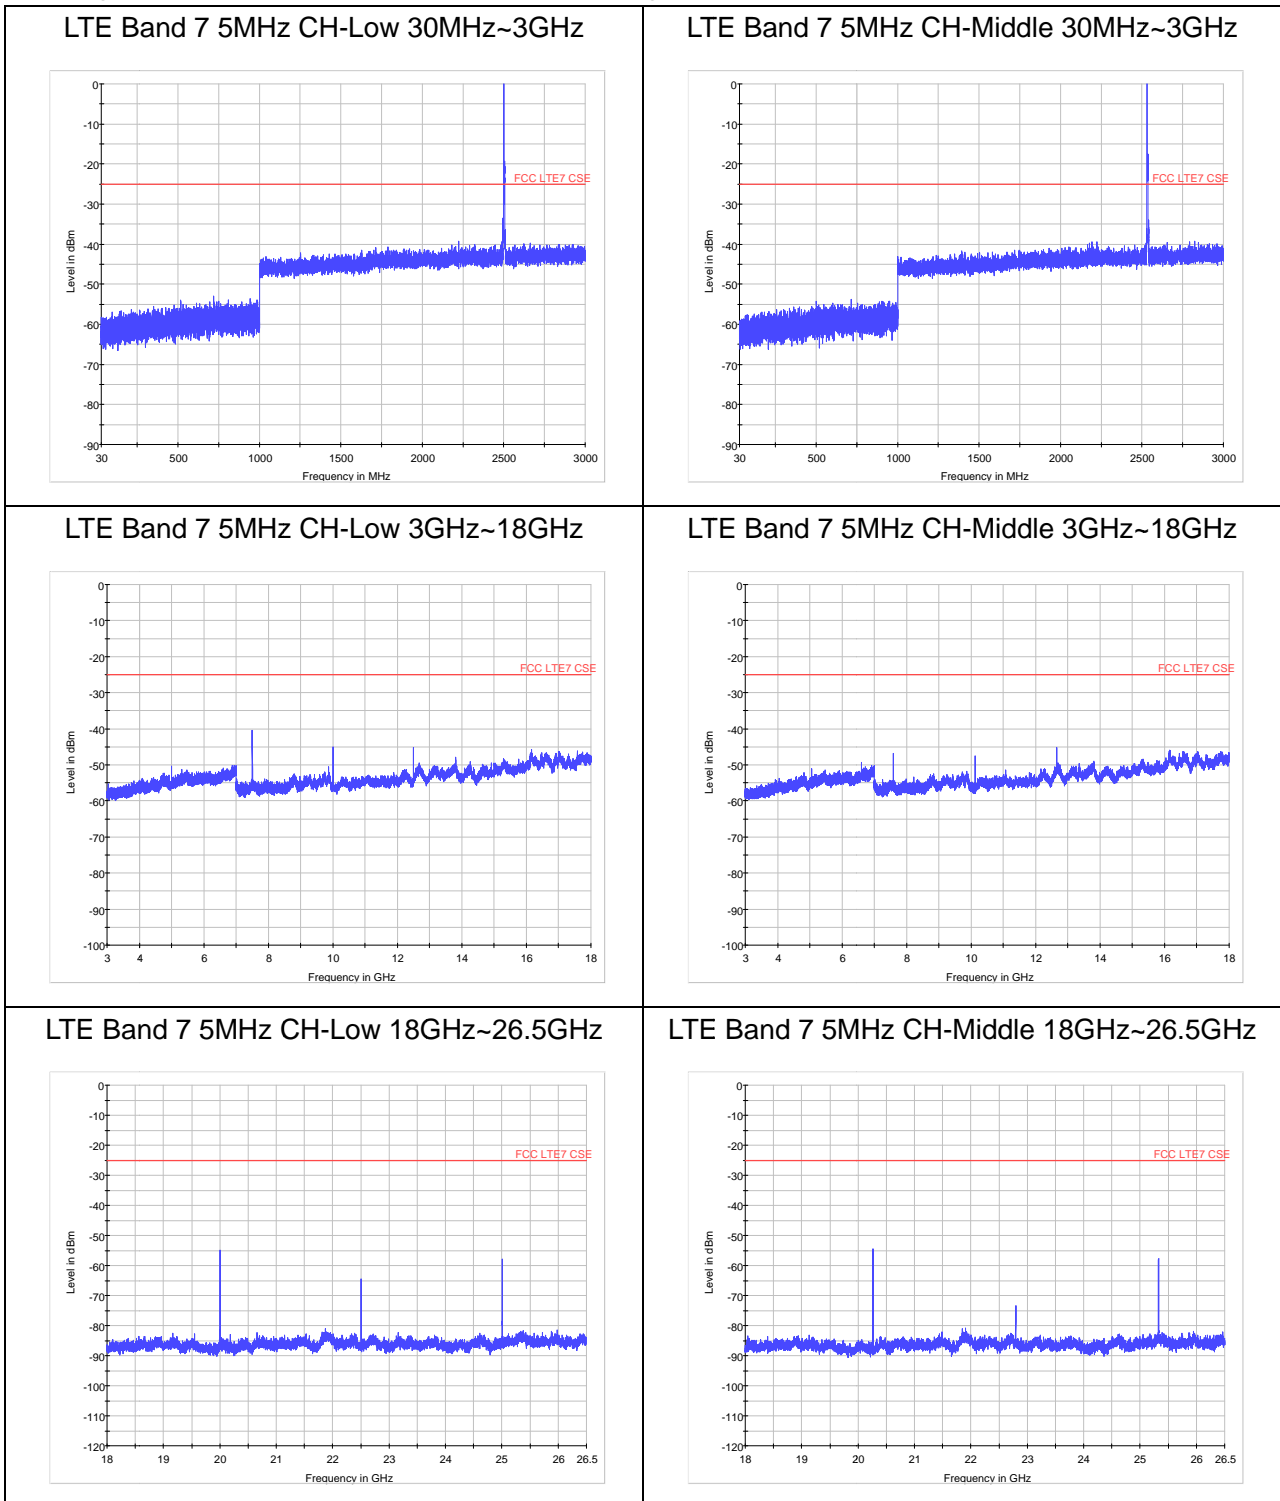





LTE Band 7 5MHz CH-High 30MHz~3GHz

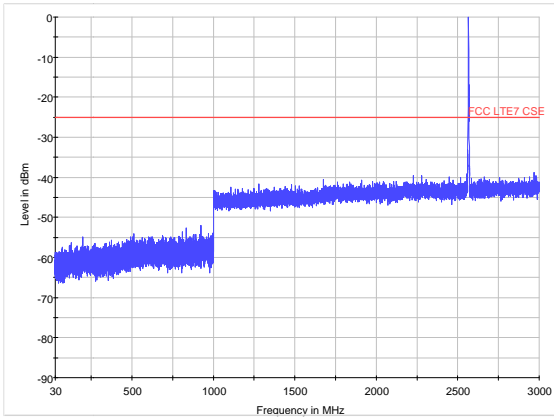


LTE Band 7 10MHz CH-Low 30MHz~3GHz

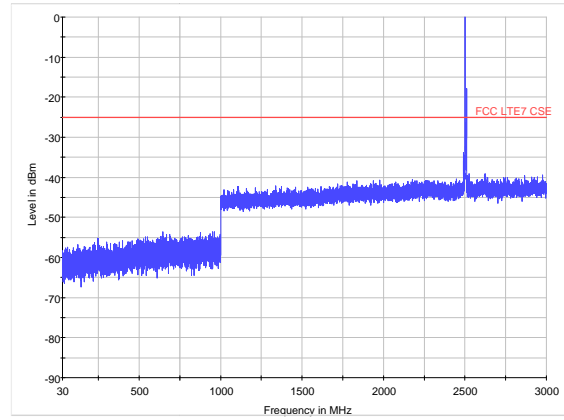


LTE Band 7 5MHz CH-High 3GHz~18GHz

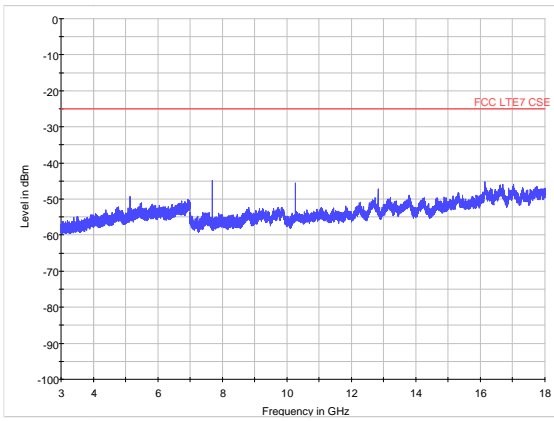


LTE Band 7 10MHz CH-Low 3GHz~18GHz

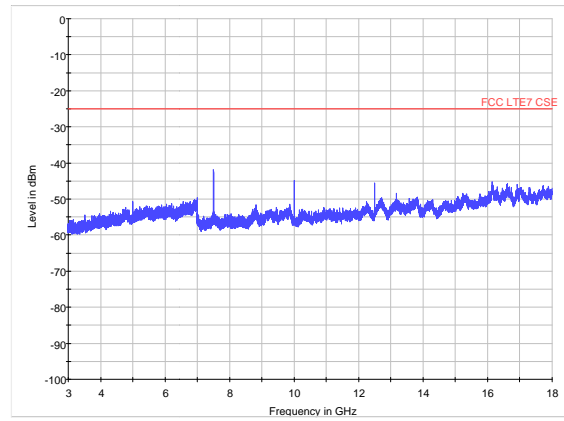

LTE Band 7 5MHz CH-High 18GHz~26.5GHz

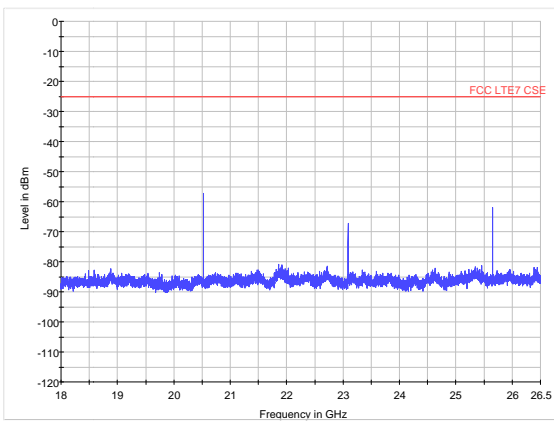


LTE Band 7 10MHz C CH-Low 18GHz~26.5GHz

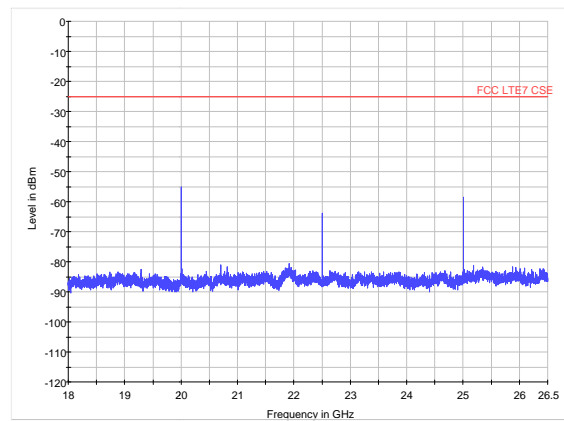





LTE Band 7 10MHz CH-Middle 30MHz~3GHz

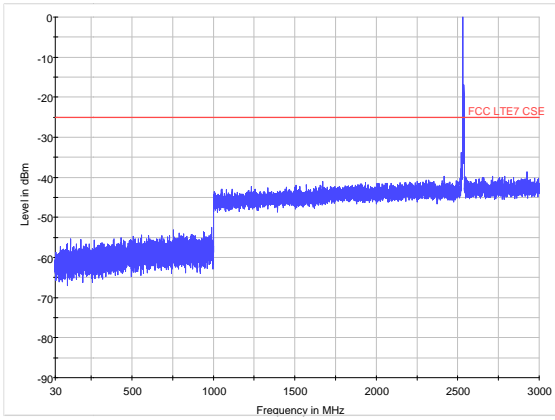


LTE Band 7 10MHz CH-High 30MHz~3GHz

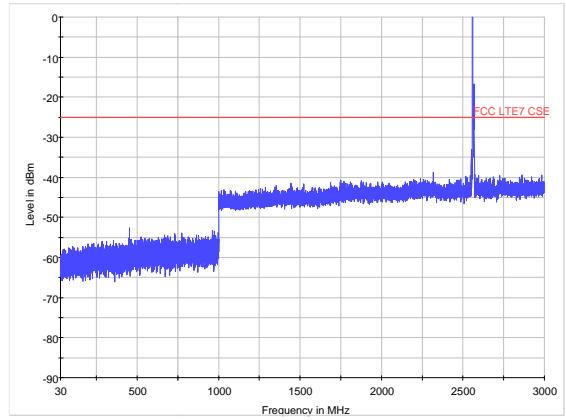


LTE Band 7 10MHz CH-Middle 3GHz~18GHz

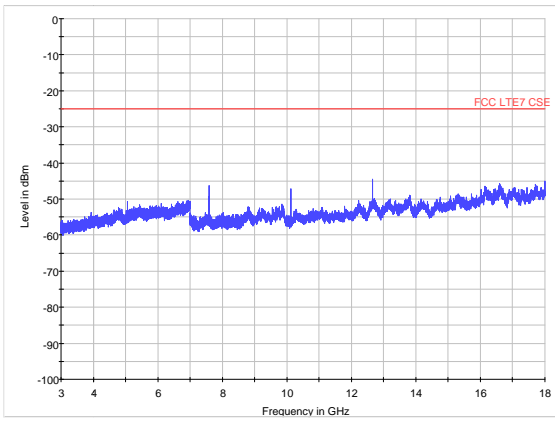


LTE Band 7 10MHz CH-High 3GHz~18GHz

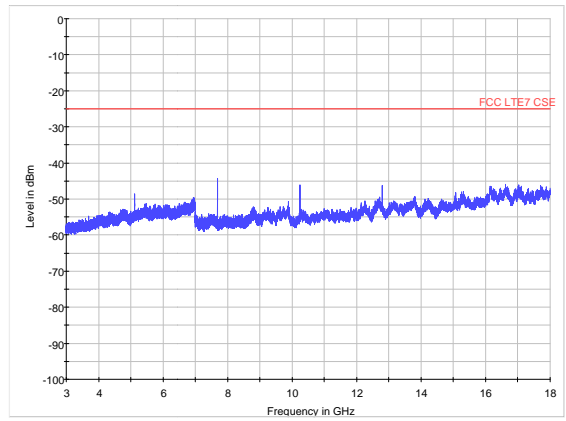

LTE Band 7 10MHz CH-Middle 18GHz~26.5GHz

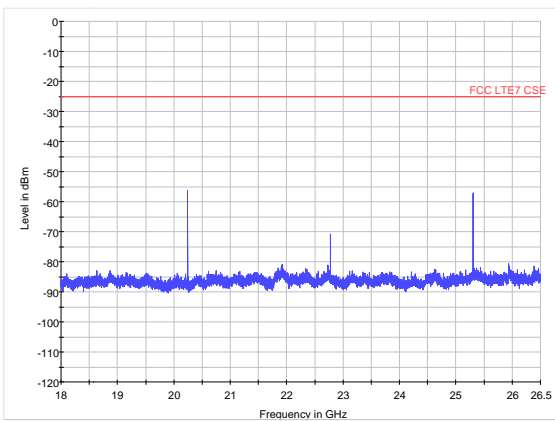


LTE Band 7 10MHz CH-High 18GHz~26.5GHz

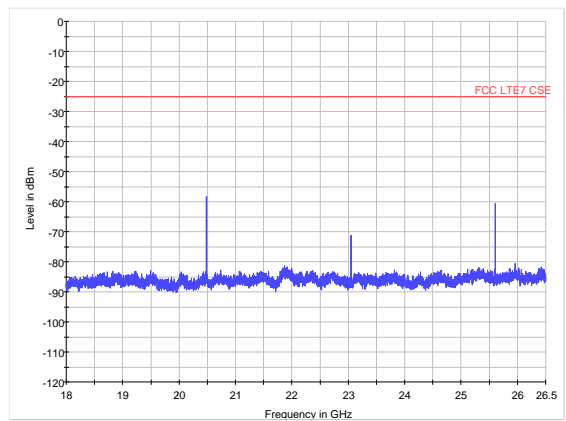





LTE Band 7 15MHz CH-Low 30MHz~3GHz

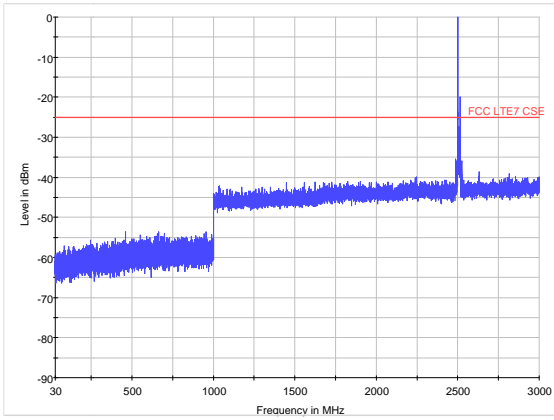


LTE Band 7 15MHz CH-Middle 30MHz~3GHz

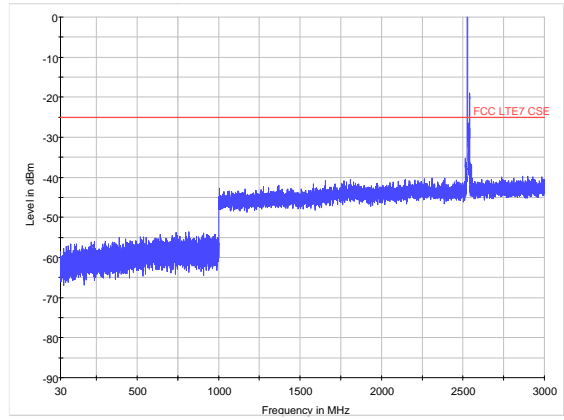


LTE Band 7 15MHz CH-Low 3GHz~18GHz

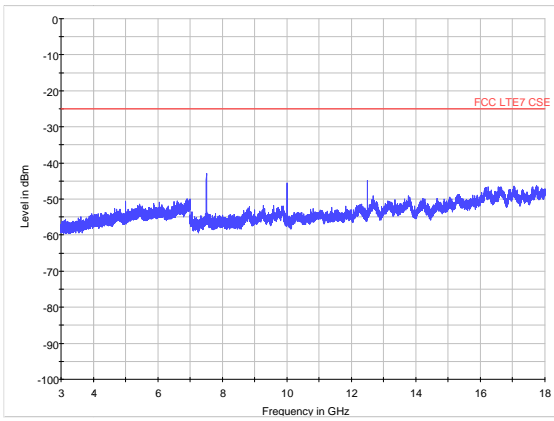


LTE Band 7 15MHz CH-Middle 3GHz~18GHz

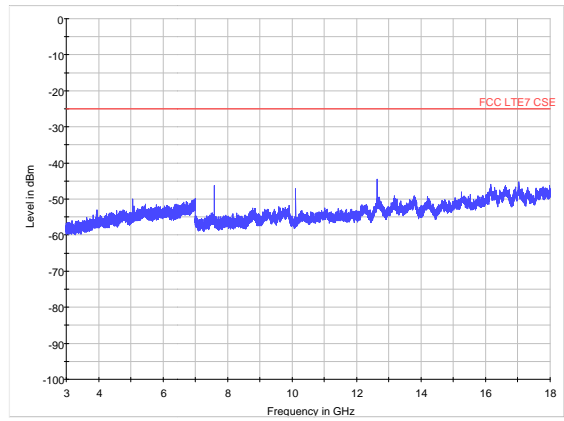

LTE Band 7 15MHz CH-Low 18GHz~26.5GHz

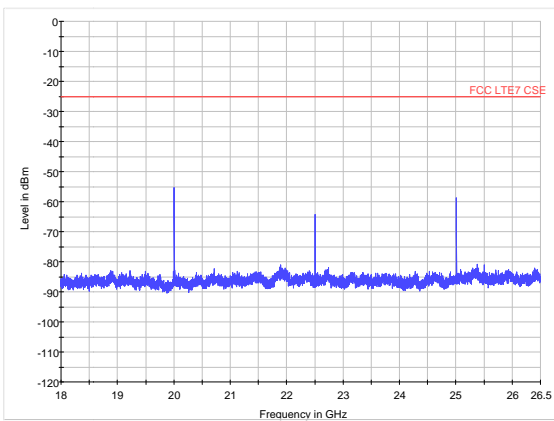


LTE Band 7 15MHz CH-Middle 18GHz~26.5GHz

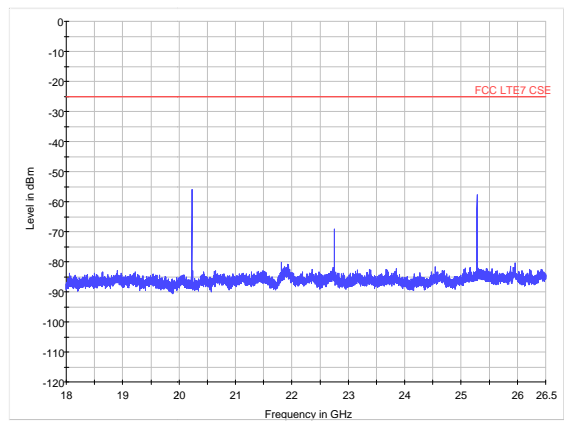





LTE Band 7 15MHz CH-High 30MHz~3GHz

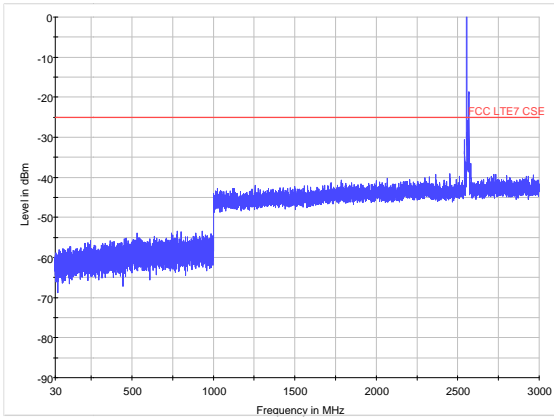


LTE Band 7 20MHz CH-Low 30MHz~3GHz

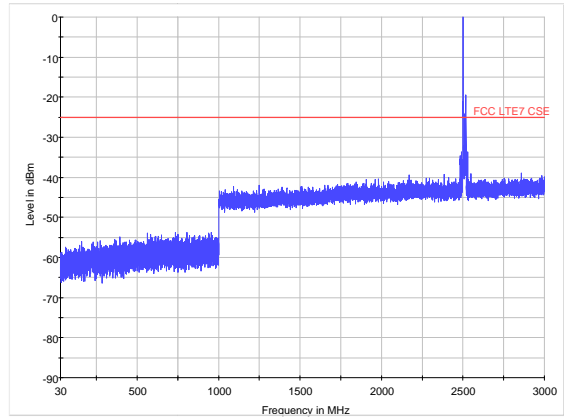


LTE Band 7 15MHz CH-High 3GHz~18GHz

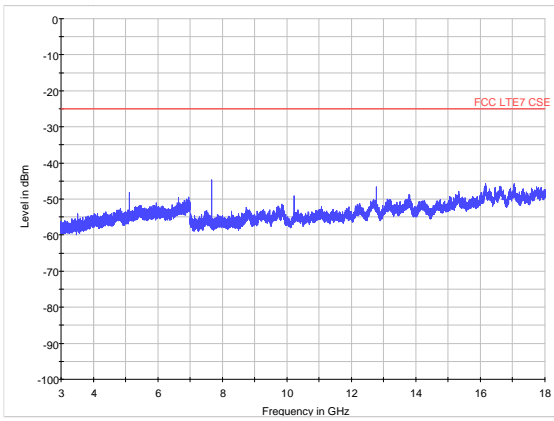


LTE Band 7 20MHz CH-Low 3GHz~18GHz

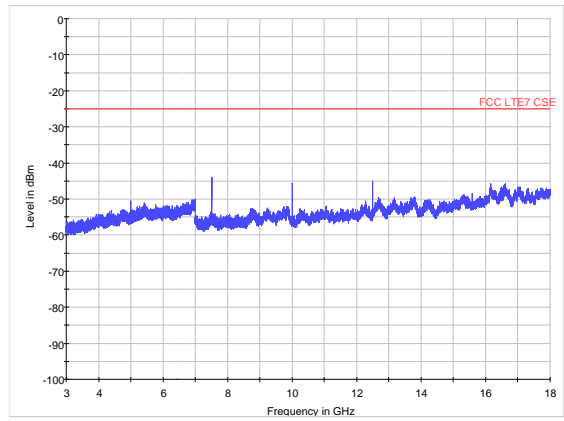

LTE Band 7 15MHz CH-High 18GHz~26.5GHz

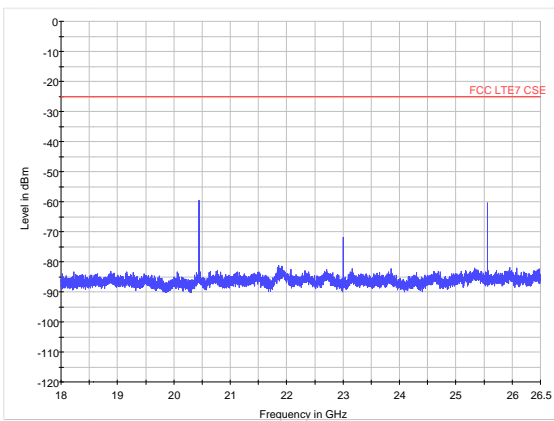


LTE Band 7 20MHz CH-Low 18GHz~26.5GHz

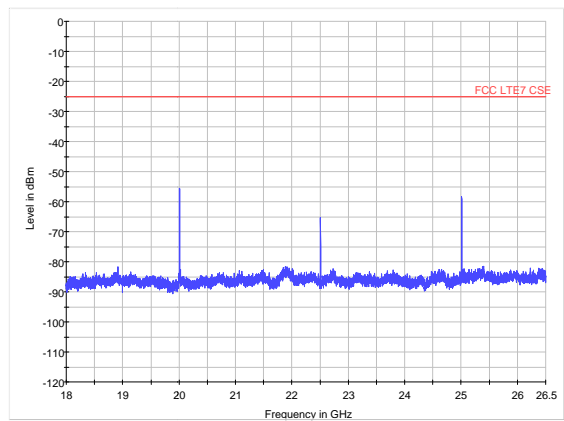





LTE Band 7 20MHz CH-Middle 30MHz~3GHz

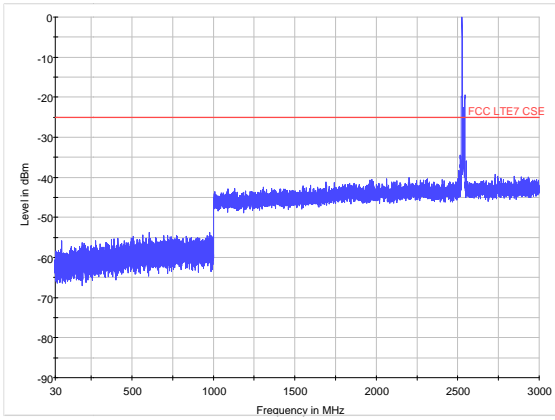


LTE Band 7 20MHz CH-High 30MHz~3GHz

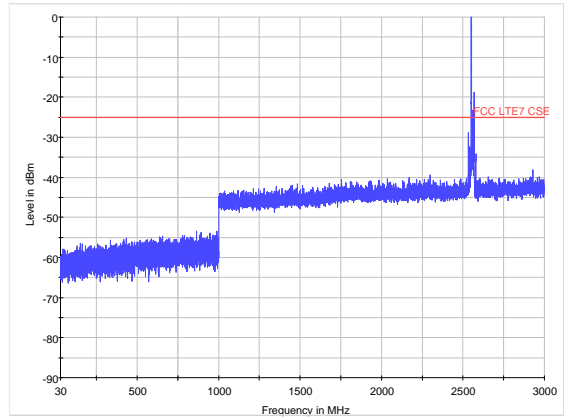


LTE Band 7 20MHz CH-Middle 3GHz~18GHz

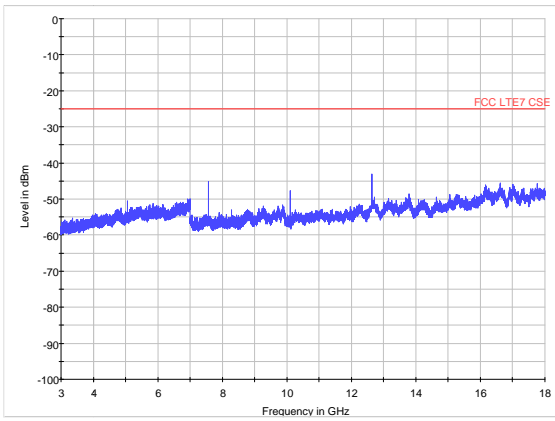


LTE Band 7 20MHz CH-High 3GHz~18GHz

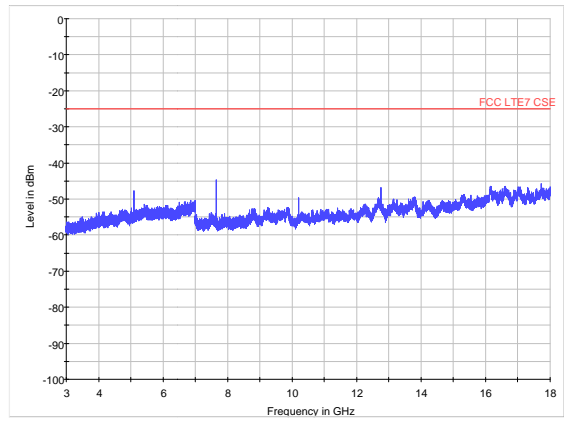

LTE Band 7 20MHz CH-Middle 18GHz~26.5GHz

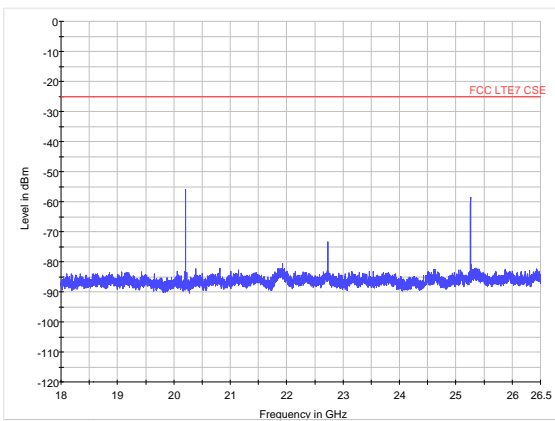

LTE Band 7 20MHz CH-High 18GHz~26.5GHz

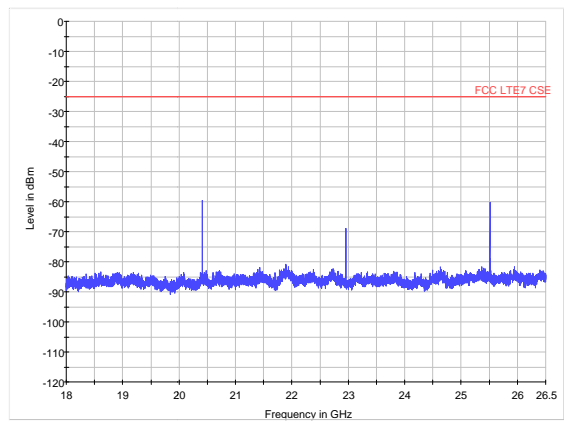

4.8 Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. Above 30MHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAG) should be recorded after test.
7. The measurement results are obtained as described below:

$$\text{Power(EIRP)} = \text{PMea} - \text{PAG} - \text{Pcl} + \text{Ga}$$

The measurement results are amend as described below:


$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$

7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi)


and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

Test setup

30MHz~~~ 1GHz

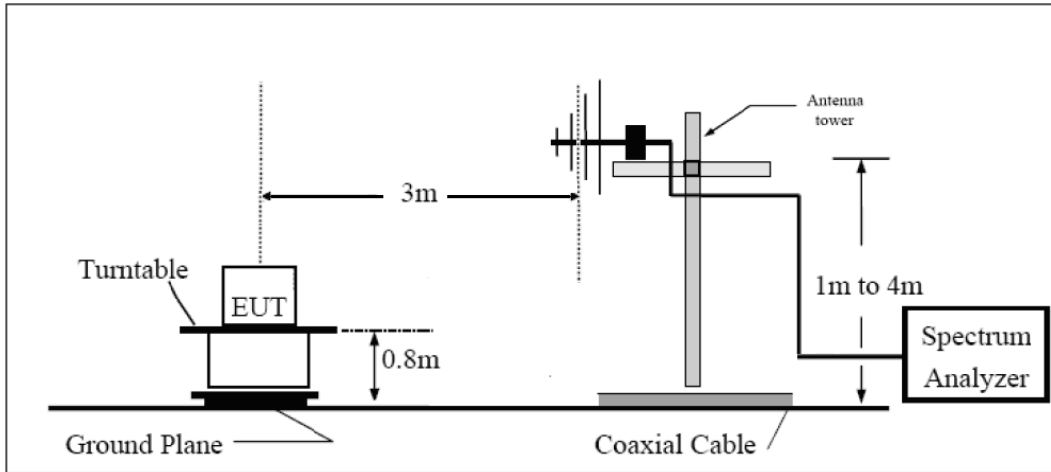

Above 1GHz

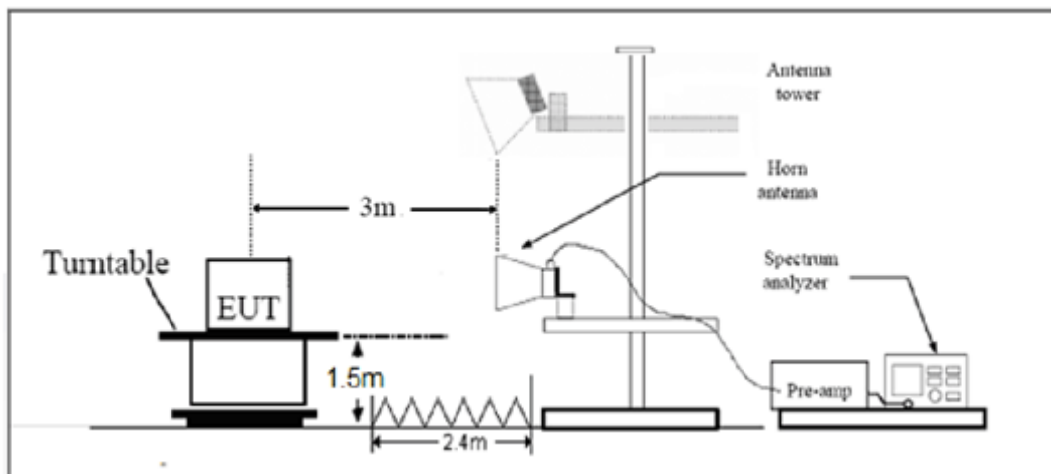

Note: Area side:2.4mX3.6m

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

Limits

LTE -7 Rule Part 27.53(m) $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(4) of this section.

LTE -7 Limit	-25 dBm
--------------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = \pm 1.96$, $U = \pm 3.55$ dB.

Test Result

LTE Band 7 QPSK 5MHz CH-Low, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5000.6	-45.80	2.00	9.15	Vertical	-40.8	-25.00	15.80	180.0
3	7501.1	-44.90	2.50	11.35	Vertical	-38.2	-25.00	13.20	225.0
4	1000.1	-34.70	4.20	12.05	Vertical	-29.0	-25.00	4.00	135.0
5	12502.1	-48.60	5.20	12.85	Vertical	-43.1	-25.00	18.10	270.0
6	15015.0	-51.98	5.50	14.23	Vertical	-45.4	-25.00	20.40	225.0
7	17517.5	-49.10	5.70	14.15	Vertical	-42.8	-25.00	17.80	225.0
8	20020.0	-83.31	6.30	13.76	Vertical	-78.0	-25.00	53.00	45.0
9	200522.5	-83.20	6.80	14.05	Vertical	-78.1	-25.00	53.10	90.0
10	25025.0	-82.99	6.90	14.84	Vertical	-77.2	-25.00	52.20	225.0

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 7 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5065.9	-47.00	2.00	9.15	Vertical	-42.0	-25.00	17.00	135.0
3	7598.6	-44.20	2.50	11.35	Vertical	-37.5	-25.00	12.50	90.0
4	10130.6	-35.60	4.20	12.05	Vertical	-29.9	-25.00	4.90	45.0
5	12664.1	-49.10	5.20	12.85	Vertical	-43.6	-25.00	18.60	45.0
6	15210.0	-50.98	5.50	14.23	Vertical	-44.4	-25.00	19.40	90.0
7	17745.0	-48.20	5.70	14.15	Vertical	-41.9	-25.00	16.90	90.0
8	20280.0	-83.71	6.30	13.76	Vertical	-78.4	-25.00	53.40	225.0
9	22815.0	-84.10	6.80	14.05	Vertical	-79.0	-25.00	54.00	90.0
10	25350.0	-83.39	6.90	14.84	Vertical	-77.6	-25.00	52.60	180.0

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 7 QPSK 5MHz CH-High, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5131.1	-43.60	2.00	9.15	Vertical	-38.6	-25.00	13.60	180.0
3	7696.7	-45.70	2.50	11.35	Vertical	-39.0	-25.00	14.00	225.0
4	10262.2	-32.10	4.20	12.05	Vertical	-26.4	-25.00	1.40	135.0
5	12827.8	-50.70	5.20	12.85	Vertical	-45.2	-25.00	20.20	180.0
6	15393.4	-50.08	5.50	14.23	Vertical	-43.5	-25.00	18.50	90.0
7	17958.9	-49.50	5.70	14.15	Vertical	-43.2	-25.00	18.20	45.0
8	20524.5	-83.51	6.30	13.76	Vertical	-78.2	-25.00	53.20	225.0
9	23090.0	-83.50	6.80	14.05	Vertical	-78.4	-25.00	53.40	225.0
10	25655.6	-83.49	6.90	14.84	Vertical	-77.7	-25.00	52.70	135.0

- Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2. The worst emission was found in the antenna is vertical position.

LTE Band 7 QPSK 10MHz CH-Low, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5017.1	-43.10	2.00	9.15	Vertical	-38.1	-25.00	13.10	315.0
3	7525.7	-44.20	2.50	11.35	Vertical	-37.5	-25.00	12.50	225.0
4	10034.2	-35.70	4.20	12.05	Vertical	-30.0	-25.00	5.00	135.0
5	12542.8	-47.90	5.20	12.85	Vertical	-42.4	-25.00	17.40	0.0
6	15051.4	-51.08	5.50	14.23	Vertical	-44.5	-25.00	19.50	270.0
7	17559.9	-50.00	5.70	14.15	Vertical	-43.7	-25.00	18.70	225.0
8	20068.5	-83.21	6.30	13.76	Vertical	-77.9	-25.00	52.90	45.0
9	22577.0	-83.20	6.80	14.05	Vertical	-78.1	-25.00	53.10	225.0
10	25085.6	-82.99	6.90	14.84	Vertical	-77.2	-25.00	52.20	90.0

- Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2. The worst emission was found in the antenna is vertical position.

LTE Band 7 QPSK 10MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5061.4	-46.40	2.00	9.15	Vertical	-41.4	-25.00	16.40	45.0
3	7592.0	-43.60	2.50	11.35	Vertical	-36.9	-25.00	11.90	90.0
4	10122.7	-34.40	4.20	12.05	Vertical	-28.7	-25.00	3.70	225.0
5	12653.4	-48.50	5.20	12.85	Vertical	-43.0	-25.00	18.00	180.0
6	15184.1	-50.08	5.50	14.23	Vertical	-43.5	-25.00	18.50	315.0
7	17714.8	-49.20	5.70	14.15	Vertical	-42.9	-25.00	17.90	45.0
8	20245.4	-83.81	6.30	13.76	Vertical	-78.5	-25.00	53.50	270.0
9	22776.1	-83.30	6.80	14.05	Vertical	-78.2	-25.00	53.20	45.0
10	25306.8	-83.69	6.90	14.84	Vertical	-77.9	-25.00	52.90	225.0

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 7 QPSK 10MHz CH-High, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5121.4	-43.30	2.00	10.15	Vertical	-37.3	-25.00	12.30	180.0
3	7682.0	-43.90	2.50	11.35	Vertical	-37.2	-25.00	12.20	315.0
4	10242.7	-33.70	4.20	12.05	Vertical	-28.0	-25.00	3.00	270.0
5	12803.4	-52.00	5.20	14.85	Vertical	-44.5	-25.00	19.50	315.0
6	15364.1	-49.68	5.50	13.23	Vertical	-44.1	-25.00	19.10	270.0
7	17924.8	-47.70	5.70	12.15	Vertical	-43.4	-25.00	18.40	225.0
8	20485.4	-84.11	6.30	13.76	Vertical	-78.8	-25.00	53.80	45.0
9	23046.1	-83.60	6.80	14.05	Vertical	-78.5	-25.00	53.50	180.0
10	25606.8	-83.49	6.90	14.84	Vertical	-77.7	-25.00	52.70	45.0

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 7 QPSK 15MHz CH-Low, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5001.8	-45.10	2.00	10.15	Vertical	-39.1	-25.00	14.10	225.0
3	7502.6	-41.70	2.50	11.35	Vertical	-35.0	-25.00	10.00	135.0
4	10003.5	-33.90	4.20	12.05	Vertical	-28.2	-25.00	3.20	135.0
5	12504.4	-51.00	5.20	14.85	Vertical	-43.5	-25.00	18.50	270.0
6	15005.3	-50.28	5.50	13.23	Vertical	-44.7	-25.00	19.70	45.0
7	17506.1	-48.70	5.70	12.15	Vertical	-44.4	-25.00	19.40	180.0
8	20007.0	-84.21	6.30	13.76	Vertical	-78.9	-25.00	53.90	270.0
9	22507.9	-83.80	6.80	14.05	Vertical	-78.7	-25.00	53.70	45.0
10	25008.8	-83.69	6.90	14.84	Vertical	-77.9	-25.00	52.90	315.0

- Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is vertical position.

LTE Band 7 QPSK 15MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5056.9	-45.20	2.00	10.15	Vertical	-39.2	-25.00	14.20	135.0
3	7585.3	-42.80	2.50	11.35	Vertical	-36.1	-25.00	11.10	180.0
4	10113.7	-34.00	4.20	12.05	Vertical	-28.3	-25.00	3.30	270.0
5	12642.2	-50.50	5.20	14.85	Vertical	-43.0	-25.00	18.00	225.0
6	15170.6	-49.68	5.50	13.23	Vertical	-44.1	-25.00	19.10	270.0
7	17699.0	-49.10	5.70	12.15	Vertical	-44.8	-25.00	19.80	45.0
8	20227.4	-83.31	6.30	13.76	Vertical	-78.0	-25.00	53.00	180.0
9	22755.9	-83.90	6.80	14.05	Vertical	-78.8	-25.00	53.80	270.0
10	25284.3	-83.09	6.90	14.84	Vertical	-77.3	-25.00	52.30	45.0

- Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is vertical position.

LTE Band 7 QPSK 15MHz CH-High, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5111.6	-42.10	2.00	10.15	Vertical	-36.1	-25.00	11.10	225.0
3	7667.4	-45.40	2.50	11.35	Vertical	-38.7	-25.00	13.70	315.0
4	10223.2	-36.60	4.20	12.05	Vertical	-30.9	-25.00	5.90	135.0
5	12779.1	-53.50	5.20	14.85	Vertical	-46.0	-25.00	21.00	45.0
6	15334.9	-49.38	5.50	13.23	Vertical	-43.8	-25.00	18.80	180.0
7	17890.7	-49.20	5.70	12.15	Vertical	-44.9	-25.00	19.90	315.0
8	20446.5	-83.11	6.30	13.76	Vertical	-77.8	-25.00	52.80	45.0
9	23002.3	-83.50	6.80	14.05	Vertical	-78.4	-25.00	53.40	225.0
10	25558.1	-83.59	6.90	14.84	Vertical	-77.8	-25.00	52.80	180.0

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 7 QPSK 20MHz CH-Low, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5002.1	-44.80	2.00	10.15	Vertical	-38.8	-25.00	13.80	45.0
3	7503.2	-42.50	2.50	11.35	Vertical	-35.8	-25.00	10.80	180.0
4	10004.2	-34.80	4.20	12.05	Vertical	-29.1	-25.00	4.10	225.0
5	12505.3	-51.10	5.20	14.85	Vertical	-43.6	-25.00	18.60	0.0
6	15006.4	-49.68	5.50	13.23	Vertical	-44.1	-25.00	19.10	45.0
7	17507.4	-48.50	5.70	12.15	Vertical	-44.2	-25.00	19.20	180.0
8	20008.5	-83.51	6.30	13.76	Vertical	-78.2	-25.00	53.20	270.0
9	22509.5	-83.50	6.80	14.05	Vertical	-78.4	-25.00	53.40	45.0
10	25010.6	-83.59	6.90	14.84	Vertical	-77.8	-25.00	52.80	315.0

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 7 QPSK 20MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5052.4	-45.30	2.00	10.15	Vertical	-39.3	-25.00	14.30	225.0
3	7578.5	-42.30	2.50	11.35	Vertical	-35.6	-25.00	10.60	90.0
4	10104.7	-33.40	4.20	12.05	Vertical	-27.7	-25.00	2.70	135.0
5	12630.9	-50.00	5.20	14.85	Vertical	-42.5	-25.00	17.50	45.0
6	15157.1	-50.18	5.50	13.23	Vertical	-44.6	-25.00	19.60	270.0
7	17683.3	-47.60	5.70	12.15	Vertical	-43.3	-25.00	18.30	225.0
8	20209.4	-83.61	6.30	13.76	Vertical	-78.3	-25.00	53.30	180.0
9	22735.6	-83.90	6.80	14.05	Vertical	-78.8	-25.00	53.80	90.0
10	25261.8	-84.29	6.90	14.84	Vertical	-78.5	-25.00	53.50	315.0

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

LTE Band 7 QPSK 20MHz CH-High, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5101.9	-41.50	2.00	10.15	Vertical	-35.5	-25.00	10.50	90.0
3	7652.8	-41.60	2.50	11.35	Vertical	-34.9	-25.00	9.90	225.0
4	10203.7	-36.80	4.20	12.05	Vertical	-31.1	-25.00	6.10	270.0
5	12754.7	-53.00	5.20	14.85	Vertical	-45.5	-25.00	20.50	180.0
6	15305.6	-49.08	5.50	13.23	Vertical	-43.5	-25.00	18.50	225.0
7	17856.5	-48.00	5.70	12.15	Vertical	-43.7	-25.00	18.70	45.0
8	20407.4	-83.01	6.30	13.76	Vertical	-77.7	-25.00	52.70	90.0
9	22958.4	-83.10	6.80	14.05	Vertical	-78.0	-25.00	53.00	270.0
10	25509.3	-84.19	6.90	14.84	Vertical	-78.4	-25.00	53.40	45.0

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is vertical position.

5 Main Test Instruments

Name	Type	Manufacturer	Serial Number	Calibration Date	Expiration Time
Base Station Simulator	CMW500	R&S	113645	2016-05-21	2017-05-20
Power Splitter	SHX-GF2-2-13	Hua Xiang	10120101	2016-05-21	2017-05-20
Universal Radio Communication Tester	E5515C	Agilent	MY48367192	2016-05-21	2017-05-20
Spectrum Analyzer	N9010A	Agilent	MY47191109	2016-05-21	2017-05-20
Signal Analyzer	FSV30	R&S	100815	2016-12-16	2017-12-15
Signal generator	SMB 100A	R&S	102594	2016-05-22	2017-05-21
Signal generator	SMR27	R&S	100365	2016-05-22	2017-05-21
EMI Test Receiver	ESCI	R&S	100948	2016-06-01	2017-05-31
Trilog Antenna	VUBL 9163	SCHWARZBECK	9163-201	2014-12-06	2017-12-05
Trilog Antenna	VUBL 9163	SCHWARZBECK	9163-391	2014-12-06	2017-12-05
Horn Antenna	HF907	R&S	100126	2014-12-06	2017-12-05
Horn Antenna	HF907	R&S	100125	2014-12-06	2017-12-05
Horn Antenna	3160-09	ETS-Lindgren	00102643	2015-01-30	2018-01-29
Horn Antenna	3160-09	ETS-Lindgren	00102644	2014-12-06	2017-12-05
Climatic Chamber	PT-30B	Re Ce	20101891	2016-07-17	2017-07-16
RF Cable	SMA 15cm	Agilent	0001	2017-02-06	2017-08-05

ANNEX A: EUT Appearance and Test Setup

A.1 EUT Appearance



Picture 1-1: EUT




Picture 1-2: Adapter



Picture 1-3: USB cable

Picture 1 EUT and Accessory

A.2 Test Setup

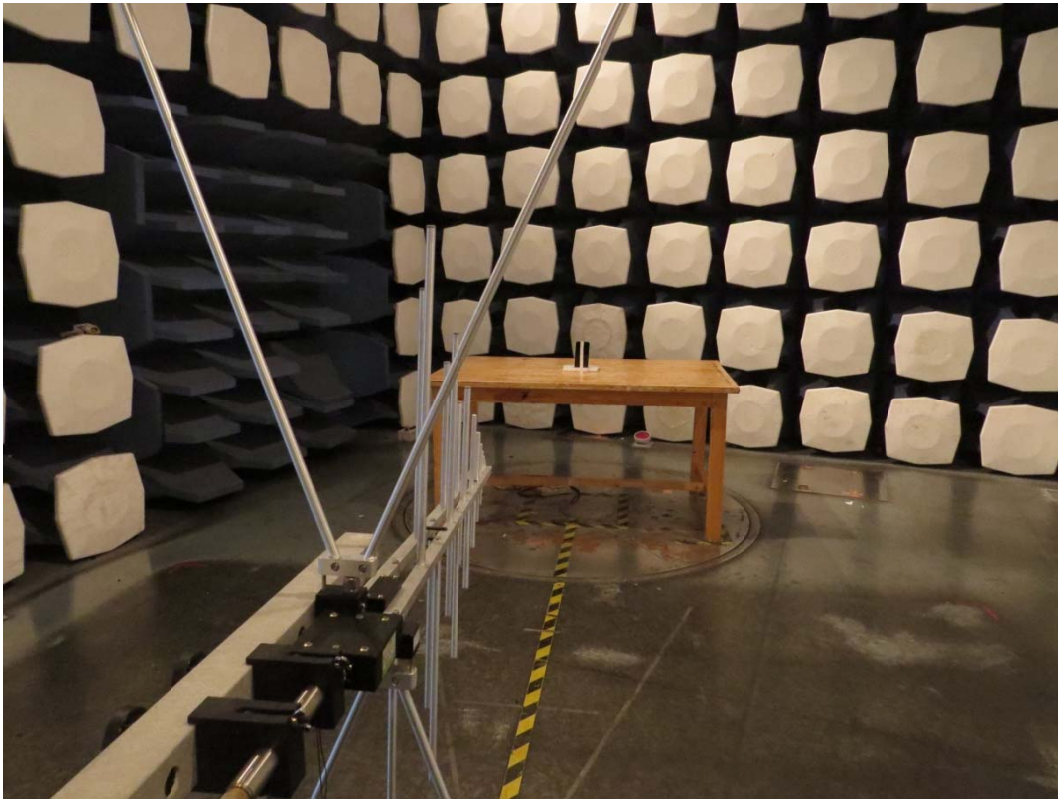

Picture 2: Radiated Spurious Emissions Test setup