

FCC RF Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : WCDMA/LTE Dual-Mode Digital
Mobile Phone
BRAND NAME : ZTE
MODEL NAME : Z820
FCC ID : SRQ-Z820
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Mar. 23, 2015 and testing was completed on Apr. 29, 2015. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification subjective to this standard	5
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency Channel	7
2.2 Pre-Scanned RF Power.....	8
2.3 Test Mode.....	9
2.4 Connection Diagram of Test System.....	10
2.5 Support Unit used in test configuration and system	11
2.6 EUT Operation Test Setup	11
2.7 Measurement Results Explanation Example.....	11
3 TEST RESULT.....	12
3.1 6dB Bandwidth Measurement	12
3.2 Output Power Measurement.....	14
3.3 Power Spectral Density Measurement	15
3.4 Conducted Band Edges and Spurious Emission Measurement	17
3.5 Radiated Band Edges and Spurious Emission Measurement	30
3.6 AC Conducted Emission Measurement.....	34
3.7 Antenna Requirements.....	40
4 LIST OF MEASURING EQUIPMENT	41
5 UNCERTAINTY OF EVALUATION	42
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED TEST RESULTS	
APPENDIX C. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR532302C	Rev. 01	Initial issue of report	May 07, 2015



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.03 dB at 2483.720 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 5.44 dB at 3.240 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.2 Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	WCDMA/LTE Dual-Mode Digital Mobile Phone
Brand Name	ZTE
Model Name	Z820
FCC ID	SRQ-Z820
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/HSPA+/ DC-HSDPA/LTE WLAN2.4GHz 802.11b/g/n HT20/HT40 Bluetooth v3.0+EDR/Bluetooth v4.0 LE
IMEI Code	Conducted: 867117020000919 Conduction: 867117020000984 Radiated: 867117020001164
HW Version	WX4M71C1-2
SW Version	Z820V1.0.0B01
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	802.11b/g/n : 2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to Antenna	802.11b : 18.38 dBm (0.0689 W) 802.11g : 23.46 dBm (0.2218 W) 802.11n HT20 : 22.09 dBm (0.1618 W) 802.11n HT40 : 23.29 dBm (0.2133 W)
Antenna Type	802.11b/g/n : PIFA Antenna with gain -1.00 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.			
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
Test Site No.	Sporton Site No.			FCC Registration No.
	TH01-KS	CO01-KS	03CH02-KS	418269

Note: The test site complies with ANSI C63.4 2009 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. FCC permits the use of the 1.5 meter table as an alternative in C63.10-2013 through inquiry tracking number 961829.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X/Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-



2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

2.4GHz 802.11b RF Output Power (dBm)						
Power vs. Channel			Power vs. Data Rate			
Channel	Frequency (MHz)	Data Rate 1Mbps	Channel	2Mbps	5.5Mbps	11Mbps
CH 01	2412 MHz	17.95	CH 11	18.36	18.29	18.18
CH 06	2437 MHz	17.48				
CH 11	2462 MHz	18.38				

2.4GHz 802.11g RF Output Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	Data Rate 6Mbps	Channel	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
CH 01	2412 MHz	22.33	CH 11	22.78	23.20	23.01	23.16	22.83	23.35	23.32
CH 06	2437 MHz	22.30								
CH 11	2462 MHz	23.46								

2.4GHz 802.11n HT20 RF Output Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index MCS0	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 01	2412 MHz	21.74	CH 11	21.54	21.50	21.68	21.35	22.00	22.07	22.02
CH 06	2437 MHz	21.48								
CH 11	2462 MHz	22.09								

2.4GHz 802.11n HT40 RF Output Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index MCS0	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 03	2422 MHz	23.08	CH 09	22.09	22.03	22.30	21.72	23.26	22.87	22.72
CH 06	2437 MHz	22.84								
CH 09	2452 MHz	23.29								

2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.


<2.4GHz>

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0


Test Cases	
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter)
Remark: For Radiated Test Cases, The tests were performance with Adapter , Earphone, and USB Cable.	

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

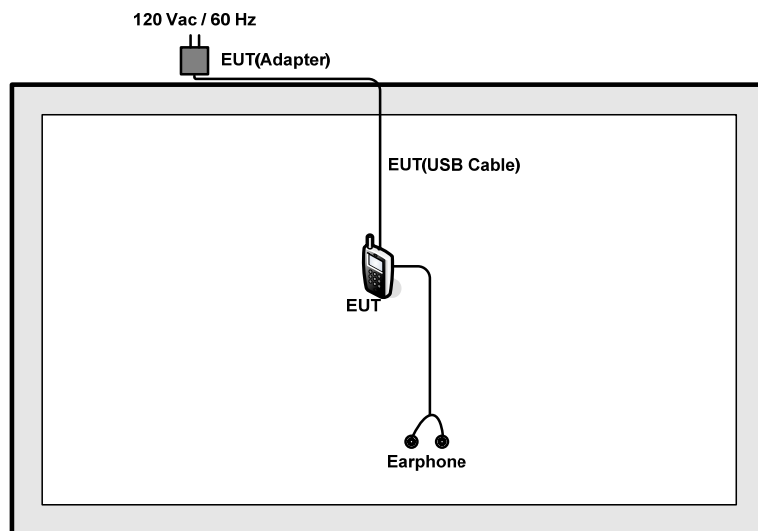

<AC Conducted Emission Mode>

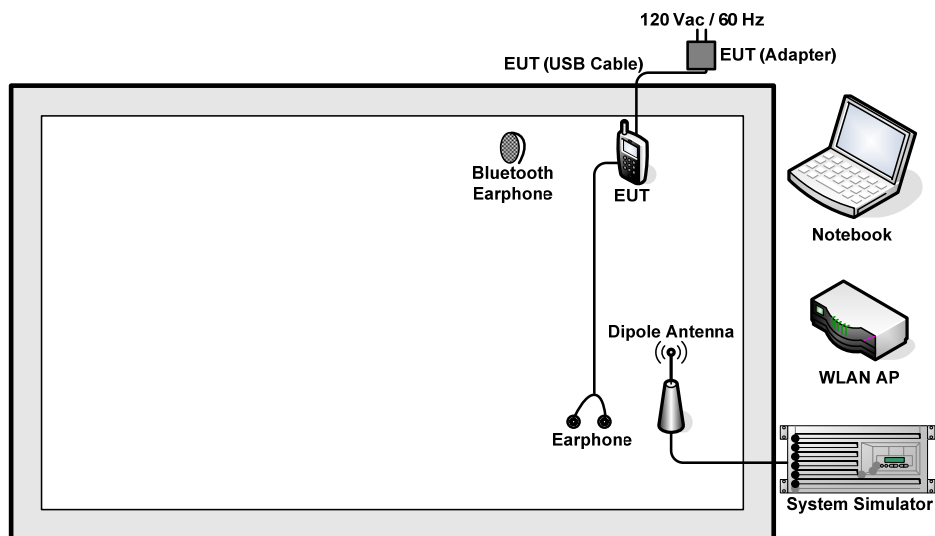

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
3.	Notebook	Lenovo	G480	PRC4	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Nokia	BH-106	QTLBH-106	N/A	N/A
5.	Earphone	Lenovo	SH100	N/A	N/A	N/A

2.6 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.5 dB.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 5.5 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.


3.1.4 Test Setup

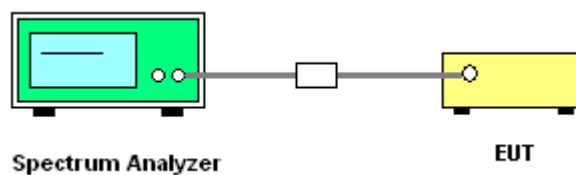



3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A of this test report.

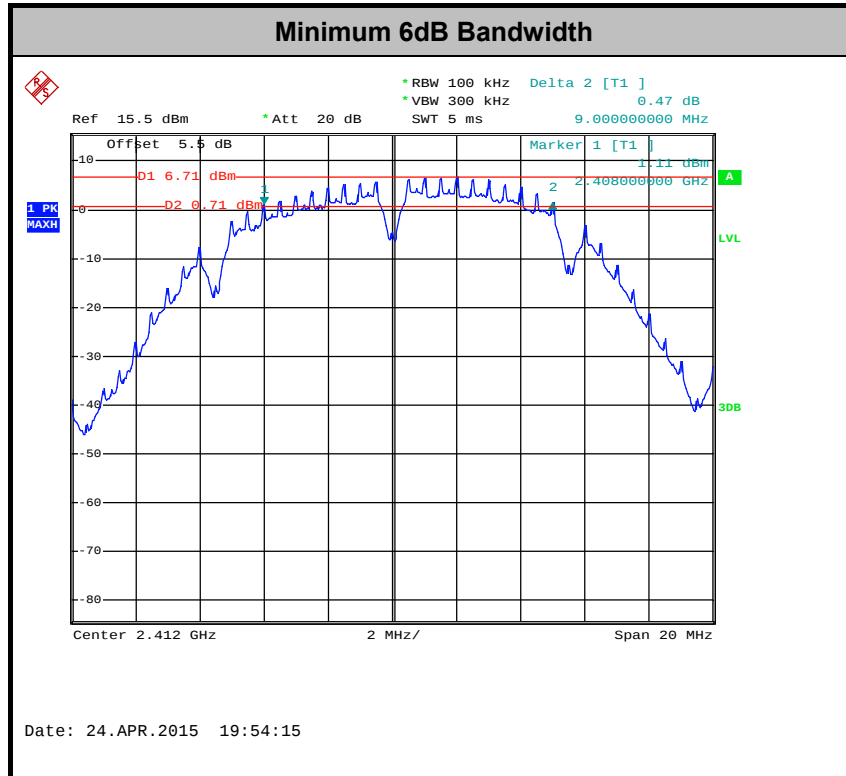

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Peak Output Power

Please refer to Appendix A of this test report.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A of this test report.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

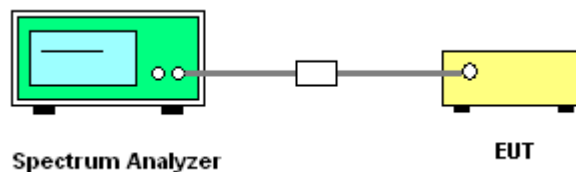

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A of this test report.

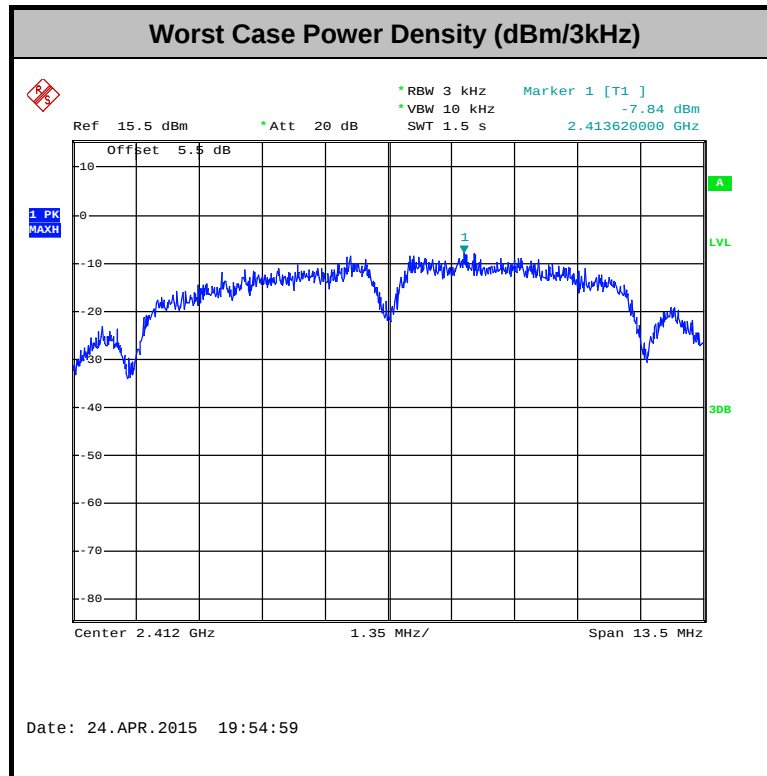

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

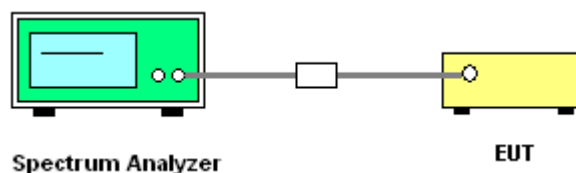




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Len Song


WLAN 802.11b Channel 01

100kHz PSD reference Level

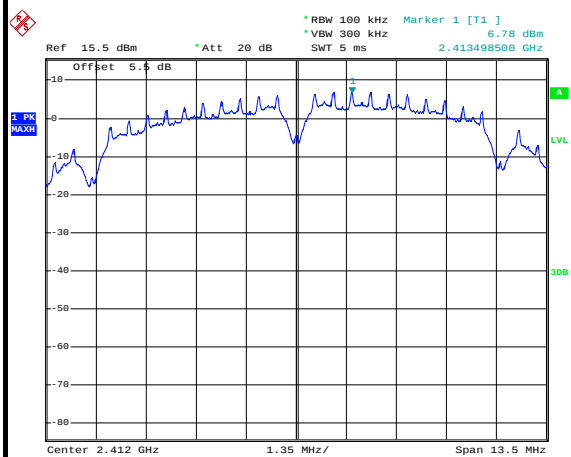


Date: 24.APR.2015 19:55:20

Low Channel Plot

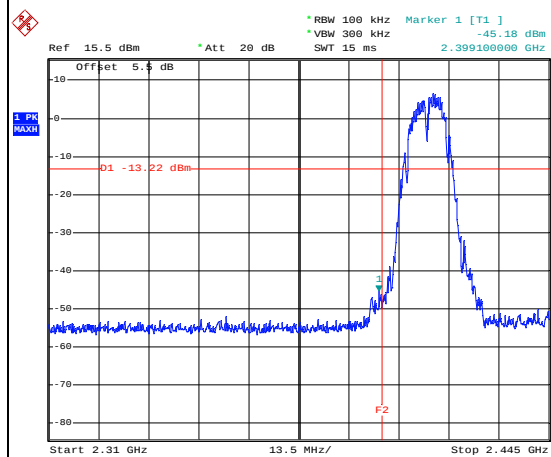


Date: 24.APR.2015 19:55:39

Spurious Emission 30MHz~3GHz

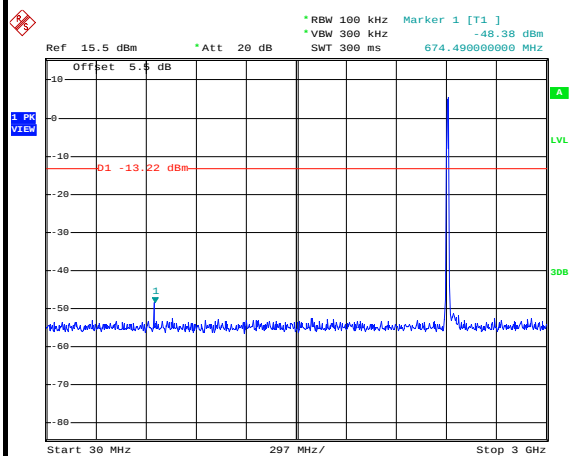

Date: 24.APR.2015 19:56:11

Spurious Emission 2GHz~25GHz

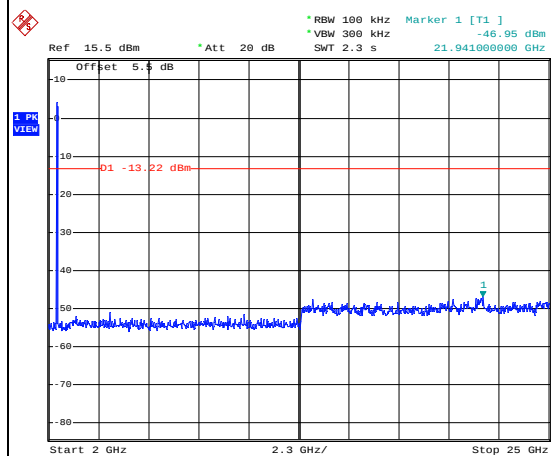


Date: 24.APR.2015 19:56:29



Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Len Song


WLAN 802.11b Channel 06

100kHz PSD reference Level

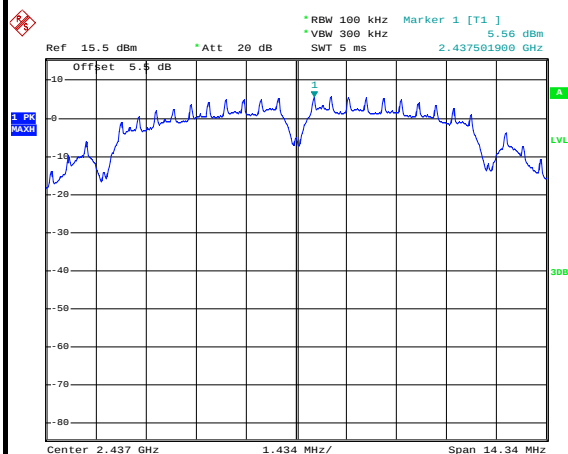


Date: 24.APR.2015 19:59:04

Spurious Emission 30MHz~3GHz

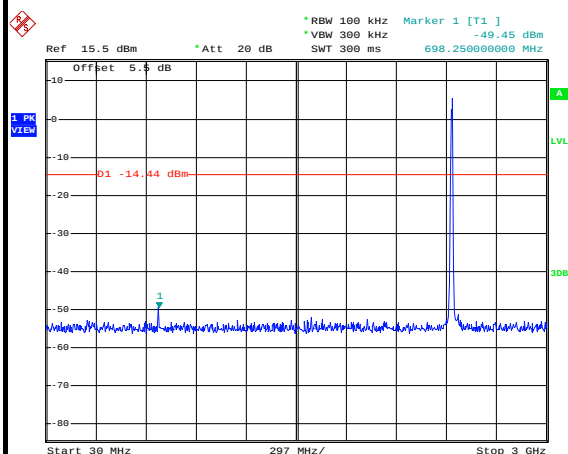

Date: 24.APR.2015 19:59:24

Spurious Emission 2GHz~25GHz

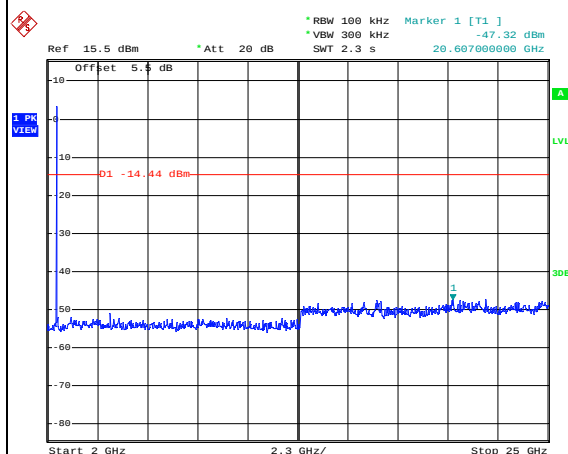


Date: 24.APR.2015 19:59:42



Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Len Song


WLAN 802.11b Channel 11

100kHz PSD reference Level

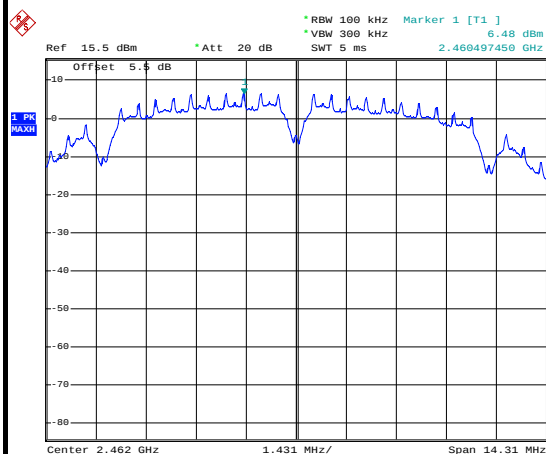


Date: 24.APR.2015 20:04:51

High Channel Plot

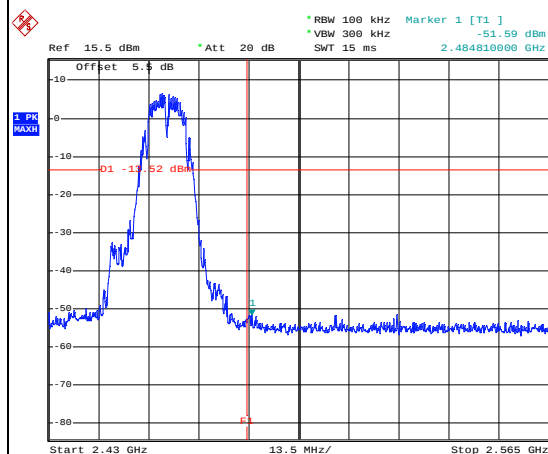


Date: 24.APR.2015 20:05:07

Spurious Emission 30MHz~3GHz

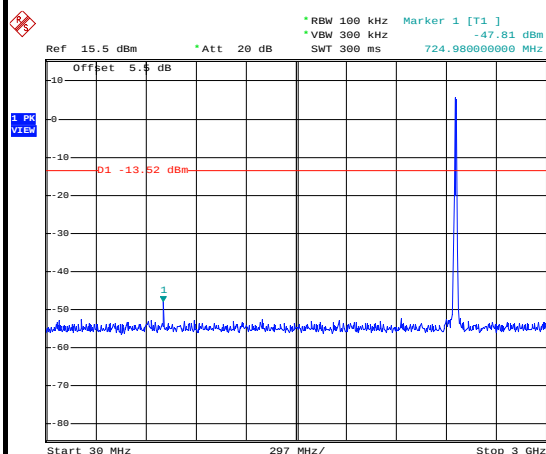

Date: 24.APR.2015 20:05:30

Spurious Emission 2GHz~25GHz

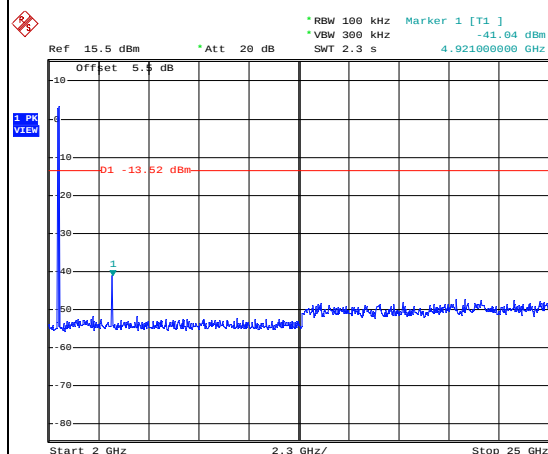


Date: 24.APR.2015 20:05:48



Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Len Song


WLAN 802.11g Channel 01

100kHz PSD reference Level

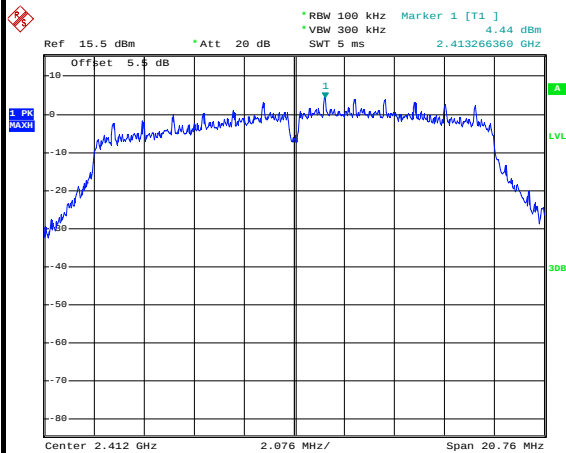


Date: 24.APR.2015 20:10:28

Low Channel Plot

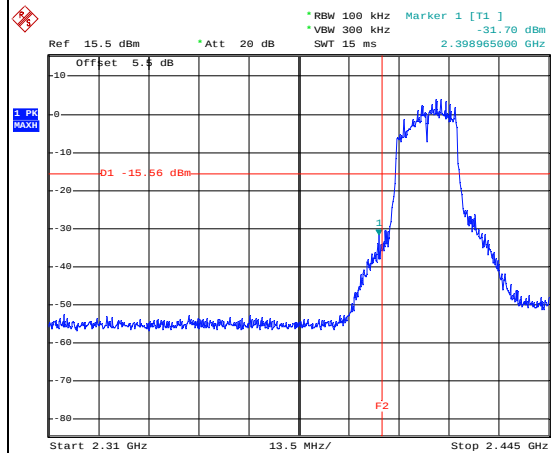


Date: 24.APR.2015 20:10:54

Spurious Emission 30MHz~3GHz

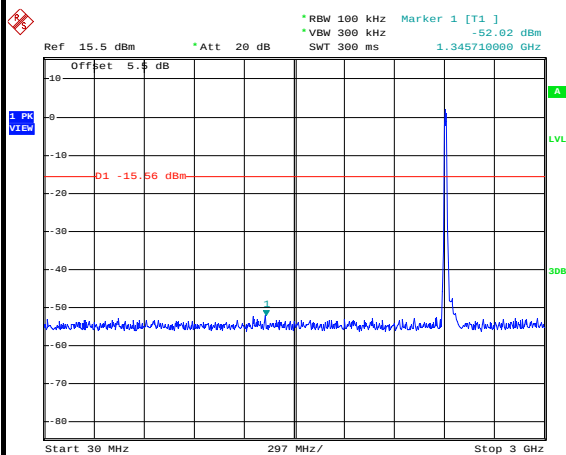

Date: 24.APR.2015 20:11:54

Spurious Emission 2GHz~25GHz

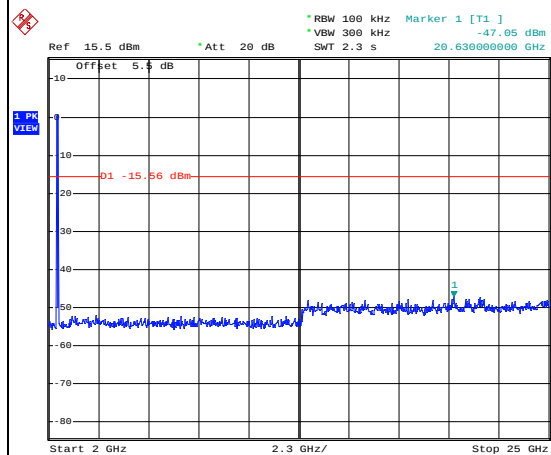


Date: 24.APR.2015 20:12:12



Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Len Song


WLAN 802.11g Channel 06

100kHz PSD reference Level

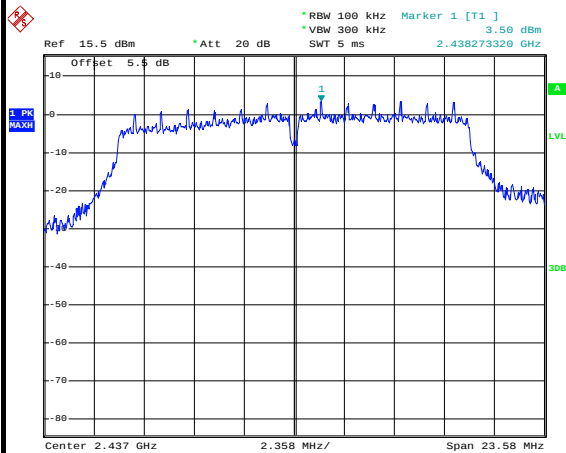


Date: 24.APR.2015 20:16:03

Spurious Emission 30MHz~3GHz

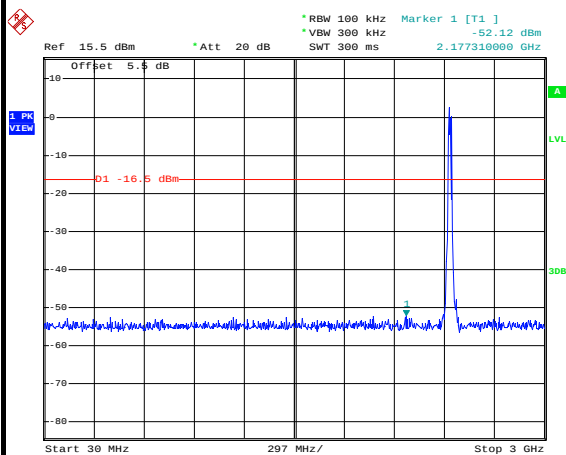

Date: 24.APR.2015 20:16:25

Spurious Emission 2GHz~25GHz

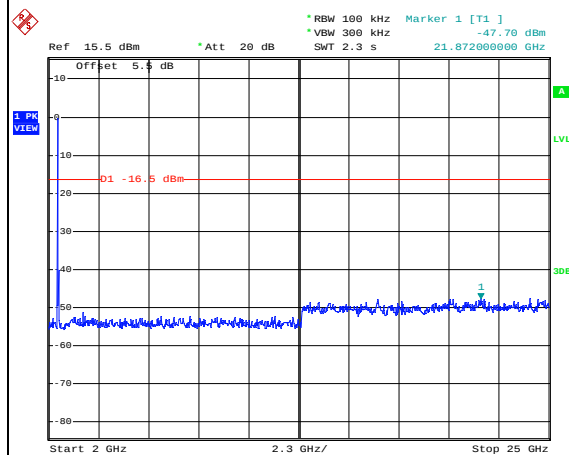


Date: 24.APR.2015 20:16:43



Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Len Song


WLAN 802.11g Channel 11

100kHz PSD reference Level

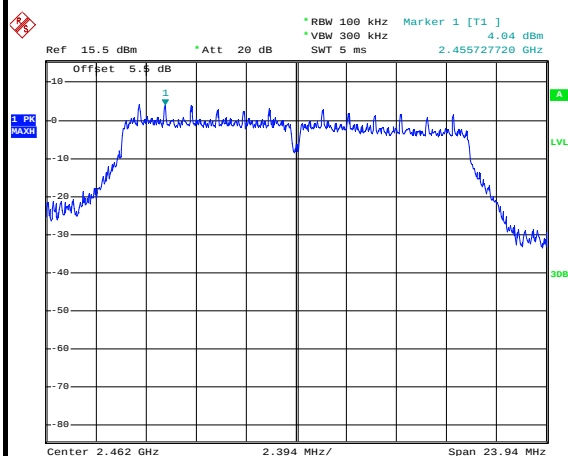


Date: 24.APR.2015 20:23:28

High Channel Plot

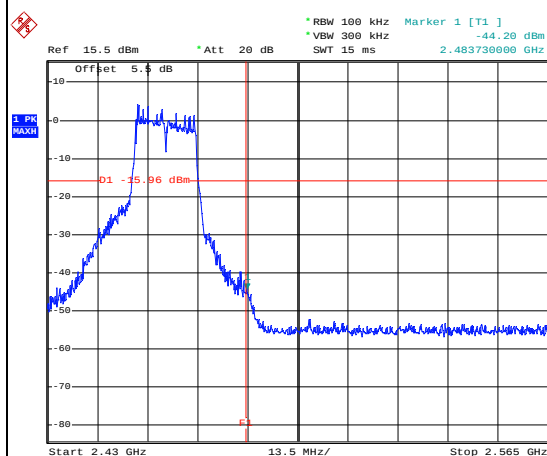


Date: 24.APR.2015 20:23:44

Spurious Emission 30MHz~3GHz

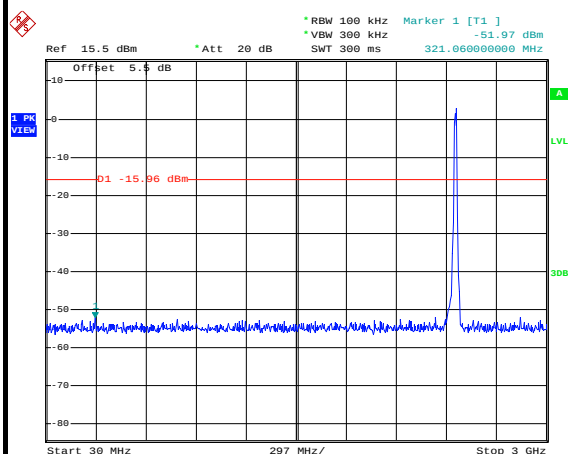

Date: 24.APR.2015 20:24:10

Spurious Emission 2GHz~25GHz

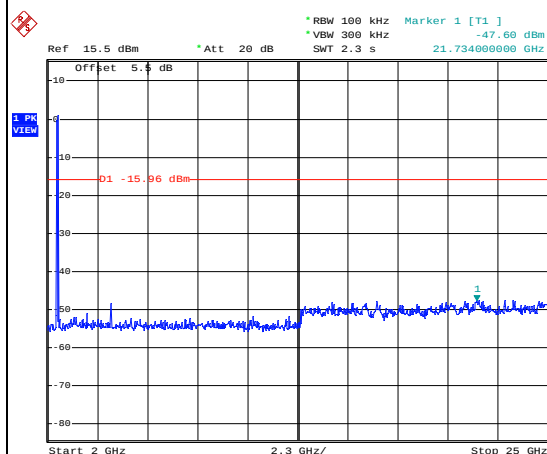


Date: 24.APR.2015 20:24:28



Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Len Song


WLAN 802.11n HT20 Channel 01

100kHz PSD reference Level

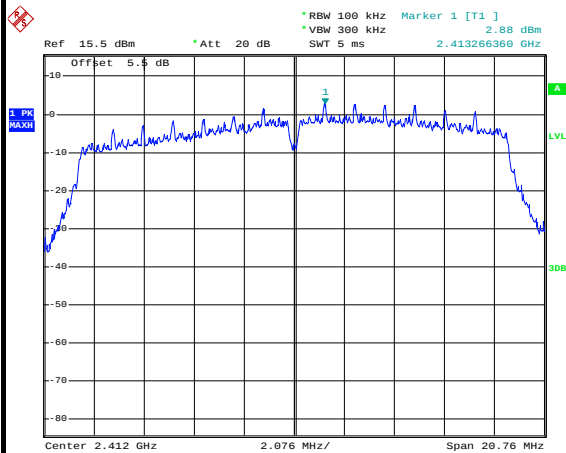


Date: 24.APR.2015 20:28:26

Low Channel Plot

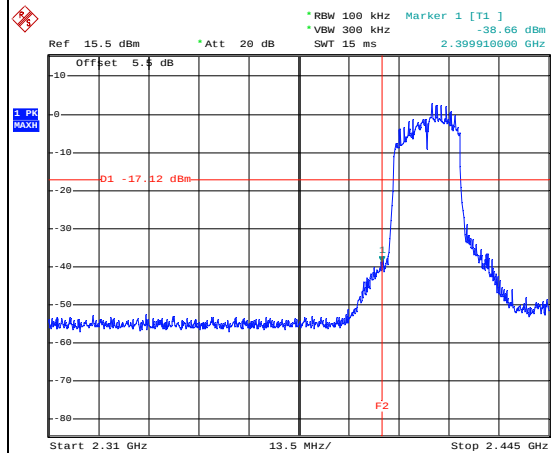


Date: 24.APR.2015 20:28:42

Spurious Emission 30MHz~3GHz

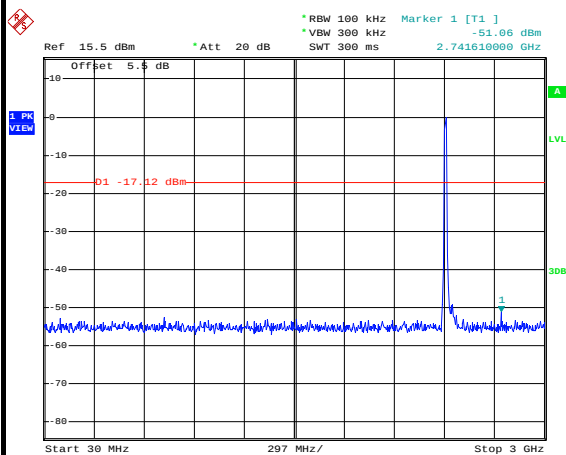

Date: 24.APR.2015 20:31:45

Spurious Emission 2GHz~25GHz

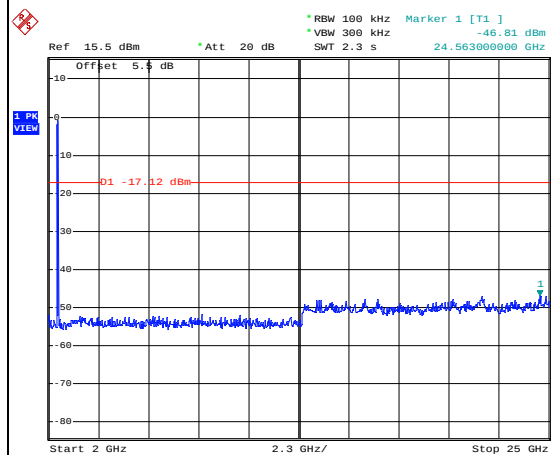


Date: 24.APR.2015 20:30:03



Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Len Song


WLAN 802.11n HT20 Channel 06

100kHz PSD reference Level

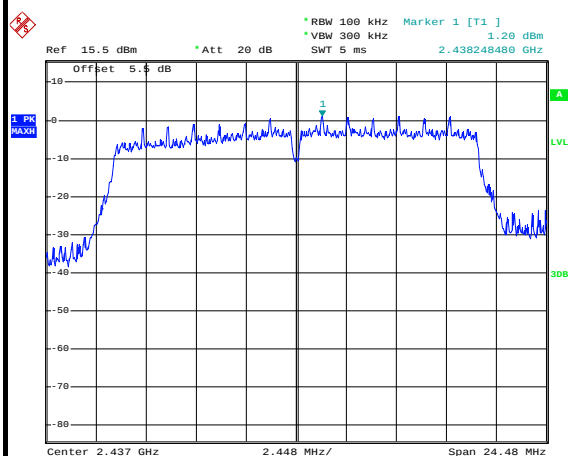


Date: 24.APR.2015 20:35:08

Spurious Emission 30MHz~3GHz

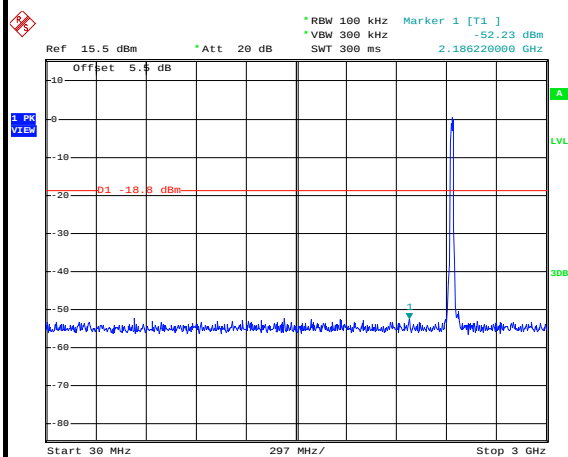

Date: 24.APR.2015 20:35:29

Spurious Emission 2GHz~25GHz

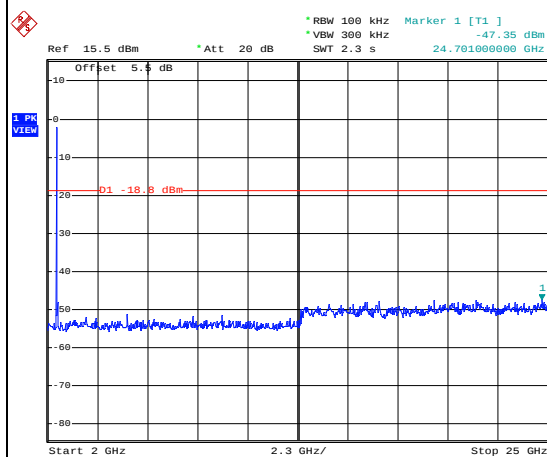


Date: 24.APR.2015 20:35:47



Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Len Song


WLAN 802.11n HT20 Channel 11

100kHz PSD reference Level

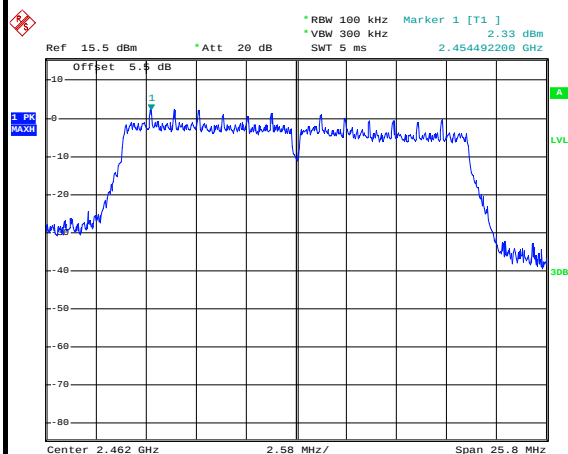


Date: 24.APR.2015 20:39:46

High Channel Plot

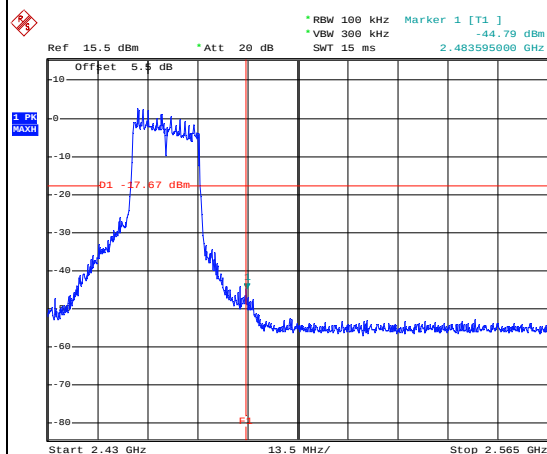


Date: 24.APR.2015 20:40:02

Spurious Emission 30MHz~3GHz

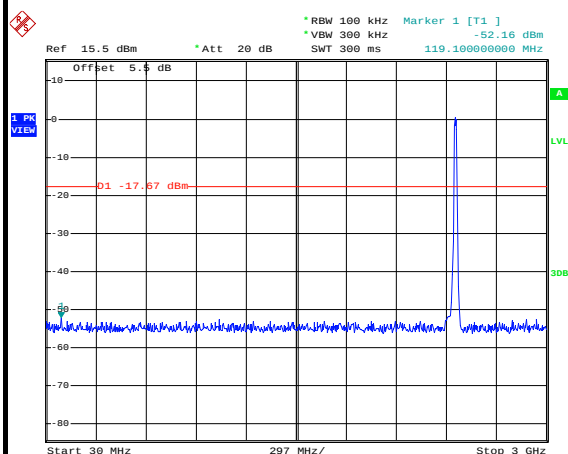

Date: 24.APR.2015 20:40:25

Spurious Emission 2GHz~25GHz

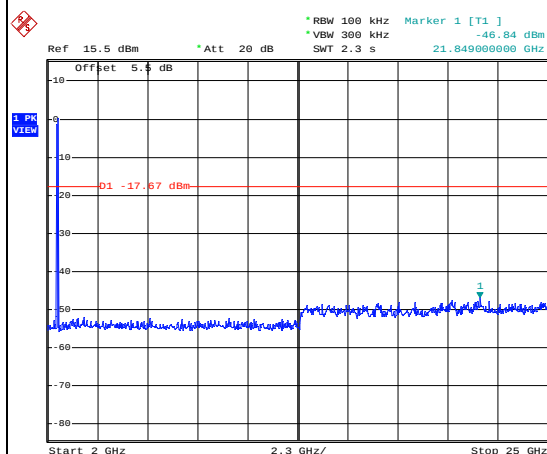


Date: 24.APR.2015 20:40:43



Test Mode :	802.11n HT40	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	03	Test Engineer :	Len Song


WLAN 802.11n HT40 Channel 03

100kHz PSD reference Level

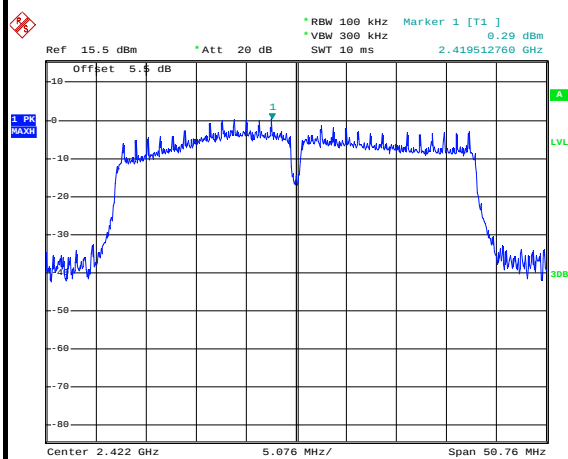


Date: 24.APR.2015 20:43:54

Low Channel Plot

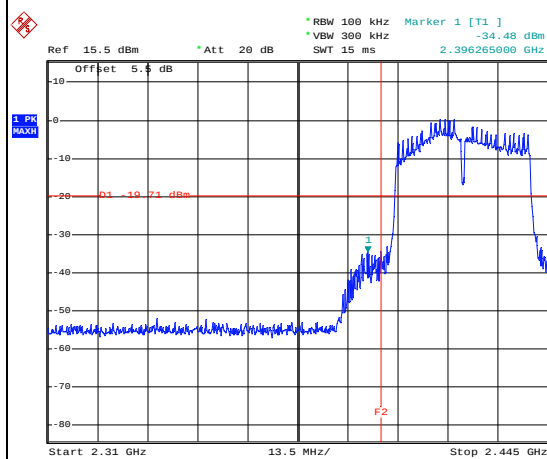


Date: 24.APR.2015 20:44:10

Spurious Emission 30MHz~3GHz

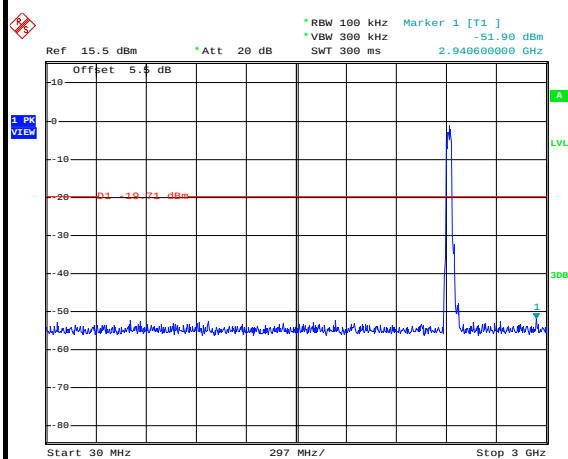

Date: 24.APR.2015 20:44:32

Spurious Emission 2GHz~25GHz

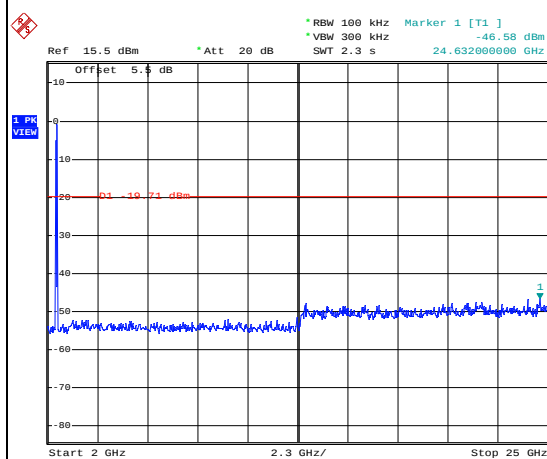


Date: 24.APR.2015 20:44:50



Test Mode :	802.11n HT40	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Len Song


WLAN 802.11n HT40 Channel 06

100kHz PSD reference Level

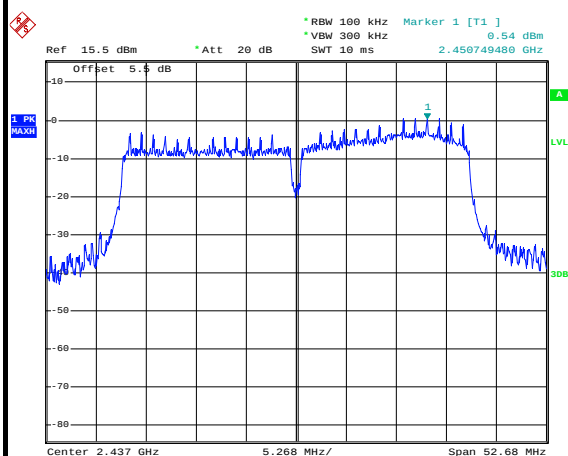


Date: 24.APR.2015 20:47:58

Spurious Emission 30MHz~3GHz

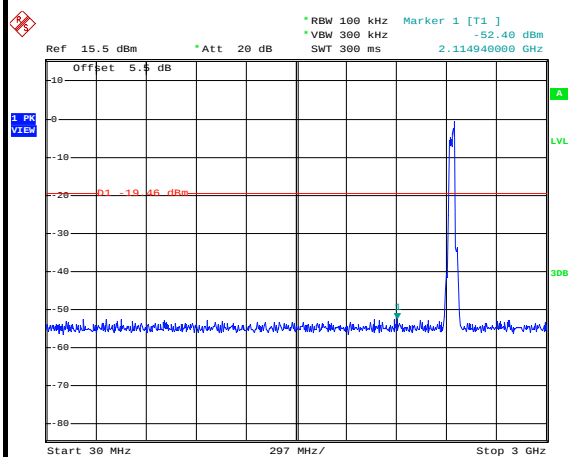

Date: 24.APR.2015 20:49:02

Spurious Emission 2GHz~25GHz

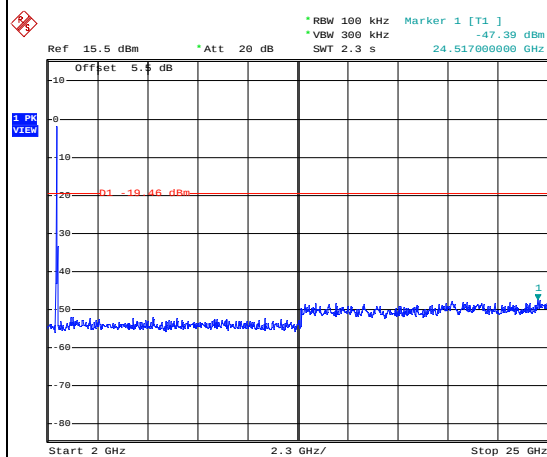


Date: 24.APR.2015 20:49:20



Test Mode :	802.11n HT40	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	09	Test Engineer :	Len Song


WLAN 802.11n HT40 Channel 09

100kHz PSD reference Level

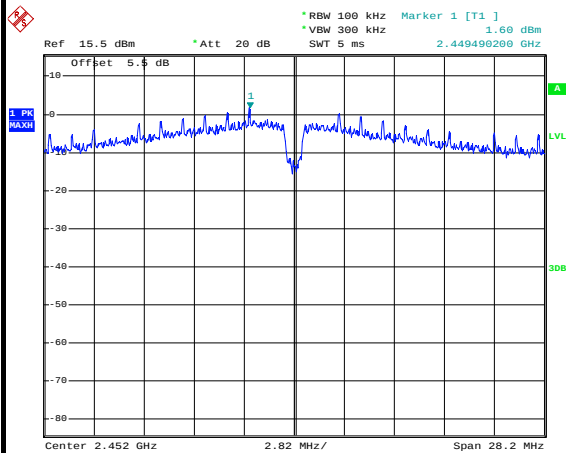


Date: 24.APR.2015 21:10:31

High Channel Plot

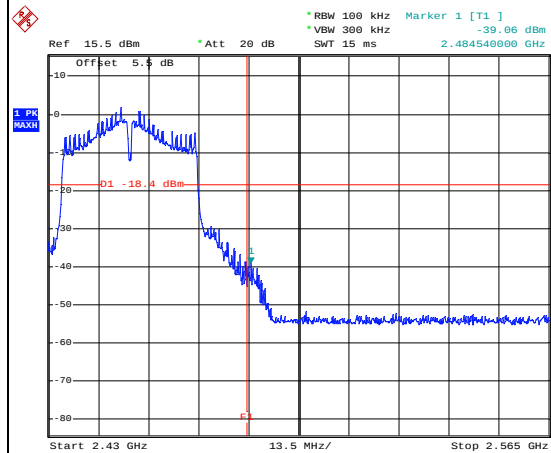


Date: 29.APR.2015 17:20:53

Spurious Emission 30MHz~3GHz

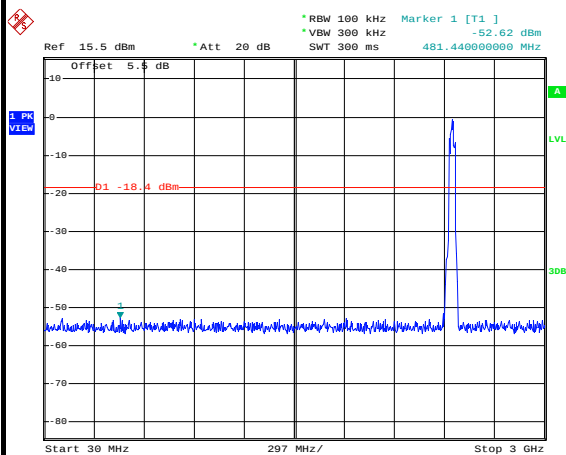

Date: 29.APR.2015 17:24:58

Spurious Emission 2GHz~25GHz

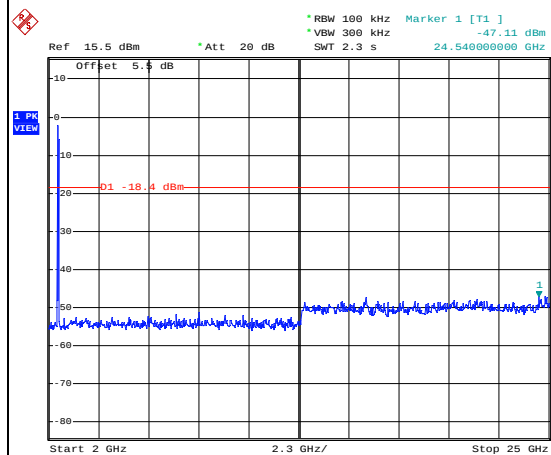

Date: 29.APR.2015 17:25:55

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.


For average measurement:

 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	98.13	-	-	10Hz
802.11g	89.17	1.40	0.71	1kHz
2.4GHz 802.11n HT20	88.27	1.29	0.77	1kHz
2.4GHz 802.11n HT40	79.13	0.65	1.53	3kHz

3.5.4 Test Setup


For radiated emissions below 30MHz

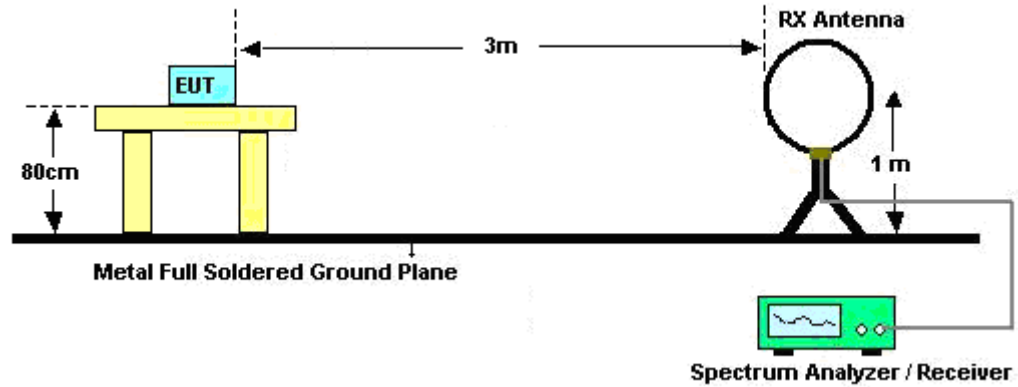

For radiated emissions from 30MHz to 1GHz

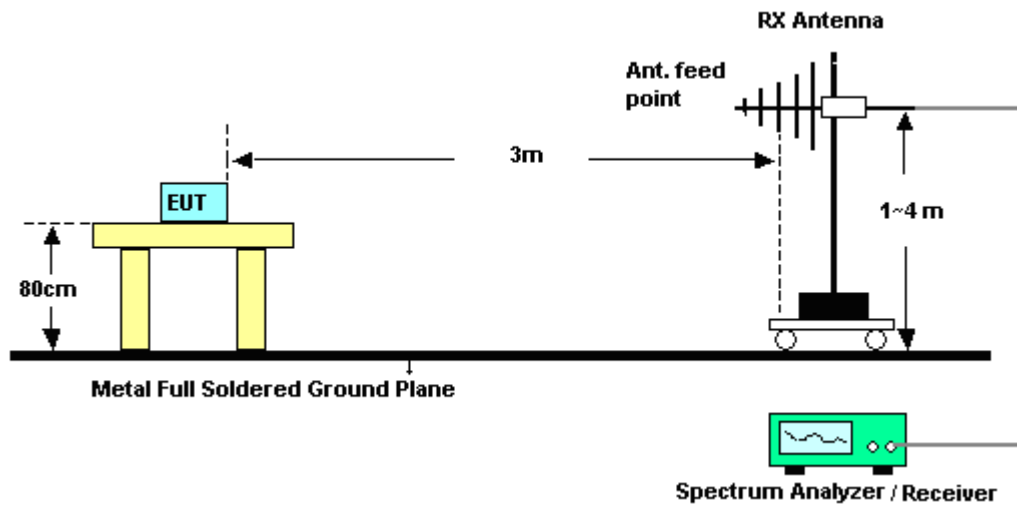

For radiated emissions above 1GHz

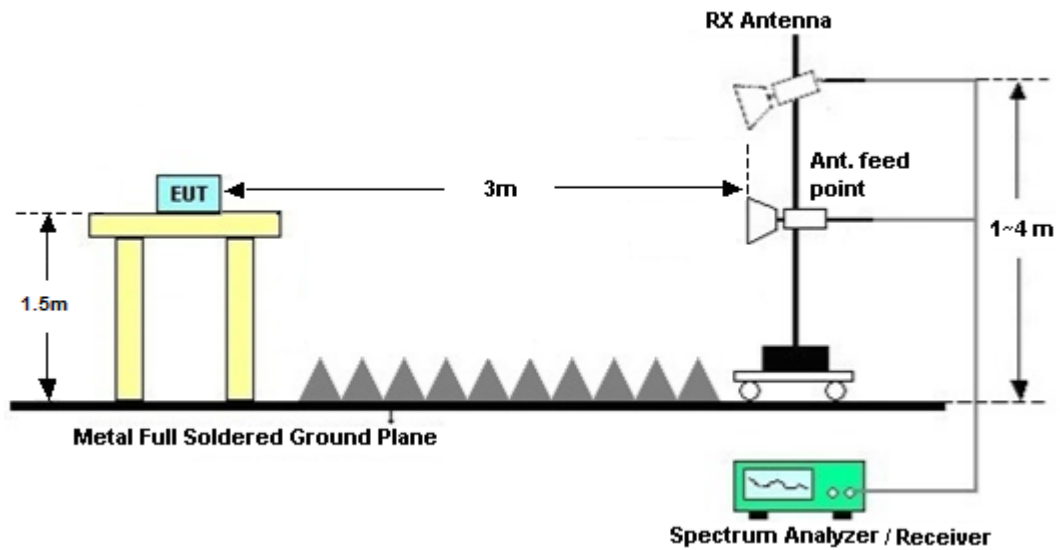

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.


3.6.4 Test Setup

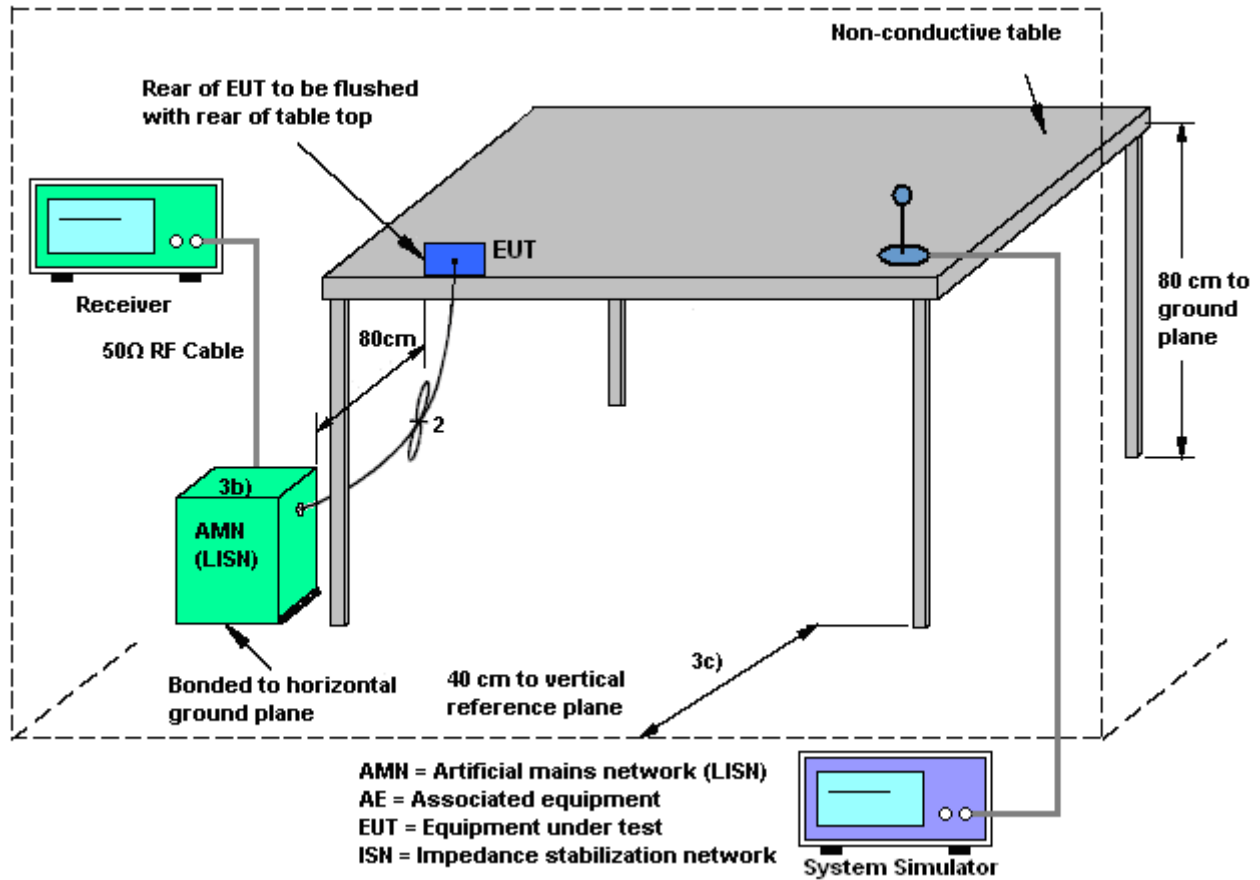



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Eko Guan	Relative Humidity :	35~37%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter)		

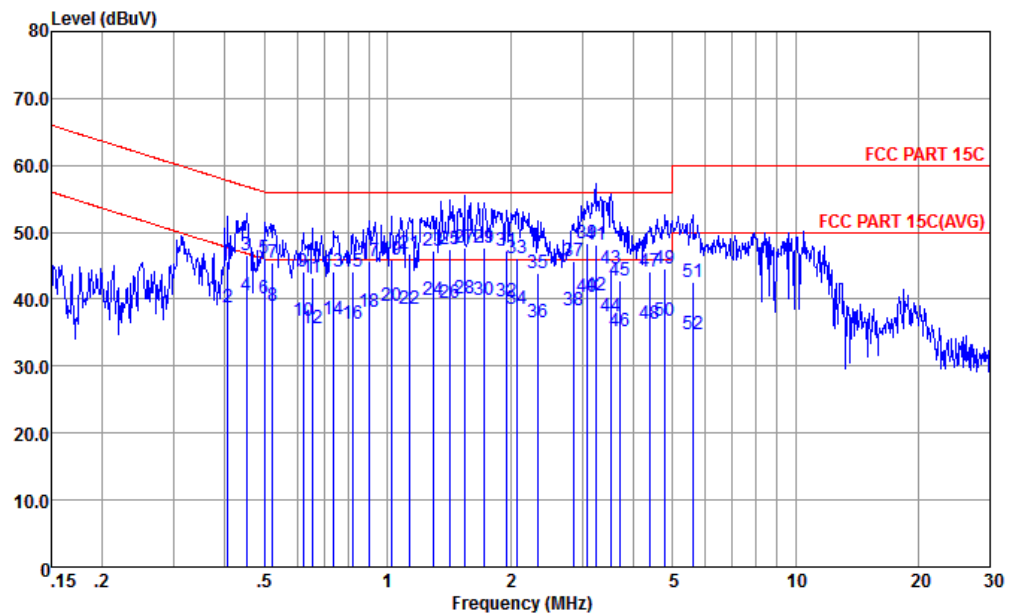


Site : CO01-KS
Condition : FCC PART 15C LISN-L20140306 LINE

mode		: Mode 1						
	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.41	45.73	-12.00	57.73	34.80	0.31	10.62	QP
2	0.41	38.73	-9.00	47.73	27.80	0.31	10.62	Average
3	0.45	46.57	-10.28	56.85	35.70	0.25	10.62	QP
4	0.45	40.47	-6.38	46.85	29.60	0.25	10.62	Average
5	0.50	46.12	-9.89	56.01	35.30	0.20	10.62	QP
6	0.50	40.02	-5.99	46.01	29.20	0.20	10.62	Average
7	0.52	45.53	-10.47	56.00	34.70	0.20	10.63	QP
8	0.52	39.03	-6.97	46.00	28.20	0.20	10.63	Average
9	0.62	44.03	-11.97	56.00	33.20	0.20	10.63	QP
10	0.62	36.73	-9.27	46.00	25.90	0.20	10.63	Average
11	0.65	43.14	-12.86	56.00	32.30	0.20	10.64	QP
12	0.65	35.74	-10.26	46.00	24.90	0.20	10.64	Average
13	0.74	44.23	-11.77	56.00	33.40	0.19	10.64	QP
14	0.74	37.03	-8.97	46.00	26.20	0.19	10.64	Average
15	0.82	44.10	-11.90	56.00	33.29	0.16	10.65	QP
16	0.82	36.40	-9.60	46.00	25.59	0.16	10.65	Average
17	0.90	45.67	-10.33	56.00	34.90	0.12	10.65	QP
18	0.90	38.07	-7.93	46.00	27.30	0.12	10.65	Average
19	1.02	45.95	-10.05	56.00	35.20	0.10	10.65	QP
20	1.02	38.95	-7.05	46.00	28.20	0.10	10.65	Average
21	1.14	46.86	-9.14	56.00	36.10	0.10	10.66	QP
22	1.14	38.46	-7.54	46.00	27.70	0.10	10.66	Average
23	1.30	47.26	-8.74	56.00	36.50	0.10	10.66	QP
24	1.30	39.86	-6.14	46.00	29.10	0.10	10.66	Average
25	1.42	47.38	-8.62	56.00	36.61	0.10	10.67	QP



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Eko Guan	Relative Humidity :	35~37%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter)		

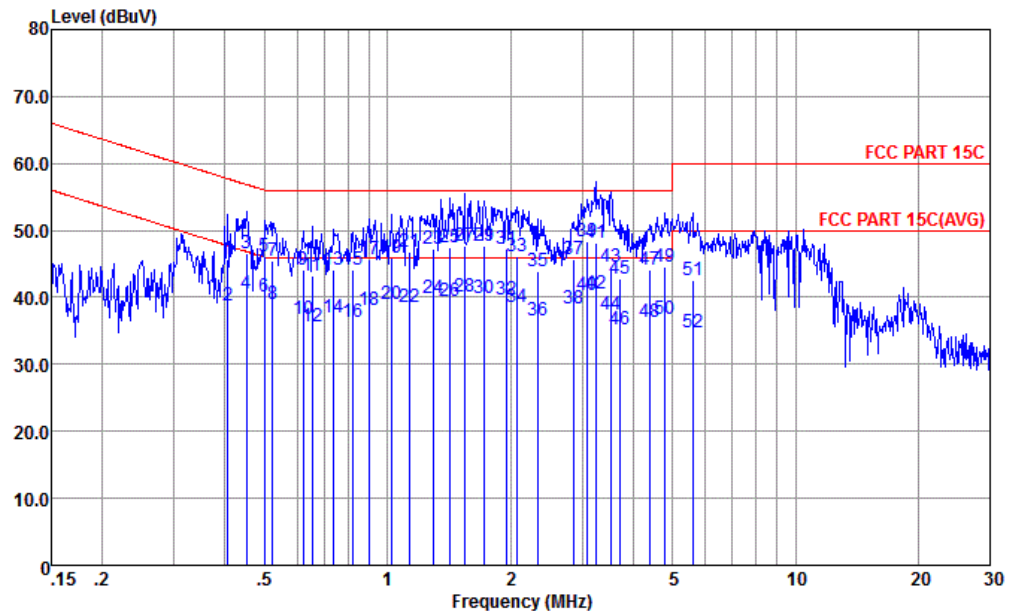


Site : CO01-KS
Condition : FCC PART 15C LISN-L20140306 LINE

mode		: Mode 1						
	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
26	1.42	39.47	-6.53	46.00	28.70	0.10	10.67	Average
27	1.54	47.69	-8.31	56.00	36.90	0.10	10.69	QP
28	1.54	40.09	-5.91	46.00	29.30	0.10	10.69	Average
29	1.73	47.69	-8.31	56.00	36.90	0.10	10.69	QP
30	1.73	39.99	-6.01	46.00	29.20	0.10	10.69	Average
31	1.96	47.30	-8.70	56.00	36.50	0.10	10.70	QP
32	1.96	39.70	-6.30	46.00	28.90	0.10	10.70	Average
33	2.08	46.21	-9.79	56.00	35.41	0.10	10.70	QP
34	2.08	38.61	-7.39	46.00	27.81	0.10	10.70	Average
35	2.33	43.93	-12.07	56.00	33.10	0.11	10.72	QP
36	2.33	36.63	-9.37	46.00	25.80	0.11	10.72	Average
37	2.85	45.60	-10.40	56.00	34.70	0.13	10.77	QP
38	2.85	38.40	-7.60	46.00	27.50	0.13	10.77	Average
39	3.09	48.34	-7.66	56.00	37.41	0.14	10.79	QP
40	3.09	40.34	-5.66	46.00	29.41	0.14	10.79	Average
41	3.24	48.06	-7.94	56.00	37.10	0.16	10.80	QP
42 *	3.24	40.56	-5.44	46.00	29.60	0.16	10.80	Average
43	3.53	44.59	-11.41	56.00	33.60	0.17	10.82	QP
44	3.53	37.49	-8.51	46.00	26.50	0.17	10.82	Average
45	3.72	42.80	-13.20	56.00	31.80	0.18	10.82	QP
46	3.72	35.20	-10.80	46.00	24.20	0.18	10.82	Average
47	4.41	44.13	-11.87	56.00	33.10	0.19	10.84	QP
48	4.41	36.23	-9.77	46.00	25.20	0.19	10.84	Average
49	4.80	44.64	-11.36	56.00	33.59	0.20	10.85	QP
50	4.80	36.84	-9.16	46.00	25.79	0.20	10.85	Average
51	5.59	42.67	-17.33	60.00	31.60	0.20	10.87	QP
52	5.59	34.77	-15.23	50.00	23.70	0.20	10.87	Average



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Eko Guan	Relative Humidity :	35~37%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter)		

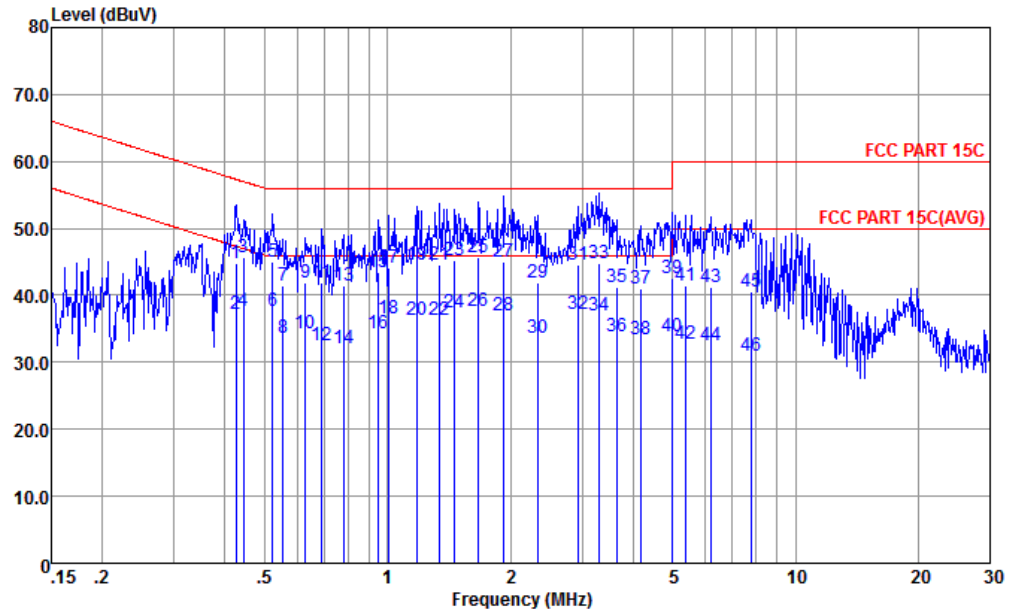


Site : CO01-KS
Condition : FCC PART 15C LISN-N20140306 NEUTRAL

mode		: Mode 1						
	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.43	44.89	-12.44	57.33	33.90	0.37	10.62	QP
2	0.43	37.19	-10.14	47.33	26.20	0.37	10.62	Average
3	0.44	45.77	-11.21	56.98	34.80	0.35	10.62	QP
4	0.44	37.77	-9.21	46.98	26.80	0.35	10.62	Average
5	0.52	45.12	-10.88	56.00	34.20	0.29	10.63	QP
6 *	0.52	37.72	-8.28	46.00	26.80	0.29	10.63	Average
7	0.56	41.50	-14.50	56.00	30.60	0.27	10.63	QP
8	0.56	33.70	-12.30	46.00	22.80	0.27	10.63	Average
9	0.63	41.96	-14.04	56.00	31.10	0.23	10.63	QP
10	0.63	34.36	-11.64	46.00	23.50	0.23	10.63	Average
11	0.69	41.94	-14.06	56.00	31.10	0.20	10.64	QP
12	0.69	32.64	-13.46	46.00	21.70	0.20	10.64	Average
13	0.78	41.42	-14.58	56.00	30.60	0.18	10.64	QP
14	0.78	32.02	-13.98	46.00	21.20	0.18	10.64	Average
15	0.95	43.36	-12.64	56.00	32.60	0.11	10.65	QP
16	0.95	34.26	-11.74	46.00	23.50	0.11	10.65	Average
17	1.00	44.05	-11.95	56.00	33.30	0.10	10.65	QP
18	1.00	36.45	-9.55	46.00	25.70	0.10	10.65	Average
19	1.18	44.56	-11.44	56.00	33.80	0.10	10.66	QP
20	1.18	36.26	-9.74	46.00	25.50	0.10	10.66	Average
21	1.34	44.67	-11.33	56.00	33.90	0.10	10.67	QP
22	1.34	36.37	-9.63	46.00	25.60	0.10	10.67	Average
23	1.46	45.18	-10.82	56.00	34.40	0.10	10.68	QP
24	1.46	37.38	-8.62	46.00	26.60	0.10	10.68	Average
25	1.67	45.59	-10.41	56.00	34.80	0.10	10.69	QP



Test Mode :	Mode 1	Temperature :	22~24℃
Test Engineer :	Eko Guan	Relative Humidity :	35~37%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter)		

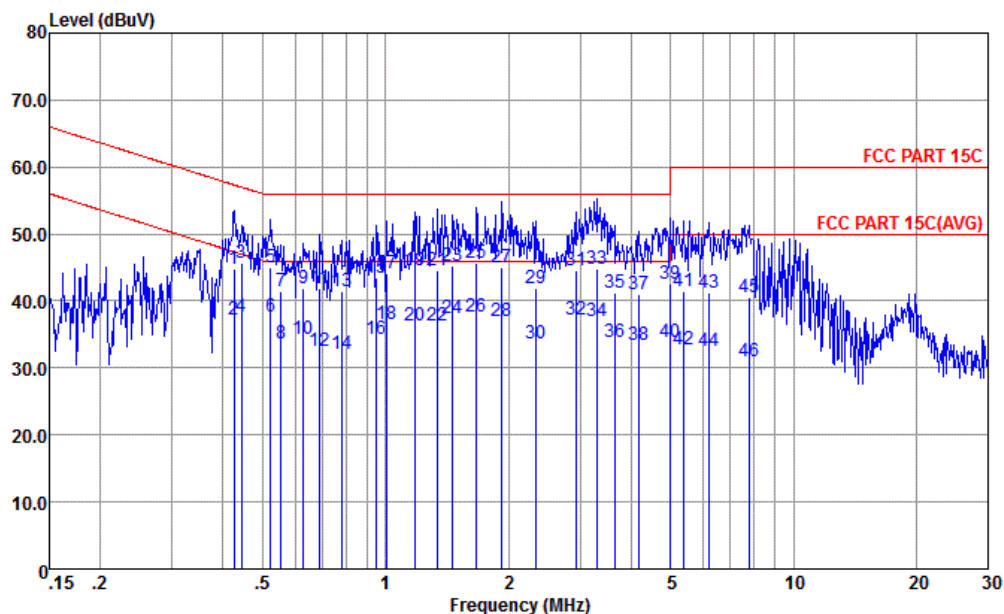

Site : CO01-KS
Condition : FCC PART 15C LISN-N20140306 NEUTRAL

mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
26	1.67	37.69	-8.31	46.00	26.90	0.10	10.69	Average
27	1.93	45.00	-11.00	56.00	34.20	0.10	10.70	QP
28	1.93	36.90	-9.10	46.00	26.10	0.10	10.70	Average
29	2.33	41.93	-14.07	56.00	31.10	0.11	10.72	QP
30	2.33	33.73	-12.27	46.00	22.90	0.11	10.72	Average
31	2.93	44.61	-11.39	56.00	33.70	0.13	10.78	QP
32	2.93	37.21	-8.79	46.00	26.30	0.13	10.78	Average
33	3.29	44.86	-11.14	56.00	33.90	0.16	10.80	QP
34	3.29	37.06	-8.94	46.00	26.10	0.16	10.80	Average
35	3.64	41.29	-14.71	56.00	30.30	0.17	10.82	QP
36	3.64	33.79	-12.21	46.00	22.80	0.17	10.82	Average
37	4.18	40.92	-15.08	56.00	29.90	0.19	10.83	QP
38	4.18	33.52	-12.48	46.00	22.50	0.19	10.83	Average
39	4.98	42.55	-13.45	56.00	31.50	0.20	10.85	QP
40	4.98	33.85	-12.15	46.00	22.80	0.20	10.85	Average
41	5.36	41.56	-18.44	60.00	30.50	0.20	10.86	QP
42	5.36	32.66	-17.34	50.00	21.60	0.20	10.86	Average
43	6.19	41.19	-18.81	60.00	30.10	0.20	10.89	QP
44	6.19	32.59	-17.41	50.00	21.50	0.20	10.89	Average
45	7.77	40.54	-19.46	60.00	29.40	0.20	10.94	QP
46	7.77	31.04	-18.96	50.00	19.90	0.20	10.94	Average



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Oct. 28, 2014	Apr. 24, 2015~ Apr. 29, 2015	Oct. 27, 2015	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	30MHz~40GHz	Jan. 23, 2015	Apr. 24, 2015~ Apr. 29, 2015	Jan. 22, 2016	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 23, 2015	Apr. 24, 2015~ Apr. 29, 2015	Jan. 22, 2016	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max x 30dBm	Sep. 29, 2014	Apr. 18, 2015	Sep. 28, 2015	Radiation (03CH02-KS)
Spectrum Analyzer	R&S	FSV40	101040	10kHz~40GHz; Max 30dBm	Sep. 25, 2014	Apr. 18, 2015	Sep. 24, 2015	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 13, 2014	Apr. 18, 2015	Nov. 12, 2015	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	37879	30MHz~2GHz	Sep. 13, 2014	Apr. 18, 2015	Sep. 12, 2015	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 08, 2014	Apr. 18, 2015	Nov. 07, 2015	Radiation (03CH02-KS)
Active Horn Antenna	com-power	AHA-118	701030	1GHz~18GHz	Nov. 08, 2014	Apr. 18, 2015	Nov. 07, 2015	Radiation (03CH02-KS)
SHF-EHF Horn	com-power	AH-840	101070	18GHz~40GHz	Sep. 04, 2014	Apr. 18, 2015	Sep. 03, 2015	Radiation (03CH02-KS)
Amplifier	com-power	PA-103A	161069	1kHz ~1000MHz / 32 dB	May 04, 2014	Apr. 18, 2015	May 03, 2015	Radiation (03CH02-KS)
Amplifier	Agilent	8449B	3008A02384	1GHz~26.5GHz	Oct. 28, 2014	Apr. 18, 2015	Oct. 27, 2015	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Apr. 18, 2015	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Apr. 18, 2015	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Apr. 18, 2015	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 04, 2014	Mar. 27, 2015	May 03, 2015	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 25, 2014	Mar. 27, 2015	Oct. 24, 2015	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 25, 2014	Mar. 27, 2015	Oct. 24, 2015	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 25, 2014	Mar. 27, 2015	Oct. 24, 2015	Conduction (CO01-KS)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
---	--------



Appendix A. Conducted Test Results

Report Number : FR532302C

Test Engineer:	Len song	Temperature:	21~25	°C
Test Date:	2015/4/24~2015/4/29	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	12.15	9.00	0.50	Pass
11b	1Mbps	1	6	2437	12.55	9.56	0.50	Pass
11b	1Mbps	1	11	2462	12.95	9.54	0.50	Pass
11g	6Mbps	1	1	2412	17.10	13.84	0.50	Pass
11g	6Mbps	1	6	2437	18.15	15.72	0.50	Pass
11g	6Mbps	1	11	2462	18.20	15.96	0.50	Pass
HT20	MCS0	1	1	2412	17.90	13.84	0.50	Pass
HT20	MCS0	1	6	2437	18.45	16.32	0.50	Pass
HT20	MCS0	1	11	2462	18.75	17.20	0.50	Pass
HT40	MCS0	1	3	2422	35.80	33.84	0.50	Pass
HT40	MCS0	1	6	2437	36.40	35.12	0.50	Pass
HT40	MCS0	1	9	2452	35.80	18.80	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	17.95	30.00	-1.00	16.95	36.00	Pass
11b	1Mbps	1	6	2437	17.48	30.00	-1.00	16.48	36.00	Pass
11b	1Mbps	1	11	2462	18.38	30.00	-1.00	17.38	36.00	Pass
11g	6Mbps	1	1	2412	22.33	30.00	-1.00	21.33	36.00	Pass
11g	6Mbps	1	6	2437	22.30	30.00	-1.00	21.30	36.00	Pass
11g	6Mbps	1	11	2462	23.46	30.00	-1.00	22.46	36.00	Pass
HT20	MCS0	1	1	2412	21.74	30.00	-1.00	20.74	36.00	Pass
HT20	MCS0	1	6	2437	21.48	30.00	-1.00	20.48	36.00	Pass
HT20	MCS0	1	11	2462	22.09	30.00	-1.00	21.09	36.00	Pass
HT40	MCS0	1	3	2422	23.08	30.00	-1.00	22.08	36.00	Pass
HT40	MCS0	1	6	2437	22.84	30.00	-1.00	21.84	36.00	Pass
HT40	MCS0	1	9	2452	23.29	30.00	-1.00	22.29	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.08	15.06
11b	1Mbps	1	6	2437	0.08	14.36
11b	1Mbps	1	11	2462	0.08	15.46
11g	6Mbps	1	1	2412	0.50	14.21
11g	6Mbps	1	6	2437	0.50	14.01
11g	6Mbps	1	11	2462	0.50	14.91
HT20	MCS0	1	1	2412	0.54	12.32
HT20	MCS0	1	6	2437	0.54	12.06
HT20	MCS0	1	11	2462	0.54	12.93
HT40	MCS0	1	3	2422	1.02	12.82
HT40	MCS0	1	6	2437	1.02	12.44
HT40	MCS0	1	9	2452	1.02	13.04

TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-7.84	-1.00	8.00	Pass
11b	1Mbps	1	6	2437	-9.21	-1.00	8.00	Pass
11b	1Mbps	1	11	2462	-7.85	-1.00	8.00	Pass
11g	6Mbps	1	1	2412	-10.15	-1.00	8.00	Pass
11g	6Mbps	1	6	2437	-11.63	-1.00	8.00	Pass
11g	6Mbps	1	11	2462	-10.14	-1.00	8.00	Pass
HT20	MCS0	1	1	2412	-9.17	-1.00	8.00	Pass
HT20	MCS0	1	6	2437	-13.30	-1.00	8.00	Pass
HT20	MCS0	1	11	2462	-12.71	-1.00	8.00	Pass
HT40	MCS0	1	3	2422	-14.74	-1.00	8.00	Pass
HT40	MCS0	1	6	2437	-14.69	-1.00	8.00	Pass
HT40	MCS0	1	9	2452	-13.93	-1.00	8.00	Pass



Appendix B. Radiated test results

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2389.2	48.64	-25.36	74	45.52	31.3	6.17	34.35	121	294	P	H
		2390	34.29	-19.71	54	31.17	31.3	6.17	34.35	121	294	A	H
	*	2413.527	104.55	-	-	101.36	31.31	6.22	34.34	121	294	P	H
	*	2413.945	98.66	-	-	95.47	31.31	6.22	34.34	121	294	A	H
		2389.83	49.58	-24.42	74	46.46	31.3	6.17	34.35	170	235	P	V
		2390	35.79	-18.21	54	32.67	31.3	6.17	34.35	170	235	A	V
	*	2413.444	107.87	-	-	104.68	31.31	6.22	34.34	170	235	P	V
	*	2413.861	101.87	-	-	98.68	31.31	6.22	34.34	170	235	A	V
802.11b CH 06 2437MHz	*	2435.571	104.36	-	-	99.03	31.33	6.22	32.22	100	249	P	H
	*	2435.321	98.21	-	-	92.88	31.33	6.22	32.22	100	249	A	H
	*	2435.655	106.04	-	-	100.71	31.33	6.22	32.22	114	299	P	V
	*	2435.237	99.76	-	-	94.43	31.33	6.22	32.22	114	299	A	V
802.11b CH 11 2462MHz	*	2460.621	105.5	-	-	99.95	31.36	6.28	32.09	164	221	P	H
	*	2460.204	99.41	-	-	93.86	31.36	6.28	32.09	164	221	A	H
		2499.92	52.57	-21.43	74	46.8	31.39	6.33	31.95	164	221	P	H
		2483.52	38	-16	54	32.32	31.37	6.33	32.02	164	221	A	H
	*	2460.454	109.17	-	-	103.62	31.36	6.28	32.09	180	252	P	V
	*	2460.287	103.06	-	-	97.51	31.36	6.28	32.09	180	252	A	V
		2483.72	52.72	-21.28	74	47.04	31.37	6.33	32.02	180	252	P	V
		2483.52	38.61	-15.39	54	32.93	31.37	6.33	32.02	180	252	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	50.08	-23.92	74	41.19	34.89	8.73	34.73	102	325	P	H
		4824	47	-27	74	38.11	34.89	8.73	34.73	168	263	P	V
802.11b CH 06 2437MHz		4875	45.89	-28.11	74	36.84	34.92	8.76	34.63	168	231	P	H
		7311	46.75	-27.25	74	36.4	35.56	10.84	36.05	195	146	P	H
		4875	45.95	-28.05	74	36.9	34.92	8.76	34.63	100	46	P	V
		7311	47.61	-26.39	74	37.26	35.56	10.84	36.05	163	78	P	V
802.11b CH 11 2462MHz		4924	50.38	-23.62	74	41.16	34.95	8.79	34.52	100	230	P	H
		7386	46.49	-27.51	74	36.41	35.58	10.89	36.39	168	97	P	H
		4923	47.39	-26.61	74	38.17	34.95	8.79	34.52	165	125	P	V
		7386	47.06	-26.94	74	36.98	35.58	10.89	36.39	167	65	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2389.83	56.84	-17.16	74	51.73	31.3	6.17	32.36	218	315	P	H
		2390	40.23	-13.77	54	35.12	31.3	6.17	32.36	218	315	A	H
	*	2416.199	106.14	-	-	100.9	31.31	6.22	32.29	218	315	P	H
	*	2414.613	94.89	-	-	89.65	31.31	6.22	32.29	218	315	A	H
		2390	63.45	-10.55	74	58.34	31.3	6.17	32.36	150	232	P	V
		2389.92	42.66	-11.34	54	37.55	31.3	6.17	32.36	150	232	A	V
	*	2416.616	108.96	-	-	103.72	31.31	6.22	32.29	150	232	P	V
	*	2414.863	97.51	-	-	92.27	31.31	6.22	32.29	150	232	A	V
802.11g CH 06 2437MHz	*	2434.736	106.47	-	-	101.14	31.33	6.22	32.22	250	310	P	H
	*	2434.987	95.45	-	-	90.12	31.33	6.22	32.22	250	310	A	H
	*	2438.994	108.8	-	-	103.33	31.34	6.28	32.15	153	300	P	V
	*	2435.237	97.75	-	-	92.42	31.33	6.22	32.22	153	300	A	V
802.11g CH 11 2462MHz	*	2460.371	106.28	-	-	100.73	31.36	6.28	32.09	170	311	P	H
	*	2459.535	95.12	-	-	89.57	31.36	6.28	32.09	170	311	A	H
		2483.88	64.65	-9.35	74	58.97	31.37	6.33	32.02	170	311	P	H
		2483.56	41.95	-12.05	54	36.27	31.37	6.33	32.02	170	311	A	H
	*	2459.535	110.63	-	-	105.08	31.36	6.28	32.09	150	262	P	V
	*	2458.45	99.41	-	-	93.86	31.36	6.28	32.09	150	262	A	V
	!	2483.6	70.17	-3.83	74	64.49	31.37	6.33	32.02	150	262	P	V
		2483.52	46	-8	54	40.32	31.37	6.33	32.02	150	262	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	44.36	-29.64	74	35.47	34.89	8.73	34.73	150	120	P	H
		4824	43.71	-30.29	74	34.82	34.89	8.73	34.73	150	140	P	V
802.11g CH 06 2437MHz		4875	43.73	-30.27	74	34.68	34.92	8.76	34.63	150	239	P	H
		7311	43.24	-30.76	74	32.89	35.56	10.84	36.05	150	24	P	H
		4875	44.24	-29.76	74	35.19	34.92	8.76	34.63	150	247	P	V
		7311	43.46	-30.54	74	33.11	35.56	10.84	36.05	150	248	P	V
802.11g CH 11 2462MHz		4923	45.52	-28.48	74	36.3	34.95	8.79	34.52	150	142	P	H
		7386	43.09	-30.91	74	33.01	35.58	10.89	36.39	150	0	P	H
		4923	44.15	-29.85	74	34.93	34.95	8.79	34.52	150	240	P	V
		7386	42.68	-31.32	74	32.6	35.58	10.89	36.39	150	145	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		2390	59.63	-14.37	74	54.52	31.3	6.17	32.36	119	284	P	H
		2390	41.2	-12.8	54	36.09	31.3	6.17	32.36	119	284	A	H
	*	2413.026	107.12	-	-	101.88	31.31	6.22	32.29	119	284	P	H
	*	2414.279	95.59	-	-	90.35	31.31	6.22	32.29	119	284	A	H
		2390	58.35	-15.65	74	53.24	31.3	6.17	32.36	100	293	P	V
		2390	39.99	-14.01	54	34.88	31.3	6.17	32.36	100	293	A	V
	*	2415.03	102.47	-	-	97.23	31.31	6.22	32.29	100	293	P	V
	*	2416.282	90.73	-	-	85.49	31.31	6.22	32.29	100	293	A	V
802.11n HT20 CH 06 2437MHz	*	2437.074	109.42	-	-	104.01	31.34	6.22	32.15	157	252	P	H
	*	2437.742	97.66	-	-	92.25	31.34	6.22	32.15	157	252	A	H
	*	2439.746	100.17	-	-	94.7	31.34	6.28	32.15	106	289	P	V
	*	2437.575	88.78	-	-	83.37	31.34	6.22	32.15	106	289	A	V
802.11n HT20 CH 11 2462MHz	*	2459.452	109.65	-	-	104.1	31.36	6.28	32.09	100	248	P	H
	*	2460.204	98.44	-	-	92.89	31.36	6.28	32.09	100	248	A	H
		2483.96	66.95	-7.05	74	61.27	31.37	6.33	32.02	100	248	P	H
		2483.52	43.74	-10.26	54	38.06	31.37	6.33	32.02	100	248	A	H
	*	2461.039	98.32	-	-	92.77	31.36	6.28	32.09	100	288	P	V
	*	2460.371	87.32	-	-	81.77	31.36	6.28	32.09	100	288	A	V
		2484.36	57.94	-16.06	74	52.26	31.37	6.33	32.02	100	288	P	V
		2483.6	39.3	-14.7	54	33.62	31.37	6.33	32.02	100	288	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		4824	44.53	-29.47	74	35.64	34.89	8.73	34.73	100	290	P	H
		4824	44.02	-29.98	74	35.13	34.89	8.73	34.73	100	0	P	V
802.11n HT20 CH 06 2437MHz		4875	45.13	-28.87	74	36.08	34.92	8.76	34.63	100	280	P	H
		7311	43.21	-30.79	74	32.86	35.56	10.84	36.05	100	0	P	H
		4875	45.28	-28.72	74	36.23	34.92	8.76	34.63	100	265	P	V
		7311	44.38	-29.62	74	34.03	35.56	10.84	36.05	100	290	P	V
802.11n HT20 CH 11 2462MHz		4923	45.24	-28.76	74	36.02	34.95	8.79	34.52	100	247	P	H
		7386	42.59	-31.41	74	32.51	35.58	10.89	36.39	100	115	P	H
		4923	44.33	-29.67	74	35.11	34.95	8.79	34.52	100	39	P	V
		7386	43.9	-30.1	74	33.82	35.58	10.89	36.39	100	148	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 03 2422MHz		2389.56	60.46	-13.54	74	55.35	31.3	6.17	32.36	262	295	P	H
		2389.65	41.44	-12.56	54	36.33	31.3	6.17	32.36	262	295	A	H
	*	2419.205	102.13	-	-	96.89	31.31	6.22	32.29	262	295	P	H
	*	2419.623	91.24	-	-	85.91	31.33	6.22	32.22	292	295	A	H
		2484.36	52.84	-21.16	74	47.16	31.37	6.33	32.02	292	295	P	H
		2484.84	39.23	-14.77	54	33.55	31.37	6.33	32.02	292	295	A	H
		2389.65	63.29	-10.71	74	58.18	31.3	6.17	32.36	152	297	P	V
		2390	43.31	-10.69	54	38.2	31.3	6.17	32.36	152	297	A	V
	*	2419.957	104.44	-	-	99.11	31.33	6.22	32.22	152	297	P	V
	*	2424.215	93.25	-	-	87.92	31.33	6.22	32.22	152	297	A	V
		2486.24	53.51	-20.49	74	47.83	31.37	6.33	32.02	292	297	P	V
		2483.68	39.62	-14.38	54	33.94	31.37	6.33	32.02	152	297	A	V
802.11n HT40 CH 06 2437MHz		2389.74	56.29	-17.71	74	51.18	31.3	6.17	32.36	150	238	P	H
		2359.5	39.14	-14.86	54	34.17	31.26	6.12	32.41	150	238	A	H
	*	2450.852	99.07	-	-	93.6	31.34	6.28	32.15	150	238	P	H
	*	2451.269	88.38	-	-	82.91	31.34	6.28	32.15	150	238	A	H
		2484	67.12	-6.88	74	61.44	31.37	6.33	32.02	150	238	P	H
		2483.76	44	-10	54	38.32	31.37	6.33	32.02	150	238	A	H
		2389.47	59.72	-14.28	74	54.61	31.3	6.17	32.36	150	267	P	V
		2390	41.07	-12.93	54	35.96	31.3	6.17	32.36	150	267	A	V
	*	2452.021	103.82	-	-	98.35	31.34	6.28	32.15	150	267	P	V
	*	2453.523	92.97	-	-	87.42	31.36	6.28	32.09	150	267	A	V
	!	2483.72	70.97	-3.03	74	65.29	31.37	6.33	32.02	150	267	P	V
		2483.52	46.27	-7.73	54	40.59	31.37	6.33	32.02	150	267	A	V



802.11n HT40 CH 09 2452MHz		2349.24	52.59	-21.41	74	47.65	31.25	6.12	32.43	288	301	P	H
		2314.95	39.12	-14.88	54	34.32	31.21	6.06	32.47	288	301	A	H
	*	2453.941	102.58	-	-	97.03	31.36	6.28	32.09	288	301	P	H
	*	2454.191	91.93	-	-	86.38	31.36	6.28	32.09	288	301	A	H
	!	2483.56	68	-6	74	62.32	31.37	6.33	32.02	288	301	P	H
		2483.6	44.36	-9.64	54	38.68	31.37	6.33	32.02	288	301	A	H
		2368.05	52.48	-21.52	74	47.46	31.26	6.17	32.41	177	245	P	V
		2324.13	39.07	-14.93	54	34.17	31.23	6.12	32.45	177	245	A	V
	*	2454.692	106.89	-	-	101.34	31.36	6.28	32.09	177	245	P	V
	*	2455.194	95.6	-	-	90.05	31.36	6.28	32.09	177	245	A	V
	!	2483.56	70.3	-3.7	74	64.62	31.37	6.33	32.02	177	245	P	V
		2483.68	46.39	-7.61	54	40.71	31.37	6.33	32.02	177	245	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 03 2422MHz		4845	47.35	-26.65	74	38.42	34.9	8.73	34.7	188	236	P	H
		7266	49.31	-24.69	74	38.86	35.56	10.81	35.92	195	272	P	H
		4845	47.97	-26.03	74	39.04	34.9	8.73	34.7	253	301	P	V
		7266	48.26	-25.74	74	37.81	35.56	10.81	35.92	199	306	P	V
802.11n HT40 CH 06 2437MHz		4875	48.64	-25.36	74	39.59	34.92	8.76	34.63	154	301	P	H
		7311	47.49	-26.51	74	37.14	35.56	10.84	36.05	213	94	P	H
		4875	47.12	-26.88	74	38.07	34.92	8.76	34.63	264	86	P	V
		7311	45.9	-28.1	74	35.55	35.56	10.84	36.05	199	0	P	V
802.11n HT40 CH 09 2452MHz		4905	46.87	-27.13	74	37.7	34.94	8.79	34.56	166	320	P	H
		7356	47.17	-26.83	74	37	35.57	10.86	36.26	152	142	P	H
		4905	47.17	-26.83	74	38	34.94	8.79	34.56	203	167	P	V
		7356	45.31	-28.69	74	35.14	35.57	10.86	36.26	188	269	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz WIFI 802.11b (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11b LF		32.91	18.65	-21.35	40	32.58	17.73	0.98	32.64	114	213	P	H
		75.59	17.84	-22.16	40	39.92	8.69	1.88	32.65	-	-	P	H
		106.63	21.31	-22.19	43.5	40.42	11.35	2.18	32.64	-	-	P	H
		149.31	18.08	-25.42	43.5	36.38	11.69	2.57	32.56	-	-	P	H
		162.89	17.02	-26.48	43.5	35.77	11.22	2.57	32.54	-	-	P	H
		219.15	21.83	-24.17	46	41.18	10.68	2.47	32.5	-	-	P	H
		30.97	30.06	-9.94	40	43.03	18.71	0.98	32.66	125	0	P	V
		42.61	29.24	-10.76	40	47.59	12.77	1.52	32.64	-	-	P	V
		75.59	26.63	-13.37	40	48.71	8.69	1.88	32.65	-	-	P	V
		102.75	22.08	-21.42	43.5	41.22	11.32	2.18	32.64	-	-	P	V
		162.89	25.8	-17.7	43.5	44.55	11.22	2.57	32.54	-	-	P	V
		217.21	18.16	-27.84	46	37.58	10.6	2.47	32.49	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Emission below 1GHz

2.4GHz WIFI 802.11g (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11g LF		30	21.73	-18.27	40	34.21	19.2	0.98	32.66	-	-	P	H
		74.62	19	-21	40	41.16	8.61	1.88	32.65	-	-	P	H
		103.72	26.68	-16.82	43.5	45.81	11.33	2.18	32.64	145	130	P	H
		151.25	19.07	-24.43	43.5	37.4	11.66	2.57	32.56	-	-	P	H
		163.86	19.13	-24.37	43.5	38.46	11.18	2.03	32.54	-	-	P	H
		219.15	22.38	-23.62	46	41.73	10.68	2.47	32.5	-	-	P	H
		30	33.33	-6.67	40	45.81	19.2	0.98	32.66	100	162	P	V
		33.88	32.77	-7.23	40	47.18	17.24	0.98	32.63	-	-	P	V
		46.49	30.44	-9.56	40	50.83	10.74	1.52	32.65	-	-	P	V
		74.62	28.11	-11.89	40	50.27	8.61	1.88	32.65	-	-	P	V
		151.25	21.86	-21.64	43.5	40.19	11.66	2.57	32.56	-	-	P	V
		164.83	23.41	-20.09	43.5	42.77	11.14	2.03	32.53	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Emission below 1GHz

2.4GHz WIFI 802.11n HT20 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11n HT20 LF		30	21.63	-18.37	40	34.11	19.2	0.98	32.66	-	-	P	H
		75.59	18.36	-21.64	40	40.44	8.69	1.88	32.65	-	-	P	H
		94.99	20.62	-22.88	43.5	40.29	10.75	2.18	32.6	-	-	P	H
		103.72	27.07	-16.43	43.5	46.2	11.33	2.18	32.64	100	146	P	H
		203.63	19.11	-24.39	43.5	39.14	9.98	2.47	32.48	-	-	P	H
		218.18	20.07	-25.93	46	39.45	10.64	2.47	32.49	-	-	P	H
		30	31.58	-8.42	40	44.06	19.2	0.98	32.66	100	119	P	V
		46.49	29.12	-10.88	40	49.51	10.74	1.52	32.65	-	-	P	V
		74.62	30.48	-9.52	40	52.64	8.61	1.88	32.65	-	-	P	V
		101.78	21.58	-21.92	43.5	40.71	11.32	2.18	32.63	-	-	P	V
		154.16	23.54	-19.96	43.5	41.98	11.55	2.57	32.56	-	-	P	V
		381.14	19.69	-26.31	46	33.25	15.94	2.83	32.33	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Emission below 1GHz

2.4GHz WIFI 802.11n HT40 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11n HT40 LF		30.97	22.48	-17.52	40	35.45	18.71	0.98	32.66	-	-	P	H
		75.59	18.67	-21.33	40	40.75	8.69	1.88	32.65	-	-	P	H
		106.63	24.63	-18.87	43.5	43.74	11.35	2.18	32.64	105	65	P	H
		152.22	20.02	-23.48	43.5	38.38	11.63	2.57	32.56	-	-	P	H
		206.54	22.62	-20.88	43.5	42.52	10.11	2.47	32.48	-	-	P	H
		219.15	22.8	-23.2	46	42.15	10.68	2.47	32.5	-	-	P	H
		32.91	33.99	-6.01	40	47.92	17.73	0.98	32.64	122	213	P	V
		45.52	29.57	-10.43	40	49.46	11.25	1.52	32.66	-	-	P	V
		74.62	29.15	-10.85	40	51.31	8.61	1.88	32.65	-	-	P	V
		101.78	24.13	-19.37	43.5	43.26	11.32	2.18	32.63	-	-	P	V
		153.19	27.78	-15.72	43.5	46.18	11.59	2.57	32.56	-	-	P	V
		207.51	21.29	-22.21	43.5	41.15	10.15	2.47	32.48	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.