



FCC PART 15.407  
RSS-GEN, ISSUE 5, APRIL 2018  
RSS-247, ISSUE 2, FEBRUARY 2017

TEST REPORT

For

**SZ DJI TECHNOLOGY CO., LTD**

14th floor, West Wing, Skyworth Semiconductor Design Building NO.18 Gaoxin South 4th Ave,  
Nanshan, Shenzhen, Guangdong, China

**FCC ID: SS3-RM5001808**  
**IC: 11805A-RM5001808**

<b>Report Type:</b> Original Report	<b>Product Name:</b> DJI Smart Controller
<b>Report Number:</b>	RDG180812002-00C
<b>Report Date:</b>	2018-09-26
<b>Reviewed By:</b>	Jerry Zhang EMC Manager
<b>Test Laboratory:</b>	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA\* or any agency of the Federal Government. \* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “\*\*”.

## TABLE OF CONTENTS

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
MEASUREMENT UNCERTAINTY .....	5
TEST FACILITY .....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EUT EXERCISE SOFTWARE .....	7
EQUIPMENT MODIFICATIONS .....	12
SUPPORT EQUIPMENT LIST AND DETAILS .....	12
SUPPORT CABLE LIST AND DETAILS .....	12
BLOCK DIAGRAM OF TEST SETUP .....	13
<b>SUMMARY OF TEST RESULTS .....</b>	<b>14</b>
<b>FCC §15.247 (i) &amp; §1.1310 &amp; §2.1093, RSS-102 §4- RF EXPOSURE.....</b>	<b>15</b>
APPLICABLE STANDARD .....	15
TEST RESULT .....	15
<b>FCC §15.203&amp; RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT .....</b>	<b>16</b>
APPLICABLE STANDARD .....	16
ANTENNA INFORMATION AND CONNECTOR CONSTRUCTION.....	17
<b>FCC §15.207(a) RSS-GEN CLAUSE 8.8– CONDUCTED EMISSIONS .....</b>	<b>18</b>
APPLICABLE STANDARD .....	18
EUT SETUP.....	18
EMI TEST RECEIVER SETUP.....	18
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	19
TEST EQUIPMENT LIST AND DETAILS.....	19
TEST PROCEDURE .....	19
TEST DATA .....	20
<b>FCC §15.209, §15.205 , §15.407(b) &amp;RSS-247 §6.2, RSS-GEN§8.10 –UNWANTED EMISSION .....</b>	<b>22</b>
APPLICABLE STANDARD .....	22
EUT SETUP .....	24
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	26
TEST PROCEDURE .....	26
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	26
TEST EQUIPMENT LIST AND DETAILS.....	27
TEST DATA .....	28
<b>FCC §15.407(b)&amp; RSS-247 §6.2–OUT- OF-BAND EMISSIONS.....</b>	<b>44</b>
APPLICABLE STANDARD .....	44
TEST PROCEDURE .....	46
TEST EQUIPMENT LIST AND DETAILS.....	46
TEST DATA .....	46
<b>FCC §15.407(a)(e) &amp; RSS-247 §6.2,RSS-Gen §6.7–EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH.....</b>	<b>67</b>
APPLICABLE STANDARD .....	67

TEST EQUIPMENT LIST AND DETAILS.....67  
TEST PROCEDURE .....67  
TEST DATA .....67

**FCC §15.407(a) & RSS-247 §6.2 –MAXIMUM CONDUCTED OUTPUT POWER.....96**

APPLICABLE STANDARD .....96  
TEST EQUIPMENT LIST AND DETAILS.....98  
TEST PROCEDURE .....98  
TEST DATA .....99

**FCC §15.407(a)& RSS-247 §6.2- POWER SPECTRAL DENSITY .....101**

APPLICABLE STANDARD .....101  
TEST PROCEDURE .....103  
TEST EQUIPMENT LIST AND DETAILS.....103  
TEST DATA .....104

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

<b>EUT Name:</b>		DJI Smart Controller
<b>EUT Model:</b>		RM500
<b>FCC ID:</b>		SS3-RM5001808
<b>IC:</b>		11805A-RM5001808
<b>Rated Input Voltage:</b>		DC7.2V from battery or DC 3.6-12 V from adapter
<b>Nominal Adapter Information</b>	<b>Input:</b>	100-240V-50/60Hz 0.8A Max
	<b>Output:</b>	DC3.6-8V, 3.0A/ DC12V, 2.0A
<b>External Dimension:</b>		17.9cm(L)* 12.2cm(W)* 3.9cm(H)
<b>Serial Number:</b>		180812002
<b>EUT Received Date:</b>		2018.08.12

### Objective

This type approval report is prepared on behalf of **SZ DJI TECHNOLOGY CO., LTD** in accordance with Part 2-Subpart J, Part 15-Subparts A, and E of the Federal Communications Commission's rules. And RSS-247, Issue 2, February 2017, RSS-Gen Issue 5, April 2018 of the Innovation, Science and Economic Development Canada.

The tests were performed in order to determine compliance with FCC Rules Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules and RSS-247, Issue 2, February 2017, RSS-Gen Issue 5, April 2018 of the Innovation, Science and Economic Development Canada.

### Related Submittal(s)/Grant(s)

FCC Part 15C DTS, Part 15C DSS and Part 15B JAB submissions with FCC ID: SS3-RM5001808.  
 RSS-247 DSS, RSS-247 DTS submissions with IC: 11805A-RM5001808.  
 Part of system submissions with FCC ID: SS3-L1P1805, IC: 11805A-L1P1805.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB 789033 D02 General U-NII Test Procedures New Rules v02r01, and RSS-247, Issue 2, February 2017, RSS-Gen Issue 5, April 2018 of the Innovation, Science and Economic Development Canada.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

**Measurement Uncertainty**

<b>Parameter</b>	<b>Measurement Uncertainty</b>
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical 1G~6GHz: 4.45 dB, 6G~40GHz: 5.23 dB
Unwanted Emissions,conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

**Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218,the FCC Designation No. : CN1220.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062D.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

The device supports SDR mode(1.4MHz, 10MHz, 20MHz) in 5.8GHz band, 802.11 a/n ht20/ n ht40/ac 20/40/80 modes in 5.2GHz band and 5.8GHz band. The ac20 and ac40 were reduced since the identical parameters with 802.11n ht20 and ht40.

The EUT has 2 antennas for 1.4MHz mode and 10MHz mode, 20MHz, the system configure 1T2R depending on better performance by the system automatically recognizes. For 802.11 a/n ht20/ n ht40/ac 80 modes, the device supports SISO and MIMO modes.

For 1.4MHz mode, 60 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5728.5	31	5788.5
2	5730.5	...	...
...	...	...	...
...	...	59	5844.5
...	...	60	5846.5
30	5786.5	/	/

3 channels were tested: 5728.5MHz, 5786.5MHz and 5846.5MHz

For 10MHz mode, 115 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5730.5	59	5788.5
2	5731.5	...	...
...	...	...	...
...	...	114	5843.5
...	...	115	5844.5
58	5787.5	/	/

3 channels were tested: 5730.5MHz, 5787.5MHz and 5844.5MHz

For 20MHz mode, 105 channels are employed:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5735.5	54	5788.5
2	5736.5	...	...
...	...	...	...
...	...	104	5838.5
...	...	105	5839.5
53	5787.5	/	/

3 channels were tested: 5735.5MHz, 5787.5MHz and 5839.5MHz

For 802.11 a/n ht20/ n ht40/ac 80 modes, 5150~5250 MHz band, 7 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

For 802.11a, 802.11n ht20, Channel 36, 40 and 48 was tested, for 802.11n ht40, Channel 38, 46 were tested, for 802.11ac vht 80, channel 42 was tested.

5725~5850MHz band, 8 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	159	5795
151	5755	161	5805
153	5765	165	5825
155	5775	/	/
157	5785	/	/

For 802.11a, 802.11n ht20, Channel 149, 157 and 165 was tested, for 802.11n ht40, Channel 151, 159 was tested, for 802.11ac vht80, channel 155 was tested.

### EUT Exercise Software

Test software: 'DjiSdrConsole' was used in test for SDR mode, 'QRCT' was used for WIFI mode, which were provided by manufacturer.

For 1.4MHz, 10MHz and 20MHz mode, the maximum power with maximum duty cycle was configured as default setting, the test software was used for change channels and bandwidths.

For 802.11 a/n ht20/ n ht40/ac 80 modes, the worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations. The power setting configured as below table, which was provided by manufacturer:

Band	Mode	Channel	Frequency (MHz)	Data rate	Power level	
					Chain 0	Chain 1
5.2G	a	Low	5180	6 Mbps	13	13
		Middle	5200	6 Mbps	13	13
		High	5240	6 Mbps	13	13
	n20	Low	5180	MCS8	13	13
		Middle	5200	MCS8	13	13
		High	5240	MCS8	13	13
	n40	Low	5190	MCS8	12	12
		High	5230	MCS8	12	12
	ac80	Middle	5210	MCS8	10	10
5.8G	a	Low	5745	6 Mbps	13	13
		Middle	5785	6 Mbps	13	13
		High	5825	6 Mbps	13	13
	n20	Low	5745	MCS8	13	13
		Middle	5785	MCS8	13	13
		High	5825	MCS8	13	13
	n40	Low	5755	MCS8	13	13
		High	5795	MCS8	13	13
	ac80	Middle	5775	MCS8	13	13

Pretest SISO and MIMO mode, the MIMO mode was the worst and reported.

The duty cycle as below:


Mode	T <sub>on</sub> (ms)	T <sub>on+off</sub> (ms)	Duty Cycle(x) (%)	Duty cycle Factor (10*log(1/x))
1.4M	100	100	100	0
10M	100	100	100	0
20M	100	100	100	0
802.11a	2.067	2.215	93%	0.30
802.11n ht20	1.923	2.019	95%	0.21
802.11n ht40	0.954	1.05	91%	0.42
802.11ac80	0.256	0.356	72%	1.43

### 1.4M mode




Date: 17.SEP.2018 11:25:36

### 10M mode

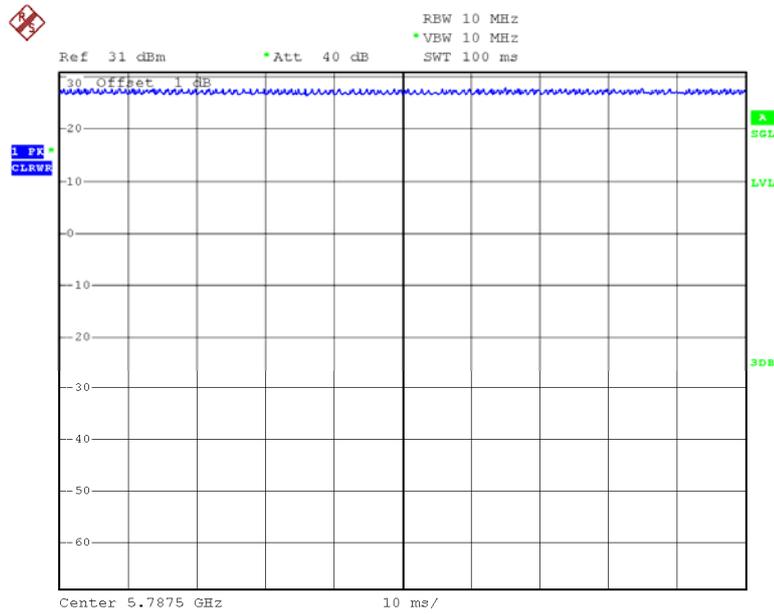


Date: 5.SEP.2018 11:06:44

### 20M mode

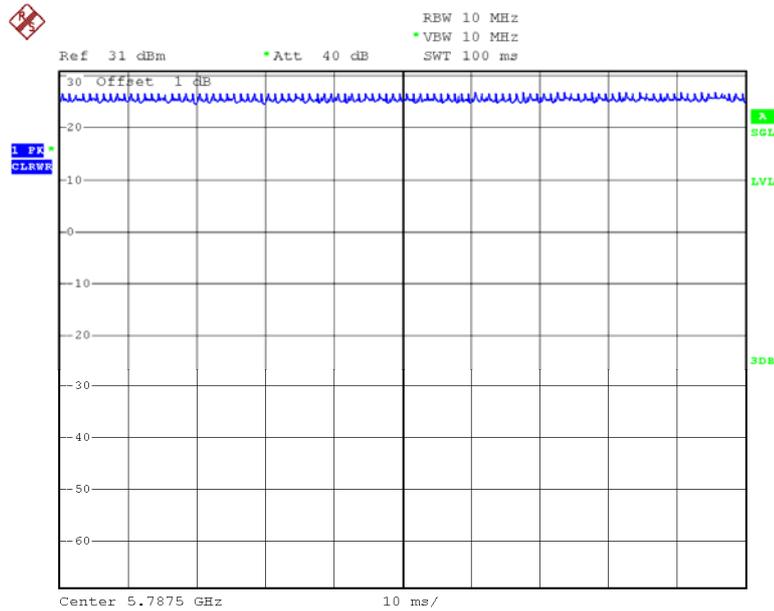


Date: 5.SEP.2018 11:06:58

### 802.11a mode

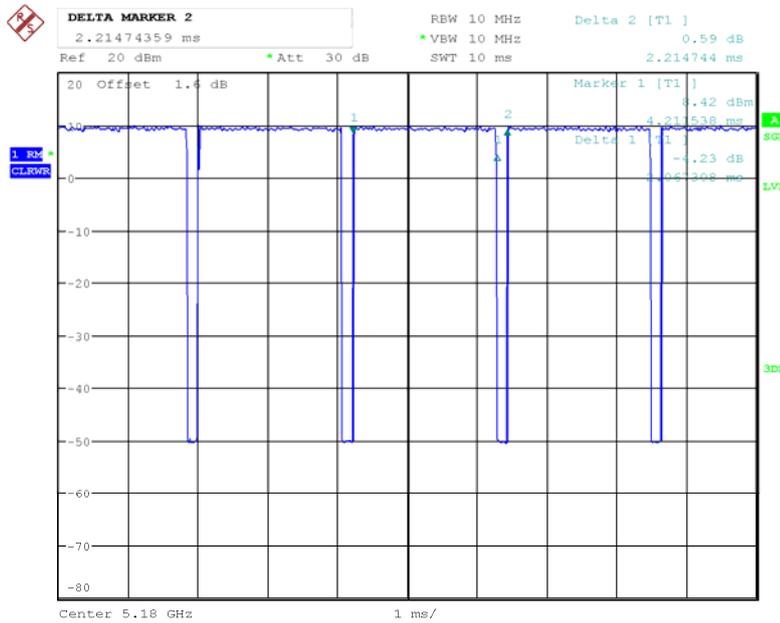


Date: 6.SEP.2018 16:27:47

### 802.11n ht20 mode

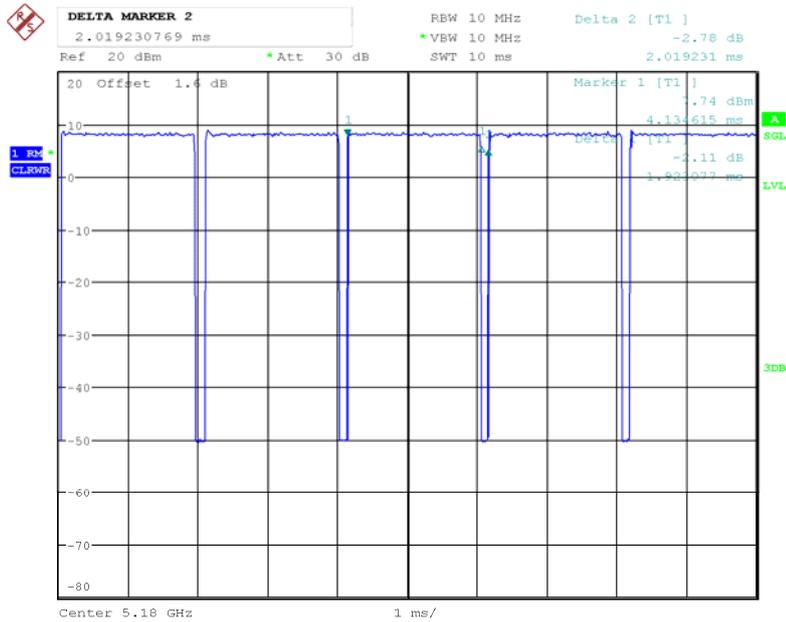


Date: 6.SEP.2018 15:55:49

### 802.11n ht40 mode

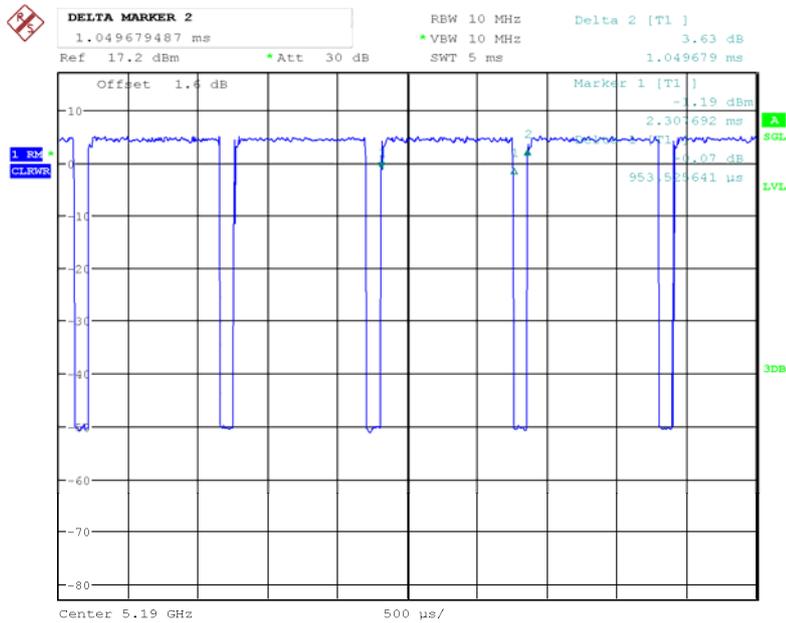

Date: 6.SEP.2018 16:15:32

**802.11ac80 mode**

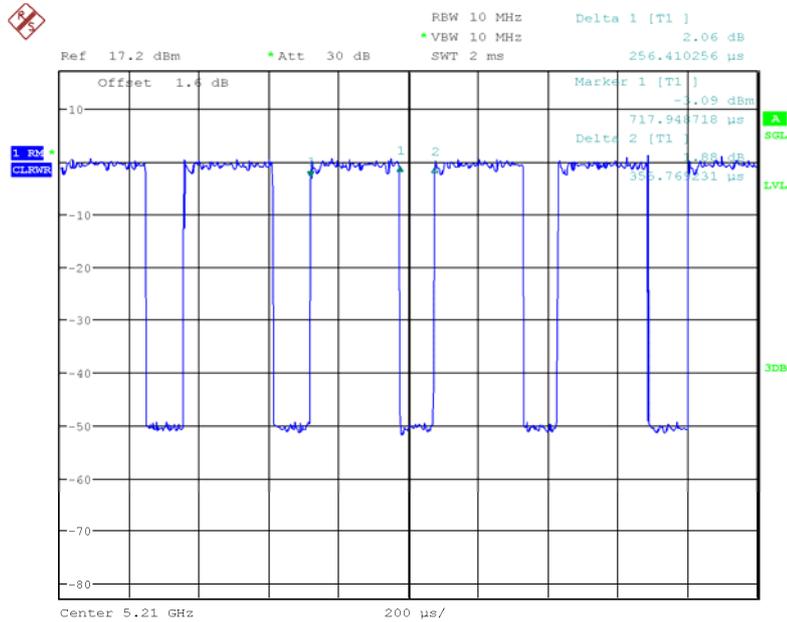

Date: 6.SEP.2018 16:21:02

**Equipment Modifications**

No modification was made to the EUT.


**Support Equipment List and Details**

Manufacturer	Description	Model	Serial Number
SAMSUNG	Monitor	S22C330H	ZXDCHTHD101491K
Kingston	SD card	4G	/
Kingston	USB Flash Disk	4G	/

**Support Cable List and Details**

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	yes	No	1.1	Adapter	EUT
HDMI cable	yes	yes	1.0	EUT	Monitor

### Block Diagram of Test Setup

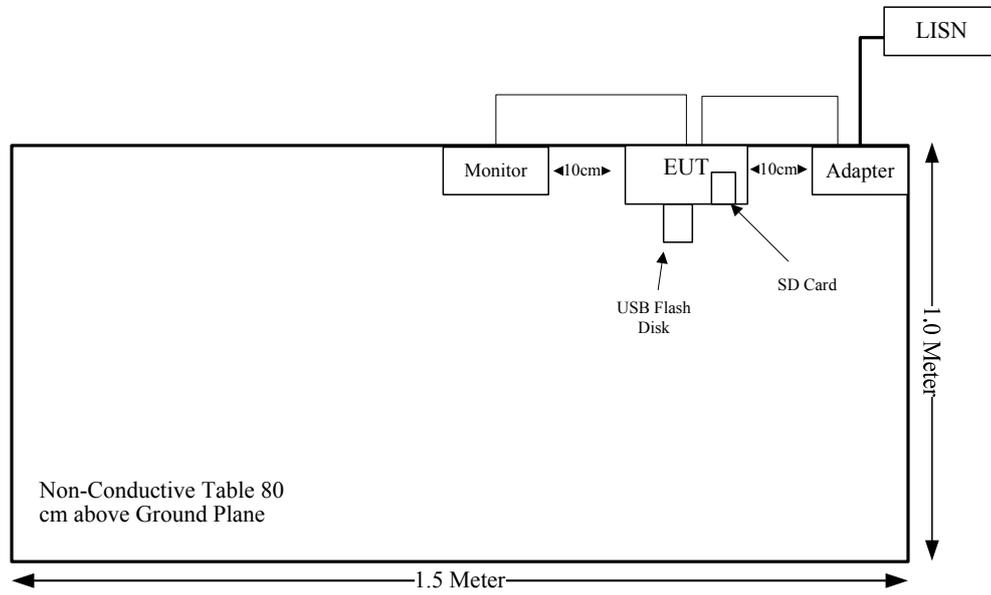

**SUMMARY OF TEST RESULTS**

<b>Rules</b>	<b>Description of Test</b>	<b>Result</b>
FCC §15.247 (i) & §1.1310 & §2.1093 RSS-102 §4	RF Exposure	Compliance
FCC§15.203, RSS-GEN§6.8	Antenna Requirement	Compliance
FCC§15.407(b)(6)& §15.207(a), RSS-Gen §8.8	Conducted Emissions	Compliance
FCC§15.205& §15.209 &§15.407(b), RSS-247§6.2	Undesirable Emission& Restricted Bands	Compliance
FCC§15.407(b) RSS-247§6.2	Out Of Band Emissions	Compliance
FCC§15.407(a) (e), RSS-247 §6.2 RSS-Gen§6.7	Emission Bandwidth	Compliance
FCC§15.407(g)	Frequency Stability	Compliance
FCC§15.407(a) RSS-247 §6.2	Conducted Transmitter Output Power	Compliance
FCC§15.407 (a), RSS-247 §6.2	Power Spectral Density	Compliance

**FCC §15.247 (i) & §1.1310 & §2.1093, RSS-102 §4- RF EXPOSURE****Applicable Standard**

According to §15.247(i), §1.1310 and §2.1093.

According to RSS-102 §4 Table 3, SAR limits for device used by the general public

Body Region	Average SAR (W/Kg)	Averaging Time (minutes)	Mass Average (g)
Whole Body	0.08	6	Whole Body
Localized Head, Neck and Trunk	1.6	6	1
Localized Limbs	4	6	10

**Test Result**

Compliant, please refer to the SAR report: RDG180812002-20.

## **FCC §15.203& RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT**

### **Applicable Standard**

According to FCC§ 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

According to RSS-Gen §6.8, The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

*This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.*

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

**Antenna Information And Connector Construction**

The EUT has 4 PCB antenna arrangement, use unique connector coupling to the radio board, fulfill the requirement of this section. Please refer to the EUT photos and below information:

Antenna	Manufacturer	Model Number	Antenna Type	Connector Type	input impedance (Ohm)	Antenna Gain /Frequency
WIFI Chain 0	DJI	RM500-WIFI-A NT	PCB	IPEX	50	2.5 dBi/2.4GHz 2.8 dBi/5.2GHz 5.0 dBi/5.8GHz
WIFI/BT Chain 1	DJI	RM500-WIFI-A NT	PCB	IPEX	50	2.5 dBi/2.4GHz 2.8 dBi/5.2GHz 5.0 dBi/5.8GHz
SDR Chain 0	DJI	RM500-SDR-A NT	PCB	IPEX	50	3.5 dBi/2.4GHz 4.0 dBi/5.8GHz
SDR Chain 1	DJI	RM500-SDR-A NT	PCB	IPEX	50	3.5 dBi/2.4GHz 4.0 dBi/5.8GHz


**Result:** Compliance.

**FCC §15.207(a) RSS-GEN CLAUSE 8.8– CONDUCTED EMISSIONS**

**Applicable Standard**

FCC §15.207(a), §15.407(b) (6), RSS-GEN CLAUSE 8.8.

**EUT Setup**

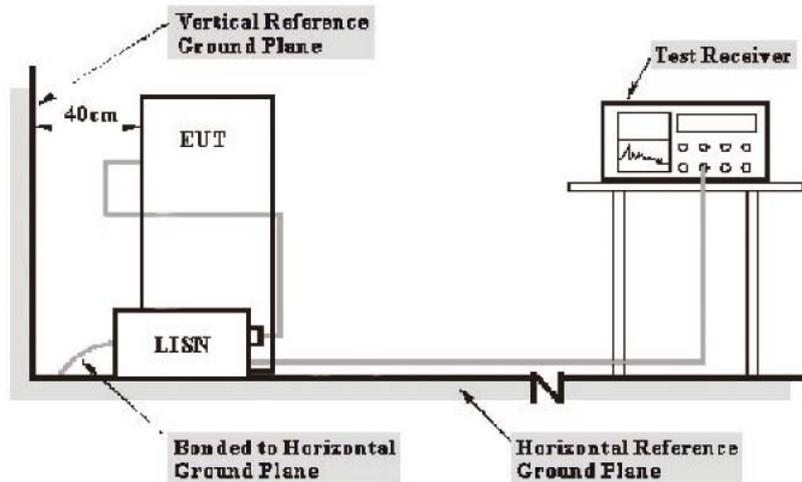

**Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 30 cm from other units and other metal planes support units.**

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits and RSS-Gen clause 8.8 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main lisn with a 120 V/60 Hz AC power source.

**EMI Test Receiver Setup**

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

## Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

$V_C$  (cord. Reading): corrected voltage amplitude

$V_R$ : reading voltage amplitude

$A_C$ : attenuation caused by cable loss

VDF: voltage division factor of AMN

$C_f$ : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2018-09-05	2019-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2017-12-08	2018-12-08

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

**Test Data**


**Environmental Conditions**

<b>Temperature:</b>	27.6 °C
<b>Relative Humidity:</b>	49 %
<b>ATM Pressure:</b>	100.7 kPa

The testing was performed by Lily Xie on 2018-09-07.

Test Mode: Transmitting


AC120 V, 60 Hz, Line:

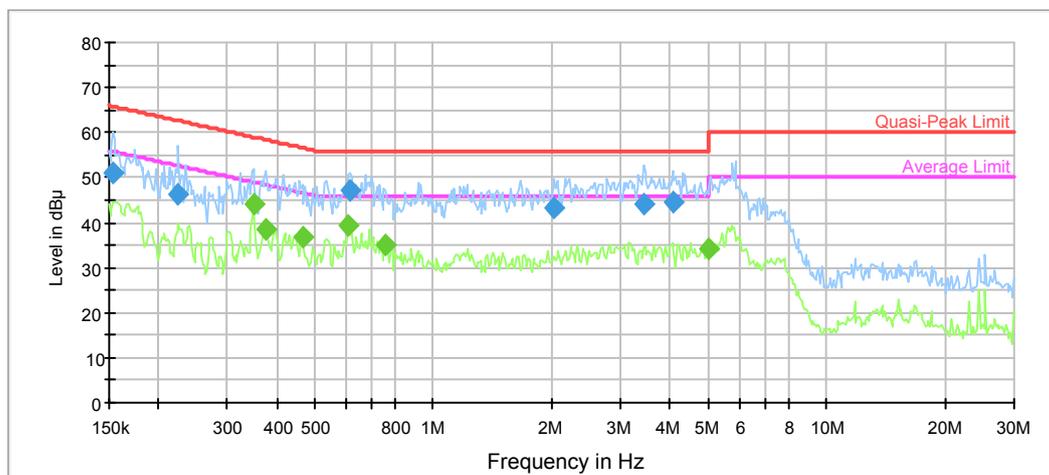

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.153629	50.9	9.000	L1	11.1	14.9	65.8	Compliance
0.225205	46.3	9.000	L1	10.5	16.3	62.6	Compliance
0.614619	47.2	9.000	L1	9.8	8.8	56.0	Compliance
2.030886	43.1	9.000	L1	9.7	12.9	56.0	Compliance
3.436218	44.1	9.000	L1	9.8	11.9	56.0	Compliance
4.062112	44.6	9.000	L1	9.8	11.4	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.349066	44.1	9.000	L1	10.0	4.9	49.0	Compliance
0.375019	38.7	9.000	L1	10.0	9.7	48.4	Compliance
0.465037	36.8	9.000	L1	9.9	9.8	46.6	Compliance
0.609741	39.4	9.000	L1	9.8	6.6	46.0	Compliance
0.756101	35.1	9.000	L1	9.8	10.9	46.0	Compliance
4.997188	34.0	9.000	L1	9.8	12.0	46.0	Compliance

**AC120 V, 60 Hz, Neutral:**

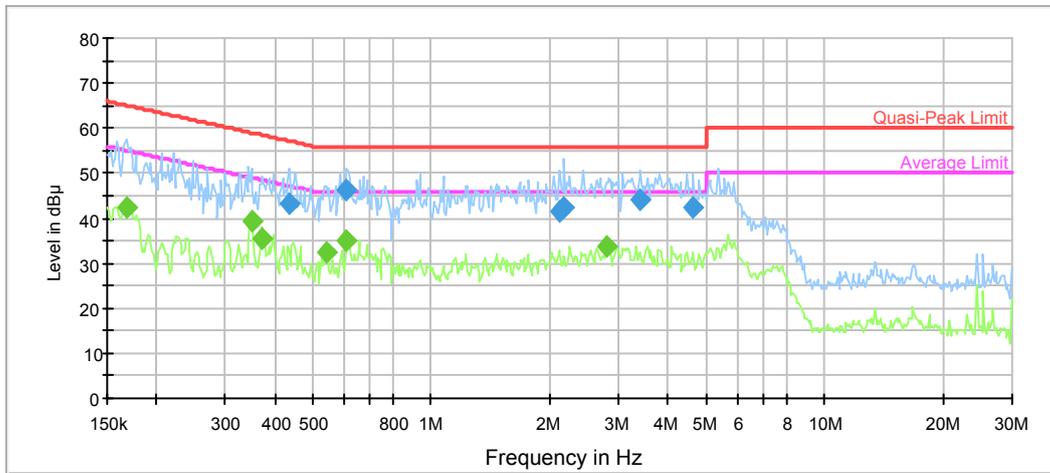

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.436318	43.4	9.000	N	9.9	13.7	57.1	Compliance
0.609741	46.3	9.000	N	9.8	9.7	56.0	Compliance
2.113432	41.6	9.000	N	9.8	14.4	56.0	Compliance
2.181877	42.2	9.000	N	9.8	13.8	56.0	Compliance
3.408946	44.0	9.000	N	9.8	12.0	56.0	Compliance
4.651370	42.4	9.000	N	9.8	13.6	56.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.169044	42.3	9.000	N	10.9	12.7	55.0	Compliance
0.349066	39.5	9.000	N	10.0	9.5	49.0	Compliance
0.372042	35.4	9.000	N	10.0	13.1	48.5	Compliance
0.541050	32.3	9.000	N	9.9	13.7	46.0	Compliance
0.609741	35.2	9.000	N	9.8	10.8	46.0	Compliance
2.793231	33.9	9.000	N	9.8	12.1	46.0	Compliance

---

**FCC §15.209, §15.205 , §15.407(b) &RSS-247 §6.2, RSS-GEN§8.10 –  
UNWANTED EMISSION**

---

**Applicable Standard**

FCC §15.407; §15.209; §15.205;

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

According to RSS-247§6.2

### **Frequency band 5150-5250 MHz**

#### **6.2.1.2 Unwanted emission limits**

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.

### **Frequency band 5250-5350 MHz**

#### **6.2.2.2 Unwanted emission limits**

Devices shall comply with the following:

- a) All emissions outside the band 5250-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.; or
- b) All emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. and its power shall comply with the spectral power density for operation within the band 5150-5250 MHz. The device, except devices installed in vehicles, shall be labelled or include in the user manual the following text “for indoor use only.”

### **Frequency bands 5470-5600 MHz and 5650-5725 MHz:**

#### **6.2.3.2 Unwanted emission limits**

Emissions outside the band 5470-5600 MHz and 5650-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p. However, devices with bandwidth overlapping the band edge of 5725 MHz can meet the emission limit of -27 dBm/MHz e.i.r.p. at 5850 MHz instead of 5725 MHz.

## Frequency band 5725-5850 MHz

### 6.2.4.2 Unwanted emission limits

Devices operating in the band 5725-5850 MHz with antenna gain greater than 10 dBi can have unwanted emissions that comply with either the limits in this section or in section 5.5 until six (6) months after the publication date of this standard for certification. Certified devices that do not comply with emission limits in this section shall not be manufactured, imported, distributed, leased, offered for sale or sold after April 1, 2018.


Devices operating in the band 5725-5850 MHz with antenna gain of 10 dBi or less can have unwanted emissions that comply with either the limits in this section or in section 5.5 until April 1, 2018 for certification. Certified devices that do not comply with emission limits in this section shall not be manufactured, imported, distributed, leased, offered for sale or sold after April 1, 2020.



Devices operating in the band 5725-5850 MHz shall have e.i.r.p. of unwanted emissions comply with the following:

- 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;
- 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;
- 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and
- 27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

## EUT Setup

### Below 1 GHz:

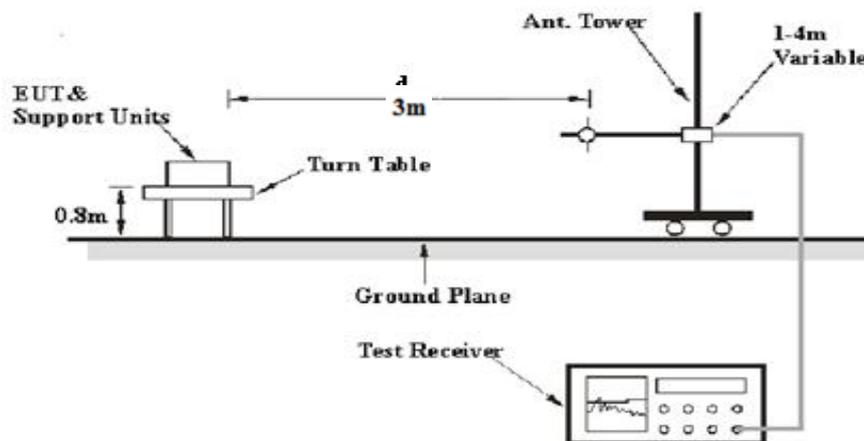

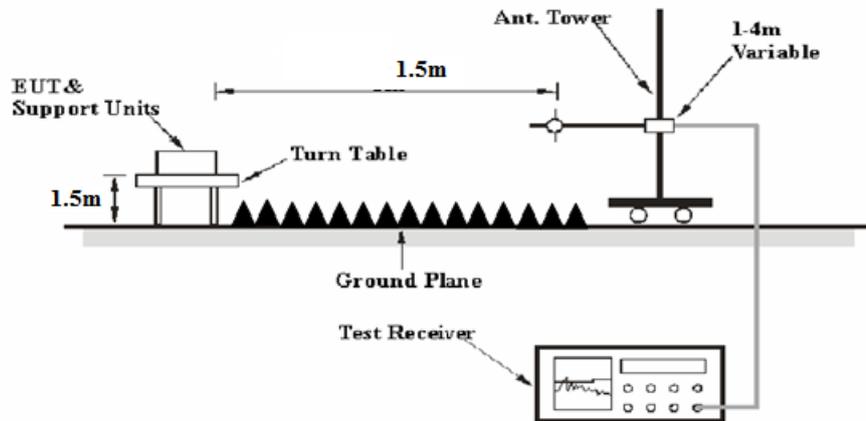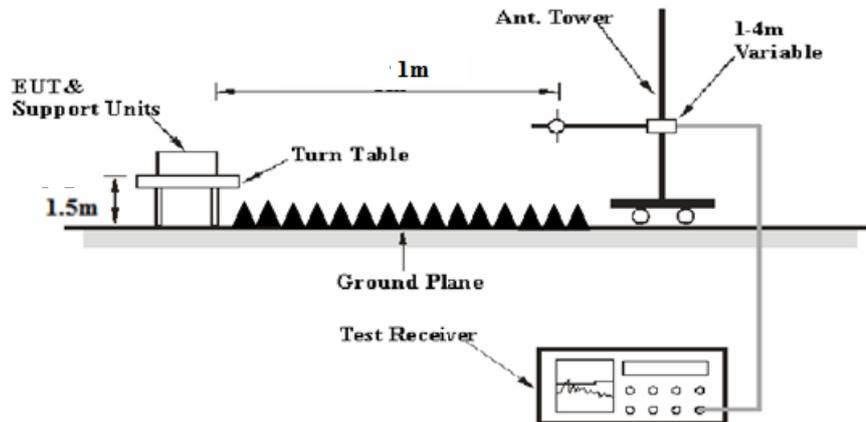**1-26.5 GHz:****26.5-40 GHz:**

The radiated emission below 1GHz tests were performed in the 3 meters chamber test site A, above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.407 and RSS-247, RSS-Gen limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

## EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Ave.	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

## Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as:  $E [dB\mu V/m] = EIRP[dBm] + 95.2$ , for  $d = 3$  meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m or 1m

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]}/\text{test distance [1.5m]})$  dB= 6.02 dB

or

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]}/\text{test distance [1m]})$  dB= 9.54 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

## Corrected Amplitude & Margin Calculation

For the range 30MHz-1GHz, the Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

For the range 1GHz-40GHz, Test performed at 1.5m or 1m, the Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading and the Distance extrapolation factor. The basic equation is as follows:

Extrapolation result

= Meter Reading + Antenna Factor + Cable Loss - Amplifier Gain-Distance extrapolation factor

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Extrapolation result}$$

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-12-11	2018-12-11
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2017-09-05	2018-09-05
HP	Amplifier	8447D	2727A05902	2017-09-05	2018-09-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2018-01-04	2019-01-04
R&S	Spectrum Analyzer	FSP 38	100478	2017-12-08	2018-12-08
ETS-Lindgren	Horn Antenna	3115	000 527 35	2016-01-05	2019-01-04
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2016-11-18	2019-11-18
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2018-06-27	2019-06-27
MITEQ	Amplifier	AFS42-00101800- 25-S-42	2001271	2017-09-05	2018-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2018-06-27	2019-06-27
Sinoscite	Bandstop Filters	BSF5150-5850MN- 0899-003	0899003	2018-05-06	2019-05-06
Mini Circuits	High Pass Filter	VHF-6010+	31118	2018-06-16	2019-06-16

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data**

**Environmental Conditions**


<b>Temperature:</b>	25.7~27.2 °C
<b>Relative Humidity:</b>	43~52 %
<b>ATM Pressure:</b>	100.6 kPa

\* The testing was performed by Blake Yang, Vern Shen, Tyler Pan from 2018-08-30 to 2018-09-03.

Test Mode: Transmitting


1) 30MHz-1GHz(5.2 GHz 802.11a middle channel was the worst)

**Horizontal**

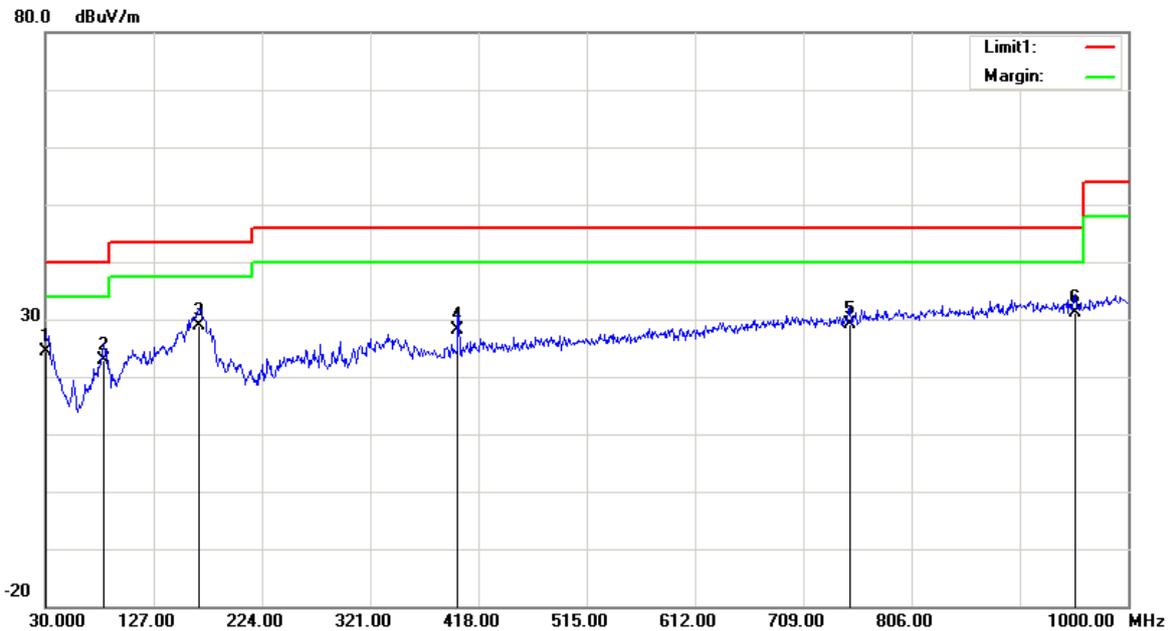

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.0000	22.85	QP	1.55	24.40	40.00	15.60
82.3800	34.30	QP	-11.40	22.90	40.00	17.10
167.7400	35.54	QP	-6.54	29.00	43.50	14.50
399.5700	30.21	QP	-2.01	28.20	46.00	17.80
750.7100	25.56	QP	3.64	29.20	46.00	16.80
952.4700	24.42	QP	6.78	31.20	46.00	14.80

**Vertical**

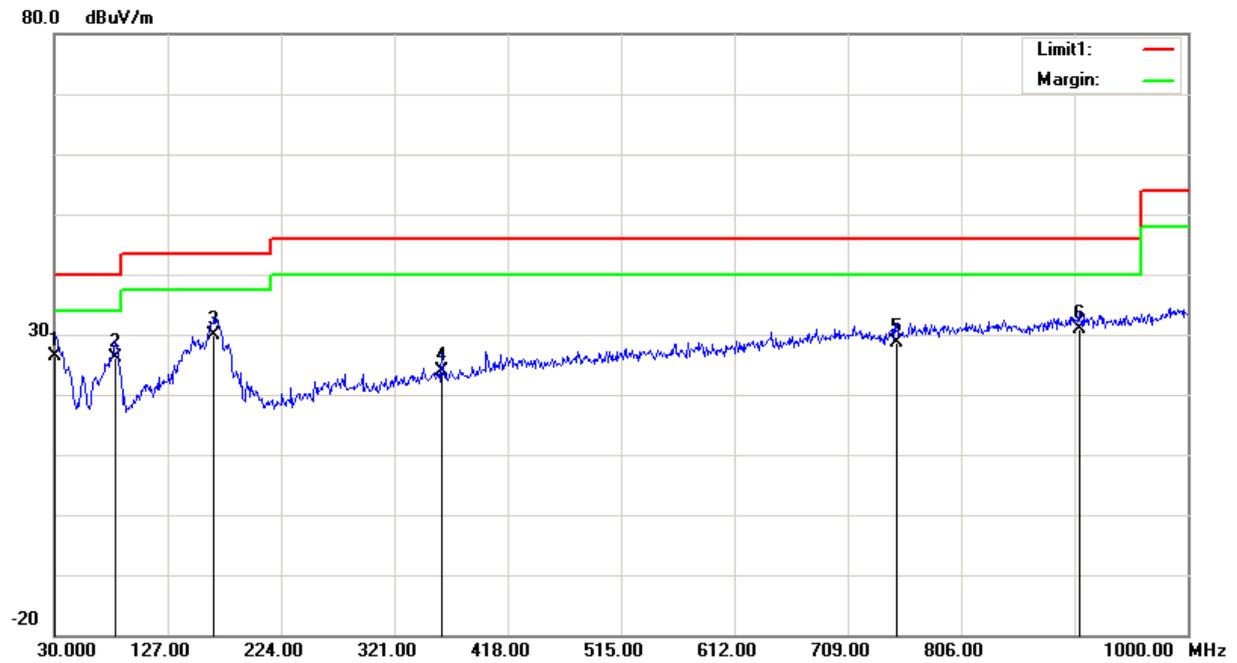

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.0000	24.85	QP	1.55	26.40	40.00	13.60
82.3800	37.50	QP	-11.40	26.10	40.00	13.90
166.7700	36.38	QP	-6.48	29.90	43.50	13.60
361.7400	26.80	QP	-2.80	24.00	46.00	22.00
750.7100	25.06	QP	3.64	28.70	46.00	17.30
906.8800	24.50	QP	6.30	30.80	46.00	15.20

**2) 1GHz-40GHz:**

**1.4MHz Mode :**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5728.5 MHz										
5728.50	78.62	PK	H	34.19	3.69	0.00	116.50	110.48	N/A	N/A
5728.50	68.53	AV	H	34.19	3.69	0.00	106.41	100.39	N/A	N/A
5728.50	91.82	PK	V	34.19	3.69	0.00	129.70	123.68	N/A	N/A
5728.50	81.76	AV	V	34.19	3.69	0.00	119.64	113.62	N/A	N/A
5725.00	39.64	PK	V	34.19	3.69	0.00	77.52	71.5	122.20	50.70
5720.00	33.57	PK	V	34.19	3.69	0.00	71.45	65.43	110.80	45.37
5700.00	27.69	PK	V	34.18	3.68	0.00	65.55	59.53	105.20	45.67
5650.00	27.33	PK	V	34.16	3.63	0.00	65.12	59.1	68.20	9.10
11457.00	50.79	PK	V	38.96	6.59	37.33	59.01	52.99	74.00	21.01
11457.00	37.05	AV	V	38.96	6.59	37.33	45.27	39.25	54.00	14.75
17185.50	47.38	PK	V	41.28	8.77	38.64	58.79	52.77	74.00	21.23
17185.50	34.82	AV	V	41.28	8.77	38.64	46.23	40.21	54.00	13.79
Middle Channel: 5786.5 MHz										
5786.50	78.65	PK	H	34.21	3.71	0.00	116.57	110.55	N/A	N/A
5786.50	68.13	AV	H	34.21	3.71	0.00	106.05	100.03	N/A	N/A
5786.50	90.66	PK	V	34.21	3.71	0.00	128.58	122.56	N/A	N/A
5786.50	80.13	AV	V	34.21	3.71	0.00	118.05	112.03	N/A	N/A
11573.00	52.61	PK	V	39.00	6.61	37.44	60.78	54.76	74.00	19.24
11573.00	38.49	AV	V	39.00	6.61	37.44	46.66	40.64	54.00	13.36
17359.50	48.31	PK	V	42.29	8.81	38.52	60.89	54.87	74.00	19.13
17359.50	35.57	AV	V	42.29	8.81	38.52	48.15	42.13	54.00	11.87
High Channel: 5846.5 MHz										
5846.50	76.81	PK	H	34.24	3.75	0.00	114.80	108.78	N/A	N/A
5846.50	66.03	AV	H	34.24	3.75	0.00	104.02	98	N/A	N/A
5846.50	91.30	PK	V	34.24	3.75	0.00	129.29	123.27	N/A	N/A
5846.50	81.25	AV	V	34.24	3.75	0.00	119.24	113.22	N/A	N/A
5850.00	39.19	PK	V	34.24	3.75	0.00	77.18	71.16	122.20	51.04
5855.00	34.39	PK	V	34.24	3.75	0.00	72.38	66.36	110.80	44.44
5875.00	27.87	PK	V	34.25	3.77	0.00	65.89	59.87	105.20	45.33
5925.00	28.28	PK	V	34.27	3.80	0.00	66.35	60.33	68.20	7.87
11693.00	52.97	PK	V	39.00	6.65	37.58	61.04	55.02	74.00	18.98
11693.00	39.01	AV	V	39.00	6.65	37.58	47.08	41.06	54.00	12.94
17539.50	48.76	PK	V	43.34	8.85	38.38	62.57	56.55	74.00	17.45
17539.50	35.82	AV	V	43.34	8.85	38.38	49.63	43.61	54.00	10.39

**10MHz Mode:**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5730.5 MHz										
5730.50	69.12	PK	H	34.19	3.69	0.00	107.00	100.98	N/A	N/A
5730.50	59.03	AV	H	34.19	3.69	0.00	96.91	90.89	N/A	N/A
5730.50	85.24	PK	V	34.19	3.69	0.00	123.12	117.1	N/A	N/A
5730.50	75.31	AV	V	34.19	3.69	0.00	113.19	107.17	N/A	N/A
5725.00	69.81	PK	V	34.19	3.69	0.00	107.69	101.67	122.20	20.53
5720.00	39.79	PK	V	34.19	3.69	0.00	77.67	71.65	110.80	39.15
5700.00	27.76	PK	V	34.18	3.68	0.00	65.62	59.6	105.20	45.60
5650.00	27.80	PK	V	34.16	3.63	0.00	65.59	59.57	68.20	8.63
11461.00	48.63	PK	V	38.96	6.59	37.34	56.84	50.82	74.00	23.18
11461.00	35.52	AV	V	38.96	6.59	37.34	43.73	37.71	54.00	16.29
17191.50	47.68	PK	V	41.31	8.77	38.64	59.12	53.1	74.00	20.90
17191.50	34.87	AV	V	41.31	8.77	38.64	46.31	40.29	54.00	13.71
Middle Channel: 5787.5 MHz										
5787.50	70.32	PK	H	34.22	3.71	0.00	108.25	102.23	N/A	N/A
5787.50	60.18	AV	H	34.22	3.71	0.00	98.11	92.09	N/A	N/A
5787.50	85.73	PK	V	34.22	3.71	0.00	123.66	117.64	N/A	N/A
5787.50	75.42	AV	V	34.22	3.71	0.00	113.35	107.33	N/A	N/A
11575.00	48.62	PK	V	39.00	6.61	37.45	56.78	50.76	74.00	23.24
11575.00	35.72	AV	V	39.00	6.61	37.45	43.88	37.86	54.00	16.14
17362.50	47.35	PK	V	42.30	8.81	38.52	59.94	53.92	74.00	20.08
17362.50	34.68	AV	V	42.30	8.81	38.52	47.27	41.25	54.00	12.75
High Channel: 5844.5 MHz										
5844.50	69.69	PK	H	34.24	3.75	0.00	107.68	101.66	N/A	N/A
5844.50	59.46	AV	H	34.24	3.75	0.00	97.45	91.43	N/A	N/A
5844.50	84.35	PK	V	34.24	3.75	0.00	122.34	116.32	N/A	N/A
5844.50	74.31	AV	V	34.24	3.75	0.00	112.30	106.28	N/A	N/A
5850.00	69.75	PK	V	34.24	3.75	0.00	107.74	101.72	122.20	20.48
5855.00	44.18	PK	V	34.24	3.75	0.00	82.17	76.15	110.80	34.65
5875.00	27.15	PK	V	34.25	3.77	0.00	65.17	59.15	105.20	46.05
5925.00	27.55	PK	V	34.27	3.80	0.00	65.62	59.6	68.20	8.60
11689.00	48.94	PK	V	39.00	6.65	37.58	57.01	50.99	74.00	23.01
11689.00	36.13	AV	V	39.00	6.65	37.58	44.20	38.18	54.00	15.82
17533.50	47.50	PK	V	43.31	8.85	38.39	61.27	55.25	74.00	18.75
17533.50	34.76	AV	V	43.31	8.85	38.39	48.53	42.51	54.00	11.49

**20MHz mode:**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5735.5 MHz										
5735.50	70.21	PK	H	34.19	3.69	0.00	108.09	102.07	N/A	N/A
5735.50	58.31	AV	H	34.19	3.69	0.00	96.19	90.17	N/A	N/A
5735.50	84.41	PK	V	34.19	3.69	0.00	122.29	116.27	N/A	N/A
5735.50	72.46	AV	V	34.19	3.69	0.00	110.34	104.32	N/A	N/A
5725.00	57.59	PK	V	34.19	3.69	0.00	95.47	89.45	122.20	32.75
5720.00	42.30	PK	V	34.19	3.69	0.00	80.18	74.16	110.80	36.64
5700.00	28.61	PK	V	34.18	3.68	0.00	66.47	60.45	105.20	44.75
5650.00	27.71	PK	V	34.16	3.63	0.00	65.50	59.48	68.20	8.72
11471.00	47.85	PK	V	38.97	6.59	37.34	56.07	50.05	74.00	23.95
11471.00	35.74	AV	V	38.97	6.59	37.34	43.96	37.94	54.00	16.06
17206.50	46.81	PK	V	41.40	8.77	38.63	58.35	52.33	74.00	21.67
17206.50	34.58	AV	V	41.40	8.77	38.63	46.12	40.1	54.00	13.90
Middle Channel: 5787.5 MHz										
5787.50	70.41	PK	H	34.22	3.71	0.00	108.34	102.32	N/A	N/A
5787.50	58.25	AV	H	34.22	3.71	0.00	96.18	90.16	N/A	N/A
5787.50	85.24	PK	V	34.22	3.71	0.00	123.17	117.15	N/A	N/A
5787.50	73.55	AV	V	34.22	3.71	0.00	111.48	105.46	N/A	N/A
11575.00	48.47	PK	V	39.00	6.61	37.45	56.63	50.61	74.00	23.39
11575.00	36.02	AV	V	39.00	6.61	37.45	44.18	38.16	54.00	15.84
17362.50	46.87	PK	V	42.30	8.81	38.52	59.46	53.44	74.00	20.56
17362.50	34.65	AV	V	42.30	8.81	38.52	47.24	41.22	54.00	12.78
High Channel: 5839.5 MHz										
5839.50	69.64	PK	H	34.24	3.74	0.00	107.62	101.6	N/A	N/A
5839.50	57.47	AV	H	34.24	3.74	0.00	95.45	89.43	N/A	N/A
5839.50	84.57	PK	V	34.24	3.74	0.00	122.55	116.53	N/A	N/A
5839.50	72.65	AV	V	34.24	3.74	0.00	110.63	104.61	N/A	N/A
5850.00	51.58	PK	V	34.24	3.75	0.00	89.57	83.55	122.20	38.65
5855.00	41.94	PK	V	34.24	3.75	0.00	79.93	73.91	110.80	36.89
5875.00	27.94	PK	V	34.25	3.77	0.00	65.96	59.94	105.20	45.26
5925.00	27.02	PK	V	34.27	3.80	0.00	65.09	59.07	68.20	9.13
11679.00	47.85	PK	V	39.00	6.65	37.56	55.94	49.92	74.00	24.08
11679.00	35.56	AV	V	39.00	6.65	37.56	43.65	37.63	54.00	16.37
17518.50	46.53	PK	V	43.21	8.85	38.40	60.19	54.17	74.00	19.83
17518.50	34.58	AV	V	43.21	8.85	38.40	48.24	42.22	54.00	11.78

**5150-5250MHz:  
802.11a(MIMO was the worst)**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)						
Low Channel: 5180 MHz										
5180.00	71.32	PK	H	33.59	3.58	0.00	108.49	102.47	N/A	N/A
5180.00	62.29	AV	H	33.59	3.58	0.00	99.46	93.44	N/A	N/A
5180.00	70.87	PK	V	33.59	3.58	0.00	108.04	102.02	N/A	N/A
5180.00	62.08	AV	V	33.59	3.58	0.00	99.25	93.23	N/A	N/A
5150.00	26.78	PK	H	33.54	3.56	0.00	63.88	57.86	74.00	16.14
5150.00	14.92	AV	H	33.54	3.56	0.00	52.02	46	54.00	8.00
10360.00	46.73	PK	H	38.17	6.29	36.85	54.34	48.32	74.00	25.68
10360.00	33.46	AV	H	38.17	6.29	36.85	41.07	35.05	54.00	18.95
15540.00	49.96	PK	H	38.06	8.85	39.04	57.83	51.81	74.00	22.19
15540.00	37.81	AV	H	38.06	8.85	39.04	45.68	39.66	54.00	14.34
6906.51	58.66	PK	H	35.01	5.10	36.99	61.78	55.76	74.00	18.24
6906.51	53.29	AV	H	35.01	5.10	36.99	56.41	50.39	54.00	3.61
Middle Channel: 5200 MHz										
5200.00	72.85	PK	H	33.62	3.60	0.00	110.07	104.05	N/A	N/A
5200.00	63.01	AV	H	33.62	3.60	0.00	100.23	94.21	N/A	N/A
5200.00	71.23	PK	V	33.62	3.60	0.00	108.45	102.43	N/A	N/A
5200.00	61.55	AV	V	33.62	3.60	0.00	98.77	92.75	N/A	N/A
10400.00	46.27	PK	H	38.18	6.32	36.86	53.91	47.89	74.00	26.11
10400.00	33.06	AV	H	38.18	6.32	36.86	40.70	34.68	54.00	19.32
15600.00	49.53	PK	H	38.00	8.83	39.09	57.27	51.25	74.00	22.75
15600.00	37.39	AV	H	38.00	8.83	39.09	45.13	39.11	54.00	14.89
6933.48	56.94	PK	H	35.07	5.12	36.98	60.15	54.13	74.00	19.87
6933.48	51.15	AV	H	35.07	5.12	36.98	54.36	48.34	54.00	5.66
High Channel: 5240 MHz										
5240.00	73.17	PK	H	33.68	3.52	0.00	110.37	104.35	N/A	N/A
5240.00	64.32	AV	H	33.68	3.52	0.00	101.52	95.5	N/A	N/A
5240.00	72.31	PK	V	33.68	3.52	0.00	109.51	103.49	N/A	N/A
5240.00	62.95	AV	V	33.68	3.52	0.00	100.15	94.13	N/A	N/A
5350.00	33.08	PK	H	33.86	3.52	0.00	70.46	64.44	74.00	9.56
5350.00	15.95	AV	H	33.86	3.52	0.00	53.33	47.31	54.00	6.69
10480.00	46.45	PK	H	38.20	6.37	36.88	54.14	48.12	74.00	25.88
10480.00	33.62	AV	H	38.20	6.37	36.88	41.31	35.29	54.00	18.71
15720.00	50.36	PK	H	37.88	8.79	39.18	57.85	51.83	74.00	22.17
15720.00	37.93	AV	H	37.88	8.79	39.18	45.42	39.4	54.00	14.60
6986.80	53.98	PK	H	35.17	5.17	36.97	57.35	51.33	74.00	22.67
6986.80	47.46	AV	H	35.17	5.17	36.97	50.83	44.81	54.00	9.19

**802.11n ht20(MIMO was the worst)**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)						
Low Channel: 5180 MHz										
5180.00	73.56	PK	H	33.59	3.58	0.00	110.73	104.71	N/A	N/A
5180.00	64.02	AV	H	33.59	3.58	0.00	101.19	95.17	N/A	N/A
5180.00	71.95	PK	V	33.59	3.58	0.00	109.12	103.1	N/A	N/A
5180.00	62.27	AV	V	33.59	3.58	0.00	99.44	93.42	N/A	N/A
5150.00	32.83	PK	H	33.54	3.56	0.00	69.93	63.91	74.00	10.09
5150.00	16.05	AV	H	33.54	3.56	0.00	53.15	47.13	54.00	6.87
10360.00	46.08	PK	H	38.17	6.29	36.85	53.69	47.67	74.00	26.33
10360.00	33.57	AV	H	38.17	6.29	36.85	41.18	35.16	54.00	18.84
15540.00	49.54	PK	H	38.06	8.85	39.04	57.41	51.39	74.00	22.61
15540.00	36.42	AV	H	38.06	8.85	39.04	44.29	38.27	54.00	15.73
6906.76	57.16	PK	H	35.01	5.10	36.99	60.28	54.26	74.00	19.74
6906.76	51.81	AV	H	35.01	5.10	36.99	54.93	48.91	54.00	5.09
Middle Channel: 5200 MHz										
5200.00	73.56	PK	H	33.62	3.60	0.00	110.78	104.76	N/A	N/A
5200.00	64.28	AV	H	33.62	3.60	0.00	101.50	95.48	N/A	N/A
5200.00	72.13	PK	V	33.62	3.60	0.00	109.35	103.33	N/A	N/A
5200.00	63.17	AV	V	33.62	3.60	0.00	100.39	94.37	N/A	N/A
10400.00	45.83	PK	H	38.18	6.32	36.86	53.47	47.45	74.00	26.55
10400.00	33.29	AV	H	38.18	6.32	36.86	40.93	34.91	54.00	19.09
15600.00	48.29	PK	H	38.00	8.83	39.09	56.03	50.01	74.00	23.99
15600.00	36.04	AV	H	38.00	8.83	39.09	43.78	37.76	54.00	16.24
6933.24	57.09	PK	H	35.07	5.12	36.98	60.30	54.28	74.00	19.72
6933.24	50.73	AV	H	35.07	5.12	36.98	53.94	47.92	54.00	6.08
High Channel: 5240 MHz										
5240.00	73.36	PK	H	33.68	3.52	0.00	110.56	104.54	N/A	N/A
5240.00	64.19	AV	H	33.68	3.52	0.00	101.39	95.37	N/A	N/A
5240.00	72.41	PK	V	33.68	3.52	0.00	109.61	103.59	N/A	N/A
5240.00	63.46	AV	V	33.68	3.52	0.00	100.66	94.64	N/A	N/A
5350.00	26.84	PK	H	33.86	3.52	0.00	64.22	58.2	74.00	15.80
5350.00	15.19	AV	H	33.86	3.52	0.00	52.57	46.55	54.00	7.45
10480.00	45.76	PK	H	38.20	6.37	36.88	53.45	47.43	74.00	26.57
10480.00	33.61	AV	H	38.20	6.37	36.88	41.30	35.28	54.00	18.72
15720.00	52.88	PK	H	37.88	8.79	39.18	60.37	54.35	74.00	19.65
15720.00	40.09	AV	H	37.88	8.79	39.18	47.58	41.56	54.00	12.44
6986.63	56.29	PK	H	35.17	5.17	36.97	59.66	53.64	74.00	20.36
6986.63	50.55	AV	H	35.17	5.17	36.97	53.92	47.9	54.00	6.10

**802.11n ht40(MIMO was the worst)**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)						
Low Channel: 5190 MHz										
5190.00	70.00	PK	H	33.60	3.59	0.00	107.19	101.17	N/A	N/A
5190.00	60.83	AV	H	33.60	3.59	0.00	98.02	92	N/A	N/A
5190.00	67.11	PK	V	33.60	3.59	0.00	104.30	98.28	N/A	N/A
5190.00	58.61	AV	V	33.60	3.59	0.00	95.80	89.78	N/A	N/A
5150.00	36.08	PK	H	33.54	3.56	0.00	73.18	67.16	74.00	6.84
5150.00	17.87	AV	H	33.54	3.56	0.00	54.97	48.95	54.00	5.05
10380.00	45.28	PK	H	38.18	6.31	36.85	52.92	46.9	74.00	27.10
10380.00	33.57	AV	H	38.18	6.31	36.85	41.21	35.19	54.00	18.81
15570.00	49.73	PK	H	38.03	8.84	39.06	57.54	51.52	74.00	22.48
15570.00	36.91	AV	H	38.03	8.84	39.06	44.72	38.7	54.00	15.30
6920.20	58.57	PK	H	35.04	5.11	36.99	61.73	55.71	74.00	18.29
6920.20	52.16	AV	H	35.04	5.11	36.99	55.32	49.3	54.00	4.70
High Channel: 5230 MHz										
5230.00	69.55	PK	H	33.67	3.54	0.00	106.76	100.74	N/A	N/A
5230.00	59.73	AV	H	33.67	3.54	0.00	96.94	90.92	N/A	N/A
5230.00	68.10	PK	V	33.67	3.54	0.00	105.31	99.29	N/A	N/A
5230.00	58.29	AV	V	33.67	3.54	0.00	95.50	89.48	N/A	N/A
5350.00	26.72	PK	H	33.86	3.52	0.00	64.10	58.08	74.00	15.92
5350.00	15.56	AV	H	33.86	3.52	0.00	52.94	46.92	54.00	7.08
10460.00	45.81	PK	H	38.19	6.36	36.87	53.49	47.47	74.00	26.53
10460.00	33.13	AV	H	38.19	6.36	36.87	40.81	34.79	54.00	19.21
15690.00	48.48	PK	H	37.91	8.80	39.15	56.04	50.02	74.00	23.98
15690.00	36.52	AV	H	37.91	8.80	39.15	44.08	38.06	54.00	15.94
6973.23	57.14	PK	H	35.15	5.16	36.98	60.47	54.45	74.00	19.55
6973.23	51.67	AV	H	35.15	5.16	36.98	55.00	48.98	54.00	5.02

**802.11 ac80(MIMO was the worst)**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)						
Middle Channel: 5210 MHz										
5210.00	65.64	PK	H	33.64	3.58	0.00	102.86	96.84	N/A	N/A
5210.00	52.87	AV	H	33.64	3.58	0.00	90.09	84.07	N/A	N/A
5210.00	64.35	PK	V	33.64	3.58	0.00	101.57	95.55	N/A	N/A
5210.00	52.02	AV	V	33.64	3.58	0.00	89.24	83.22	N/A	N/A
5150.00	28.43	PK	H	33.54	3.56	0.00	65.53	59.51	74.00	14.49
5150.00	17.44	AV	H	33.54	3.56	0.00	54.54	48.52	54.00	5.48
5350.00	26.42	PK	H	33.86	3.52	0.00	63.80	57.78	74.00	16.22
5350.00	16.10	AV	H	33.86	3.52	0.00	53.48	47.46	54.00	6.54
10420.00	45.78	PK	H	38.18	6.33	36.86	53.43	47.41	74.00	26.59
10420.00	33.01	AV	H	38.18	6.33	36.86	40.66	34.64	54.00	19.36
15630.00	49.26	PK	H	37.97	8.82	39.11	56.94	50.92	74.00	23.08
15630.00	37.43	AV	H	37.97	8.82	39.11	45.11	39.09	54.00	14.91
6946.67	58.19	PK	H	35.09	5.13	36.98	61.43	55.41	74.00	18.59
6946.67	51.80	AV	H	35.09	5.13	36.98	55.04	49.02	54.00	4.98

**5725-5850MHz:  
802.11a(MIMO was the worst)**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)						
Low Channel: 5745 MHz										
5745.00	73.96	PK	H	34.20	3.69	0.00	111.85	105.83	N/A	N/A
5745.00	63.41	AV	H	34.20	3.69	0.00	101.30	95.28	N/A	N/A
5745.00	70.06	PK	V	34.20	3.69	0.00	107.95	101.93	N/A	N/A
5745.00	59.89	AV	V	34.20	3.69	0.00	97.78	91.76	N/A	N/A
5725.00	40.44	PK	H	34.19	3.69	0.00	78.32	72.3	122.20	49.90
5720.00	38.31	PK	H	34.19	3.69	0.00	76.19	70.17	110.80	40.63
5700.00	31.17	PK	H	34.18	3.68	0.00	69.03	63.01	105.20	42.19
5650.00	27.24	PK	H	34.16	3.63	0.00	65.03	59.01	68.20	9.19
11490.00	45.81	PK	H	38.99	6.59	37.35	54.04	48.02	74.00	25.98
11490.00	33.45	AV	H	38.99	6.59	37.35	41.68	35.66	54.00	18.34
17235.00	49.48	PK	H	41.56	8.78	38.61	61.21	55.19	74.00	18.81
17235.00	36.88	AV	H	41.56	8.78	38.61	48.61	42.59	54.00	11.41
7659.92	49.41	PK	H	36.60	4.45	37.32	53.14	47.12	74.00	26.88
7659.92	43.05	AV	H	36.60	4.45	37.32	46.78	40.76	54.00	13.24
Middle Channel: 5785 MHz										
5785.00	73.72	PK	H	34.21	3.71	0.00	111.64	105.62	N/A	N/A
5785.00	63.35	AV	H	34.21	3.71	0.00	101.27	95.25	N/A	N/A
5785.00	71.38	PK	V	34.21	3.71	0.00	109.30	103.28	N/A	N/A
5785.00	61.05	AV	V	34.21	3.71	0.00	98.97	92.95	N/A	N/A
11570.00	45.36	PK	H	39.00	6.61	37.44	53.53	47.51	74.00	26.49
11570.00	33.02	AV	H	39.00	6.61	37.44	41.19	35.17	54.00	18.83
17355.00	48.86	PK	H	42.26	8.81	38.52	61.41	55.39	74.00	18.61
17355.00	36.43	AV	H	42.26	8.81	38.52	48.98	42.96	54.00	11.04
7713.45	49.88	PK	H	36.63	4.50	37.22	53.79	47.77	74.00	26.23
7713.45	43.52	AV	H	36.63	4.50	37.22	47.43	41.41	54.00	12.59
High Channel: 5825MHz										
5825.00	72.99	PK	H	34.23	3.73	0.00	110.95	104.93	N/A	N/A
5825.00	62.35	AV	H	34.23	3.73	0.00	100.31	94.29	N/A	N/A
5825.00	70.65	PK	V	34.23	3.73	0.00	108.61	102.59	N/A	N/A
5825.00	60.10	AV	V	34.23	3.73	0.00	98.06	92.04	N/A	N/A
5850.00	34.76	PK	H	34.24	3.75	0.00	72.75	66.73	122.20	55.47
5855.00	33.96	PK	H	34.24	3.75	0.00	71.95	65.93	110.80	44.87
5875.00	27.37	PK	H	34.25	3.77	0.00	65.39	59.37	105.20	45.83
5925.00	26.94	PK	H	34.27	3.80	0.00	65.01	58.99	68.20	9.21
11650.00	45.53	PK	H	39.00	6.64	37.53	53.64	47.62	74.00	26.38
11650.00	33.12	AV	H	39.00	6.64	37.53	41.23	35.21	54.00	18.79
17475.00	48.99	PK	H	42.96	8.84	38.44	62.35	56.33	74.00	17.67
17475.00	36.61	AV	H	42.96	8.84	38.44	49.97	43.95	54.00	10.05
7766.79	49.69	PK	H	36.66	4.55	37.13	53.77	47.75	74.00	26.25
7766.79	43.23	AV	H	36.66	4.55	37.13	47.31	41.29	54.00	12.71

**802.11n ht20(MIMO was the worst)**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)						
Low Channel: 5745 MHz										
5745.00	75.02	PK	H	34.20	3.69	0.00	112.91	106.89	N/A	N/A
5745.00	64.79	AV	H	34.20	3.69	0.00	102.68	96.66	N/A	N/A
5745.00	72.82	PK	V	34.20	3.69	0.00	110.71	104.69	N/A	N/A
5745.00	62.20	AV	V	34.20	3.69	0.00	100.09	94.07	N/A	N/A
5725.00	41.47	PK	H	34.19	3.69	0.00	79.35	73.33	122.20	48.87
5720.00	31.32	PK	H	34.19	3.69	0.00	69.20	63.18	110.80	47.62
5700.00	30.18	PK	H	34.18	3.68	0.00	68.04	62.02	105.20	43.18
5650.00	26.52	PK	H	34.16	3.63	0.00	64.31	58.29	68.20	9.91
11490.00	45.06	PK	H	38.99	6.59	37.35	53.29	47.27	74.00	26.73
11490.00	32.56	AV	H	38.99	6.59	37.35	40.79	34.77	54.00	19.23
17235.00	48.75	PK	H	41.56	8.78	38.61	60.48	54.46	74.00	19.54
17235.00	36.10	AV	H	41.56	8.78	38.61	47.83	41.81	54.00	12.19
7659.92	49.84	PK	H	36.60	4.45	37.32	53.57	47.55	74.00	26.45
7659.92	43.26	AV	H	36.60	4.45	37.32	46.99	40.97	54.00	13.03
Middle Channel: 5785 MHz										
5785.00	75.26	PK	H	34.21	3.71	0.00	113.18	107.16	N/A	N/A
5785.00	64.83	AV	H	34.21	3.71	0.00	102.75	96.73	N/A	N/A
5785.00	72.76	PK	V	34.21	3.71	0.00	110.68	104.66	N/A	N/A
5785.00	62.54	AV	V	34.21	3.71	0.00	100.46	94.44	N/A	N/A
11570.00	45.21	PK	H	39.00	6.61	37.44	53.38	47.36	74.00	26.64
11570.00	32.72	AV	H	39.00	6.61	37.44	40.89	34.87	54.00	19.13
17355.00	48.88	PK	H	42.26	8.81	38.52	61.43	55.41	74.00	18.59
17355.00	36.32	AV	H	42.26	8.81	38.52	48.87	42.85	54.00	11.15
7713.45	49.68	PK	H	36.63	4.50	37.22	53.59	47.57	74.00	26.43
7713.45	43.20	AV	H	36.63	4.50	37.22	47.11	41.09	54.00	12.91
High Channel: 5825 MHz										
5825.00	74.30	PK	H	34.23	3.73	0.00	112.26	106.24	N/A	N/A
5825.00	63.87	AV	H	34.23	3.73	0.00	101.83	95.81	N/A	N/A
5825.00	71.28	PK	V	34.23	3.73	0.00	109.24	103.22	N/A	N/A
5825.00	60.79	AV	V	34.23	3.73	0.00	98.75	92.73	N/A	N/A
5850.00	34.11	PK	H	34.24	3.75	0.00	72.10	66.08	122.20	56.12
5855.00	30.55	PK	H	34.24	3.75	0.00	68.54	62.52	110.80	48.28
5875.00	27.01	PK	H	34.25	3.77	0.00	65.03	59.01	105.20	46.19
5925.00	26.95	PK	H	34.27	3.80	0.00	65.02	59	68.20	9.20
11650.00	44.88	PK	H	39.00	6.64	37.53	52.99	46.97	74.00	27.03
11650.00	32.46	AV	H	39.00	6.64	37.53	40.57	34.55	54.00	19.45
17475.00	48.52	PK	H	42.96	8.84	38.44	61.88	55.86	74.00	18.14
17475.00	36.05	AV	H	42.96	8.84	38.44	49.41	43.39	54.00	10.61
7766.79	49.52	PK	H	36.66	4.55	37.13	53.60	47.58	74.00	26.42
7766.79	43.12	AV	H	36.66	4.55	37.13	47.20	41.18	54.00	12.82

**802.11n ht40(MIMO was the worst)**




Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)						
Low Channel: 5755 MHz										
5755.00	72.76	PK	H	34.20	3.70	0.00	110.66	104.64	N/A	N/A
5755.00	62.57	AV	H	34.20	3.70	0.00	100.47	94.45	N/A	N/A
5755.00	68.64	PK	V	34.20	3.70	0.00	106.54	100.52	N/A	N/A
5755.00	58.25	AV	V	34.20	3.70	0.00	96.15	90.13	N/A	N/A
5725.00	39.54	PK	H	34.19	3.69	0.00	77.42	71.4	122.20	50.80
5720.00	37.52	PK	H	34.19	3.69	0.00	75.40	69.38	110.80	41.42
5700.00	29.54	PK	H	34.18	3.68	0.00	67.40	61.38	105.20	43.82
5650.00	26.65	PK	H	34.16	3.63	0.00	64.44	58.42	68.20	9.78
11510.00	44.86	PK	H	39.00	6.59	37.37	53.08	47.06	74.00	26.94
11510.00	32.38	AV	H	39.00	6.59	37.37	40.60	34.58	54.00	19.42
17265.00	46.87	PK	H	41.74	8.79	38.58	58.82	52.8	74.00	21.20
17265.00	34.40	AV	H	41.74	8.79	38.58	46.35	40.33	54.00	13.67
7673.54	50.02	PK	H	36.60	4.47	37.29	53.80	47.78	74.00	26.22
7673.54	43.76	AV	H	36.60	4.47	37.29	47.54	41.52	54.00	12.48
High Channel: 5795 MHz										
5795.00	70.30	PK	H	34.22	3.71	0.00	108.23	102.21	N/A	N/A
5795.00	59.86	AV	H	34.22	3.71	0.00	97.79	91.77	N/A	N/A
5795.00	68.07	PK	V	34.22	3.71	0.00	106.00	99.98	N/A	N/A
5795.00	57.69	AV	V	34.22	3.71	0.00	95.62	89.6	N/A	N/A
5850.00	29.87	PK	H	34.24	3.75	0.00	67.86	61.84	122.20	60.36
5855.00	29.96	PK	H	34.24	3.75	0.00	67.95	61.93	110.80	48.87
5875.00	26.96	PK	H	34.25	3.77	0.00	64.98	58.96	105.20	46.24
5925.00	26.63	PK	H	34.27	3.80	0.00	64.70	58.68	68.20	9.52
11590.00	44.96	PK	H	39.00	6.62	37.46	53.12	47.1	74.00	26.90
11590.00	32.53	AV	H	39.00	6.62	37.46	40.69	34.67	54.00	19.33
17385.00	47.10	PK	H	42.43	8.82	38.50	59.85	53.83	74.00	20.17
17385.00	34.63	AV	H	42.43	8.82	38.50	47.38	41.36	54.00	12.64
7726.59	49.88	PK	H	36.64	4.51	37.20	53.83	47.81	74.00	26.19
7726.59	43.41	AV	H	36.64	4.51	37.20	47.36	41.34	54.00	12.66

**802.11 ac80(MIMO was the worst)**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)						
Middle Channel: 5775 MHz										
5775.00	68.26	PK	H	34.21	3.70	0.00	106.17	100.15	N/A	N/A
5775.00	52.30	AV	H	34.21	3.70	0.00	90.21	84.19	N/A	N/A
5775.00	64.63	PK	V	34.21	3.70	0.00	102.54	96.52	N/A	N/A
5775.00	49.23	AV	V	34.21	3.70	0.00	87.14	81.12	N/A	N/A
5725.00	35.37	PK	H	34.19	3.69	0.00	73.25	67.23	122.20	54.97
5720.00	33.36	PK	H	34.19	3.69	0.00	71.24	65.22	110.80	45.58
5700.00	29.00	PK	H	34.18	3.68	0.00	66.86	60.84	105.20	44.36
5650.00	27.58	PK	H	34.16	3.63	0.00	65.37	59.35	68.20	8.85
5850.00	28.18	PK	H	34.24	3.75	0.00	66.17	60.15	122.20	62.05
5855.00	27.11	PK	H	34.24	3.75	0.00	65.10	59.08	110.80	51.72
5875.00	26.19	PK	H	34.25	3.77	0.00	64.21	58.19	105.20	47.01
5925.00	27.09	PK	H	34.27	3.80	0.00	65.16	59.14	68.20	9.06
11550.00	45.11	PK	H	39.00	6.61	37.42	53.30	47.28	74.00	26.72
11550.00	32.65	AV	H	39.00	6.61	37.42	40.84	34.82	54.00	19.18
17325.00	47.22	PK	H	42.09	8.80	38.54	59.57	53.55	74.00	20.45
17325.00	34.71	AV	H	42.09	8.80	38.54	47.06	41.04	54.00	12.96
7699.96	49.96	PK	H	36.62	4.49	37.25	53.82	47.8	74.00	26.20
7699.96	43.55	AV	H	36.62	4.49	37.25	47.41	41.39	54.00	12.61

**Test Plots(1.4MHz Mode High channel was the worst)  
Horizontal**



Fundamental  
Test with Band  
Rejection Filter

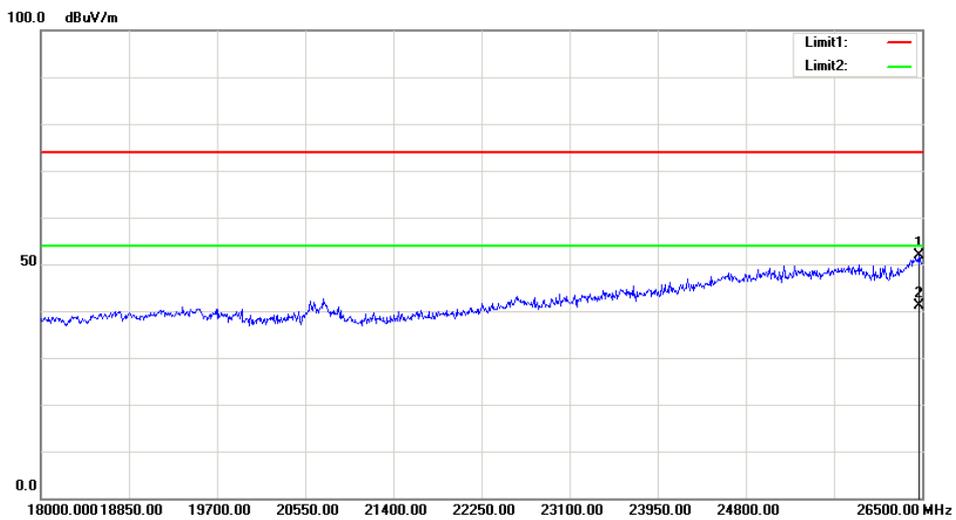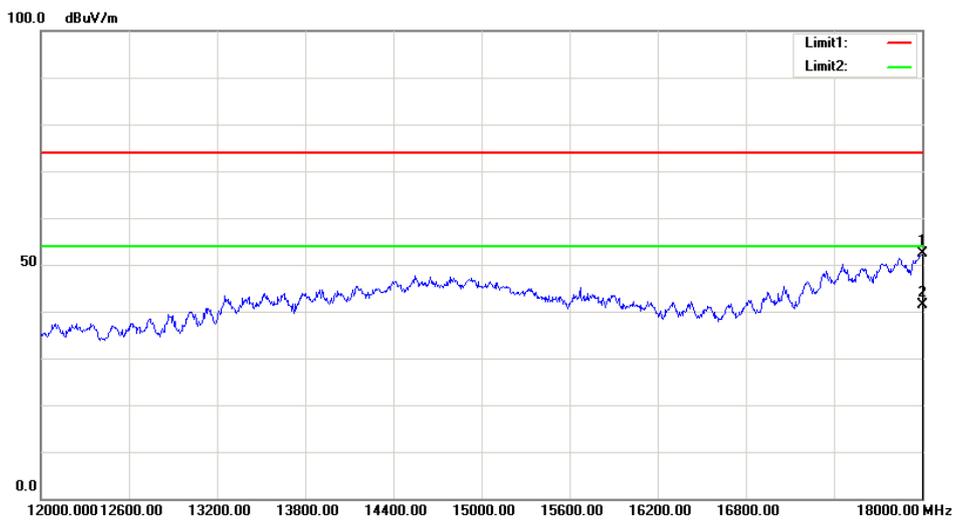
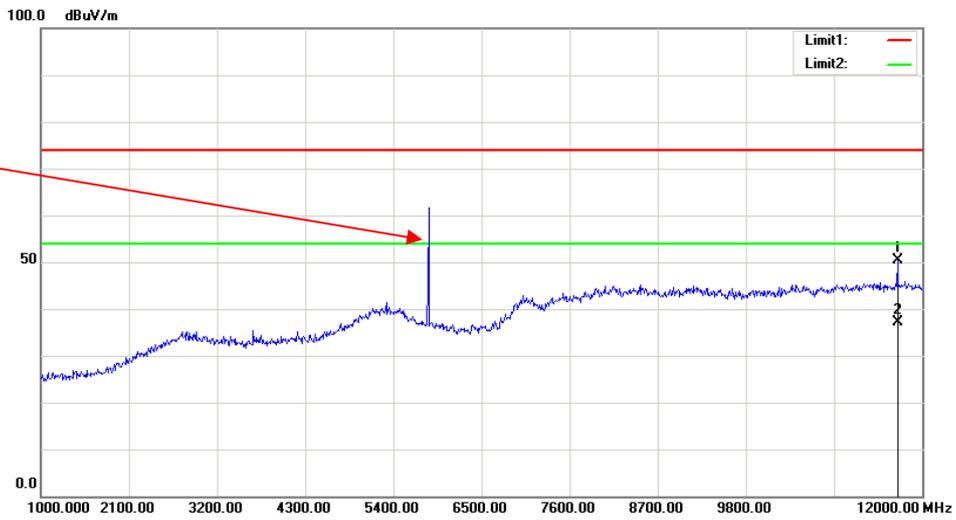




**Vertical**

Fundamental Test with Band Rejection Filter

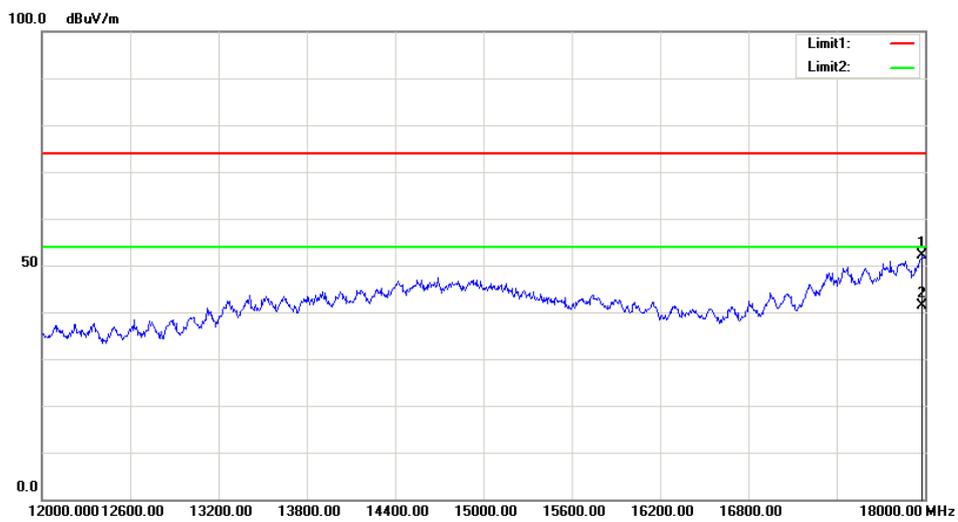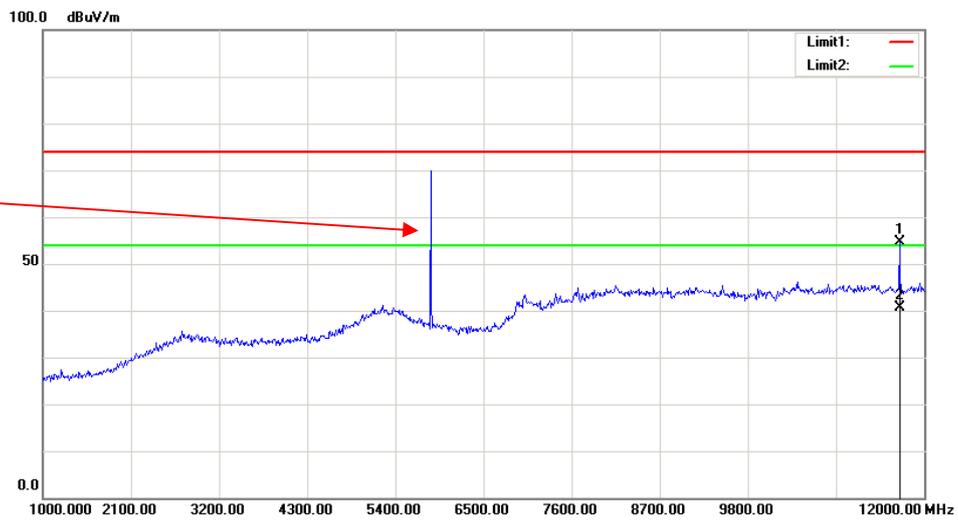

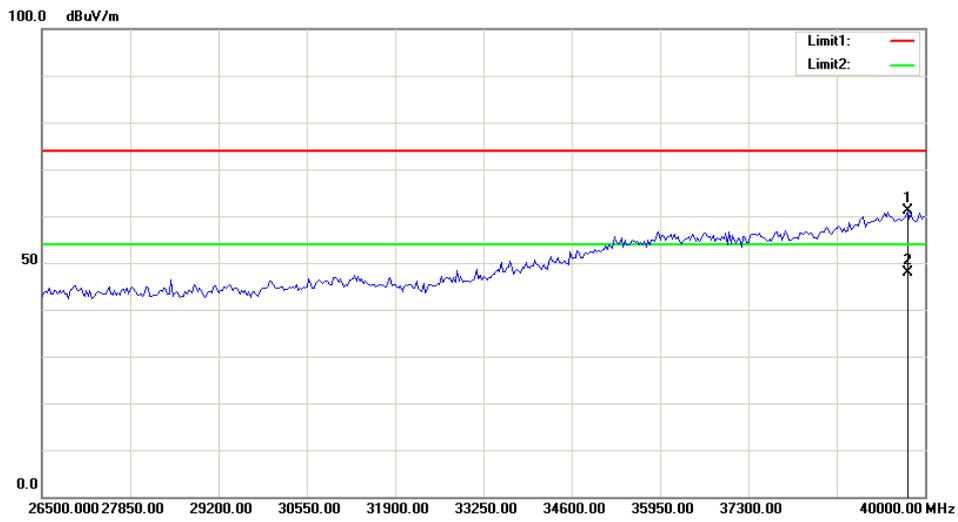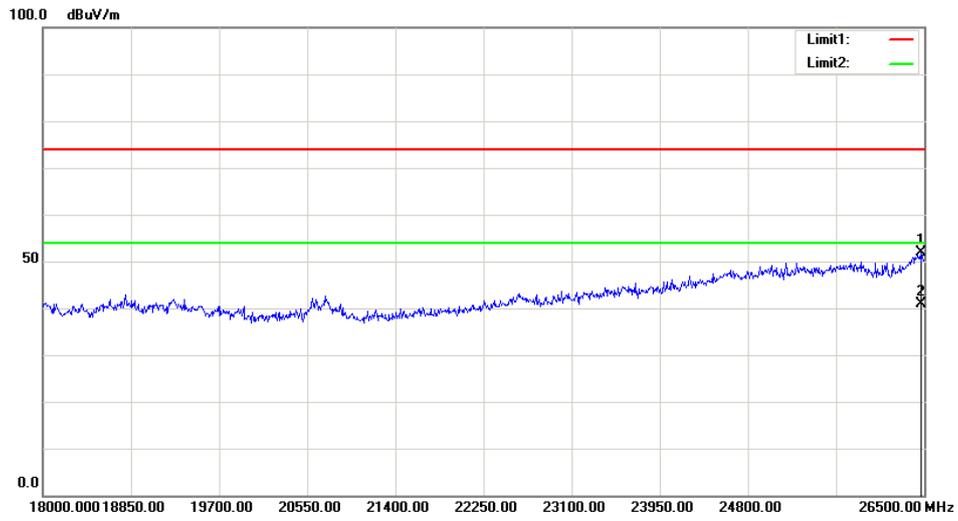

## **FCC §15.407(b)& RSS-247 §6.2–OUT- OF-BAND EMISSIONS**

### **Applicable Standard**

FCC §15.407

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

According to RSS-247§6.2

### **Frequency band 5150-5250 MHz**

#### **6.2.1.2 Unwanted emission limits**

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed  $-27$  dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.

**Frequency band 5250-5350 MHz****6.2.2.2 Unwanted emission limits**

Devices shall comply with the following:

- a) All emissions outside the band 5250-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.; or
- b) All emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. and its power shall comply with the spectral power density for operation within the band 5150-5250 MHz. The device, except devices installed in vehicles, shall be labelled or include in the user manual the following text “for indoor use only.”

**Frequency bands 5470-5600 MHz and 5650-5725 MHz:****6.2.3.2 Unwanted emission limits**

Emissions outside the band 5470-5600 MHz and 5650-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p. However, devices with bandwidth overlapping the band edge of 5725 MHz can meet the emission limit of -27 dBm/MHz e.i.r.p. at 5850 MHz instead of 5725 MHz.

**Frequency band 5725-5850 MHz****6.2.4.2 Unwanted emission limits**

Devices operating in the band 5725-5850 MHz with antenna gain greater than 10 dBi can have unwanted emissions that comply with either the limits in this section or in section 5.5 until six (6) months after the publication date of this standard for certification. Certified devices that do not comply with emission limits in this section shall not be manufactured, imported, distributed, leased, offered for sale or sold after April 1, 2018.

Devices operating in the band 5725-5850 MHz with antenna gain of 10 dBi or less can have unwanted emissions that comply with either the limits in this section or in section 5.5 until April 1, 2018 for certification. Certified devices that do not comply with emission limits in this section shall not be manufactured, imported, distributed, leased, offered for sale or sold after April 1, 2020.

Devices operating in the band 5725-5850 MHz shall have e.i.r.p. of unwanted emissions comply with the following:

- a) 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;
- b) 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;
- c) 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and
- d) -27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

## Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
R&S	Spectrum Analyzer	FSP 38	100478	2017-12-08	2018-12-08
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## Test Data

### Environmental Conditions


<b>Temperature:</b>	27.8~29.1°C
<b>Relative Humidity:</b>	49~62 %
<b>ATM Pressure:</b>	100.4~100.6kPa

*The testing was performed by Nami Quan, Kami Zhou from 2018-09-04 to 2018-09-26.*

**Test Result:** Pass.


For 802.11a/n/ac the emission under limit more than 3dB, combined two chain compliance the requirement, please refer to the following plots.

### 1.4MHz, Low Channel

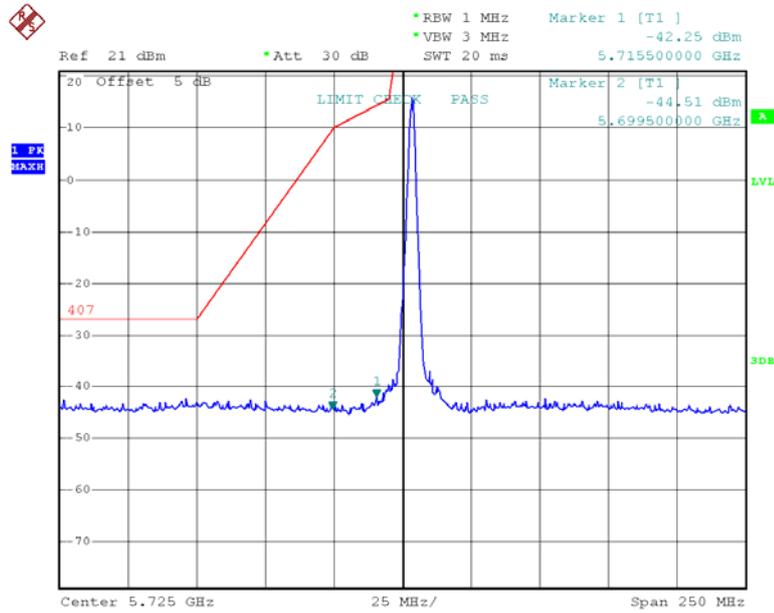


Date: 10.SEP.2018 17:50:11

### 1.4MHz, High Channel

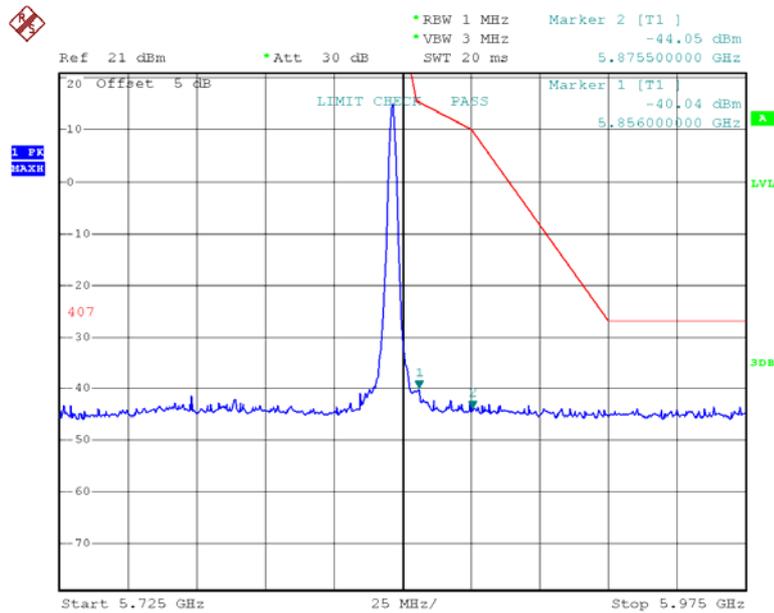


Date: 10.SEP.2018 17:50:47

### 10MHz, Low Channel

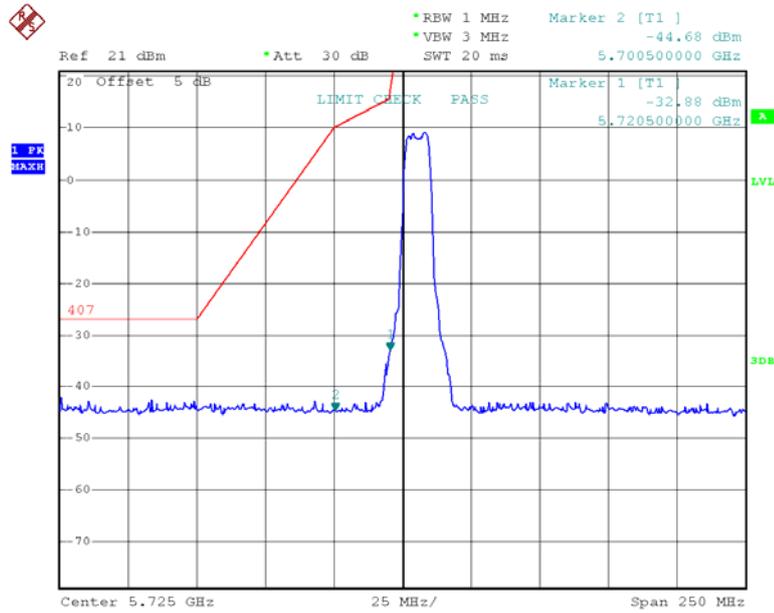


Date: 10.SEP.2018 17:51:36

### 10MHz, High Channel

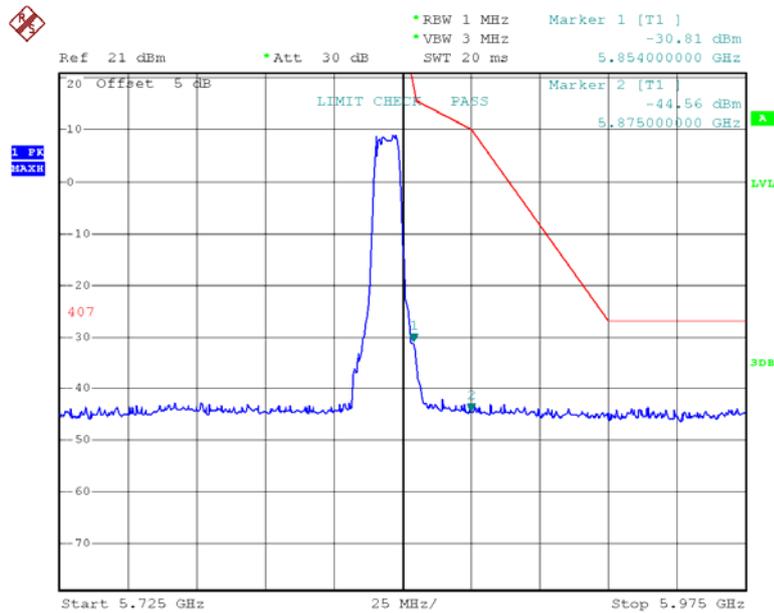


Date: 10.SEP.2018 17:51:15

### 20MHz, Low Channel

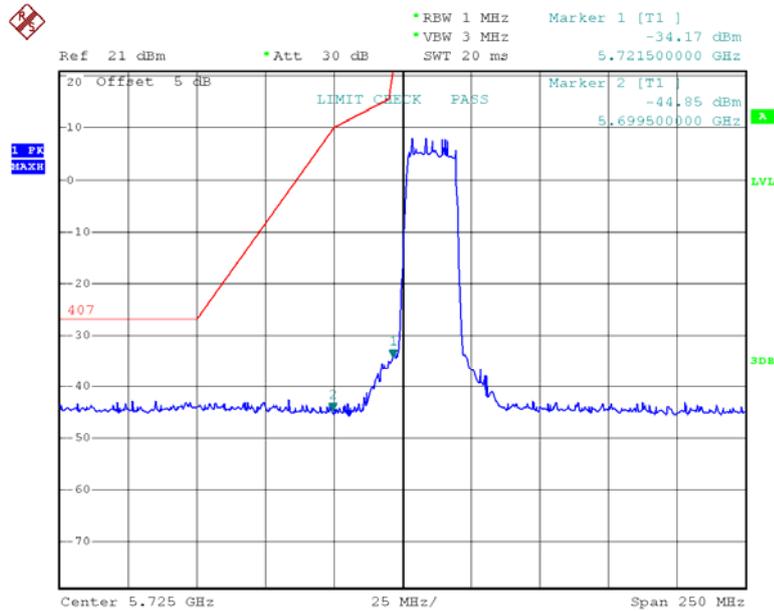

Date: 10.SEP.2018 17:51:54


### 20MHz, High Channel

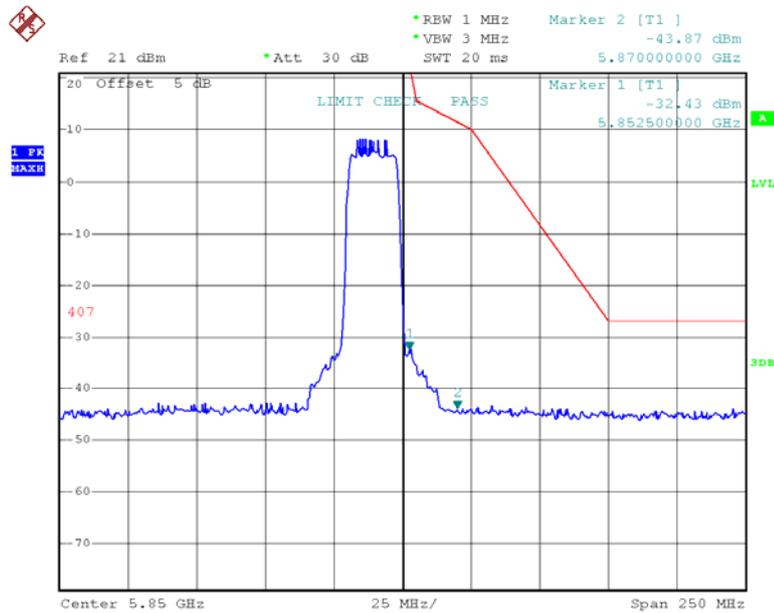

Date: 10.SEP.2018 17:53:41


5150-5250MHz:

802.11a, Chain 0, Low Channel - 1

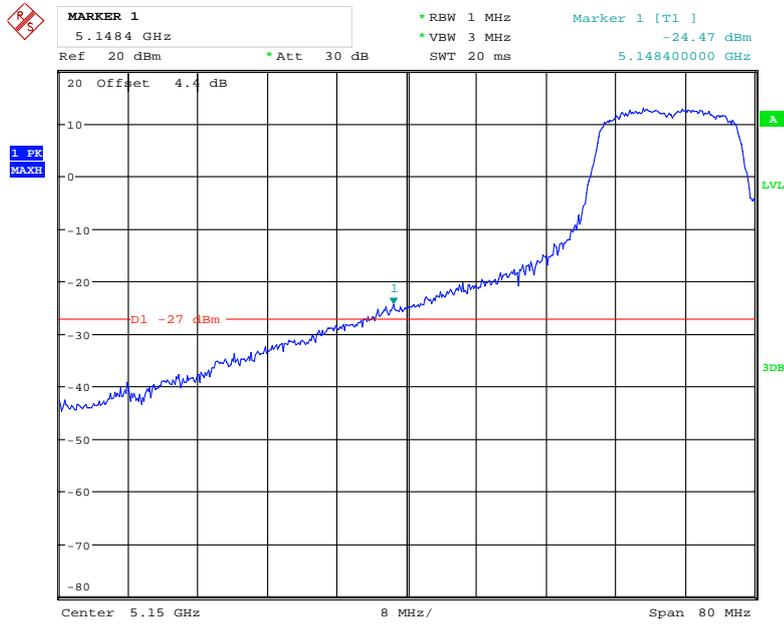


Date: 26.SEP.2018 08:59:32

802.11a, Chain 0, Low Channel - 2

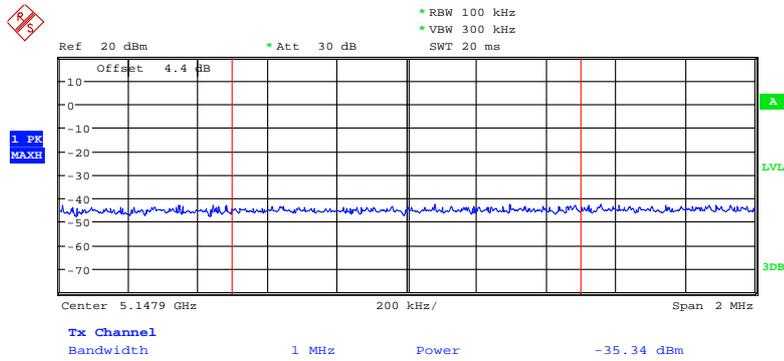


Date: 26.SEP.2018 09:02:18

### 802.11a, Chain 0, High Channel

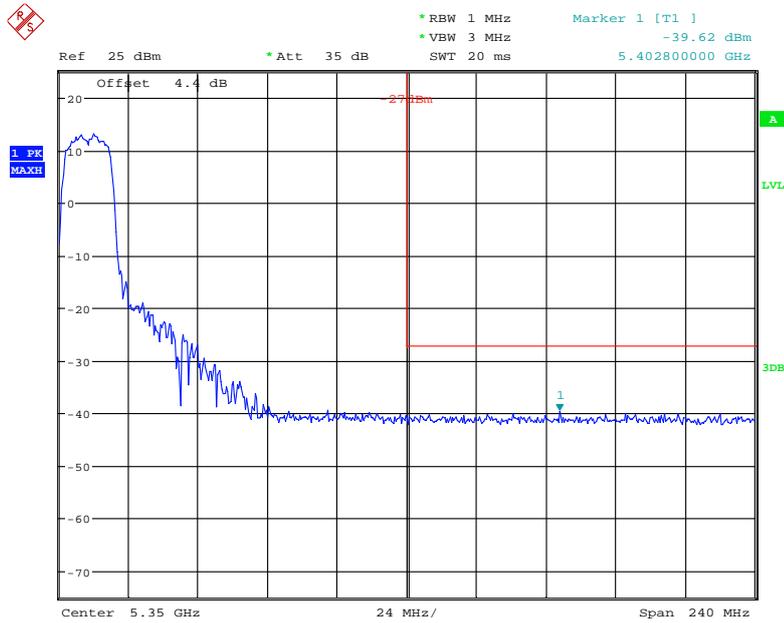


Date: 4.SEP.2018 15:13:43

### 802.11n ht20, Chain 0, Low Channel - 1

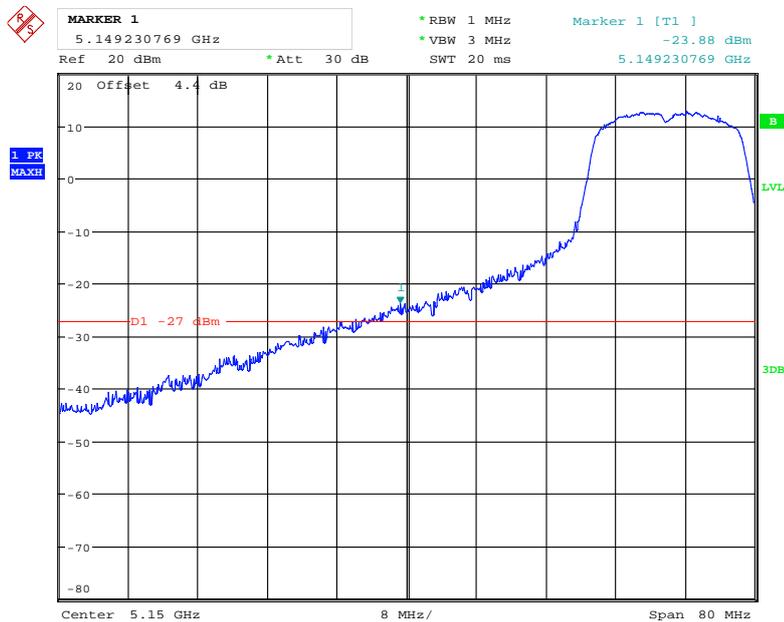


Date: 26.SEP.2018 09:04:38

### 802.11n ht20, Chain 0, Low Channel - 2

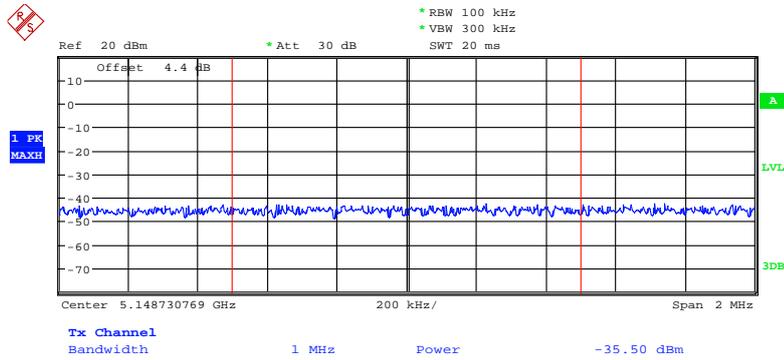


Date: 26.SEP.2018 09:05:46

### 802.11n ht20, Chain 0, High Channel

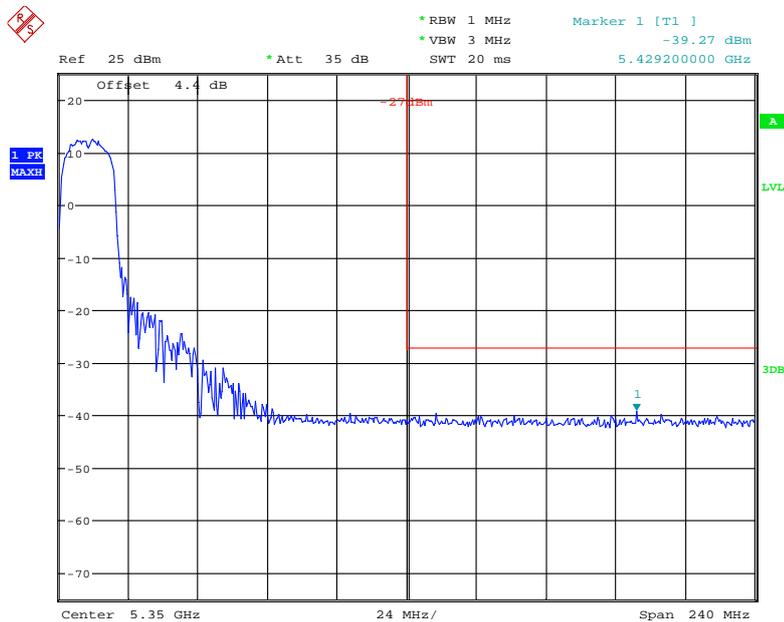


Date: 4.SEP.2018 15:14:21

### 802.11n ht40, Chain 0, Low Channel - 1

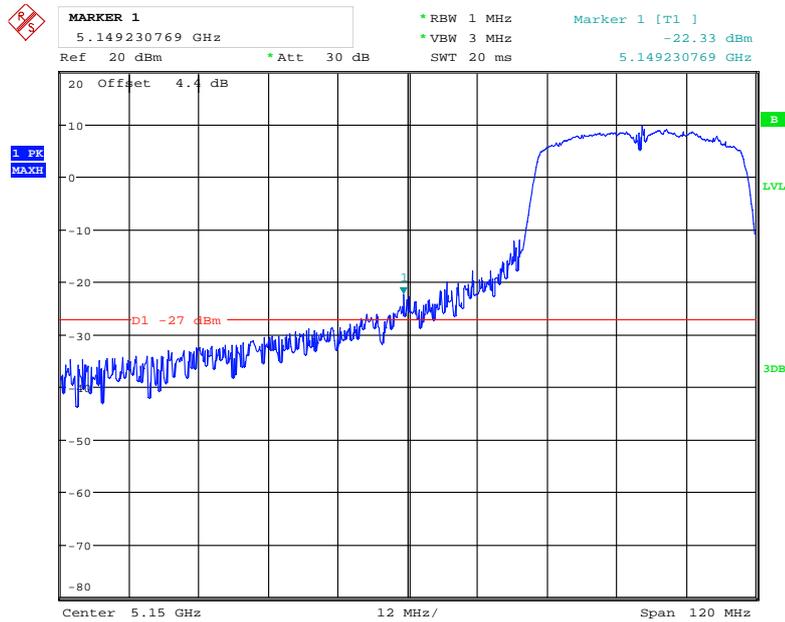


Date: 26.SEP.2018 09:07:01

### 802.11n ht40, Chain 0, Low Channel - 2

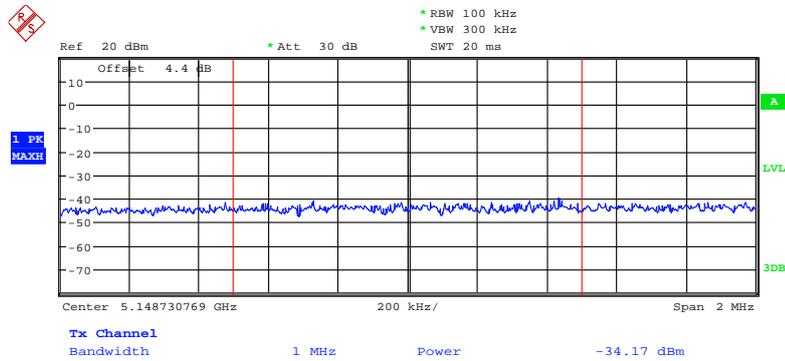


Date: 26.SEP.2018 09:08:02

### 802.11n ht40, Chain 0, High Channel

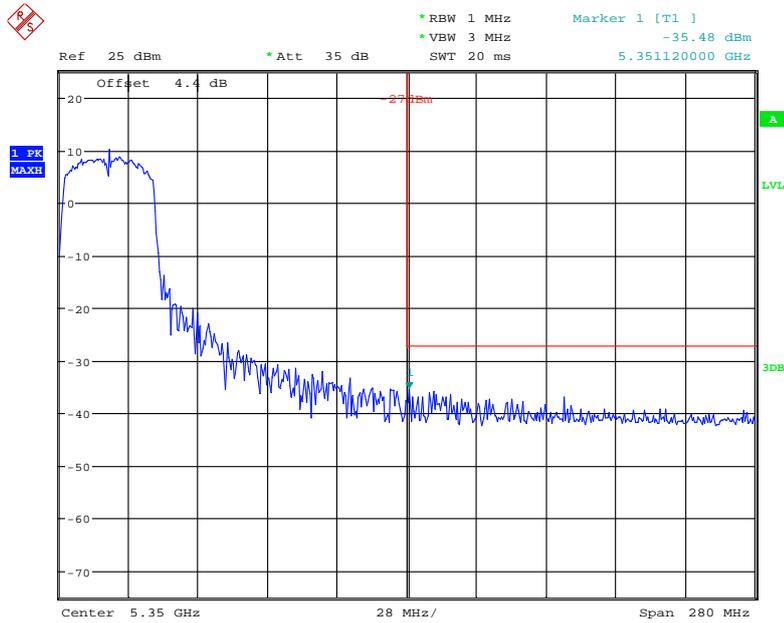


Date: 4.SEP.2018 15:14:58

### 802.11n ac80 Chain 0, Middle Channel

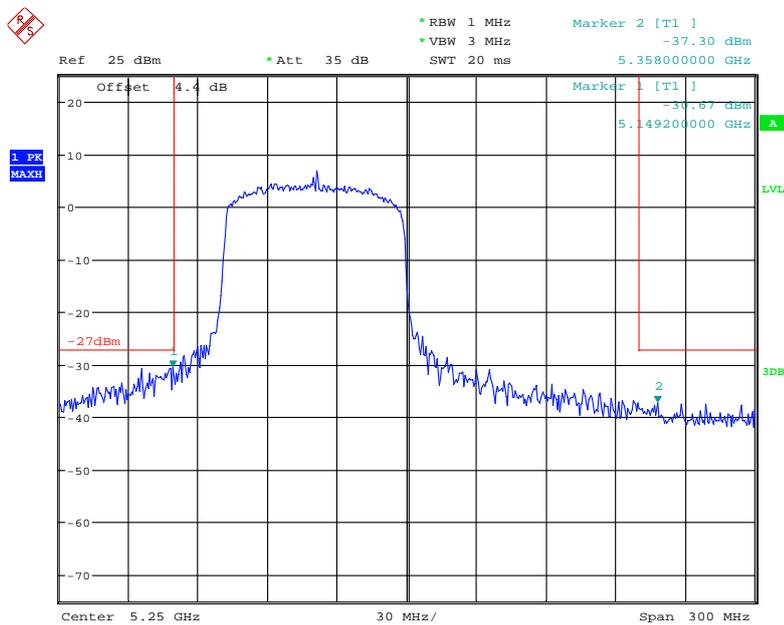


Date: 4.SEP.2018 15:15:32

### 802.11a, Chain 1, Low Channel -1

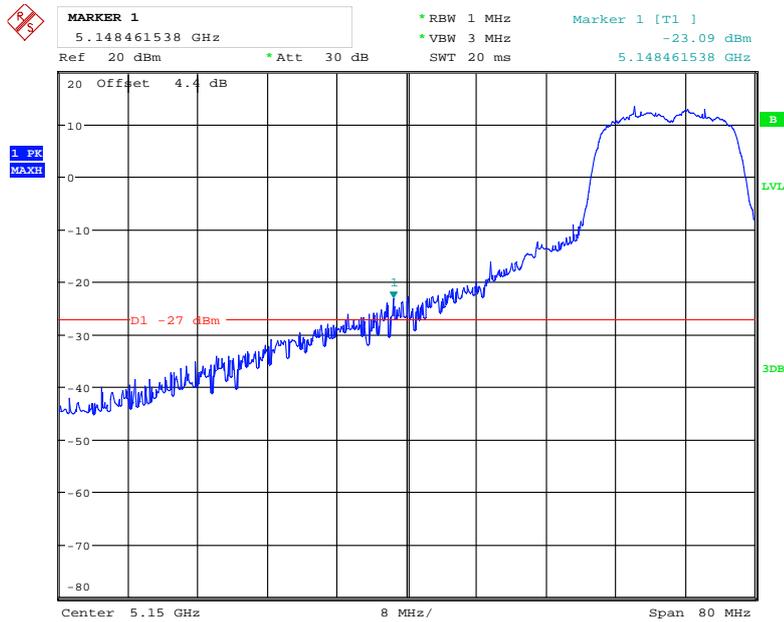


Date: 26.SEP.2018 09:10:06

### 802.11a, Chain 1, Low Channel -2

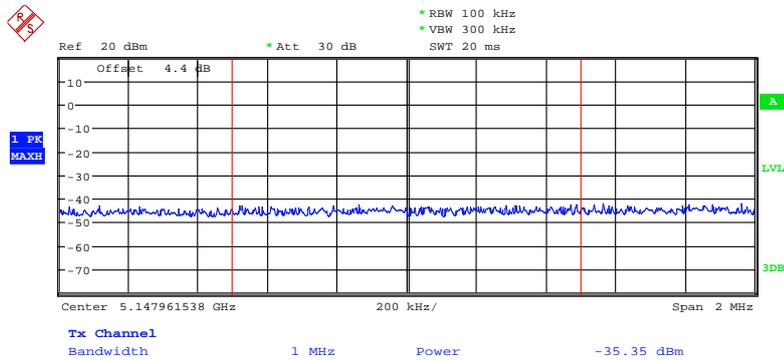


Date: 26.SEP.2018 09:11:35

### 802.11a, Chain 1, High Channel

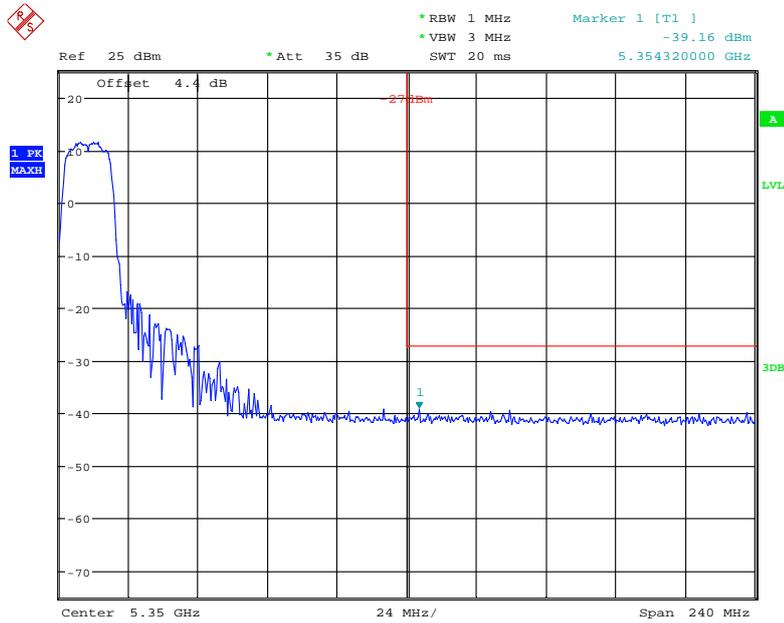


Date: 4.SEP.2018 15:20:45

### 802.11n ht20, Chain 1, Low Channel -1

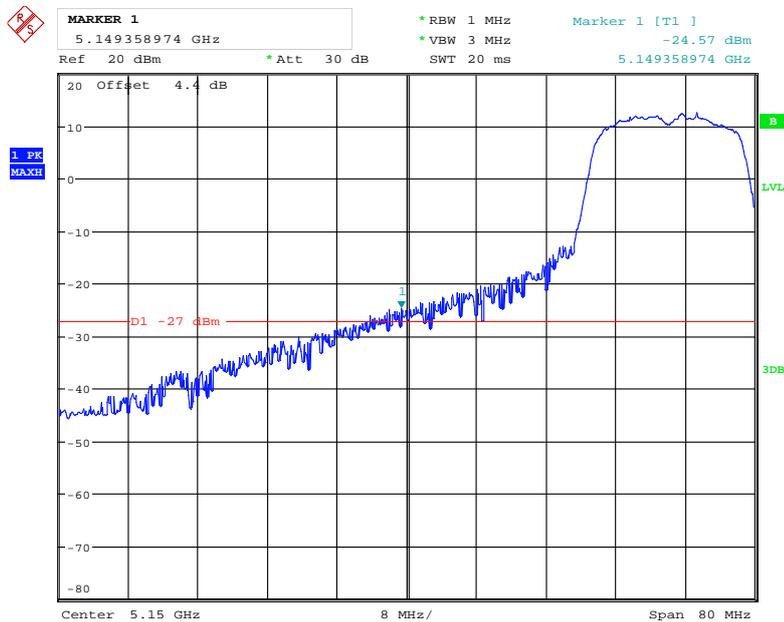


Date: 26.SEP.2018 09:12:11

### 802.11n ht20, Chain 1, Low Channel -2

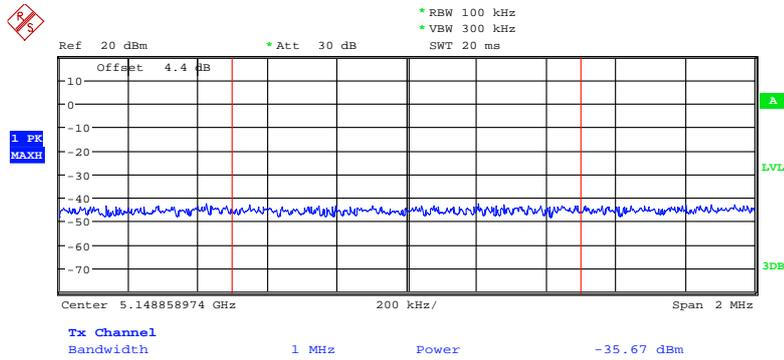


Date: 26.SEP.2018 09:13:36

### 802.11n ht20, Chain 1, High Channel

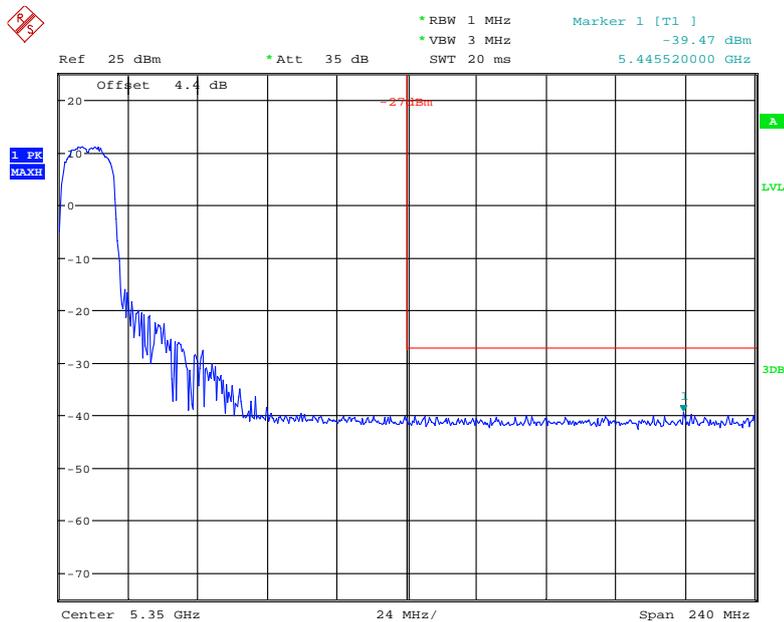


Date: 4.SEP.2018 15:20:05

### 802.11n ht40, Chain 1, Low Channel - 1

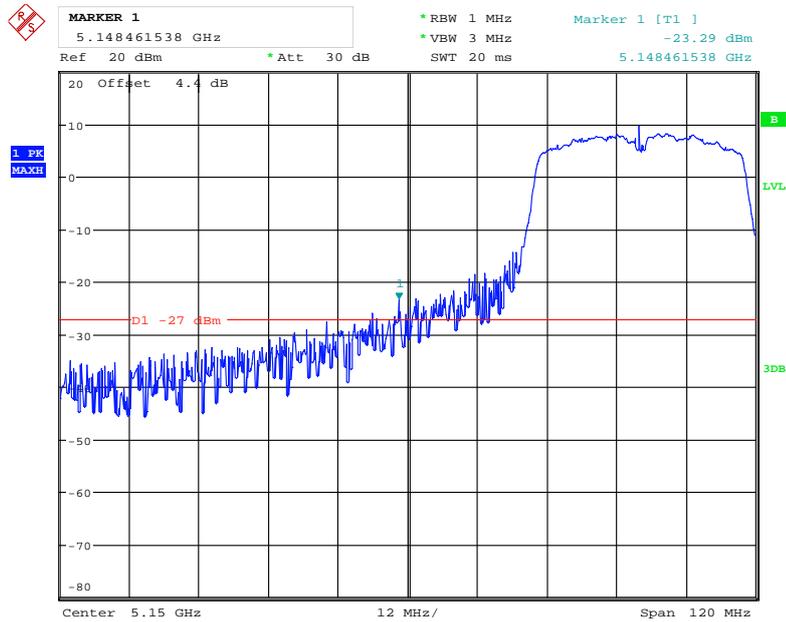


Date: 26.SEP.2018 09:14:07

### 802.11n ht40, Chain 1, Low Channel - 2

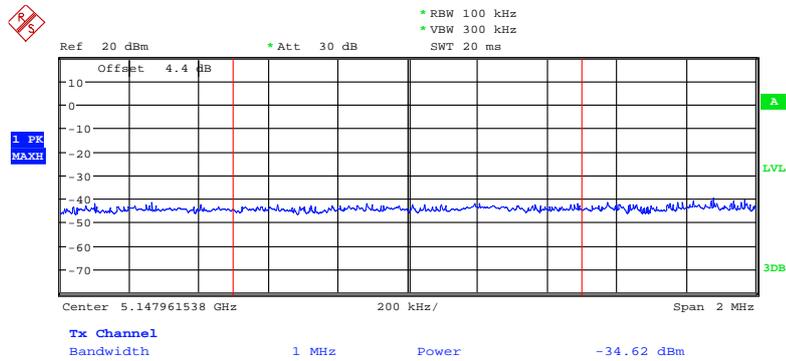


Date: 26.SEP.2018 09:14:53

### 802.11n ht40, Chain 1, High Channel

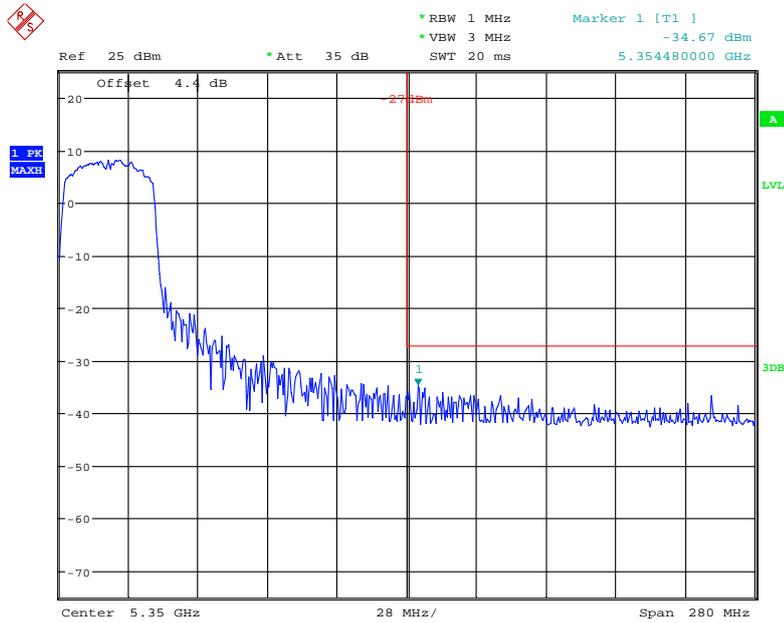

Date: 4.SEP.2018 15:19:20


### 802.11n ac80 Chain 1, Middle Channel

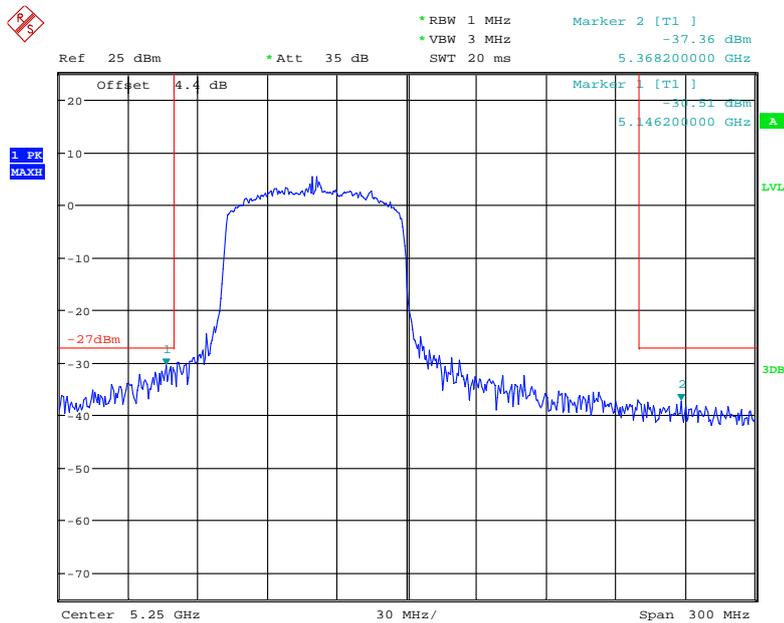

Date: 4.SEP.2018 15:21:20




802.11n ht20, Chain 0, Low Channel

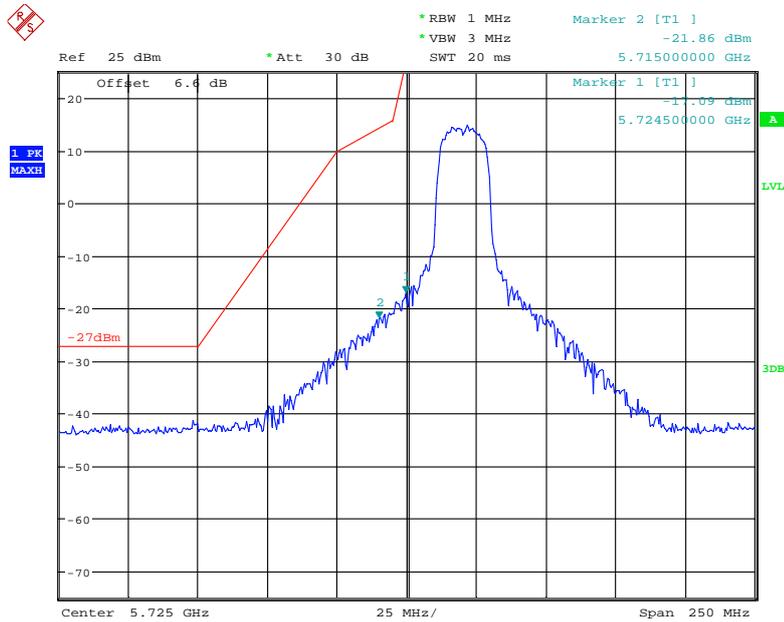


Date: 4.SEP.2018 09:32:38

802.11n ht20, Chain 0, High Channel

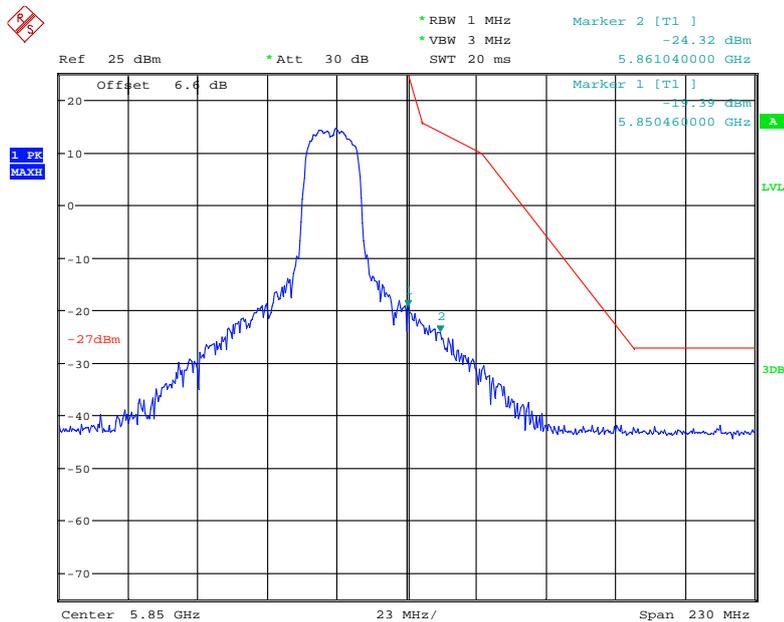


Date: 4.SEP.2018 09:40:00

### 802.11n ht40, Chain 0, Low Channel

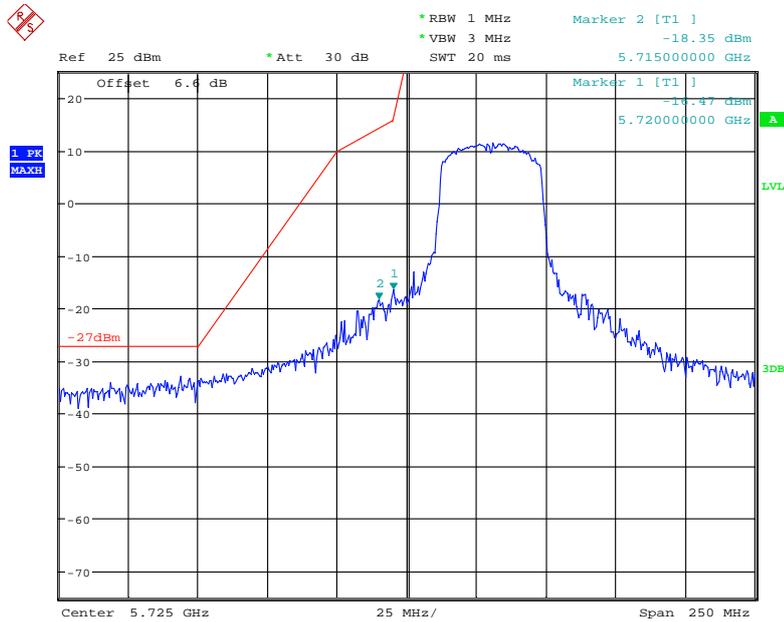


Date: 4.SEP.2018 09:43:07

### 802.11n ht40, Chain 0, High Channel

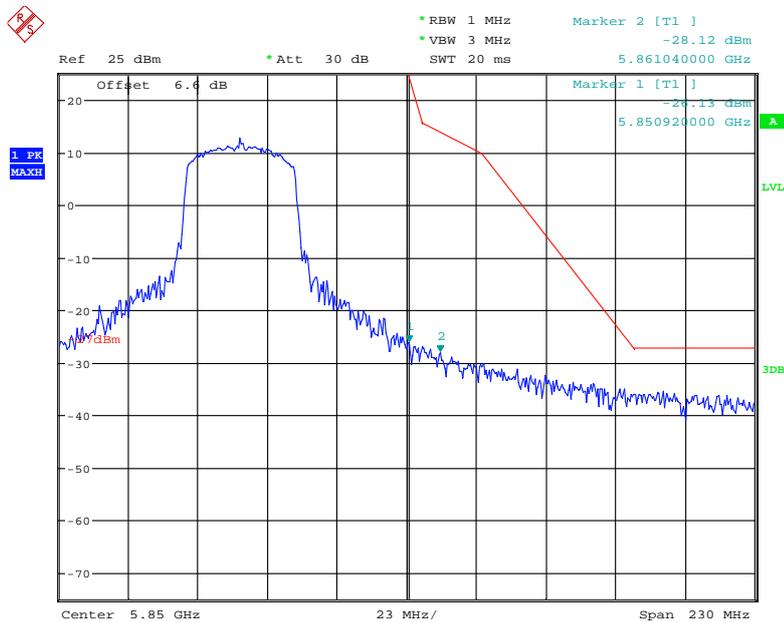


Date: 4.SEP.2018 09:46:41

### 802.11n ac80 Chain 0, Middle Channel

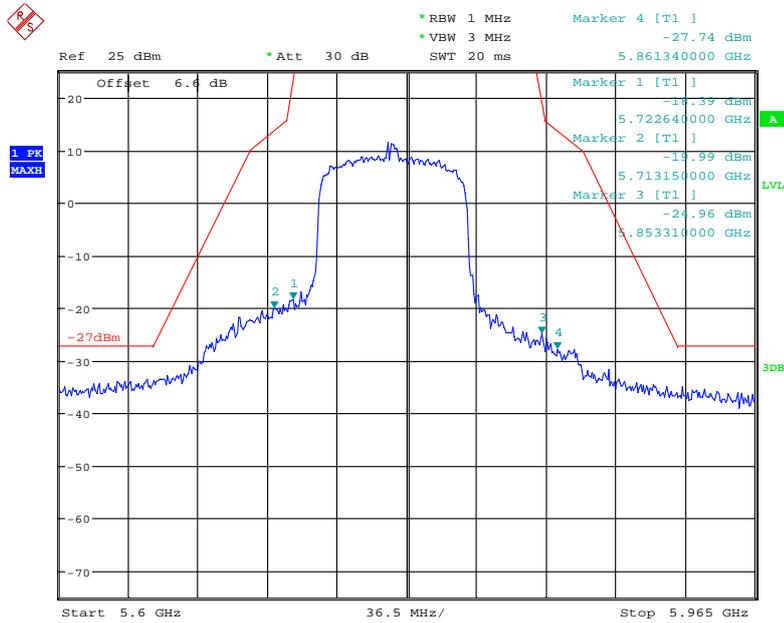


Date: 4.SEP.2018 09:49:33

### 802.11a, Chain 1, Low Channel

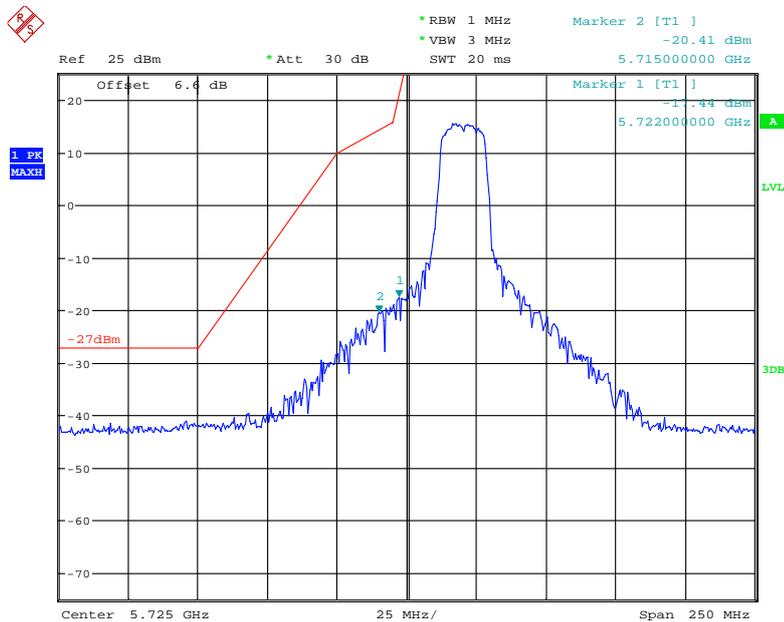


Date: 4.SEP.2018 10:15:48

### 802.11a, Chain 1, High Channel

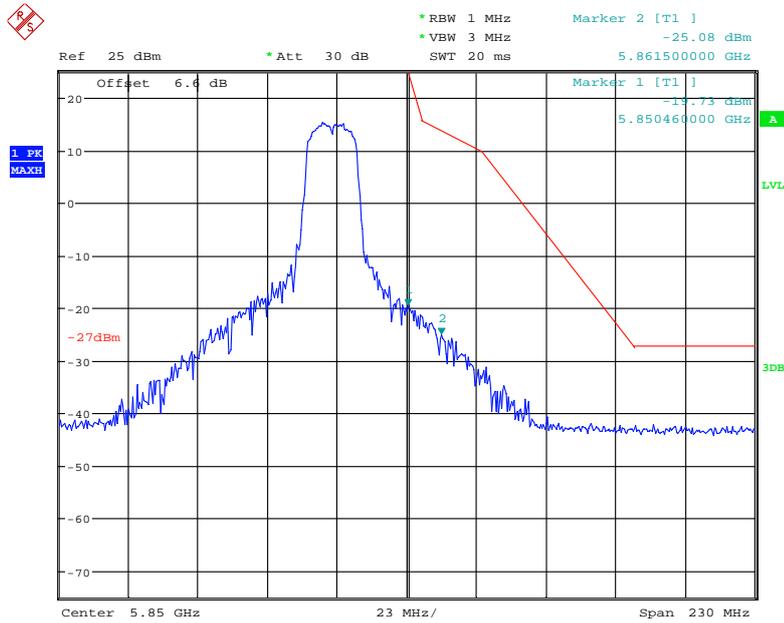

Date: 4.SEP.2018 10:22:56


### 802.11n ht20, Chain 1, Low Channel

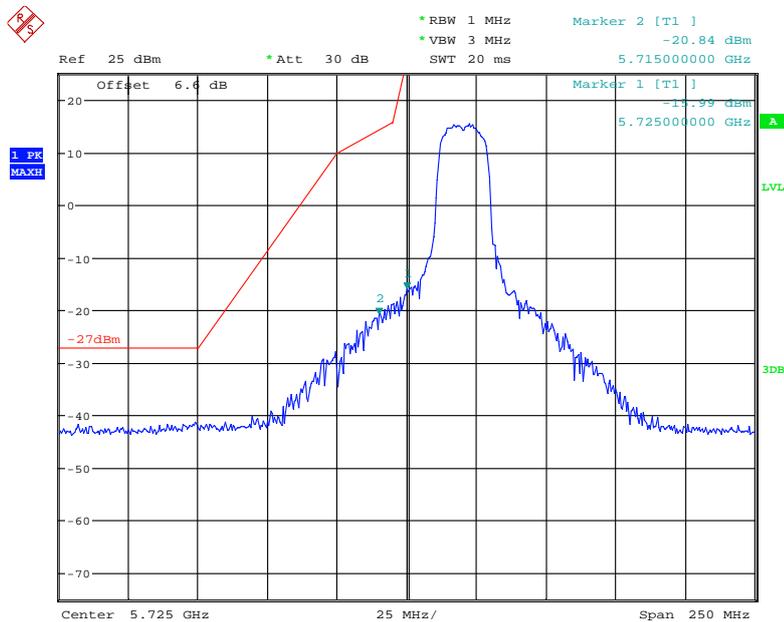

Date: 4.SEP.2018 10:03:23




### 802.11n ht40, Chain 1, High Channel

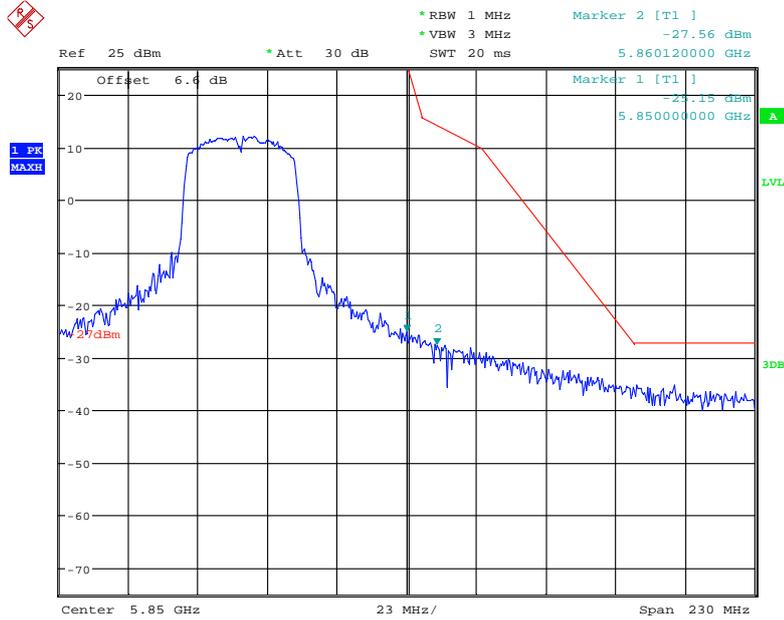

Date: 4.SEP.2018 09:59:49

### 802.11n ac80 Chain 1, Middle Channel

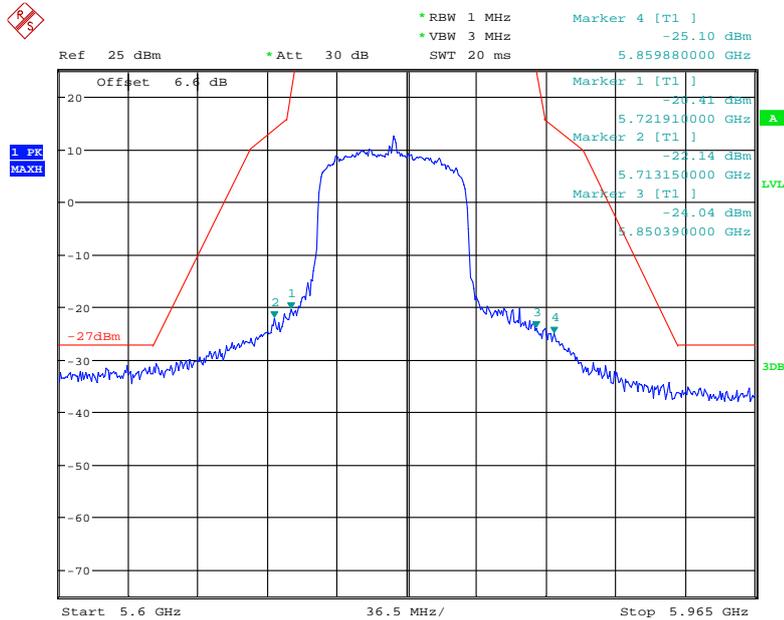

Date: 4.SEP.2018 09:53:22

## FCC §15.407(a)(e) & RSS-247 §6.2, RSS-Gen §6.7–EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH

### Applicable Standard

15.407(a) (e), RSS-247 §6.2 and RSS-Gen §6.7

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
R&S	Spectrum Analyzer	FSP 38	100478	2017-12-08	2018-12-08
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	27.4~27.9°C
<b>Relative Humidity:</b>	49~63 %
<b>ATM Pressure:</b>	100~100.4kPa

*The testing was performed by Nami Quan, Kami Zhou from 2018-09-04 to 2018-09-17.*

**Test Result:** Pass.

Please refer to the following tables and plots.

*Test mode: Transmitting (for 802.11a/n/ac, test only performed at chain 0)*

**SDR modes:**

Mode	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
1.4M	5728.5	1.13	1.22
	5786.5	1.12	1.35
	5846.5	1.11	1.21
10M	5730.5	9.04	8.92
	5787.5	9.04	8.96
	5844.5	9.04	8.96
20M	5735.5	18.08	17.84
	5787.5	18.08	17.92
	5839.5	18.08	17.84

**802.11a/n/ac:  
5150–5250 MHz**

Mode	Frequency (MHz)	26 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180	19.92	16.40
	5200	19.29	16.40
	5240	19.87	16.48
802.11n ht20	5180	21.86	17.52
	5200	21.03	17.52
	5240	21.22	17.52
802.11n ht40	5190	44.32	36.16
	5230	43.17	36.00
802.11 ac80	5210	81.54	74.88


**5725-5850 MHz**

Mode	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11 a	5745	15.34	16.40
	5785	15.58	16.48
	5825	15.33	16.40
802.11 n20	5745	15.32	17.52
	5785	15.26	17.52
	5825	15.26	17.52
802.11 n40	5755	35.38	36.00
	5795	35.38	36.00
802.11 ac80	5775	75.51	75.20

Note: the 99% Occupied Bandwidth have not fall into the band 5250-5350MHz or 5470-5725MHz.


6dB Minimum Emission Bandwidth:

1.4M Low Channel

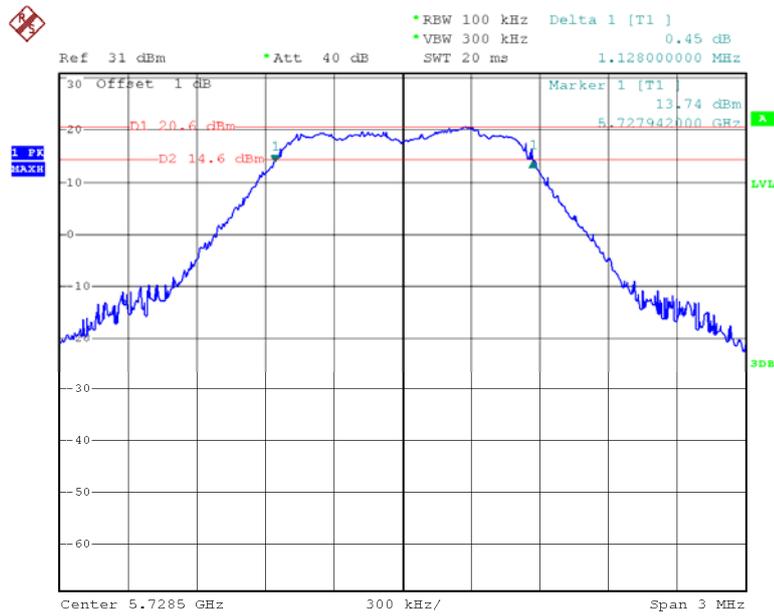


Date: 5.SEP.2018 09:57:46

1.4M Middle Channel

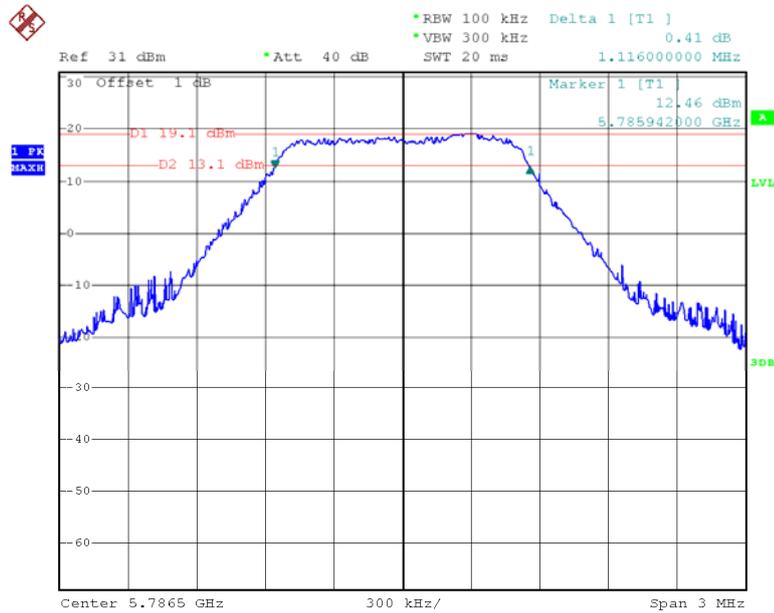


Date: 17.SEP.2018 11:11:33

### 1.4M High Channel

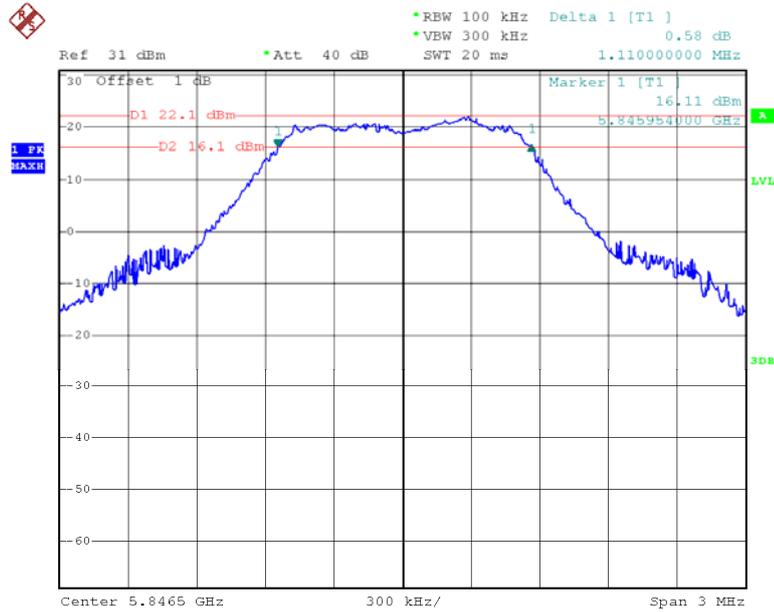


Date: 5.SEP.2018 09:59:24

### 10M Low Channel

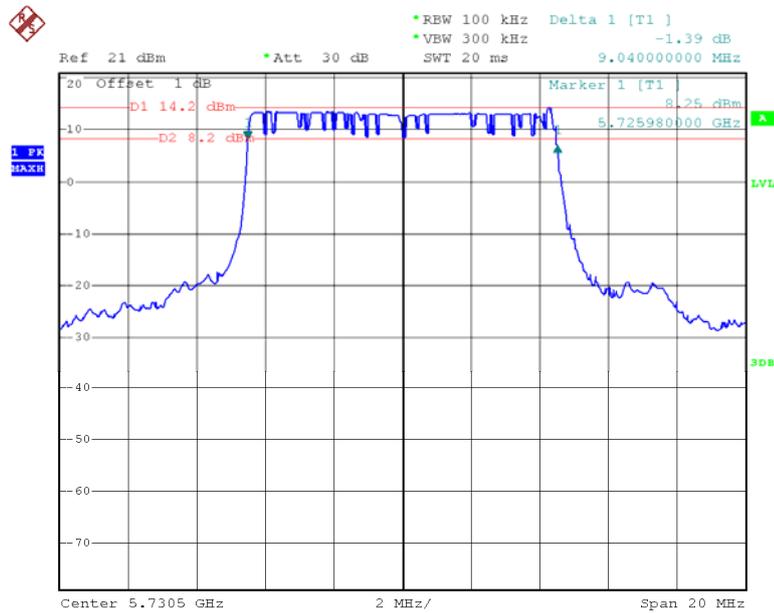


Date: 5.SEP.2018 10:53:52

### 10M Middle Channel

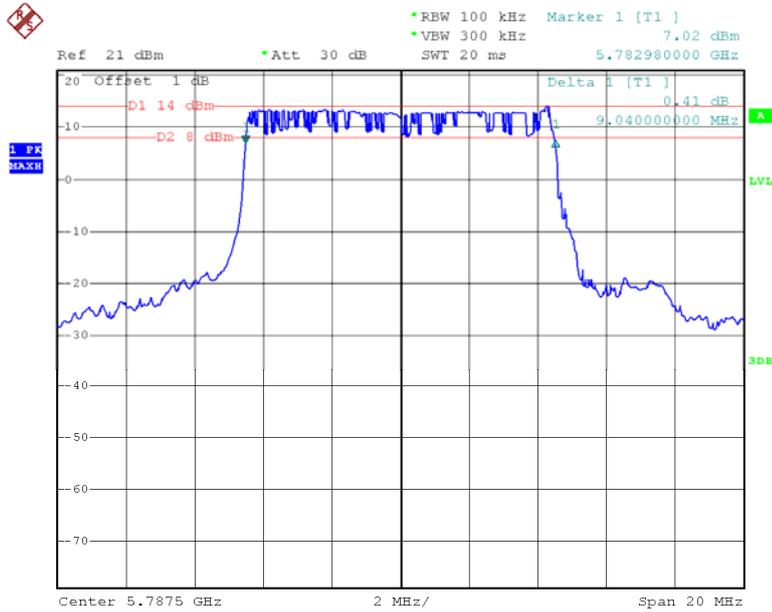


Date: 5.SEP.2018 10:53:09

### 10M High Channel

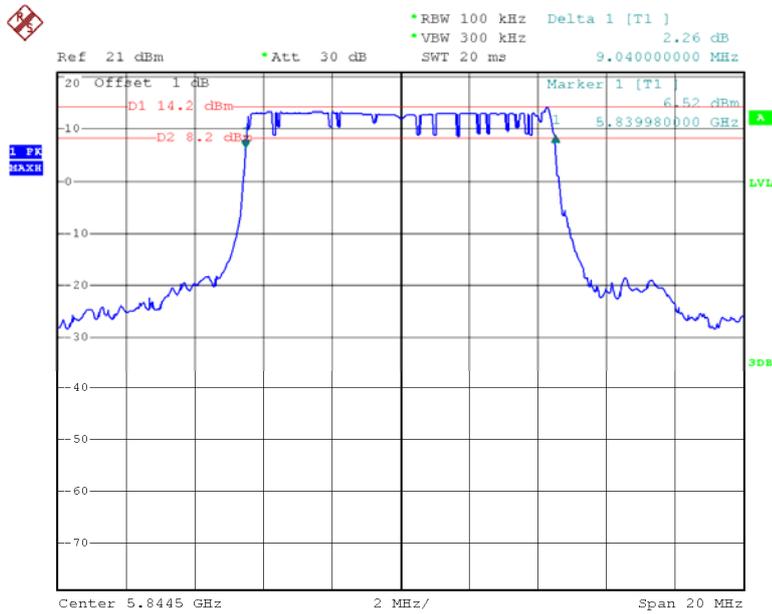


Date: 5.SEP.2018 10:52:31

### 20M Low Channel

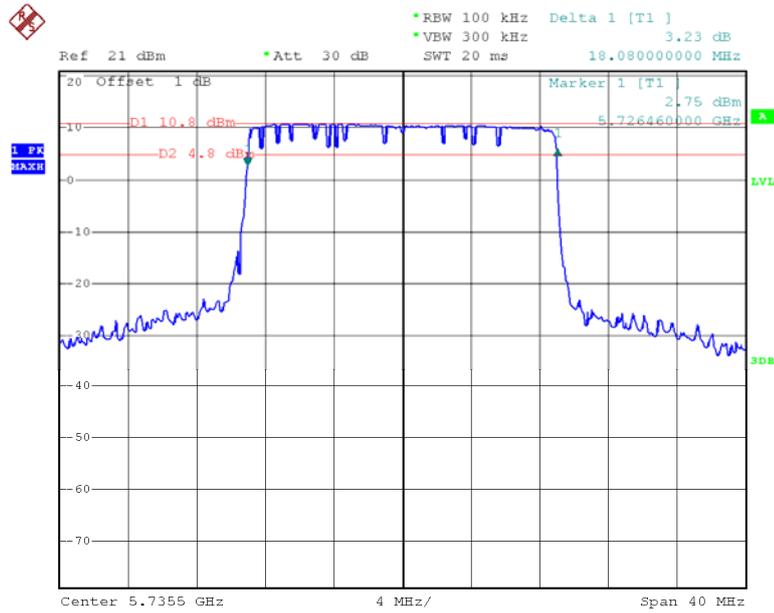


Date: 5.SEP.2018 10:50:14

### 20M Middle Channel

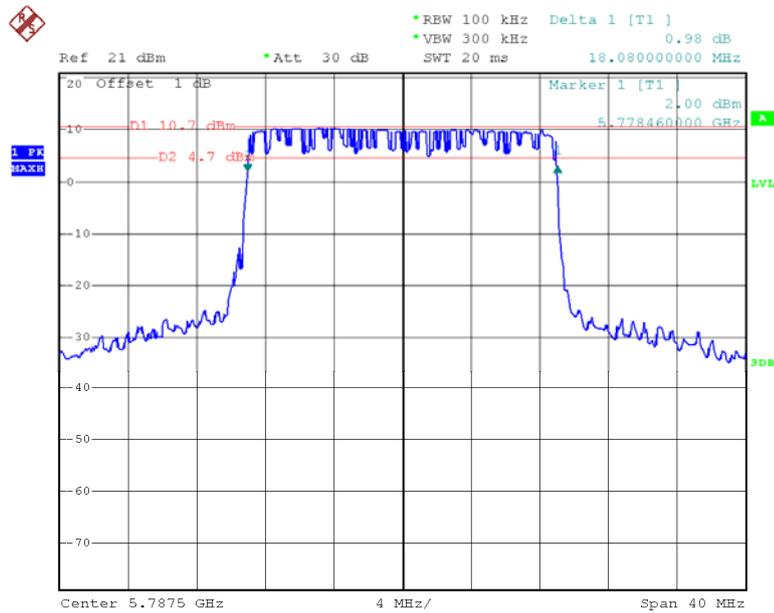

Date: 5.SEP.2018 10:51:02


### 20M High Channel

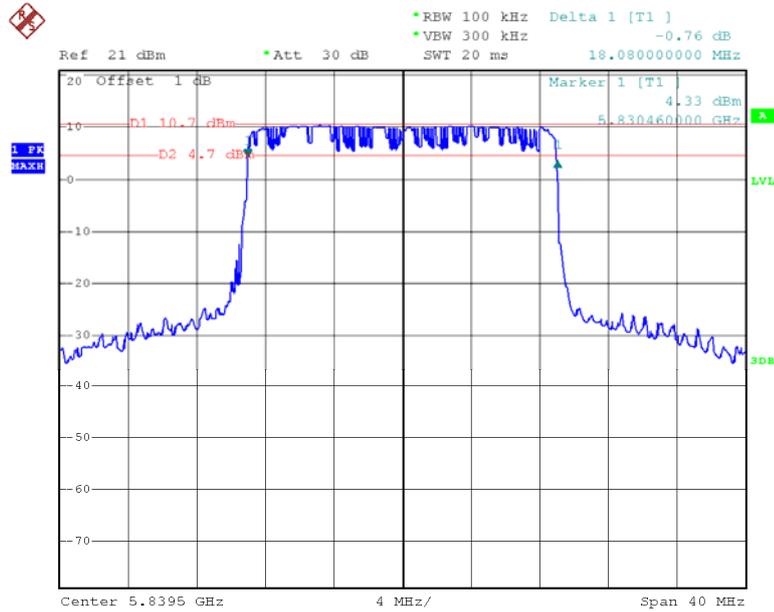

Date: 5.SEP.2018 10:51:36


### 5725-5850MHz:

### 802.11a Low Channel

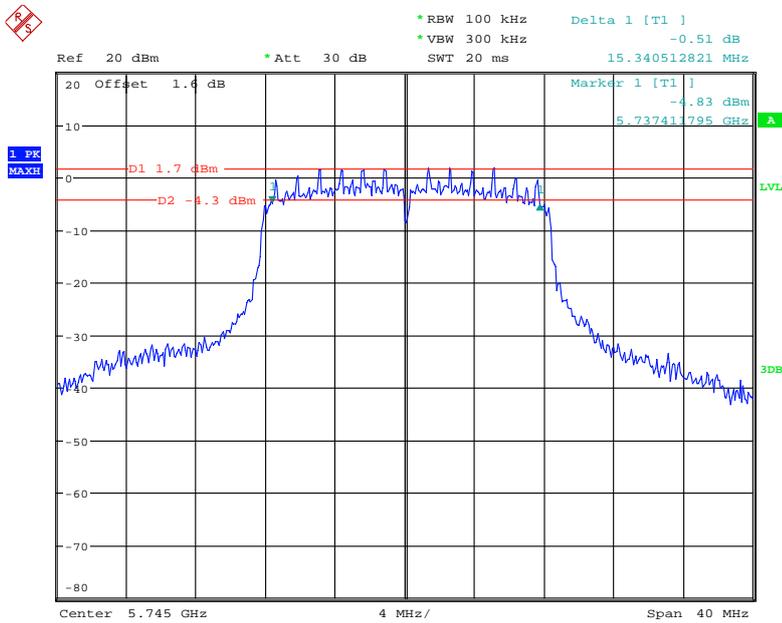


Date: 4.SEP.2018 14:34:22

### 802.11a Middle Channel

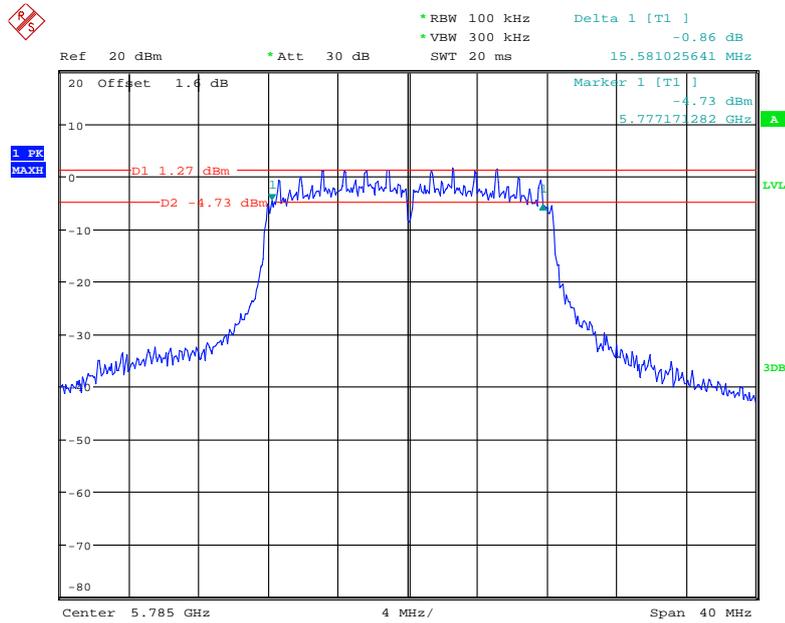


Date: 4.SEP.2018 14:35:26

### 802.11a High Channel

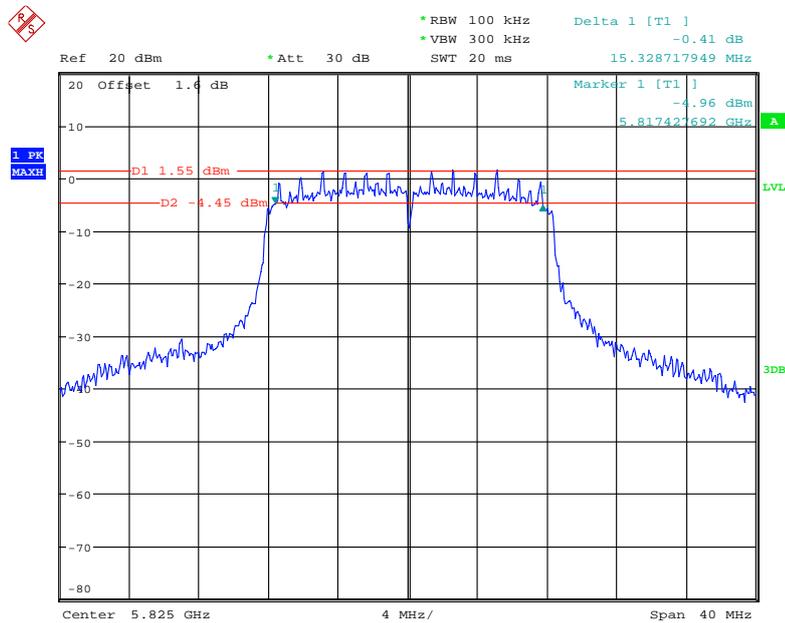


Date: 4.SEP.2018 14:36:44

### 802.11n ht20 Low Channel

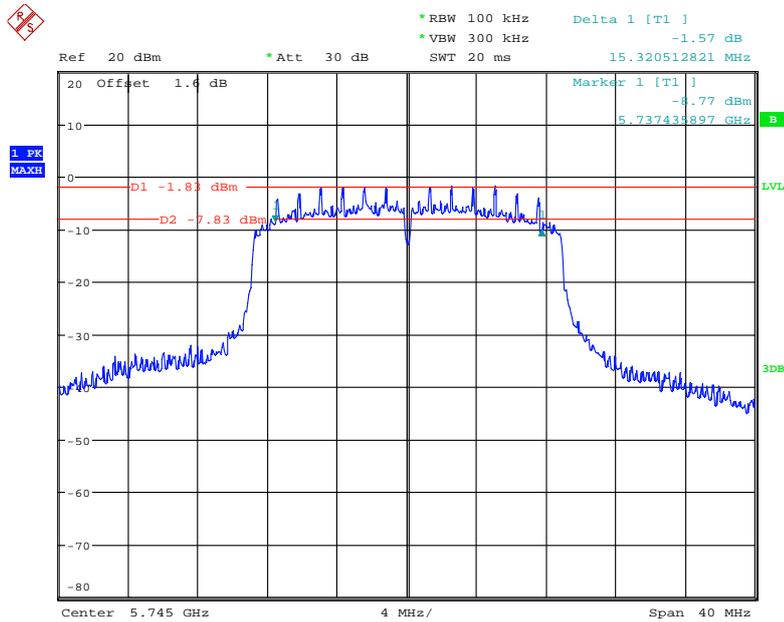


Date: 17.SEP.2018 16:36:56

### 802.11n ht20 Middle Channel

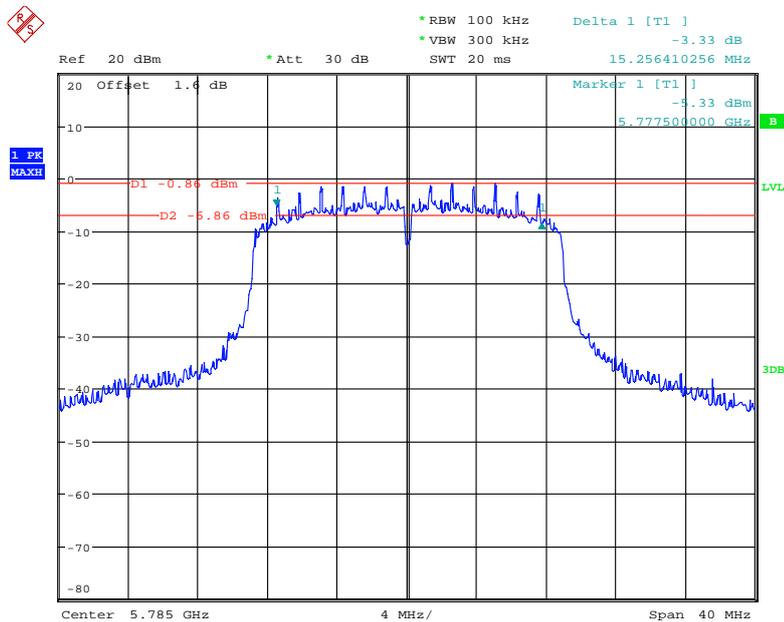


Date: 17.SEP.2018 16:41:47

### 802.11n ht20 High Channel

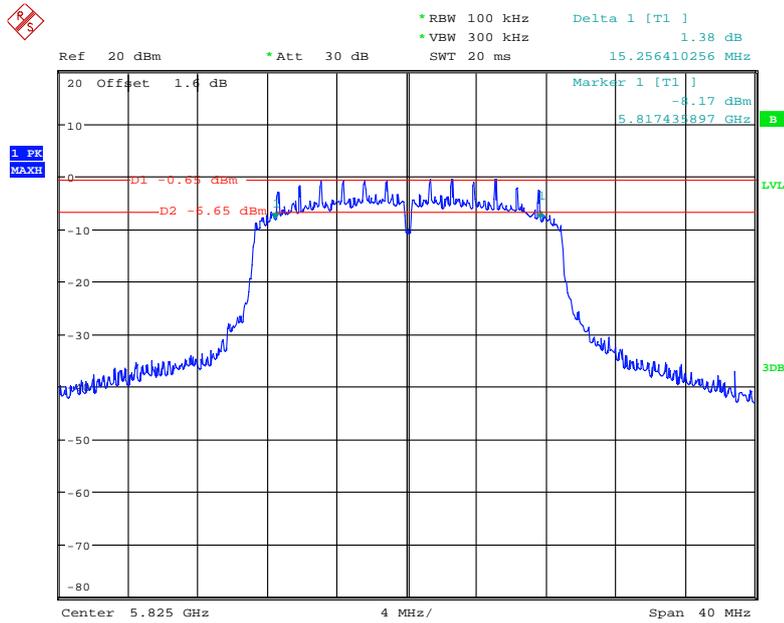


Date: 17.SEP.2018 16:40:44

### 802.11n ht40 Low Channel

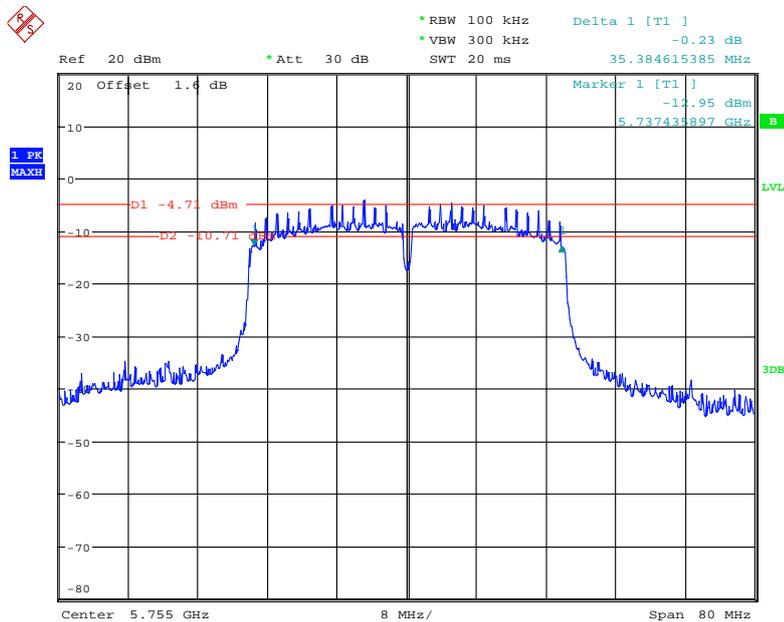


Date: 17.SEP.2018 16:44:31

### 802.11n ht40 High Channel

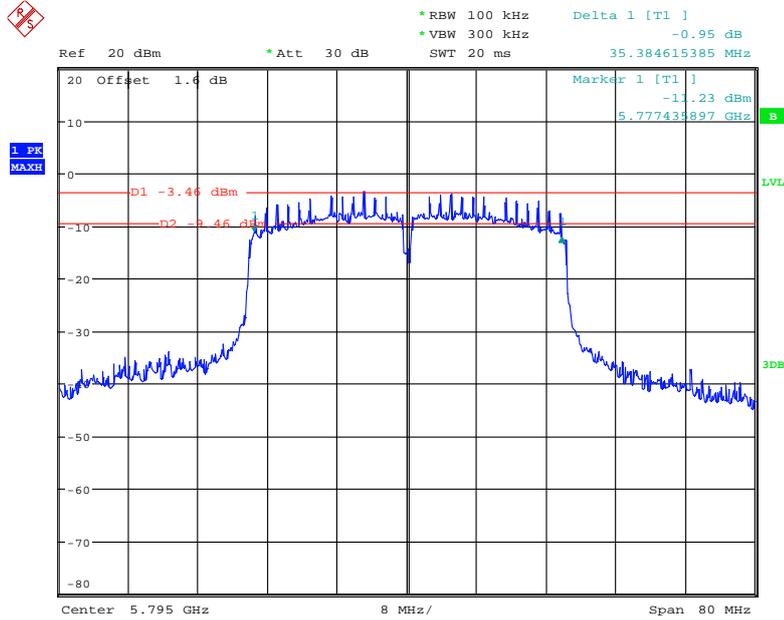

Date: 17.SEP.2018 16:45:12


### 802.11ac80 Middle Channel

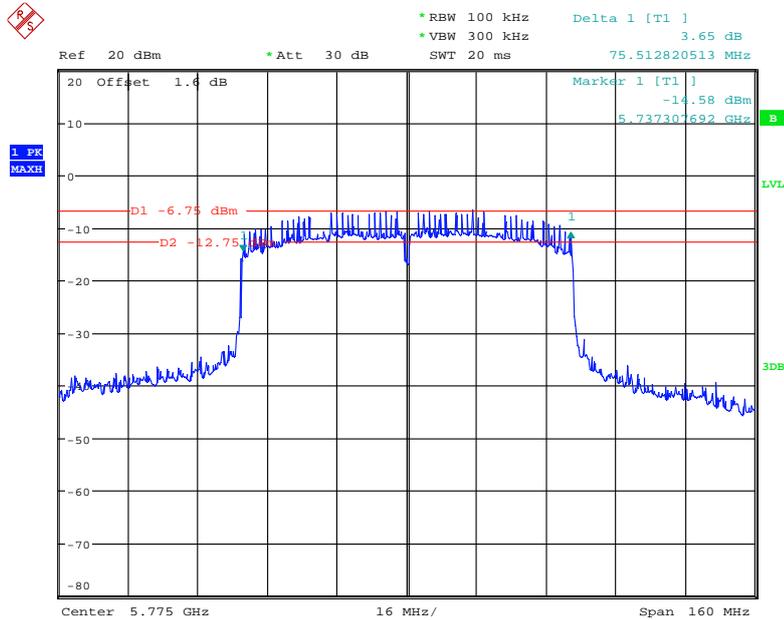

Date: 17.SEP.2018 16:45:56


**99% Occupied Bandwidth:**

**1.4M Low Channel**

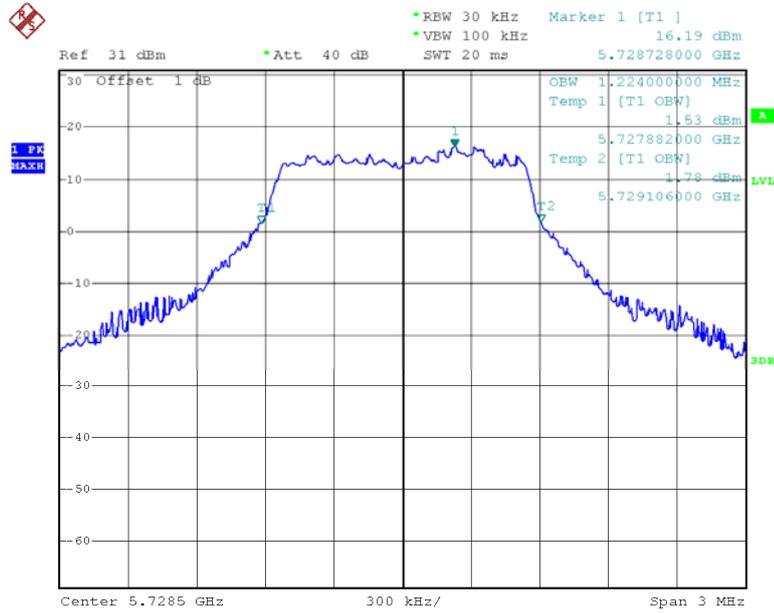


Date: 5.SEP.2018 10:03:29

**1.4M Middle Channel**

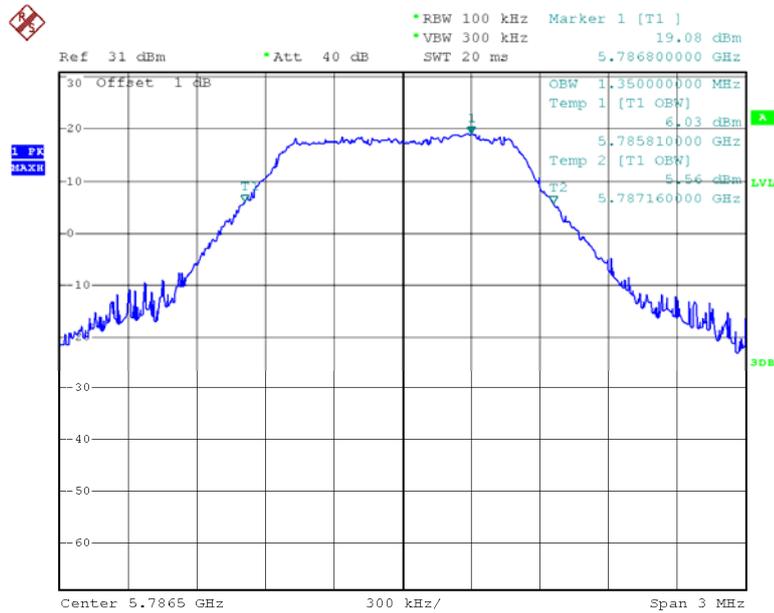


Date: 17.SEP.2018 11:13:00

### 1.4M High Channel

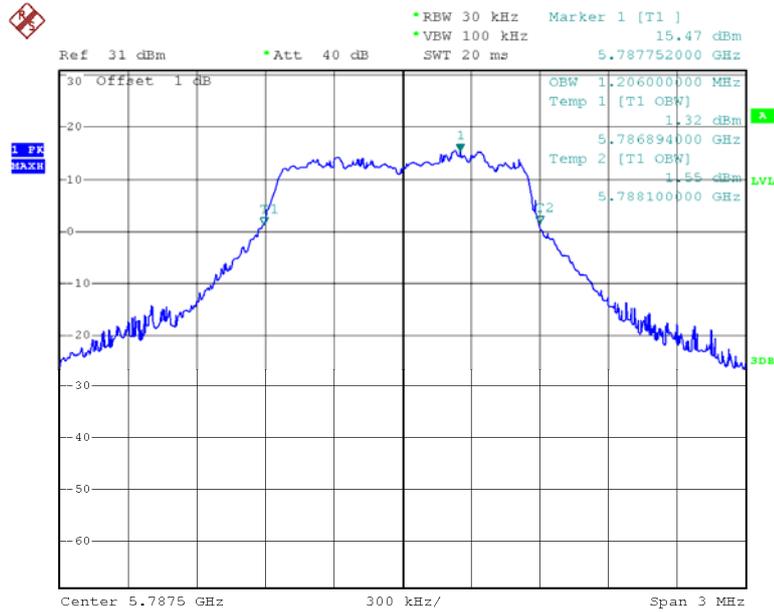


Date: 5.SEP.2018 10:02:21

### 10M Low Channel

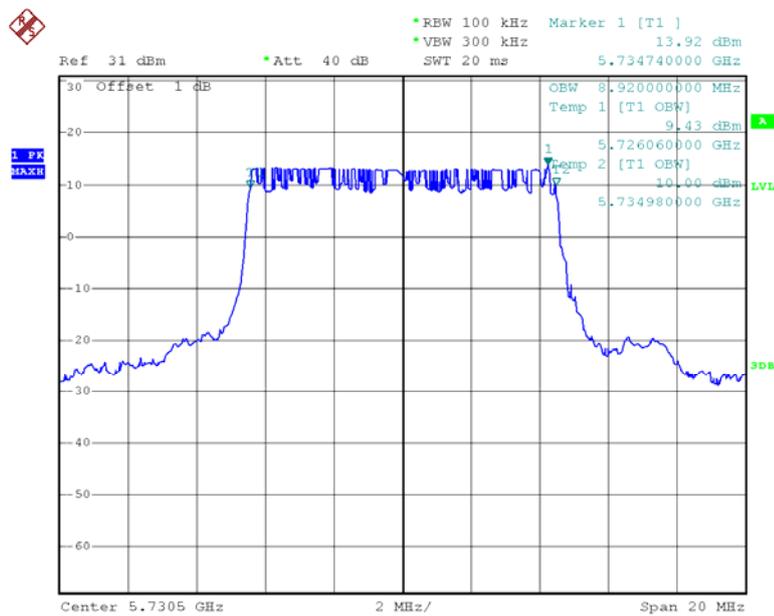


Date: 5.SEP.2018 10:45:21

### 10M Middle Channel

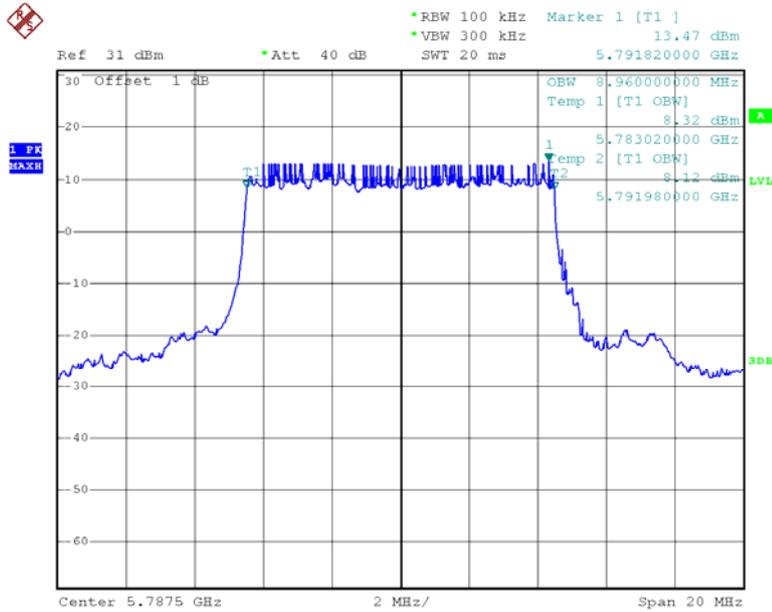


Date: 5.SEP.2018 10:45:44

### 10M High Channel

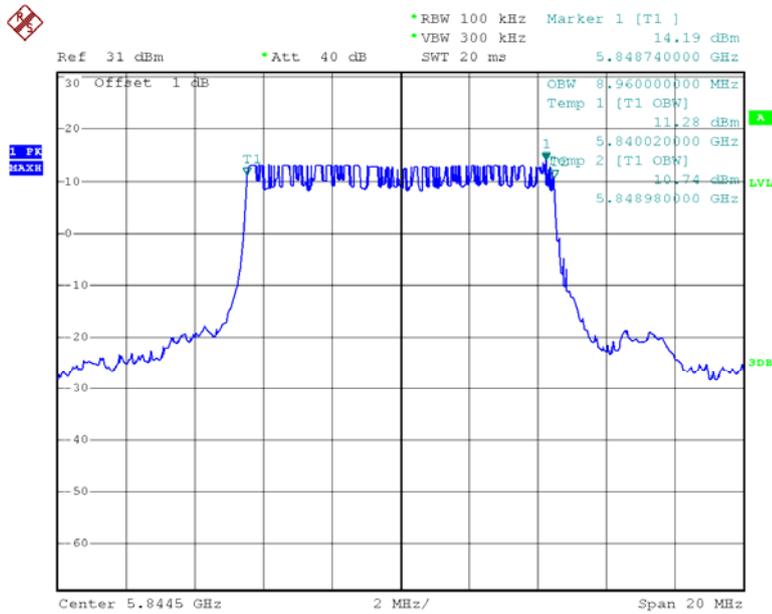


Date: 5.SEP.2018 10:46:09

### 20M Low Channel

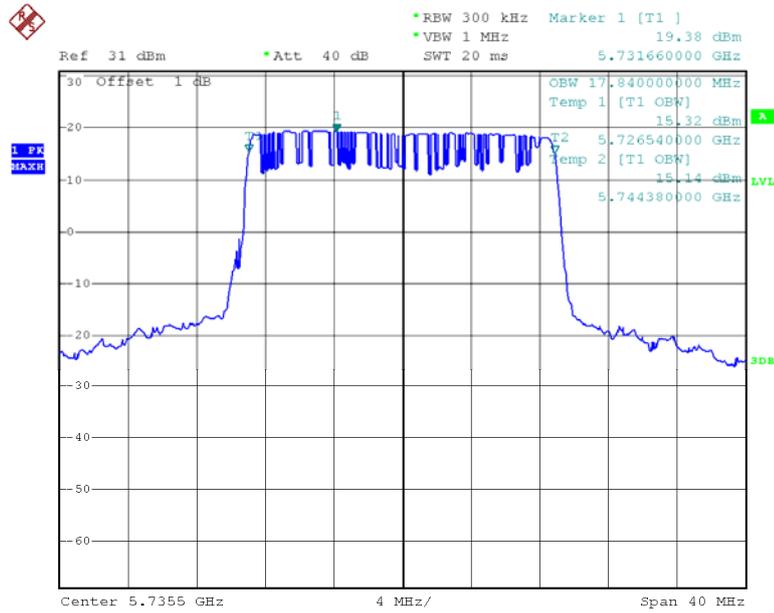


Date: 5.SEP.2018 10:47:51

### 20M Middle Channel

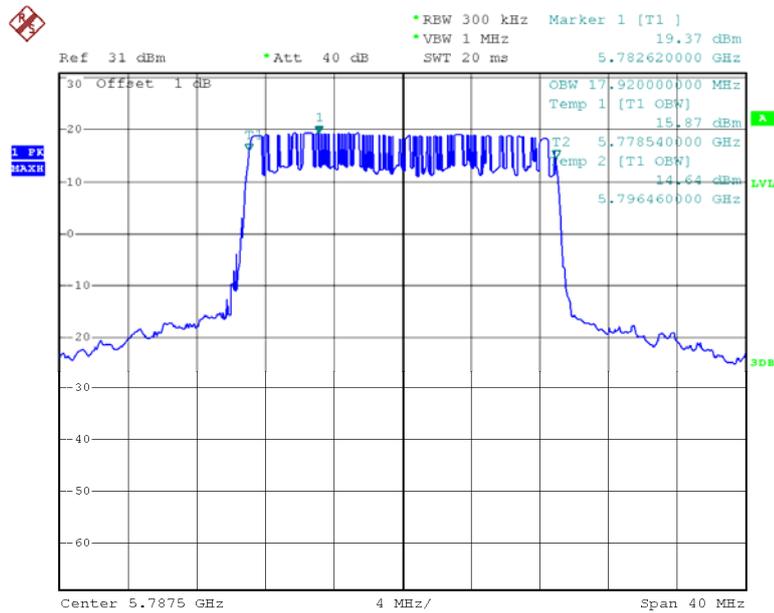

Date: 5.SEP.2018 10:47:19


### 20M High Channel

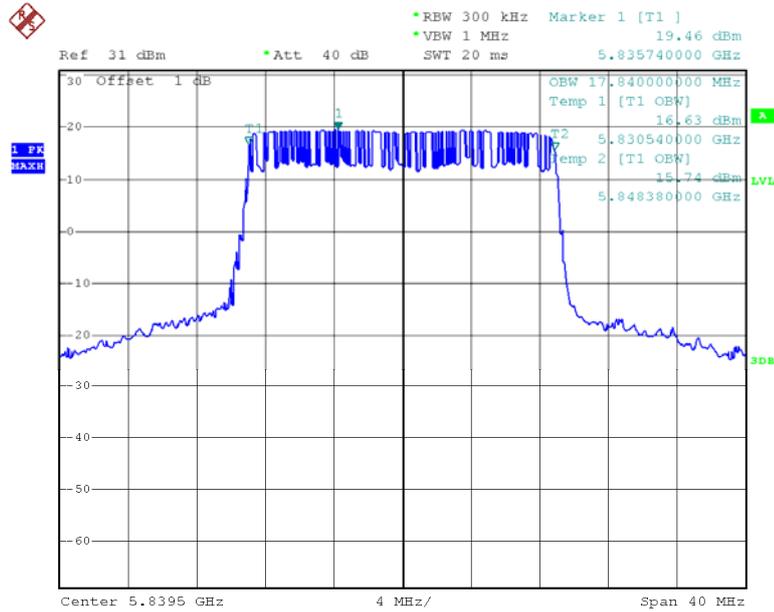

Date: 5.SEP.2018 10:46:55


### 5150-5250MHz:

### 802.11a Low Channel

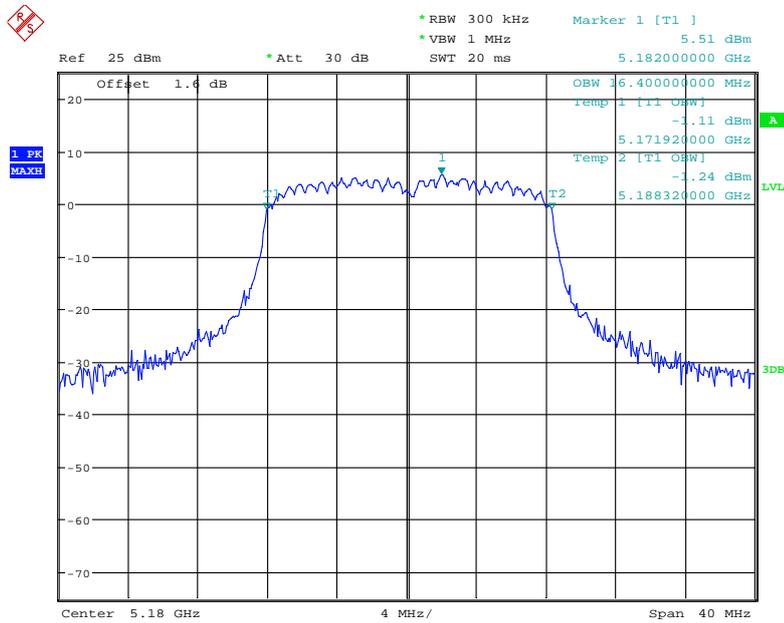


Date: 4.SEP.2018 10:50:44

### 802.11a Middle Channel

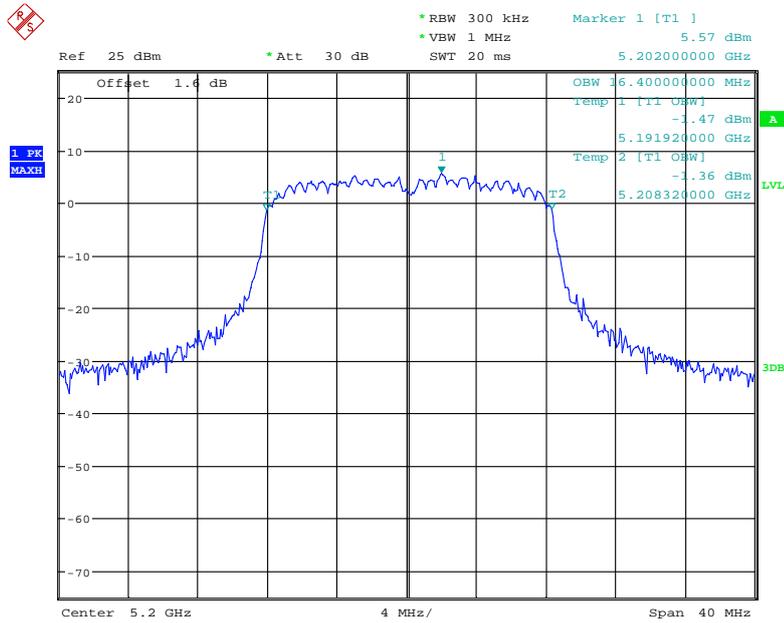


Date: 4.SEP.2018 10:57:33

### 802.11a High Channel

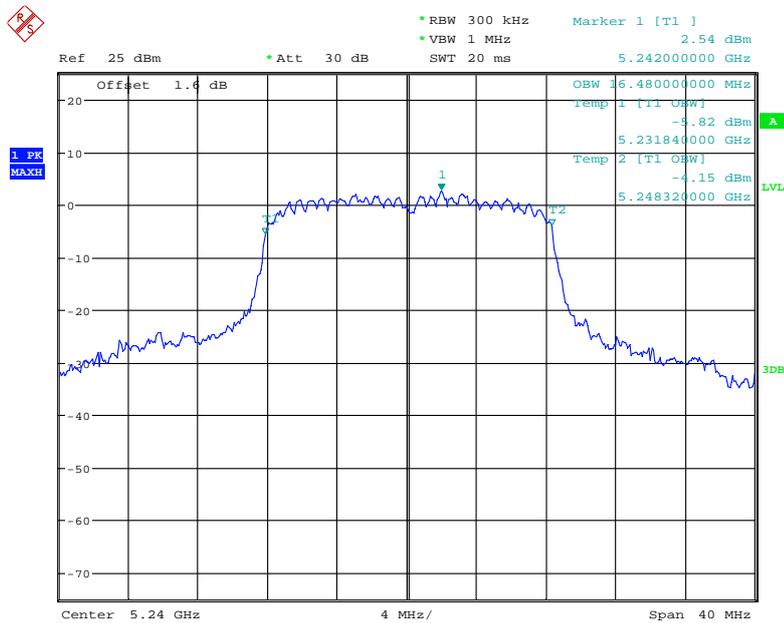


Date: 4.SEP.2018 11:55:01

### 802.11n ht20 Low Channel

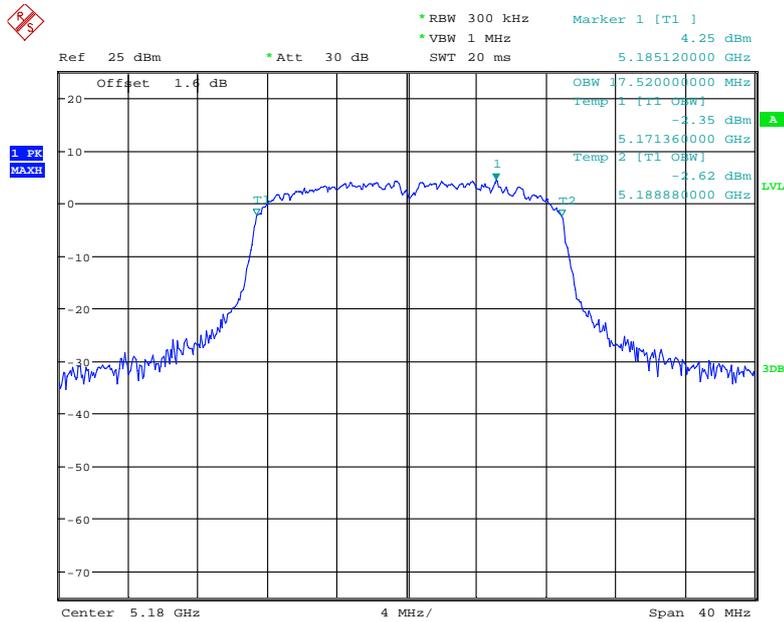


Date: 4.SEP.2018 11:00:41

### 802.11n ht20 Middle Channel

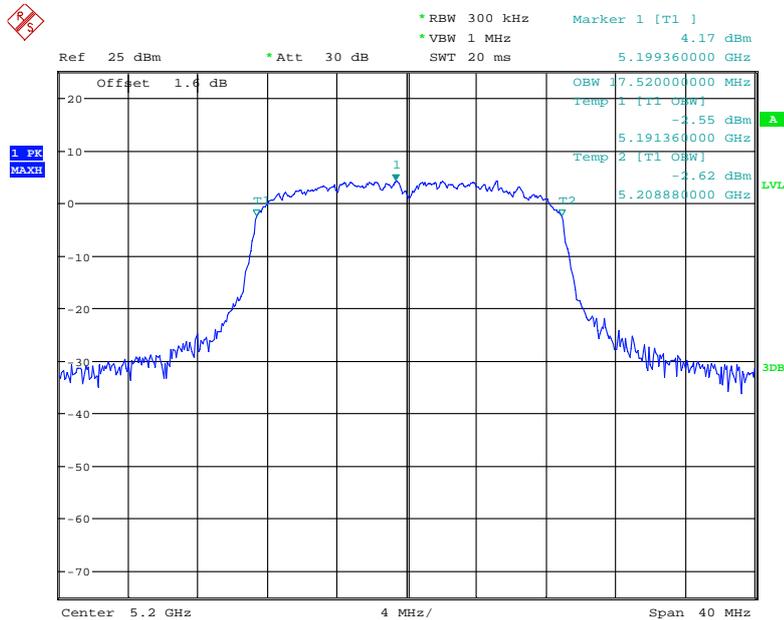


Date: 4.SEP.2018 11:03:32

### 802.11n ht20 High Channel

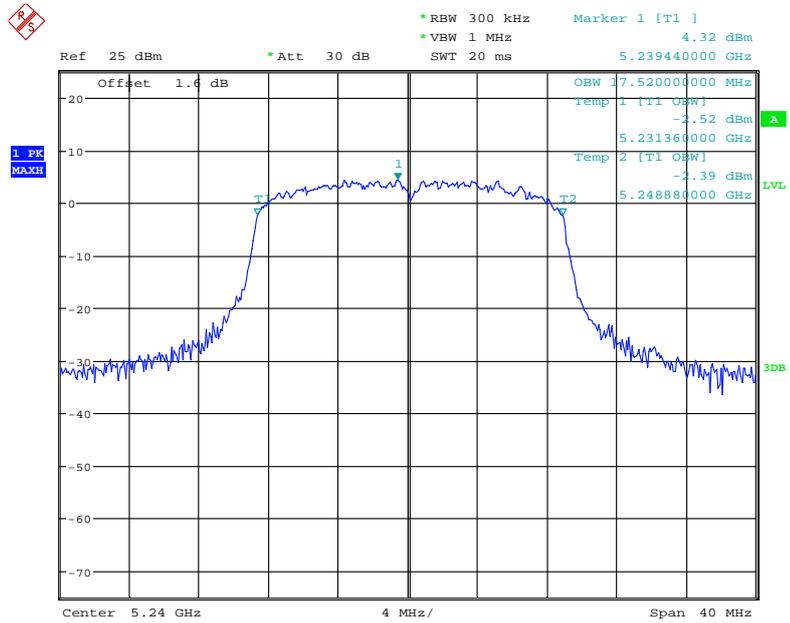


Date: 4.SEP.2018 11:06:28

### 802.11n ht40 Low Channel

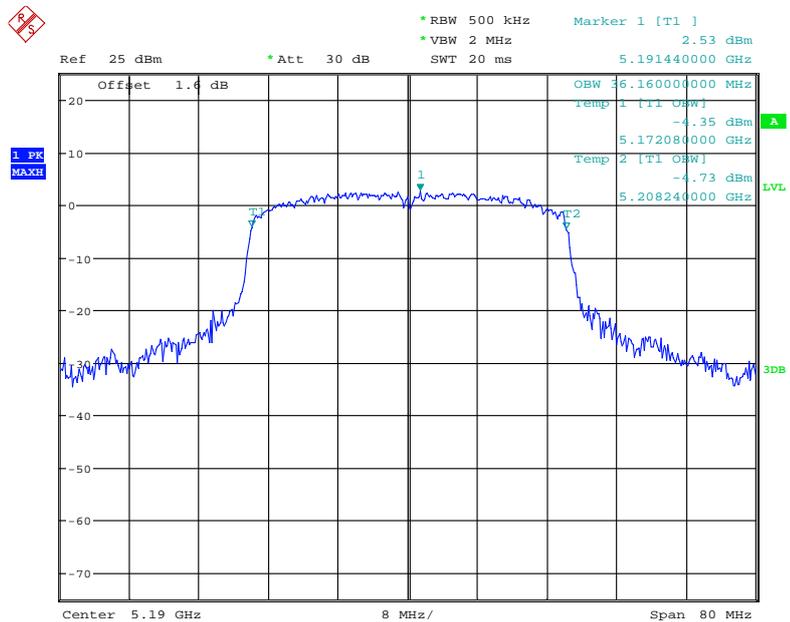


Date: 4.SEP.2018 11:09:32

### 802.11n ht40 High Channel

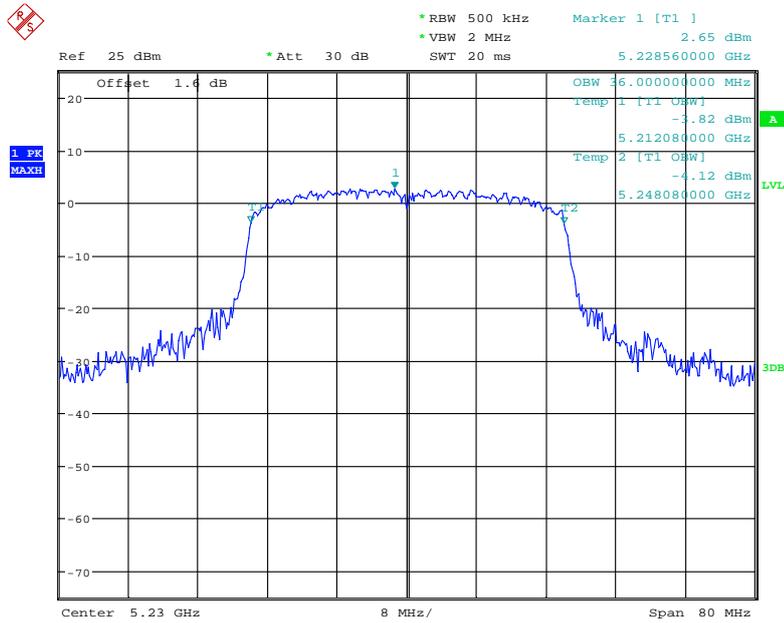

Date: 4.SEP.2018 11:12:26


### 802.11ac80 Middle Channel

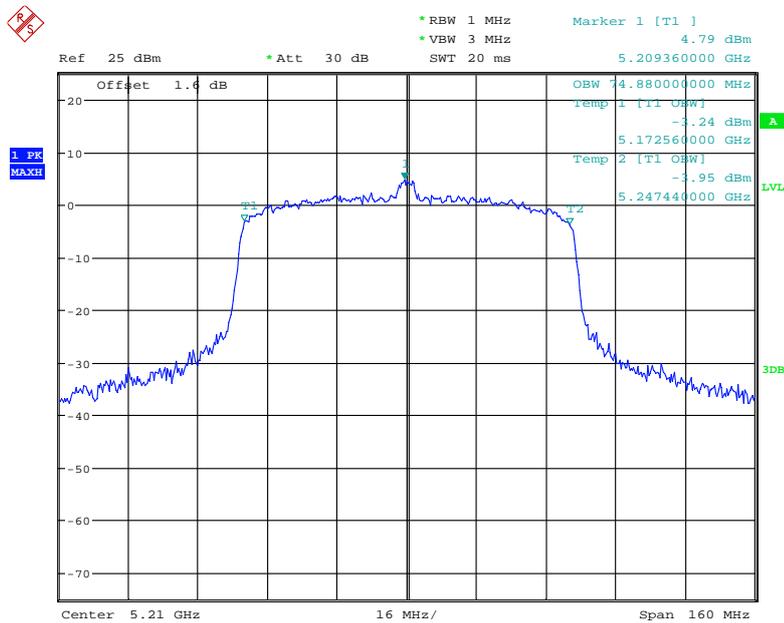

Date: 4.SEP.2018 11:15:29


5725-5850MHz:

802.11a Low Channel

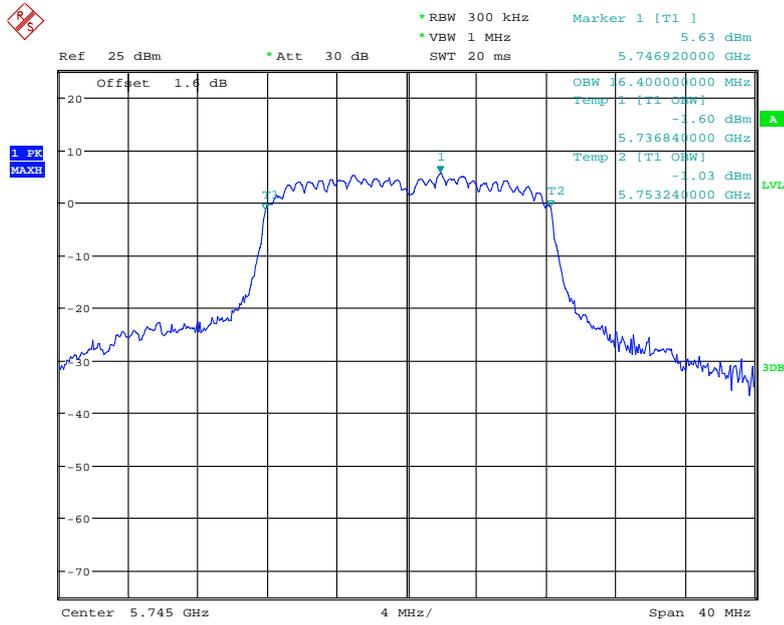

Date: 4.SEP.2018 09:16:21


802.11a Middle Channel

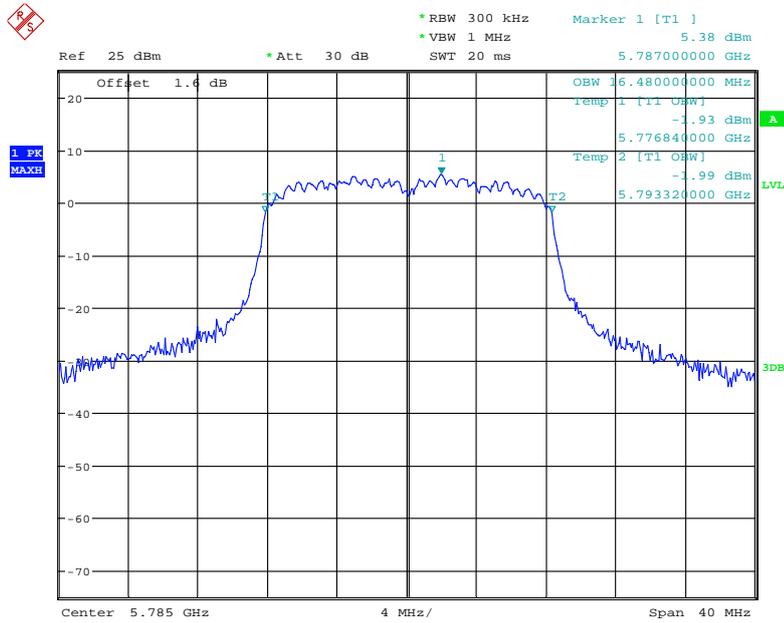

Date: 4.SEP.2018 09:20:51




### 802.11n ht20 Middle Channel

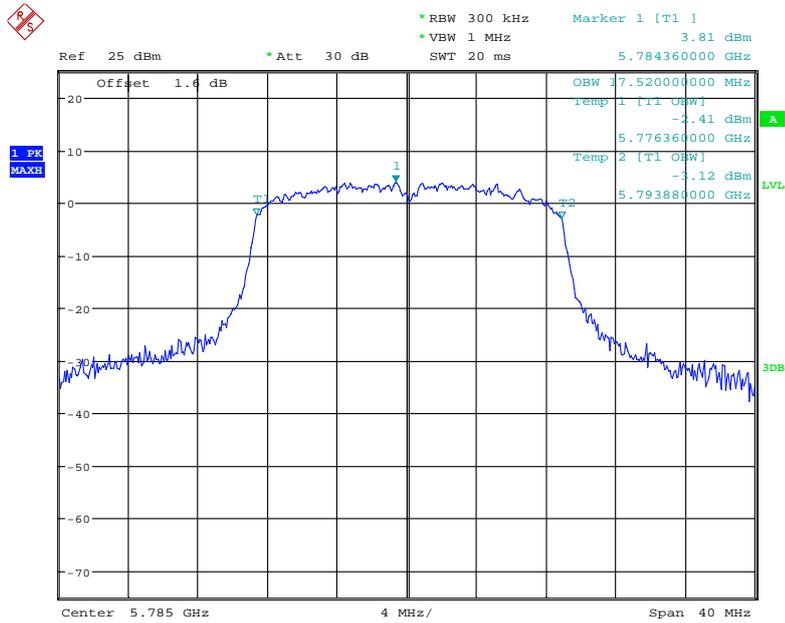


Date: 4.SEP.2018 09:34:09

### 802.11n ht20 High Channel

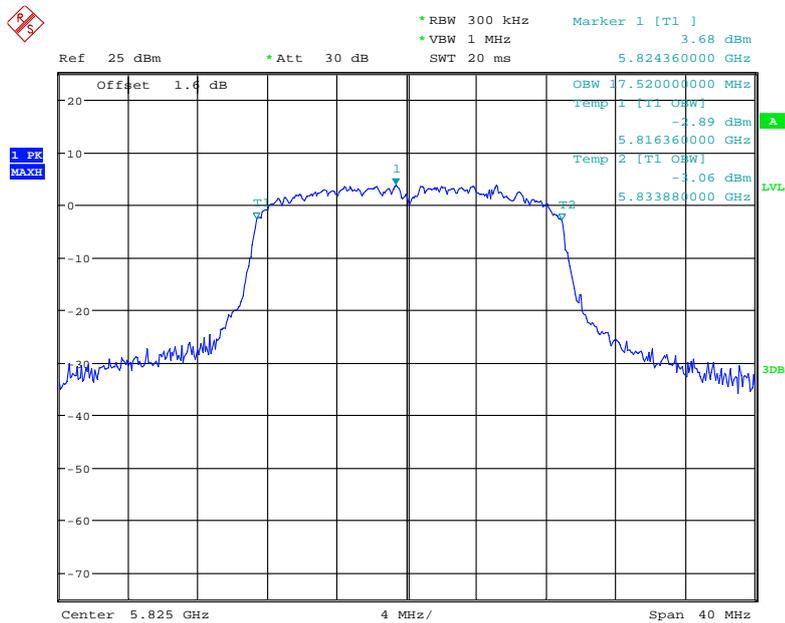


Date: 4.SEP.2018 09:37:32

### 802.11n ht40 Low Channel

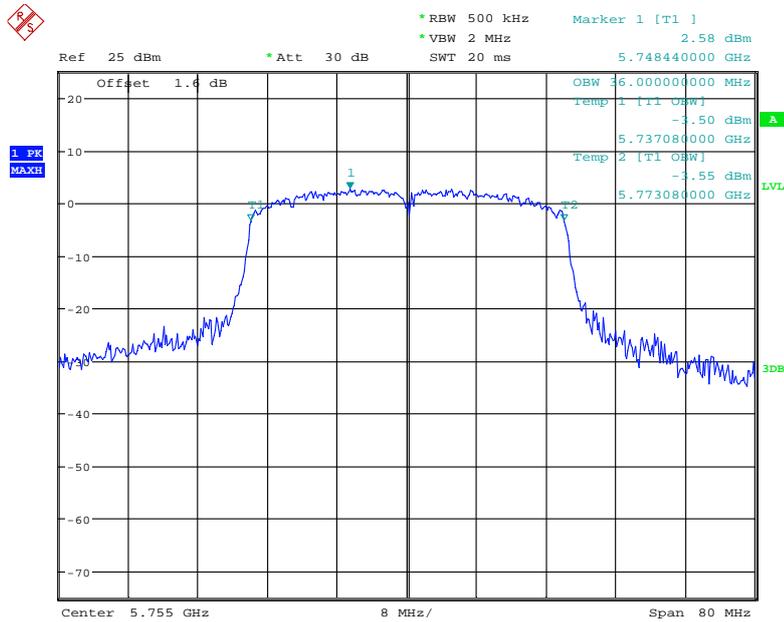


Date: 4.SEP.2018 09:40:45

### 802.11n ht40 High Channel

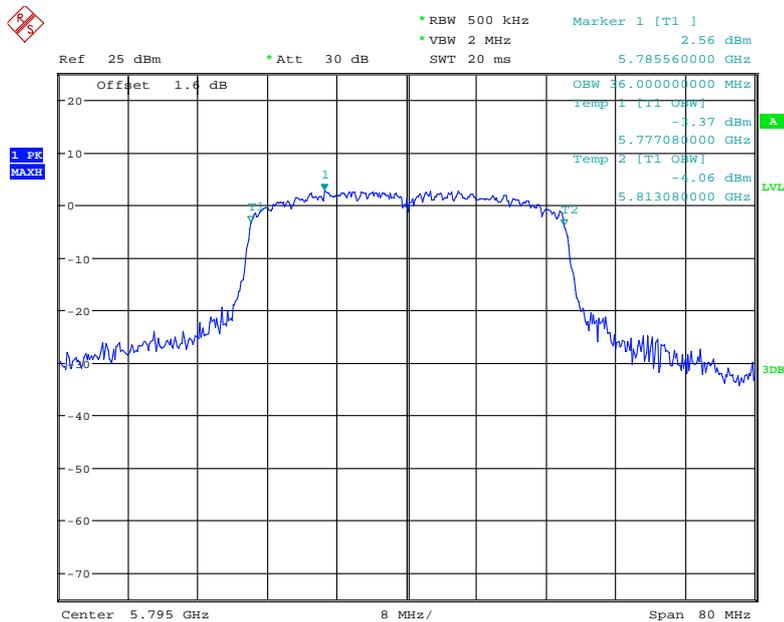

Date: 4.SEP.2018 09:43:53


### 802.11ac80 Middle Channel

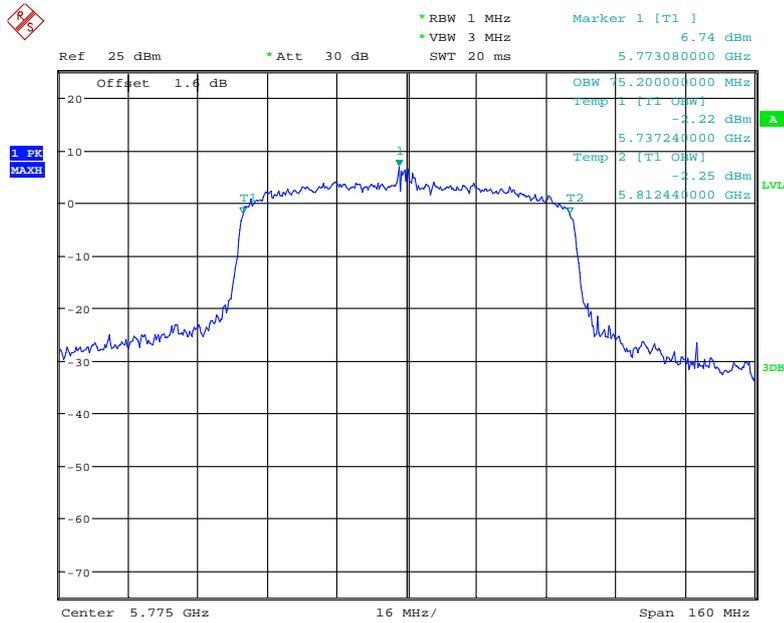

Date: 4.SEP.2018 09:47:23


**26dB Minimum Emission Bandwidth:  
5150-5250MHz:**

### 802.11a Low Channel

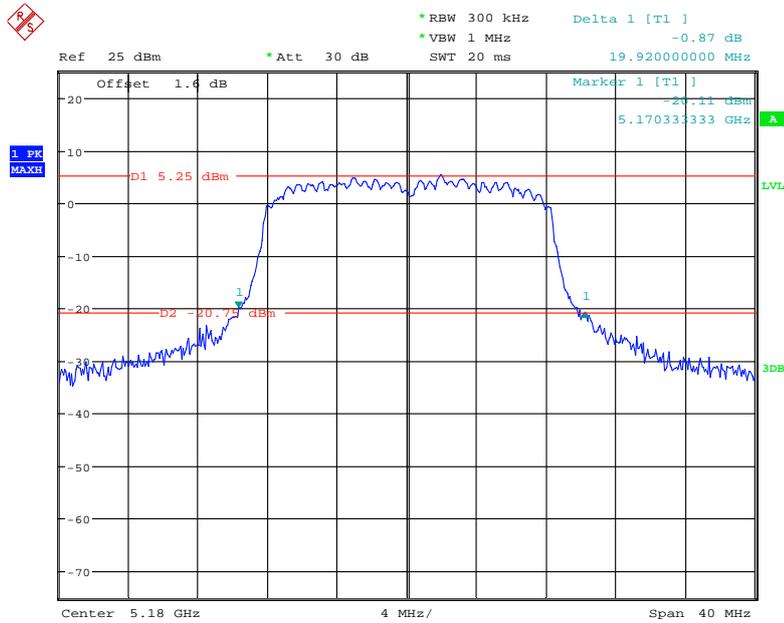


Date: 4.SEP.2018 14:21:44

### 802.11a Middle Channel

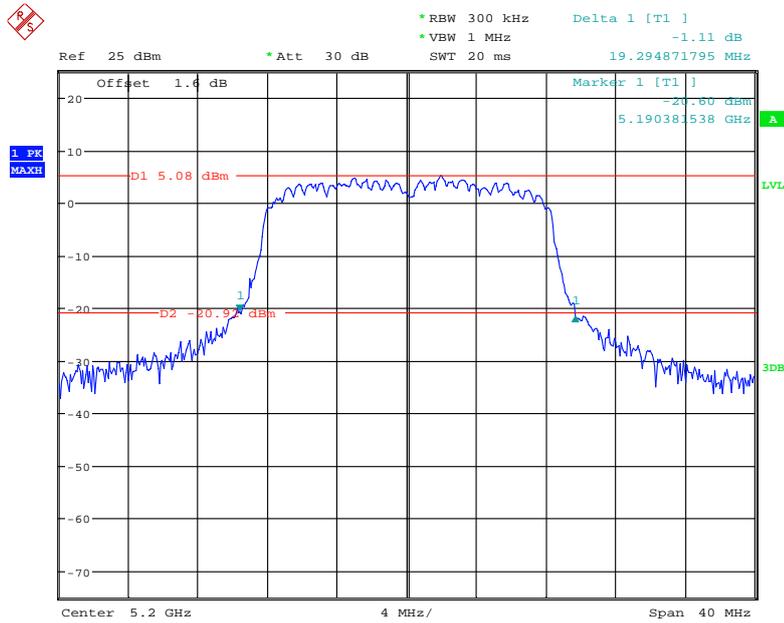


Date: 4.SEP.2018 14:22:23

### 802.11a High Channel

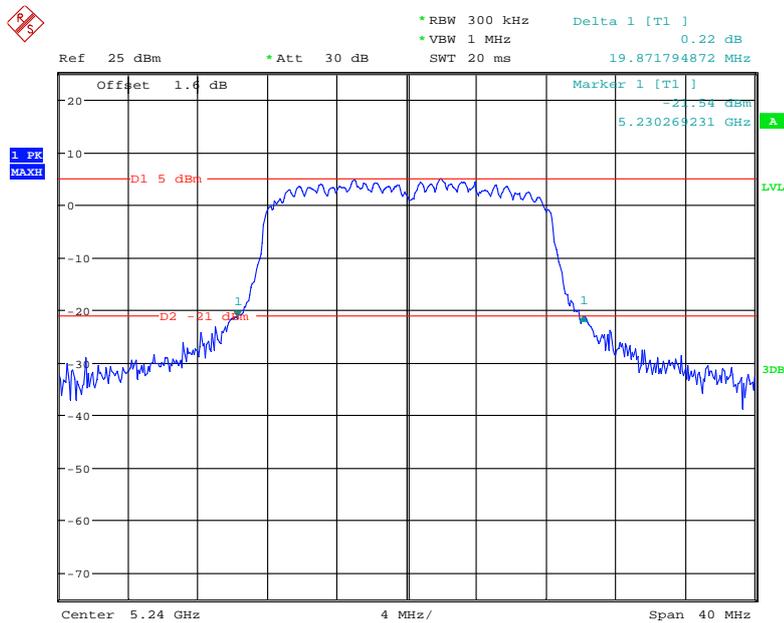


Date: 4.SEP.2018 14:23:58

### 802.11n ht20 Low Channel

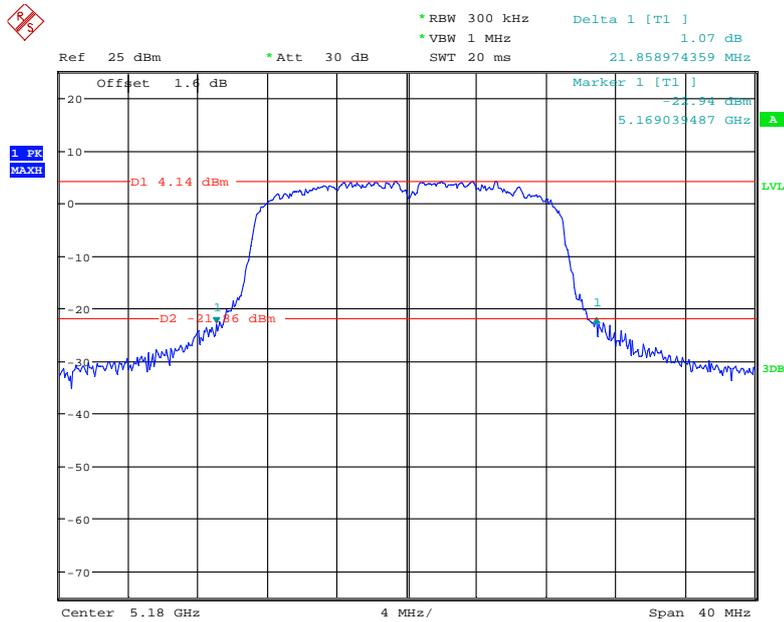


Date: 4.SEP.2018 14:58:01

### 802.11n ht20 Middle Channel

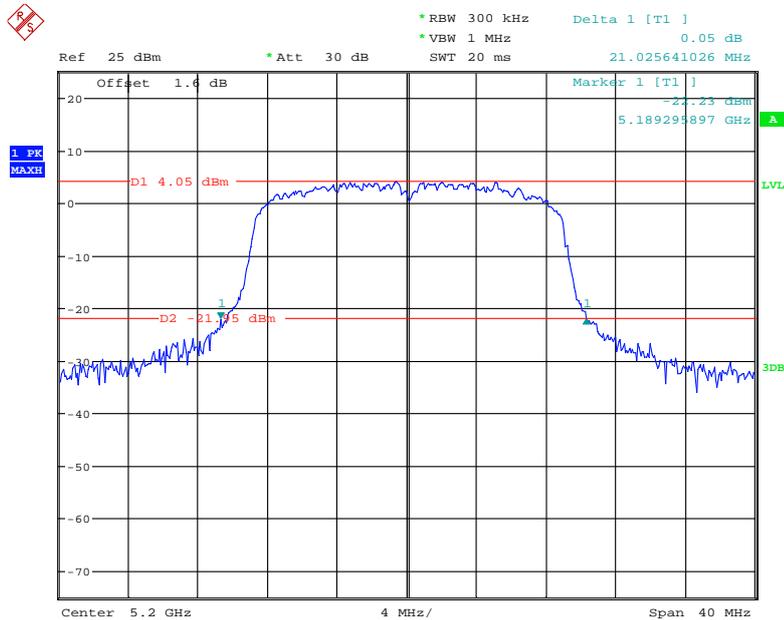


Date: 4.SEP.2018 14:58:39

### 802.11n ht20 High Channel

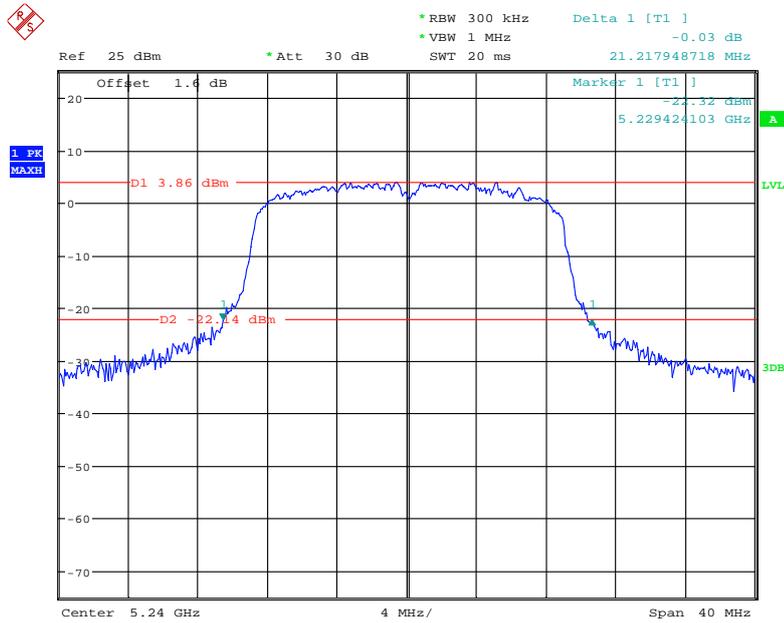


Date: 4.SEP.2018 15:01:14

### 802.11n ht40 Low Channel

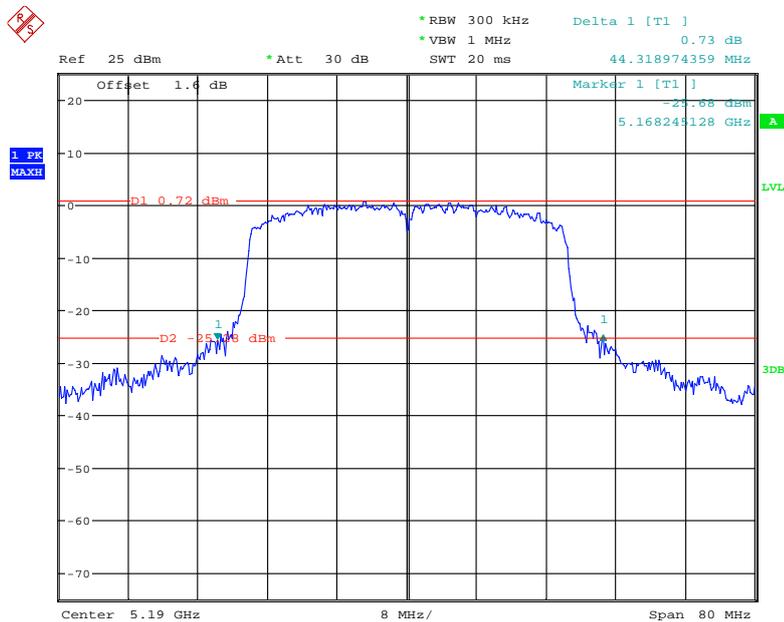


Date: 4.SEP.2018 14:52:04

### 802.11n ht40 High Channel

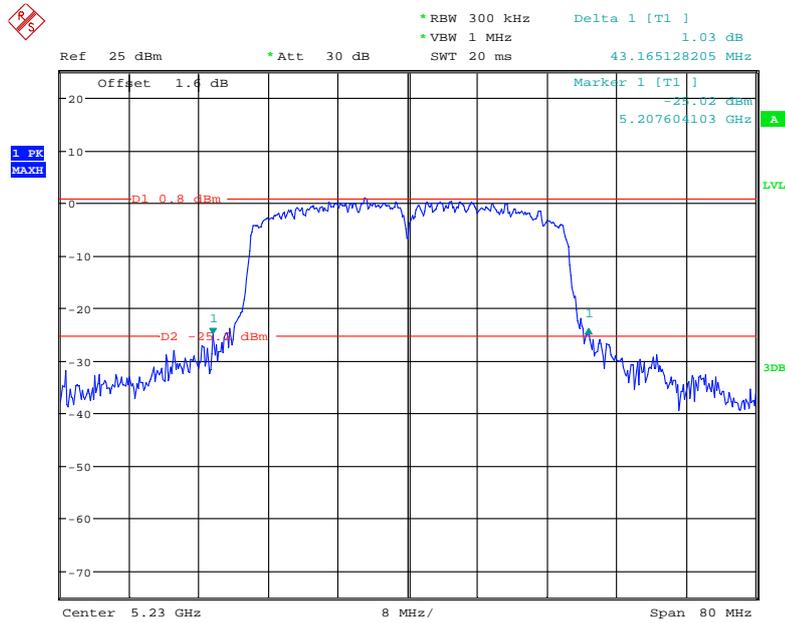

Date: 4.SEP.2018 14:53:14

### 802.11ac80 Middle Channel

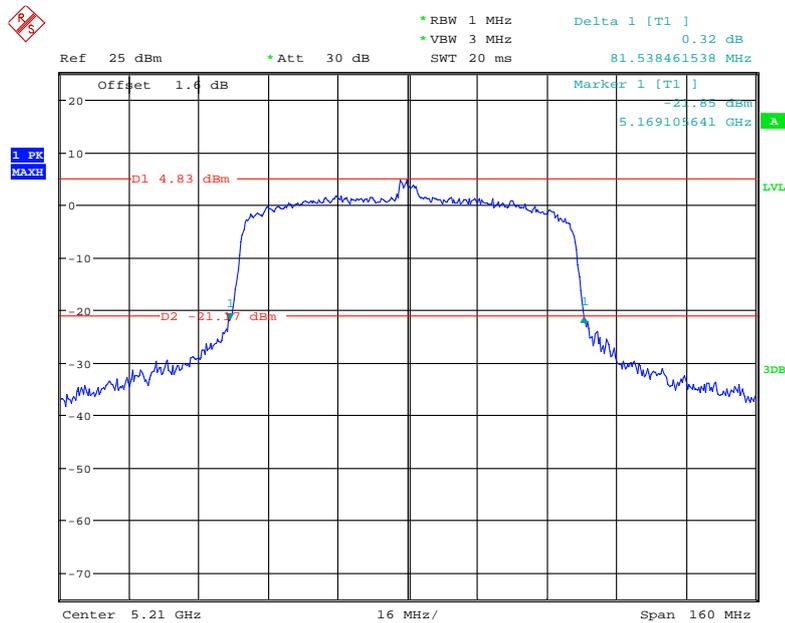

Date: 4.SEP.2018 15:05:42

## **FCC §15.407(a) & RSS-247 §6.2 –MAXIMUM CONDUCTED OUTPUT POWER**

---

### **Applicable Standard**

According to FCC §15.407(a)

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(4) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

According to RSS-247 §6.2:

### **Frequency band 5150-5250 MHz**

#### **6.2.1.1 Power limits**

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or  $1.76 + 10 \log_{10}B$ , dBm, whichever is less stringent. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or  $10 + 10 \log_{10}B$ , dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

### **Frequency band 5250-5350 MHz**

#### **6.2.2.1 Power limits**

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or  $1.76 + 10 \log_{10}B$ , dBm, whichever is less. Devices shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

Devices, other than devices installed in vehicles, shall comply with the following:

- a) The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10}B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;
- b) The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10}B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

## Frequency bands 5470-5600 MHz and 5650-5725 MHz

### 6.2.3.1 Power limits

The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10}B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10}B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

## Frequency band 5725-5850 MHz

### 6.2.4.1 Power limits

For equipment operating in the band 5725-5850 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint<sup>3</sup> systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
R&S	Spectrum Analyzer	FSP 38	100478	2017-12-08	2018-12-08
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	27.9~29.1°C
<b>Relative Humidity:</b>	49~62 %
<b>ATM Pressure:</b>	100.4~100.5kPa

*The testing was performed by Nami Quan, Kami Zhou from 2018-09-04 to 2018-09-10.*

*Test Mode: Transmitting*

SDR Modes:

<b>Mode</b>	<b>Frequency (MHz)</b>	<b>Maximum Conducted Average Output Power (dBm)</b>	<b>Limit (dBm)</b>
1.4MHz	5728.5	21.86	30
	5786.5	21.53	30
	5846.5	21.69	30
10MHz	5730.5	21.44	30
	5787.5	21.57	30
	5844.5	21.09	30
20MHz	5735.5	21.20	30
	5787.5	21.31	30
	5839.5	21.58	30

**802.11a/n/ac mode:**

5150-5250MHz

Mode	Frequency (MHz)	Maximum Conducted Average Output Power (dBm)				EIRP (dBm)	ISED EIRP Limits (dBm)
		Chain 0	Chain 1	Total	FCC Limits		
802.11 a	5180	12.61	12.53	15.58	24	18.38	22.15
	5200	12.39	12.69	15.55	24	18.35	22.15
	5240	12.66	12.23	15.46	24	18.26	22.17
802.11n ht20	5180	12.36	12.47	15.43	24	18.23	22.44
	5200	12.22	12.43	15.34	24	18.14	22.44
	5240	12.50	12.16	15.34	24	18.14	22.44
802.11n ht40	5190	11.30	11.33	14.33	24	17.13	23.00
	5230	11.63	11.63	14.64	24	17.44	23.00
802.11 ac80	5210	9.82	9.51	12.68	24	15.48	23.00

5725-5850MHz:

Mode	Frequency (MHz)	Maximum Conducted Average Output Power (dBm)			Limit (dBm)
		Chain 0	Chain 1	Total	
802.11 a	5745	12.97	12.95	15.97	30
	5785	12.89	12.88	15.90	30
	5825	12.68	12.69	15.70	30
802.11n ht20	5745	12.88	12.70	15.80	30
	5785	12.74	12.69	15.73	30
	5825	12.69	12.40	15.56	30
802.11n ht40	5755	12.50	12.18	15.35	30
	5795	12.56	12.37	15.48	30
802.11 ac80	5775	12.78	12.35	15.58	30

Note:

The device is a client device.

The duty cycle factor has been calculated into the result.

The 2 antenna maximum antenna gains are 2.8dBi@5.2GHz band, and 5.0dBi @ 5.8GHz band, and employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

$$\text{Array Gain} = 0 \text{ dB (i.e., no array gain) for } N_{\text{ANT}} \leq 4;$$

So:

$$\text{Directional gain} = G_{\text{ANT}} + \text{Array Gain} = 2.8\text{dBi}@5.2\text{GHz band, } 5.0\text{dBi @ } 5.8\text{GHz band}$$

## **FCC §15.407(a)& RSS-247 §6.2- POWER SPECTRAL DENSITY**

### **Applicable Standard**

According to FCC §15.407(a)

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output

power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

According to RSS-247 §6.2:

### **Frequency band 5150-5250 MHz**

#### **6.2.1.1 Power limits**

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or  $1.76 + 10 \log_{10}B$ , dBm, whichever is less stringent. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or  $10 + 10 \log_{10}B$ , dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

### **Frequency band 5250-5350 MHz**

#### **6.2.2.1 Power limits**

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or  $1.76 + 10 \log_{10}B$ , dBm, whichever is less. Devices shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

Devices, other than devices installed in vehicles, shall comply with the following:

- a) The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10}B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;
- b) The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10}B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

## Frequency bands 5470-5600 MHz and 5650-5725 MHz

### 6.2.3.1 Power limits

The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10}B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10}B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

## Frequency band 5725-5850 MHz

### 6.2.4.1 Power limits

For equipment operating in the band 5725-5850 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint<sup>3</sup> systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

## Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
R&S	Spectrum Analyzer	FSP 38	100478	2017-12-08	2018-12-08
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data**

**Environmental Conditions**

<b>Temperature:</b>	29.1~29.3°C
<b>Relative Humidity:</b>	60~62 %
<b>ATM Pressure:</b>	100.4~100.5kPa

The testing was performed by Nami Quan, Kami Zhou from 2018-09-04 to 2018-09-05.

**Test Result: Compliance.**

Test Mode: Transmitting

SDR modes:

Mode	Frequency (MHz)	Reading (dBm/300kHz)	PSD (dBm/500kHz)	Limit (dBm/500kHz)
1.4MHz	5728.5	19.15	21.37	30.0
	5786.5	18.04	20.26	30.0
	5846.5	19.26	21.48	30.0
10MHz	5730.5	10.87	13.09	30.0
	5787.5	10.13	12.35	30.0
	5844.5	10.06	12.28	30.0
20MHz	5735.5	7.08	9.30	30.0
	5787.5	7.20	9.42	30.0
	5839.5	7.30	9.52	30.0

**802.11a/n/ac mode:**

5150-5250MHz:

Mode	Frequency (MHz)	Power Spectral Density (dBm/MHz)				EIRP PSD (dBm/MHz)	EIRP PSD Limit For ISED (dBm/MHz)
		Chain 0	Chain 1	Total	FCC Limits		
802.11 a	5180	2.17	1.52	5.17	11	7.97	10
	5200	2.03	1.50	5.08	11	7.88	10
	5240	1.87	1.42	4.96	11	7.76	10
802.11n ht20	5180	1.98	1.54	4.99	11	7.79	10
	5200	2.03	1.62	5.05	11	7.85	10
	5240	1.67	1.33	4.72	11	7.52	10
802.11n ht40	5190	-2.05	-2.88	0.99	11	3.79	10
	5230	-1.75	-2.20	1.46	11	4.26	10
802.11 ac80	5210	-6.48	-6.98	-2.25	11	0.55	10

5725-5850MHz

Mode	Frequency (MHz)	Reading (dBm/300KHz)		Power Spectral Density (dBm/500KHz)			Limit (dBm/500KHz)
		Chain 0	Chain 1	Chain 0	Chain 1	Total	
802.11a	5745	0.16	-0.64	2.38	1.58	5.31	30
	5785	-1.06	-0.72	1.16	1.50	4.64	
	5825	-1.20	-1.15	1.02	1.07	4.35	
802.11n ht20	5745	0.25	-0.03	2.47	2.19	5.55	
	5785	-0.45	-0.59	1.77	1.63	4.92	
	5825	-0.55	-0.64	1.67	1.58	4.84	
802.11n ht40	5755	-2.87	-3.45	-0.65	-1.23	2.5	
	5795	-4.24	-3.90	-2.02	-1.68	1.58	
802.11 ac80	5775	-6.26	-6.32	-4.04	-4.10	0.4	

Note:

The duty cycle factor was calculated into the total result for 802.11a/n/ac modes.

According to KDB789033 D02 General U-NII Test Procedures New Rules v02r01, the test value for 5725-5850 MHz should add  $10 \cdot \log(500\text{kHz}/\text{RBW})$  to the measured result.

The device employs Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

$$\text{Array Gain} = 10 \log(\text{NANT}/\text{NSS}) \text{ dB.}$$


So:

$$\text{Directional gain} = \text{GANT} + \text{Array Gain} = 2.8 + 10 \cdot \log(2/2) = 2.8 \text{ dBi for } 5.2 \text{ GHz band}$$

$$\text{Directional gain} = \text{GANT} + \text{Array Gain} = 5.0 + 10 \cdot \log(2/2) = 5.0 \text{ dBi for } 5.8 \text{ GHz band}$$


1.4MHz/10MHz/20MHz modes:

1.4MHz, Low Channel

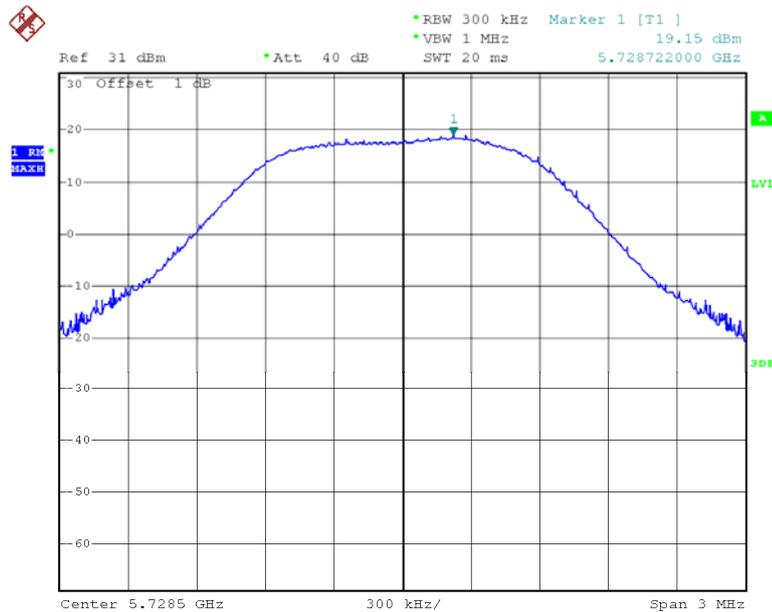


Date: 5.SEP.2018 10:59:42

### 1.4MHz, Middle Channel

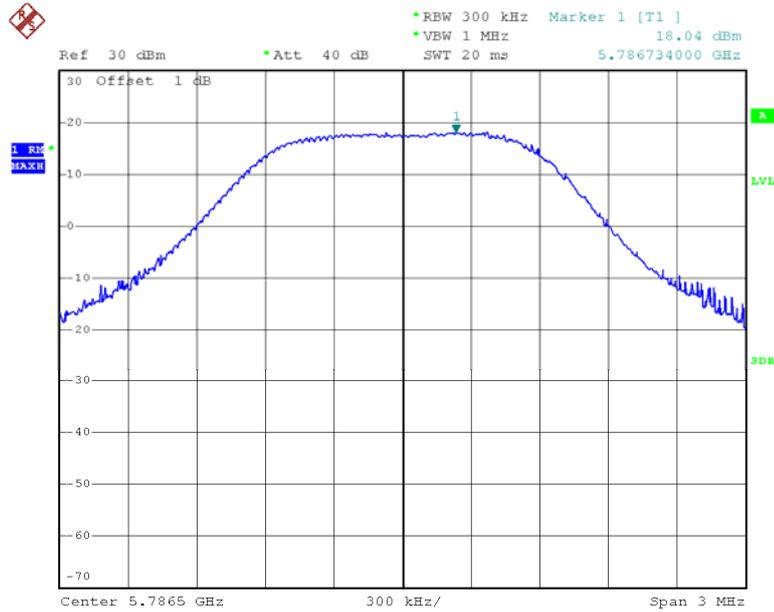


Date: 17.SEP.2018 11:19:02

### 1.4MHz, High Channel

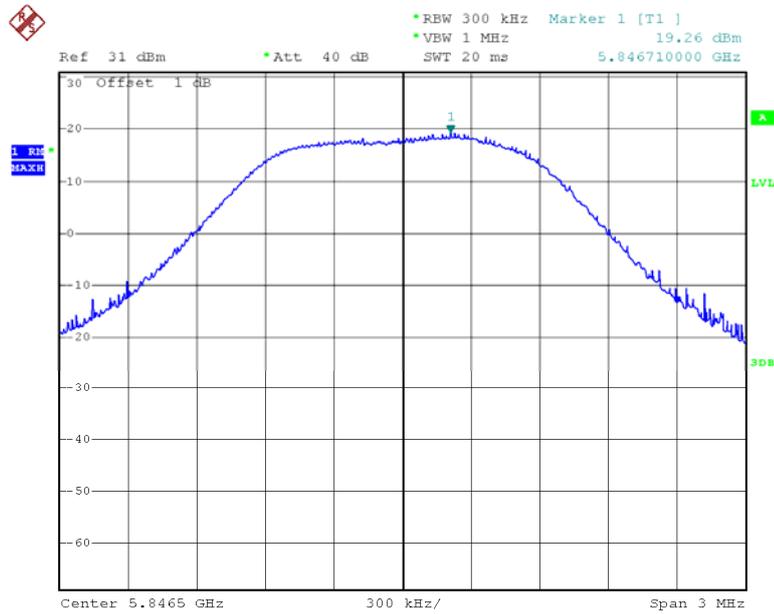


Date: 5.SEP.2018 11:00:18

### 10MHz, Low Channel

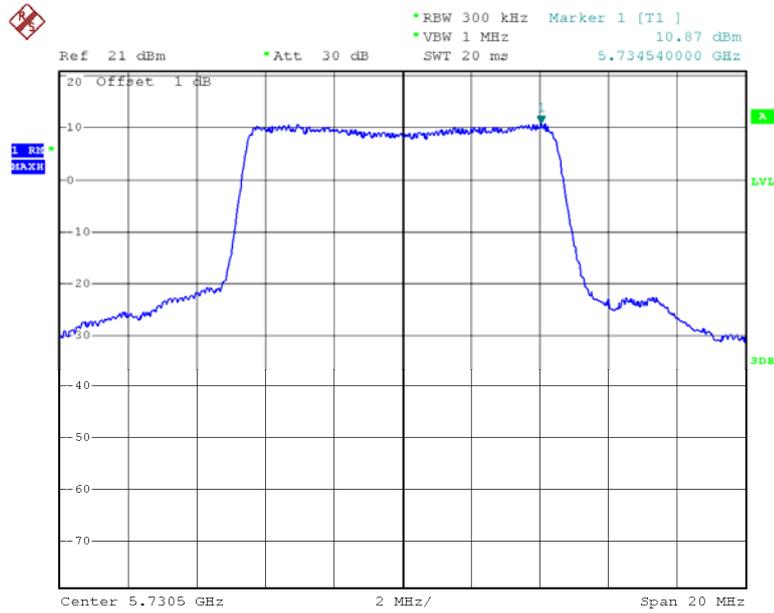


Date: 5.SEP.2018 10:57:11

### 10MHz, Middle Channel

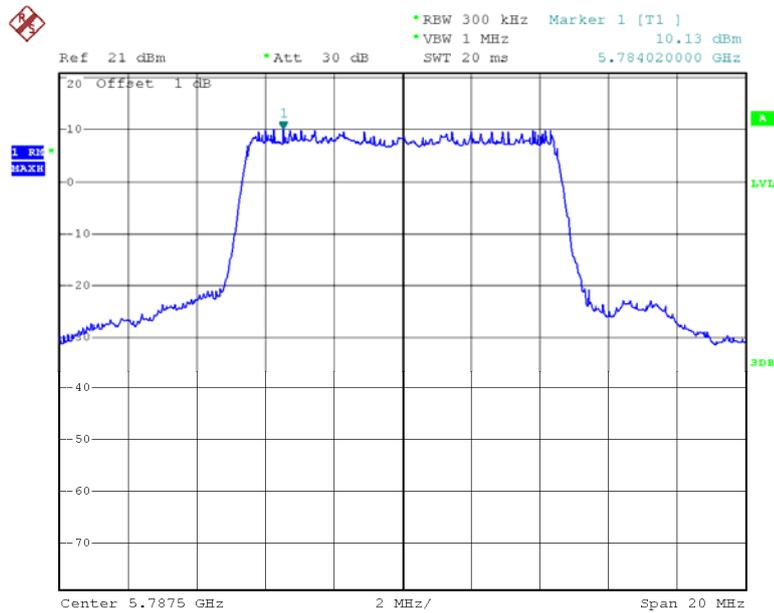


Date: 5.SEP.2018 10:57:27

### 10MHz, High Channel

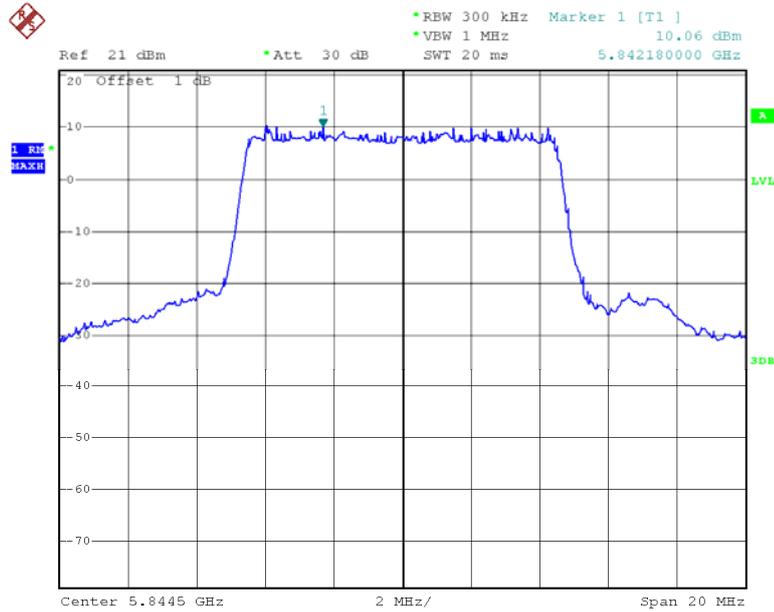


Date: 5.SEP.2018 10:57:40

### 20MHz, Low Channel

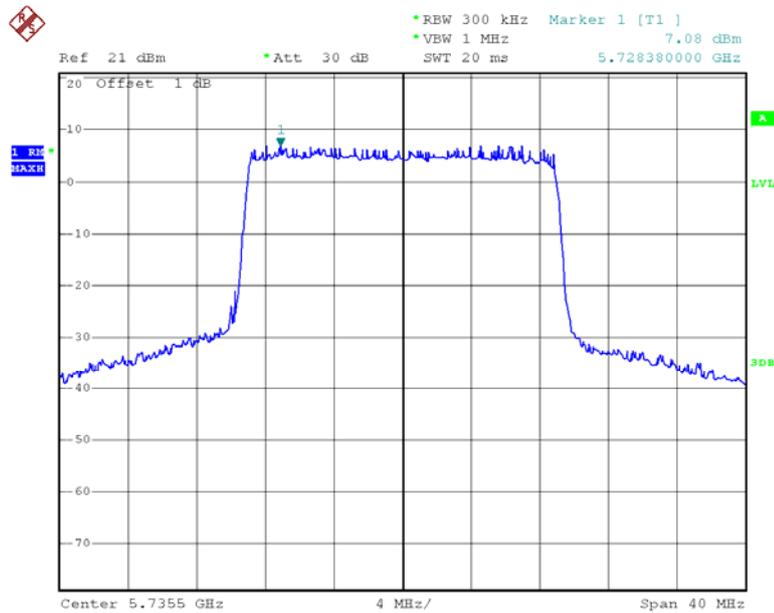


Date: 5.SEP.2018 10:58:42

### 20 MHz, Middle Channel

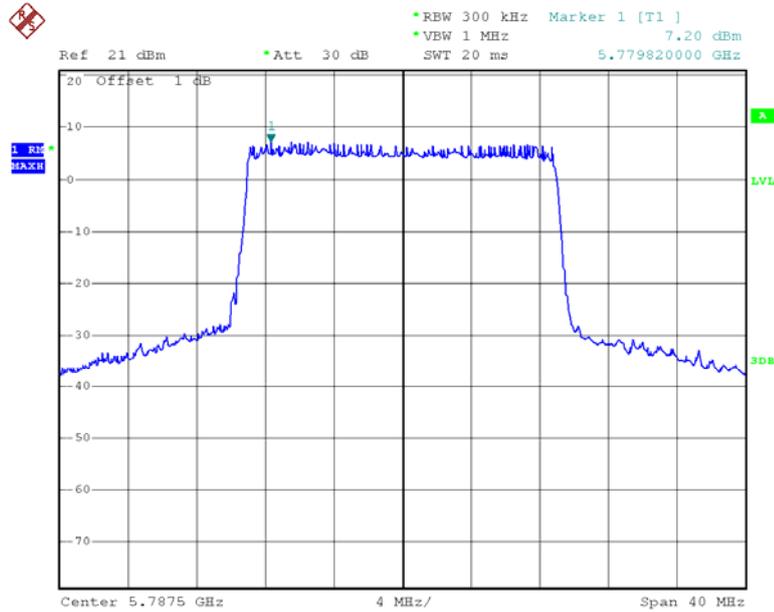

Date: 5.SEP.2018 10:58:27


### 20MHz, High Channel

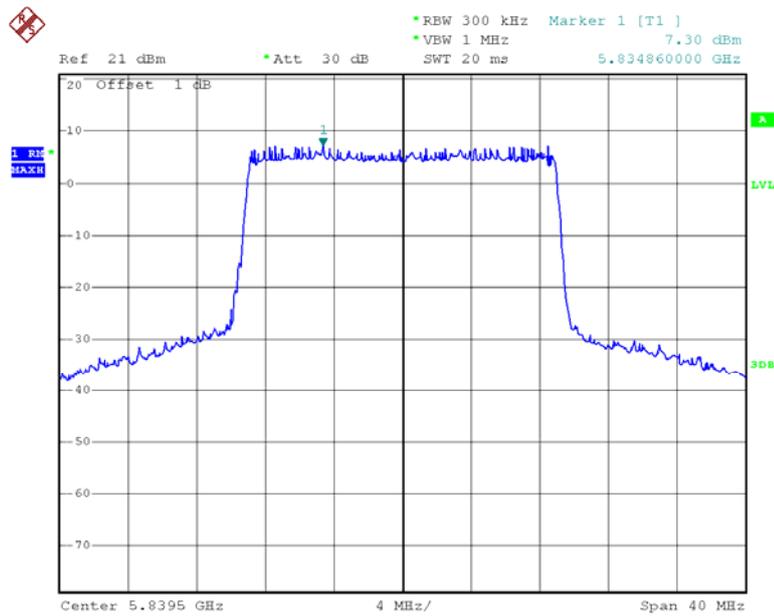

Date: 5.SEP.2018 10:58:07


5150-5250MHz:  
802.11a,

### Chain 0,Low Channel

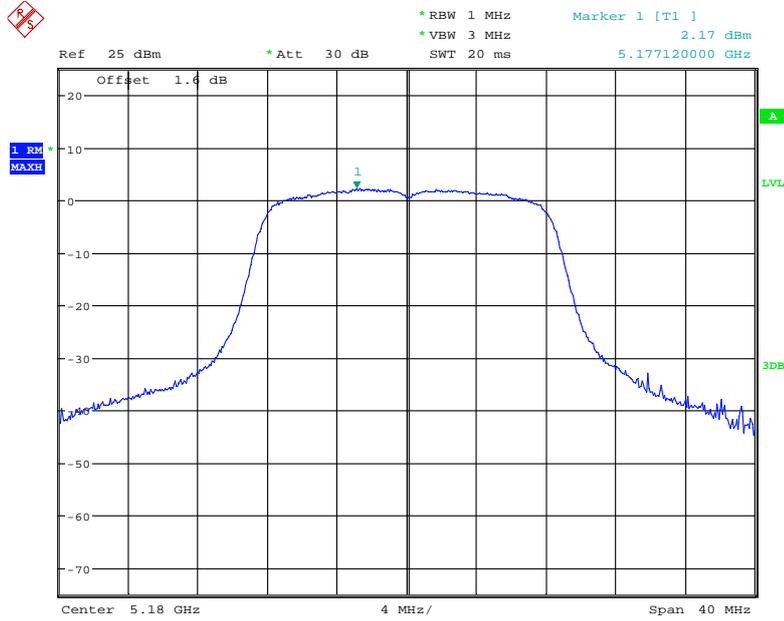


Date: 4.SEP.2018 14:15:35

### Chain 0,Middle Channel

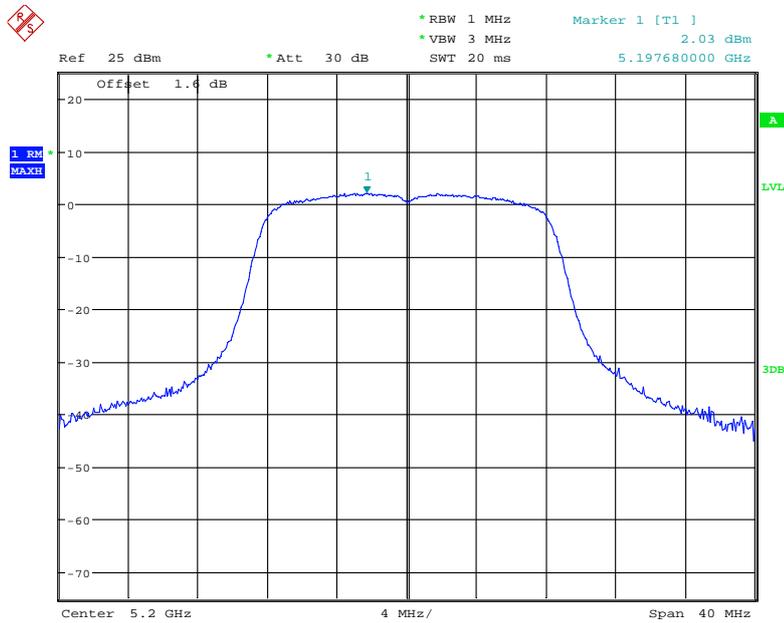


Date: 4.SEP.2018 14:15:52

### Chain 0,High Channel

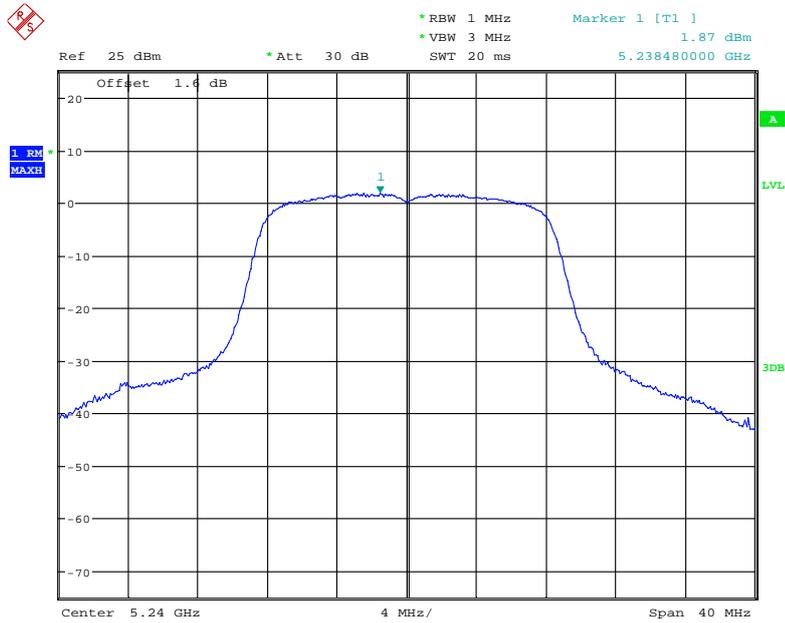


Date: 4.SEP.2018 14:14:02

### Chain 1,Low Channel

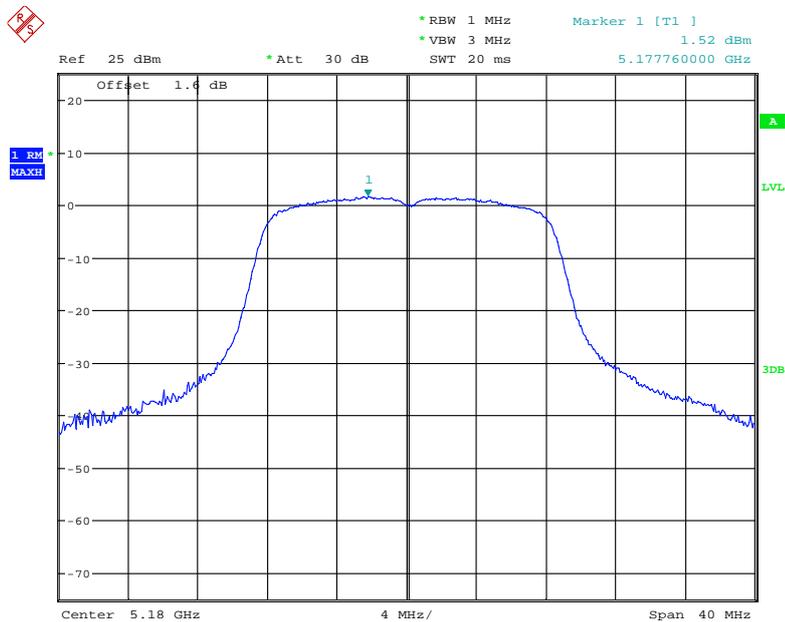


Date: 4.SEP.2018 11:40:59

### Chain 1,Middle Channel

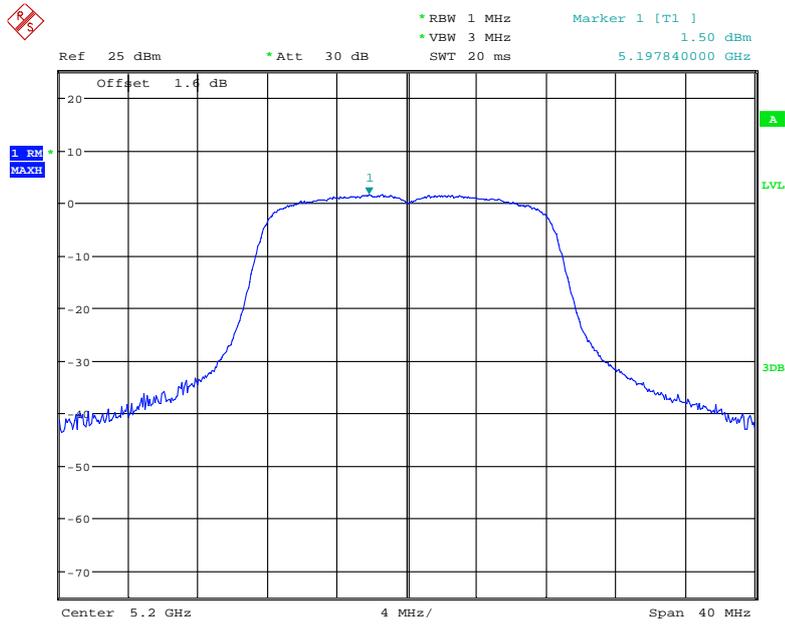

Date: 4.SEP.2018 11:43:42


### Chain 1,High Channel

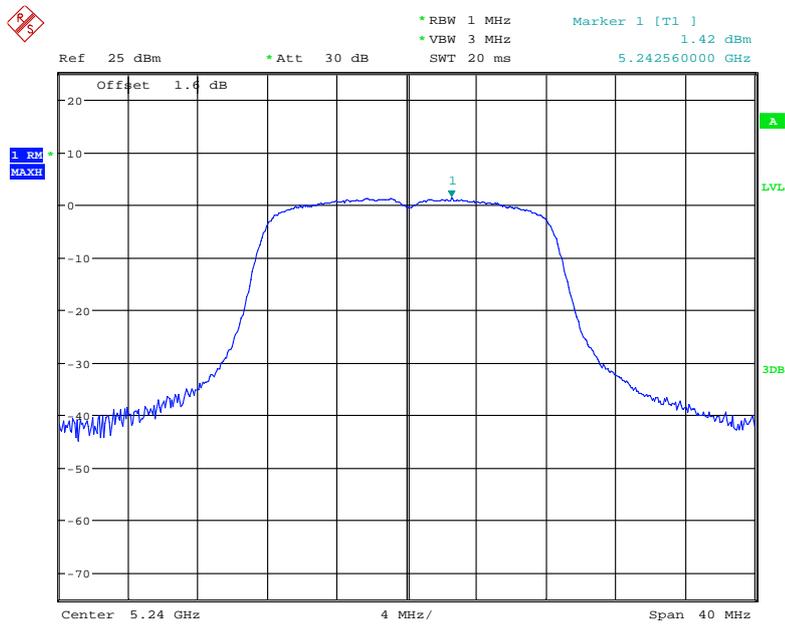

Date: 4.SEP.2018 11:47:12


802.11n ht20

Chain 0,Low Channel

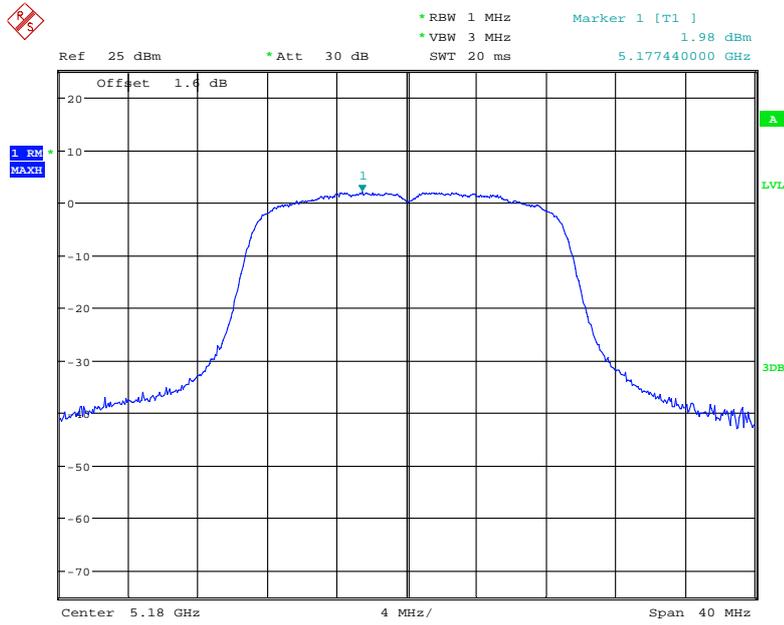


Date: 4.SEP.2018 11:00:56

Chain 0,Middle Channel

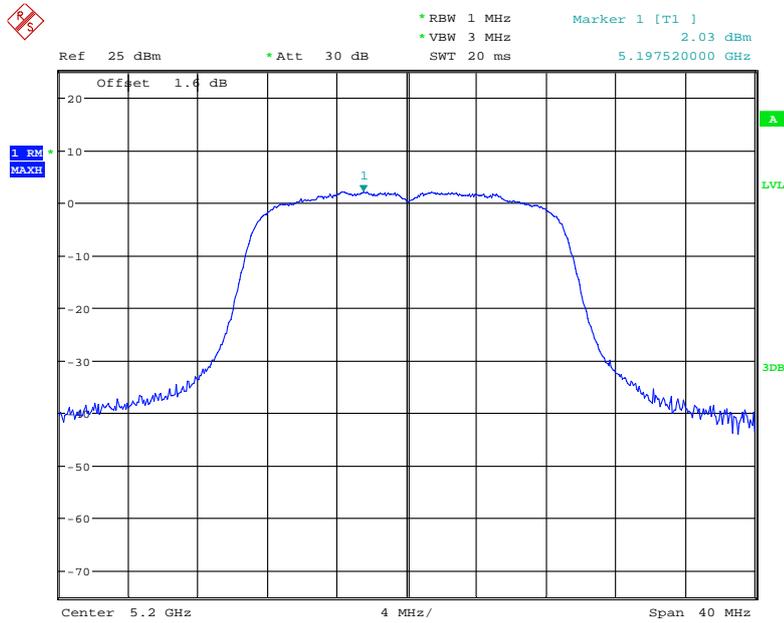


Date: 4.SEP.2018 11:03:54

### Chain 0,High Channel

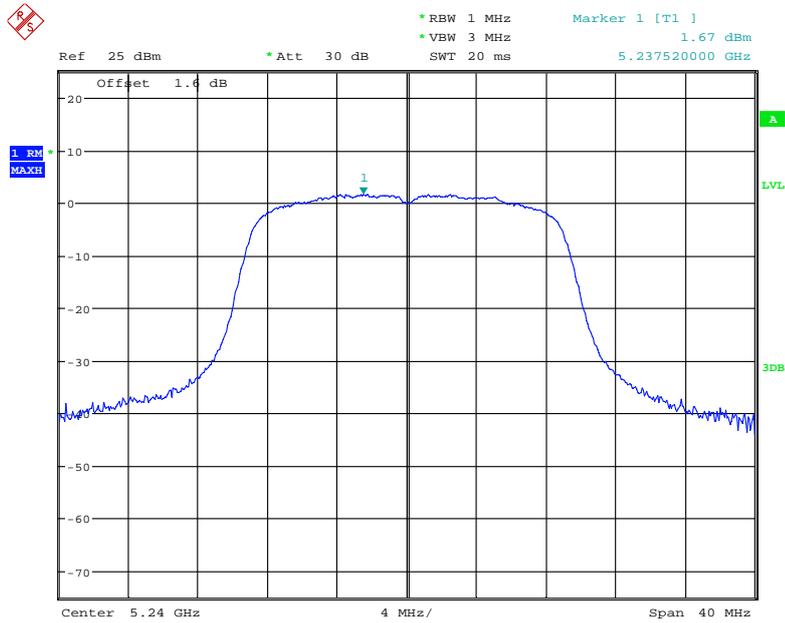


Date: 4.SEP.2018 14:16:23

### Chain 1,Low Channel

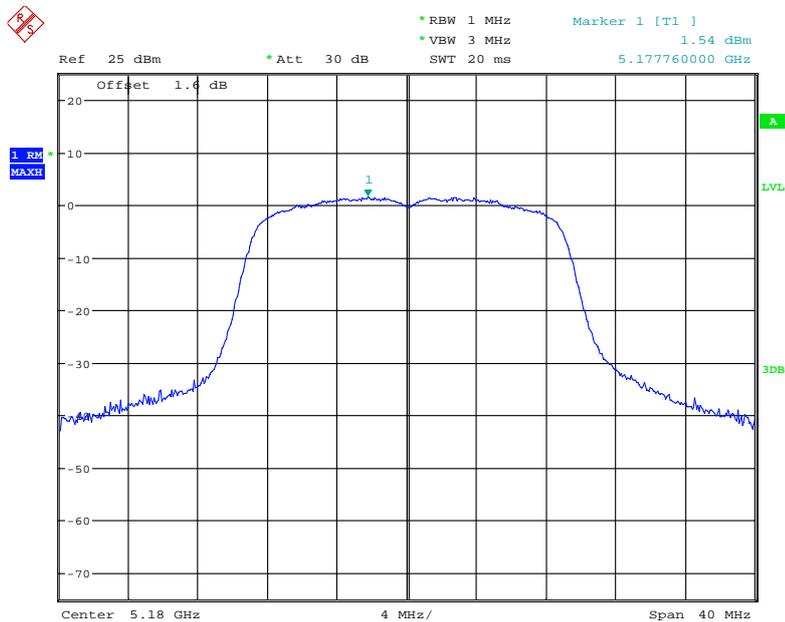


Date: 4.SEP.2018 11:32:38

### Chain 1,Middle Channel

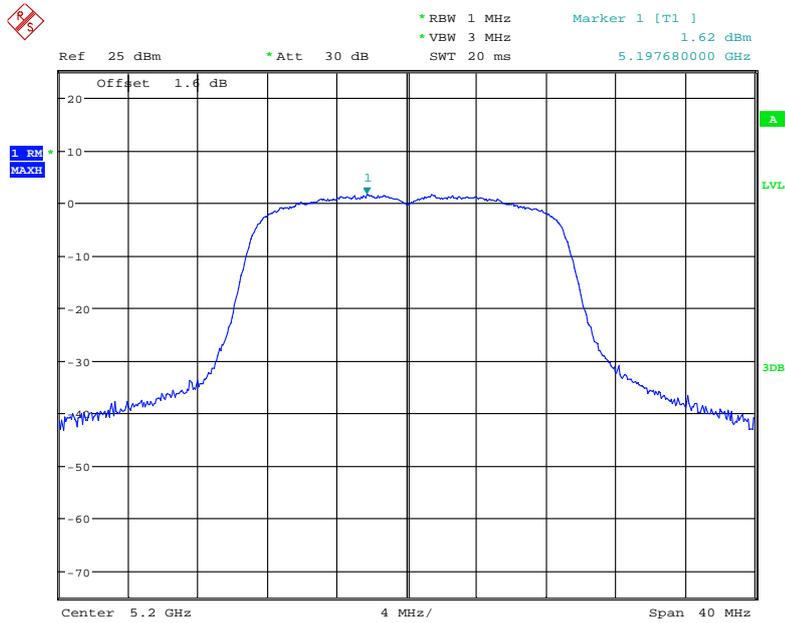

Date: 4.SEP.2018 11:35:22


### Chain 1,High Channel

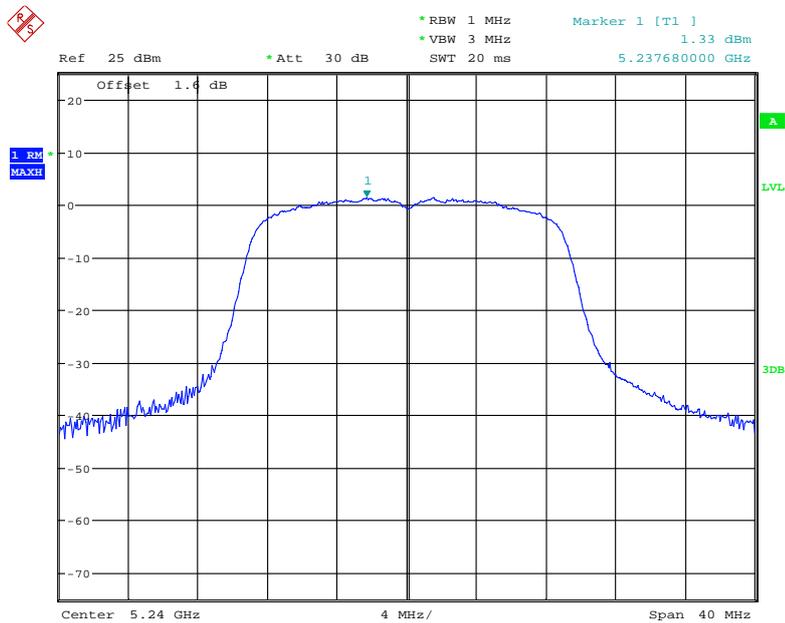

Date: 4.SEP.2018 11:38:03


802.11n ht40

Chain 0,Low Channel

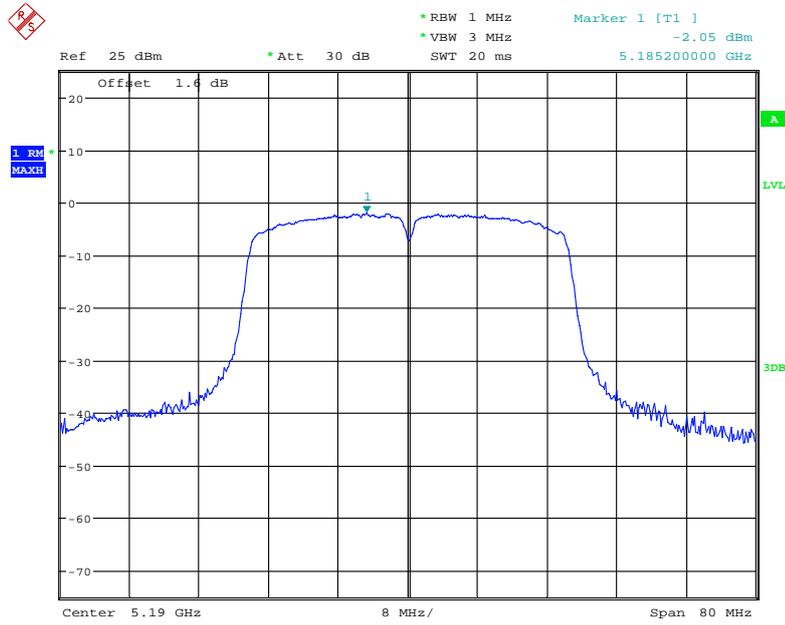


Date: 4.SEP.2018 11:09:50

Chain 0,High Channel

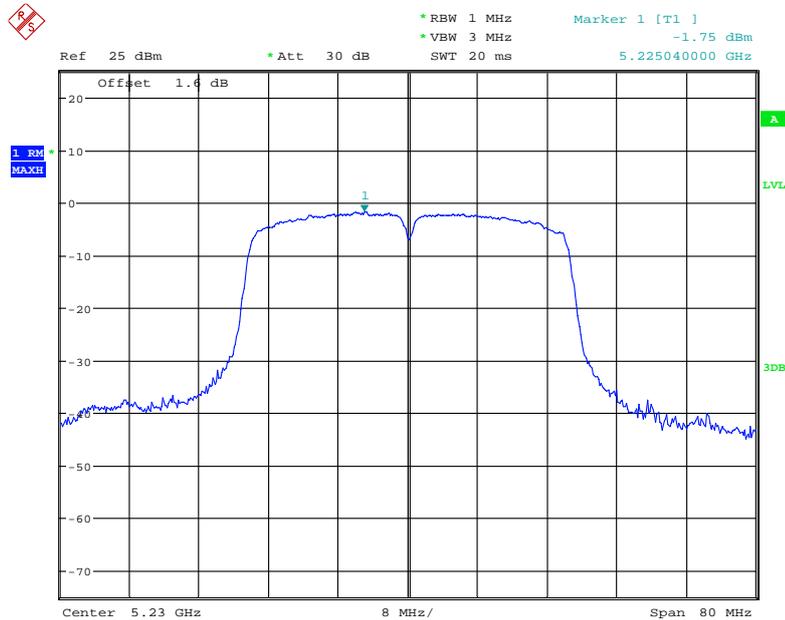


Date: 4.SEP.2018 11:12:44

### Chain 1,Low Channel

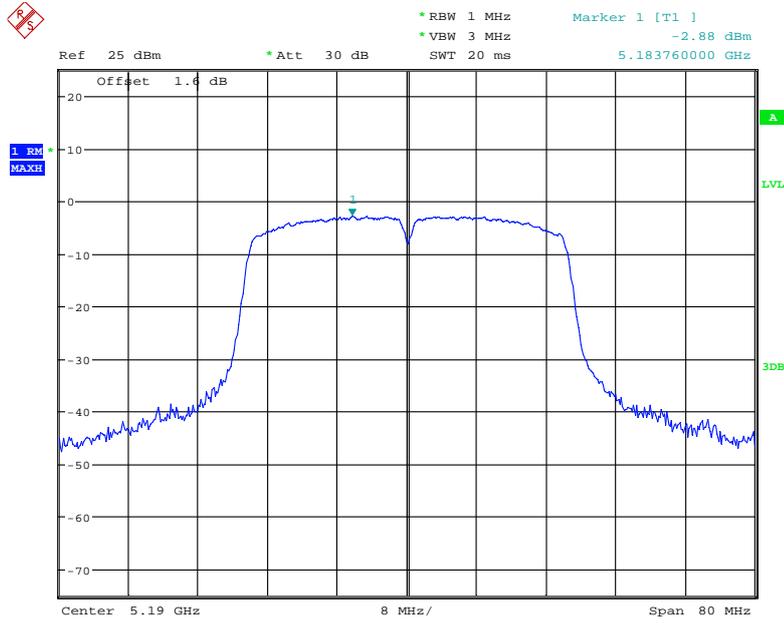

Date: 4.SEP.2018 11:29:36


### Chain 1,High Channel

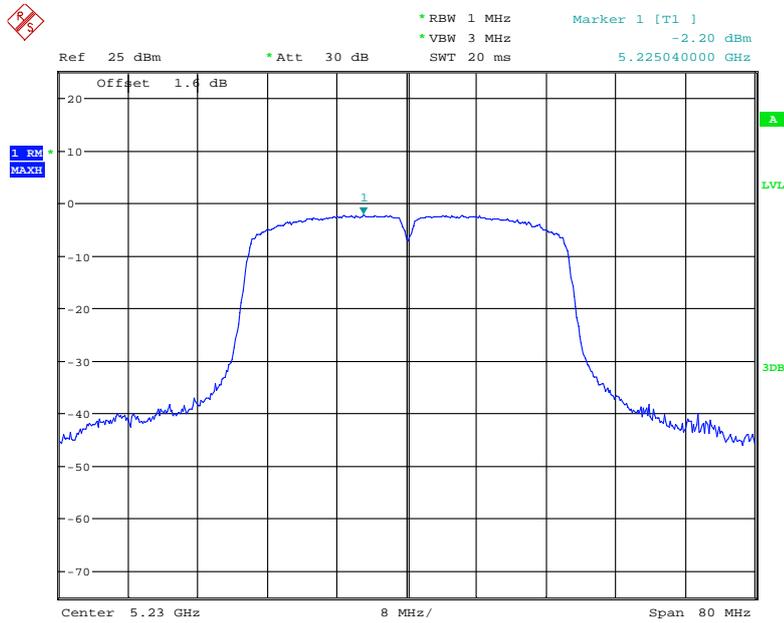

Date: 4.SEP.2018 11:29:00


802.11 ac80

Chain 0, Middle Channel

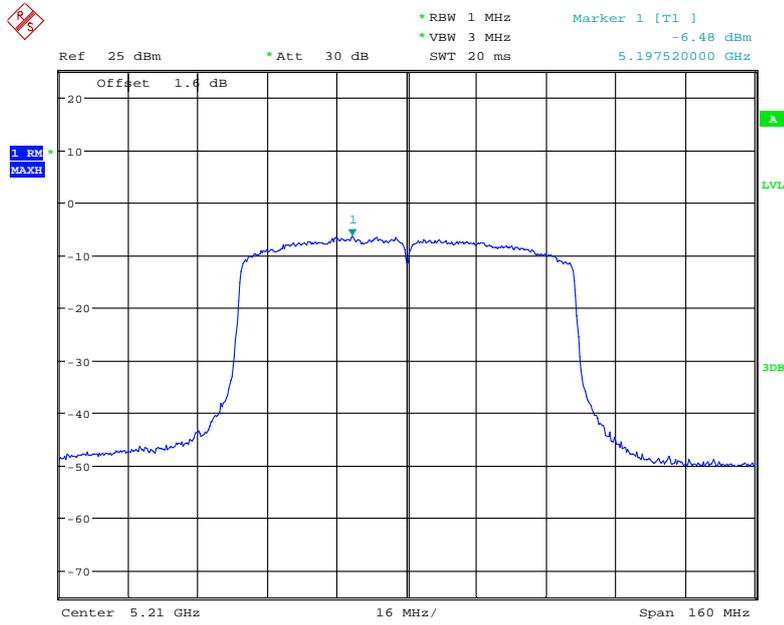

Date: 4.SEP.2018 14:17:08


Chain 1, Middle Channel

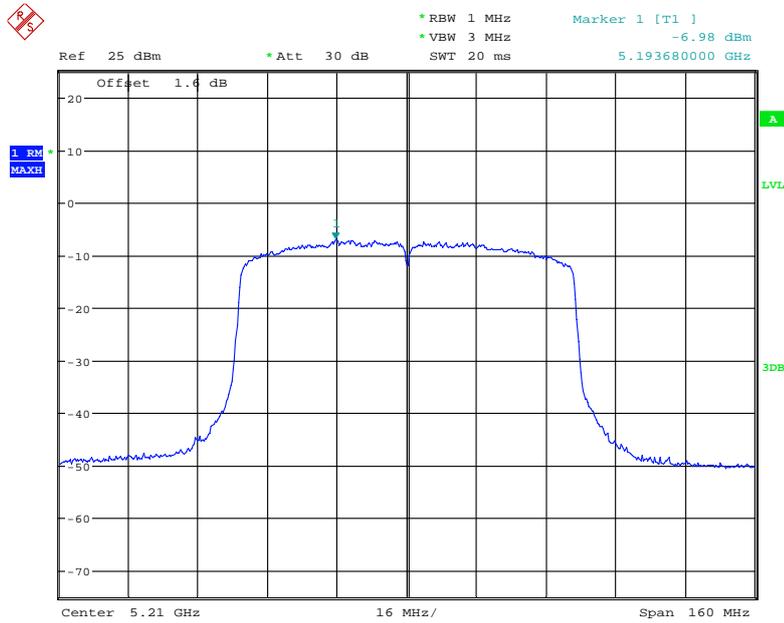

Date: 4.SEP.2018 14:17:33


5725-5850MHz:  
802.11a,

### Chain 0,Low Channel

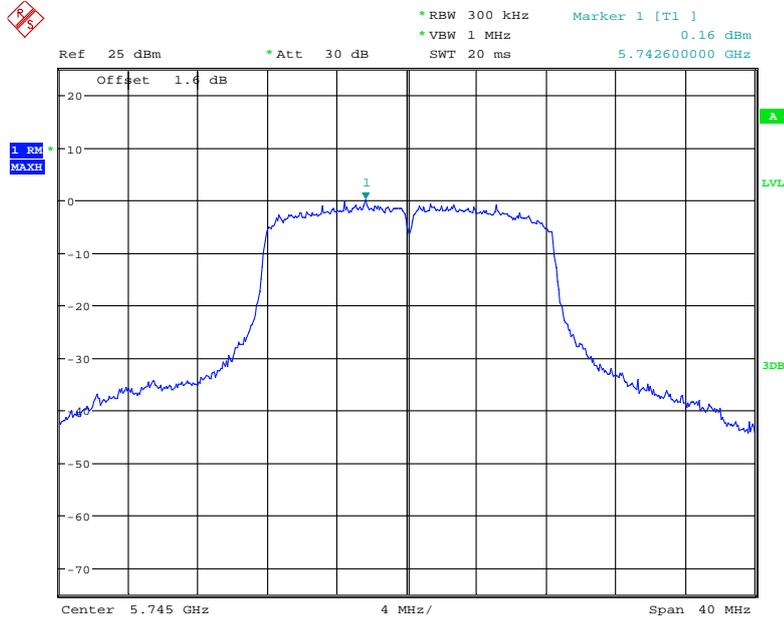


Date: 4.SEP.2018 10:46:39

### Chain 0,Middle Channel

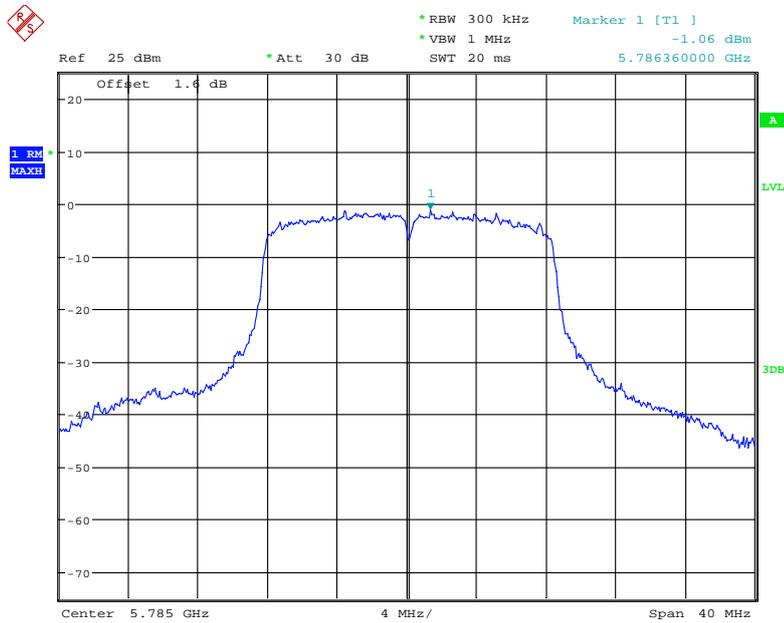


Date: 4.SEP.2018 10:47:03

### Chain 0,High Channel

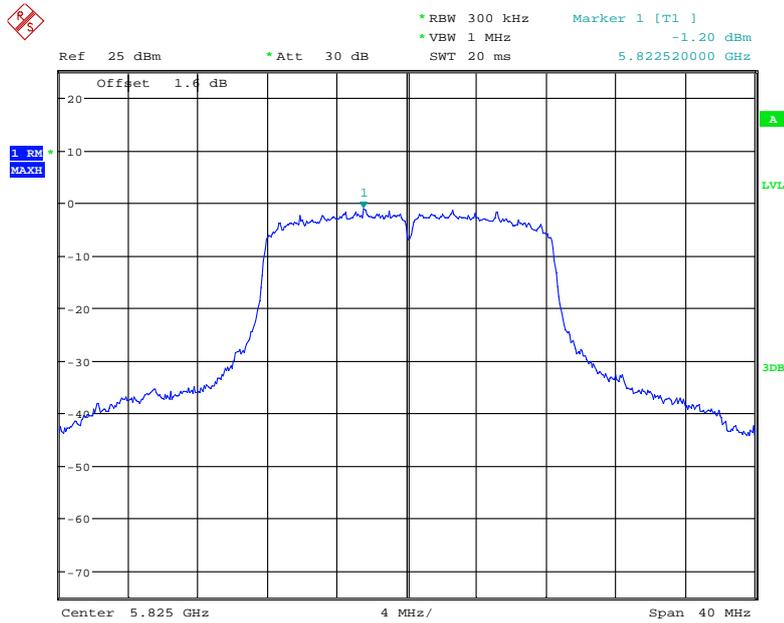


Date: 4.SEP.2018 10:47:25

### Chain 1,Low Channel

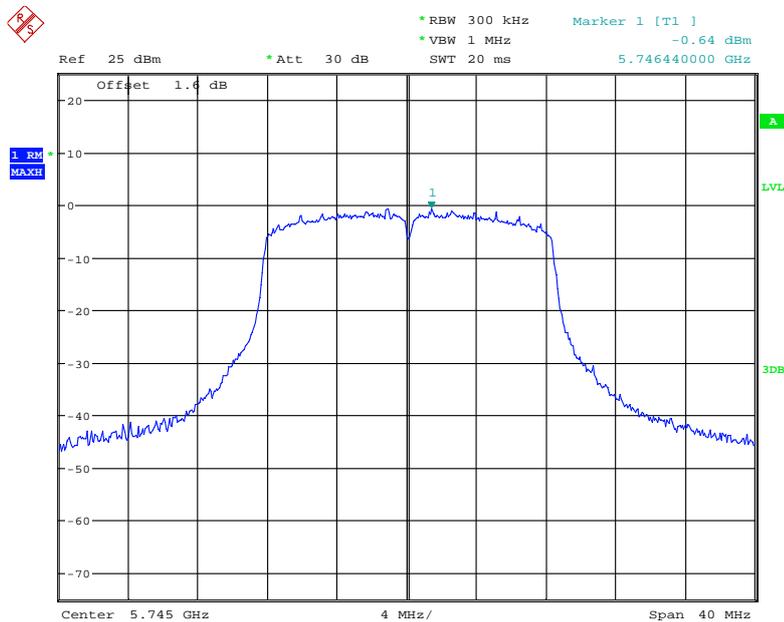


Date: 4.SEP.2018 10:13:16

### Chain 1,Middle Channel

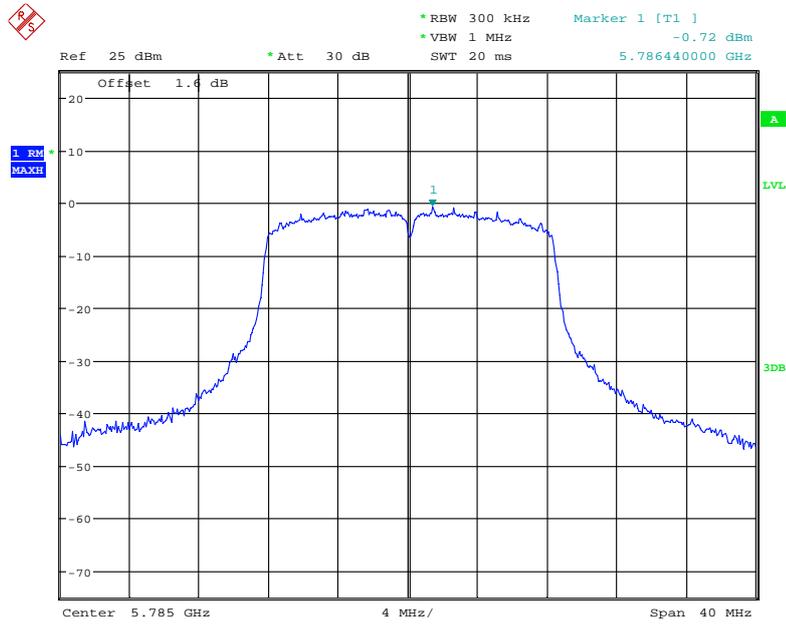

Date: 4.SEP.2018 10:17:00


### Chain 1,High Channel

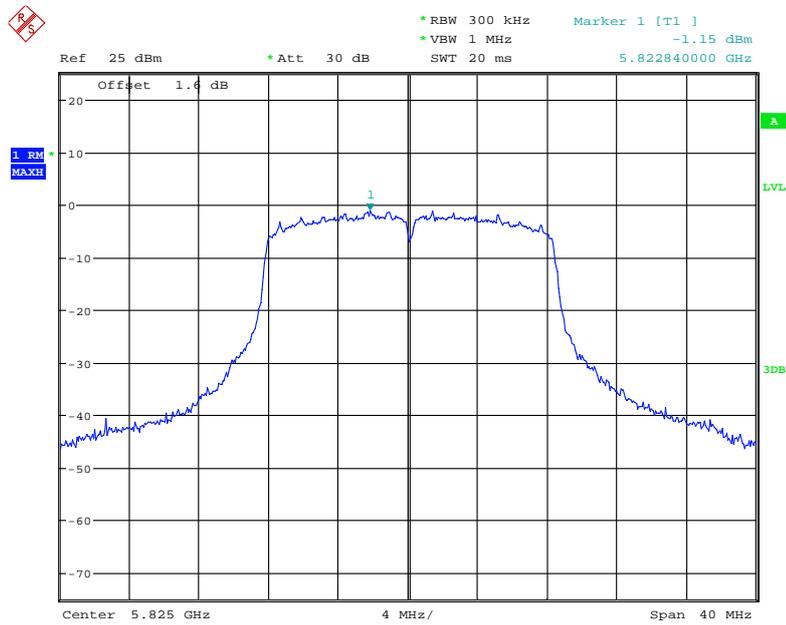

Date: 4.SEP.2018 10:20:28


802.11n ht20

Chain 0,Low Channel

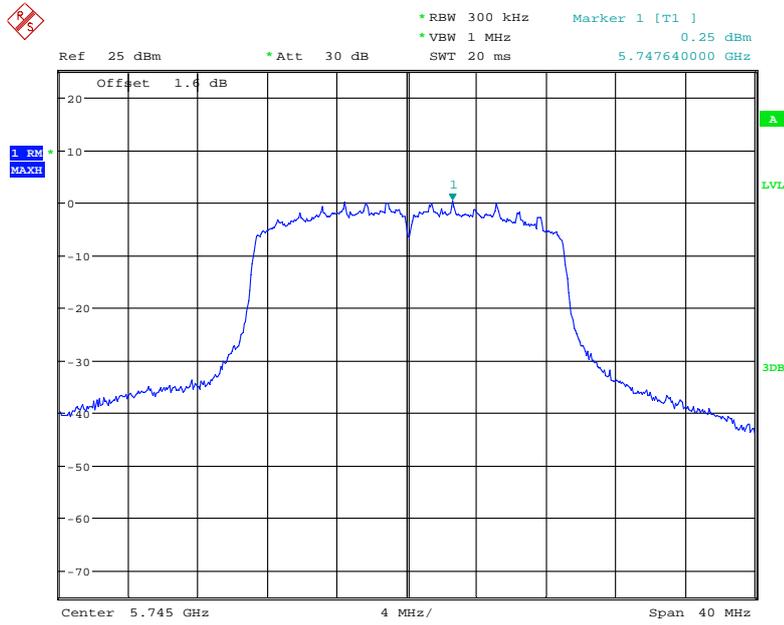


Date: 4.SEP.2018 10:45:32

Chain 0,Middle Channel

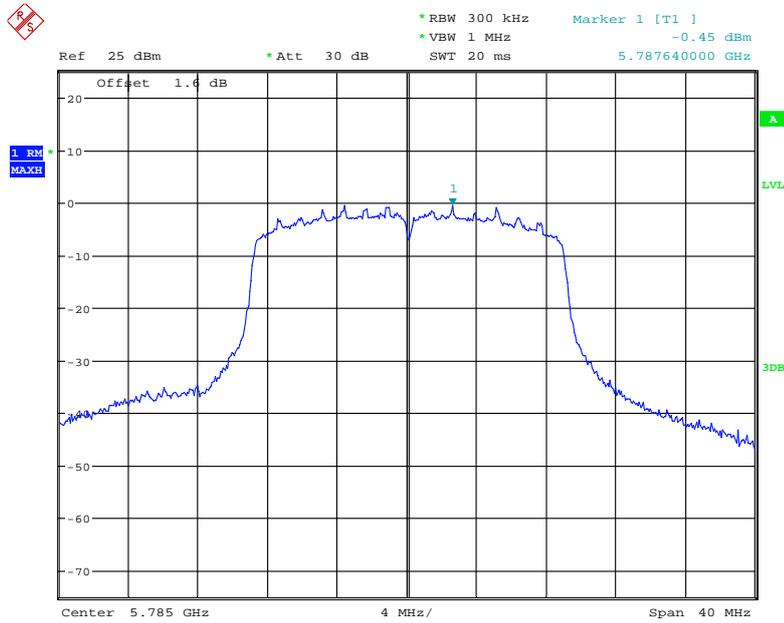


Date: 4.SEP.2018 10:45:55

### Chain 0,High Channel

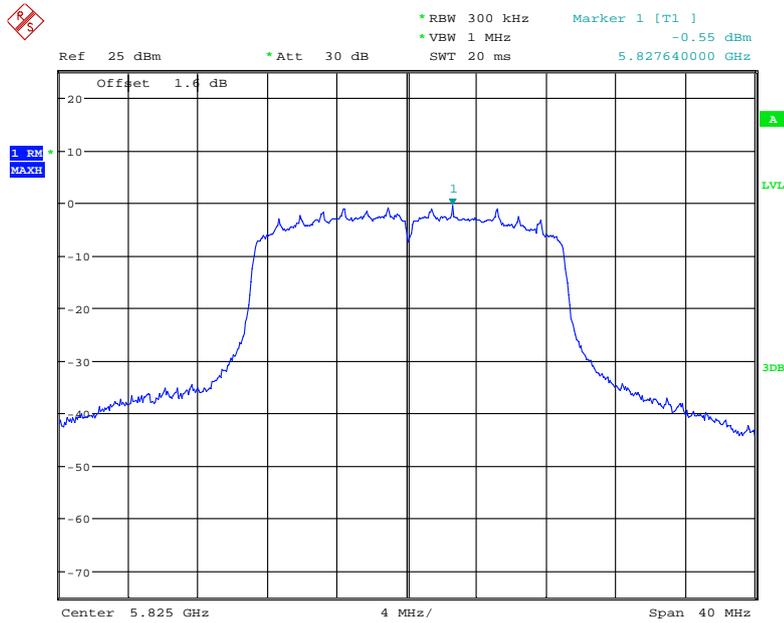


Date: 4.SEP.2018 10:46:14

### Chain 1,Low Channel

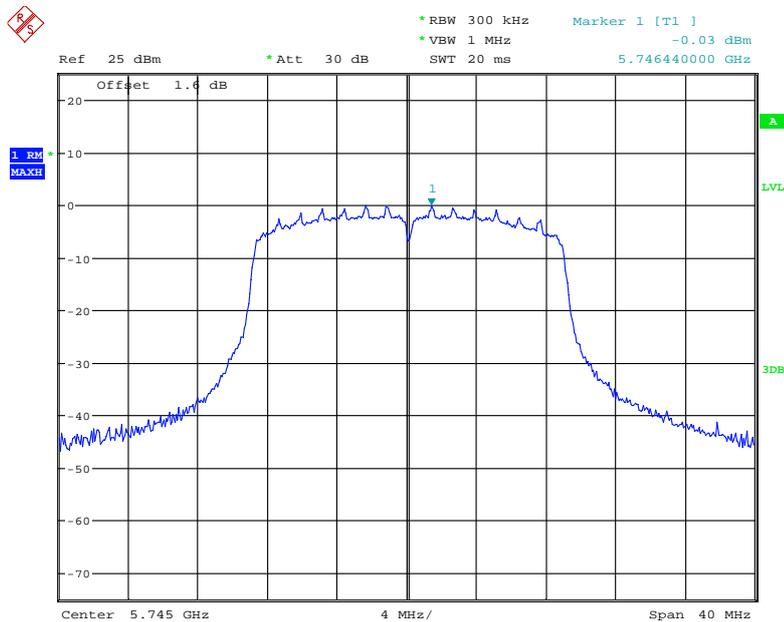


Date: 4.SEP.2018 10:01:03

### Chain 1,Middle Channel

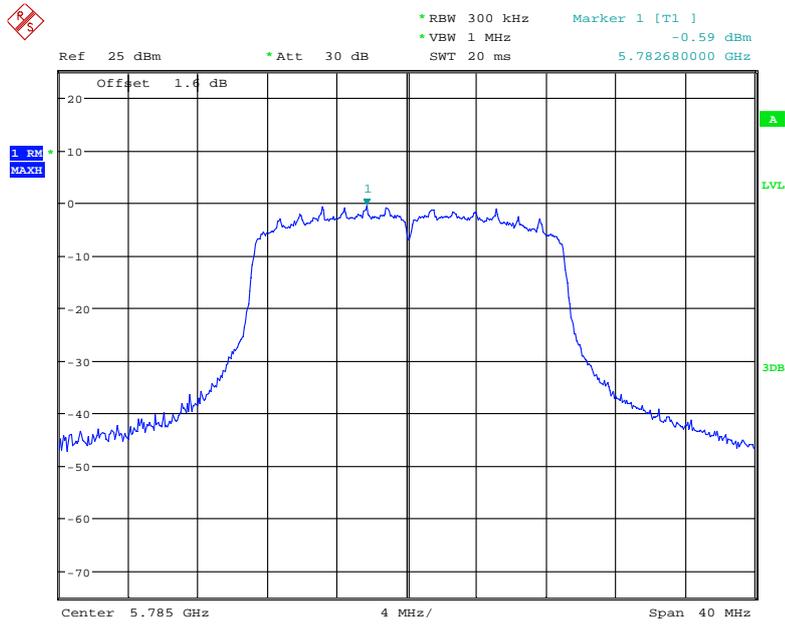

Date: 4.SEP.2018 10:04:21


### Chain 1,High Channel

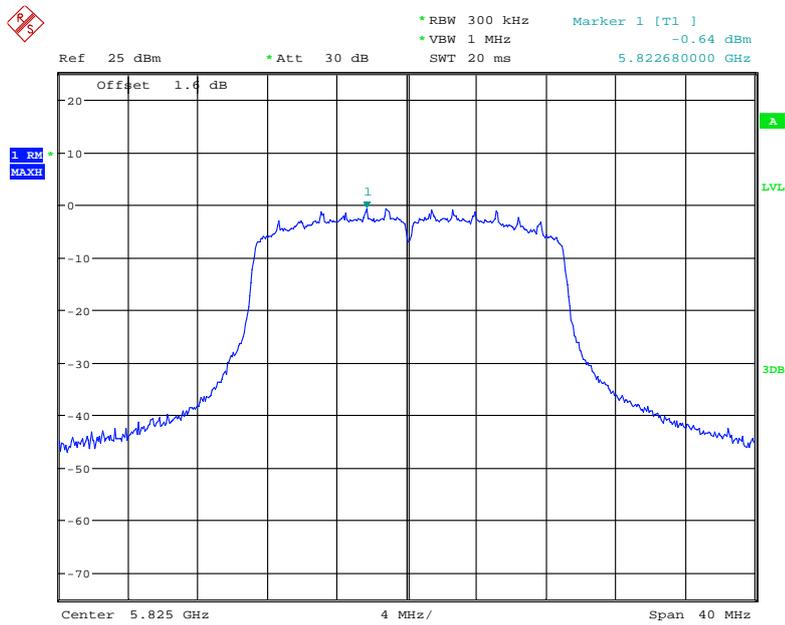

Date: 4.SEP.2018 10:07:46


802.11n ht40

Chain 0,Low Channel

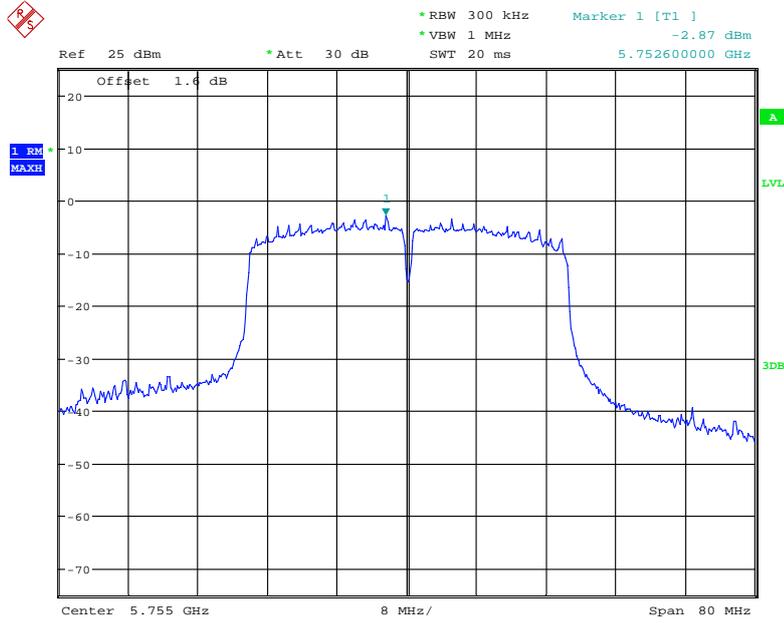


Date: 4.SEP.2018 10:44:01

Chain 0,High Channel

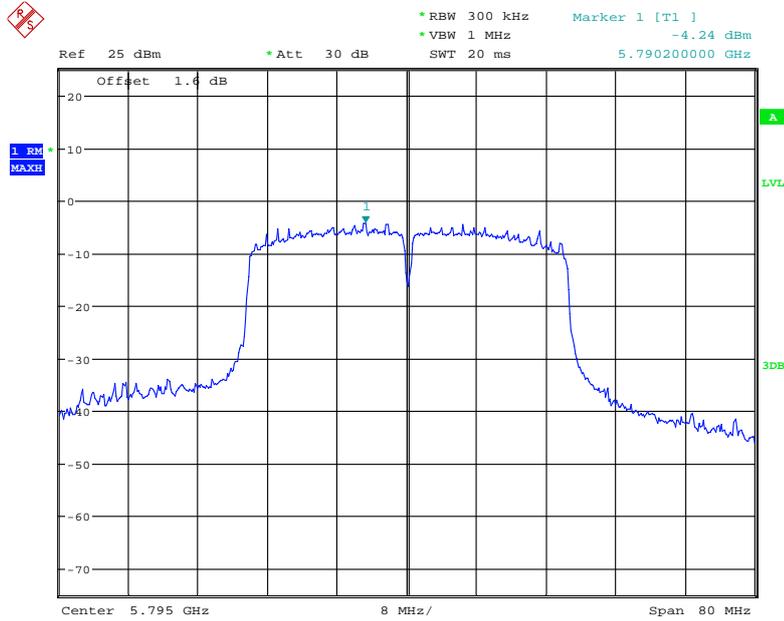


Date: 4.SEP.2018 10:44:30

### Chain 1,Low Channel

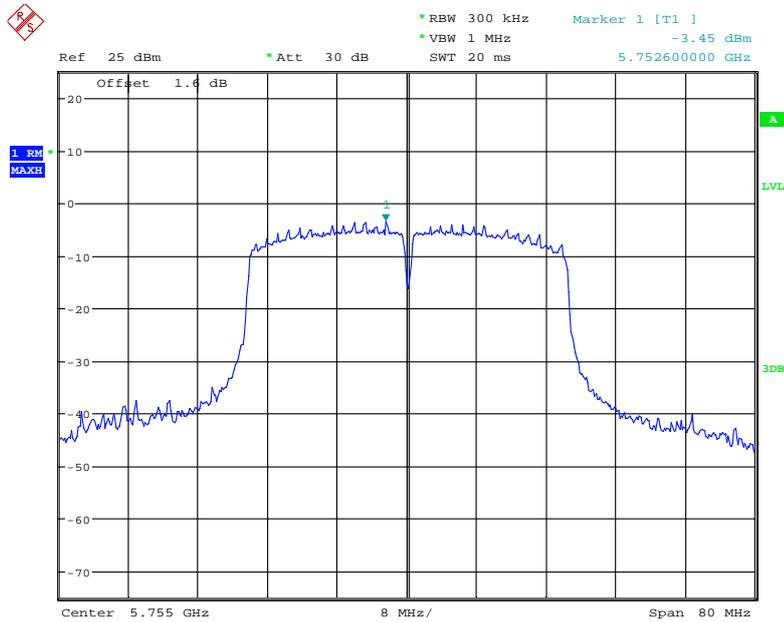

Date: 4.SEP.2018 09:54:21


### Chain 1,High Channel

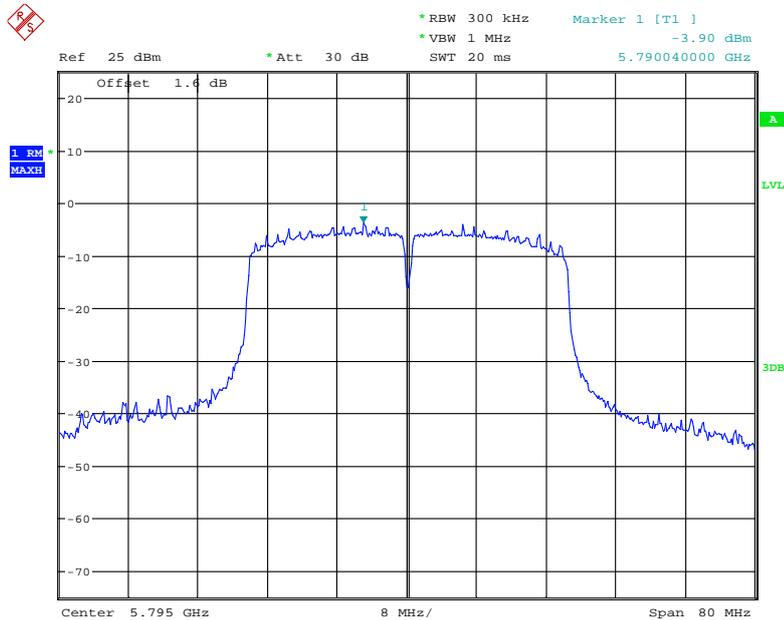

Date: 4.SEP.2018 09:57:27


802.11 ac80

Chain 0, Middle Channel

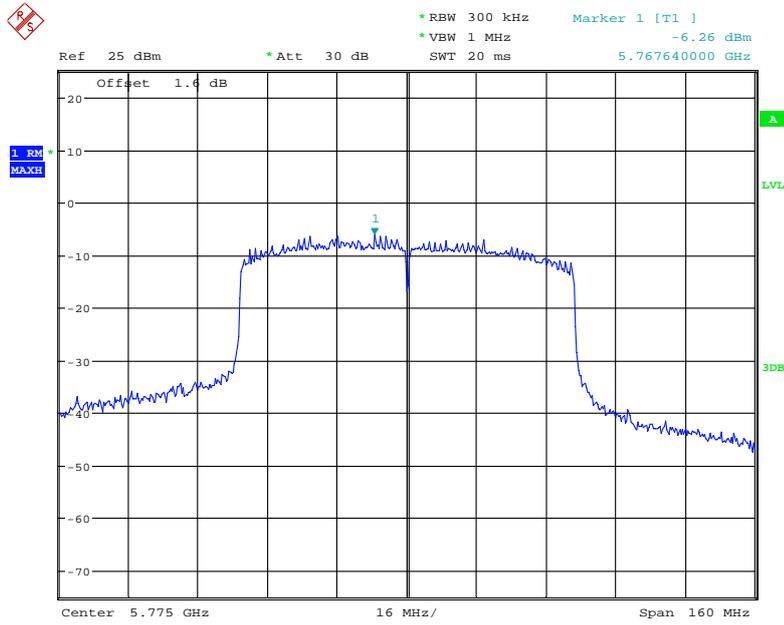

Date: 4.SEP.2018 10:42:22

Chain 1, Middle Channel

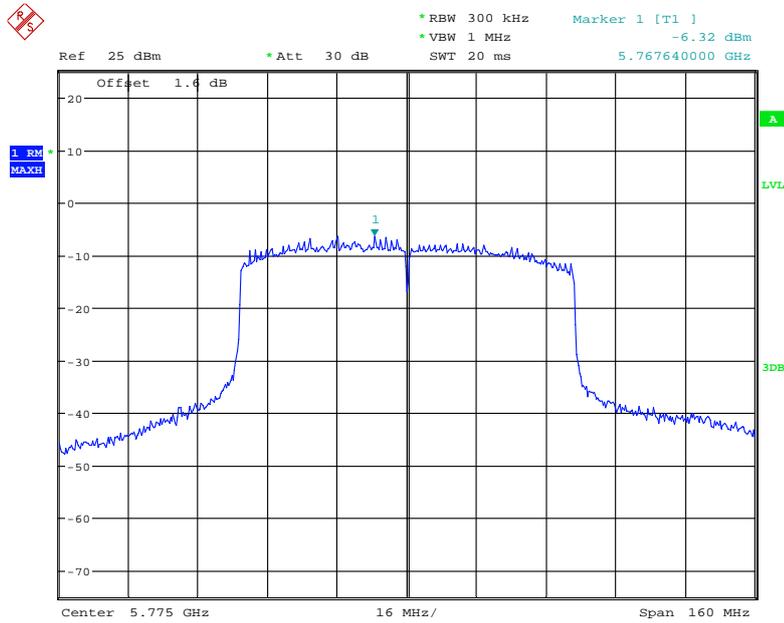

Date: 4.SEP.2018 09:51:21

\*\*\*\*\* END OF REPORT \*\*\*\*\*