

FCC PART 95


EMI MEASUREMENT AND TEST REPORT

For

Daxingyi Electronics Co., Ltd.

4 Floor, B Block, Wanda Industrial Area, Shiyan Town,
Shenzhen, China, 518108

FCC ID: SVBOT80DE05

This Report Concerns: <input checked="" type="checkbox"/> Original Report	Equipment Type: FRS/GMRS Radio
Test Engineer: Snell Leong / 	
Report Number: R0412295	
Report Date: 2005-01-19	
Reviewed By: Ming Jing / 	
Prepared By: Bay Area Compliance Laboratory Corporation 230 Commercial Street Sunnyvale, CA 94085 Tel: (408) 732-9162 Fax: (408) 732 9164	

Note: The test report is specially limited to the use of the above client company and the product model only. It may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the U.S. Government.

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE.....	4
RELATED GRANT/SUBMISSION.....	4
TEST METHODOLOGY	4
TEST FACILITY.....	4
SYSTEM TEST CONFIGURATION.....	6
JUSTIFICATION	6
EUT TEST CONFIGURATION.....	6
SPECIAL ACCESSORIES	6
SCHEMATICS / BLOCK DIAGRAM.....	6
EQUIPMENT MODIFICATIONS.....	6
CONFIGURATION OF TEST SYSTEM.....	6
TEST SETUP BLOCK DIAGRAM.....	7
REQUIREMENTS OF PROVISIONS	8
§2.1046, §95.639(D), AND §95.639 (A)(1) - EFFECTIVE RADIATED POWER.....	9
STANDARD APPLICABLE.....	9
TEST PROCEDURE.....	9
TEST EQUIPMENT.....	10
ENVIRONMENTAL CONDITIONS.....	10
TEST RESULTS.....	10
§2.1046, §95.639(D), AND §95.639 (A)(1) – CONDUCTED OUTPUT POWER	11
PROVISION APPLICABLE.....	11
TEST PROCEDURE.....	11
TEST EQUIPMENT	11
ENVIRONMENTAL CONDITIONS.....	11
TEST RESULTS.....	11
§2.1047, §95.631(D), §95.637(A), AND § 95.637(B) - MODULATION CHARACTERISTICS	14
STANDARD APPLICABLE.....	14
TEST PROCEDURE.....	14
TEST EQUIPMENT	14
ENVIRONMENTAL CONDITIONS.....	15
TEST RESULTS.....	15
§2.1049, §95.633(A), AND § 95.633(C) - OCCUPIED BANDWIDTH OF EMISSION	17
STANDARD APPLICABLE.....	17
TEST PROCEDURE.....	17
TEST EQUIPMENT	17
ENVIRONMENTAL CONDITIONS.....	17
TEST RESULTS.....	17
§2.1053 AND §95.635(B)(1), §95.635(B)(3), AND §95.635(B)(7) - RADIATED SPURIOUS EMISSION	19
STANDARD APPLICABLE.....	19
MEASUREMENT PROCEDURE	19
TEST EQUIPMENT.....	19
ENVIRONMENTAL CONDITIONS.....	20
TEST RESULT.....	20
§2.1051 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	22
APPLICABLE STANDARD.....	22
TEST PROCEDURE.....	22
MEASUREMENT PROCEDURE	22
TEST EQUIPMENT.....	22
ENVIRONMENTAL CONDITIONS.....	22

TEST RESULT.....	23
§2.1055, §95.621(B), AND §95.627(B) - FREQUENCY STABILITY MEASUREMENT	25
STANDARD APPLICABLE.....	25
TEST PROCEDURE.....	25
TEST EQUIPMENT.....	25
ENVIRONMENTAL CONDITIONS.....	26
TEST RESULTS.....	26

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The *Daxingyi Electronics Co., Ltd.* 's product, *Model No. OT-60/OT-80*, FCC ID: *SVBOT80DE05* or the "EUT" as referred to in this report is a 22 channel FRS/GMRS radio which is measured approximately 96mmL x 48mmW x 22mmH.

The EUT operates at the frequency range of 462.5500 - 462.7250 MHz and 467.5625 - 467.7125 MHz, maximum output power ERP 19.5dBm (0.089W), frequency tolerance 2.5ppm and emission designator 11K0F3E.

** The test data gathered are from production sample, serial number: 122951, provided by the manufacturer.*

Objective

This report is prepared on behalf of *Daxingyi Electronics Co., Ltd.* in accordance with Part 95 Subpart A, Subpart B and Subpart E of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC rules for effective radiated power, modulation characteristics, occupied bandwidth, radiated spurious emissions, AC line conducted emissions and frequency stability.

Related Grant/Submission

No Related Submittals.

Test Methodology

Measurements contained in this report were also conducted with TIA/EIA Standard 603, Telecommunications Industry Association Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Open Area Test site used by Bay Area Compliance Laboratory Corporation to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Sunnyvale, California, USA.

Test site at Bay Area Compliance Laboratory Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2001.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratory Corporation is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (NVLAP). The scope of the accreditation covers the FCC Method - 47 CFR Part 15 - Digital Devices, IEC/CISPR 22: 1998, and AS/NZS 3548: Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment test methods under NVLAP Lab Code 200167-0.

SYSTEM TEST CONFIGURATION

Justification

The EUT was tested according to ANSI C63.4-2001 to represent the worst-case results during the final qualification test.

EUT Test Configuration

The EUT was powered and fully operated by pushing PTT (Push To Talk) button and then change the channel to Low, Middle, and High by using up and down buttons.

Special Accessories

As shown in following test block diagram setup, interface cable used for compliance testing is shielded as normally supplied by customer and its respective support equipment manufacturers.


Schematics / Block Diagram

Please refer to Appendix D.

Equipment Modifications


No modifications were made to the EUT.

Configuration of Test System

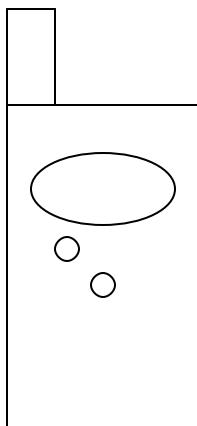

Test Setup Block Diagram

For tabletop systems, the EUT shall be centered laterally on the tabletop and its rear shall be flushed with the rear of the table. If the EUT is a stand-alone unit, it shall be placed in the center of the tabletop.

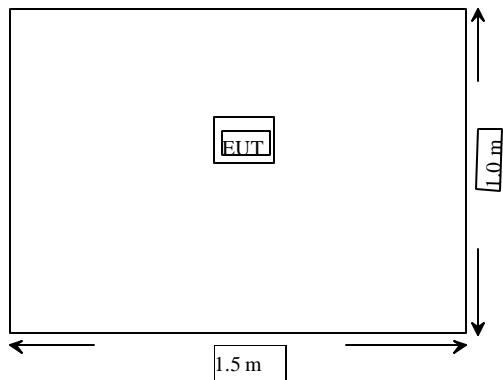

REQUIREMENTS OF PROVISIONS

Results reported relate only to the product tested, serial number: 122951.

FCC Rules	Rules Description	Requirement	Result
2.1046 95.639 (a) (1) 95.639 (d)	Effective Radiated Power	0.5W for FRS	Complied
		50 W for GMRS	
2.1047 95.631 (d) 95.637 (a) 95.637 (b)	Modulation Characteristics F3E analogy voice Peak Frequency Deviation Audio Frequency Response Over Modulation	Deviation < 2.5 kHz for FRS	Complied
		Deviation < 5 kHz for GMRS	
2.1049 95.633 (a) 95.633 (c)	Occupied Bandwidth	12.5 kHz for FRS	Complied
		20 kHz for GMRS	
2.1053 15.109 (a)	Field Strength of Spurious Radiation	Worst Case < 48dB	Complied
95.635 (b)(1) 95.635 (b)(3) 95.635(b)(7)	Spurious Emission	Complied	Complied
2.1055 95.621 (b) 95.627 (b)	Frequency Stability Vs. Temperature Vs. Voltage	Deviation < 5 ppm for GMRS	Complied
		Deviation < 2.5 ppm for FRS	

§2.1046, §95.639(d), and §95.639 (a)(1) - EFFECTIVE RADIATED POWER

Standard Applicable

Per FCC §2.1046 and FCC § 95.639 (a) (1), no GMRS unit, under any condition of modulation, shall exceed 50W Carrier Power (average TP during one unmodulated RF cycle) when transmission type A1D, F1D, .G1D, A3E, F3E or G3E.

Per FCC §2.1046 and FCC § 95.639 (d), no FRS unit, under any condition of modulation, shall exceed 0.500W effective radiated power (ERP).

Test Procedure

1. On a test site, the EUT shall be placed at 1.5m height on a turn table, and in the position closest to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3m from EUT to correspond to the frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the quasi-peak detector is used for the measurement.
4. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test.
5. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
6. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
7. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
8. The maximum signal level detected by the measuring receiver shall be noted.
9. The transmitter shall be replaced by a tuned dipole (substitution antenna).
10. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
11. The substitution antenna shall be connected to a calibrated signal generator.
12. In necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
13. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
14. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, which is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
15. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.

16. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
17. The measure of the effective radiated power is the large of the two levels recorded, at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.

Test Equipment

Manufacturer	Description	Model	Serial Number	Cal. Date
Rohde & Schwarz	Signal Generator	SMIQ03	1125.5555.03	2004-07-10
Agilent	Spectrum Analyzer	8564E	3943A01781	2004-10-04
Com-Power	Log Periodic Antenna	AL-100	16091	2004-05-01
Com-Power	Biconical Antenna	AB-100	14012	2004-11-02
A.H.System	Horn Antenna (700MHz-18GHz)	SAS-200/571	261	2004-05-30
Com-Power	Antenna, Dipole	AD-100	2219	2003-09-26
Com-Power	Antenna, Dipole	AD-100	2220	2003-09-26
Com-Power	Antenna, Dipole	AD-100	2222	2003-09-26
Com-Power	Antenna, Dipole	AD-100	2228	2003-09-26

* **Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Environmental Conditions

Temperature:	17 °C
Relative Humidity:	45%
ATM Pressure:	1016 mbar

The testing was performed by Snell Leong on 2005-01-11.

Test Results

The measured output power showed as follows:

Mode	Channel	Frequency (MHz)	Output power (dBm)	Limit (dBm)
FRS	1	462.5625	19.1	27
FRS	14	467.7175	19.5	27
GMRS	22	462.725	19.5	47

§2.1046, §95.639(d), and §95.639 (a)(1) – CONDUCTED OUTPUT POWER

Provision Applicable

Per FCC §2.1046 and FCC § 95.639 (d), no FRS unit, under any condition of modulation, shall exceed 0.500W effective radiated power (ERP).

Per FCC §2.1046 and FCC § 95.639 (a) (1), no GMRS unit, under any condition of modulation, shall exceed 50W Carrier Power (average TP during one unmodulated RF cycle) when transmission type A1D, F1D, .G1D, A3E, F3E or G3E.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Test equipment

Manufacturer	Description	Model	Serial Number	Cal. Date
Agilent	Spectrum Analyzer	8564E	3943A01781	2004-10-04
Hewlett Packard	Plotter	HP7470A	N/A	N/A
Com-Power	Biconical Antenna	AB-100	14012	2004-11-02
A.H.System	Horn Antenna (700MHz-18GHz)	SAS-200/571	261	2004-05-30

* **Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Environmental Conditions



Temperature:	17 ° C
Relative Humidity:	45%
ATM Pressure:	1016 mbar


The testing was performed by Snell Leong on 2005-01-11.

Test Results

Frequency (MHz)	CH.	Output Power in dBm	Output Power in W	Limit (W, ERP)
462.560	1	26.17	0.414	0.5
467.703	14	26.00	0.398	0.5
462.733	22	26.00	0.398	0.5

Please refer to the following plots.

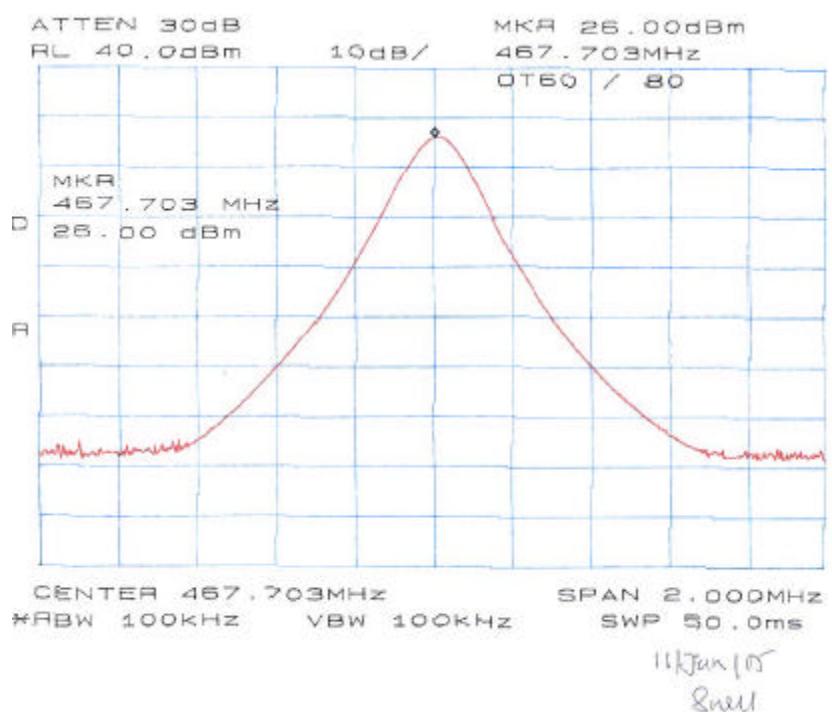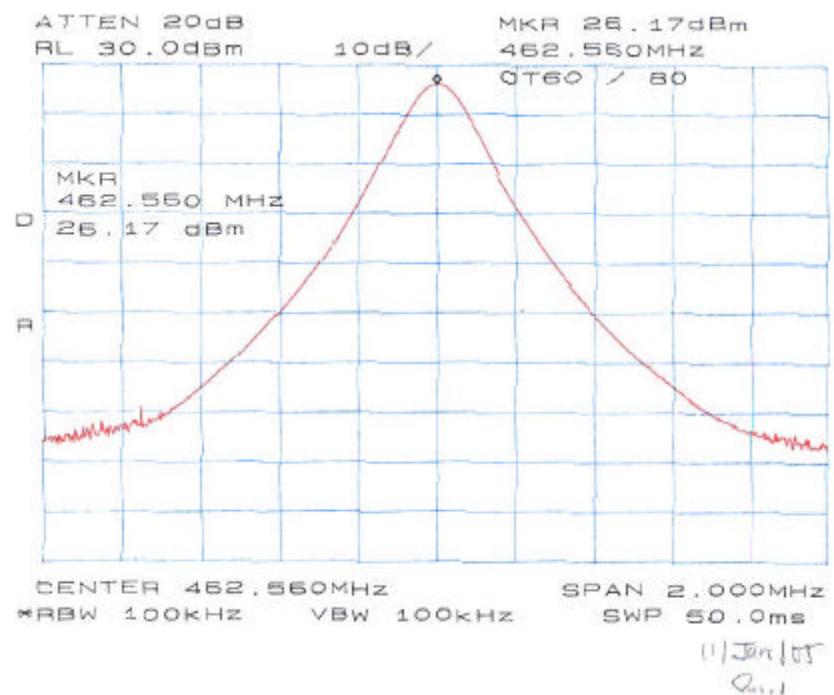

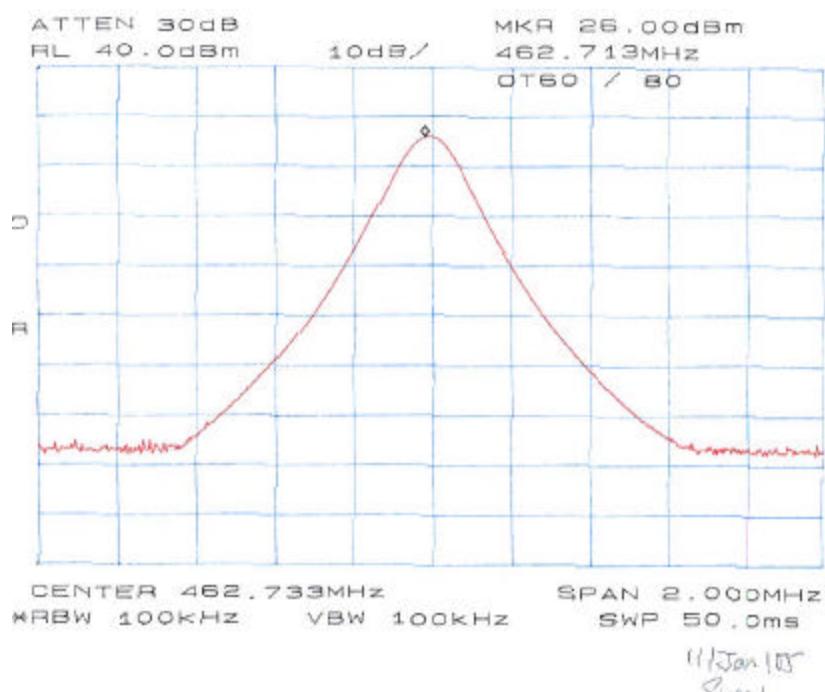

§2.1047, §95.631(d), §95.637(a), and § 95.637(b) - MODULATION CHARACTERISTICS

Standard Applicable

Per FCC § 2.1047 and FCC §95.637 (a), a GMRS transmitter that transmits emission types F3E must not exceed a peak frequency deviation of plus or minus 5 kHz. A FRS unit that transmits emission type F3E must not exceed a peak frequency deviation of plus or minus 2.5 kHz, and the audio frequency response must not exceed 3.125 kHz.

Test Procedure

Audio Frequency Response

The RF output of the transceiver was connected to the input of a FM deviation meter through sufficient attenuation so as not to overload the meter or distort the reading. An audio signal generator was coupled into the external microphone jack of the transceiver, or alternatively, the microphone element was removed the generator output was connected to the microphone connectors.

The audio signal input level was adjusted to obtain 20% of the maximum rated system deviation at 1 kHz, and recorded as DEV_{REF}. With the audio signal generator level unchanged, set the generator frequency between 100 Hz to 20 KHz. The transmitter deviations (DEV_{FREQ}) were measured and the audio frequency response was calculated as

$$20\log_{10} [\text{DEV}_{\text{FREQ}} / \text{DEV}_{\text{REF}}]$$

Audio Low-Pass Filter Response

An audio signal generator and an audio spectrum analyzer were connected to the input and output of the post limiter low pass filter respectively. The audio signal generator frequency was set between 1000 Hz and the upper low pass filter limit. The audio frequency response at test frequency was calculated as

$$\text{LEV}_{\text{FREQ}} - \text{LEV}_{\text{REF}}$$

Modulation Limiting

With the same setup as above, at 5 different modulating frequencies, the output level of the audio generator was varied and the FM deviation level was recorded.

Test Equipment

Manufacturer	Description	Model	Serial Number	Cal. Date
Agilent	Spectrum Analyzer	8564E	3943A01781	2004-10-04
HP	Modulation Analyzer	8901A	2026A00847	2004-08-21
Nanyan	Audio Generator	NY2201	000420	Not Required

* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.


Environmental Conditions


Temperature:	17 $^{\circ}$ C
Relative Humidity:	45%
ATM Pressure:	1016 mbar

The testing was performed by Snell Leong on 2005-01-11.

Test Results

The plot(s) of modulation characteristic is presented hereinafter as reference.

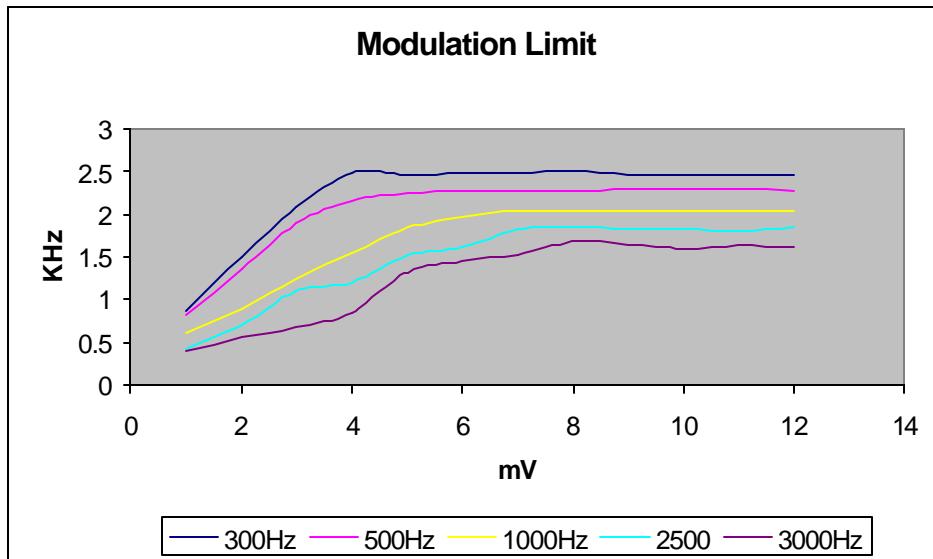

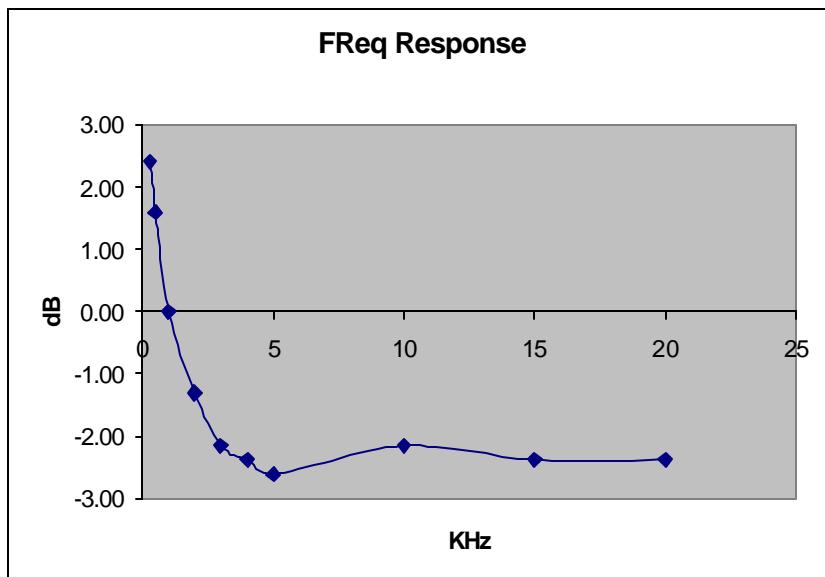

§2.1049, §95.633(a), and § 95.633(c) - OCCUPIED BANDWIDTH OF EMISSION

Standard Applicable

Per FCC §2.1049 and FCC §95.633 (a), the authorized bandwidth for emission type F3E transmitted is 20 kHz.

Per FCC §2.1049 and FCC §95.633 (c), the authorized bandwidth for emission type F3E transmitted by a FRS unit is 12.5 kHz.

Test Procedure

The antenna was disconnected from the transmitter and the short cable was connected to the transmitter RF output.

The RF output was connected to the input of the spectrum analyzer through sufficient attenuation.

The video resolution bandwidth of the spectrum analyzer was set up at least 10 times higher than the authorized bandwidth of the transmitter. With the transmitter keyed, the level of the unmodulated carrier was set to the full scale reference line of the spectrum analyzer. This is used as a 0dB reference for emission mask measurements.

The transmitter was then modulated with a 2500 Hz tone at an input level 20 dB greater than the necessary to produce 50% of rated system deviation. The resolution bandwidth of the spectrum analyzer was set up to 300 Hz and the spectrum of the transmitting signal was recorded. This spectrum was compared to the required emission mask.

Test Equipment

Manufacturer	Description	Model	Serial Number	Cal. Due Date
Agilent	Spectrum Analyzer	8564E	3943A01781	2004-10-04
Nanyan	Audio Generator	NY2201	000420	Not Required
Analyzer, Modulation	HP	8901A	2026A00847	2004-08-21

* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Environmental Conditions



Temperature:	17 °C
Relative Humidity:	45%
ATM Pressure:	1016 mbar

The testing was performed by Snell Leong on 2005-01-11.

Test Results

Test Result: Pass

Please refer the following curve and plots.

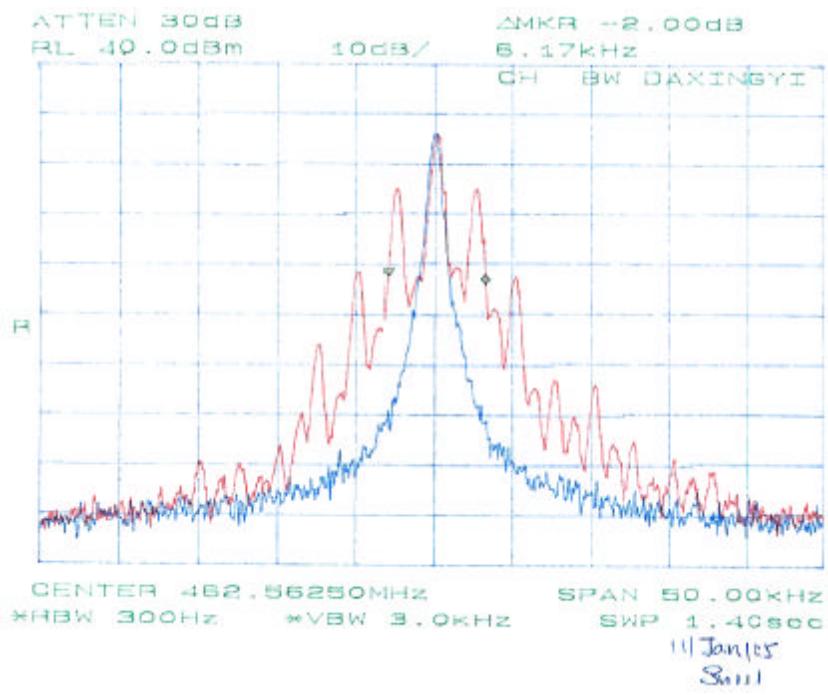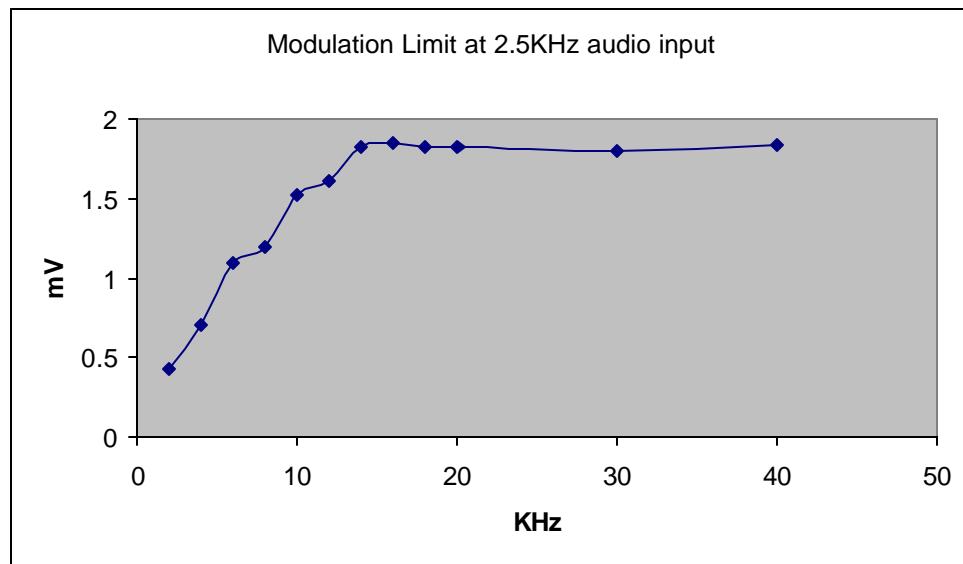

§2.1053 and §95.635(b)(1), §95.635(b)(3), and §95.635(b)(7) - RADIATED SPURIOUS EMISSION

Standard Applicable

Per FCC §95.635 (b)(1), at least 25 dB (decibels) on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth.

Per FCC §95.635 (b)(3), at least 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth.

Per FCC §95.635 (b)(7), at least $43 \pm 10 \log_{10} (T)$ dB on any frequency removed from the center of the authorized bandwidth by more than 250%.

Measurement Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the SA on Max-Hold Mode, and then keep the EUT in transmitting mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.
6. Spurious attenuation limits in dB = $43 + 10\log_{10}(\text{power out in Watts})$

Test Equipment

Manufacturer	Description	Model	Serial Number	Cal. Date
Com-Power	Biconical Antennas	CDI B100/200/300	14012	2004-05-01
Com-Power	Bi-logcon Antenna	3110B	9603-2315	2004-10-11
A.H. System	Horn Antenna	SAS-200	2455	2004-08-02
Hewlett Packard	Spectrum Analyzer	HP8565EC	06042	2004-05-03
Rohde & Schwarz	Generator	SMIQ03	1048004	2004-08-01
Com-Power	Antenna, Dipole	AD-100	2219	2003-09-26
Com-Power	Antenna, Dipole	AD-100	2220	2003-09-26
Com-Power	Antenna, Dipole	AD-100	2222	2003-09-26
Com-Power	Antenna, Dipole	AD-100	2228	2003-09-26

* **Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Environmental Conditions

Temperature:	17 ⁰ C
Relative Humidity:	45%
ATM Pressure:	1016 mbar

The testing was performed by Snell Leong on 2005-01-11.

Test Result

Transmitter:

-21.43 dB at 1387.6875 MHz, Channel 1
-19.93 dB at 1403.1375 MHz, Channel 14
-18.73 dB at 1388.1750 MHz, Channel 22

Receiver: -5.2 dB at 875.00MHz

Transmitter:

EUT				Generator						Standard		
Indicated		Table	Test Antenna	Substitution			Antenna	Cable	Absolute	FCC	FCC	
Frequency MHz	Ampl. dBuV/m	Angle Degree	Height Meter	Polar H/V	Frequency MHz	Level dBm	Polar H/V	Gain Corrected	Loss dB	Level dBm	Limit dBm	Margin dB
CHANNEL 1, LOW FREQUENCY AT 462.5625 MHZ												
462.5625	91.17	0	1	v	462.5625	19.1	v	0	0.64	18.46		
462.5625	82.00	180	1.5	h	462.5625	17.5	h	0	0.64	16.86		
1387.6875	29.80	0	1.2	v	1387.6875	-40.2	v	7.4	1.63	-34.43	-13	-21.43
1387.6875	28.80	180	1	h	1387.6875	-45.0	h	7.4	1.63	-39.23	-13	-26.23
925.1250	30.50	0	1.8	v	925.1250	-50.2	v	0	0.80	-51.00	-13	-38.00
925.1250	29.60	180	1.5	h	925.1250	-55.3	h	0	0.80	-56.10	-13	-43.10
CHANNEL 14, HIGH FREQUENCY AT 467.7125 MHZ												
467.7125	92.00	0	1.5	v	467.7125	19.5	v	0	0.64	18.86		
467.7125	81.10	150	2.2	h	467.7125	17.1	h	0	0.64	16.46		
1403.1375	31.50	0	1.5	v	1403.1375	-38.7	v	7.4	1.63	-32.93	-13	-19.93
1403.1375	29.80	150	2.2	h	1403.1375	-42.5	h	7.4	1.63	-36.73	-13	-23.73
935.4250	32.15	0	1.8	v	935.4250	-47.6	v	0	0.80	-48.40	-13	-35.40
935.4250	30.20	150	2.2	h	935.4250	-53.2	h	0	0.80	-54.00	-13	-41.00
CHANNEL 22, FREQUENCY AT 462.725 MHZ												
462.7250	92.00	0	1.5	v	462.7250	19.5	v	0	0.64	18.86		
462.7250	84.67	180	2.2	h	462.7250	17.8	h	0	0.64	17.16		
1388.1750	32.50	0	1.5	v	1388.1750	-37.5	v	7.4	1.63	-31.73	-13	-18.73
1388.1750	31.50	180	2.2	h	1388.1750	-40.1	h	7.4	1.63	-34.33	-13	-21.33
925.4500	33.80	0	1.8	v	925.4500	-45.6	v	0	0.80	-46.40	-13	-33.40
925.4500	30.20	180	2.2	h	925.4500	-53.2	h	0	0.80	-54.00	-13	-41.00

Receiver:

Frequency MHz	Reading dBuV	Direction Degree	Height Meter	Polar H / V	Antenna Loss dB	Cable loss dB	Amplifier dB	Correction Factor dBuV/m	15B Limit	15B Margin
875	38.7	320	1.5	V	22.8	7.0	27.7	40.8	46	-5.2
470.4	46.7	90	3	V	16.4	4.7	28.6	39.2	46	-6.8
875	35.1	180	1.5	H	22.8	7.0	27.7	37.2	46	-8.8
470.4	43.5	330	2.8	H	16.4	4.7	28.6	36.0	46	-10.0
441.03	42.1	30	1.2	V	16.2	4.6	28.3	34.6	46	-11.4
441.03	35.6	45	2.8	H	16.2	4.6	28.3	28.1	46	-17.9

Note: No Preamplifier Used. The EUT was tested in three orthogonal planes.

§2.1051 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard

Requirements: CFR 47, § 2.1051.

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1057.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

Measurement Procedure

7. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
8. Position the EUT as shown without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
9. Set the SA on Max-Hold Mode, and then keep the EUT in transmitting mode. Record all the signals from each channel until each one has been recorded.
10. Set the SA on View mode and then plot the result on SA screen.
11. Repeat above procedures until all frequencies measured were complete.
12. Spurious attenuation limits in dB = $43 + 10\log_{10}(\text{power out in Watts})$

Test Equipment

Manufacturer	Description	Model No.	Serial No.	Calibration Date
Agilent	Spectrum Analyzer	8564E	3943A01781	2004-10-04

* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.



Environmental Conditions


Temperature:	17 °C
Relative Humidity:	45%
ATM Pressure:	1016 mbar

The testing was performed by Snell Leong on 2005-01-11.

Test Result

Please refer to the following plot(s).

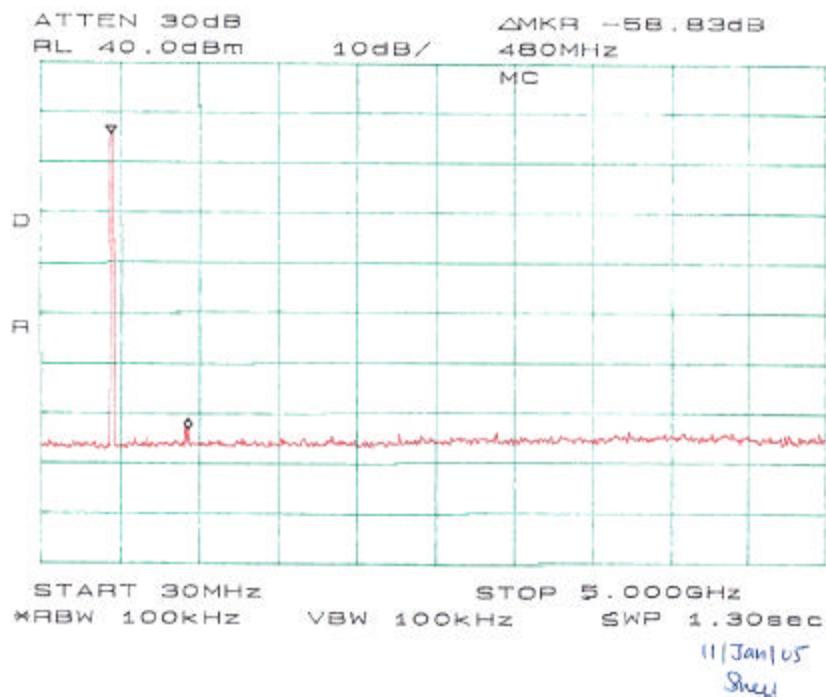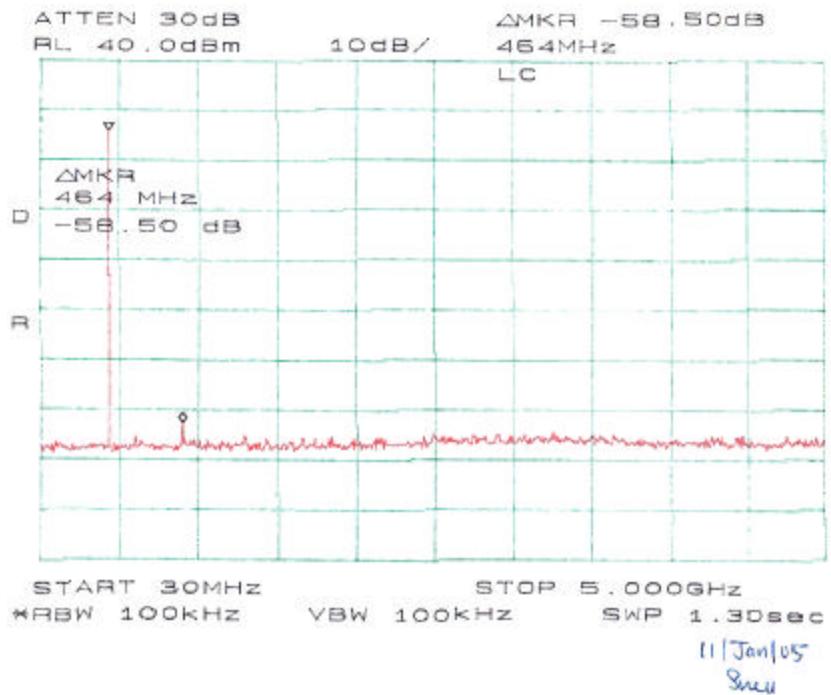

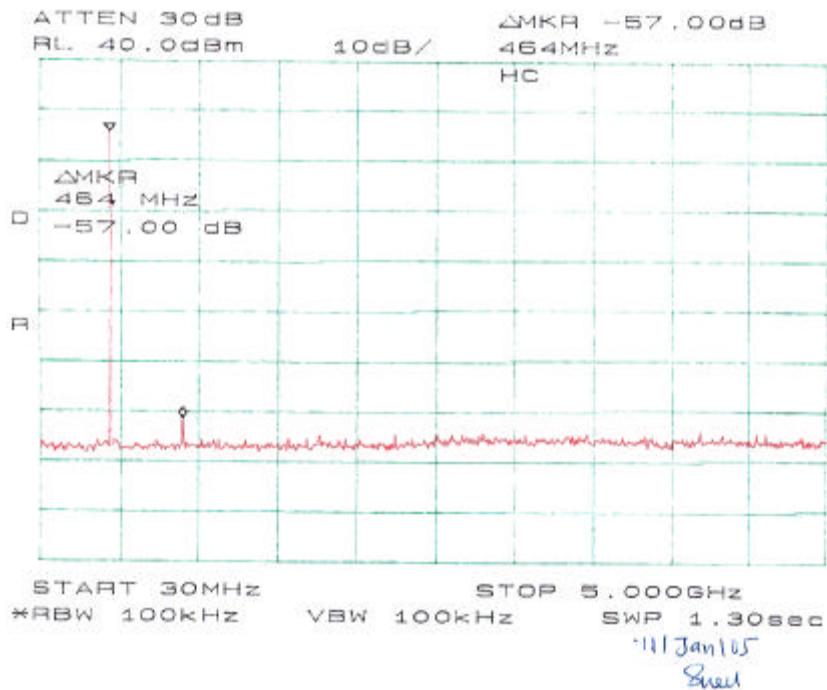

§2.1055, §95.621(b), and §95.627(b) - FREQUENCY STABILITY MEASUREMENT

Standard Applicable

According to FCC §2.1055(a)(1), the frequency stability shall be measured with variation of ambient temperature from -30°C to $+50^{\circ}\text{C}$, and according to FCC 2.1055(d)(2), the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point which is specified by the manufacturer.

According to FCC §95.621 (a), the GMRS transmitter channel frequencies (reference frequencies from which the carrier frequency, suppressed or otherwise, may not deviate by more than the specified frequency to tolerance) are 462.5500, 462.5625, 462.5750, 462.5875, 462.6000, 462.6125, 462.6250, 462.6375, 462.6500, 462.6625, 462.6750, 462.6875, 462.7000, 462.7125, 462.7250, 467.5500, 467.5750, 467.6000, 467.6250, 467.6500, 467.6750, 467.7000 and 467.7250.

According to FCC §95.621 (b), each GMRS transmitter for mobile station, small base station and control station operation must be maintained within a frequency tolerance of 0.0005%. Each GMRS transmitter for base station (except small base), mobile relay station or fixed station operation must be maintained within a frequency tolerance of 0.00025%.

According to FCC §95.627, each FRS unit must be maintained within a frequency tolerance of 0.00025%.

Test Procedure

Frequency stability versus environmental temperature

The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feedthrough attenuators. The EUT was placed inside the temperature chamber.

After the temperature stabilized for approximately 20 minutes, the frequency of the output signal was recorded from the counter.

Frequency Stability versus Input Voltage

At room temperature ($25 \pm 5^{\circ}\text{C}$), an external variable DC power supply was connected to the EUT. The frequency of the transmitter was measured for 115%, 100% and 85% of the nominal operating input voltage.

Test Equipment

Manufacturer	Description	Model No.	Serial No.	Calibration Date
HP	Counter, Microwave Frequency	5342A	2232A06380	2004-09-07
Tenny	Temperature Chamber	Versa	4581	2004-04-23

* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

Environmental Conditions

Temperature:	17 ⁰ C
Relative Humidity:	45%
ATM Pressure:	1016 mbar

The testing was performed by Snell Leong on 2005-01-11.

Test Results

Extreme Temperature

Temperature ⁰ C	Spec Freq (MHz)	Measured Freq (Hz)	Freq error %	Limit
-30	462.5625	462561490	0.00022	0.00025
-20	462.5625	462561680	0.00018	0.00025
-10	462.5625	462561890	0.00013	0.00025
0	462.5625	462562010	0.00011	0.00025
10	462.5625	462562030	0.00010	0.00025
20	462.5625	462562054	0.00010	0.00025
30	462.5625	462562020	0.00010	0.00025
40	462.5625	462561885	0.00013	0.00025
50	462.5625	462561490	0.00022	0.00025

Extreme Low Voltage (3.6v)

Time (S)	Spec Freq (MHz)	Measured Freq (Hz)	Freq error %	Limit
2	462.5625	462562783	0.00006	0.00025
5	462.5625	462562680	0.00004	0.00025
10	462.5625	462562680	0.00004	0.00025