

# Certification of Compliance

## CFR 47 Part 15 Subpart B

Test Report File No. : 05-IST-0056

Date of Issue : January 15, 2005

Model(s) : AH120A

Kind of Product : Portable Multimedia Player

Applicant : BITWIRE Corp.

Address : RM1702, East B/D IT Venture tower, 78 Garak-Dong, SongPa-Ku, Seoul, Korea

Manufacturer : BITWIRE Corp.

Address : RM1702, East B/D IT Venture tower, 78 Garak-Dong, SongPa-Ku, Seoul, Korea

### Test Result

Positive

Negative

Reviewed By



S.J.CHO / EMC Group Manager

Approved By



J.H.LEE / Chief

### Comment(s)

- Investigations requested : Measurement to the relevant clauses of FCC rules and regulations Part 15 Subpart B - Unintentional Radiators, Class B.
- The test report with appendix consists of 23 pages.
- The test result only responds to the tested sample.
- It is not allowed to copy this report even partly without the allowance of IST EMC Laboratory.
- This equipment as for has been shown to be capable of continued compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4 2001.



## TABLE OF CONTENTS

<b>Table of contents</b>	2
<b>Information of test laboratory, Environmental conditions, Power used, Product information</b>	3
<b>Descriptions of test</b>	
Conducted Emission	4
Radiated Emission	5
<b>Equipment Under Test</b>	6
<b>Summary</b>	7

### ■ Test Conditions and Data - Emissions

◆ Conducted Emissions	0.15MHz - 30MHz	Applicable
Test Conditions / Data and Plots		8-12
◆ Radiated Emissions	30MHz - 1GHz	Applicable
Test Conditions / Data and Plots		13-15

<b>Appendix</b>	A. The Photos of Test Setup	16-19
	B. The Photos of Equipment Under Test	20-23

Note:

## INFORMATIONS OF TEST LABORATORY

EMC LABORATORY of IST Co., Ltd. (*FCC Filing Lab.*)

San 21-8, Goan-Ri, Baekam-Myun, Yongin-City

Kyonggi-Do, 449-860, Korea

TEL : +82 31 333 4093 FAX : +82 31 333 4094

## ENVIRONMENTAL CONDITIONS

Temperature 17.5 °C

Humidity 35 %

Atmospheric pressure 1014 mbar

## POWER SUPPLY SYSTEM USED

Power supply system AC 120Vac, 60Hz  
(Refer to the product information)

## PRODUCT INFORMATION

Capacity : 20GB Hard Disk  
Interface : USB 2.0 interface. Compatible with USB 1.1, PC & MAC  
Video playback : DVI file format, reads XviD and DivX 3.X, 4.X, 5.X  
MPEG1, 2, 4 with MP3 stereo sound, near-DVD quality  
resolution, up to 1920x1080@30f/s  
Music playback : Stereo MP3 decoding @ 30-320kb/s CBR & VBR, WMA  
Photo viewer : JPEG(excluding progressives)  
Display : 2.2" color LCD(QVGA) 240xRGBx320 pixels(260,000 color),  
TV out (NTSC/PAL)  
AV Connections : Stereo analog Line Out & digital SPDIF Line Out.  
Composite Video/Earphone/Line Out jack/Built-in speaker  
Playback Autonomy : Up to 10 hours playing MP3 files or 5 hours for video on  
built-in LCD  
Scalability : Downloadable firmware updates from [www imuon com](http://www imuon com)  
Power Source : Rechargeable Lithium polymer battery/AC adapter(DC 5.0V,  
2A)/USB port/24Pin Serial port  
Power Supply Adapter : Model - TC10A-050(Fairway Electronic Co., Ltd.)  
Input - 100~240Vac, 1.0A, 50~60Hz  
Output - 5Vdc, 2.0A

Dimensions & Weight: 110(L)x64(W)x23(H)mm(4.35"x2.56"x0.8"), 203g(7.17 oz)

- EMC suppression device is not used during the test.

- Please refer to user's manual.


## DESCRIPTIONS OF TEST

### Conducted Emissions:


The measurement were performed over the frequency range of 0.15MHz to 30MHz using a  $50\Omega/50\mu\text{H}$  LISN as the input transducer to a Spectrum Analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 10KHz or for "quasi-peak" & "Average" within a bandwidth of 9KHz.

#### -Procedure of Test

The line-conducted facility is located inside a shielded room No.1. A 1m X 1.5m wooden table 80cm height is placed 40cm away from the vertical wall and 1.5m away from the other wall of the shielded room. The R/S ESH3-Z5 and EMCO 3825/2 LISN are bonded to bottom of the shielded room. The EUT is located on the wooden table with distance more than 80cm from the LISN and powered from the EMCO LISN .The peripheral equipment is powered from the other LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner  $\phi$  1.2cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the EMCO LISN. All interconnecting cables more than 1m were shortened by non-inductive bundling to a 1m length. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating conditions. The RF output of the LISN was connected to the R/S receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using Quasi-Peak mode by manual measurement, after scanned by automatic Peak mode for frequency range from 0.15 to 30MHz. The bandwidth of the receiver was set to 10kHz. The EUT, peripheral equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

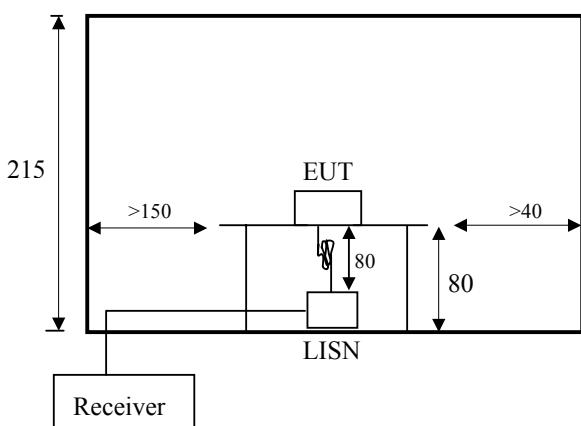

< Side View >

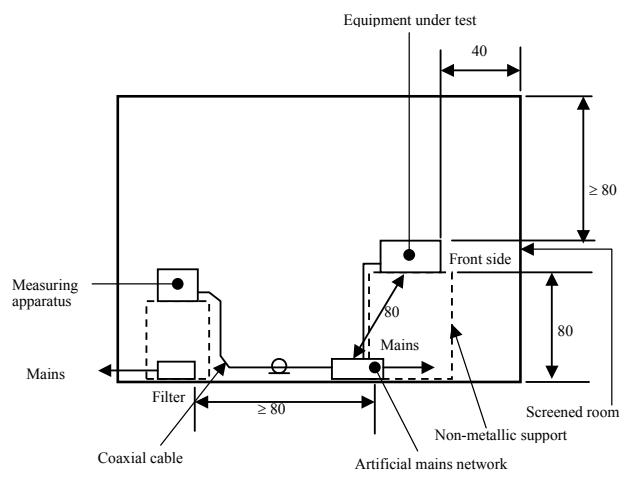

< Concept Drawing >


## DESCRIPTION OF TEST

### Radiated Emissions:

The measurement was performed over the frequency range of 30MHz to 1GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurement was made with the detector set for "quasi-peak" within a bandwidth of 120KHz.

#### -Procedure of Test

Preliminary measurements were made at 3 meter using bi-conical and log-periodic antennas, and spectrum analyzer to determine the frequency producing the max. emission in anechoic chamber. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turn-table azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30MHz to 300MHz using S/B bi-conical antenna and 300 to 1000MHz using S/B log-periodic antenna. Above 1GHz, linearly polarized double ridge horn antennas were used. Final measurements were made at open site with 3-meters test distance using S/B bi-log antenna or horn antenna. The OATS have been verified in regular for its normalized site attenuation. The test equipment was placed on a wooden table. Sufficient time for the EUT, peripheral equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120kHz or 1MHz depending on the frequency of type of signal. The EUT, peripheral equipment and interconnecting cables were re-configured to the set-up producing the max. emission for the frequency and were placed on top of a 0.8-meter high nonmetallic 1 x 1.5 meter table. The EUT, peripheral equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation to the EUT and/or peripheral equipment and changing the polarity of the antenna, whichever determined the worst-case emission.

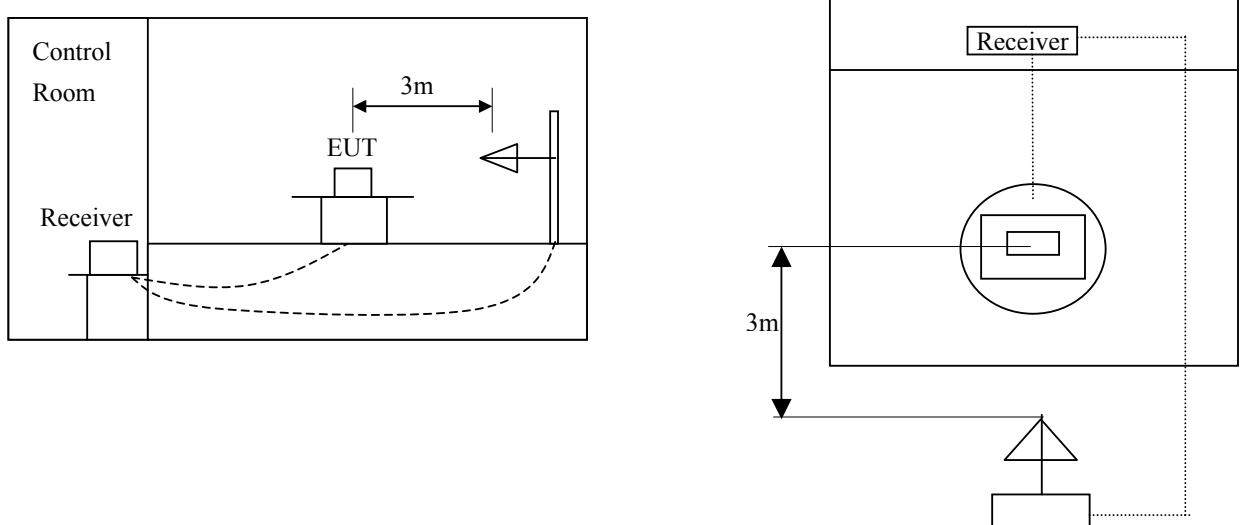

## Equipment Under Test

### EUT Type :

- Table-Top.
- Floor-Standing.
- Table-Top and Floor-Standing(Combination).

### Operation - mode of the E.U.T. :

The equipment under test was operated during the measurement under following conditions :

- Standby Mode
- Operational Condition :
  - File Playback mode
  - File Up/Download mode

### Configuration of the equipment under test :

Following peripheral devices and interface cables were connected during the measurement :

Equipment	Type	Brand	Serial No.
PC	Vectra VL420 MT	HP	SG01301176
Keyboard	SK-2502C	HP	M000375059
PS/2 Mouse	M-S48A	HP	LZA00850320
Printer	A0302384	Northern Telecom	26633S60168
Serial Mouse	M-M28	Logitech	LCA53305547
LCD Monitor	SL703C	Daewoo Electronics	N/A

### Connecting Interface Cables :

Unshielded Adapter power cable : 1.8 m

Shielded monitor's signal cable (with two ferrite core) : 1.5 m

Shielded Printer's signal cable (with two ferrite core) : 1.8 m

Unshielded AV cable (with one ferrite core) : 1.5 m

Unshielded USB cable (with two ferrite core) : 1.0 m

Note :

## SUMMARY

### Emissions

#### ■ Conducted Emission

The requirements are

MET

Not MET

Minimum limit margin

8.7 dB at 26.225 MHz

Maximum limit exceeding

**Remarks : With neutral phase, for average detect mode. (File Playback mode)**

Find the test data in following pages 9 to 12.

#### ■ Radiated Emission

The requirements are

MET

Not MET

Minimum limit margin

8.6 dB at 198.0 MHz

Maximum limit exceeding

**Remarks : File Playback mode.**

Find the test data in following page 14 to 15.

### Test Date

Begin of Testing : Jan. 06, 2005

End of Testing : Jan. 13, 2005

Prepared By

Note :



- means the test is applicable,
- is not applicable.

S.M.Kim / Research Engineer

## TEST CONDITIONS AND DATA

## Conducted Emissions

[Applicable]

#### ◆ Test Equipment Used

Model Name	Description	Manufacture	Calibration Date	Serial Number
ESH3	Test Receiver	Rohde & Schwarz	Jul. 15, 2004	892108/018
3725/2	LISN	EMCO	Jul. 15, 2004	9101-2068
KNW-407	LISN	Hyup-Rip	Jul. 15, 2004	8-883-10
ESH3-Z2	Pulse Limiter	Rohde & Schwarz	Jul. 15, 2004	357.8810.52

#### ◆ Test Accessories Used

Type	Manufacturer
Aneroid Barometer	Sato
Hygrometer	Sato

## ◆ Test Program

File Playback Mode  
File Up/Download Mode

◆ Test Date


Jan. 06, 2005

## ◆ Test Area

### Shielded room No.1

*Note : The equipment used is calibrated in regular for every year.*

Conducted Emissions

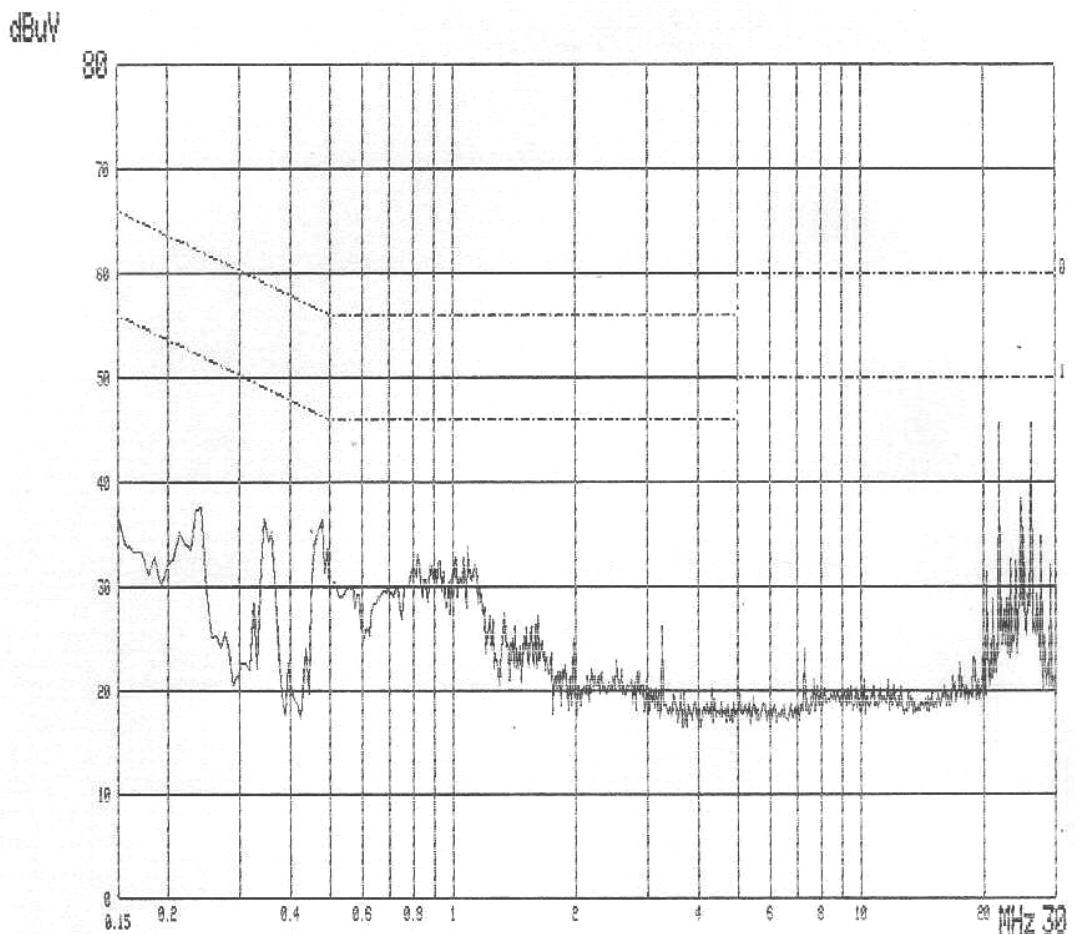


MODEL NAME : AH120A (VIDEO FILE PLAYBACK MODE)  
120Vac 60Hz PHASE : LIVE

Freq. [MHz]	Measurement [dB $\mu$ V]		Limit [dB $\mu$ V]		Insertion Loss	Cable Loss	Result [dB $\mu$ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average			Q-peak	Average	Q-peak	Average
0.150	30.8	8.7	66.0	56.0	0.1	0.5	31.4	9.3	34.6	46.7
0.222	31.7	23.4	62.7	52.7	0.1	0.4	32.2	23.9	30.5	28.8
0.331	28.3	14.1	59.4	49.4	0.1	0.4	28.8	14.6	30.6	34.8
1.101	27.7	17.6	56.0	46.0	0.0	0.5	28.2	18.1	27.8	27.9
21.864	42.1	34.7	60.0	50.0	0.1	0.7	42.9	35.5	17.1	14.5
26.234	42.6	38.5	60.0	50.0	0.2	0.7	43.5	39.4	16.5	10.6

Note :

Conducted Emissions

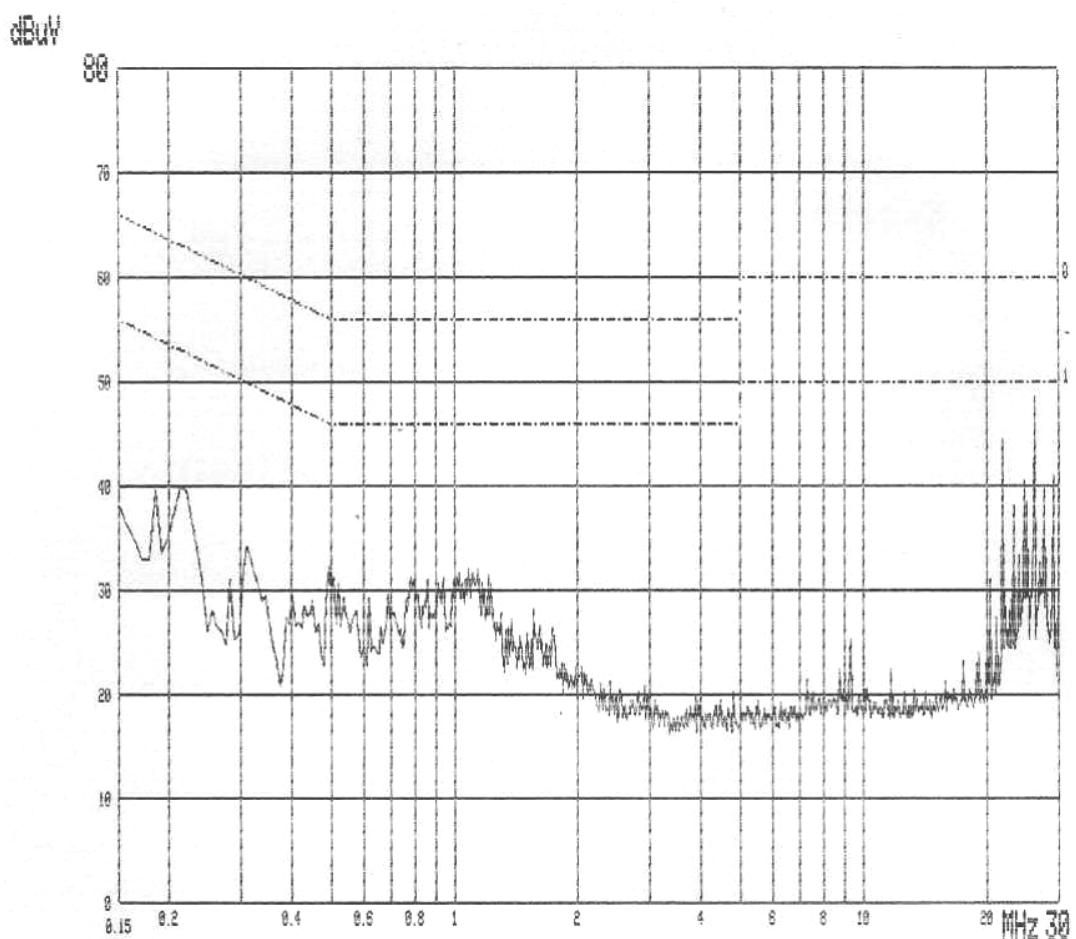


---  
MODEL NAME : AH120A (VIDEO FILE PLAYBACK MODE)  
120Vac 60Hz PHASE : NEUTRAL

Freq. [MHz]	Measurement [dB $\mu$ V]		Limit [dB $\mu$ V]		Insertion Loss	Cable Loss	Result [dB $\mu$ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average			Q-peak	Average	Q-peak	Average
0.150	30.8	8.7	66.0	56.0	0.1	0.5	31.4	9.3	34.6	46.7
0.222	36.3	28.5	62.7	52.7	0.1	0.4	36.8	29.0	25.9	23.7
0.328	27.1	14.5	59.5	49.5	0.1	0.4	27.6	15.0	31.9	34.5
1.136	26.8	19.0	56.0	46.0	0.0	0.5	27.3	19.5	28.7	26.5
21.857	42.3	32.5	60.0	50.0	0.2	0.7	43.2	33.4	16.8	16.6
26.225	45.5	40.3	60.0	50.0	0.3	0.7	46.5	41.3	13.5	8.7

Note :

Conducted Emissions

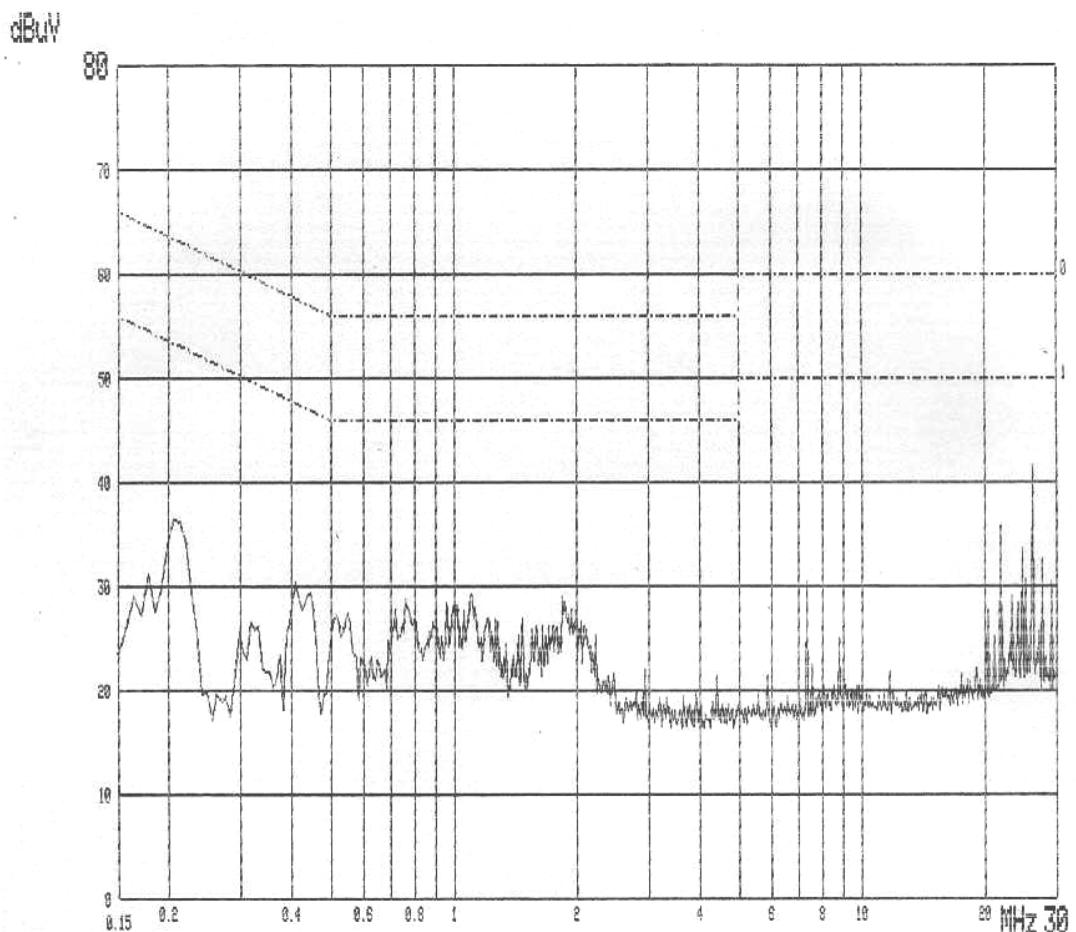


---  
MODEL NAME : AH120A (FILE UP/DOWNLOAD MODE)  
120Vac 60Hz PHASE : LIVE

Freq. [MHz]	Measurement [dB $\mu$ V]		Limit [dB $\mu$ V]		Insertion Loss	Cable Loss	Result [dB $\mu$ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average			Q-peak	Average	Q-peak	Average
0.150	24.7	9.3	66.0	56.0	0.1	0.5	25.3	9.9	40.7	46.1
0.201	32.7	22.3	63.6	53.6	0.1	0.5	33.3	22.9	30.3	30.7
0.432	24.5	13.4	57.2	47.2	0.1	0.4	25.0	13.9	32.2	33.3
1.109	25.0	16.5	56.0	46.0	0.0	0.5	25.5	17.0	30.5	29.0
21.883	34.7	31.9	60.0	50.0	0.1	0.7	35.5	32.7	24.5	17.3
26.260	38.8	32.2	60.0	50.0	0.2	0.7	39.7	33.1	20.3	16.9

Note :

**Conducted Emissions**

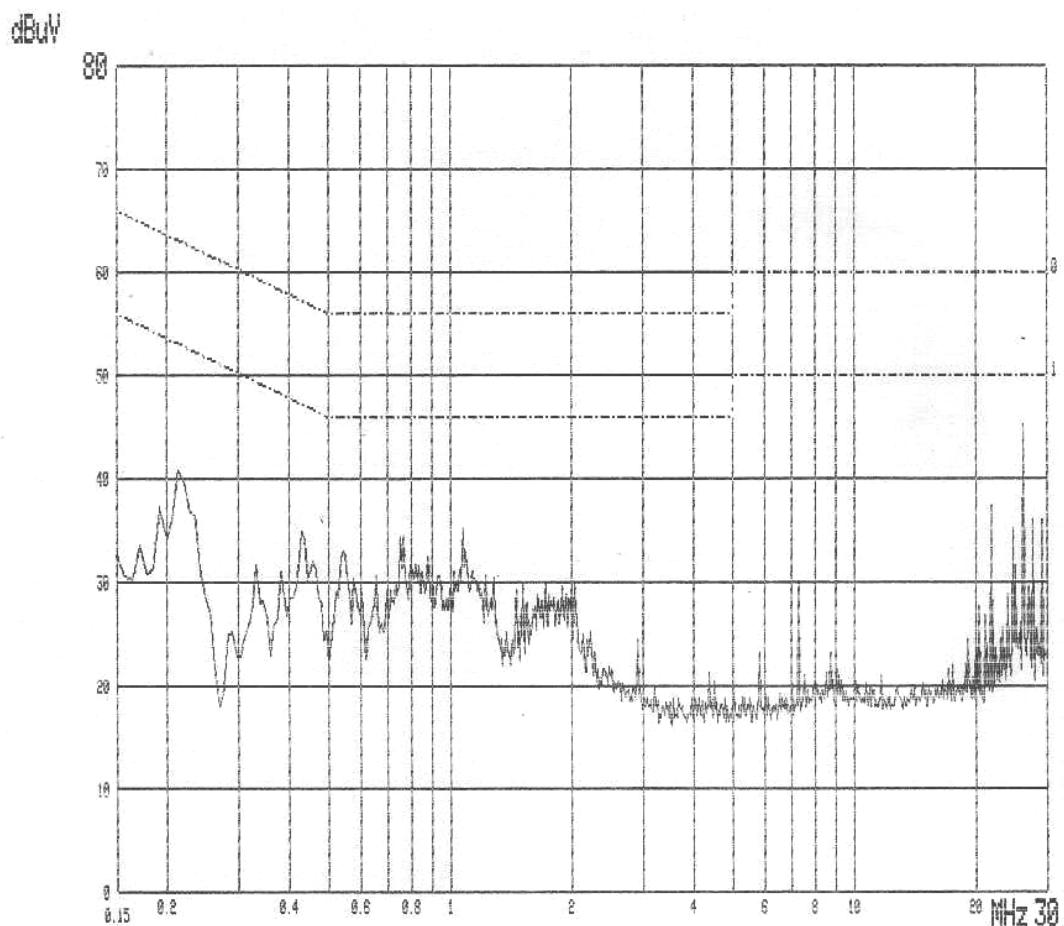

----  
MODEL NAME : AH120A (FILE UP/DOWNLOAD MODE)  
120Vac 60Hz PHASE : NEUTRAL

Freq. [MHz]	Measurement [dB $\mu$ V]		Limit [dB $\mu$ V]		Insertion Loss [dB]	Cable Loss [dB $\mu$ V]	Result [dB $\mu$ V]		Margin [dB]	
	Q-peak	Average	Q-peak	Average			Q-peak	Average	Q-peak	Average
0.150	23.5	8.7	66.0	56.0	0.1	0.5	24.1	9.3	41.9	46.7
0.201	34.9	19.1	63.6	53.6	0.1	0.5	35.5	19.7	28.1	33.9
0.444	28.7	19.1	57.0	47.0	0.1	0.4	29.2	19.6	27.8	27.4
0.817	26.9	20.5	56.0	46.0	0.0	0.4	27.3	20.9	28.7	25.1
21.864	34.6	30.8	60.0	50.0	0.2	0.7	35.5	31.7	24.5	18.3
26.236	42.1	37.8	60.0	50.0	0.3	0.7	43.1	38.8	16.9	11.2

Note :

## TEST CONDITIONS AND DATA

## Radiated Emission

[Applicable]

#### ◆ Test Equipment Used

Name	Type	Manufacturer	Calibration. Date	Serial Number
ESVP	Test Receiver	Rohde & Schwarz	Jul. 15, 2004	861744/004
VULB 9160	Antenna	Schwarzbeck	Jun. 10, 2004	3047

#### ◆ Test Accessories Used

Type	Manufacturer
Aneroid Barometer	Sato
Hygrometer	Sato

## ◆ Test Program

File Playback Mode  
File Up/Download Mode

◆ Test Date

Jan. 10, 2005

## ◆ Test Area

Open site No.2

*Note : The equipment used is calibrated in regular for every year.*


**Radiated Emissions**

Mode	Freq. [MHz]	Reading [dBuV]	Antenna Factor [dB/m]	Cable Loss [dB]	Polar. [H/V]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]
File Playback mode	34.4	11.4	13.4	1.0	V	25.8	40.0	14.2
	68.1	18.8	10.0	1.5	V	30.3	40.0	9.7
	126.7	16.8	10.4	2.1	H	29.3	43.5	14.2
	130.8	17.2	10.5	2.1	V	29.8	43.5	13.7
	176.2	15.0	11.4	2.4	V	28.8	43.5	14.7
	198.0	23.8	8.6	2.5	V	34.9	43.5	8.6
	239.8	12.4	10.1	2.8	H	25.3	46.0	20.7
	297.0	20.5	11.7	3.2	H	35.4	46.0	10.6
File Up/Download mode	34.4	16.8	13.4	1.0	V	31.2	40.0	8.8
	68.0	17.2	10.0	1.5	V	28.7	40.0	11.3
	169.9	15.2	12.3	2.3	V	29.8	43.5	13.7
	187.5	16.0	9.4	2.4	V	27.8	43.5	15.7
	203.9	14.3	8.4	2.5	V	25.2	43.5	18.3
	240.0	13.6	10.2	2.9	H	26.7	46.0	19.3
	297.0	18.4	11.7	3.2	H	33.3	46.0	12.7
	444.1	12.1	13.9	4.4	H	30.4	46.0	15.6

*End of data.*

*Note:*

## MEASUREMENT OF DISTURBANCE RADIATION

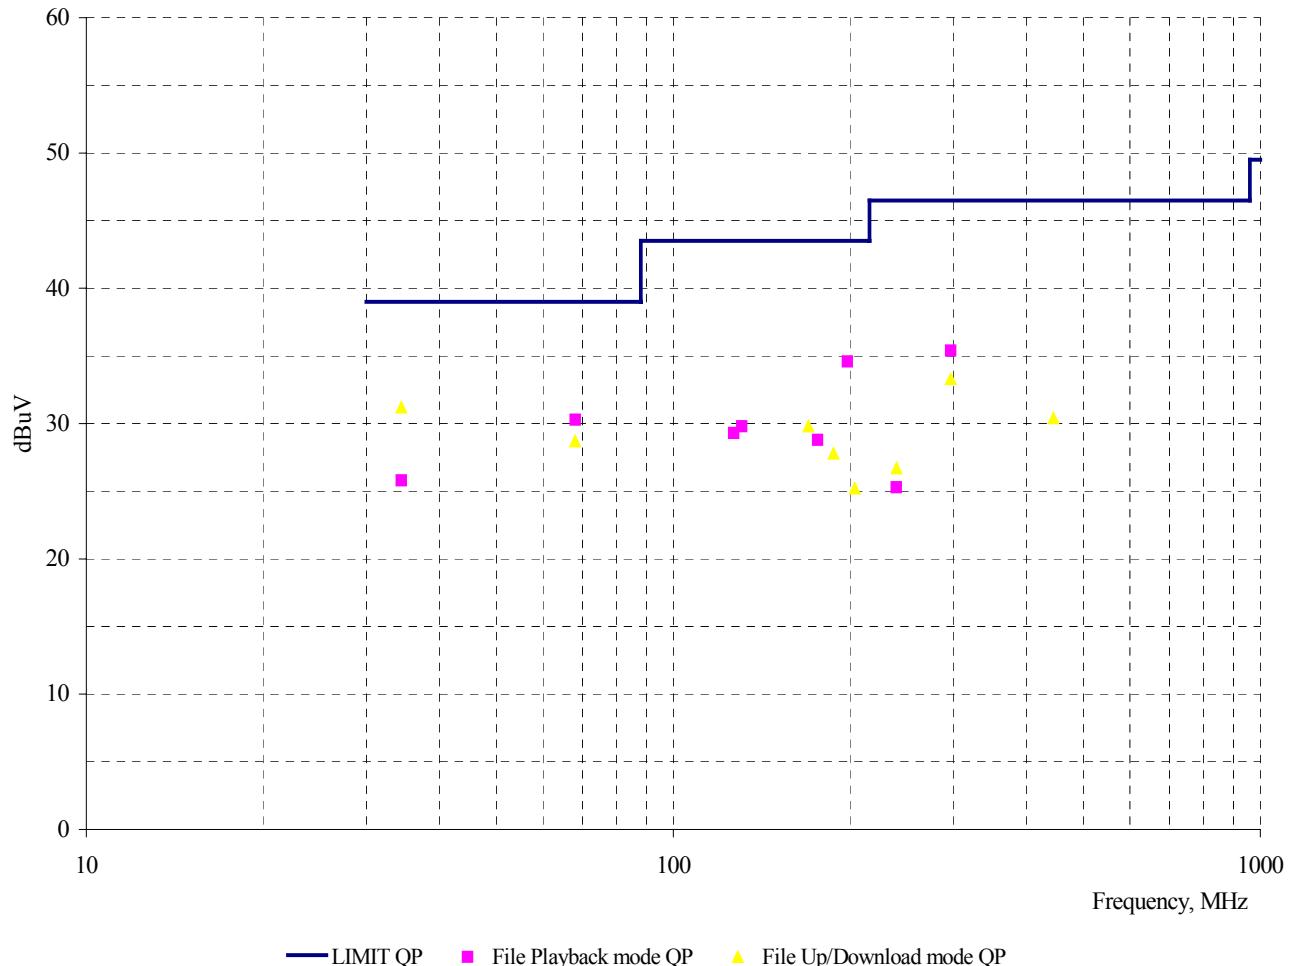

**Appendix A. The Photos of Test Setup**



**Conducted Emissions (File Playback mode) - Front View**



**Conducted Emissions (File Playback mode) - Rear View**

**Appendix A. The Photos of Test Setup**



**Conducted Emissions (File up/download mode) - Front View**




**Conducted Emissions (File up/download mode) - Rear View**

**Appendix A. The Photos of Test Setup**



**Radiated Emissions (File Playback mode) - Front View**

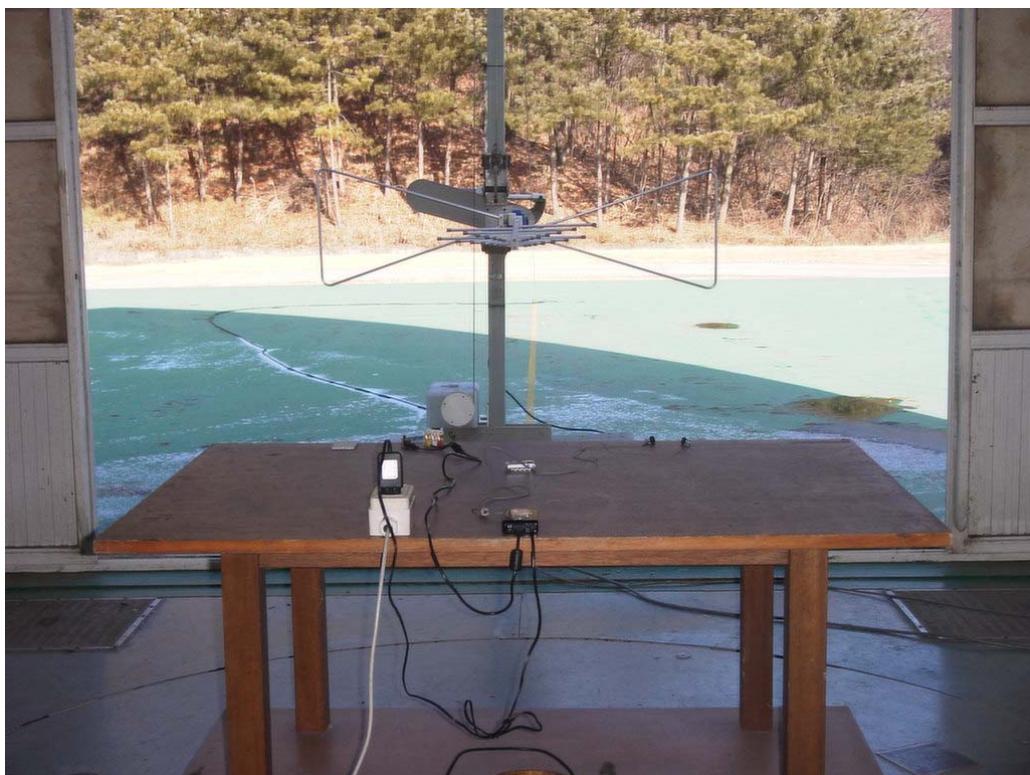

**Radiated Emissions (File Playback mode) - Rear View**

**Appendix A. The Photos of Test Setup**



**Radiated Emissions (File up/download mode) - Front View**



**Radiated Emissions (File up/download mode) - Rear View**

**Appendix B. The Photos of Equipment Under Test**



Front View



Rear View

Appendix B. The Photos of Equipment Under Test



Adapter



Remote Controller

Appendix B. The Photos of Equipment Under Test



Earphone



A/V Cable

**Appendix B. The Photos of Equipment Under Test**



USB Cable